

EMC TEST REPORT



Report No.: 14021236-FCC-E

Supersede Report No.: N/A

Applicant	Shandong Bittel Electronics Co.,Ltd.	
Product Name	Wireless Access Point	
Main Model	Lim-AP	
Test Standard	FCC Part 15 Subpart B Class B:2014, ANSI C63.4: 2009	
Test Date	January 17 to January 18, 2015	
Issue Date	January 29, 2015	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification	☒	
Equipment did not comply with the specification	☐	
		
Herith Shi Test Engineer	Alex Liu Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and

Technology Development Park, Nanjing, China

Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	14021236-FCC-E
Page	3 of 26

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS.....	11
ANNEX A. TEST INSTRUMENT	13
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	14
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	22
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....	25
ANNEX E. DECLARATION OF SIMILARITY	26

Test Report No.	14021236-FCC-E
Page	5 of 26

1. Report Revision History

Report No.	Report Version	Description	Issue Date
14021236-FCC-E	NONE	Original	January 29, 2015

2. Customer information

Applicant Name	Shandong Bittel Electronics Co.,Ltd.
Applicant Add	No.1 N. Rizhao Rd., Rizhao,Shandong,China
Manufacturer	Shandong Bittel Electronics Co.,Ltd.
Manufacturer Add	No.1 N. Rizhao Rd., Rizhao,Shandong,China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

4. Equipment under Test (EUT) Information

Description of EUT:	Wireless Access Point
Main Model:	Lim-AP
Serial Model:	N/A
Date EUT received:	December 31, 2014
Test Date(s):	January 17 to January 18, 2015
Antenna Gain:	WIFI ANT1#: 3 dBi WIFI ANT2#: 3 dBi
Type of Modulation:	802.11b/g/n: DSSS/OFDM
RF Operating Frequency (ies):	802.11b/g/n(20M): 2412-2462 MHz(TX/RX) 802.11n(40M): 2422-2452 MHz (TX/RX)
Number of Channels:	802.11b/g/n(20M): 11CH 802.11n(40M): 7CH
Port:	RJ45 Port *2
Input Power:	Power Supply By 48V 500mA POE
Trade Name :	Limark
FCC ID:	WI6LIM-AP

Test Report No.	14021236-FCC-E
Page	7 of 26

5. Test Summary

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2009	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2009	Radiated Emissions	Compliance

Measurement Uncertainty


Test Item	Description	Uncertainty
Radiated Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 18, 2015
Tested By :	Herith Shi


Requirement(s):

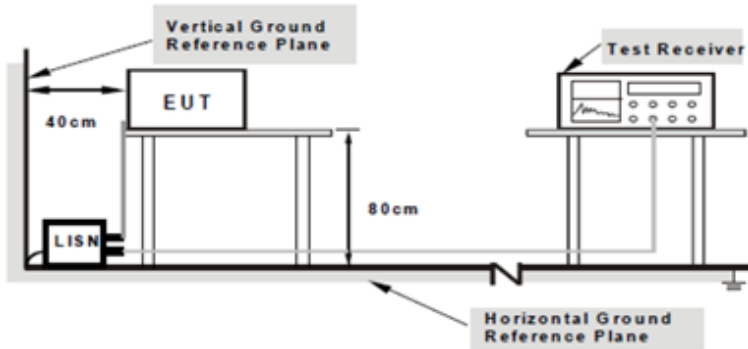Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	1. For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☒														
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBμV)												
				QP	Average												
		0.15 ~ 0.5		66 – 56	56 – 46												
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup																	
		Note: 1.Support units were connected to second LISN.															
		2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.															
Procedure	2.	The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.															
	3.	The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.															
	4.	The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.															
	5.	All other supporting equipment were powered separately from another main supply.															
	6.	The EUT was switched on and allowed to warm up to its normal operating condition.															
	7.	A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.															
	8.	High peaks, relative to the limit line, were then selected, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz.															
	9.	Steps 6-7 were repeated for the LIVE line (for AC mains) or DC line (for DC power).															

Test Report No.	14021236-FCC-E
Page	9 of 26

Remark	
Result	☒ Pass ☐ Fail
Test Data	☒ Yes ☐ N/A
Test Plot	☒ Yes ☐ N/A

Test Mode:	Transmitting Mode
------------	-------------------

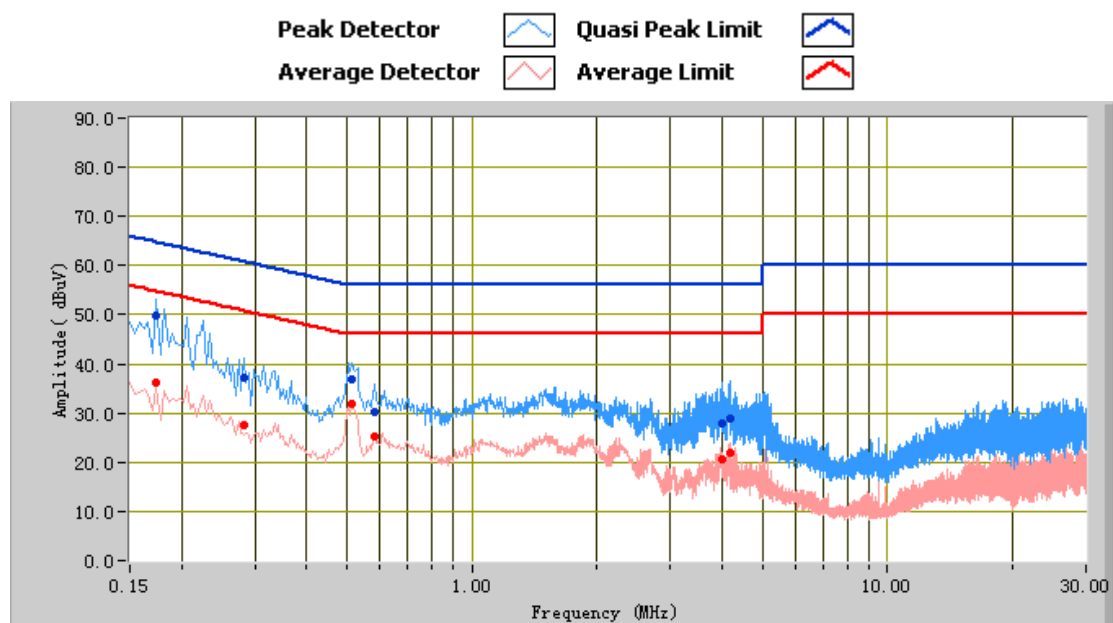


Test Data

Phase Line Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.17	49.66	64.77	-15.11	36.06	54.77	-18.70	11.87
0.51	36.91	56.00	-19.09	31.88	46.00	-14.12	11.08
4.17	28.85	56.00	-27.15	21.94	46.00	-24.06	10.89
3.98	27.97	56.00	-28.03	20.64	46.00	-25.36	10.89
0.28	37.14	60.76	-23.62	27.49	50.76	-23.27	11.41
0.58	30.27	56.00	-25.73	25.38	46.00	-20.62	11.02

Test Mode: Transmitting Mode

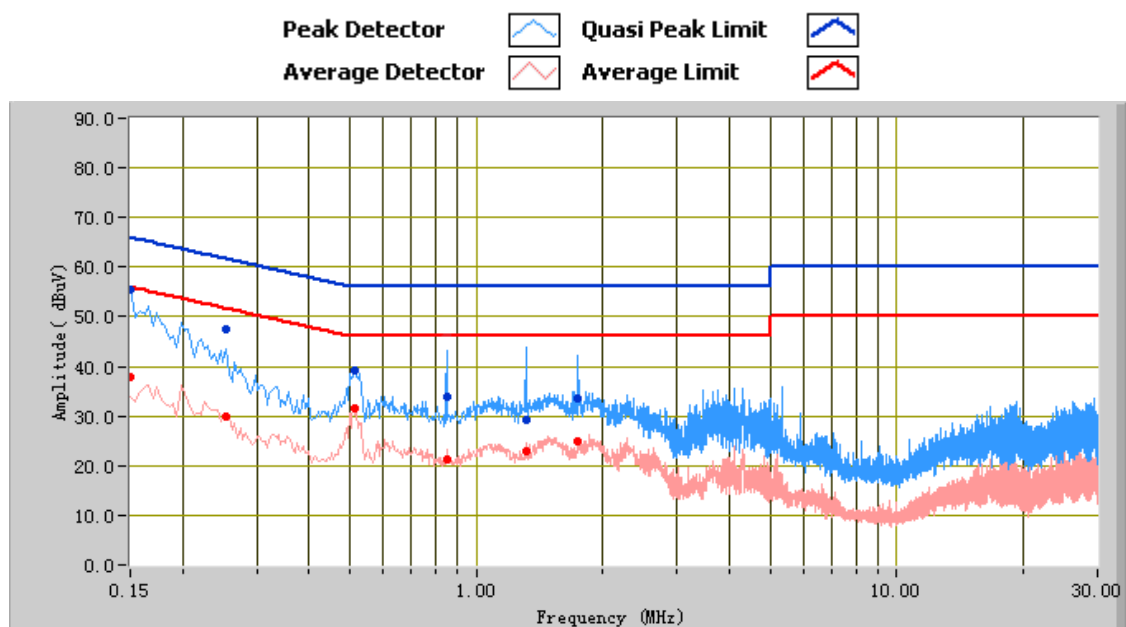

Test Data

Phase Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.85	33.78	56.00	-22.22	21.41	46.00	-24.59	10.81
0.15	55.49	66.00	-10.51	38.01	56.00	-17.99	12.21
1.31	29.31	56.00	-26.69	22.79	46.00	-23.21	10.77
1.75	33.50	56.00	-22.50	24.85	46.00	-21.15	10.86
0.51	39.27	56.00	-16.73	31.56	46.00	-14.44	11.05
0.25	47.53	61.62	-14.09	29.98	51.62	-21.65	11.45

6.2 Radiated Emissions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 17, 2015
Tested By :	Herith Shi

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.10 7(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges		
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 960		200
		Above 960		500

Test Setup	
------------	--

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - For emission frequencies measured below and above 1GHz, set the spectrum analyzer on a 100kHz and 1MHz resolution bandwidth respectively for each frequency measured. - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
-----------	---

Remark	
--------	--

Result	☒ Pass ☐ Fail
--------	--


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: Transmitting Mode

(Below 1GHz)

Peak Detector 
Quasi Peak Limit 

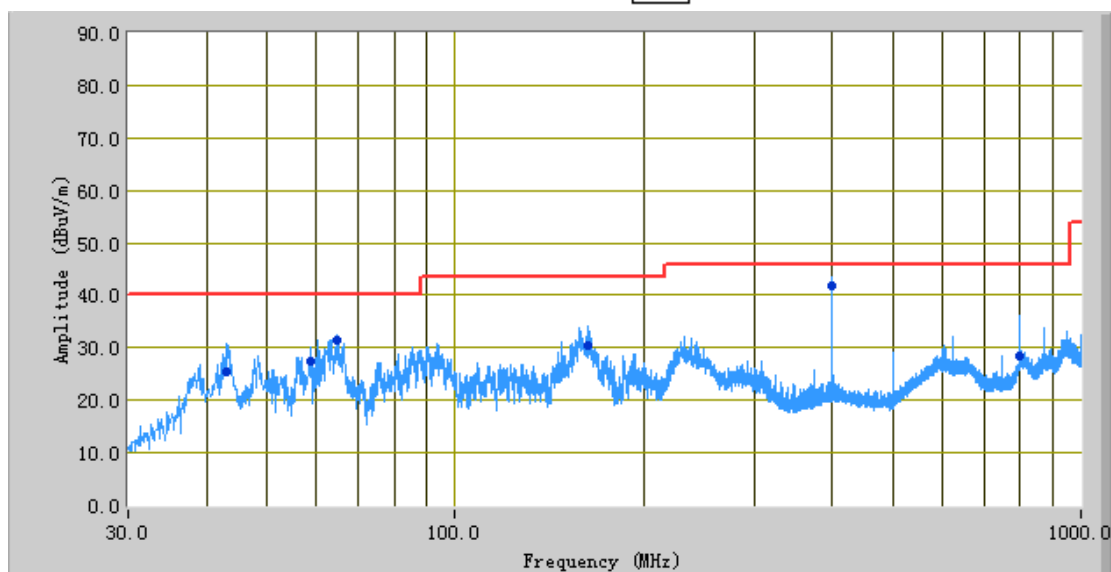

Test Data

Horizontal & Vertical Polarity Plot @3m

Frequency (MHz)	Quasi Peak (dBμV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBμV/m)	Margin (dB)
400.00	41.38	229.00	H	104.00	-27.84	46.00	-4.62
64.78	31.38	162.00	V	117.00	-37.83	40.00	-8.62
43.05	25.49	350.00	H	248.00	-35.24	40.00	-14.51
162.96	30.60	336.00	V	104.00	-31.48	43.50	-12.90
58.70	27.34	175.00	V	131.00	-37.77	40.00	-12.66
799.98	28.49	136.00	H	196.00	-19.27	46.00	-17.51


Note: The data above 1 GHz which below 20 dB to the limit was not recorded.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
R&S Receiver	ESPI3	101216	11/04/2014	11/03/2015	☒
Transient Limiter	LIT-153	531021	09/27/2014	09/26/2015	☒
R&S LISN(9k-30MHz)	ESH3-Z5	838979/005	11/04/2014	11/03/2015	☒
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A	☒
Radiated Emissions					
Hp Spectrum Analyzer	8563E	3821A09023	10/09/2014	10/08/2015	☒
R&S EMI Receiver	ESPI3	101216	10/09/2014	10/08/2015	☒
Antenna (30MHz~6GHz)	JB6	A121411	04/15/2014	04/14/2015	☒
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	11/15/2014	11/14/2015	☒
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2014	10/08/2015	☒
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2014	04/22/2015	☒
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/29/2014	05/28/2015	☒
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2014	10/26/2015	☒
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	LPA-6-30	1451709	06/25/2014	06/24/2015	☒
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

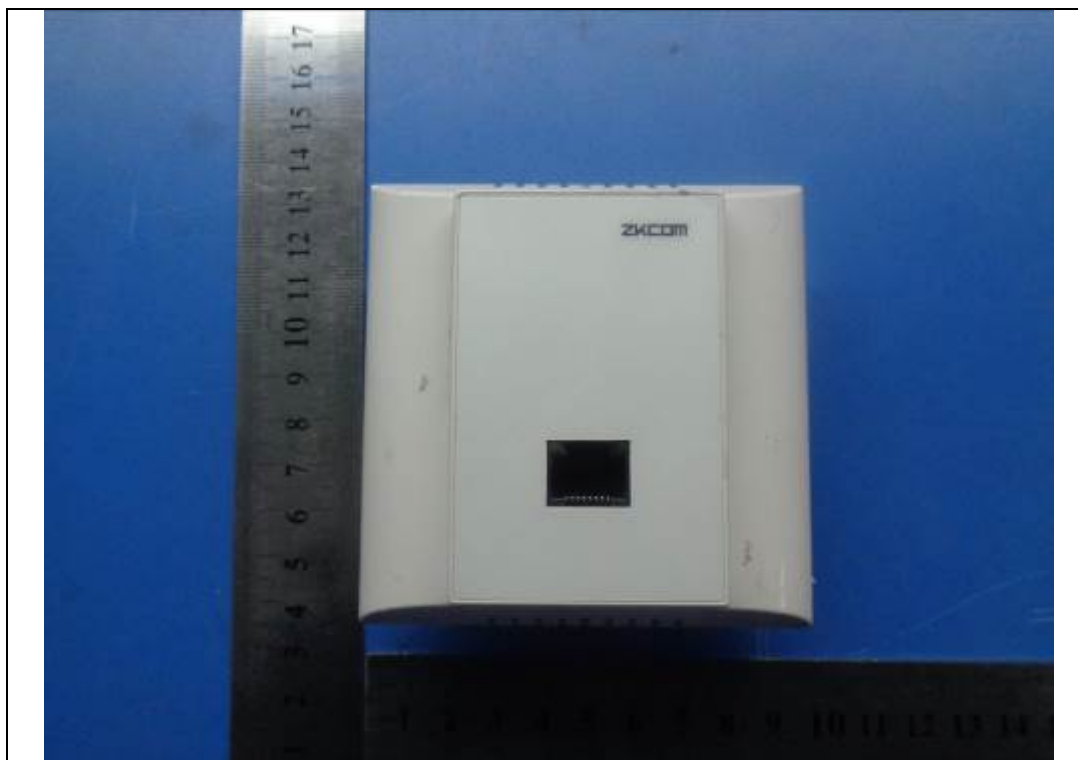

EUT – Front View




EUT – Rear View


Test Report No.	14021236-FCC-E
Page	15 of 26




EUT – Top View

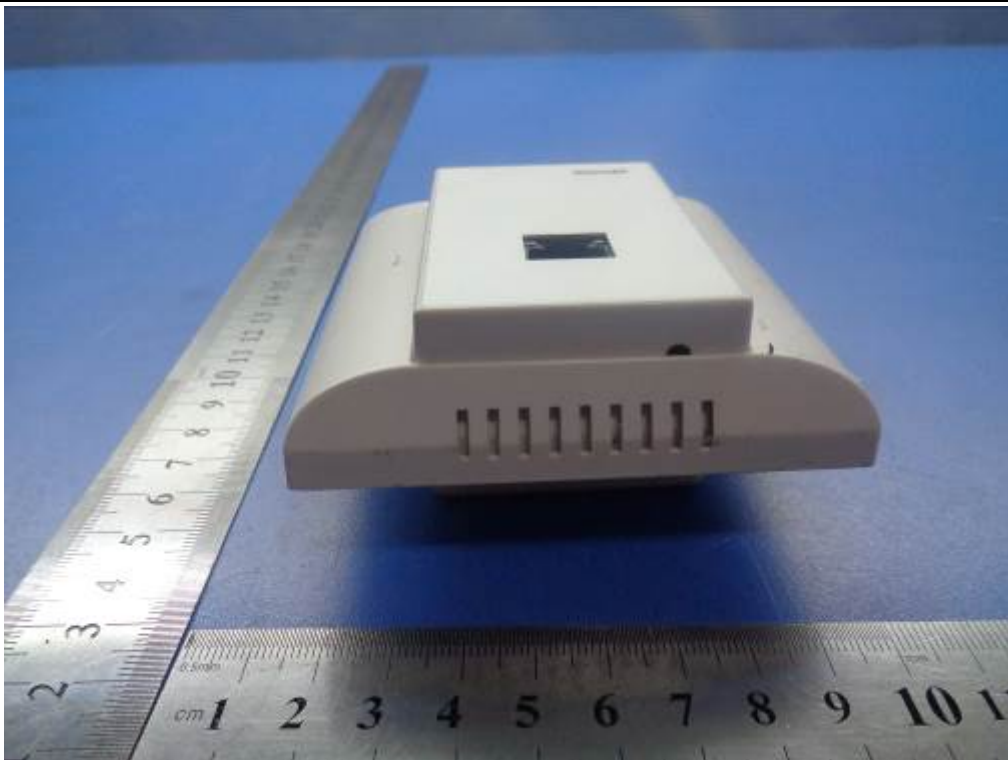

EUT – Bottom View

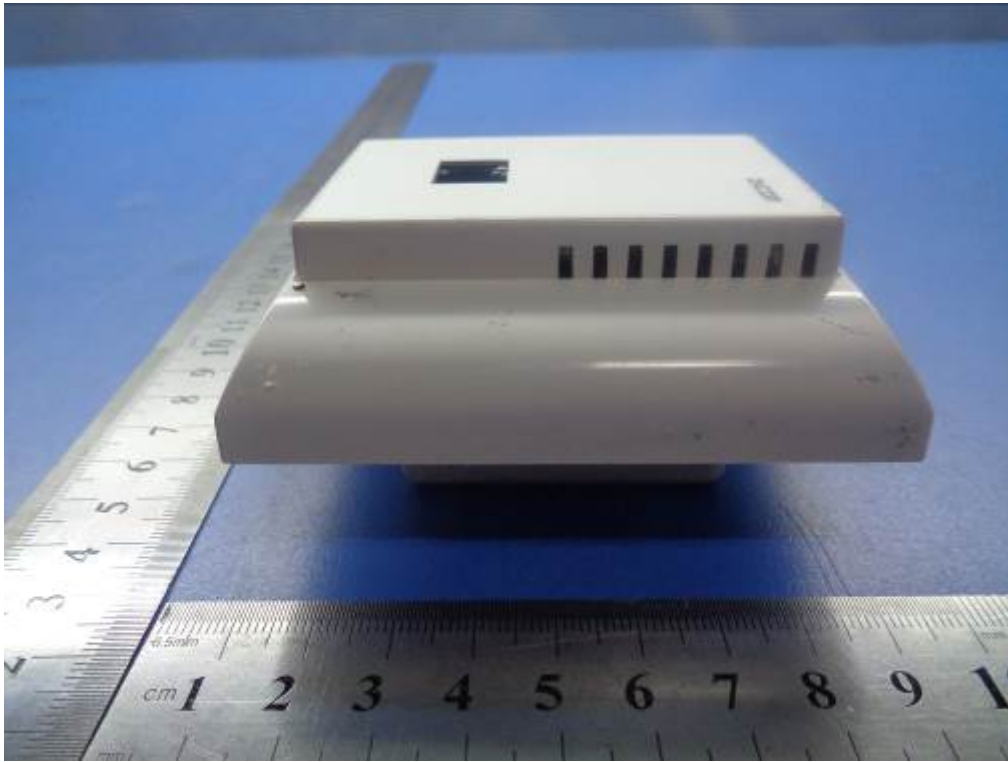

EUT – Left View

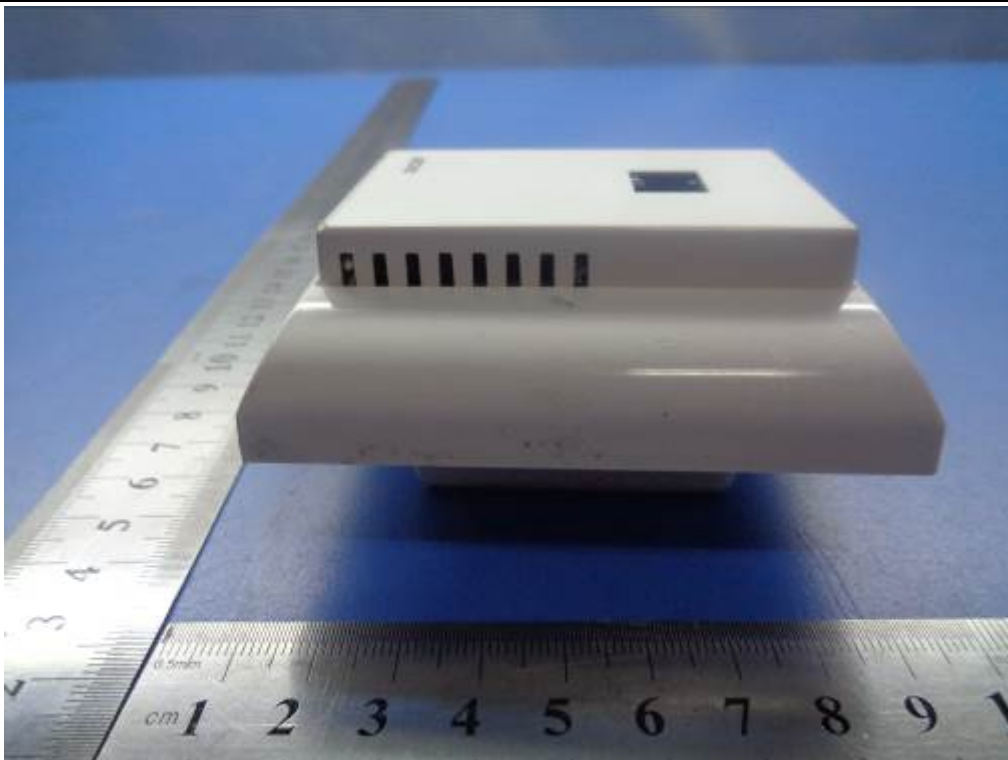


EUT – Right View


Annex B.ii. Photograph: EUT Internal Photo



EUT – Uncover Front View 1

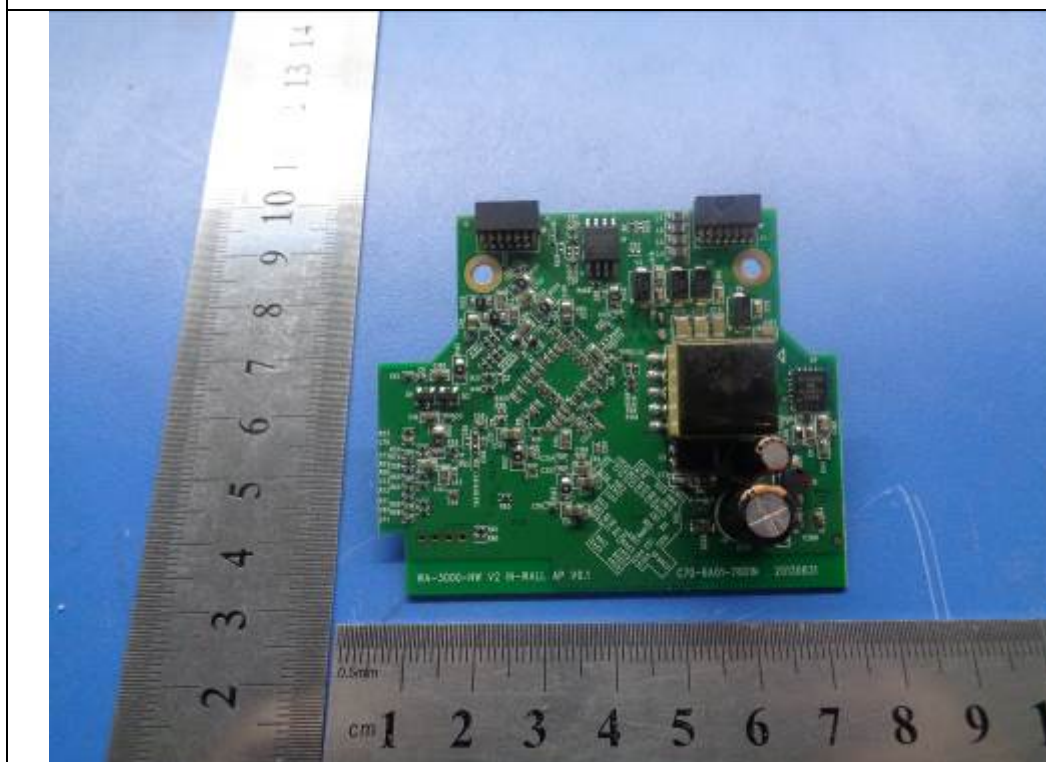

EUT – PCBA 1 Front View

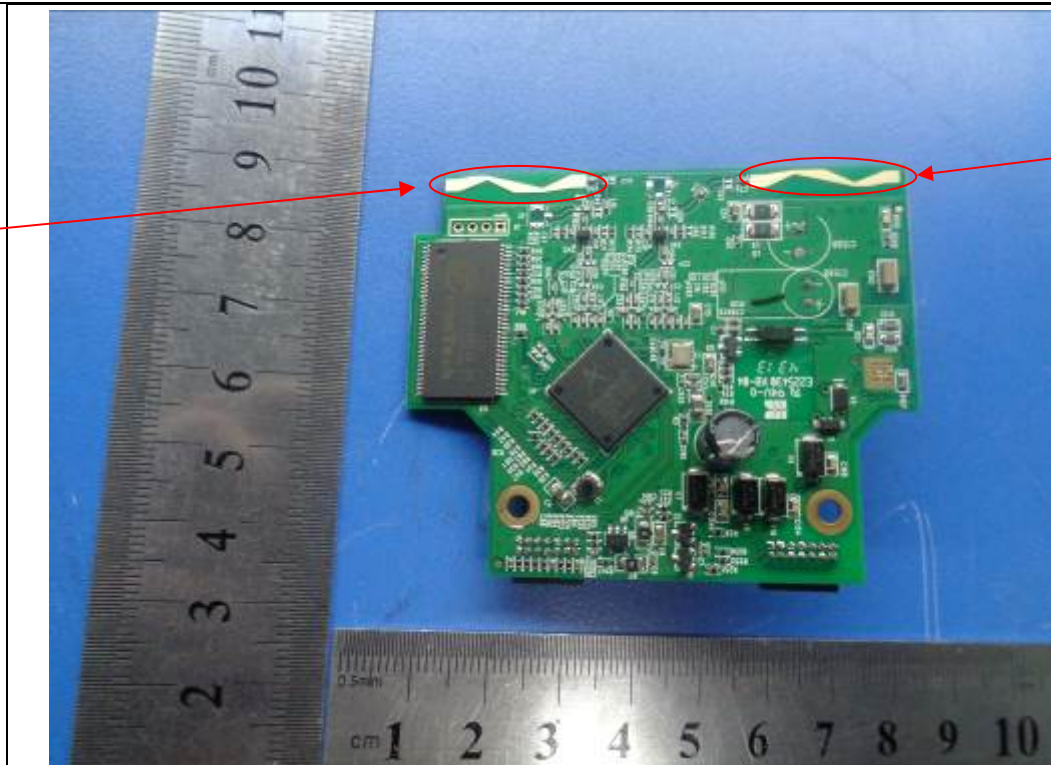


EUT – PCBA 1 Rear View



EUT – PCBA 2 Front View

Test Report No.	14021236-FCC-E
Page	19 of 26

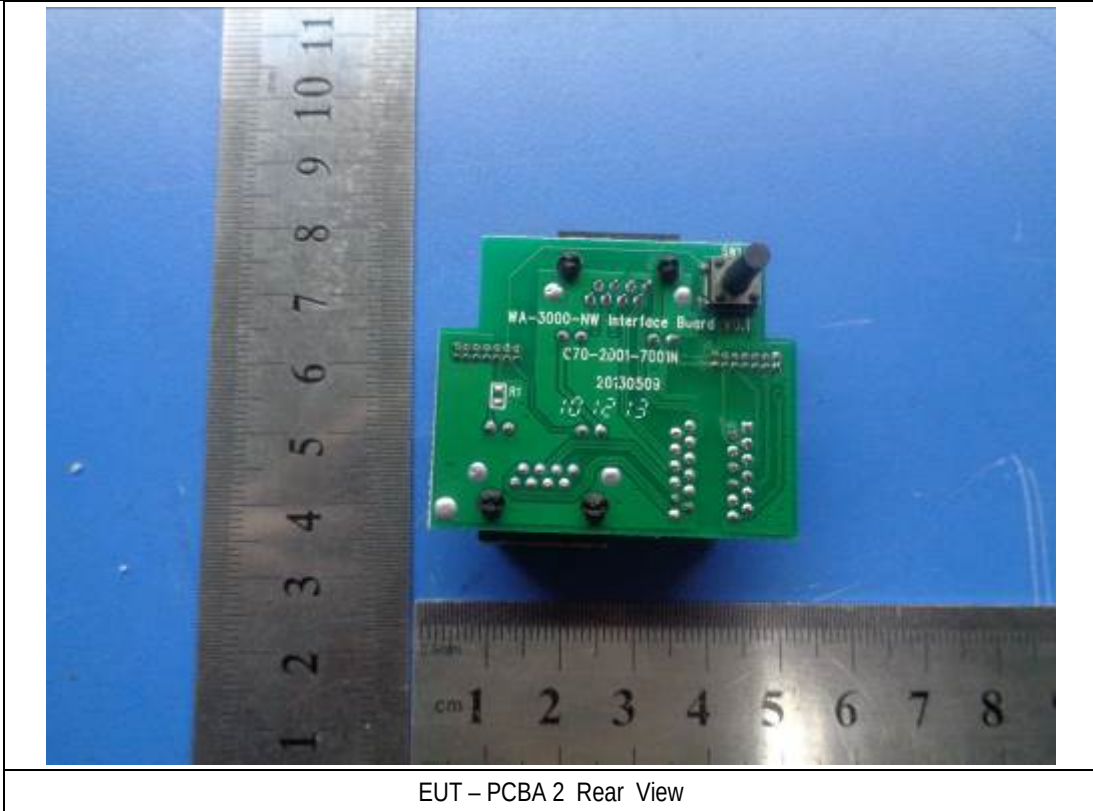


EUT – PCBA 2 Rear View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Setup Front View

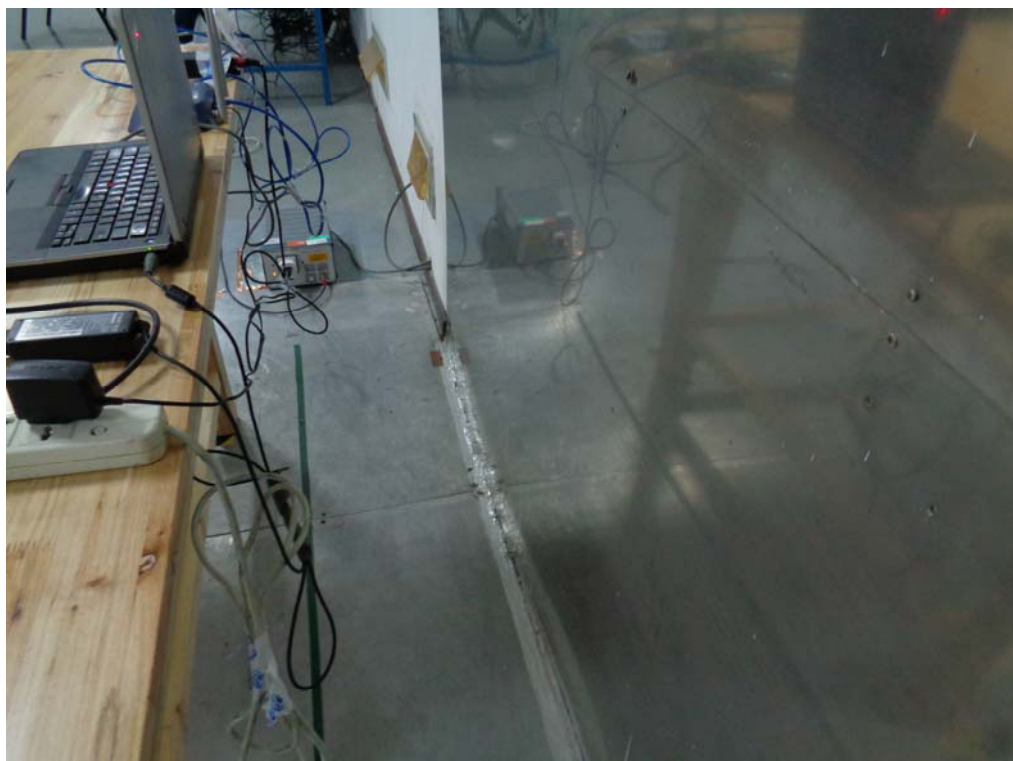

Conducted Emissions Setup Side View

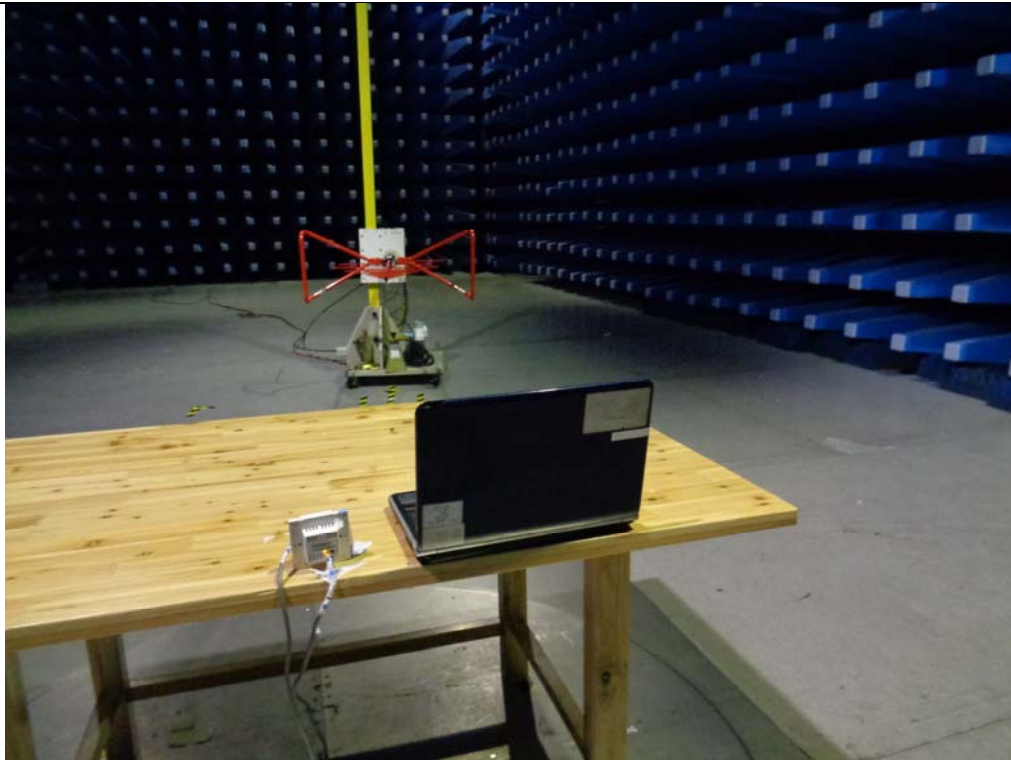

Radiated Emissions Setup Below 1GHz Front View

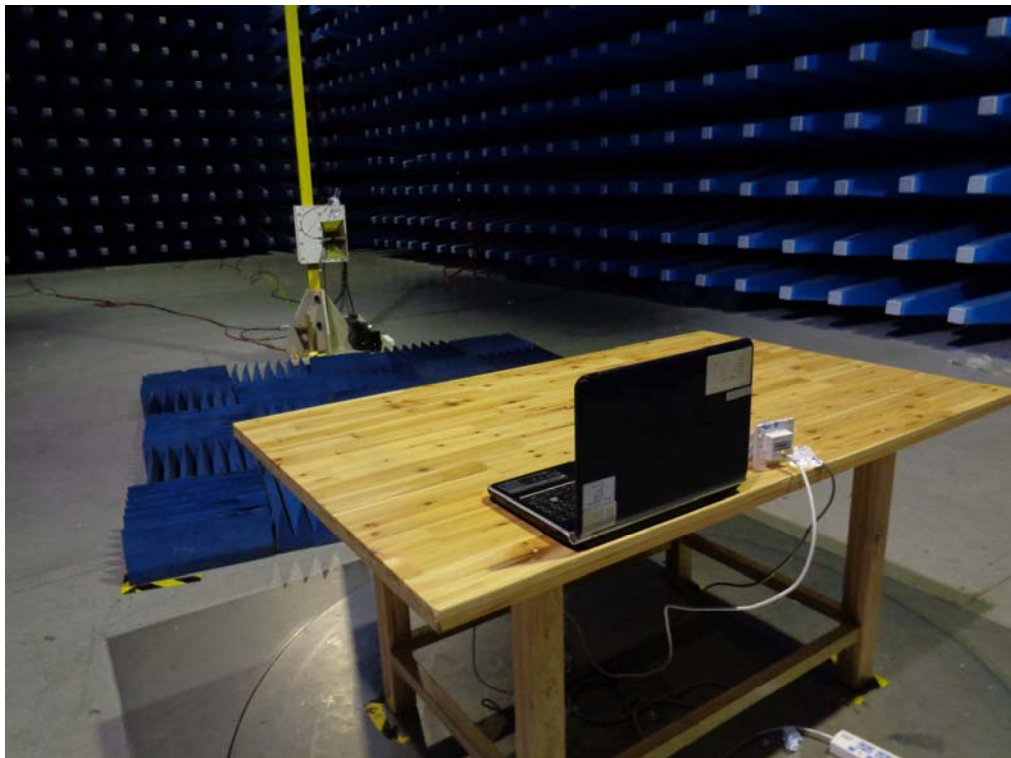


Radiated Emissions Setup Above 1GHz Front View


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.i. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

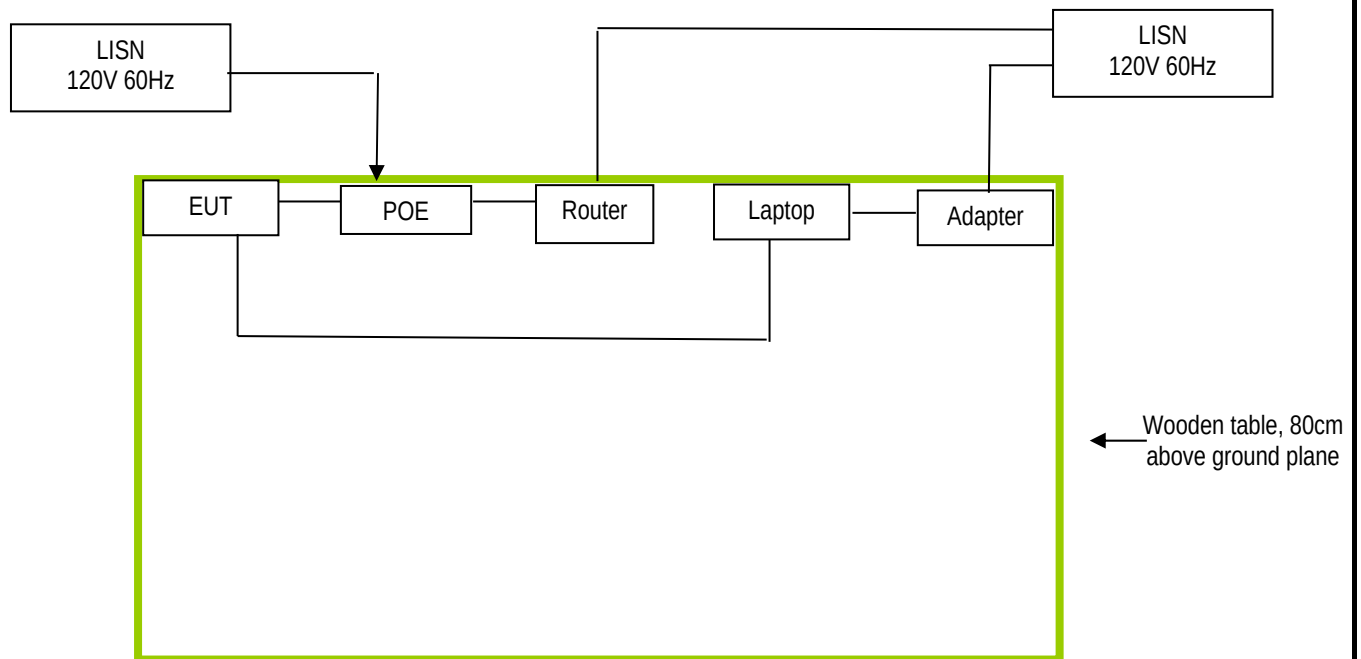

Block Configuration Diagram for Radiated Emissions

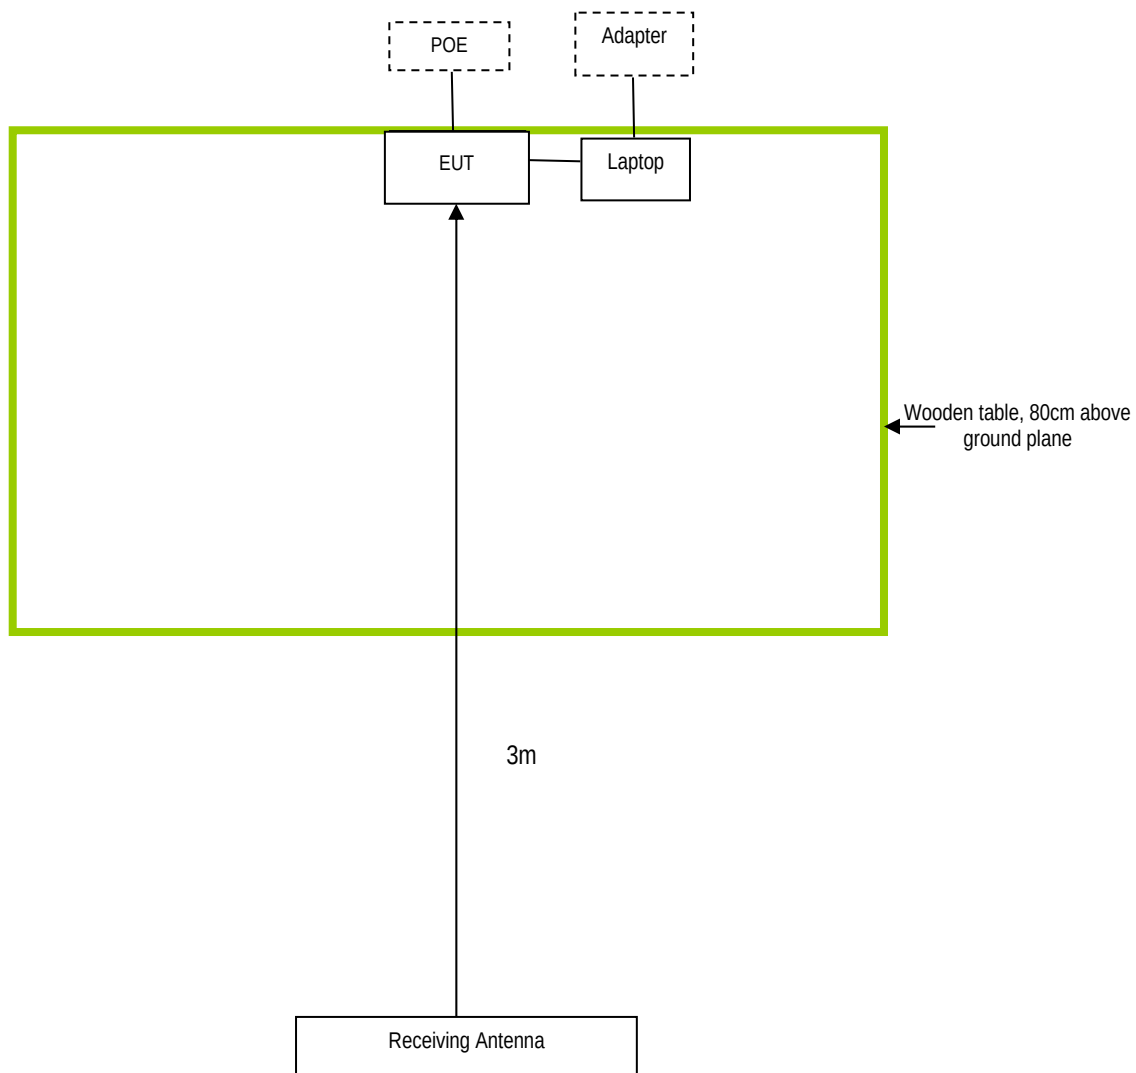

Test Report No.	14021236-FCC-E
Page	24 of 26

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Equipment Description	Model	Calibration Date
Gateway Laptop	MS2288 & LXWHF02013951C3CA92200	N/A
Router	N/A	N/A

Test Report No.	14021236-FCC-E
Page	25 of 26

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment

Test Report No.	14021236-FCC-E
Page	26 of 26

Annex E. DECLARATION OF SIMILARITY

N/A