


|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0 | Test Voltage         | AC 120V/60Hz |

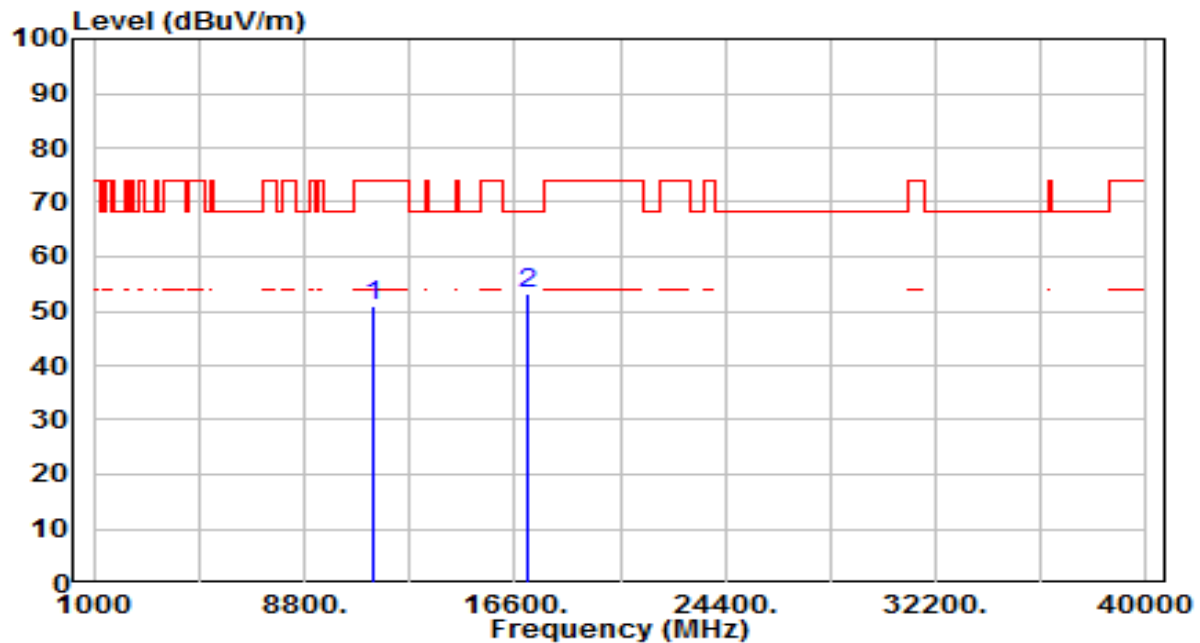


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11400.000       | 43.52          | 7.26       | 50.77                | -23.23      | 74.00          | 100         | 32          | Peak              |
| 2  | * 17100.000     | 46.50          | 6.57       | 53.07                | -15.13      | 68.20          | 100         | 329         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0 | Test Voltage         | AC 120V/60Hz |

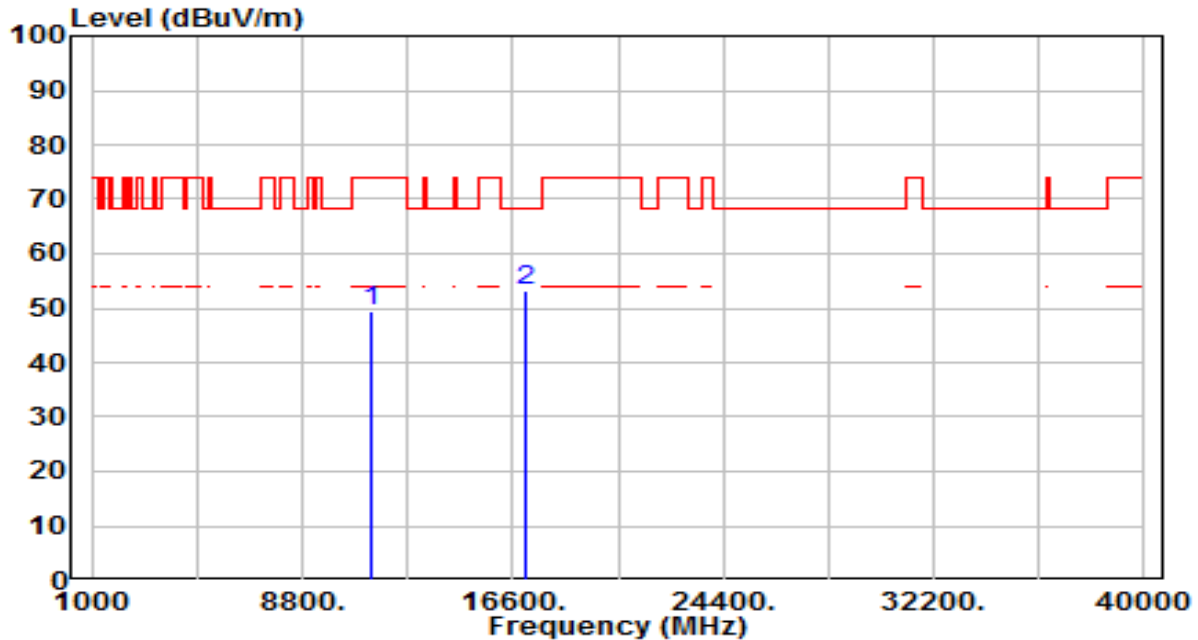


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11400.000       | 42.16          | 7.26       | 49.42                | -24.58      | 74.00          | 100         | 91          | Peak              |
| 2  | * 17100.000     | 46.59          | 6.57       | 53.16                | -15.04      | 68.20          | 100         | 144         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 144_ANT 0 | Test Voltage         | AC 120V/60Hz |

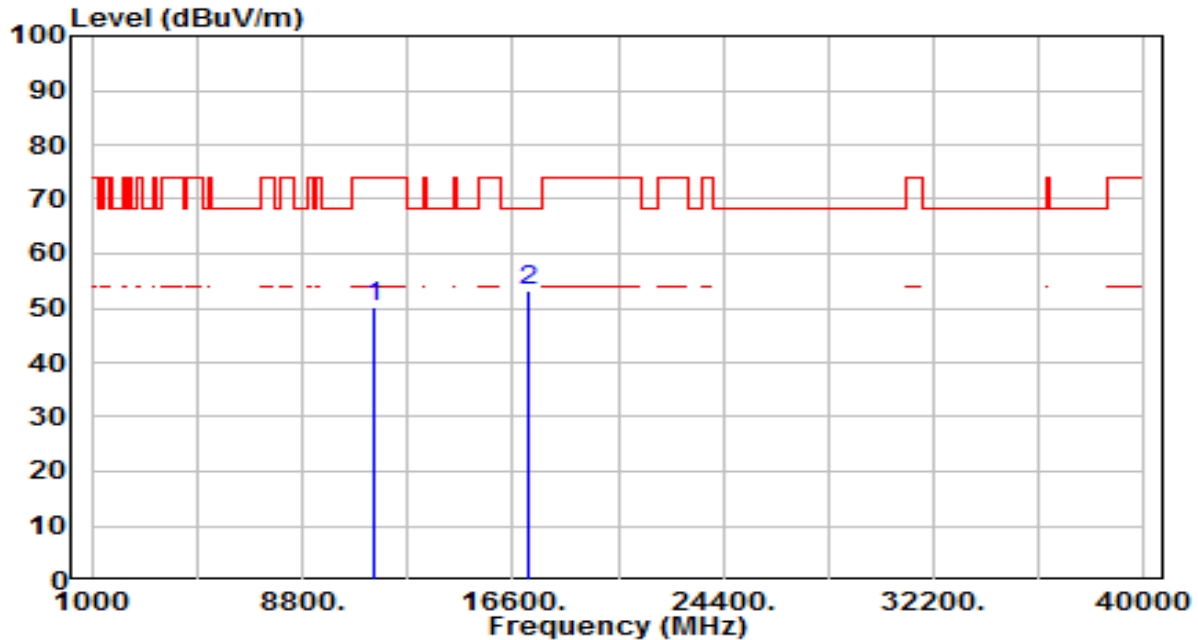


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 42.60          | 7.46       | 50.06                | -23.94      | 74.00          | 100         | 226         | Peak              |
| 2  | * 17160.000     | 46.55          | 6.68       | 53.23                | -14.97      | 68.20          | 100         | 65          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 144_ANT 0 | Test Voltage         | AC 120V/60Hz |

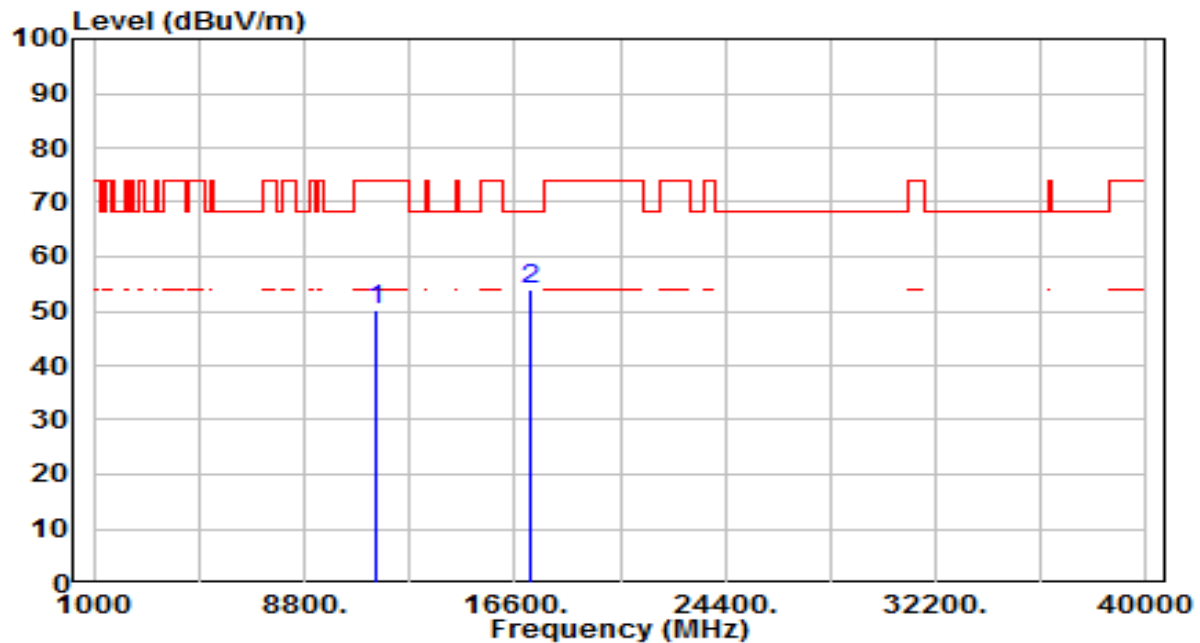


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 42.55          | 7.46       | 50.02                | -23.98      | 74.00          | 100         | 138         | Peak              |
| 2  | * 17160.000     | 47.42          | 6.68       | 54.10                | -14.10      | 68.20          | 100         | 260         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0 | Test Voltage         | AC 120V/60Hz |

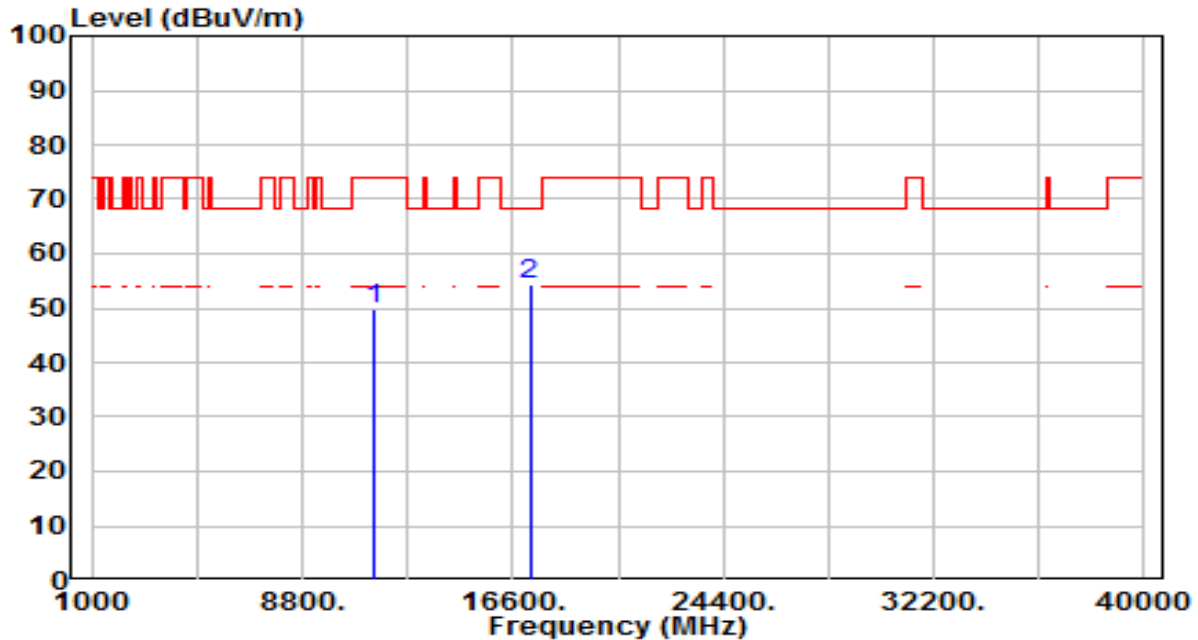


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 42.04          | 7.72       | 49.76                | -24.24      | 74.00          | 100         | 228         | Peak              |
| 2  | * 17235.000     | 47.94          | 6.54       | 54.48                | -13.72      | 68.20          | 100         | 253         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0 | Test Voltage         | AC 120V/60Hz |

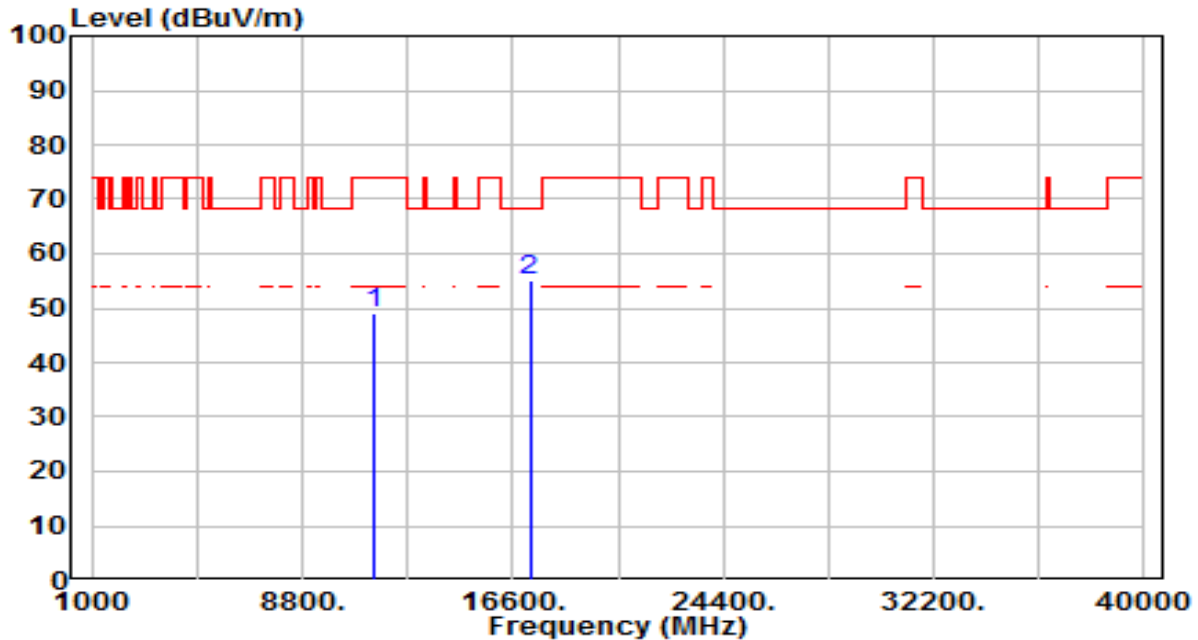


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 41.40          | 7.72       | 49.12                | -24.88      | 74.00          | 100         | 11          | Peak              |
| 2  | * 17235.000     | 48.51          | 6.54       | 55.04                | -13.16      | 68.20          | 100         | 31          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 157_ANT 0 | Test Voltage         | AC 120V/60Hz |

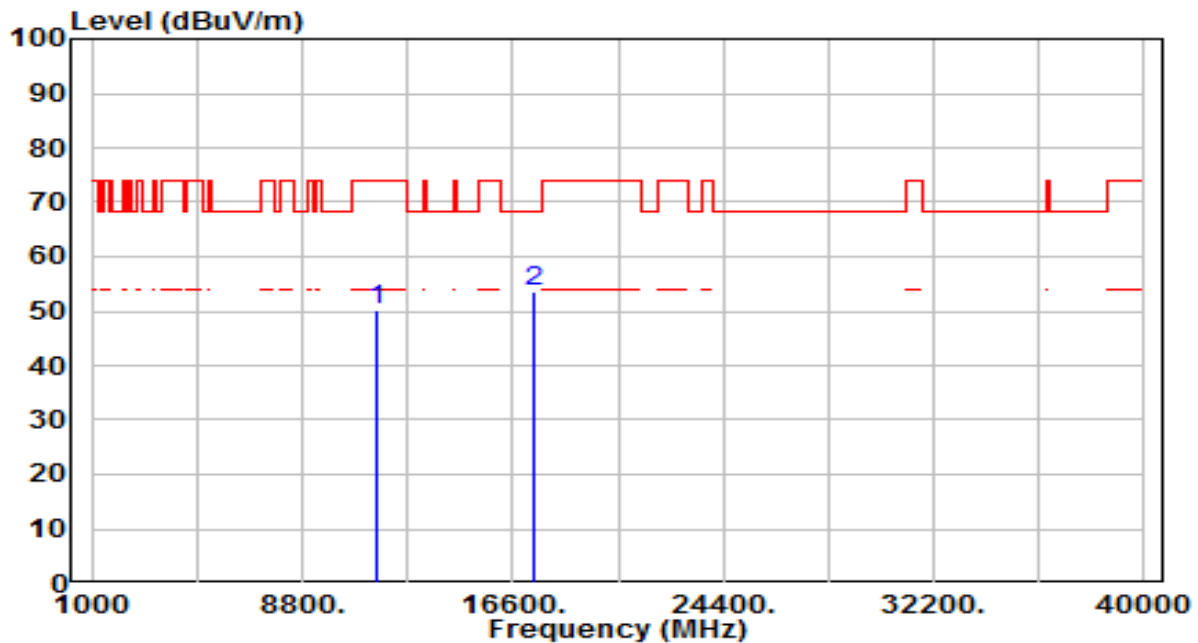


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 42.76          | 7.47       | 50.23                | -23.77      | 74.00          | 100         | 123         | Peak              |
| 2  | * 17355.000     | 47.74          | 5.95       | 53.69                | -14.51      | 68.20          | 100         | 163         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 157_ANT 0 | Test Voltage         | AC 120V/60Hz |

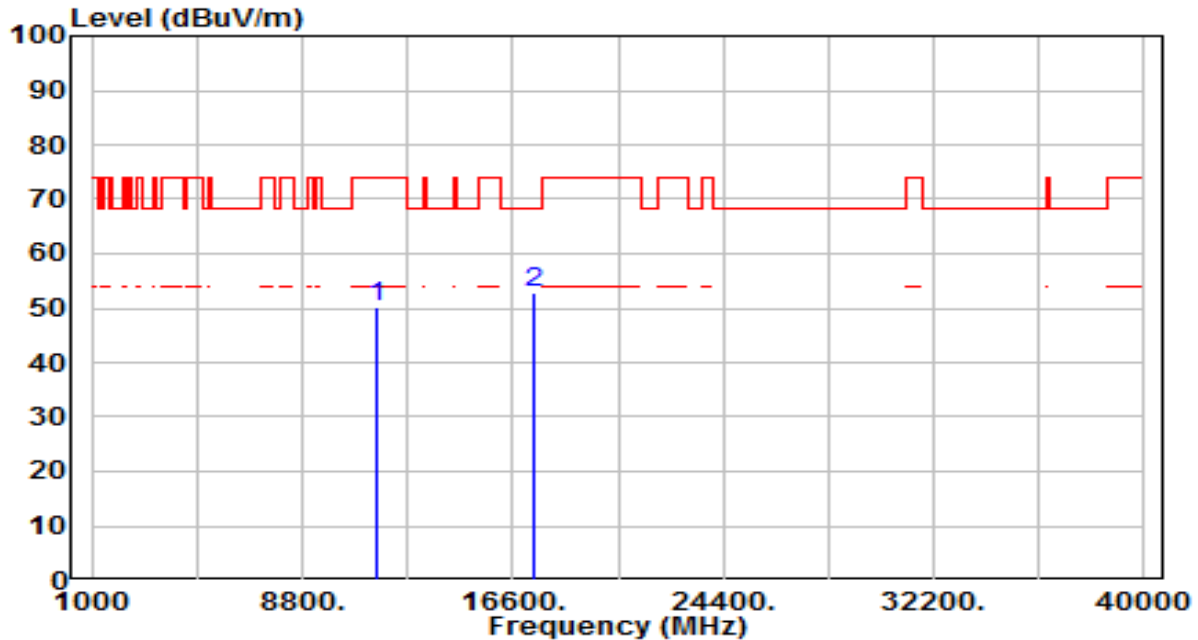


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 42.74          | 7.47       | 50.21                | -23.79      | 74.00          | 100         | 314         | Peak              |
| 2  | * 17355.000     | 46.93          | 5.95       | 52.88                | -15.32      | 68.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0 | Test Voltage         | AC 120V/60Hz |

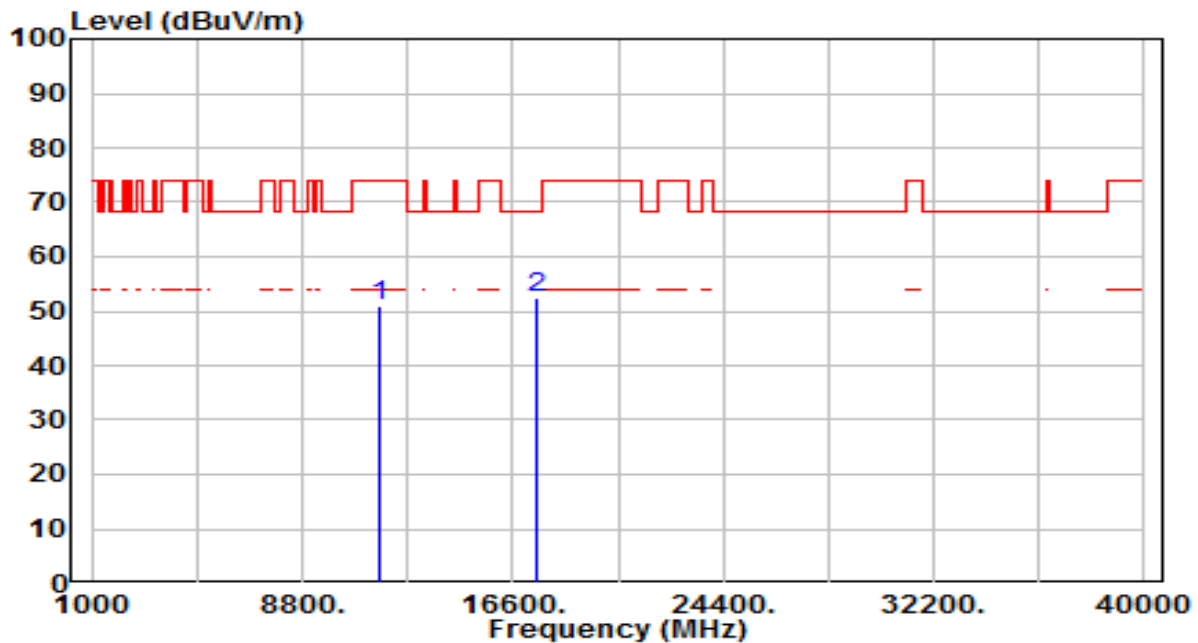


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 43.68          | 7.17       | 50.85                | -23.15      | 74.00          | 100         | 278         | Peak              |
| 2  | * 17475.000     | 46.58          | 6.02       | 52.60                | -15.60      | 68.20          | 100         | 9           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170           | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0 | Test Voltage         | AC 120V/60Hz |

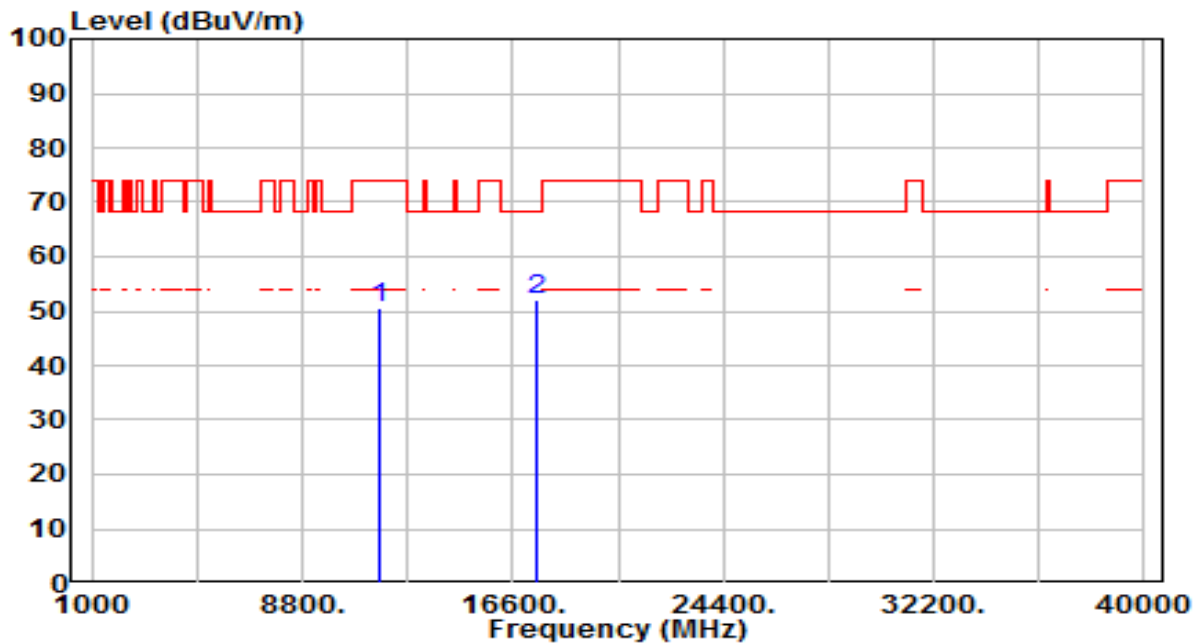


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 43.35          | 7.17       | 50.52                | -23.48      | 74.00          | 100         | 12          | Peak              |
| 2  | * 17475.000     | 46.20          | 6.02       | 52.22                | -15.98      | 68.20          | 100         | 271         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

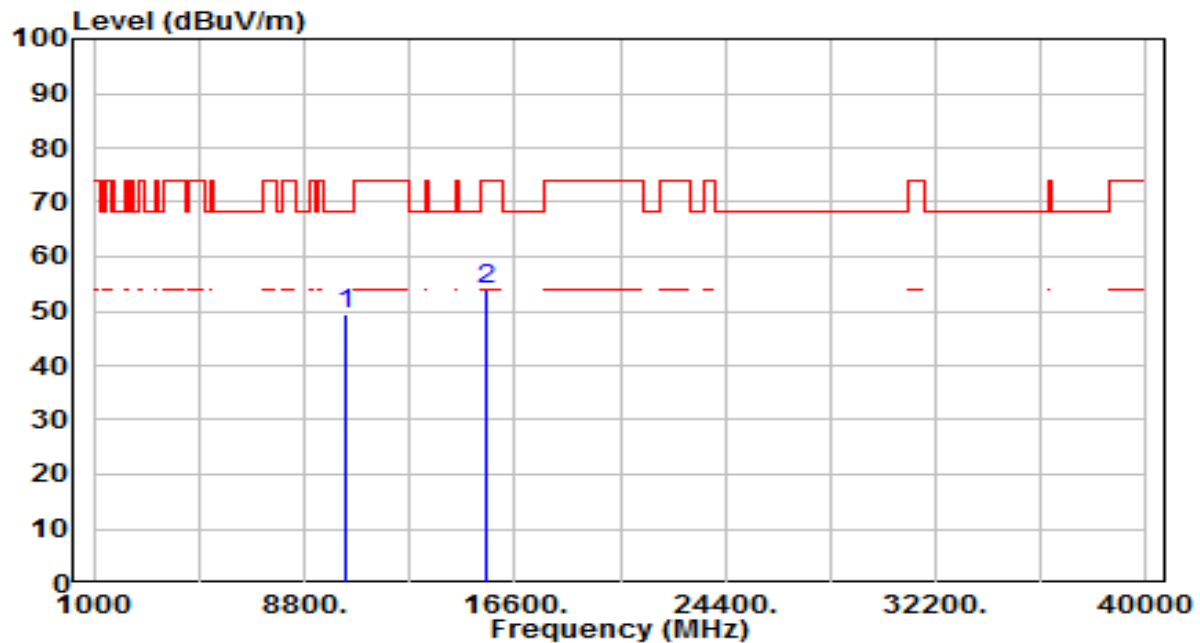


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10360.000       | 41.64          | 7.62       | 49.26                | -18.94      | 68.20          | 100         | 352         | Peak              |
| 2  |   | 15540.000       | 45.26          | 8.61       | 53.87                | -20.13      | 74.00          | 100         | 51          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

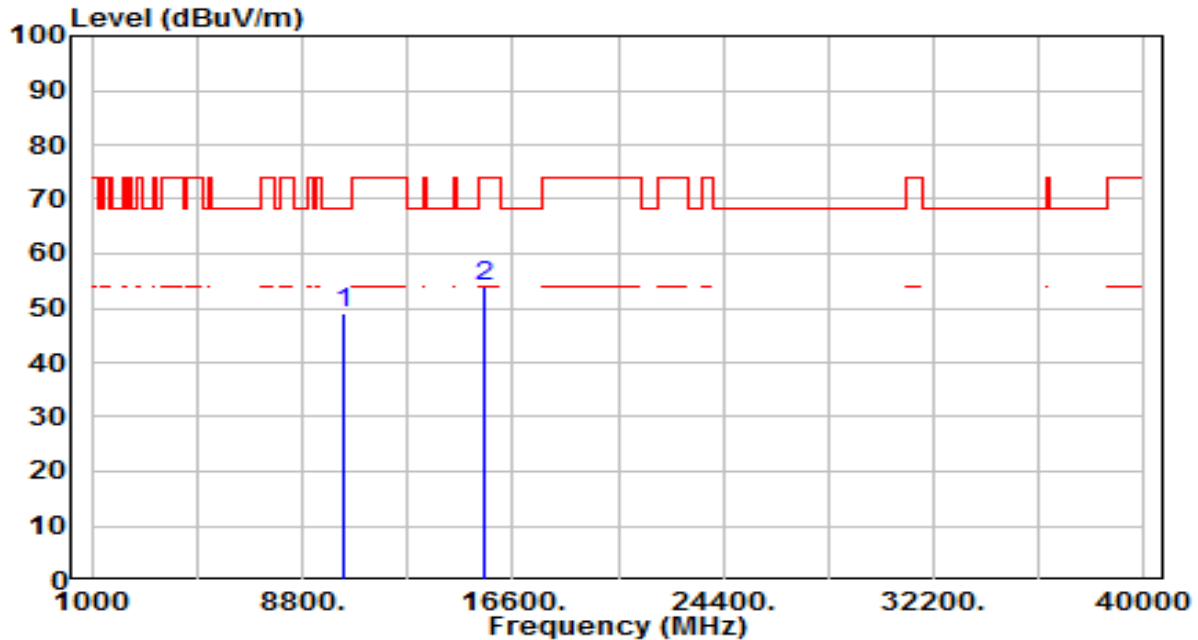


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10360.000       | 41.40          | 7.62       | 49.02                | -19.18      | 68.20          | 100         | 357         | Peak              |
| 2  |   | 15540.000       | 45.24          | 8.61       | 53.86                | -20.14      | 74.00          | 100         | 269         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 44_ANT 0 | Test Voltage         | AC 120V/60Hz |

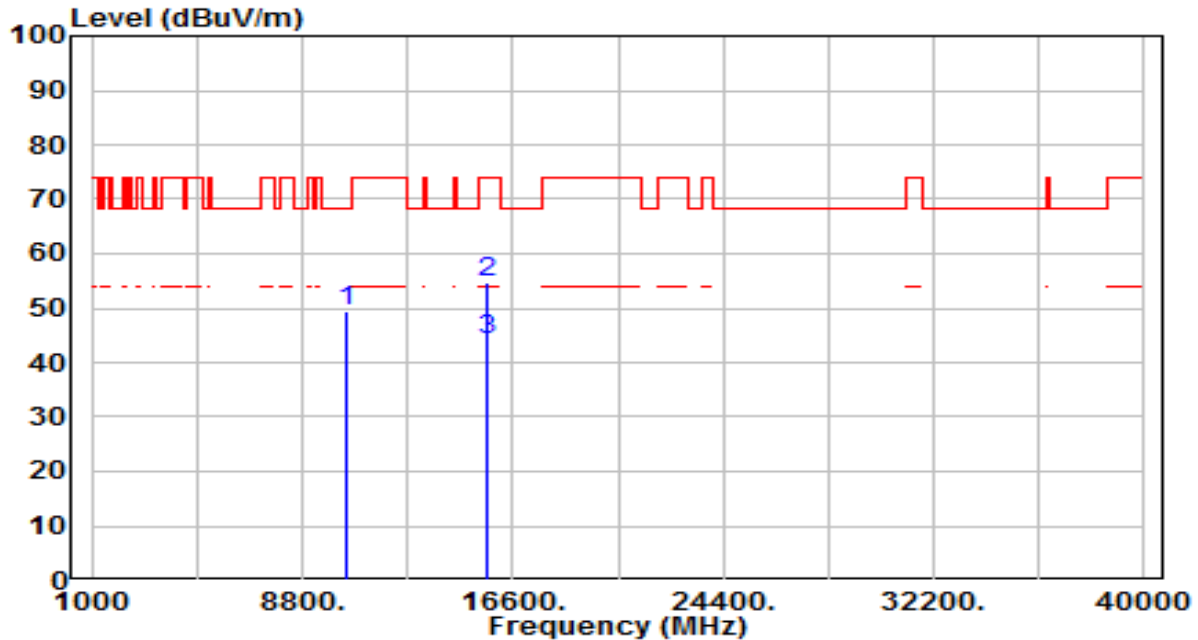


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10440.000       | 41.92          | 7.49       | 49.41                | -18.79      | 68.20          | 100         | 258         | Peak              |
| 2  |   | 15660.000       | 45.92          | 8.66       | 54.58                | -19.42      | 74.00          | 100         | 71          | Peak              |
| 3  | * | 15660.000       | 35.34          | 8.66       | 44.00                | -10.00      | 54.00          | 100         | 71          | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 44_ANT 0 | Test Voltage         | AC 120V/60Hz |

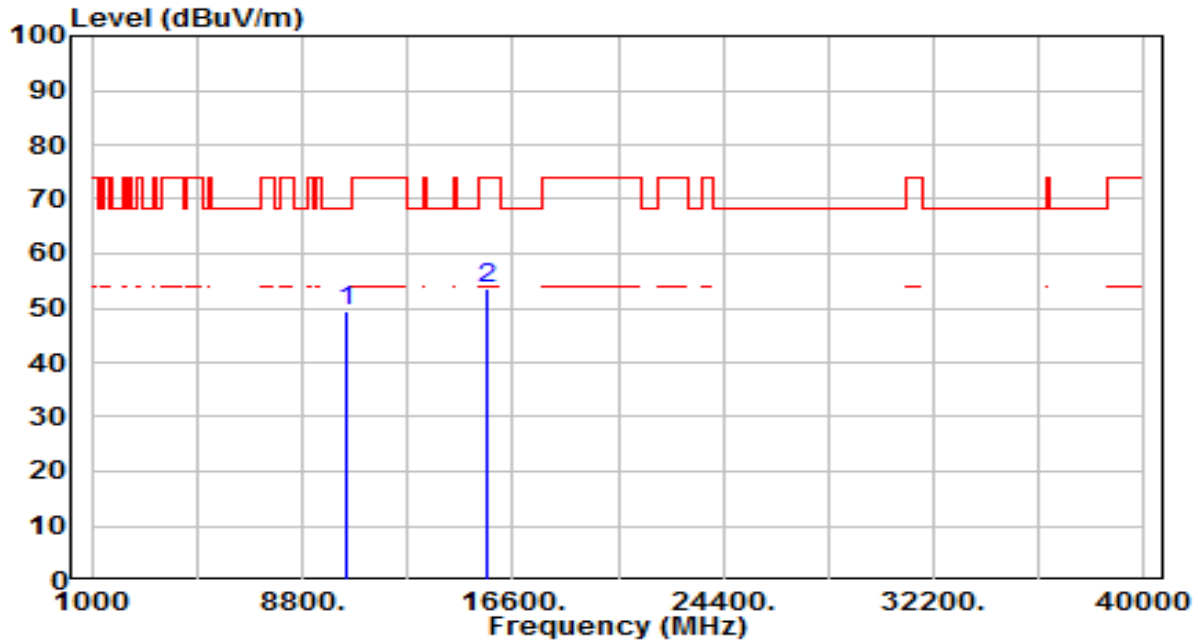


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10440.000       | 41.84          | 7.49       | 49.33                | -18.87      | 68.20          | 100         | 20          | Peak              |
| 2  |   | 15660.000       | 45.06          | 8.66       | 53.72                | -20.28      | 74.00          | 100         | 14          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 48_ANT 0 | Test Voltage         | AC 120V/60Hz |

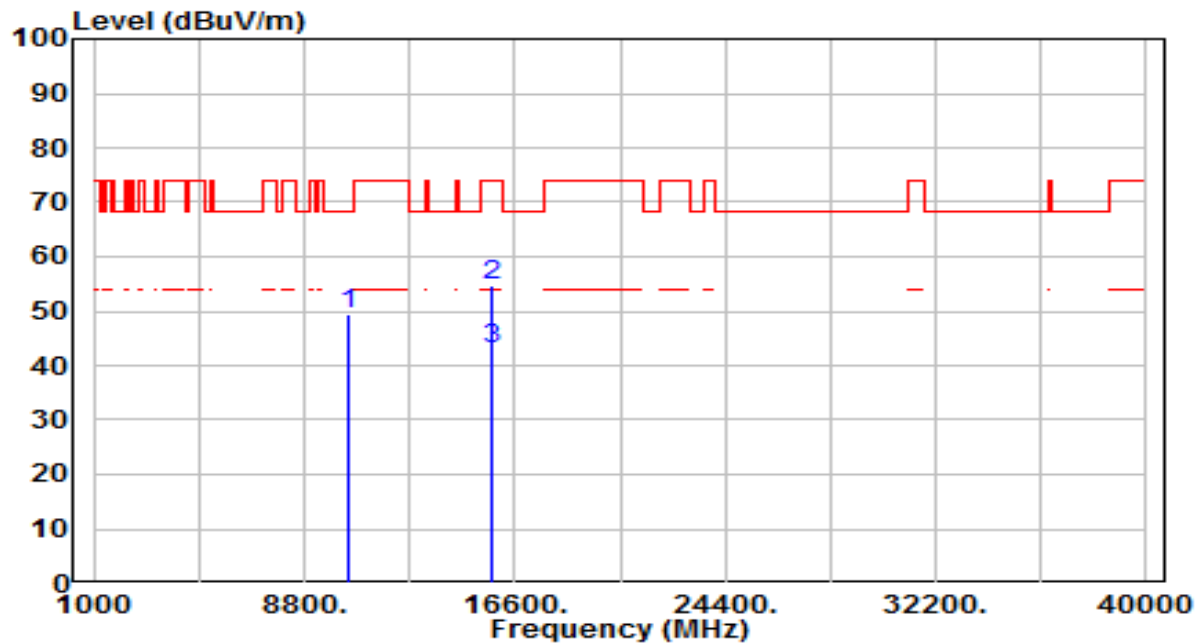


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10480.000       | 41.81          | 7.48       | 49.29                | -18.91      | 68.20          | 100         | 106         | Peak              |
| 2  |   | 15720.000       | 45.70          | 8.83       | 54.53                | -19.47      | 74.00          | 100         | 352         | Peak              |
| 3  | * | 15720.000       | 34.28          | 8.83       | 43.11                | -10.89      | 54.00          | 100         | 352         | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 48_ANT 0 | Test Voltage         | AC 120V/60Hz |

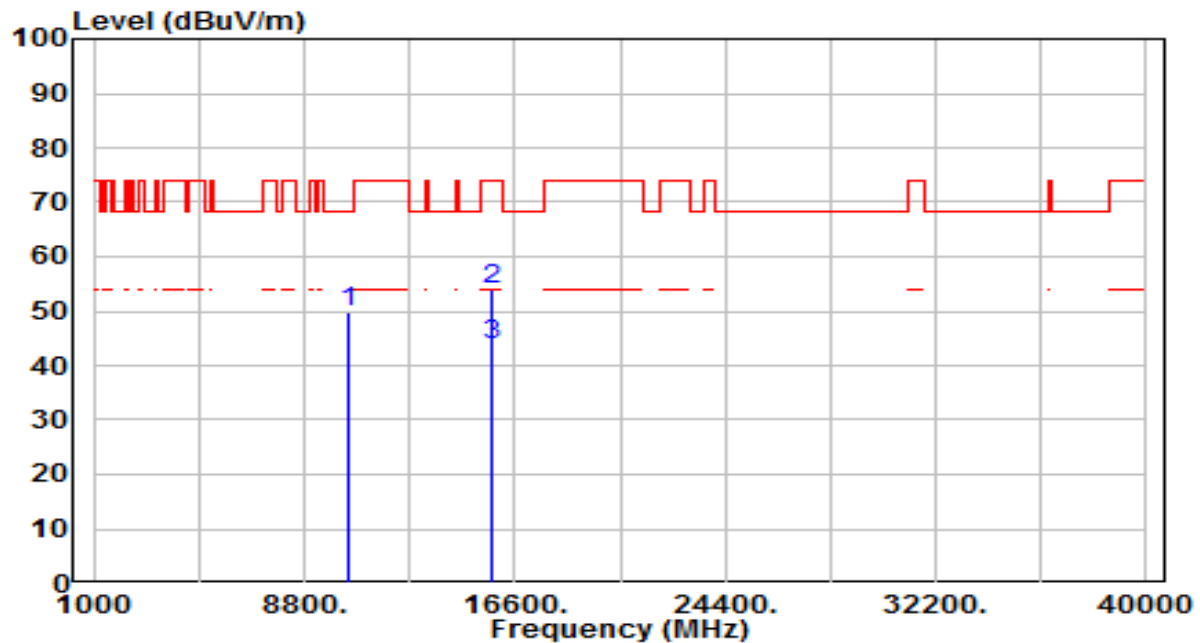


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10480.000       | 42.34          | 7.48       | 49.82                | -18.38      | 68.20          | 100         | 238         | Peak              |
| 2  |   | 15720.000       | 45.22          | 8.83       | 54.05                | -19.95      | 74.00          | 100         | 125         | Peak              |
| 3  | * | 15720.000       | 35.04          | 8.83       | 43.87                | -10.13      | 54.00          | 100         | 125         | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 52_ANT 0 | Test Voltage         | AC 120V/60Hz |

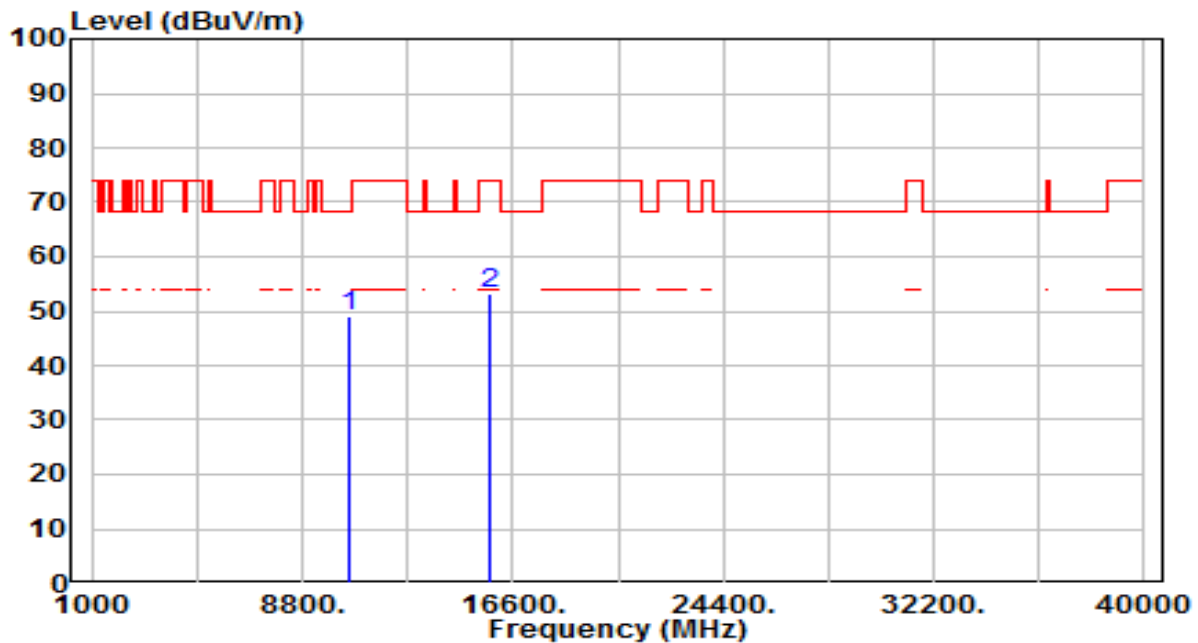


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10520.000       | 41.48          | 7.40       | 48.88                | -19.32      | 68.20          | 100         | 204         | Peak              |
| 2  |   | 15780.000       | 44.27          | 8.79       | 53.06                | -20.94      | 74.00          | 100         | 8           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 52_ANT 0 | Test Voltage         | AC 120V/60Hz |

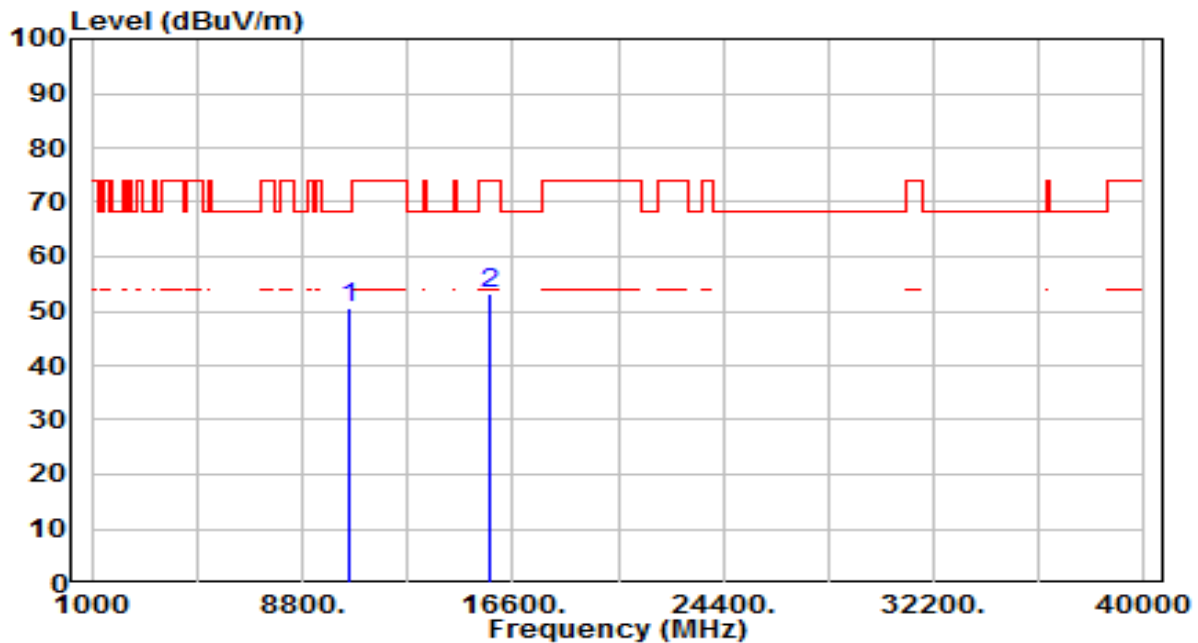


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10520.000       | 43.28          | 7.40       | 50.68                | -17.52      | 68.20          | 100         | 56          | Peak              |
| 2  |   | 15780.000       | 44.58          | 8.79       | 53.37                | -20.63      | 74.00          | 100         | 357         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 60_ANT 0 | Test Voltage         | AC 120V/60Hz |

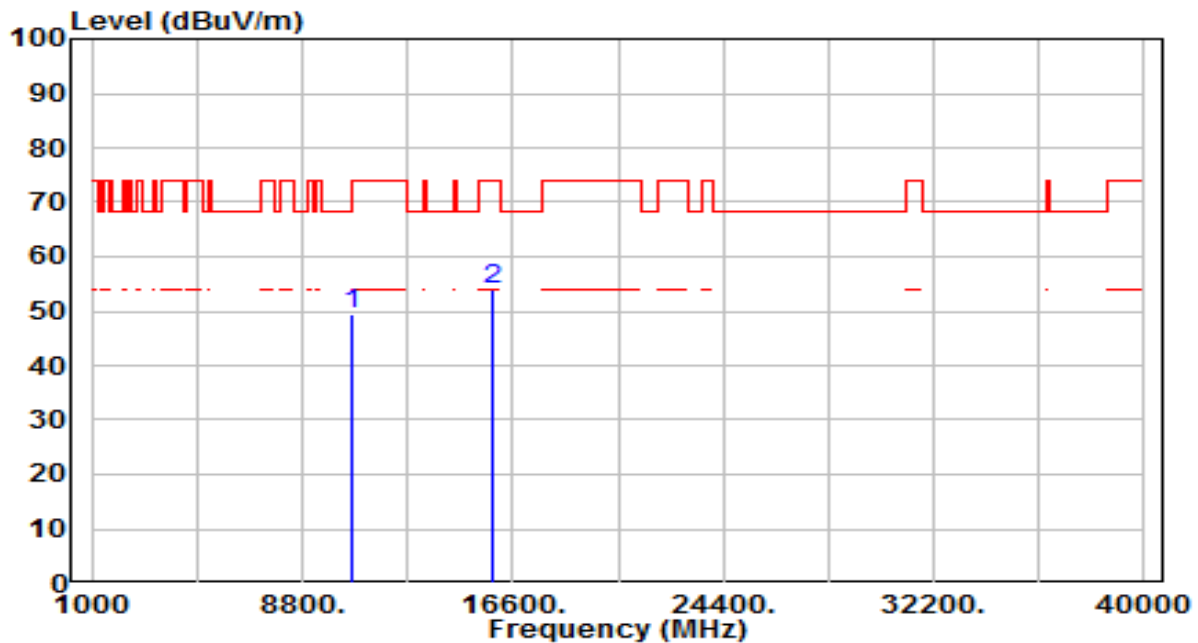


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10600.000       | 42.39          | 7.10       | 49.49                | -18.71      | 68.20          | 100         | 235         | Peak              |
| 2  |   | 15900.000       | 45.04          | 8.81       | 53.85                | -20.15      | 74.00          | 100         | 9           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 60_ANT 0 | Test Voltage         | AC 120V/60Hz |

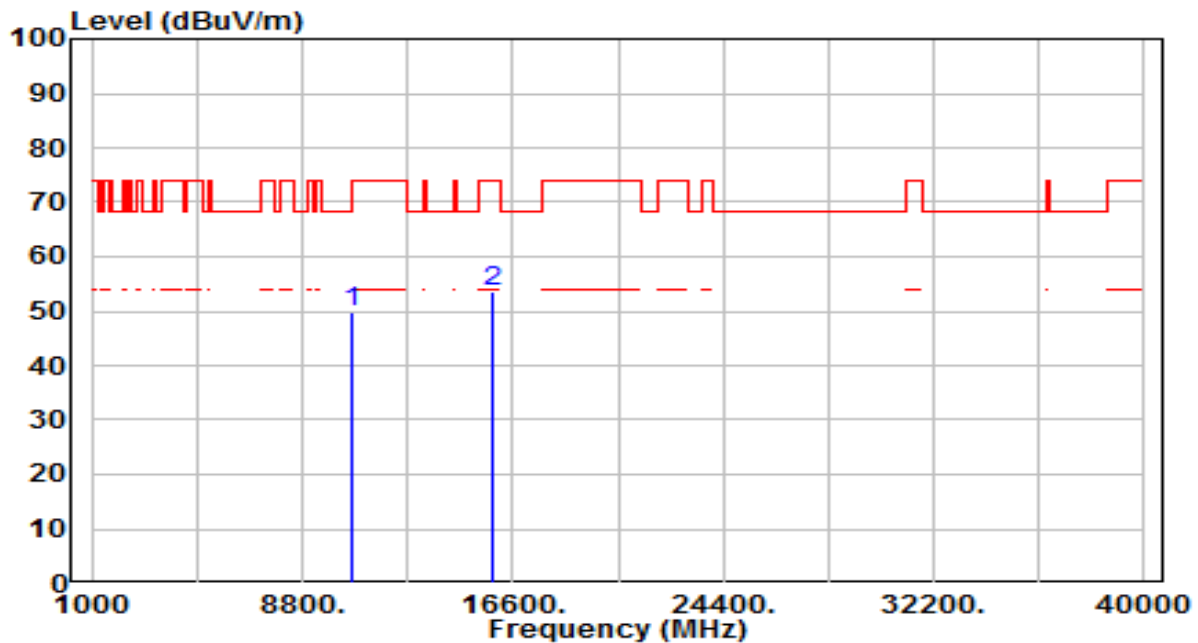


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10600.000       | 42.82          | 7.10       | 49.93                | -18.27      | 68.20          | 100         | 255         | Peak              |
| 2  |   | 15900.000       | 44.72          | 8.81       | 53.53                | -20.47      | 74.00          | 100         | 43          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

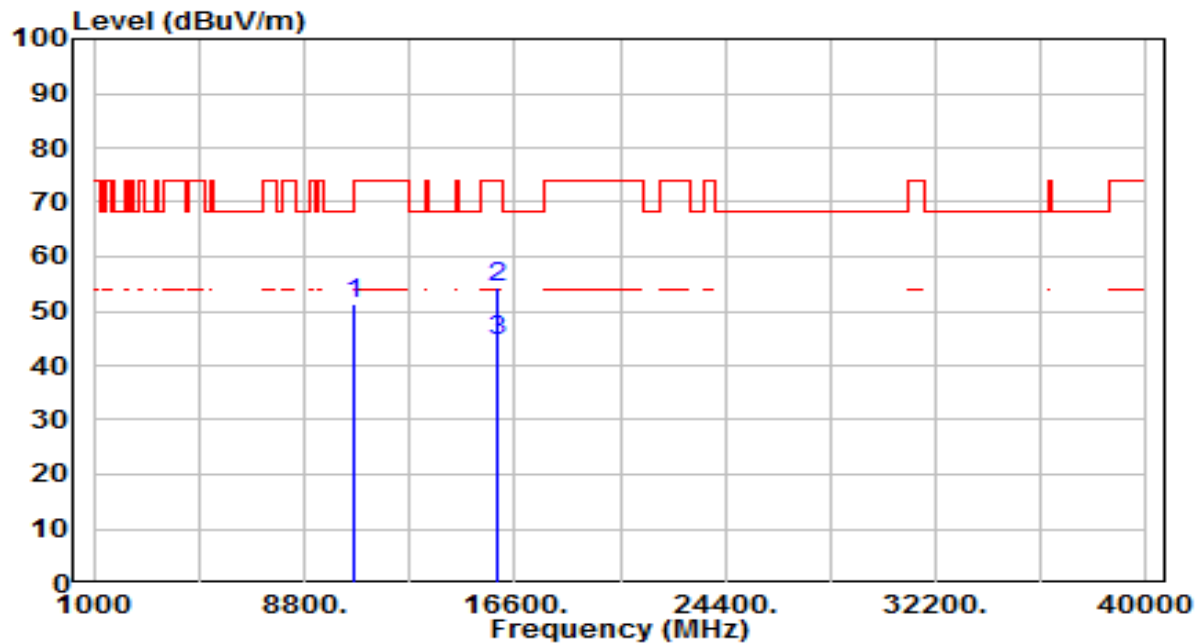


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10640.000       | 43.88          | 7.33       | 51.22                | -22.78      | 74.00          | 100         | 148         | Peak              |
| 2  | * 15960.000     | 45.55          | 8.68       | 54.23                | -19.77      | 74.00          | 100         | 324         | Peak              |
| 3  | * 15960.000     | 35.71          | 8.68       | 44.39                | -9.61       | 54.00          | 100         | 324         | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

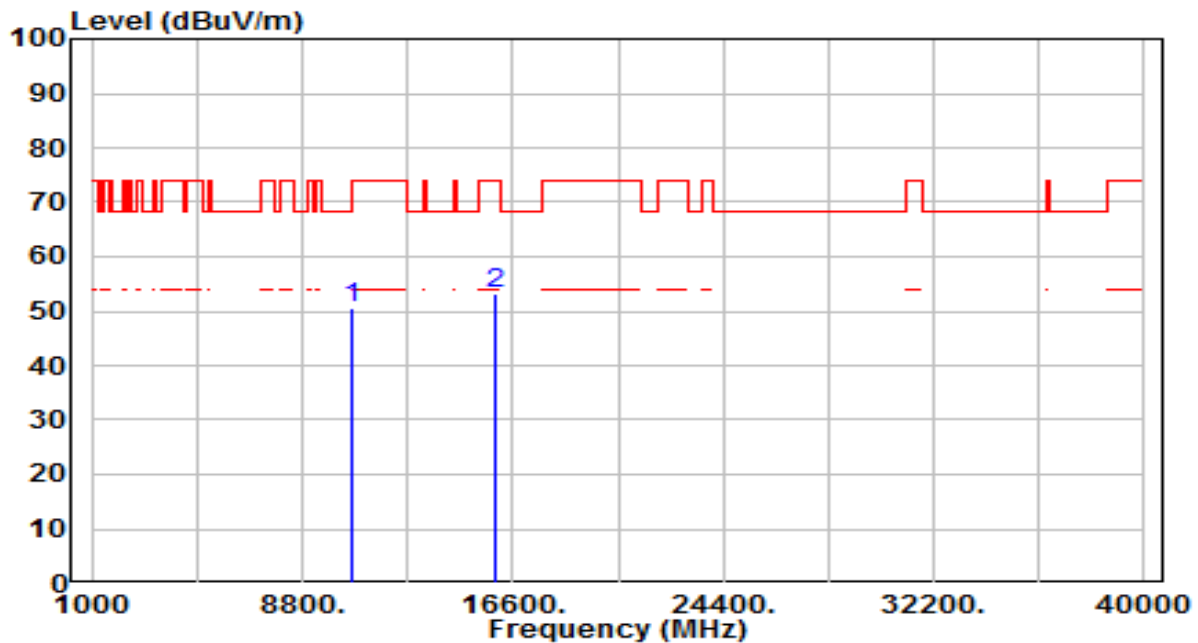


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10640.000       | 43.38          | 7.33       | 50.72                | -23.28      | 74.00          | 100         | 113         | Peak              |
| 2  | * 15960.000     | 44.50          | 8.68       | 53.18                | -20.82      | 74.00          | 100         | 34          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

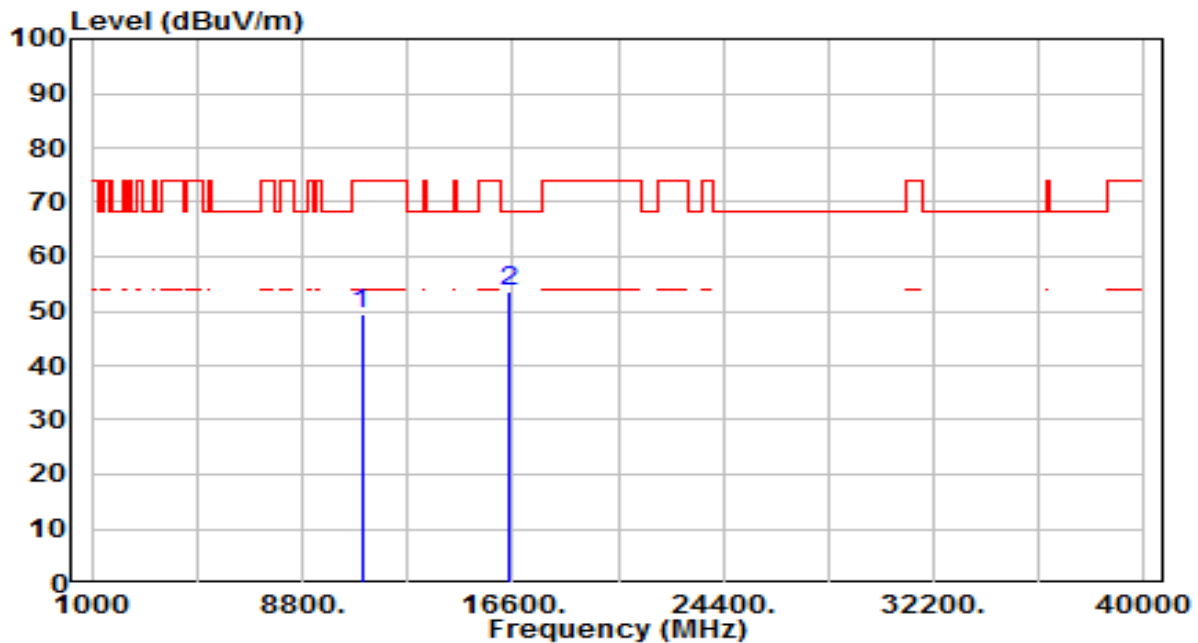


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11000.000       | 42.33          | 6.97       | 49.30                | -24.70      | 74.00          | 100         | 36          | Peak              |
| 2  | * 16500.000     | 45.61          | 8.03       | 53.64                | -14.56      | 68.20          | 100         | 340         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

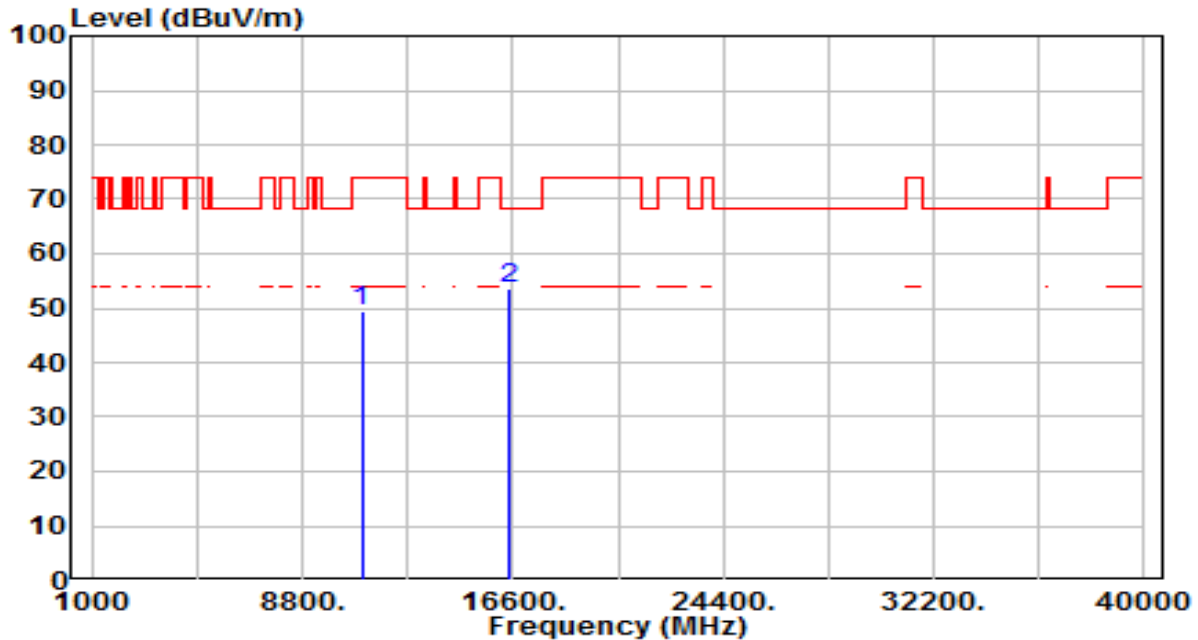


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11000.000       | 42.62          | 6.97       | 49.59                | -24.41      | 74.00          | 100         | 238         | Peak              |
| 2  | * 16500.000     | 45.65          | 8.03       | 53.68                | -14.52      | 68.20          | 100         | 120         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 116_ANT 0 | Test Voltage         | AC 120V/60Hz |

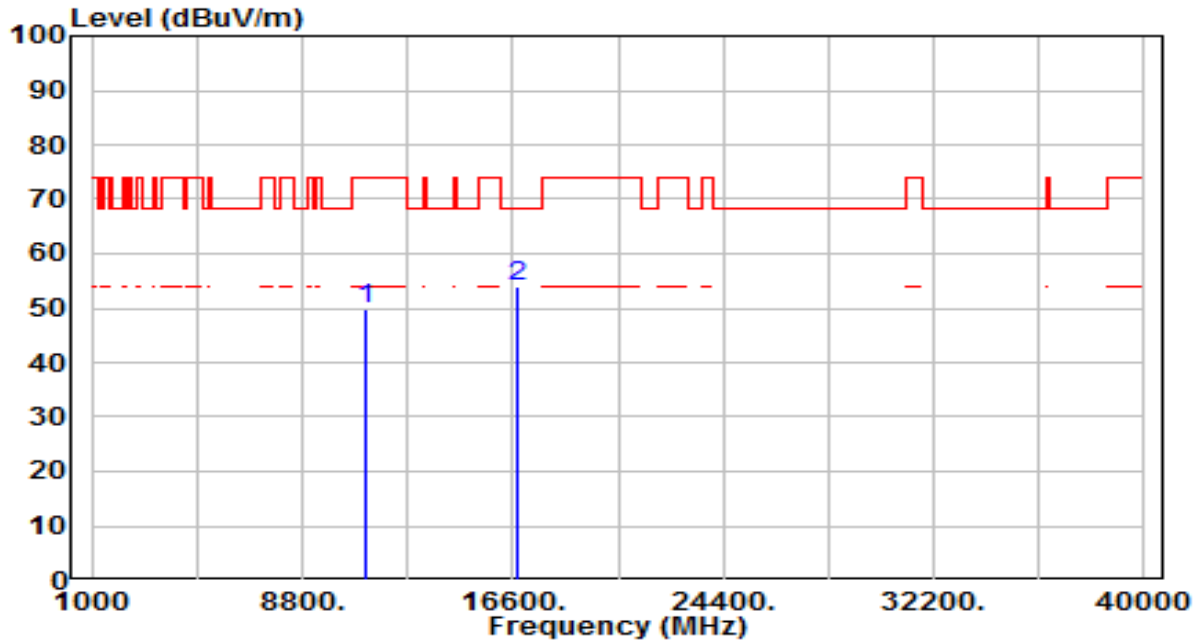


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11160.000       | 42.62          | 7.31       | 49.93                | -24.07      | 74.00          | 100         | 251         | Peak              |
| 2  | * 16740.000     | 46.43          | 7.50       | 53.92                | -14.28      | 68.20          | 100         | 51          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 116_ANT 0 | Test Voltage         | AC 120V/60Hz |

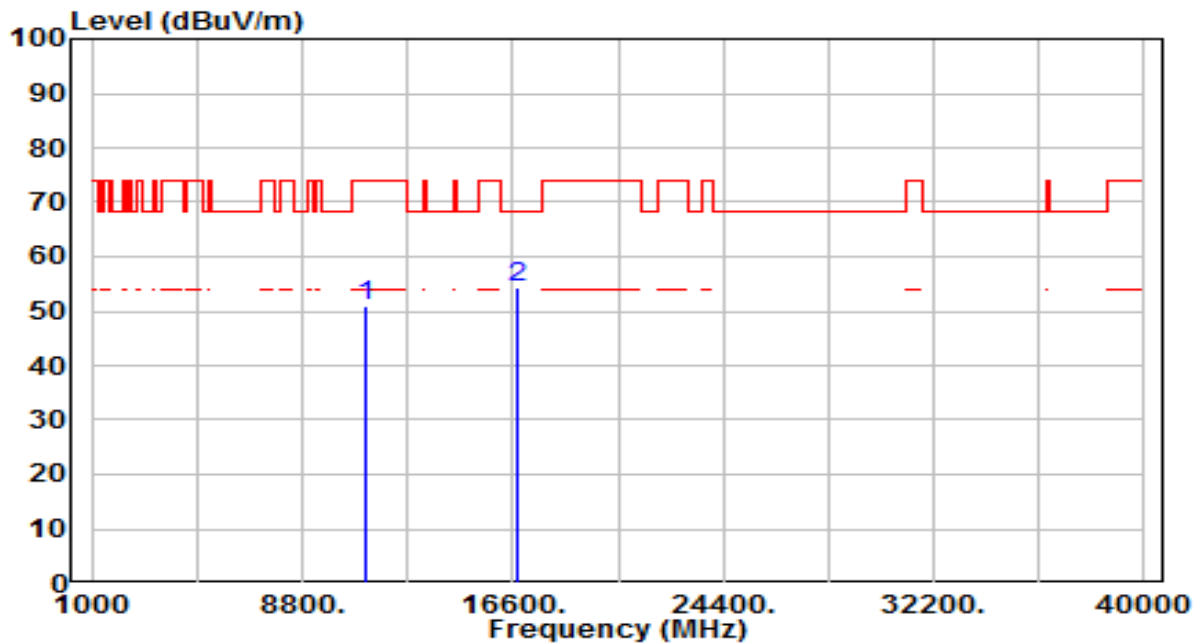


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11160.000       | 43.75          | 7.31       | 51.06                | -22.94      | 74.00          | 100         | 84          | Peak              |
| 2  | * 16740.000     | 46.82          | 7.50       | 54.32                | -13.88      | 68.20          | 100         | 354         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 140_ANT 0 | Test Voltage         | AC 120V/60Hz |

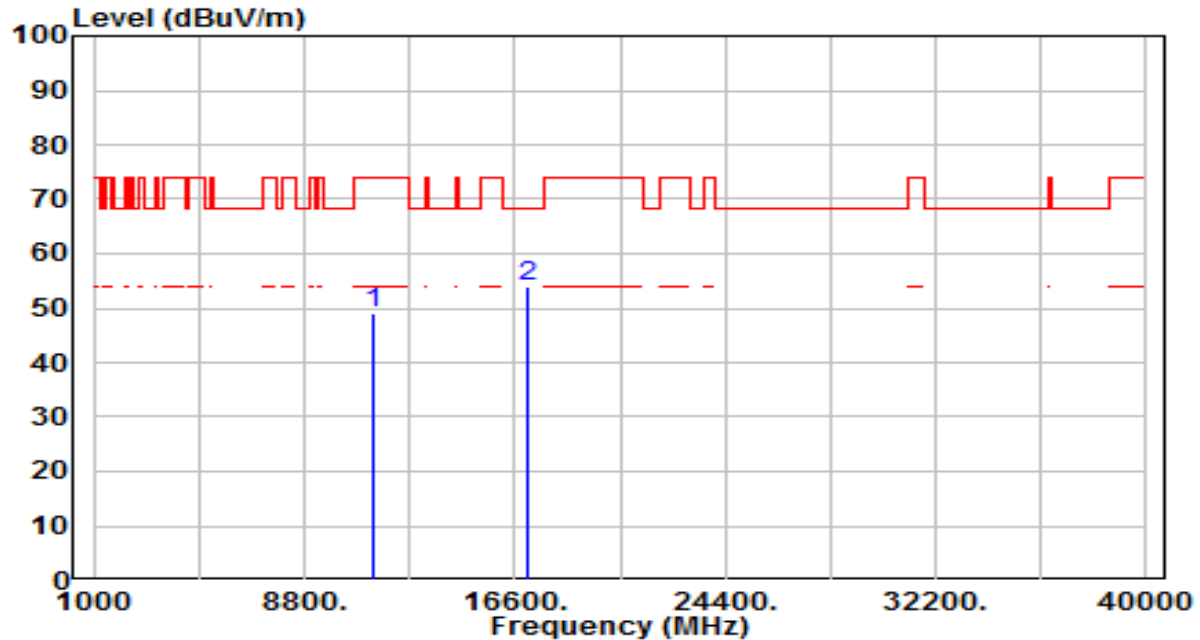


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11400.000       | 41.88          | 7.26       | 49.14                | -24.86      | 74.00          | 100         | 89          | Peak              |
| 2  | * 17100.000     | 47.43          | 6.57       | 54.00                | -14.20      | 68.20          | 100         | 226         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 140_ANT 0 | Test Voltage         | AC 120V/60Hz |

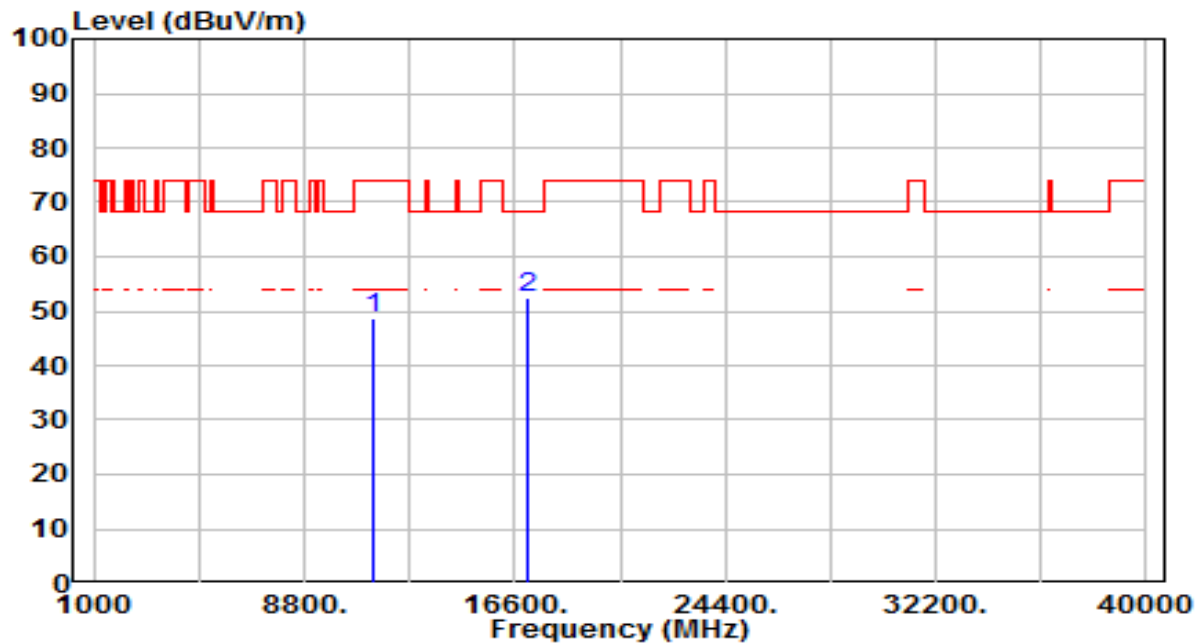


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11400.000       | 41.59          | 7.26       | 48.85                | -25.15      | 74.00          | 100         | 319         | Peak              |
| 2  | * 17100.000     | 45.96          | 6.57       | 52.52                | -15.68      | 68.20          | 100         | 207         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 144_ANT 0 | Test Voltage         | AC 120V/60Hz |

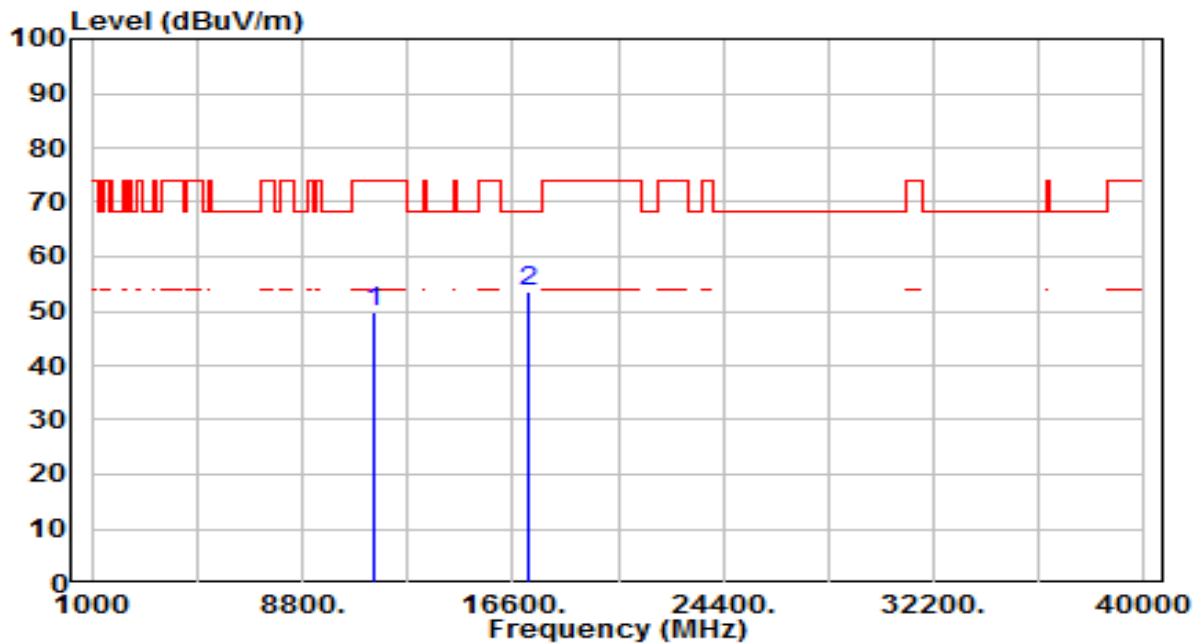


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 42.48          | 7.46       | 49.94                | -24.06      | 74.00          | 100         | 3           | Peak              |
| 2  | * 17160.000     | 46.75          | 6.68       | 53.44                | -14.76      | 68.20          | 100         | 2           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 144_ANT 0 | Test Voltage         | AC 120V/60Hz |

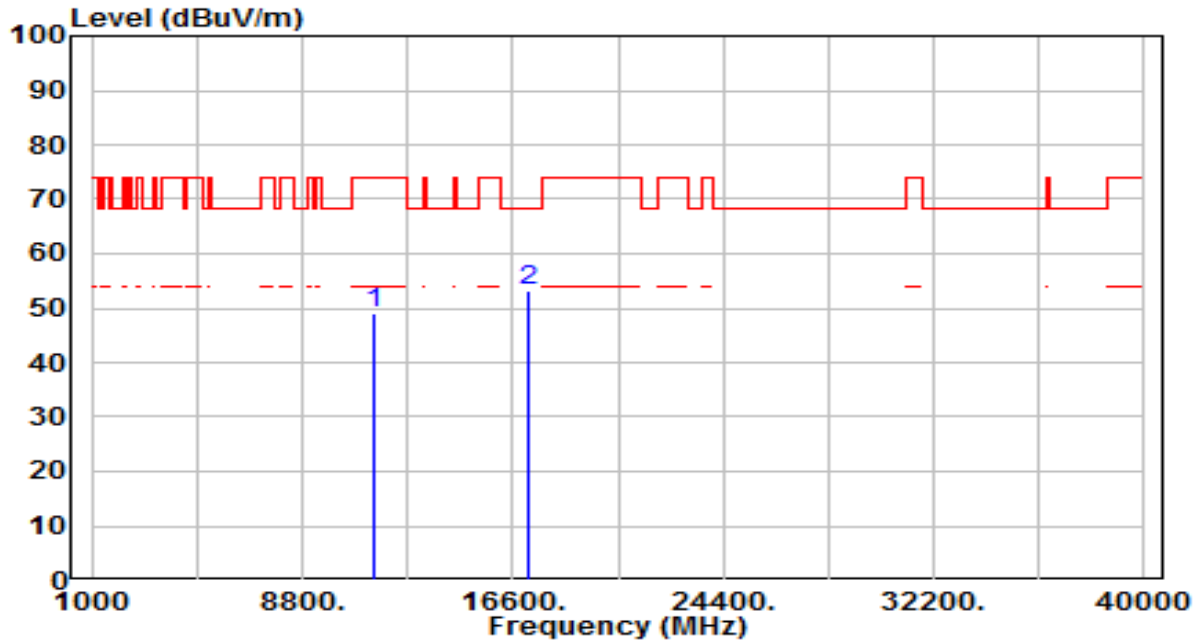


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 41.76          | 7.46       | 49.22                | -24.78      | 74.00          | 100         | 300         | Peak              |
| 2  | * 17160.000     | 46.40          | 6.68       | 53.08                | -15.12      | 68.20          | 100         | 161         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 149_ANT 0 | Test Voltage         | AC 120V/60Hz |

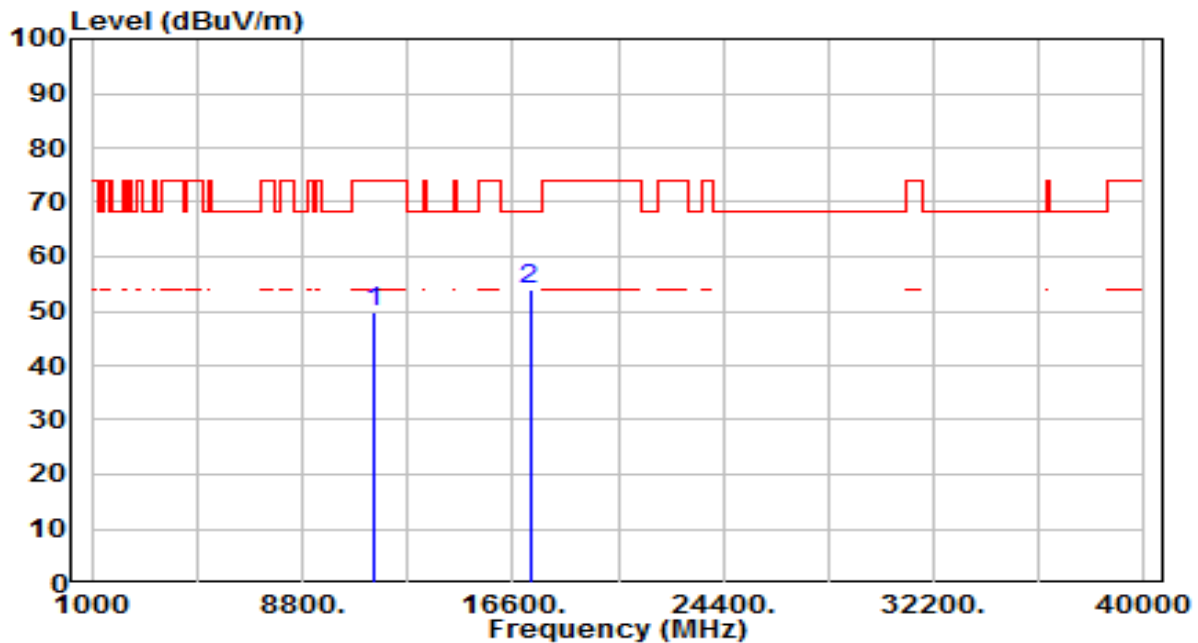


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 42.08          | 7.72       | 49.80                | -24.20      | 74.00          | 100         | 179         | Peak              |
| 2  | * 17235.000     | 47.29          | 6.54       | 53.83                | -14.37      | 68.20          | 100         | 54          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 149_ANT 0 | Test Voltage         | AC 120V/60Hz |

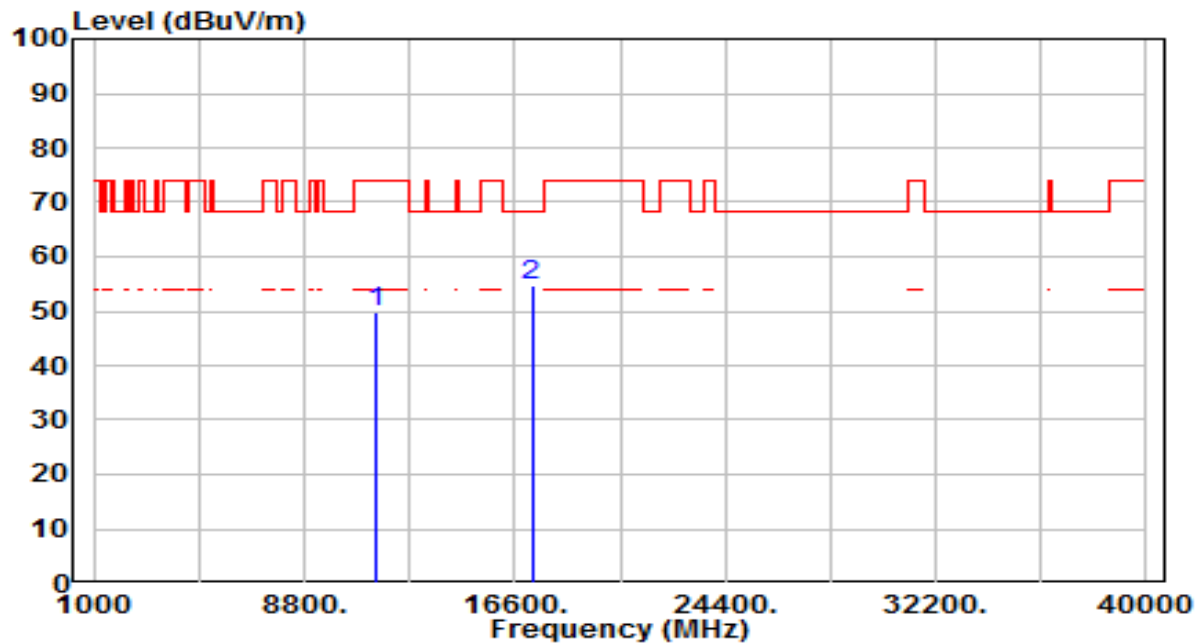


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 41.92          | 7.72       | 49.64                | -24.36      | 74.00          | 100         | 50          | Peak              |
| 2  | * 17235.000     | 48.32          | 6.54       | 54.86                | -13.34      | 68.20          | 100         | 246         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 157_ANT 0 | Test Voltage         | AC 120V/60Hz |

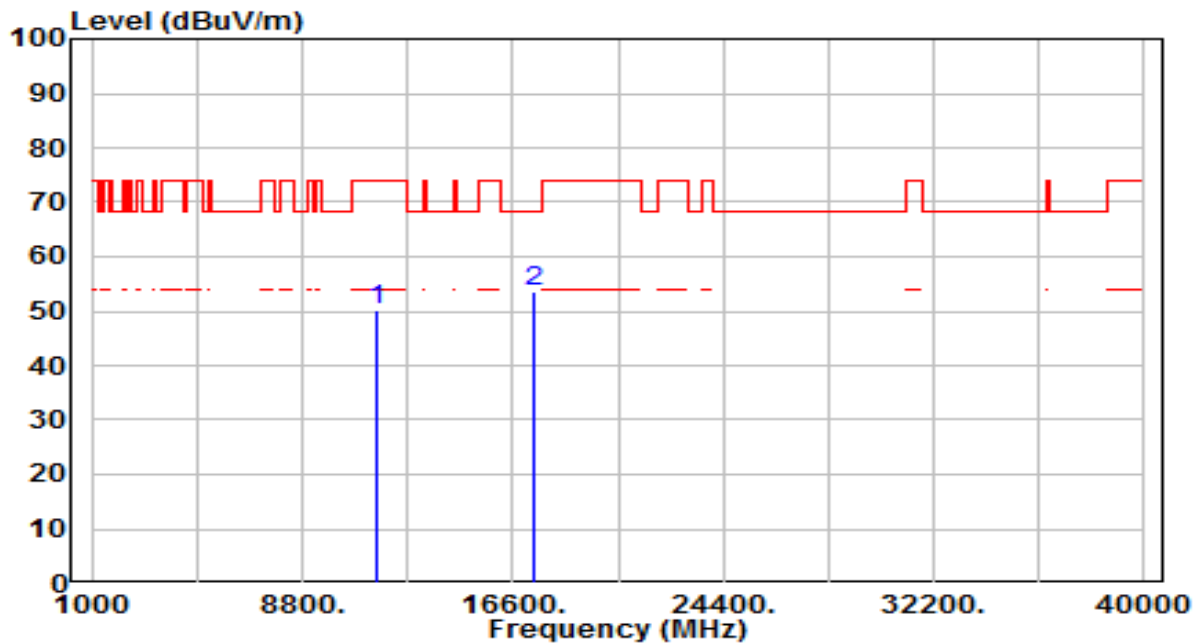


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 42.70          | 7.47       | 50.17                | -23.83      | 74.00          | 100         | 135         | Peak              |
| 2  | * 17355.000     | 47.64          | 5.95       | 53.59                | -14.61      | 68.20          | 100         | 204         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 157_ANT 0 | Test Voltage         | AC 120V/60Hz |

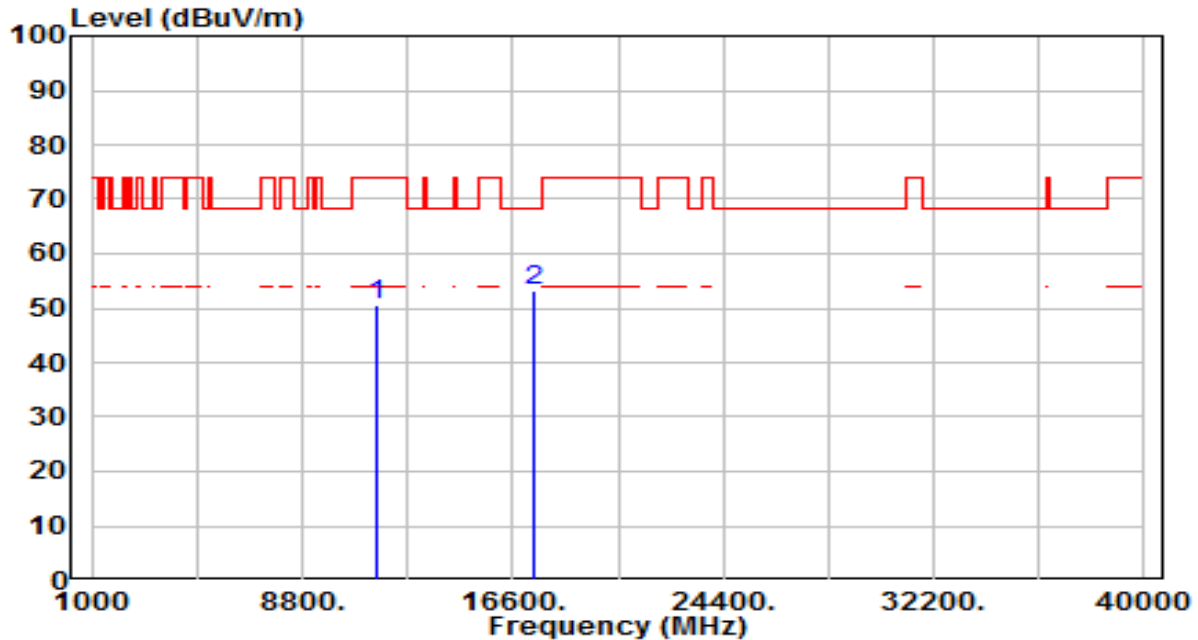


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 43.13          | 7.47       | 50.60                | -23.40      | 74.00          | 100         | 210         | Peak              |
| 2  | * 17355.000     | 47.08          | 5.95       | 53.03                | -15.17      | 68.20          | 100         | 309         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 165_ANT 0 | Test Voltage         | AC 120V/60Hz |

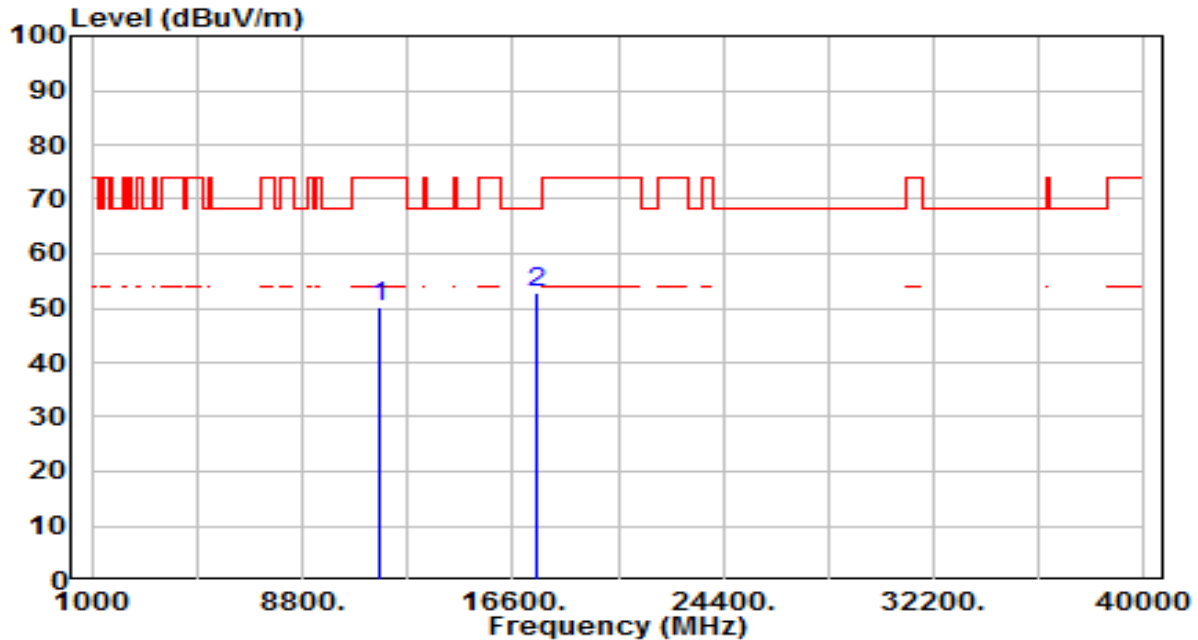


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 42.84          | 7.17       | 50.01                | -23.99      | 74.00          | 100         | 42          | Peak              |
| 2  | * 17475.000     | 46.66          | 6.02       | 52.68                | -15.52      | 68.20          | 100         | 176         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 165_ANT 0 | Test Voltage         | AC 120V/60Hz |

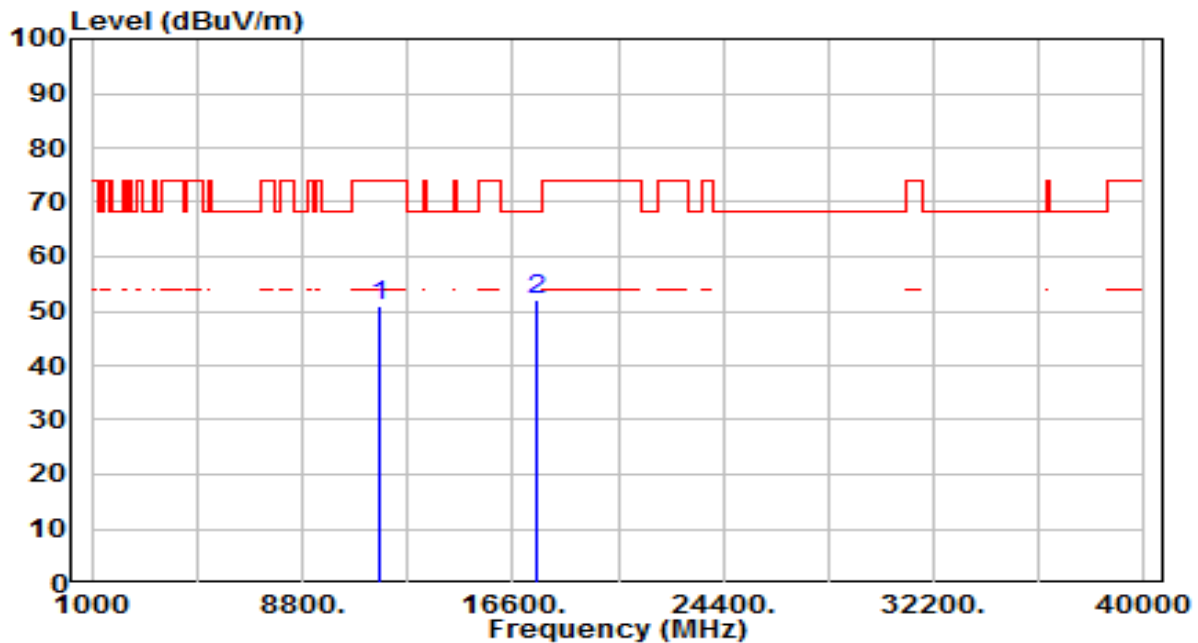


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 43.66          | 7.17       | 50.83                | -23.17      | 74.00          | 100         | 106         | Peak              |
| 2  | * 17475.000     | 46.17          | 6.02       | 52.19                | -16.01      | 68.20          | 100         | 159         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                         | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band1_CH 38_ANT 0 | Test Voltage         | AC 120V/60Hz |

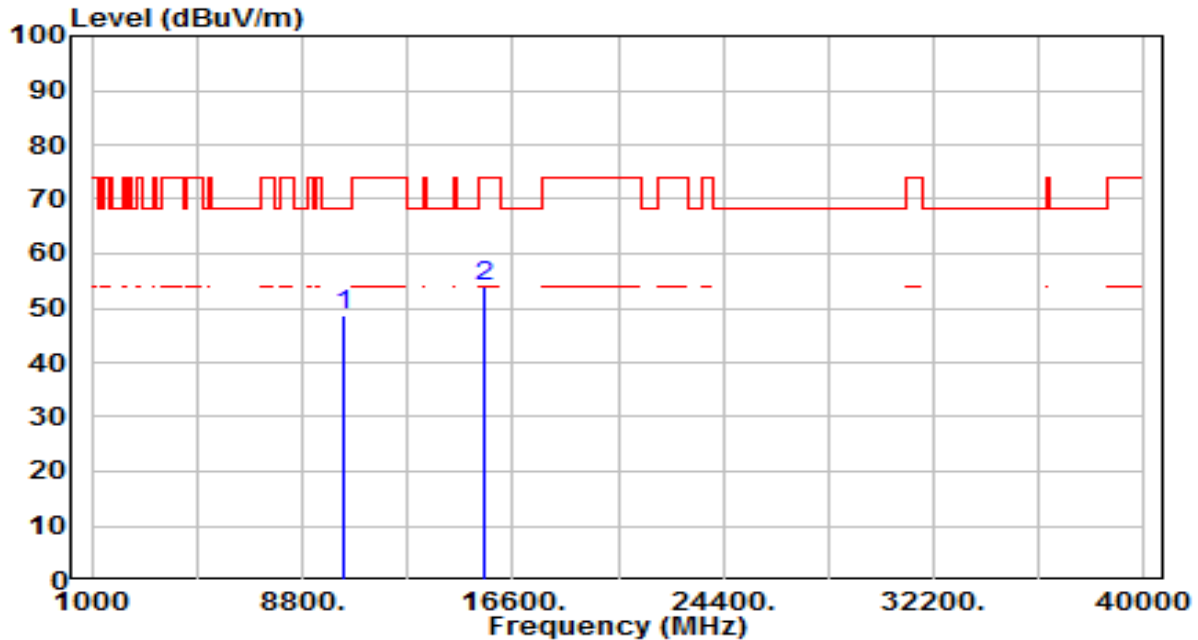


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10380.000       | 41.17          | 7.56       | 48.73                | -19.47      | 68.20          | 100         | 358         | Peak              |
| 2  |   | 15570.000       | 45.48          | 8.50       | 53.98                | -20.02      | 74.00          | 100         | 264         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band1_CH 38_ANT 0 | Test Voltage         | AC 120V/60Hz |

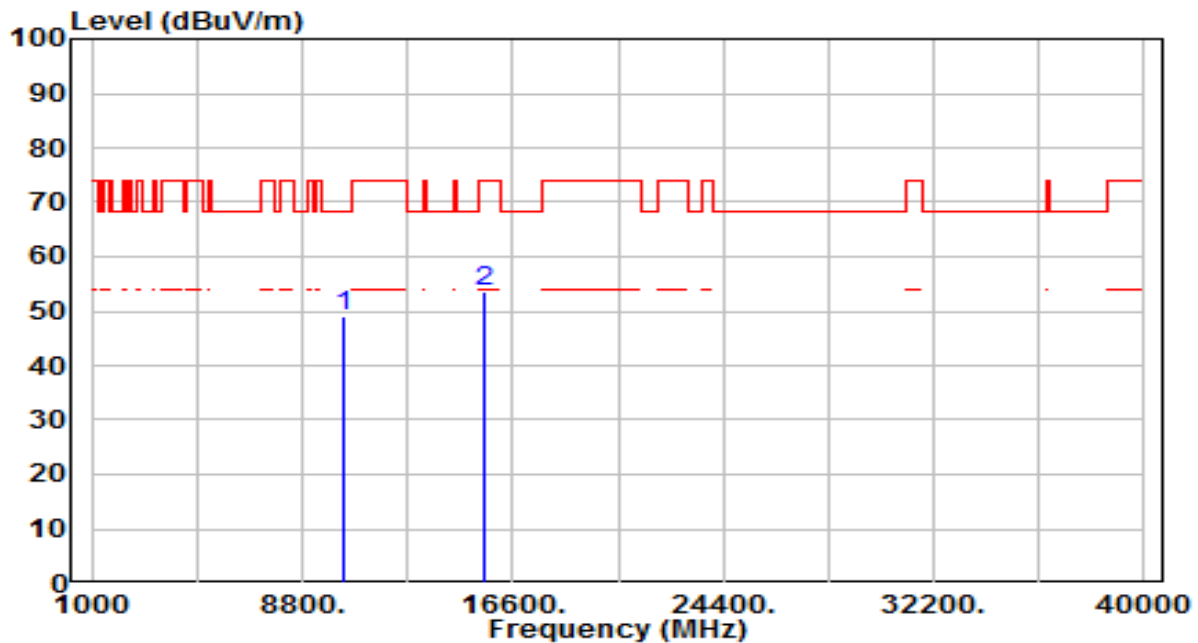


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10380.000       | 41.36          | 7.56       | 48.93                | -19.27      | 68.20          | 100         | 214         | Peak              |
| 2  |   | 15570.000       | 44.90          | 8.50       | 53.41                | -20.59      | 74.00          | 100         | 163         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                         | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band1_CH 46_ANT 0 | Test Voltage         | AC 120V/60Hz |

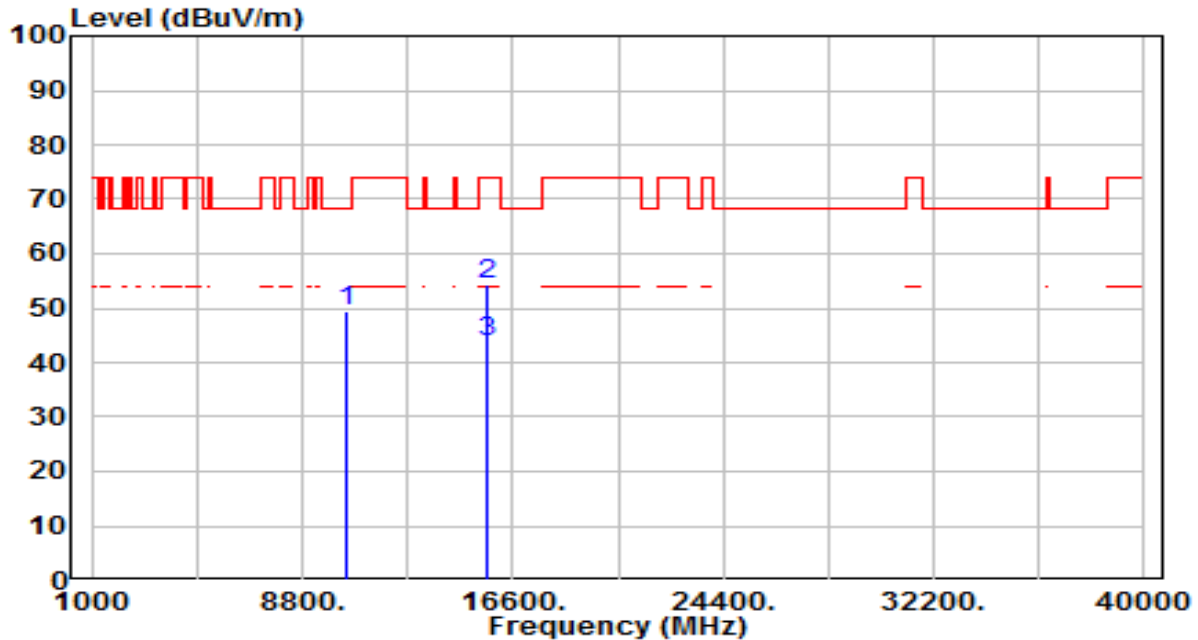


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10460.000       | 42.09          | 7.49       | 49.58                | -18.62      | 68.20          | 100         | 320         | Peak              |
| 2  | * 15690.000     | 45.39          | 8.79       | 54.19                | -19.81      | 74.00          | 100         | 97          | Peak              |
| 3  | * 15690.000     | 35.13          | 8.79       | 43.92                | -10.08      | 54.00          | 100         | 97          | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band1_CH 46_ANT 0 | Test Voltage         | AC 120V/60Hz |

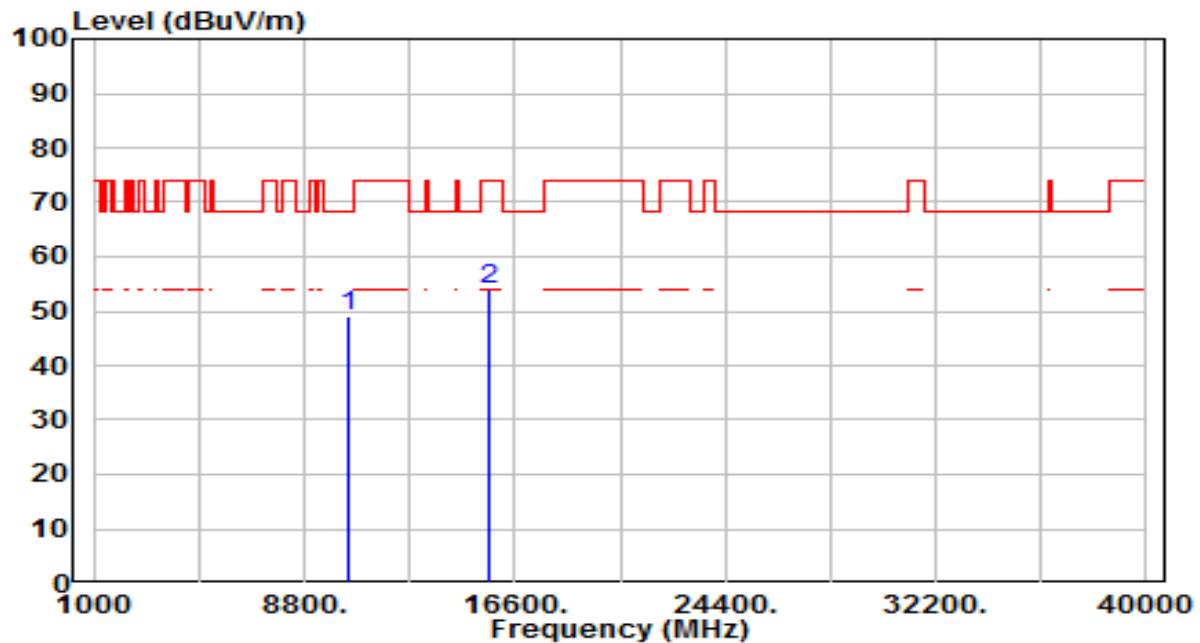


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 10460.000     | 41.45          | 7.49       | 48.94                | -19.26      | 68.20          | 100         | 84          | Peak              |
| 2  | 15690.000       | 45.02          | 8.79       | 53.81                | -20.19      | 74.00          | 100         | 127         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                         | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band2_CH 54_ANT 0 | Test Voltage         | AC 120V/60Hz |

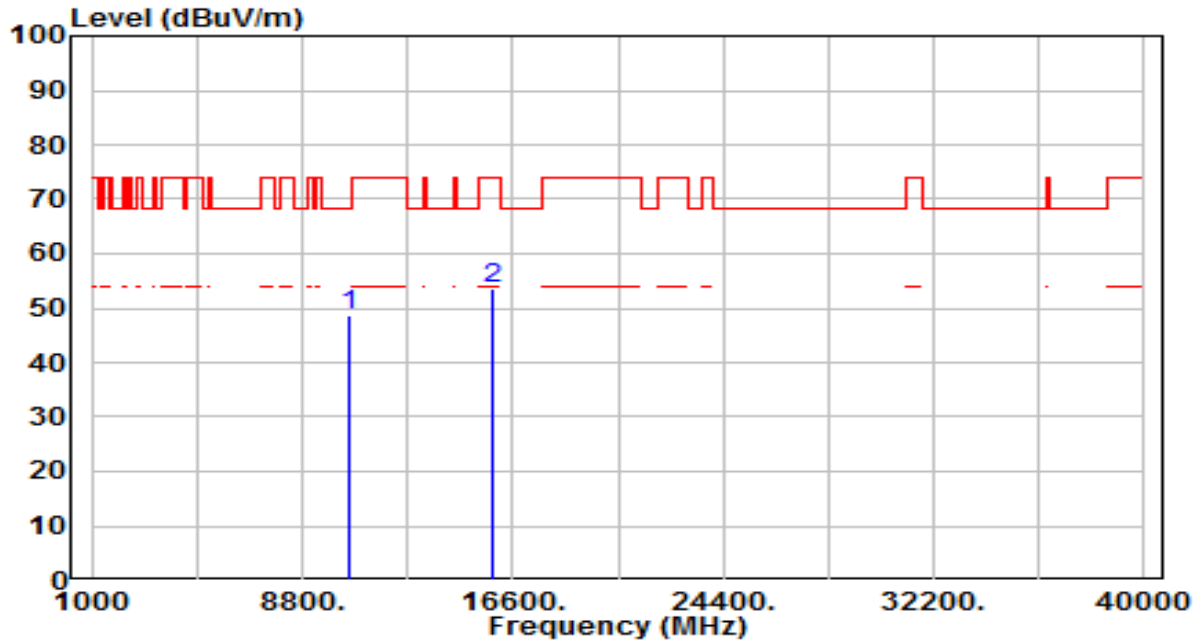


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10540.000       | 41.34          | 7.33       | 48.67                | -19.53      | 68.20          | 100         | 350         | Peak              |
| 2  |   | 15810.000       | 44.76          | 8.78       | 53.54                | -20.46      | 74.00          | 100         | 353         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band2_CH 54_ANT 0 | Test Voltage         | AC 120V/60Hz |

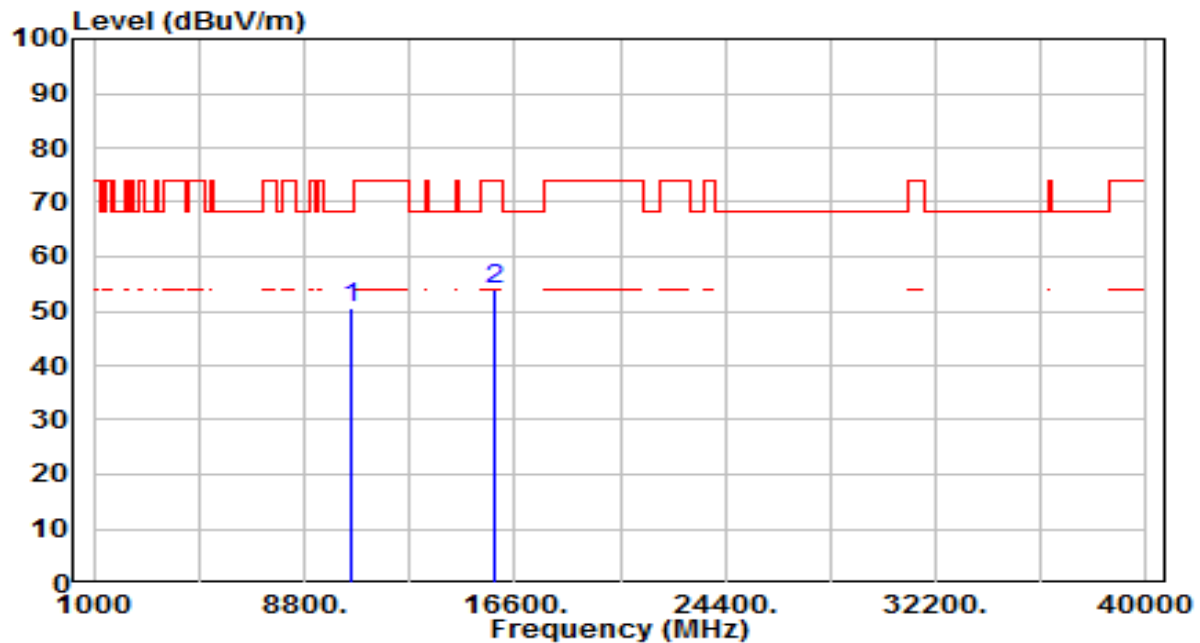


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10540.000       | 43.33          | 7.33       | 50.66                | -17.54      | 68.20          | 100         | 172         | Peak              |
| 2  |   | 15810.000       | 45.14          | 8.78       | 53.92                | -20.08      | 74.00          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                         | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band2_CH 62_ANT 0 | Test Voltage         | AC 120V/60Hz |

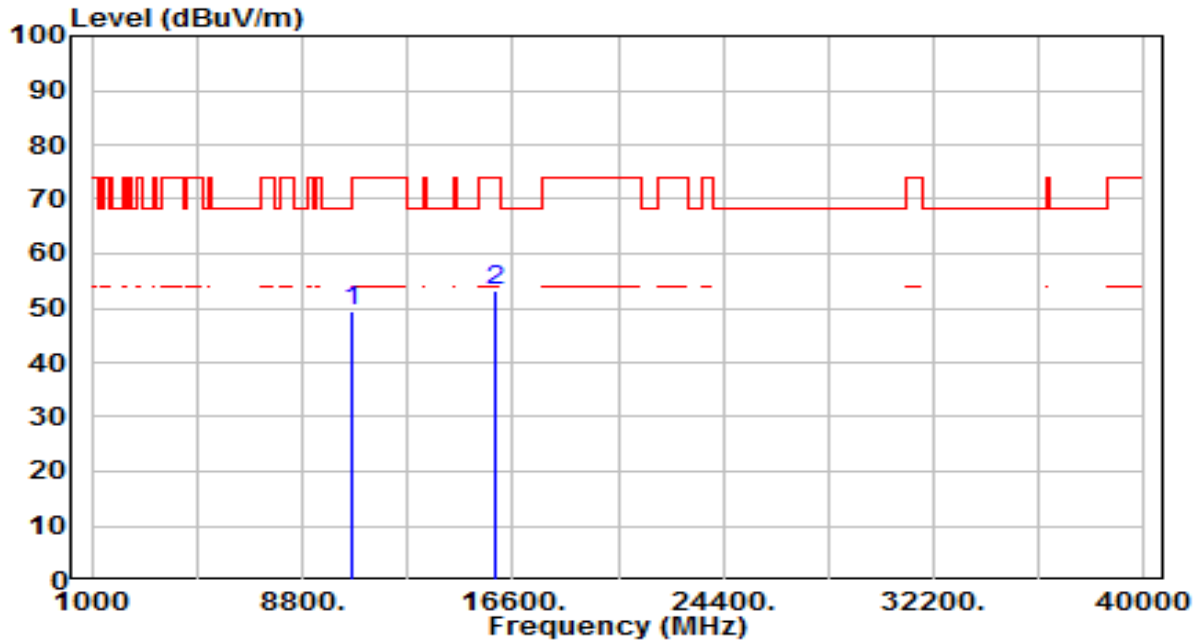


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10620.000       | 42.15          | 7.22       | 49.36                | -24.64      | 74.00          | 100         | 360         | Peak              |
| 2  | * 15930.000     | 44.61          | 8.74       | 53.35                | -20.65      | 74.00          | 100         | 234         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band2_CH 62_ANT 0 | Test Voltage         | AC 120V/60Hz |

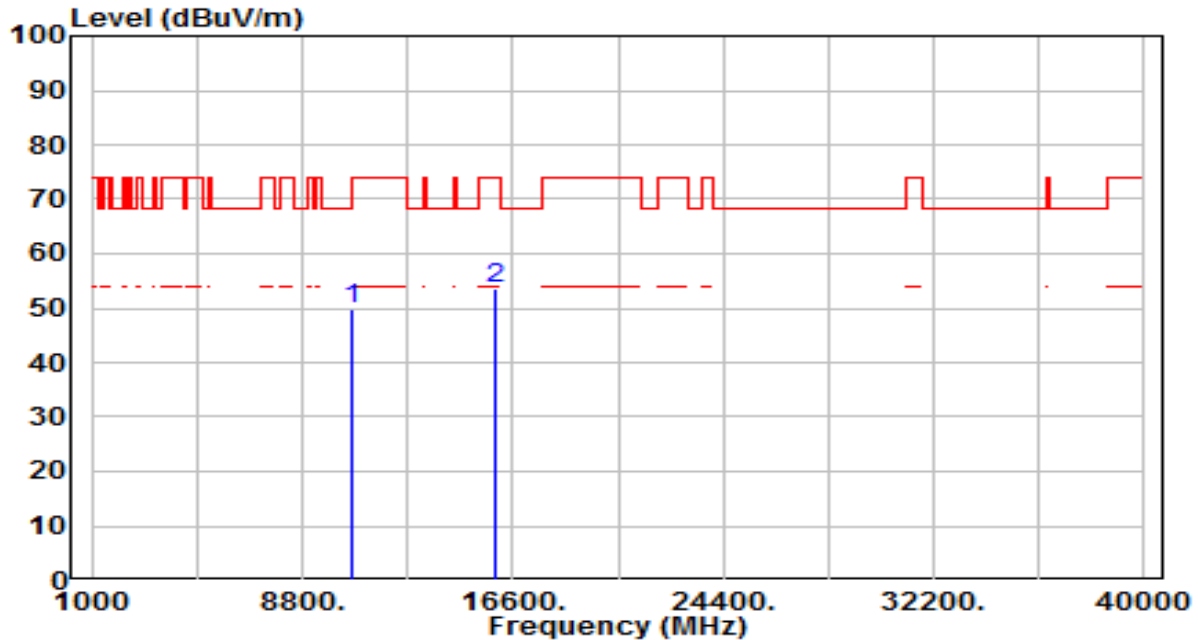


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10620.000       | 42.52          | 7.22       | 49.74                | -24.26      | 74.00          | 100         | 43          | Peak              |
| 2  | * 15930.000     | 44.84          | 8.74       | 53.59                | -20.41      | 74.00          | 100         | 229         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 102_ANT 0 | Test Voltage         | AC 120V/60Hz |

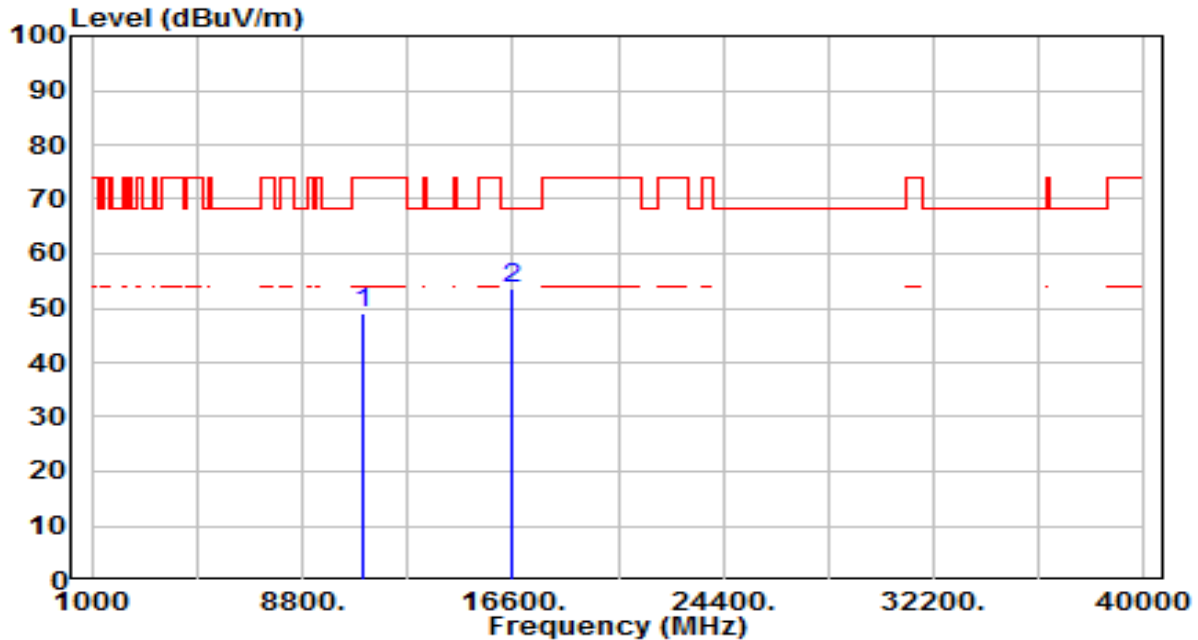


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11020.000       | 41.90          | 7.00       | 48.90                | -25.10      | 74.00          | 100         | 359         | Peak              |
| 2  | * 16530.000     | 45.72          | 7.95       | 53.66                | -14.54      | 68.20          | 100         | 286         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 102_ANT 0 | Test Voltage         | AC 120V/60Hz |

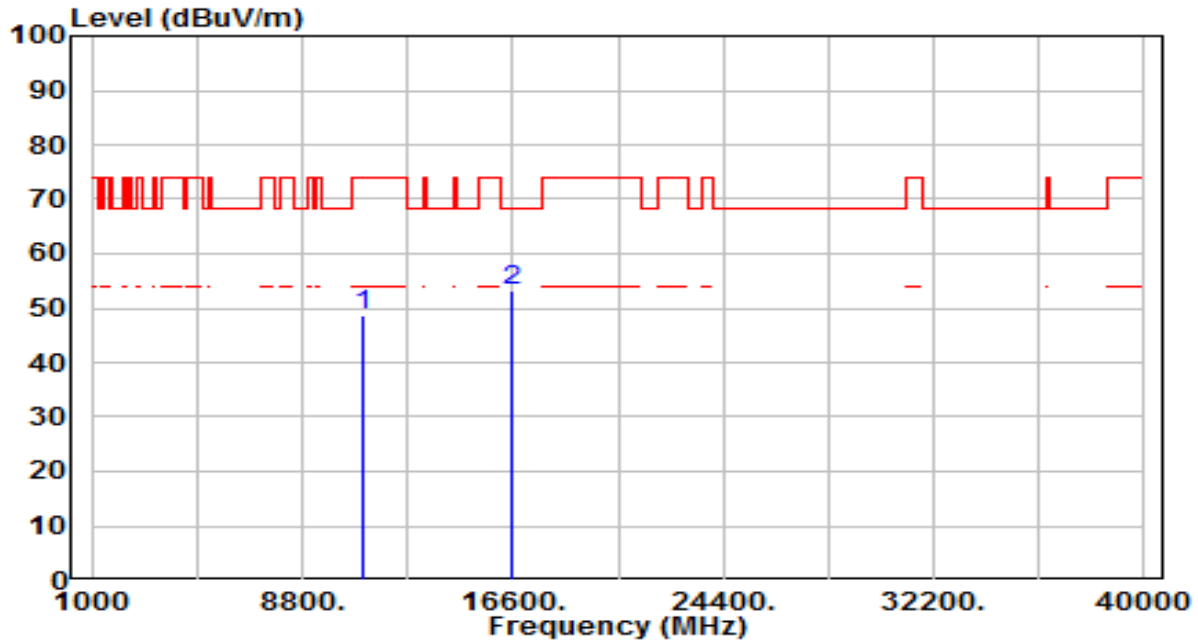


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11020.000       | 41.72          | 7.00       | 48.72                | -25.28      | 74.00          | 100         | 120         | Peak              |
| 2  | * 16530.000     | 45.30          | 7.95       | 53.24                | -14.96      | 68.20          | 100         | 209         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 110_ANT 0 | Test Voltage         | AC 120V/60Hz |

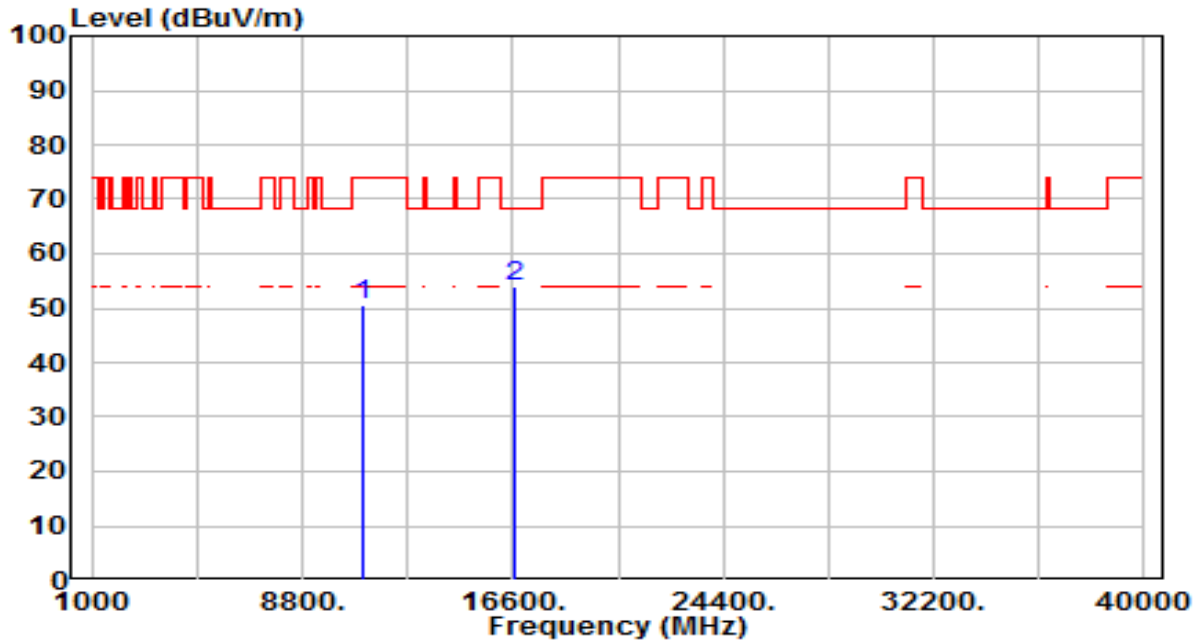


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11100.000       | 43.56          | 7.10       | 50.66                | -23.34      | 74.00          | 100         | 305         | Peak              |
| 2  | * 16650.000     | 46.41          | 7.63       | 54.05                | -14.15      | 68.20          | 100         | 248         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 110_ANT 0 | Test Voltage         | AC 120V/60Hz |

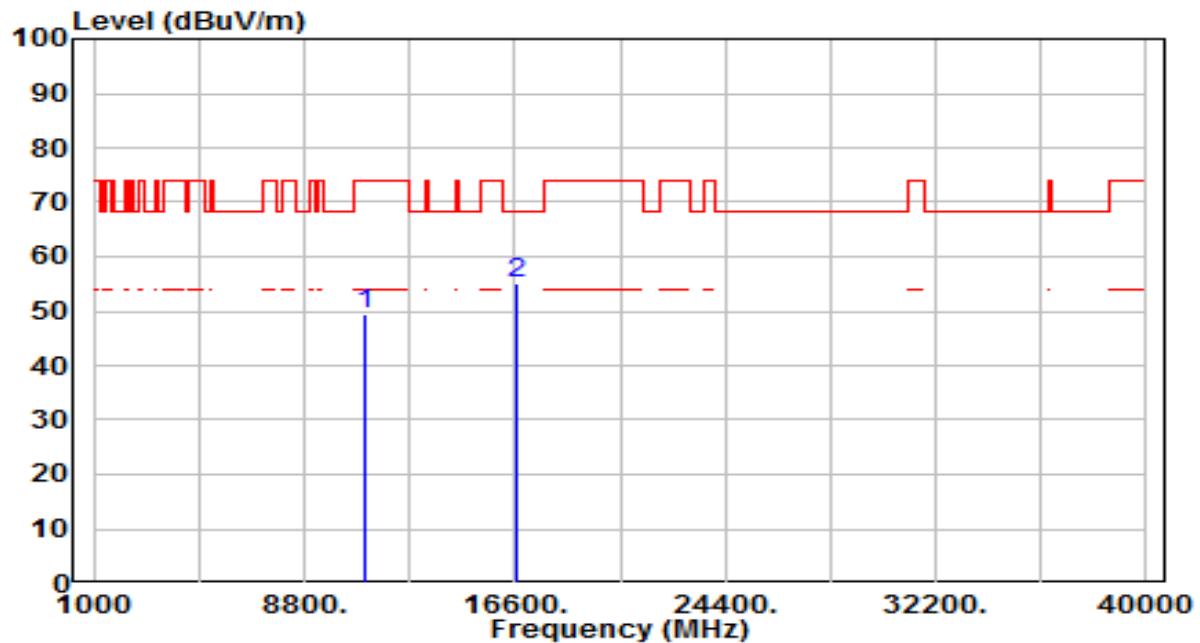


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11100.000       | 42.43          | 7.10       | 49.53                | -24.47      | 74.00          | 100         | 297         | Peak              |
| 2  | * 16650.000     | 47.64          | 7.63       | 55.27                | -12.93      | 68.20          | 100         | 186         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 134_ANT 0 | Test Voltage         | AC 120V/60Hz |

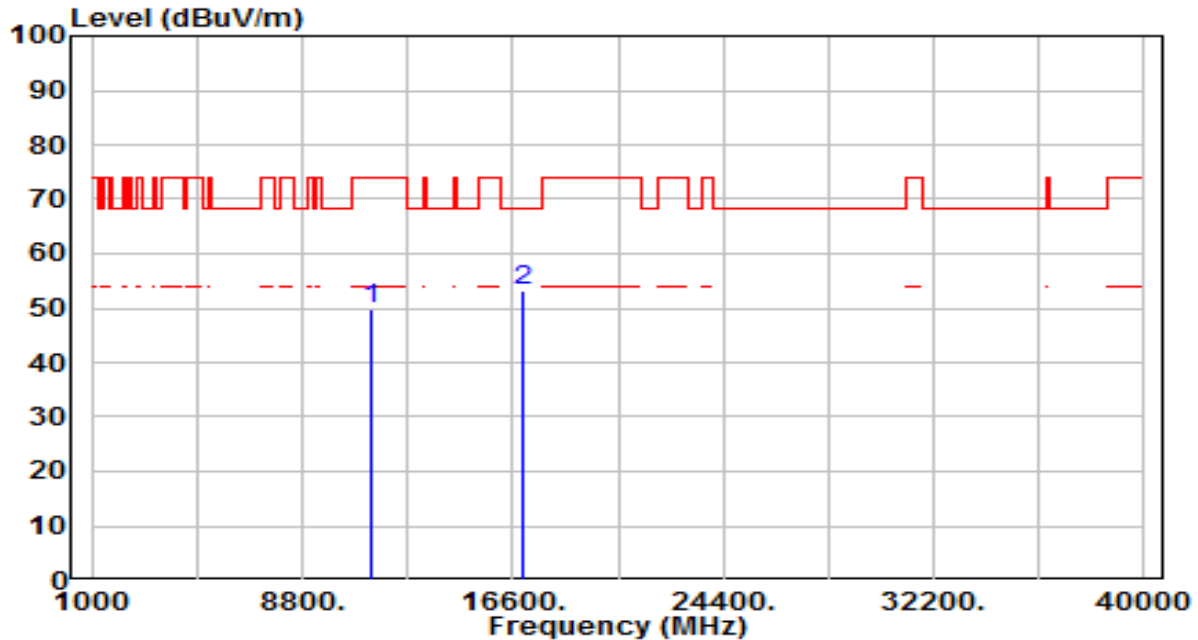


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11340.000       | 42.82          | 7.15       | 49.97                | -24.03      | 74.00          | 100         | 129         | Peak              |
| 2  | * 17010.000     | 46.41          | 6.70       | 53.11                | -15.09      | 68.20          | 100         | 134         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 134_ANT 0 | Test Voltage         | AC 120V/60Hz |

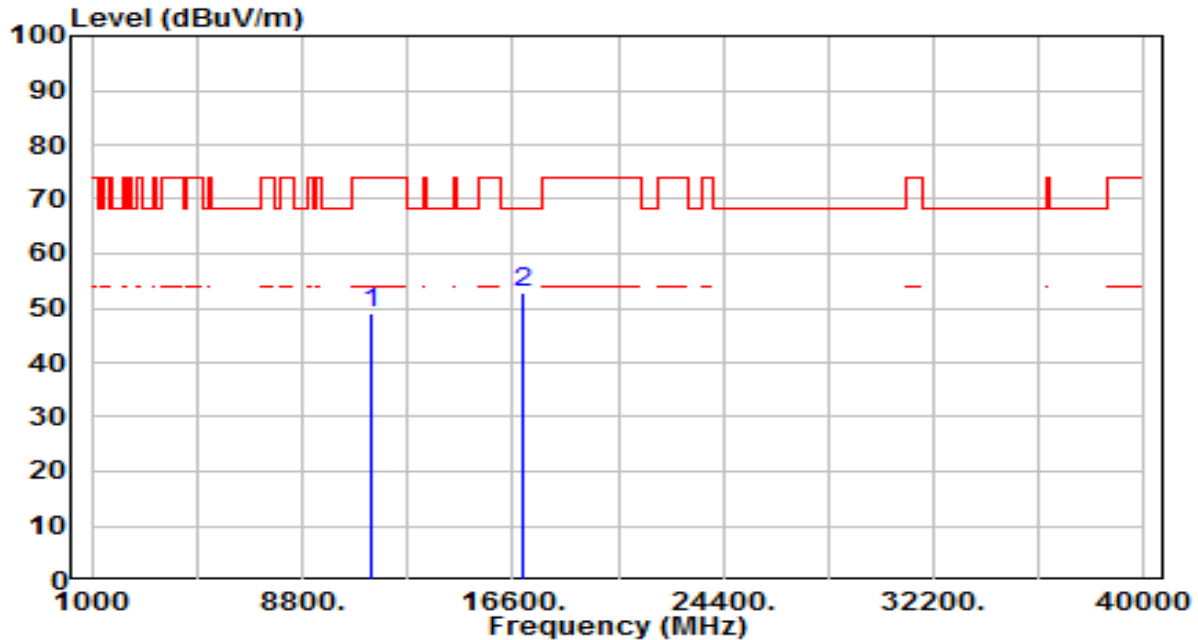


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11340.000       | 42.04          | 7.15       | 49.19                | -24.81      | 74.00          | 100         | 71          | Peak              |
| 2  | * 17010.000     | 46.28          | 6.70       | 52.97                | -15.23      | 68.20          | 100         | 191         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 142_ANT 0 | Test Voltage         | AC 120V/60Hz |

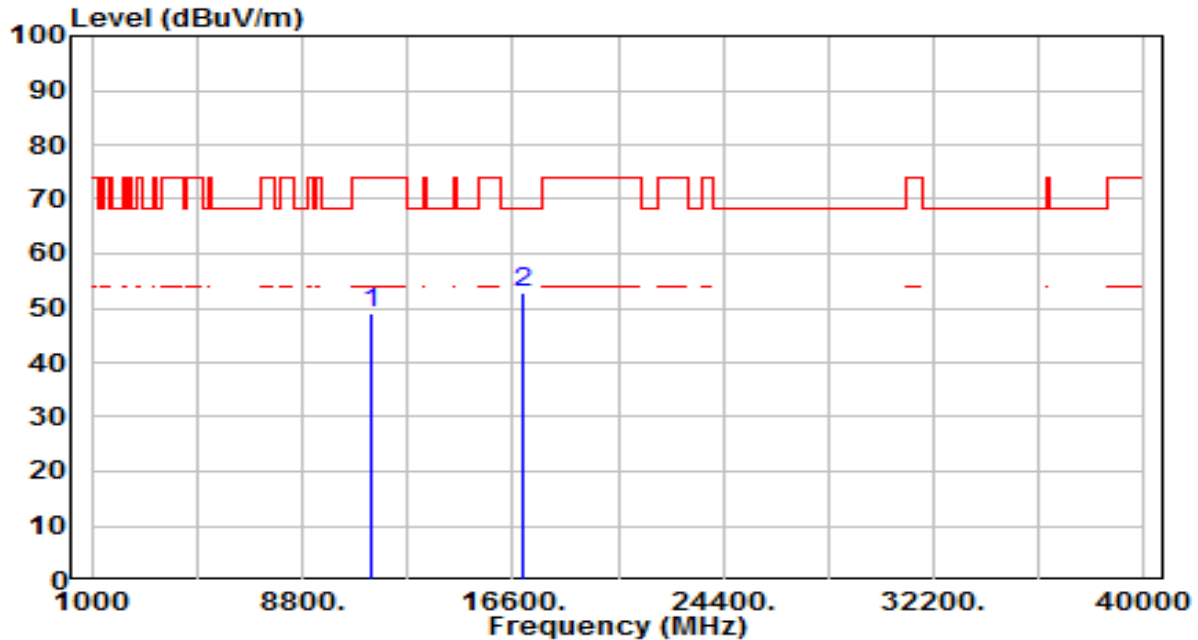


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11420.000       | 41.31          | 7.36       | 48.67                | -25.33      | 74.00          | 100         | 73          | Peak              |
| 2  | * 17130.000     | 47.51          | 6.62       | 54.13                | -14.07      | 68.20          | 100         | 96          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 142_ANT 0 | Test Voltage         | AC 120V/60Hz |

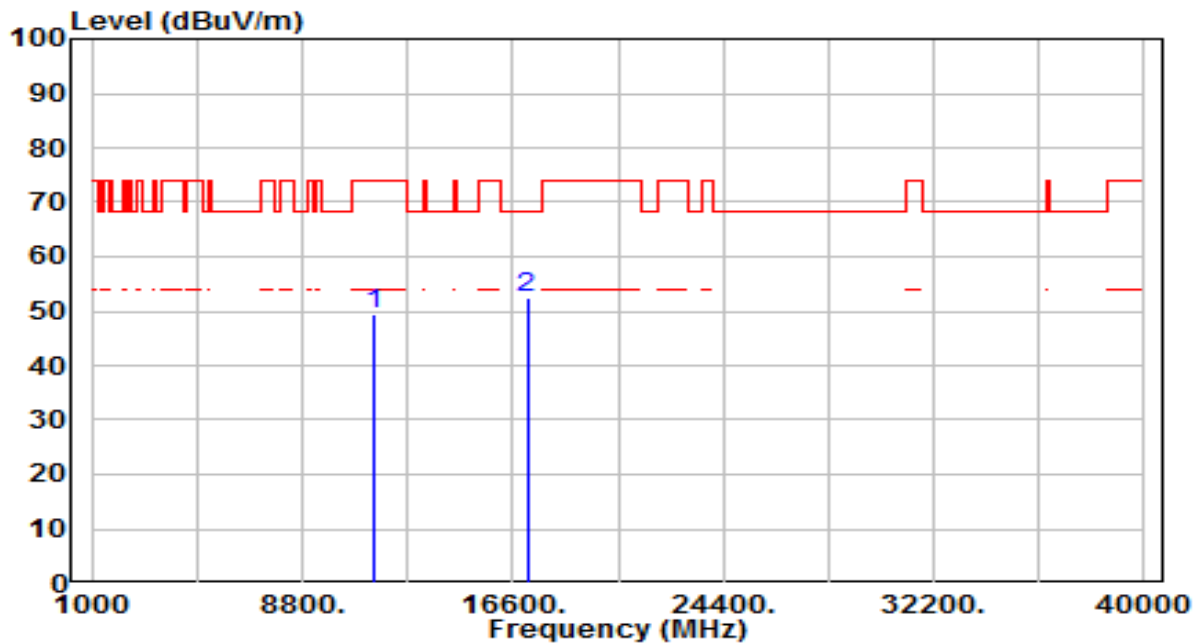


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11420.000       | 41.91          | 7.36       | 49.27                | -24.73      | 74.00          | 100         | 146         | Peak              |
| 2  | * 17130.000     | 46.01          | 6.62       | 52.63                | -15.57      | 68.20          | 100         | 120         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band4_CH 151_ANT 0 | Test Voltage         | AC 120V/60Hz |

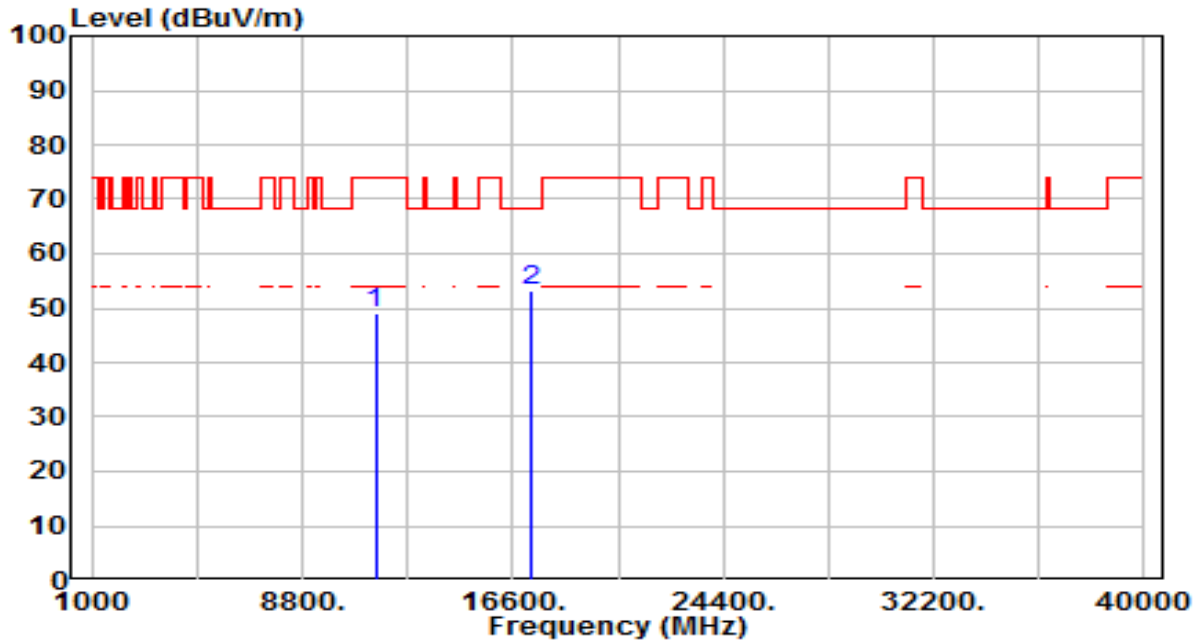


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11510.000       | 41.49          | 7.73       | 49.21                | -24.79      | 74.00          | 100         | 360         | Peak              |
| 2  | * 17265.000     | 46.72          | 6.34       | 53.06                | -15.14      | 68.20          | 100         | 266         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band4_CH 151_ANT 0 | Test Voltage         | AC 120V/60Hz |

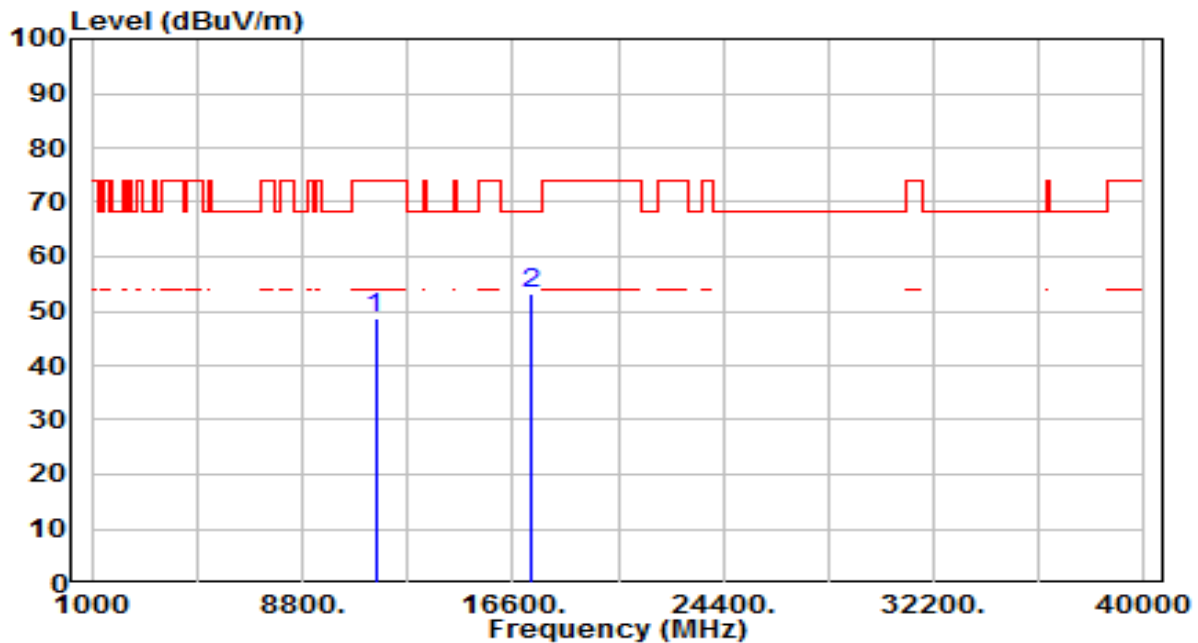


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11510.000       | 40.93          | 7.73       | 48.65                | -25.35      | 74.00          | 100         | 283         | Peak              |
| 2  | * 17265.000     | 46.69          | 6.34       | 53.04                | -15.16      | 68.20          | 100         | 16          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band4_CH 159_ANT 0 | Test Voltage         | AC 120V/60Hz |

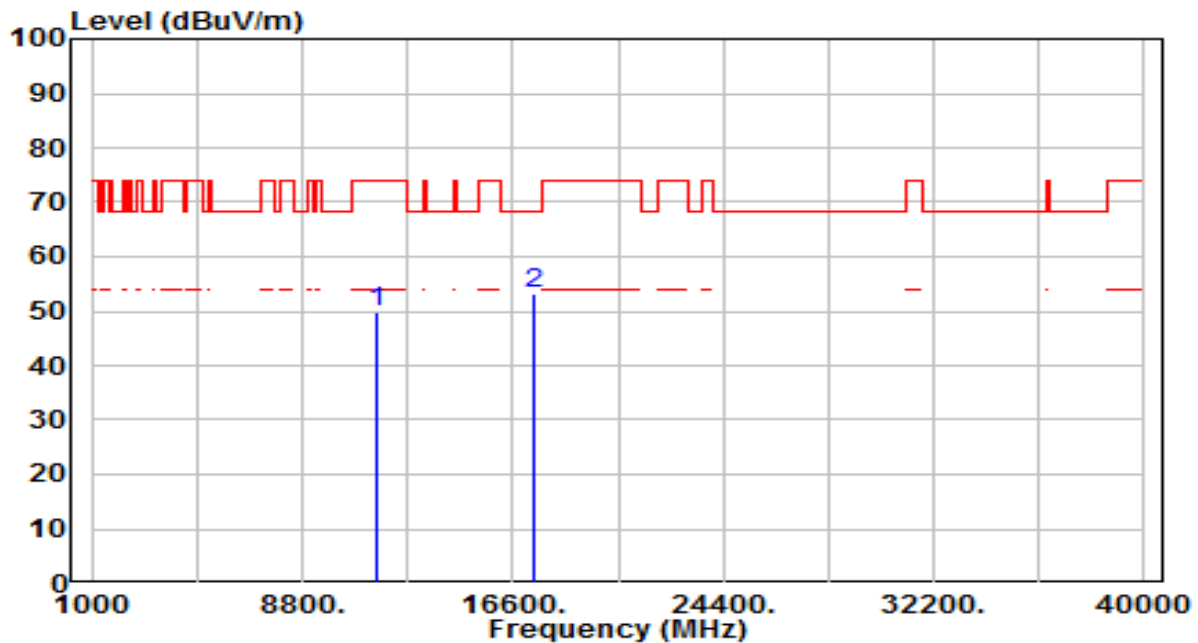


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11590.000       | 42.25          | 7.38       | 49.63                | -24.37      | 74.00          | 100         | 15          | Peak              |
| 2  | * 17385.000     | 47.26          | 5.86       | 53.12                | -15.08      | 68.20          | 100         | 180         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band4_CH 159_ANT 0 | Test Voltage         | AC 120V/60Hz |

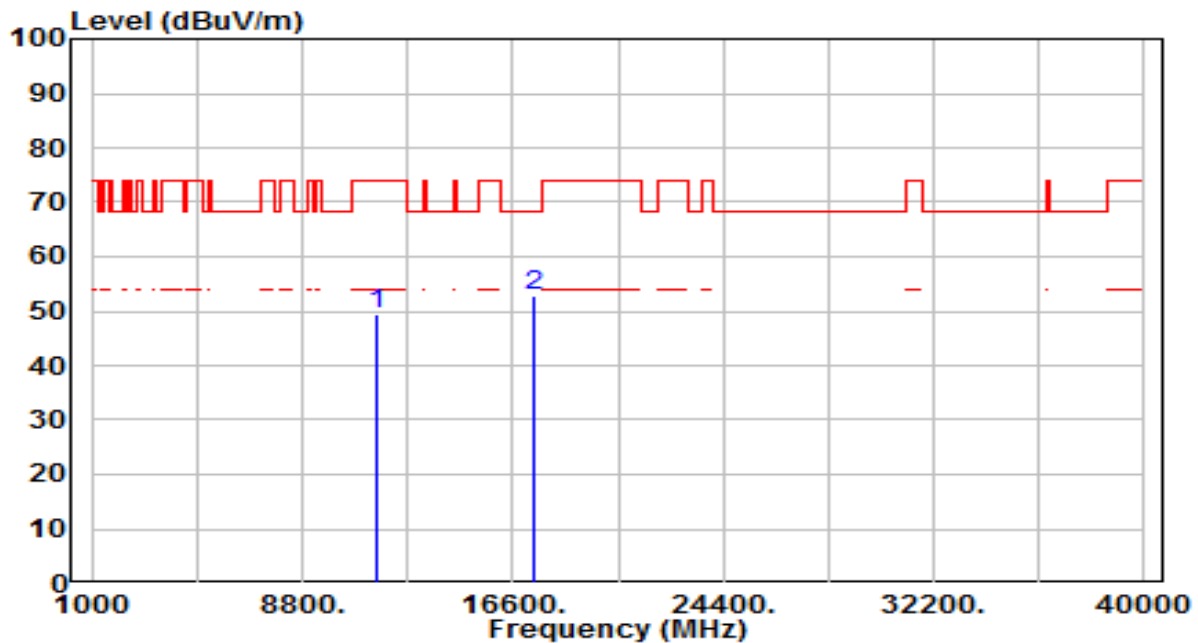


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11590.000       | 41.97          | 7.38       | 49.35                | -24.65      | 74.00          | 100         | 128         | Peak              |
| 2  | * 17385.000     | 46.98          | 5.86       | 52.83                | -15.37      | 68.20          | 100         | 8           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ANT 0 | Test Voltage         | AC 120V/60Hz |

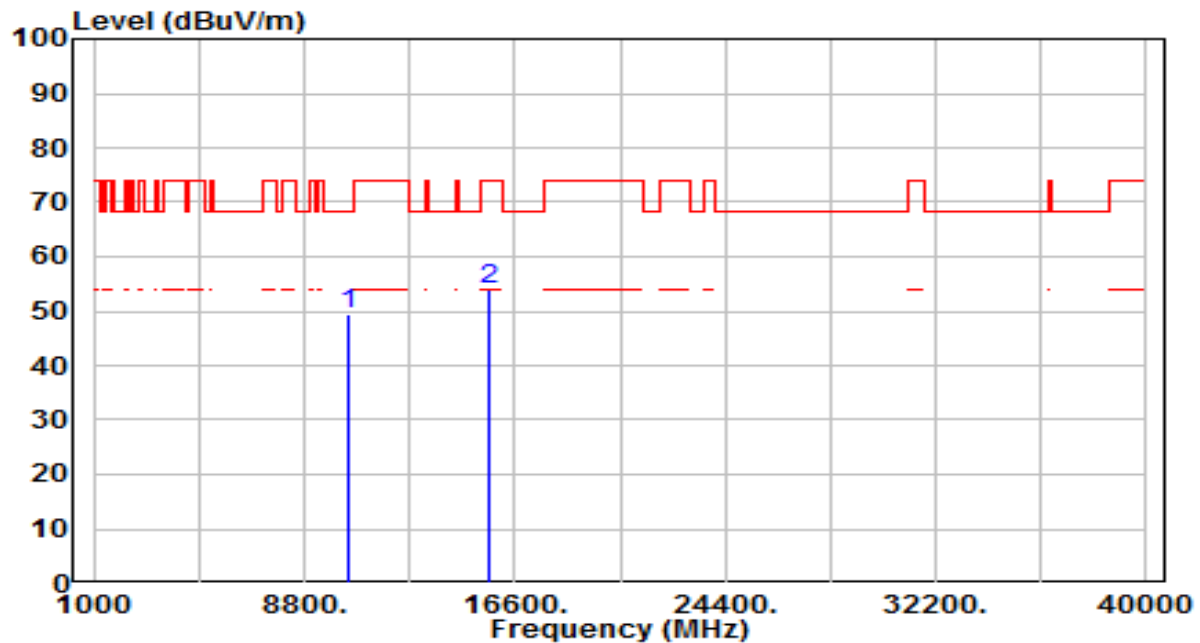


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10420.000       | 41.78          | 7.50       | 49.28                | -18.92      | 68.20          | 100         | 29          | Peak              |
| 2  |   | 15630.000       | 45.43          | 8.53       | 53.96                | -20.04      | 74.00          | 100         | 90          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ANT 0 | Test Voltage         | AC 120V/60Hz |

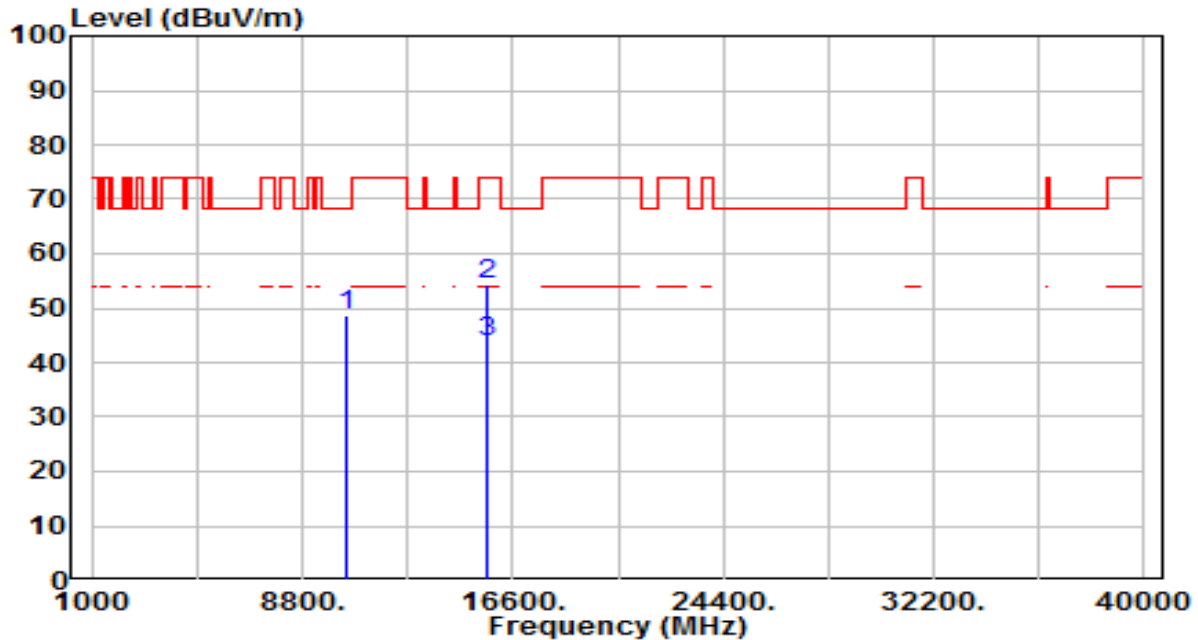


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10420.000       | 41.18          | 7.50       | 48.68                | -19.52      | 68.20          | 100         | 118         | Peak              |
| 2  |   | 15630.000       | 45.63          | 8.53       | 54.16                | -19.84      | 74.00          | 100         | 359         | Peak              |
| 3  | * | 15630.000       | 35.42          | 8.53       | 43.95                | -10.05      | 54.00          | 100         | 359         | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ANT 0 | Test Voltage         | AC 120V/60Hz |

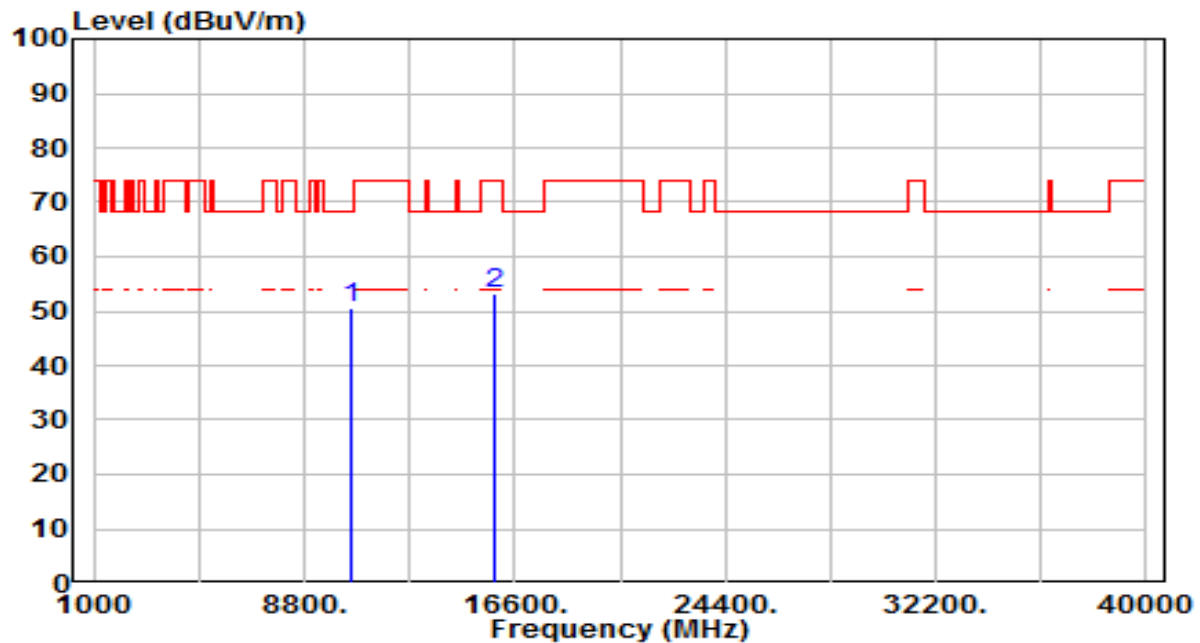


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10580.000       | 43.21          | 7.18       | 50.39                | -17.81      | 68.20          | 100         | 176         | Peak              |
| 2  |   | 15870.000       | 44.37          | 8.80       | 53.17                | -20.83      | 74.00          | 100         | 109         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                 | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ANT 0 | Test Voltage         | AC 120V/60Hz |

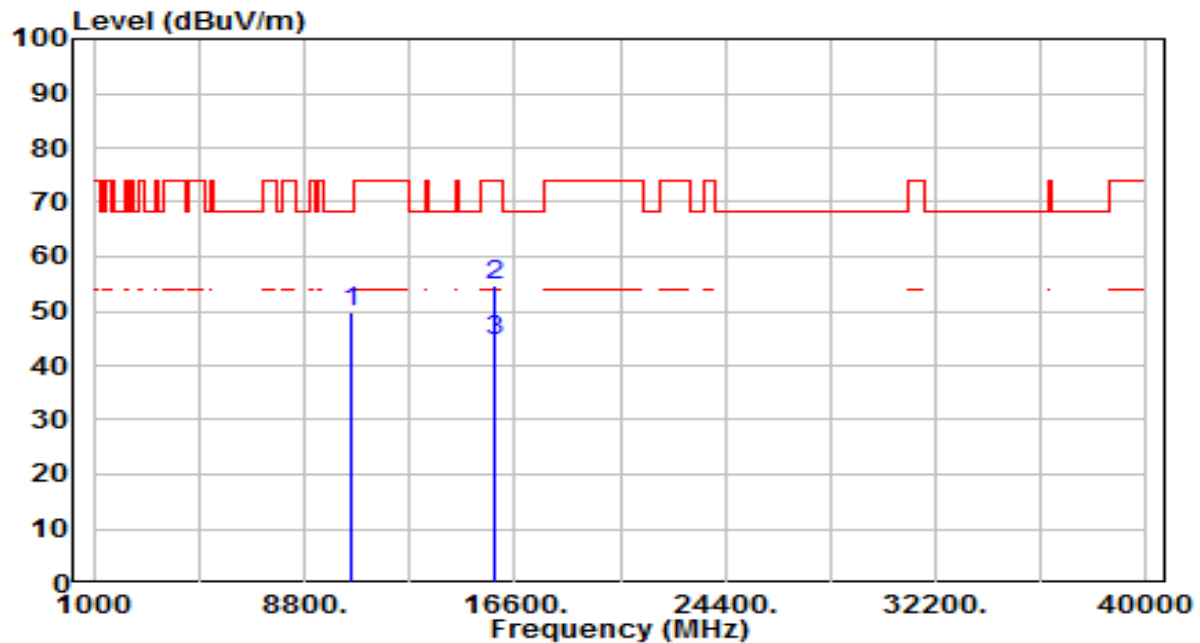


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10580.000       | 42.68          | 7.18       | 49.86                | -18.34      | 68.20          | 100         | 114         | Peak              |
| 2  |   | 15870.000       | 45.73          | 8.80       | 54.53                | -19.47      | 74.00          | 100         | 348         | Peak              |
| 3  | * | 15870.000       | 35.61          | 8.80       | 44.41                | -9.59       | 54.00          | 100         | 348         | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 106_ANT 0 | Test Voltage         | AC 120V/60Hz |

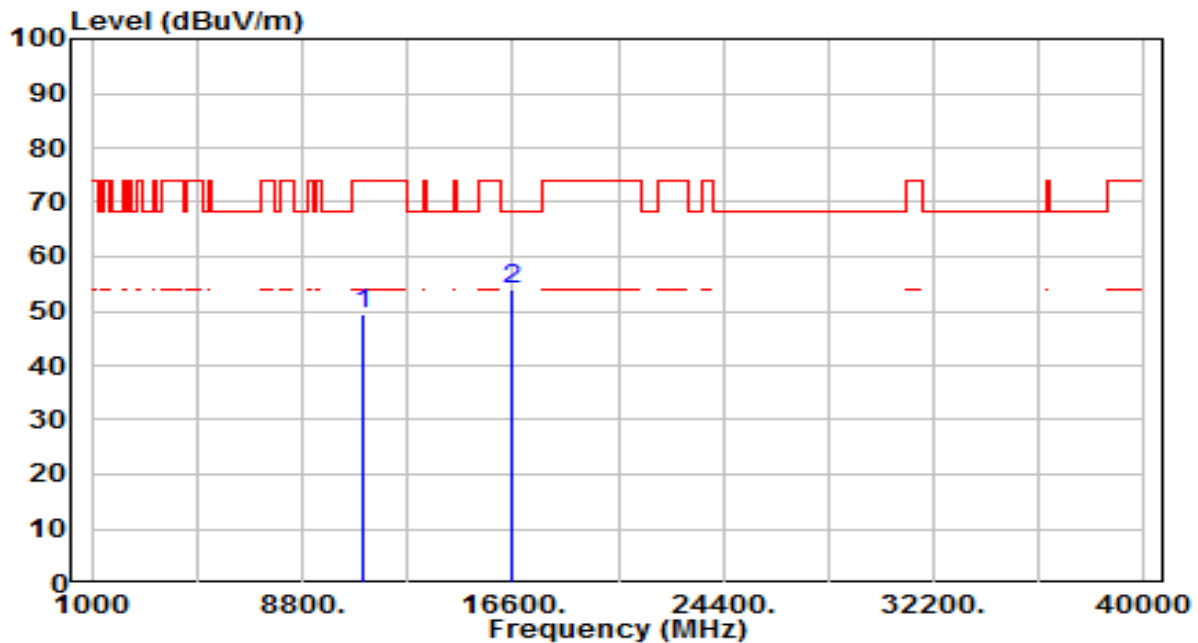


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11060.000       | 42.36          | 7.05       | 49.41                | -24.59      | 74.00          | 100         | 294         | Peak              |
| 2  | * 16590.000     | 46.10          | 7.78       | 53.88                | -14.32      | 68.20          | 100         | 337         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 106_ANT 0 | Test Voltage         | AC 120V/60Hz |

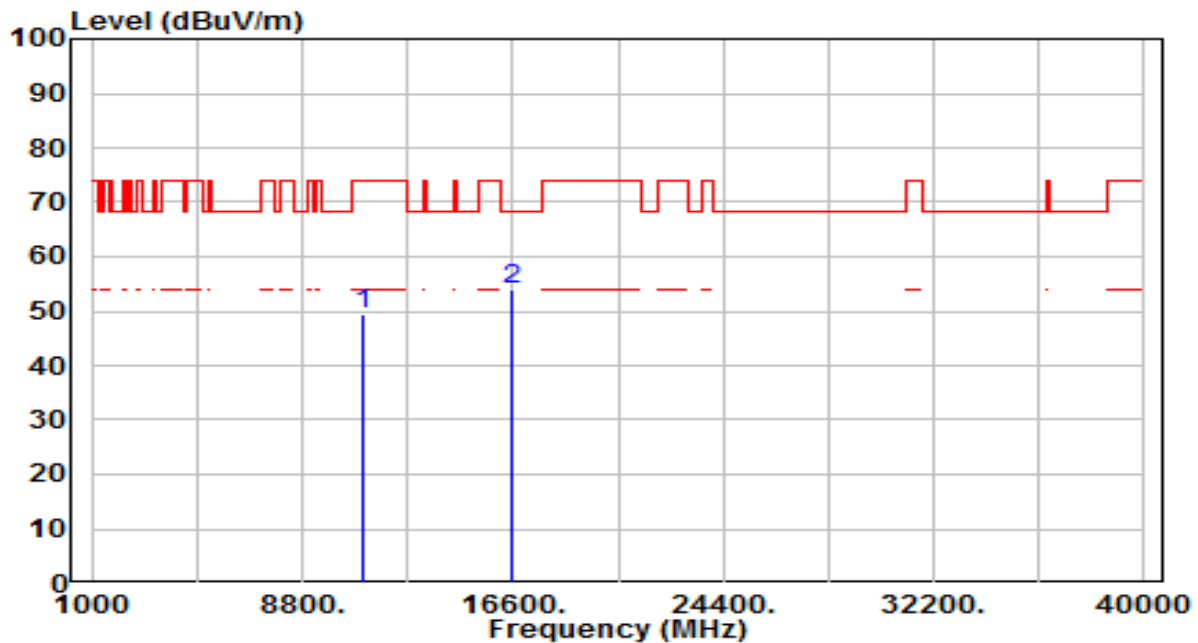


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11060.000       | 42.26          | 7.05       | 49.31                | -24.69      | 74.00          | 100         | 186         | Peak              |
| 2  | * 16590.000     | 46.24          | 7.78       | 54.03                | -14.17      | 68.20          | 100         | 49          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 122_ANT 0 | Test Voltage         | AC 120V/60Hz |

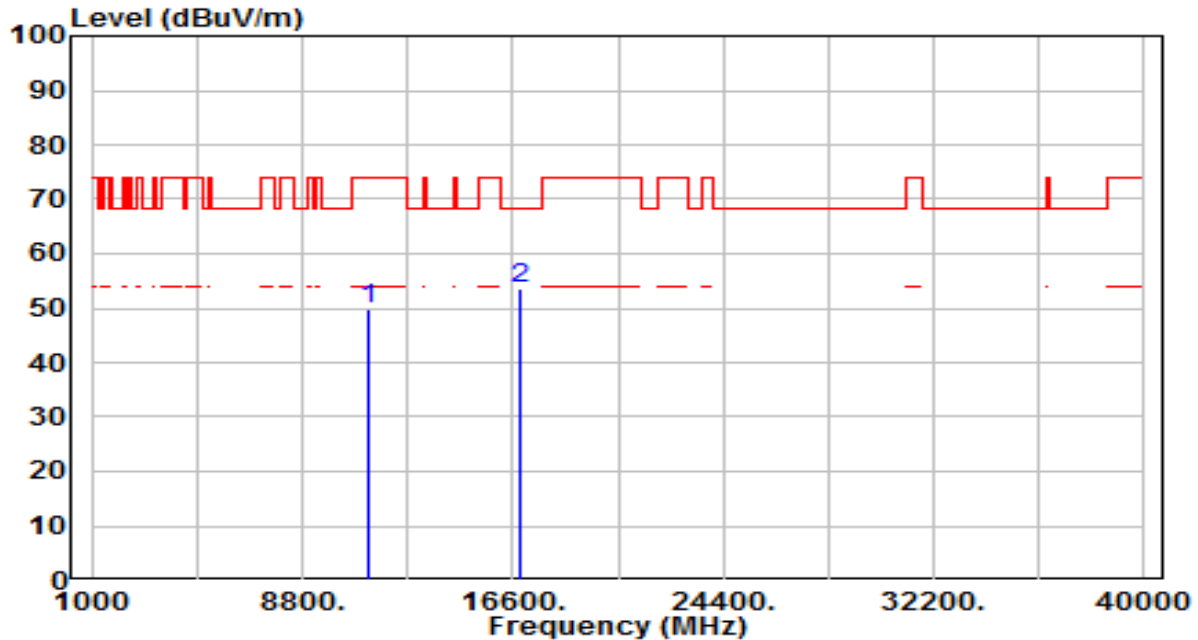


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11220.000       | 42.37          | 7.37       | 49.74                | -24.26      | 74.00          | 100         | 304         | Peak              |
| 2  | * 16830.000     | 46.10          | 7.38       | 53.49                | -14.71      | 68.20          | 100         | 66          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 122_ANT 0 | Test Voltage         | AC 120V/60Hz |

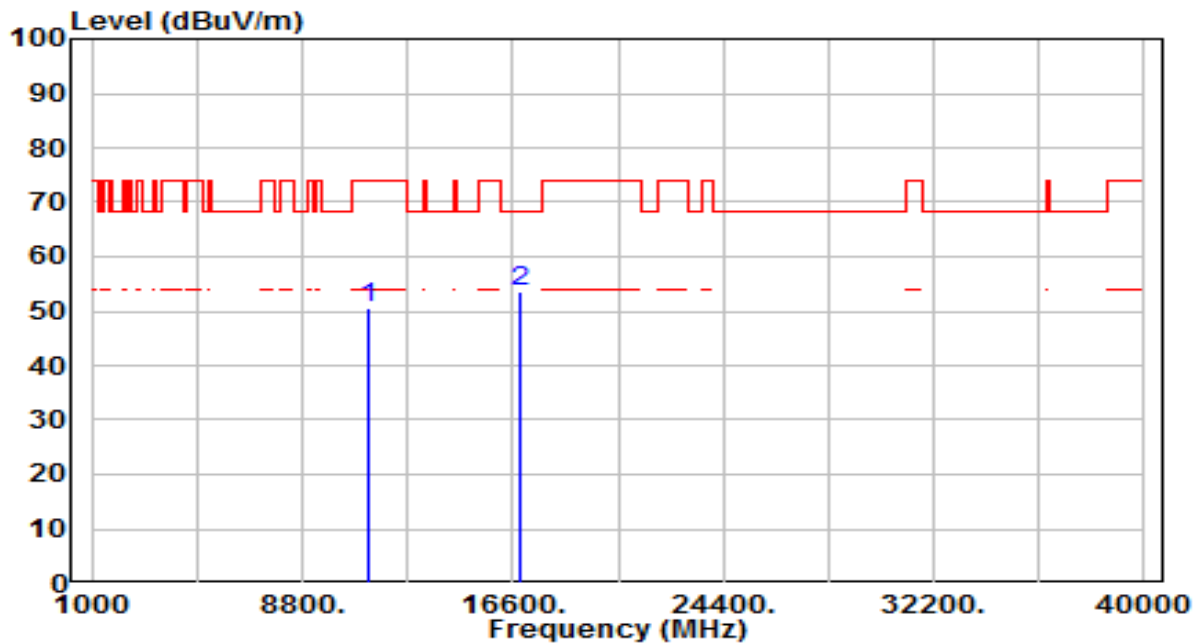


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11220.000       | 43.08          | 7.37       | 50.45                | -23.55      | 74.00          | 100         | 328         | Peak              |
| 2  | * 16830.000     | 46.12          | 7.38       | 53.50                | -14.70      | 68.20          | 100         | 302         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 138_ANT 0 | Test Voltage         | AC 120V/60Hz |

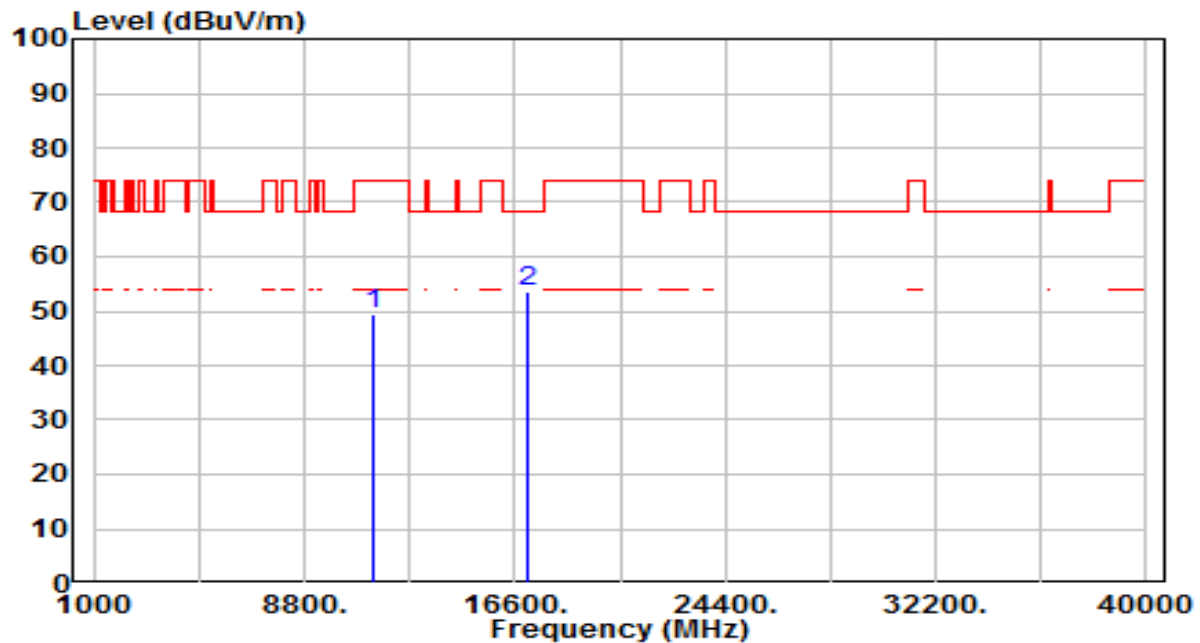


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11380.000       | 42.08          | 7.22       | 49.31                | -24.69      | 74.00          | 100         | 310         | Peak              |
| 2  | * 17070.000     | 46.91          | 6.61       | 53.52                | -14.68      | 68.20          | 100         | 310         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 138_ANT 0 | Test Voltage         | AC 120V/60Hz |

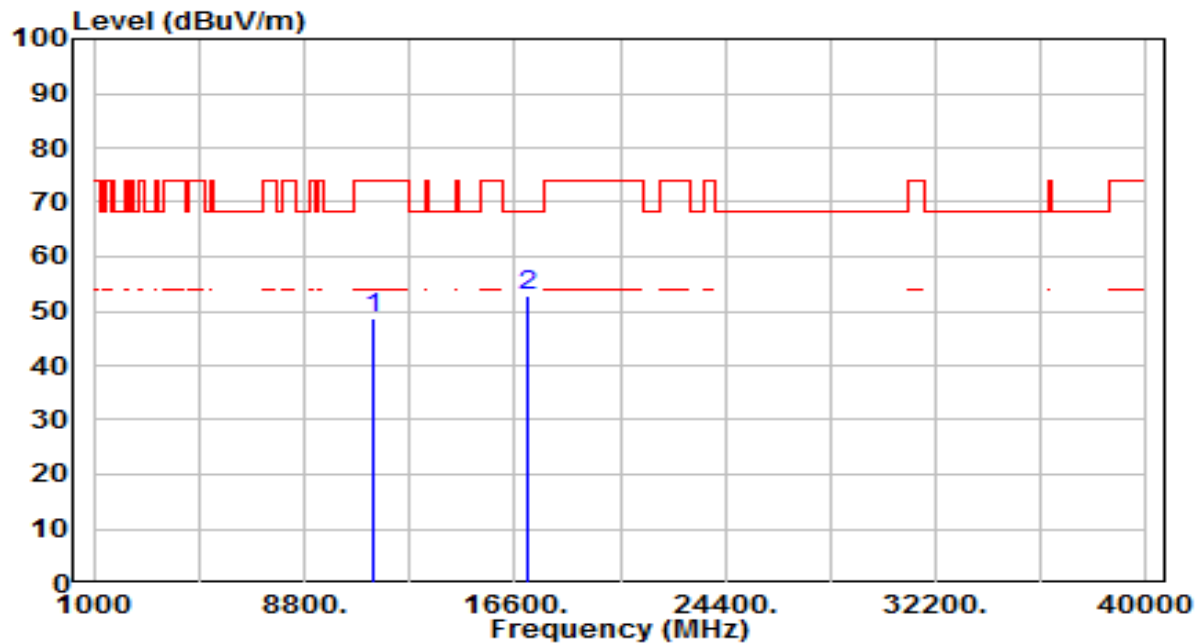


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11380.000       | 41.58          | 7.22       | 48.80                | -25.20      | 74.00          | 100         | 174         | Peak              |
| 2  | * 17070.000     | 46.05          | 6.61       | 52.66                | -15.54      | 68.20          | 100         | 214         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band4_CH 155_ANT 0 | Test Voltage         | AC 120V/60Hz |

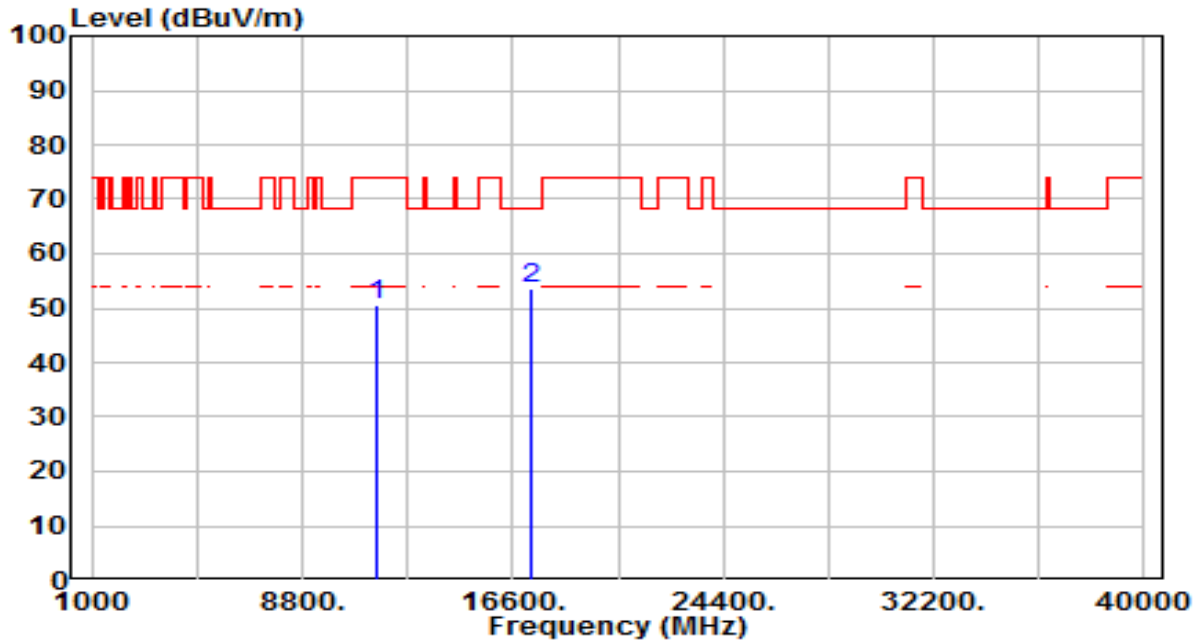


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11550.000       | 43.11          | 7.55       | 50.67                | -23.33      | 74.00          | 100         | 318         | Peak              |
| 2  | * 17325.000     | 47.57          | 6.04       | 53.62                | -14.58      | 68.20          | 100         | 259         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E & BBHA 9170                  | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band4_CH 155_ANT 0 | Test Voltage         | AC 120V/60Hz |

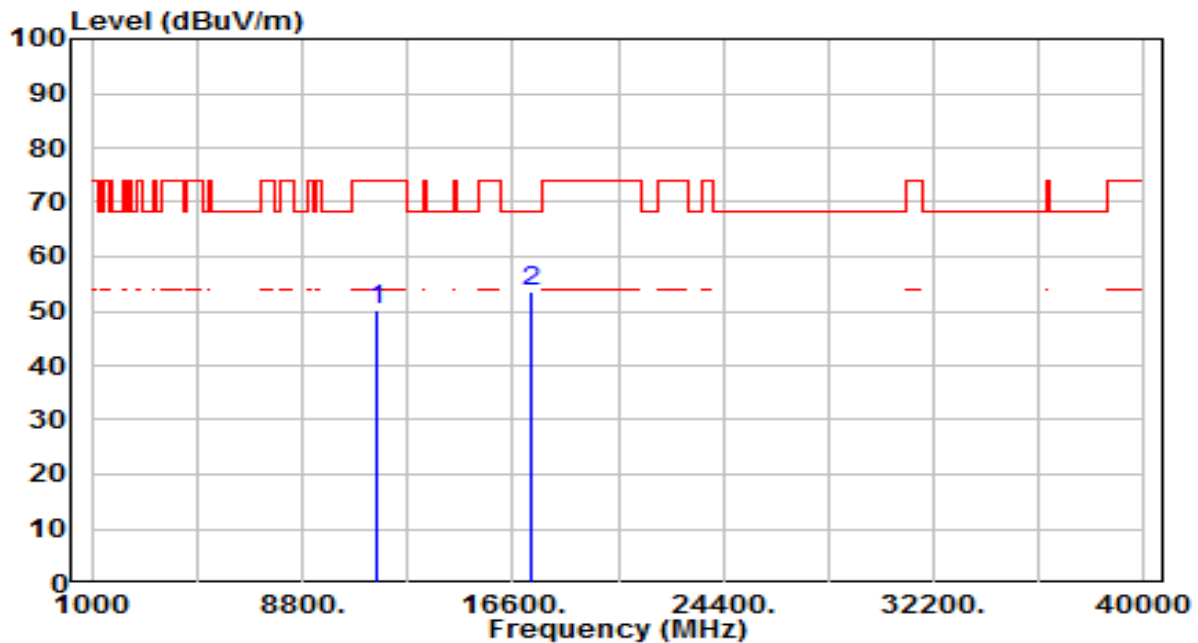


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11550.000       | 42.50          | 7.55       | 50.05                | -23.95      | 74.00          | 100         | 351         | Peak              |
| 2  | * 17325.000     | 47.41          | 6.04       | 53.45                | -14.75      | 68.20          | 100         | 21          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-18   |
| Factor    | VULB 9162                    | Temp. / Humidity     | 24°C /53%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

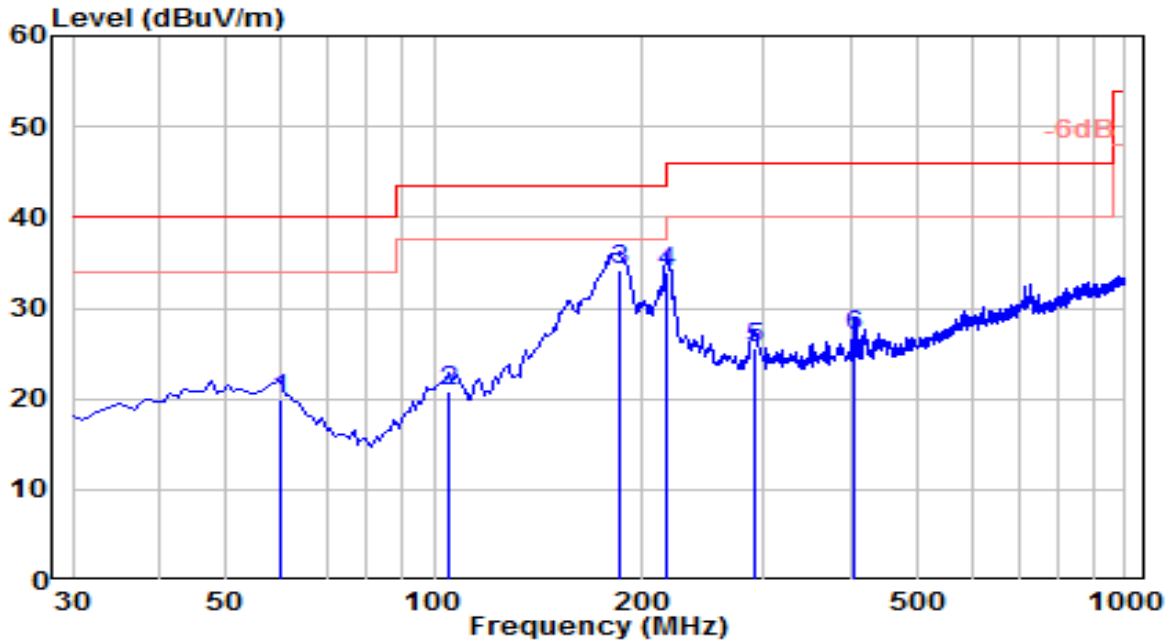


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 60.070          | 0.45           | 19.45      | 19.90                | -20.10      | 40.00          | 100         | 180         | QP                |
| 2  | 104.690         | 2.55           | 18.38      | 20.93                | -22.57      | 43.50          | 100         | 315         | QP                |
| 3  | * 185.200       | 17.28          | 16.96      | 34.24                | -9.26       | 43.50          | 100         | 270         | QP                |
| 4  | 217.210         | 15.90          | 18.08      | 33.98                | -12.02      | 46.00          | 100         | 30          | QP                |
| 5  | 289.960         | 5.22           | 20.40      | 25.62                | -20.38      | 46.00          | 100         | 205         | QP                |
| 6  | 403.450         | 3.75           | 23.18      | 26.93                | -19.07      | 46.00          | 100         | 160         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-18   |
| Factor    | VULB 9162                    | Temp. / Humidity     | 24°C /53%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

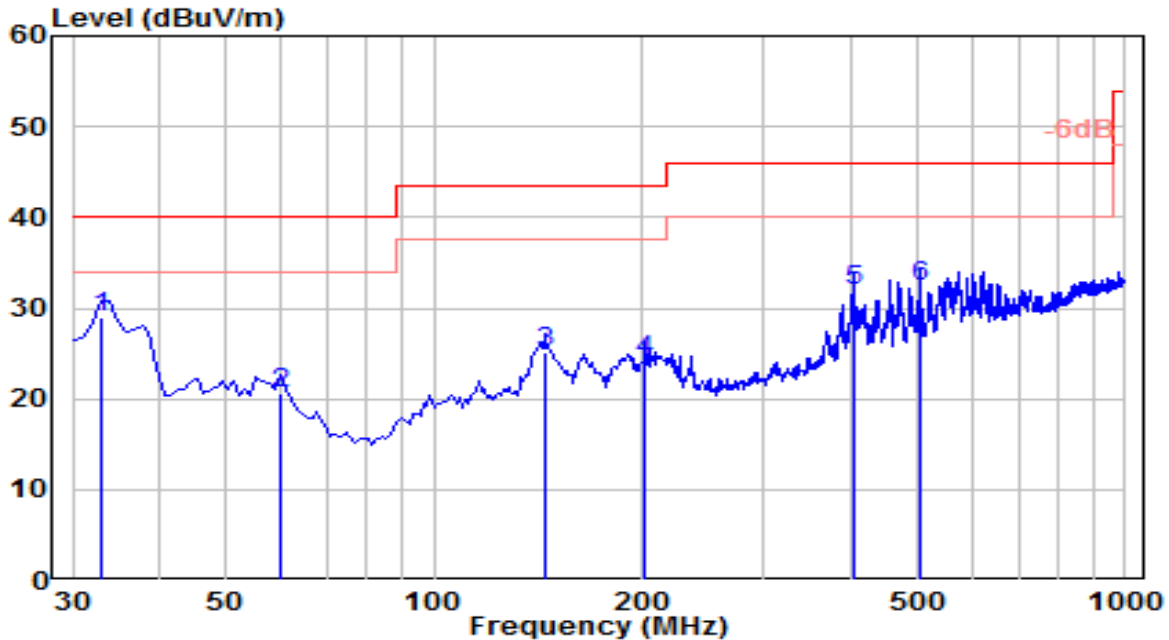


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 32.910        | 11.76          | 17.14      | 28.90                | -11.10      | 40.00          | 100         | 280         | QP                |
| 2  | 60.070          | 1.15           | 19.45      | 20.60                | -19.40      | 40.00          | 100         | 250         | QP                |
| 3  | 144.460         | 10.31          | 14.84      | 25.15                | -18.35      | 43.50          | 100         | 145         | QP                |
| 4  | 201.690         | 6.28           | 17.93      | 24.21                | -19.29      | 43.50          | 100         | 105         | QP                |
| 5  | 404.420         | 8.74           | 23.19      | 31.93                | -14.07      | 46.00          | 100         | 310         | QP                |
| 6  | 505.300         | 7.49           | 24.98      | 32.47                | -13.53      | 46.00          | 100         | 185         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

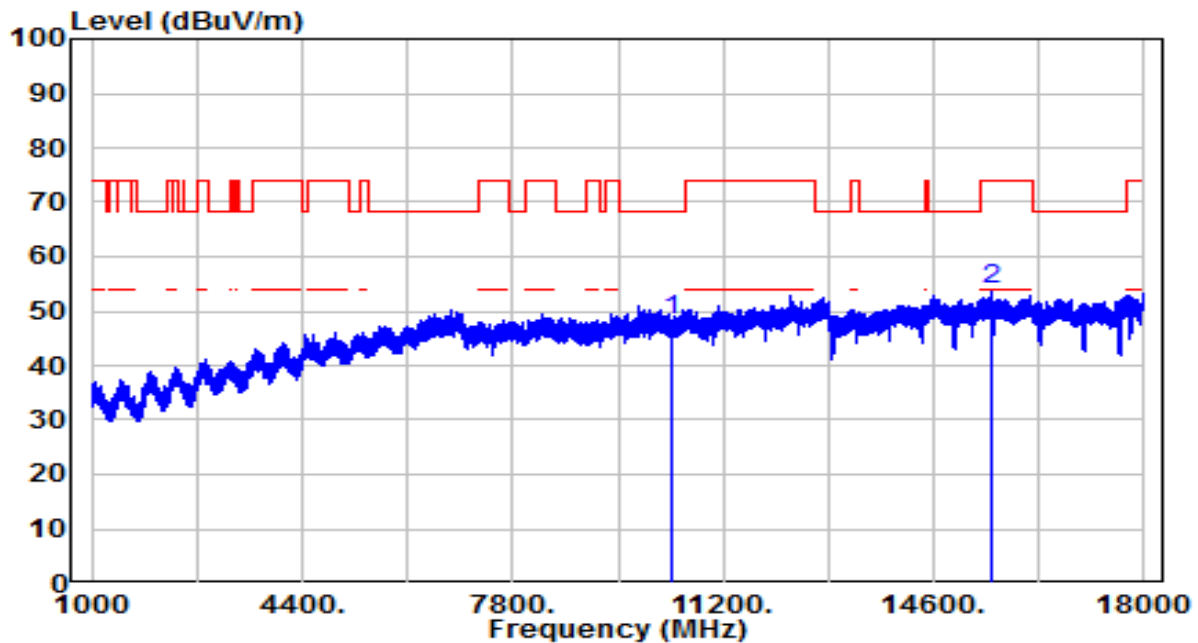


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10360.000       | 40.59          | 7.62       | 48.21                | -19.99      | 68.20          | 100         | 102         | Peak              |
| 2  |   | 15540.000       | 45.26          | 8.61       | 53.87                | -20.13      | 74.00          | 100         | 52          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-05-19   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

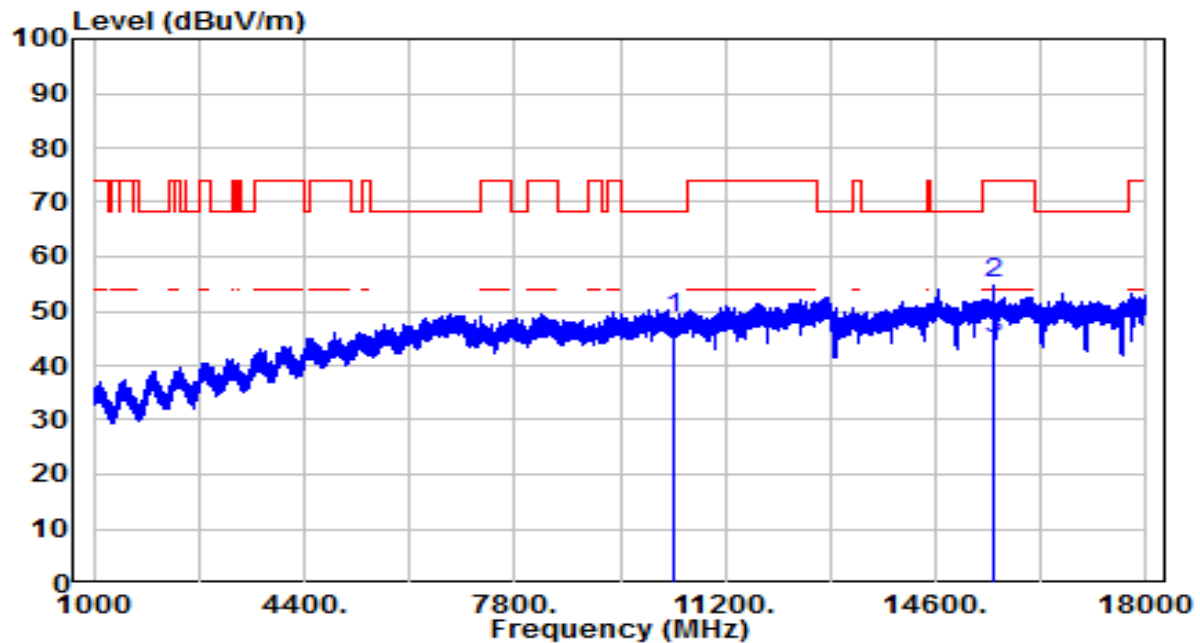


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10360.000       | 41.23          | 7.62       | 48.85                | -19.35      | 68.20          | 100         | 16          | Peak              |
| 2  | * 15540.000     | 46.31          | 8.61       | 54.93                | -19.07      | 74.00          | 100         | 103         | Peak              |
| 3  | * 15540.000     | 36.43          | 8.61       | 45.04                | -8.96       | 54.00          | 100         | 103         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

### A.8 Radiated Restricted Band Edge Test Result

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

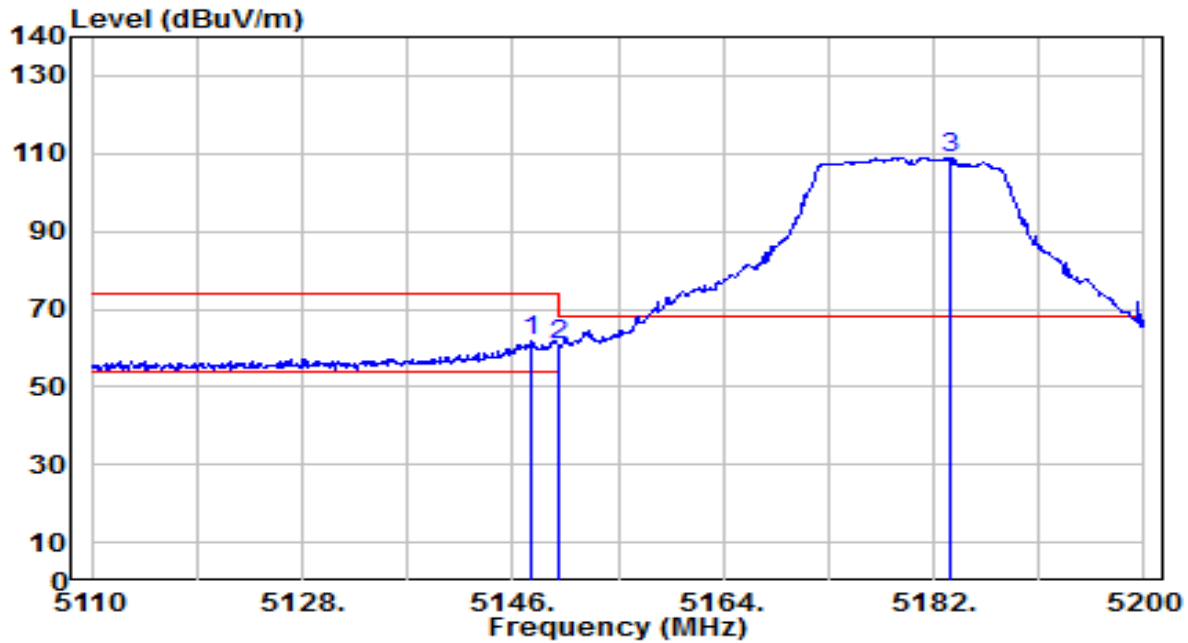


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5147.620      | 57.75          | 3.98       | 61.74                | -12.26      | 74.00          | 230         | 175         | Peak              |
| 2  | 5150.000        | 56.64          | 3.98       | 60.62                | -13.38      | 74.00          | 230         | 175         | Peak              |
| 3  | 5183.440        | 105.16         | 3.89       | 109.05               | N/A         | N/A            | 230         | 175         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

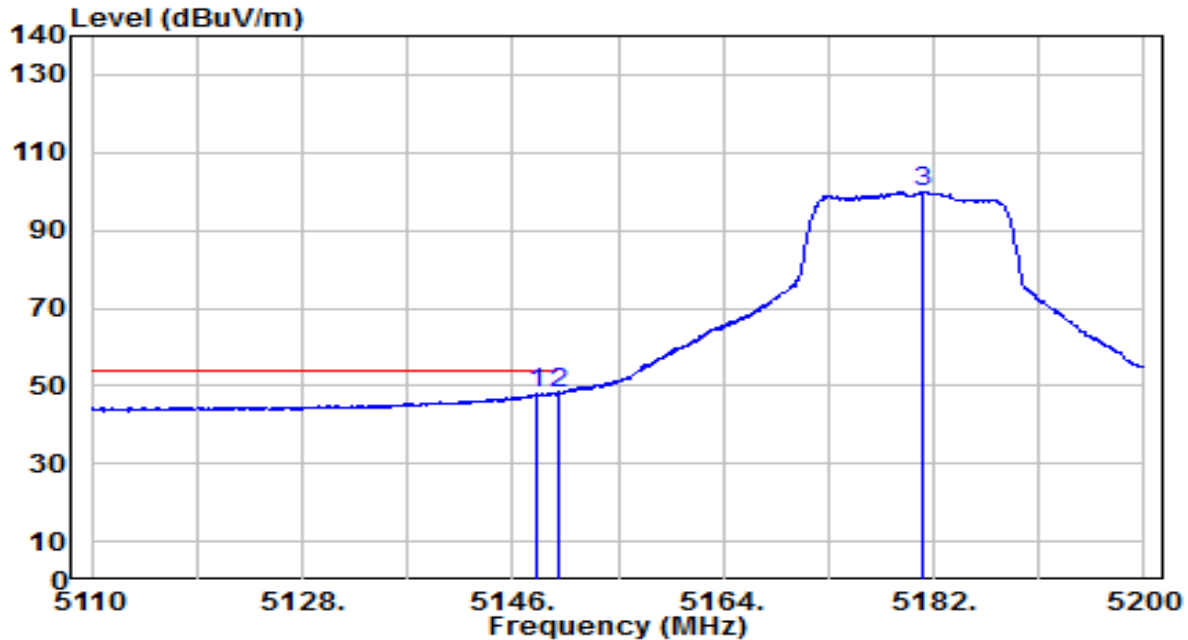


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.070        | 43.85          | 3.98       | 47.83                | -6.17       | 54.00          | 230         | 175         | Average           |
| 2  | * 5150.000      | 44.18          | 3.98       | 48.15                | -5.85       | 54.00          | 230         | 175         | Average           |
| 3  | 5181.100        | 95.96          | 3.89       | 99.85                | N/A         | N/A            | 230         | 175         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

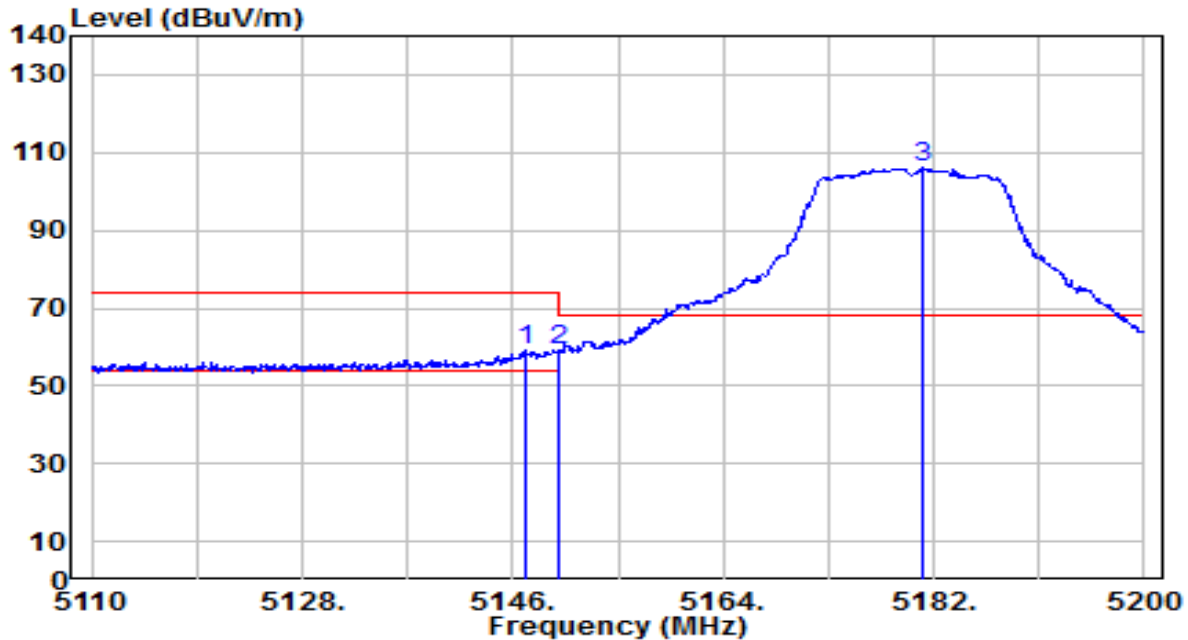


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5147.080        | 55.18          | 3.99       | 59.17                | -14.83      | 74.00          | 165         | 150         | Peak              |
| 2  | * 5150.000      | 55.40          | 3.98       | 59.37                | -14.63      | 74.00          | 165         | 150         | Peak              |
| 3  | 5181.100        | 102.23         | 3.89       | 106.12               | N/A         | N/A            | 165         | 150         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

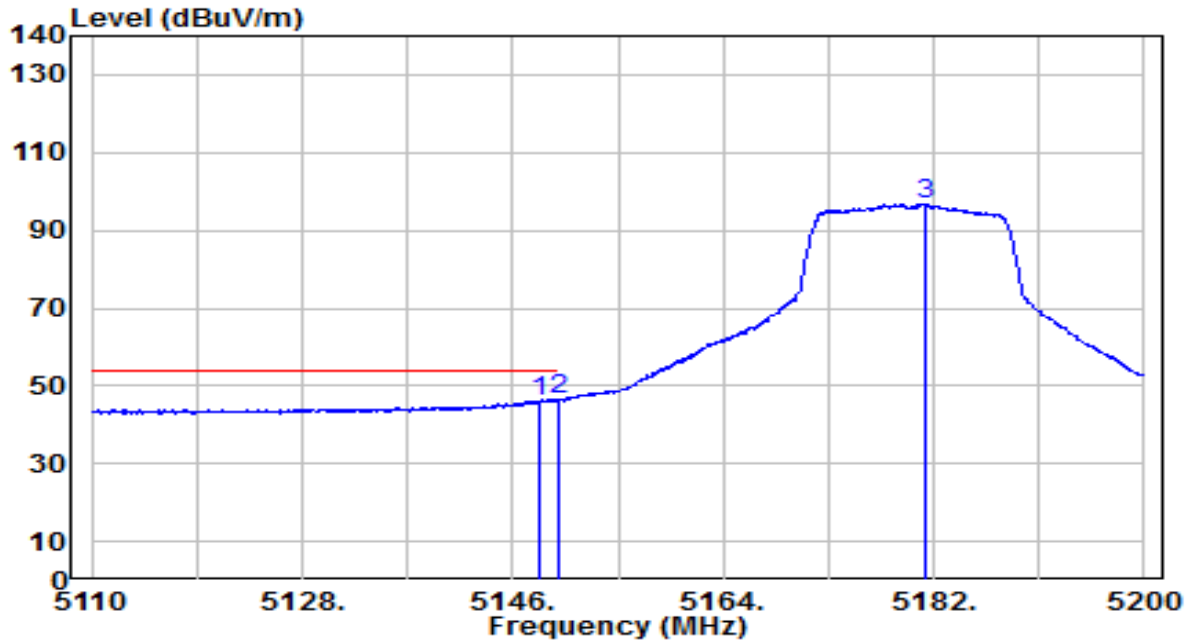


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.250        | 42.09          | 3.98       | 46.07                | -7.93       | 54.00          | 165         | 150         | Average           |
| 2  | * 5150.000      | 42.31          | 3.98       | 46.29                | -7.71       | 54.00          | 165         | 150         | Average           |
| 3  | 5181.190        | 92.97          | 3.89       | 96.86                | N/A         | N/A            | 165         | 150         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

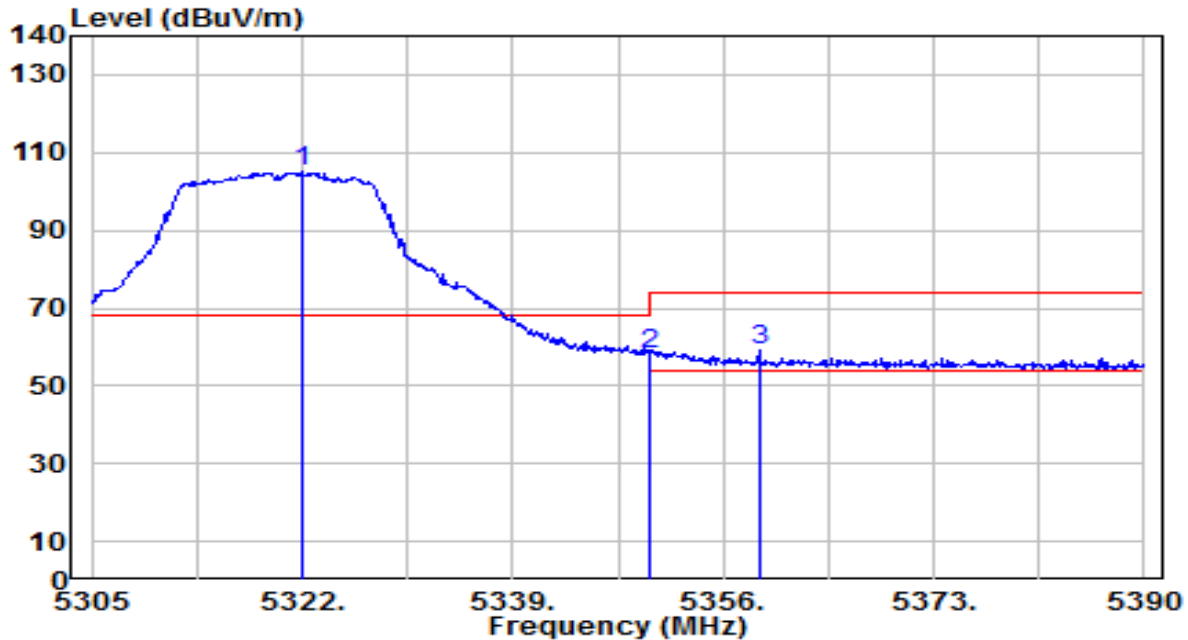


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5322.000        | 101.26         | 3.85       | 105.11               | N/A         | N/A            | 150         | 240         | Peak              |
| 2  | * 5350.000      | 54.07          | 3.78       | 57.86                | -10.34      | 68.20          | 150         | 240         | Peak              |
| 3  | 5358.890        | 55.28          | 3.76       | 59.04                | -14.96      | 74.00          | 150         | 240         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                   | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

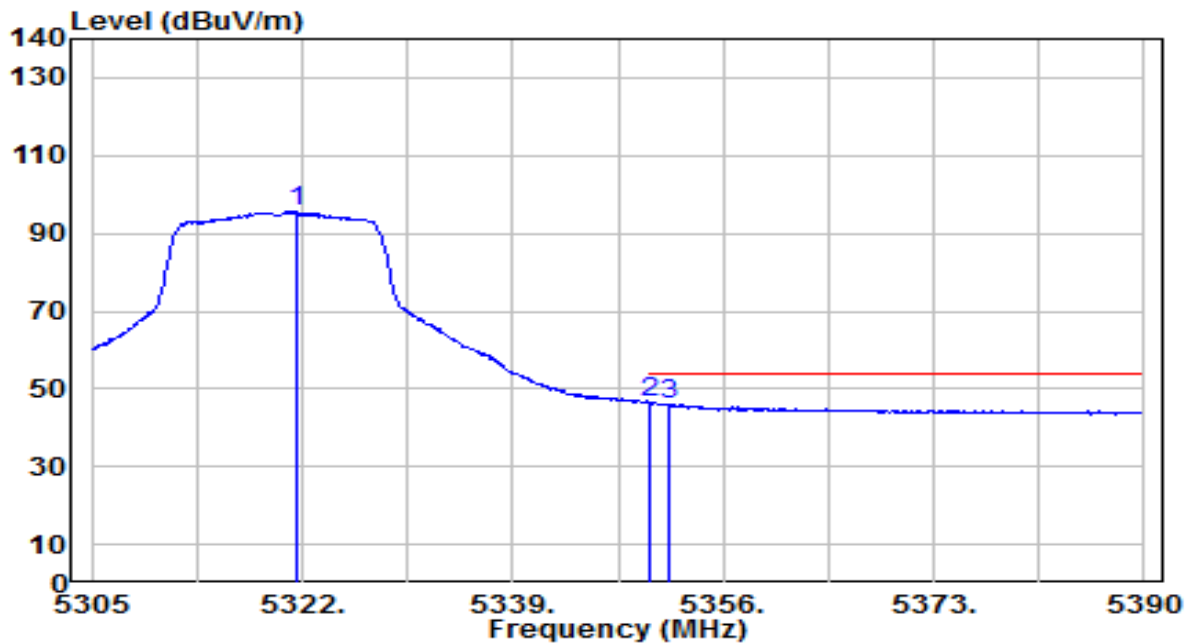


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5321.575        | 91.95          | 3.85       | 95.80                | N/A         | N/A            | 150         | 240         | Average           |
| 2  | * 5350.000      | 42.58          | 3.78       | 46.36                | -7.64       | 54.00          | 150         | 240         | Average           |
| 3  | 5351.580        | 42.17          | 3.78       | 45.95                | -8.05       | 54.00          | 150         | 240         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

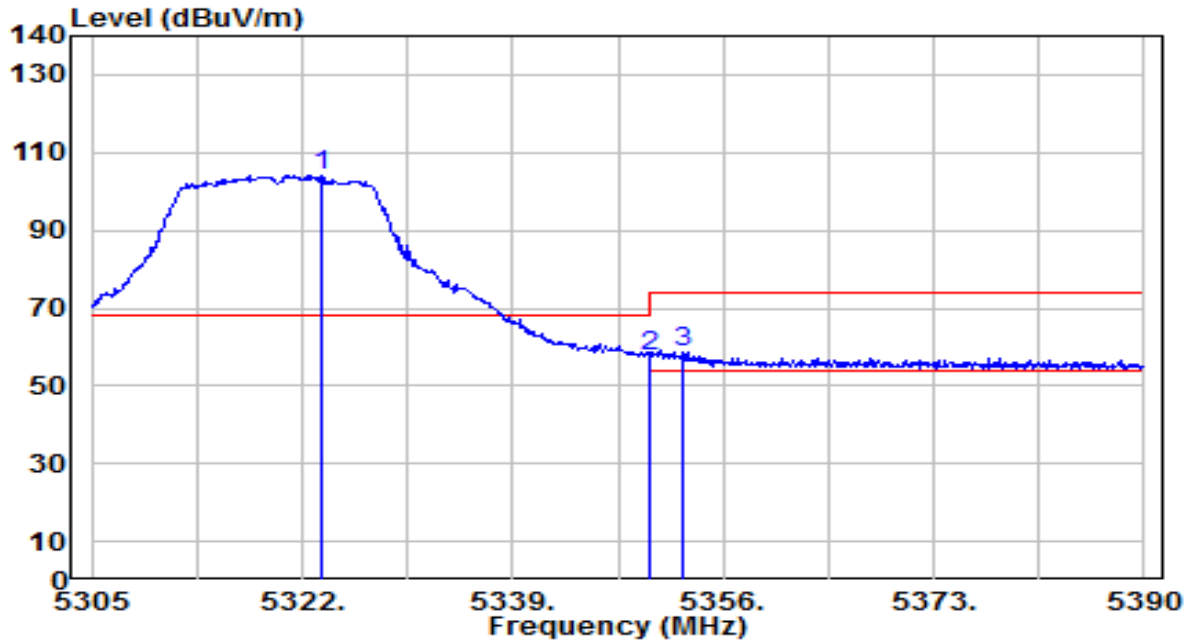


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5323.530        | 100.31         | 3.85       | 104.16               | N/A         | N/A            | 155         | 145         | Peak              |
| 2  | * 5350.000      | 54.03          | 3.78       | 57.81                | -10.39      | 68.20          | 155         | 145         | Peak              |
| 3  | 5352.685        | 55.05          | 3.78       | 58.82                | -15.18      | 74.00          | 155         | 145         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | POS Terminal                 | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                      | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                     | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

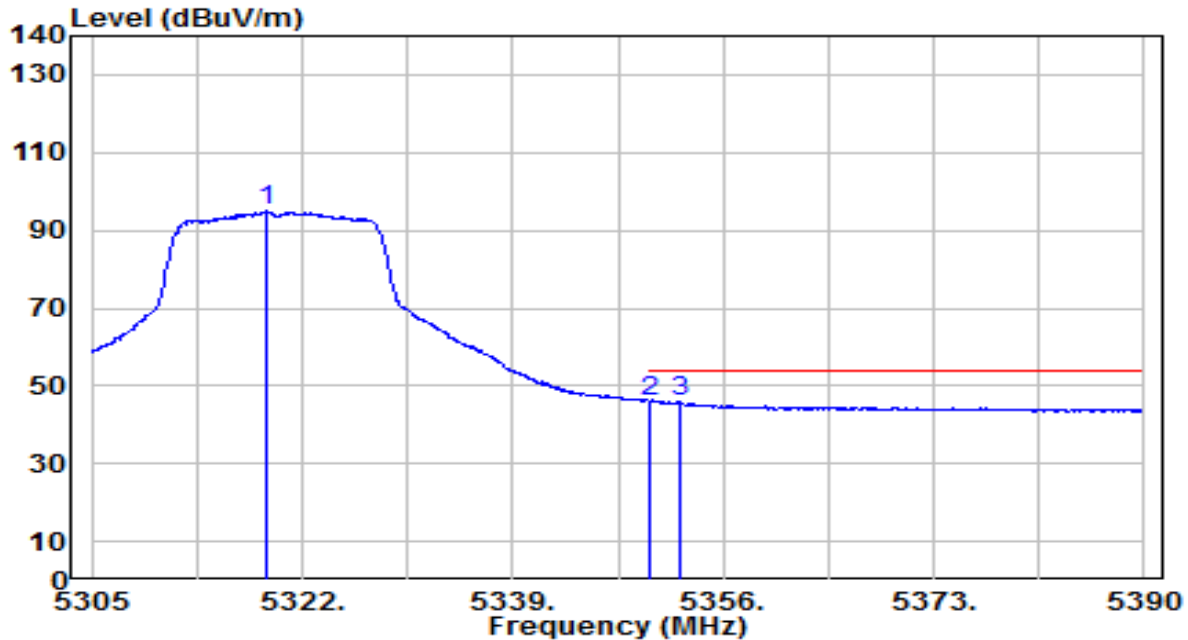


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5319.110        | 91.09          | 3.86       | 94.95                | N/A         | N/A            | 155         | 145         | Average           |
| 2  | * 5350.000      | 42.34          | 3.78       | 46.12                | -7.88       | 54.00          | 155         | 145         | Average           |
| 3  | 5352.515        | 42.12          | 3.78       | 45.90                | -8.10       | 54.00          | 155         | 145         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

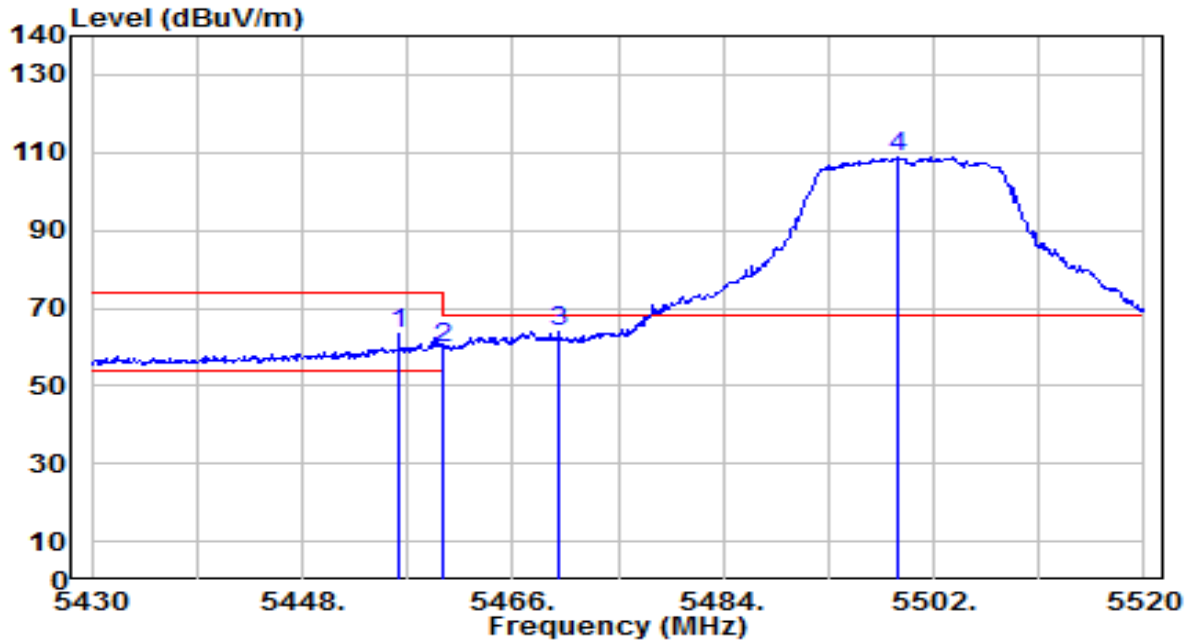


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5456.280        | 58.92          | 4.29       | 63.21                | -10.79      | 74.00          | 150         | 235         | Peak              |
| 2  | 5460.000        | 55.48          | 4.33       | 59.81                | -8.39       | 68.20          | 150         | 235         | Peak              |
| 3  | * 5470.000      | 59.50          | 4.44       | 63.94                | -4.26       | 68.20          | 150         | 235         | Peak              |
| 4  | 5499.030        | 103.90         | 4.74       | 108.64               | N/A         | N/A            | 150         | 235         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

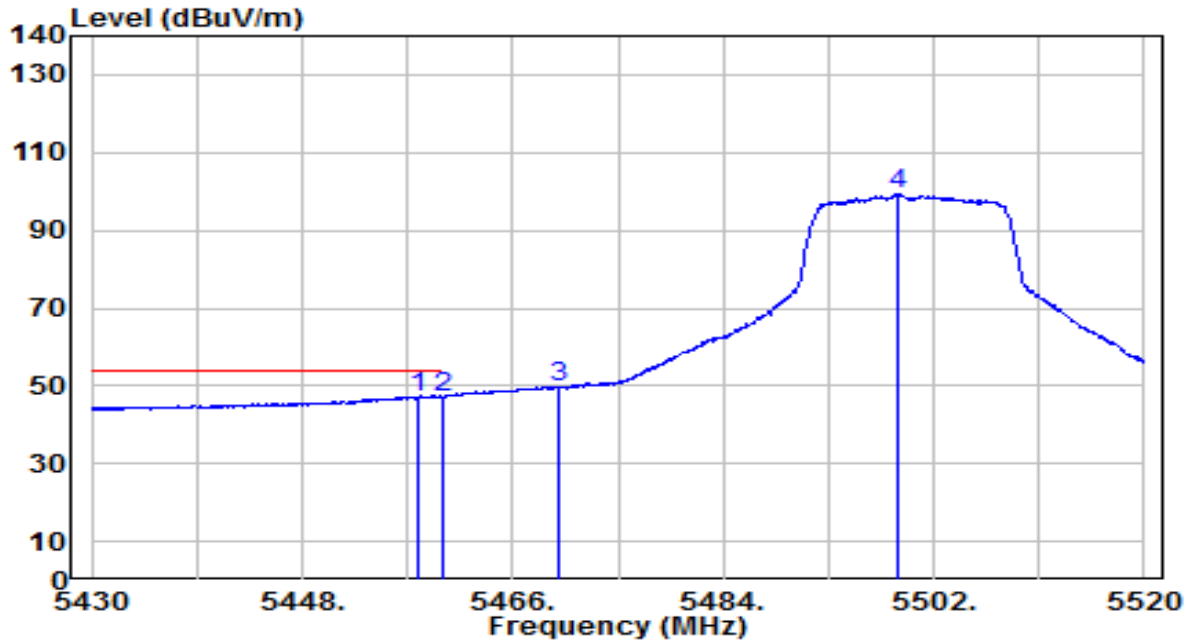


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5457.990        | 42.88          | 4.31       | 47.19                | -6.81       | 54.00          | 150         | 235         | Average           |
| 2  |   | 5460.000        | 42.77          | 4.33       | 47.10                | -6.90       | 54.00          | 150         | 235         | Average           |
| 3  |   | 5470.000        | 45.16          | 4.44       | 49.60                | N/A         | N/A            | 150         | 235         | Average           |
| 4  |   | 5499.030        | 94.62          | 4.74       | 99.36                | N/A         | N/A            | 150         | 235         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

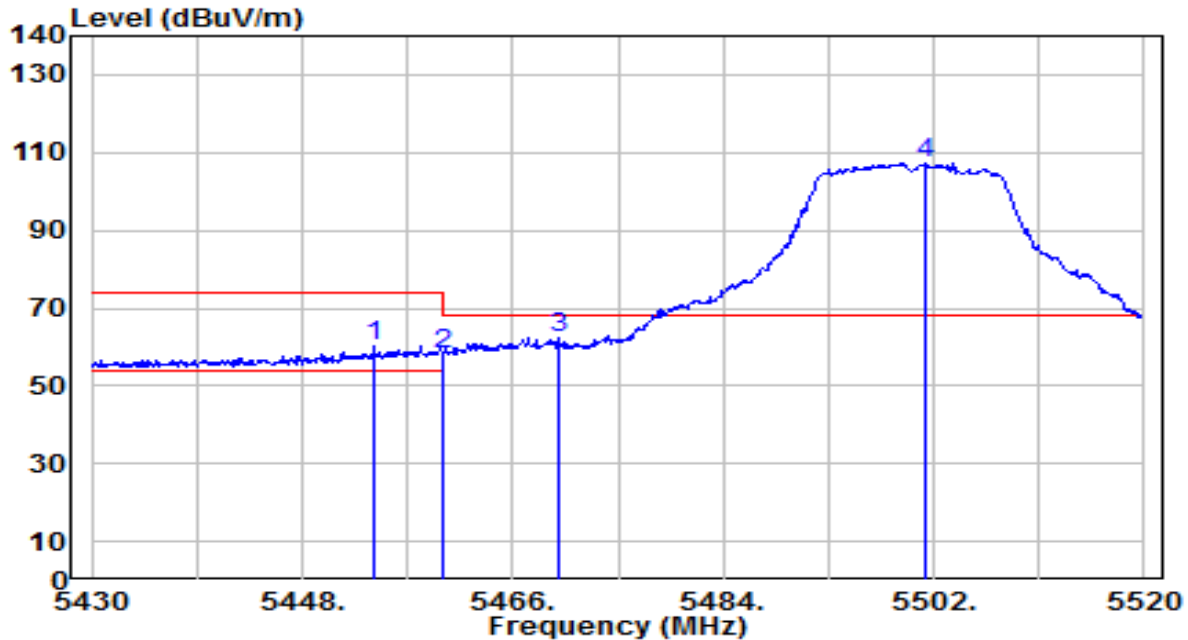


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5454.120        | 56.00          | 4.27       | 60.27                | -13.73      | 74.00          | 145         | 145         | Peak              |
| 2  | 5460.000        | 53.80          | 4.33       | 58.13                | -10.07      | 68.20          | 145         | 145         | Peak              |
| 3  | * 5470.000      | 58.06          | 4.44       | 62.50                | -5.70       | 68.20          | 145         | 145         | Peak              |
| 4  | 5501.370        | 102.32         | 4.76       | 107.09               | N/A         | N/A            | 145         | 145         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

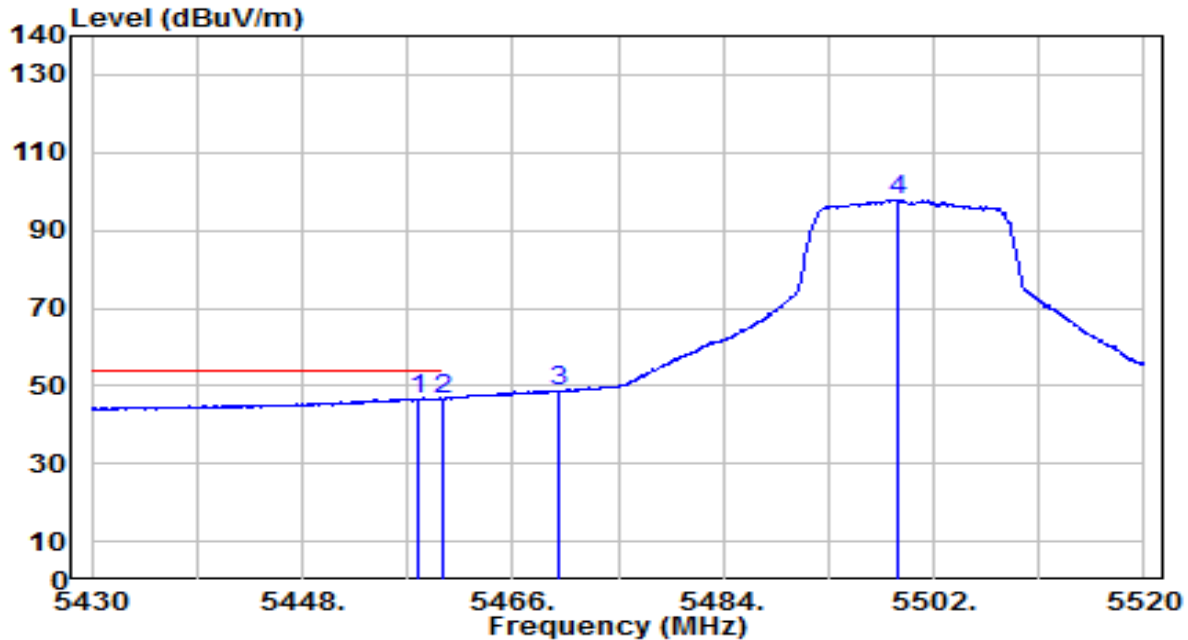


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5457.990        | 42.35          | 4.31       | 46.66                | -7.34       | 54.00          | 145         | 145         | Average           |
| 2  | * 5460.000      | 42.33          | 4.33       | 46.66                | -7.34       | 54.00          | 145         | 145         | Average           |
| 3  | 5470.000        | 44.16          | 4.44       | 48.60                | N/A         | N/A            | 145         | 145         | Average           |
| 4  | 5499.030        | 93.23          | 4.74       | 97.97                | N/A         | N/A            | 145         | 145         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0 | Test Voltage         | AC 120V/60Hz |

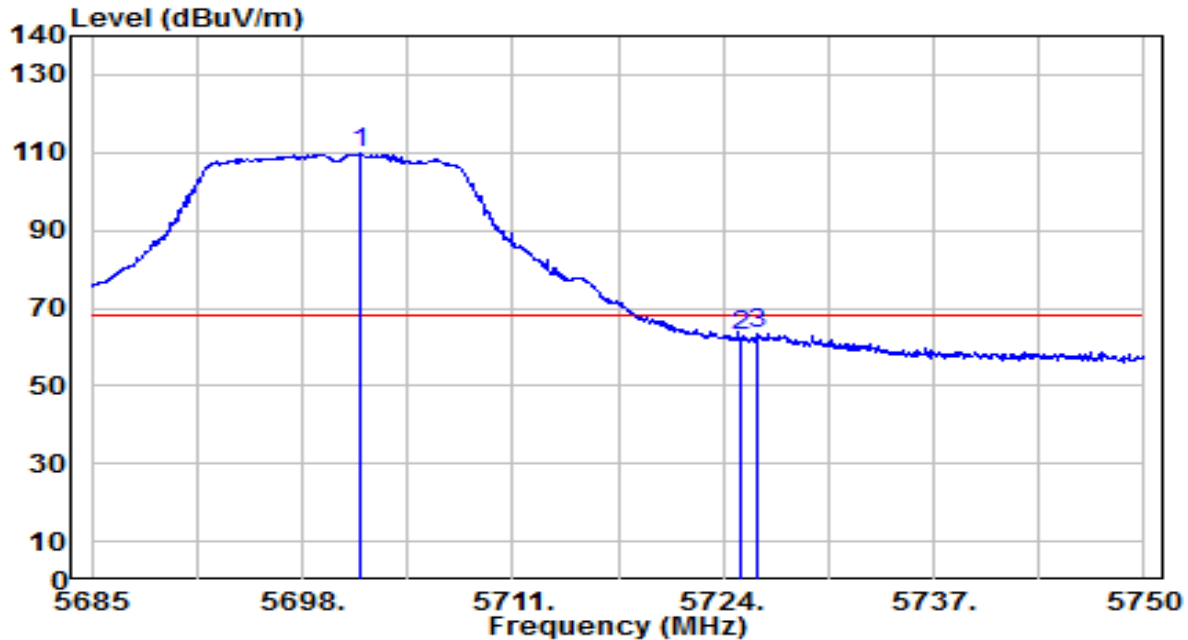


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5701.510        | 104.28         | 5.58       | 109.86               | N/A         | N/A            | 170         | 270         | Peak              |
| 2  | 5725.000        | 57.04          | 5.59       | 62.63                | -5.57       | 68.20          | 170         | 270         | Peak              |
| 3  | * 5726.080      | 57.98          | 5.59       | 63.57                | -4.63       | 68.20          | 170         | 270         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0 | Test Voltage         | AC 120V/60Hz |

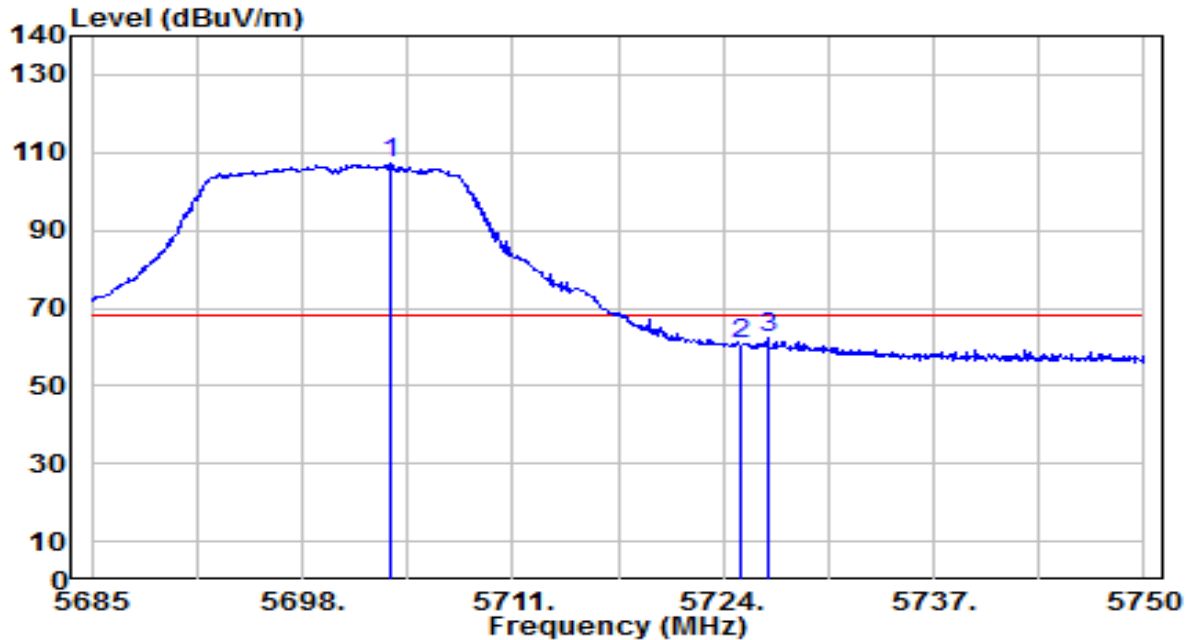


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5703.395        | 101.42         | 5.58       | 107.00               | N/A         | N/A            | 230         | 235         | Peak              |
| 2  | 5725.000        | 55.04          | 5.59       | 60.63                | -7.57       | 68.20          | 230         | 235         | Peak              |
| 3  | * 5726.795      | 56.82          | 5.59       | 62.41                | -5.79       | 68.20          | 230         | 235         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0 | Test Voltage         | AC 120V/60Hz |

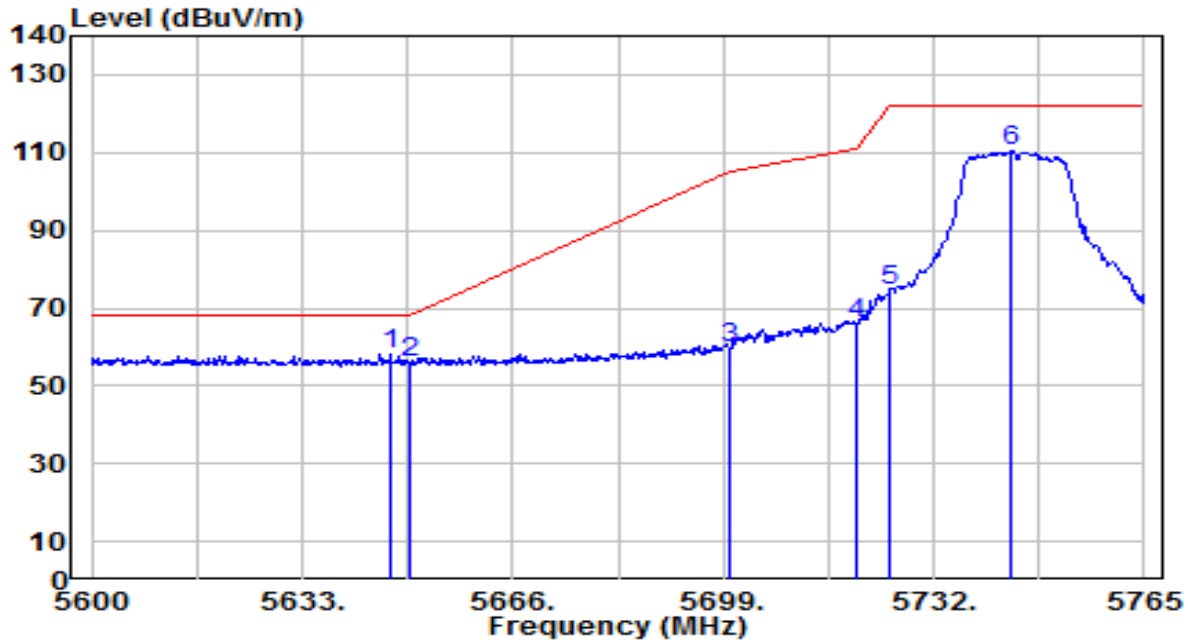


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5646.860        | 52.75          | 5.44       | 58.19                | -10.01      | 68.20          | 150         | 270         | Peak              |
| 2  |   | 5650.000        | 50.37          | 5.44       | 55.81                | -12.39      | 68.20          | 150         | 270         | Peak              |
| 3  |   | 5700.000        | 54.25          | 5.58       | 59.83                | -45.37      | 105.20         | 150         | 270         | Peak              |
| 4  |   | 5720.000        | 60.70          | 5.59       | 66.29                | -44.51      | 110.80         | 150         | 270         | Peak              |
| 5  |   | 5725.000        | 68.80          | 5.59       | 74.39                | -47.81      | 122.20         | 150         | 270         | Peak              |
| 6  |   | 5744.210        | 104.60         | 5.60       | 110.20               | N/A         | N/A            | 150         | 270         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0 | Test Voltage         | AC 120V/60Hz |

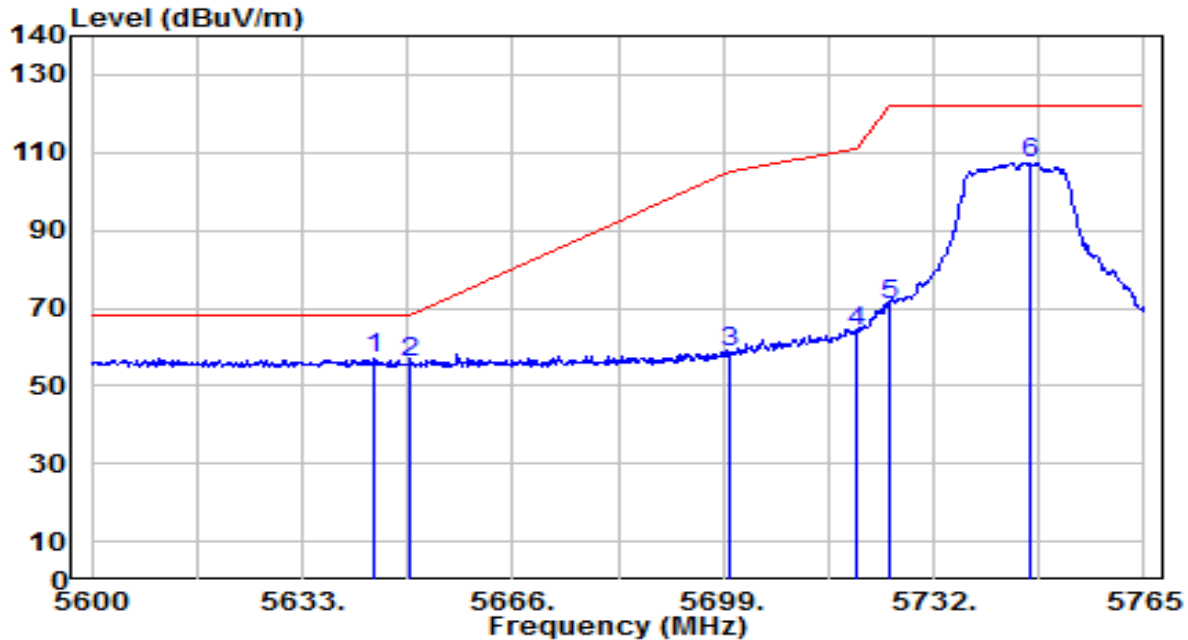


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5644.055        | 51.49          | 5.44       | 56.93                | -11.27      | 68.20          | 170         | 230         | Peak              |
| 2  |   | 5650.000        | 50.37          | 5.44       | 55.81                | -12.39      | 68.20          | 170         | 230         | Peak              |
| 3  |   | 5700.000        | 53.19          | 5.58       | 58.77                | -46.43      | 105.20         | 170         | 230         | Peak              |
| 4  |   | 5720.000        | 58.59          | 5.59       | 64.18                | -46.62      | 110.80         | 170         | 230         | Peak              |
| 5  |   | 5725.000        | 65.26          | 5.59       | 70.85                | -51.35      | 122.20         | 170         | 230         | Peak              |
| 6  |   | 5747.015        | 101.74         | 5.60       | 107.34               | N/A         | N/A            | 170         | 230         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0 | Test Voltage         | AC 120V/60Hz |

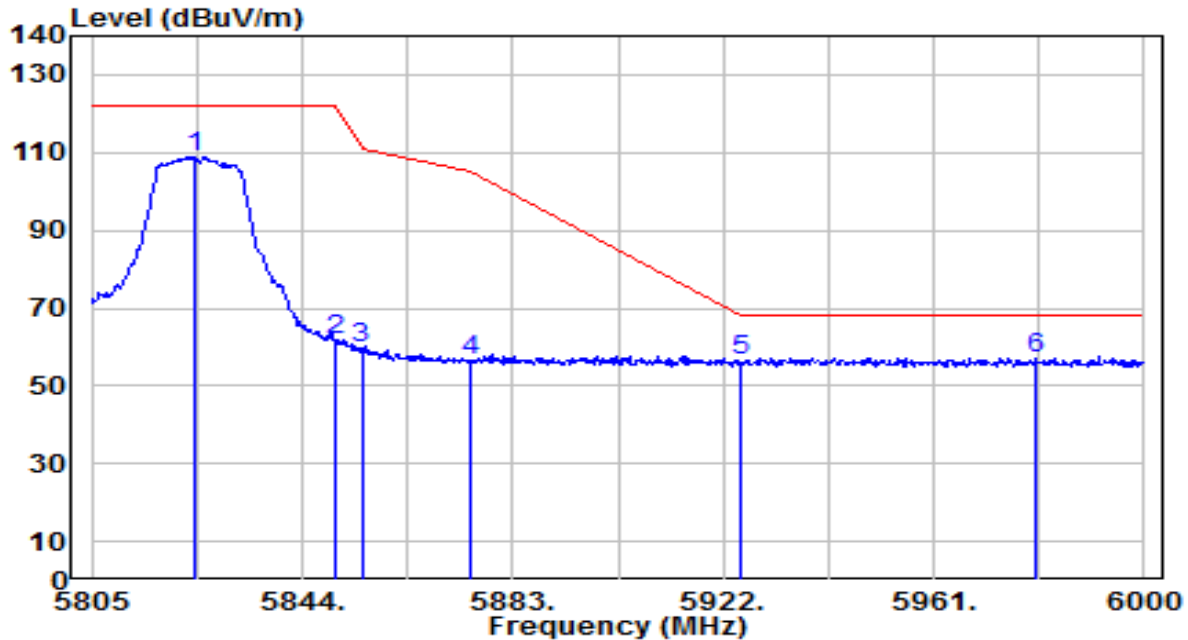


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5824.110        | 103.30         | 5.64       | 108.94               | N/A         | N/A            | 285         | 210         | Peak              |
| 2  | 5850.000        | 56.31          | 5.50       | 61.81                | -60.39      | 122.20         | 285         | 210         | Peak              |
| 3  | 5855.000        | 54.10          | 5.50       | 59.60                | -51.20      | 110.80         | 285         | 210         | Peak              |
| 4  | 5875.000        | 51.17          | 5.48       | 56.64                | -48.56      | 105.20         | 285         | 210         | Peak              |
| 5  | 5925.000        | 51.17          | 5.55       | 56.72                | -11.48      | 68.20          | 285         | 210         | Peak              |
| 6  | * 5979.915      | 51.75          | 5.48       | 57.23                | -10.97      | 68.20          | 285         | 210         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | POS Terminal                  | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                       | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0 | Test Voltage         | AC 120V/60Hz |

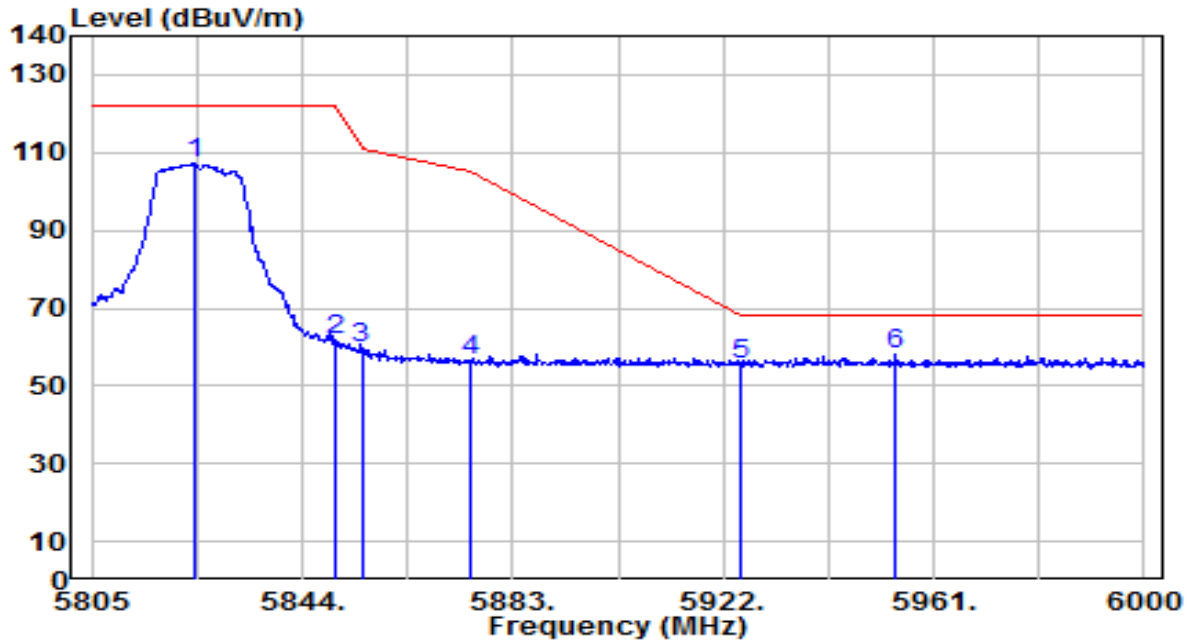


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5824.110        | 101.56         | 5.64       | 107.20               | N/A         | N/A            | 175         | 230         | Peak              |
| 2  | 5850.000        | 56.48          | 5.50       | 61.98                | -60.22      | 122.20         | 175         | 230         | Peak              |
| 3  | 5855.000        | 53.97          | 5.50       | 59.47                | -51.33      | 110.80         | 175         | 230         | Peak              |
| 4  | 5875.000        | 51.05          | 5.48       | 56.53                | -48.67      | 105.20         | 175         | 230         | Peak              |
| 5  | 5925.000        | 49.90          | 5.55       | 55.46                | -12.74      | 68.20          | 175         | 230         | Peak              |
| 6  | * 5953.980      | 52.24          | 5.63       | 57.87                | -10.33      | 68.20          | 175         | 230         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

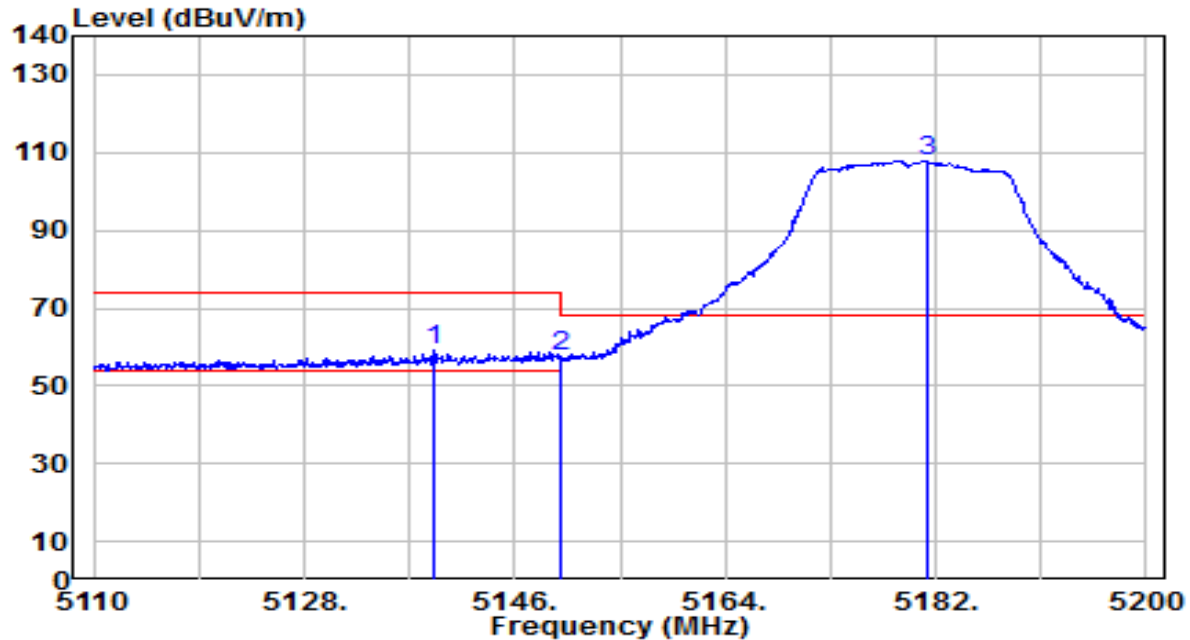


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5139.160        | 55.16          | 4.00       | 59.17                | -14.83      | 74.00          | 165         | 170         | Peak              |
| 2  |   | 5150.000        | 53.80          | 3.98       | 57.78                | -16.22      | 74.00          | 165         | 170         | Peak              |
| 3  |   | 5181.280        | 104.04         | 3.89       | 107.93               | N/A         | N/A            | 165         | 170         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

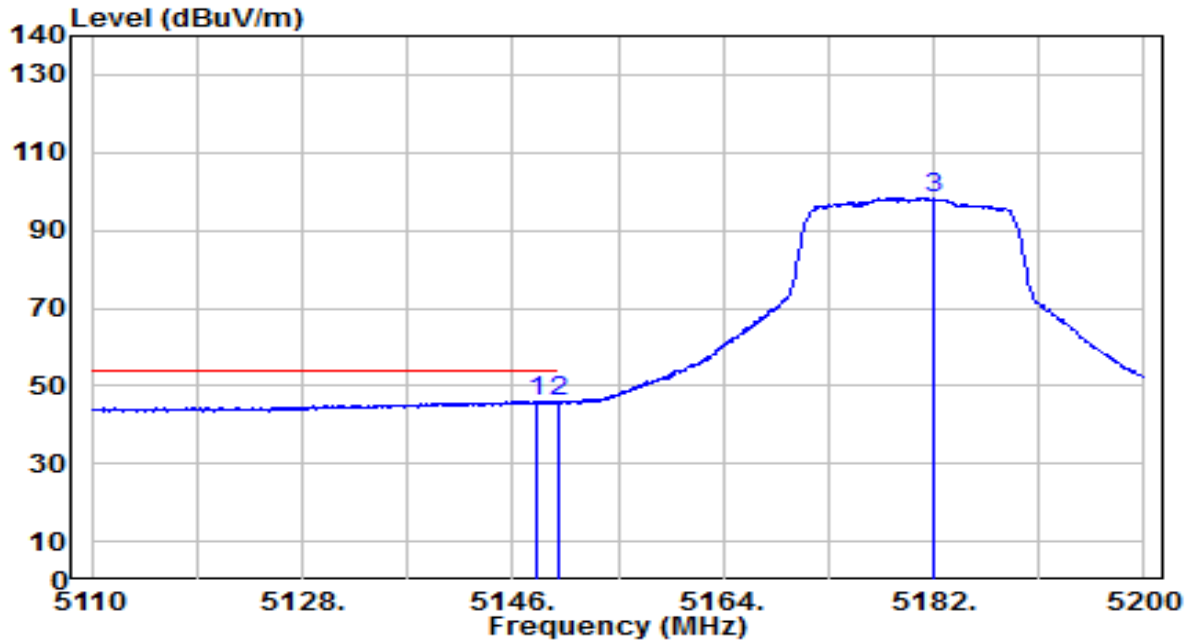


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5148.070        | 42.10          | 3.98       | 46.09                | -7.91       | 54.00          | 165         | 170         | Average           |
| 2  |   | 5150.000        | 41.88          | 3.98       | 45.86                | -8.14       | 54.00          | 165         | 170         | Average           |
| 3  |   | 5181.910        | 94.51          | 3.89       | 98.40                | N/A         | N/A            | 165         | 170         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

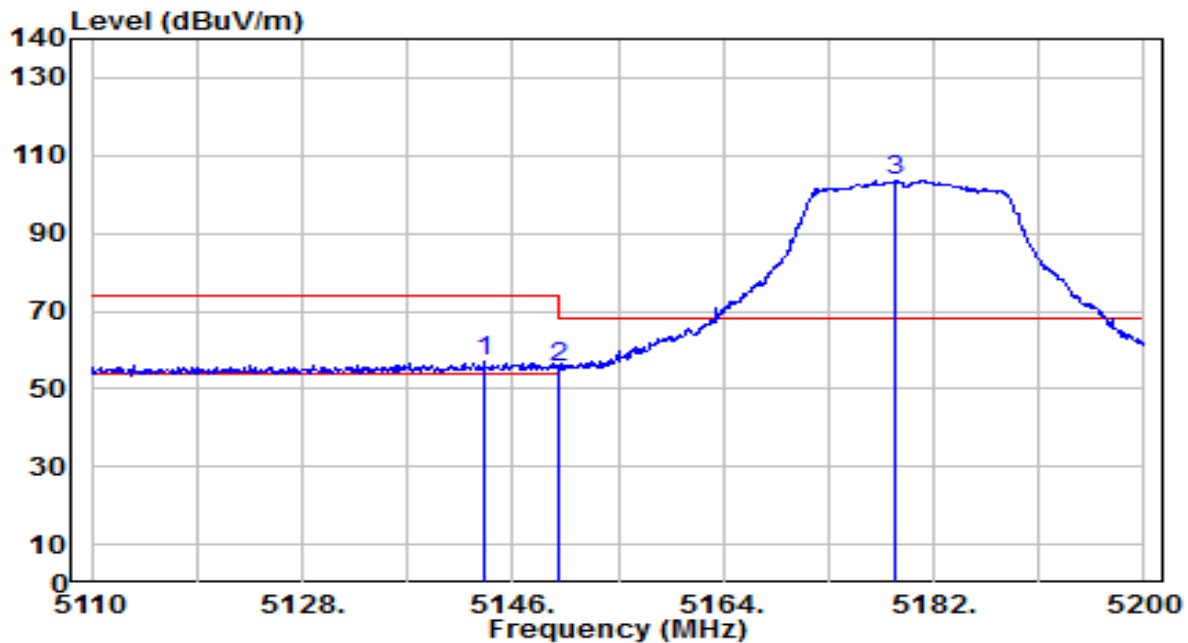


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5143.570        | 53.13          | 3.99       | 57.13                | -16.87      | 74.00          | 165         | 150         | Peak              |
| 2  |   | 5150.000        | 51.71          | 3.98       | 55.69                | -18.31      | 74.00          | 165         | 150         | Peak              |
| 3  |   | 5178.760        | 99.54          | 3.90       | 103.44               | N/A         | N/A            | 165         | 150         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ANT 0 | Test Voltage         | AC 120V/60Hz |

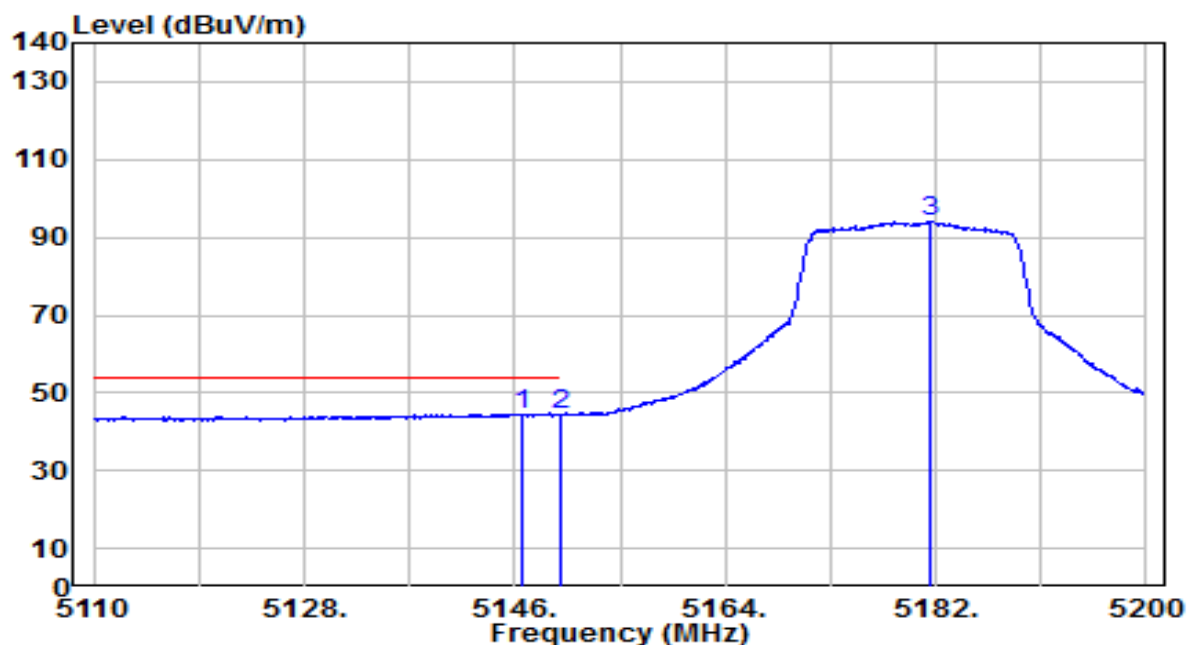


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5146.720        | 40.62          | 3.99       | 44.61                | -9.39       | 54.00          | 165         | 150         | Average           |
| 2  |   | 5150.000        | 40.35          | 3.98       | 44.33                | -9.67       | 54.00          | 165         | 150         | Average           |
| 3  |   | 5181.550        | 90.02          | 3.89       | 93.91                | N/A         | N/A            | 165         | 150         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

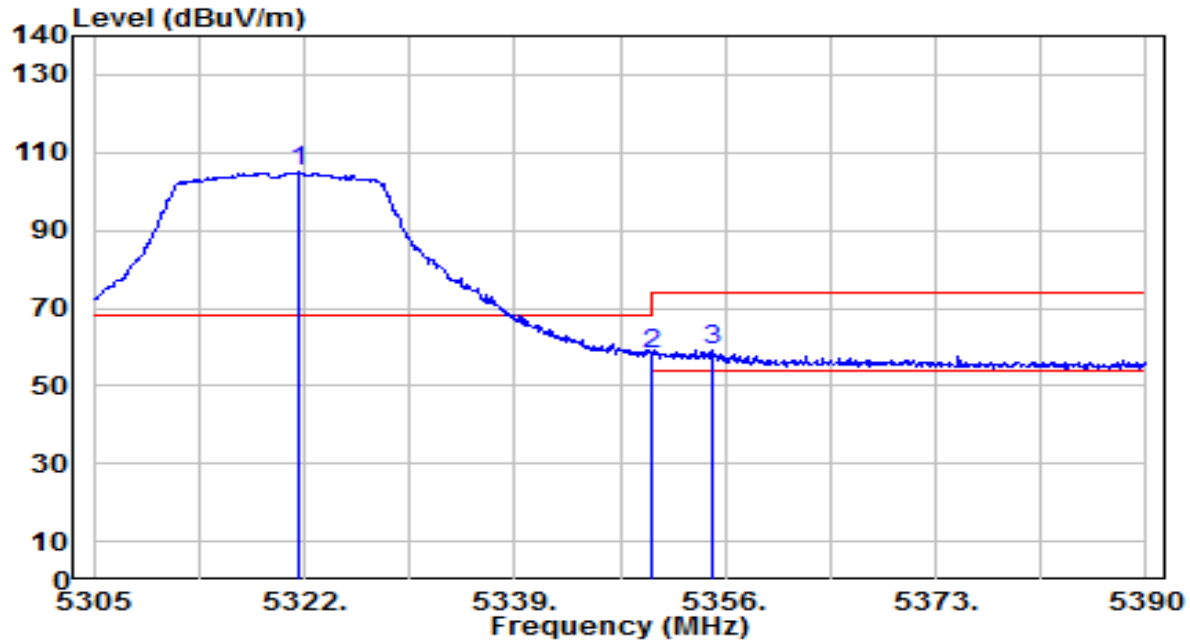


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5321.575        | 101.30         | 3.85       | 105.16               | N/A         | N/A            | 295         | 175         | Peak              |
| 2  | * 5350.000      | 54.47          | 3.78       | 58.25                | -9.95       | 68.20          | 295         | 175         | Peak              |
| 3  | 5354.895        | 55.42          | 3.77       | 59.19                | -14.81      | 74.00          | 295         | 175         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

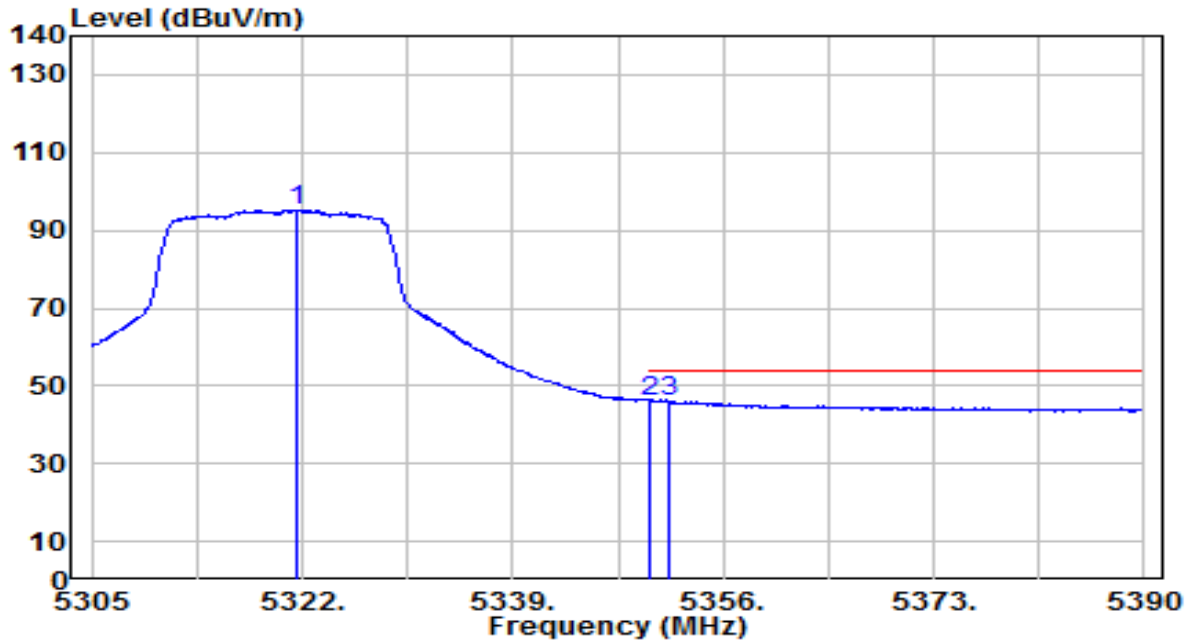


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5321.660        | 91.42          | 3.85       | 95.27                | N/A         | N/A            | 295         | 175         | Average           |
| 2  | * 5350.000      | 42.37          | 3.78       | 46.15                | -7.85       | 54.00          | 295         | 175         | Average           |
| 3  | 5351.580        | 42.14          | 3.78       | 45.92                | -8.08       | 54.00          | 295         | 175         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

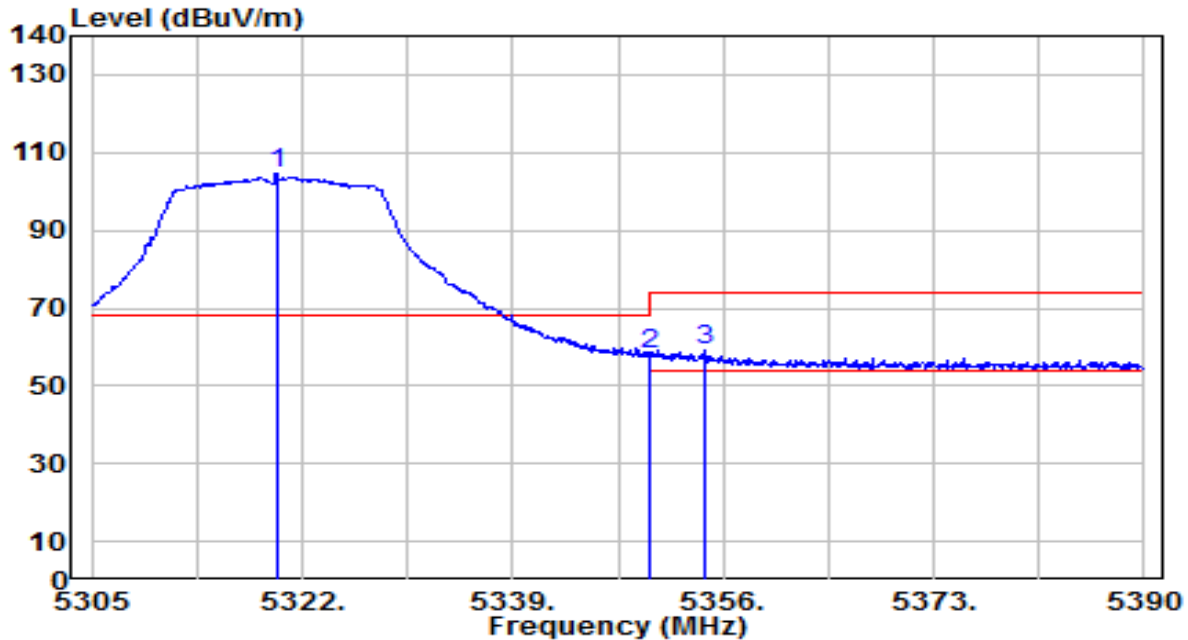


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5319.960        | 100.73         | 3.86       | 104.59               | N/A         | N/A            | 155         | 145         | Peak              |
| 2  | * 5350.000      | 54.41          | 3.78       | 58.20                | -10.00      | 68.20          | 155         | 145         | Peak              |
| 3  | 5354.470        | 55.50          | 3.77       | 59.27                | -14.73      | 74.00          | 155         | 145         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ANT 0 | Test Voltage         | AC 120V/60Hz |

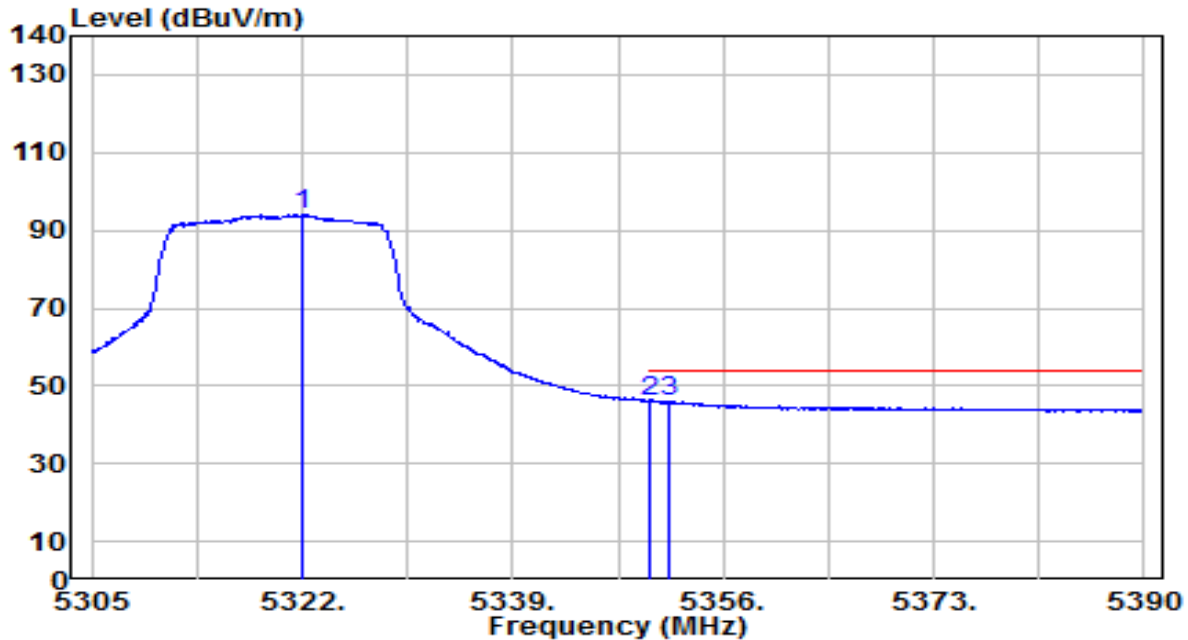


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5322.085        | 90.10          | 3.85       | 93.95                | N/A         | N/A            | 155         | 145         | Average           |
| 2  | * 5350.000      | 42.19          | 3.78       | 45.97                | -8.03       | 54.00          | 155         | 145         | Average           |
| 3  | 5351.665        | 42.07          | 3.78       | 45.85                | -8.15       | 54.00          | 155         | 145         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

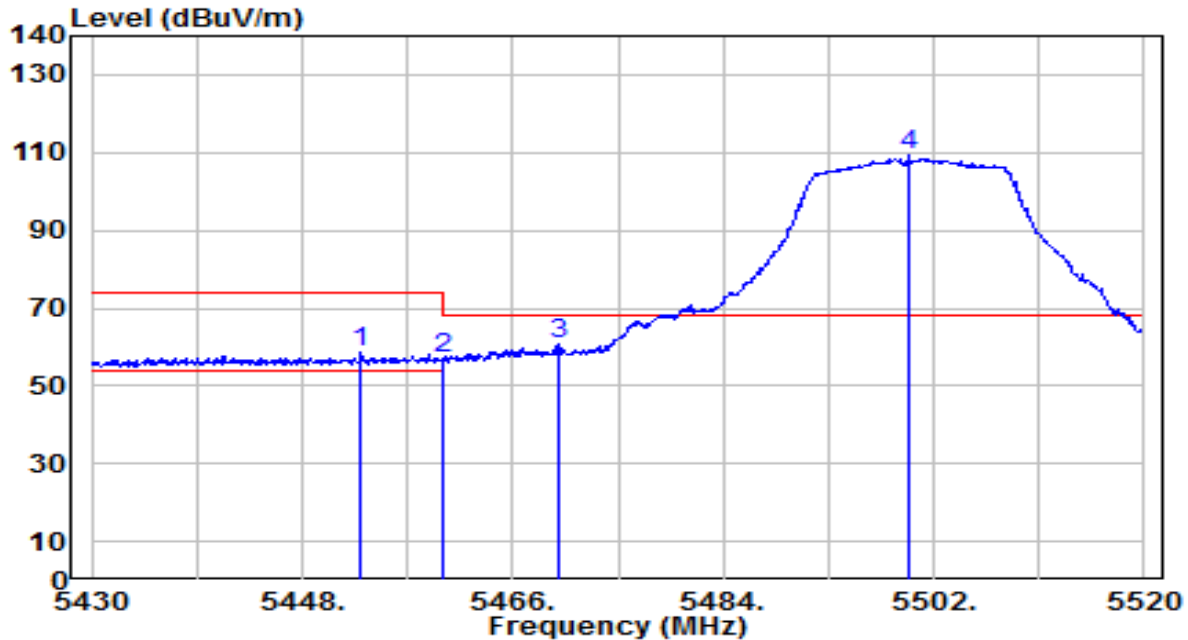


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5453.040        | 54.14          | 4.26       | 58.40                | -15.60      | 74.00          | 250         | 240         | Peak              |
| 2  | 5460.000        | 52.64          | 4.33       | 56.97                | -11.23      | 68.20          | 250         | 240         | Peak              |
| 3  | * 5470.000      | 56.20          | 4.44       | 60.63                | -7.57       | 68.20          | 250         | 240         | Peak              |
| 4  | 5499.930        | 104.41         | 4.75       | 109.16               | N/A         | N/A            | 250         | 240         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

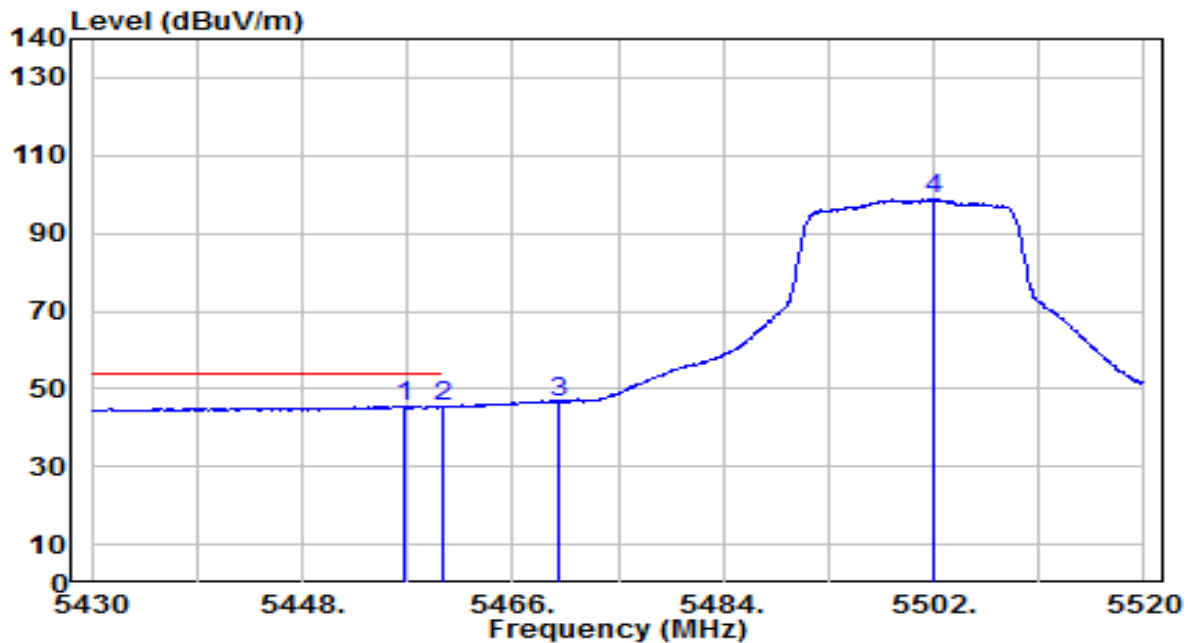


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5456.820      | 41.24          | 4.30       | 45.54                | -8.46       | 54.00          | 250         | 240         | Average           |
| 2  | 5460.000        | 40.93          | 4.33       | 45.27                | -8.73       | 54.00          | 250         | 240         | Average           |
| 3  | 5470.000        | 42.30          | 4.44       | 46.74                | N/A         | N/A            | 250         | 240         | Average           |
| 4  | 5501.910        | 94.00          | 4.77       | 98.77                | N/A         | N/A            | 250         | 240         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

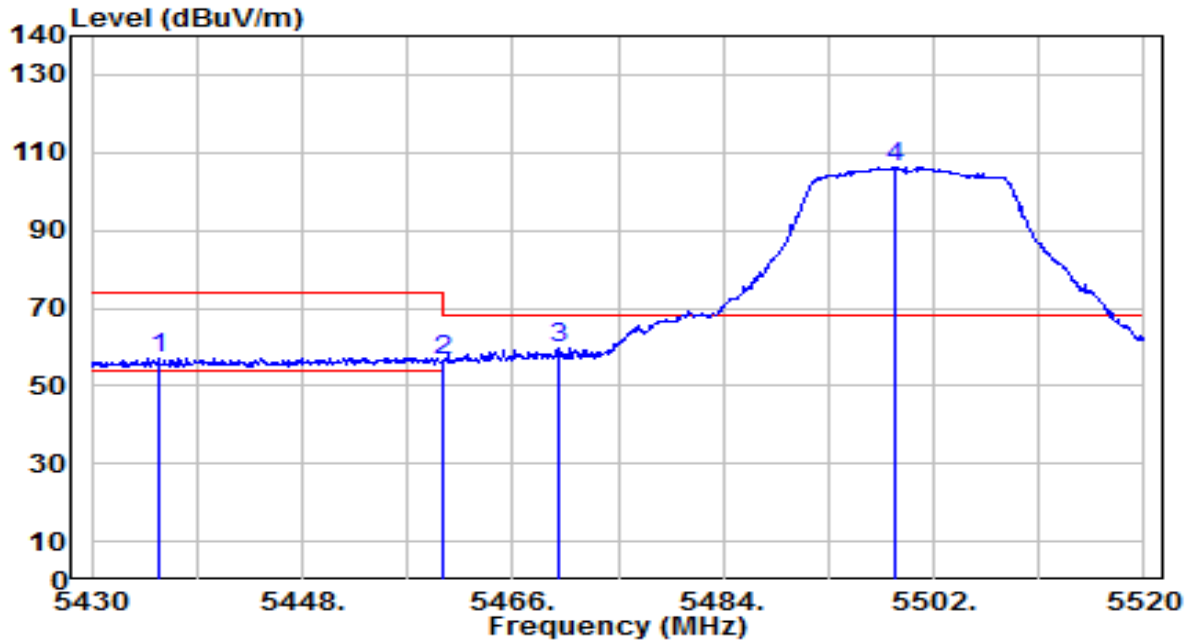


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5435.670        | 53.19          | 4.07       | 57.26                | -16.74      | 74.00          | 145         | 145         | Peak              |
| 2  | 5460.000        | 52.00          | 4.33       | 56.34                | -11.86      | 68.20          | 145         | 145         | Peak              |
| 3  | * 5470.000      | 55.12          | 4.44       | 59.55                | -8.65       | 68.20          | 145         | 145         | Peak              |
| 4  | 5498.670        | 101.56         | 4.74       | 106.30               | N/A         | N/A            | 145         | 145         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ANT 0 | Test Voltage         | AC 120V/60Hz |

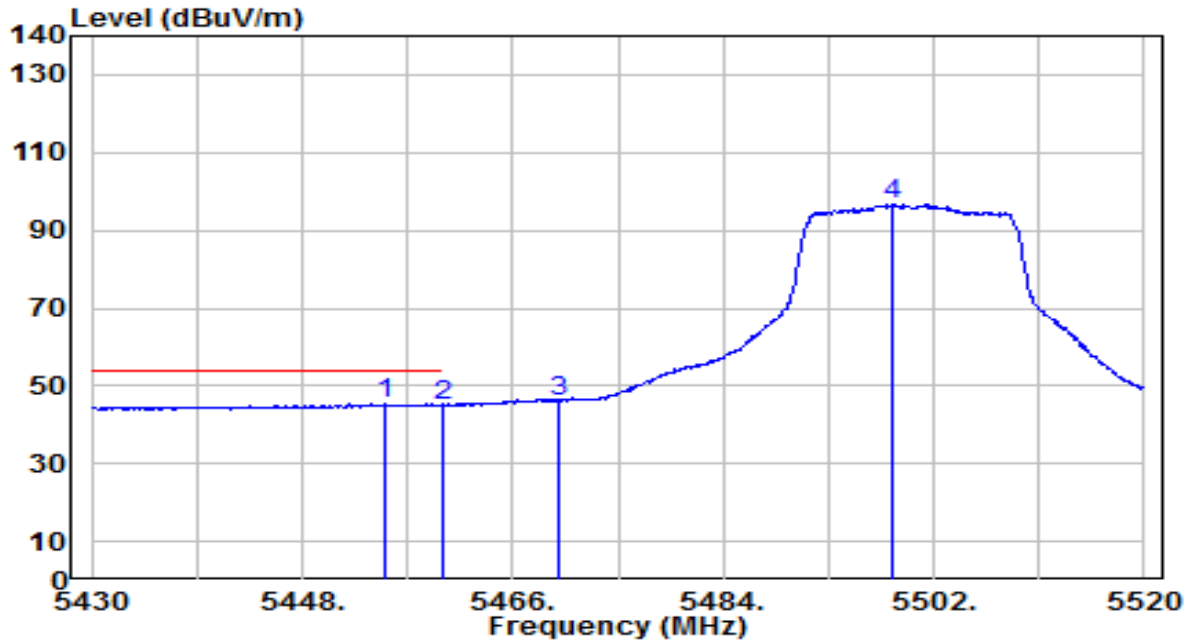


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5455.110        | 41.02          | 4.28       | 45.30                | -8.70       | 54.00          | 145         | 145         | Average           |
| 2  |   | 5460.000        | 40.73          | 4.33       | 45.06                | -8.94       | 54.00          | 145         | 145         | Average           |
| 3  |   | 5470.000        | 41.79          | 4.44       | 46.22                | N/A         | N/A            | 145         | 145         | Average           |
| 4  |   | 5498.490        | 91.77          | 4.73       | 96.50                | N/A         | N/A            | 145         | 145         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 140_ANT 0 | Test Voltage         | AC 120V/60Hz |

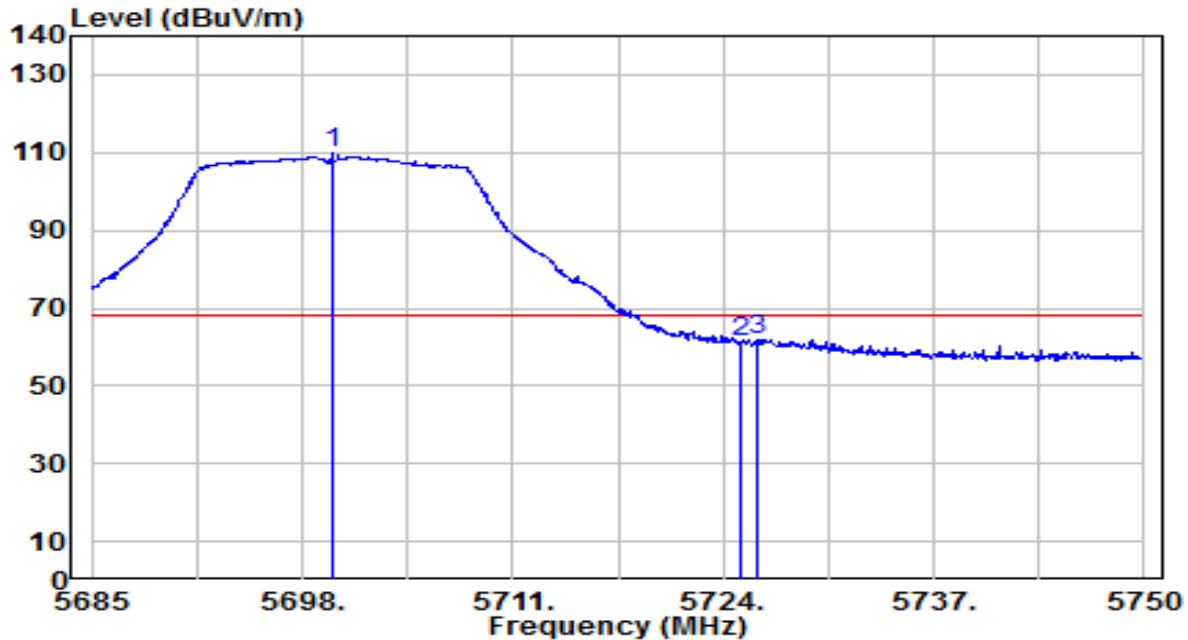


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5699.820        | 104.07         | 5.58       | 109.65               | N/A         | N/A            | 170         | 270         | Peak              |
| 2  | 5725.000        | 55.52          | 5.59       | 61.11                | -7.09       | 68.20          | 170         | 270         | Peak              |
| 3  | * 5726.080      | 56.32          | 5.59       | 61.91                | -6.29       | 68.20          | 170         | 270         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 140_ANT 0 | Test Voltage         | AC 120V/60Hz |

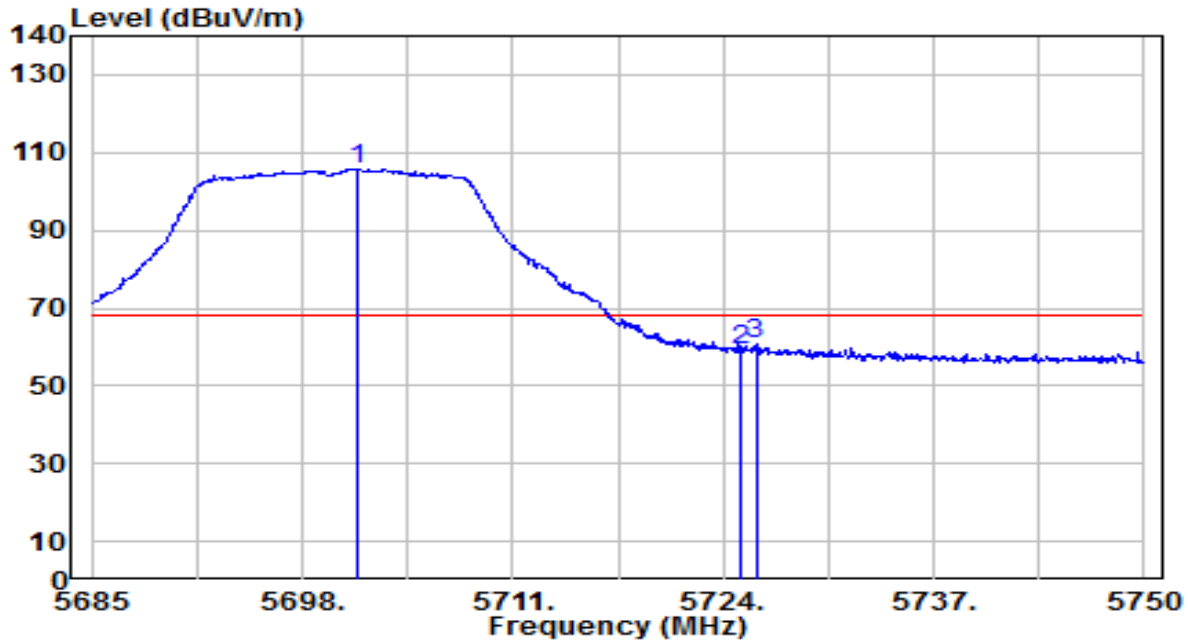


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5701.380        | 100.22         | 5.58       | 105.80               | N/A         | N/A            | 230         | 235         | Peak              |
| 2  | 5725.000        | 53.51          | 5.59       | 59.10                | -9.10       | 68.20          | 230         | 235         | Peak              |
| 3  | * 5726.015      | 55.16          | 5.59       | 60.75                | -7.45       | 68.20          | 230         | 235         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 149_ANT 0 | Test Voltage         | AC 120V/60Hz |

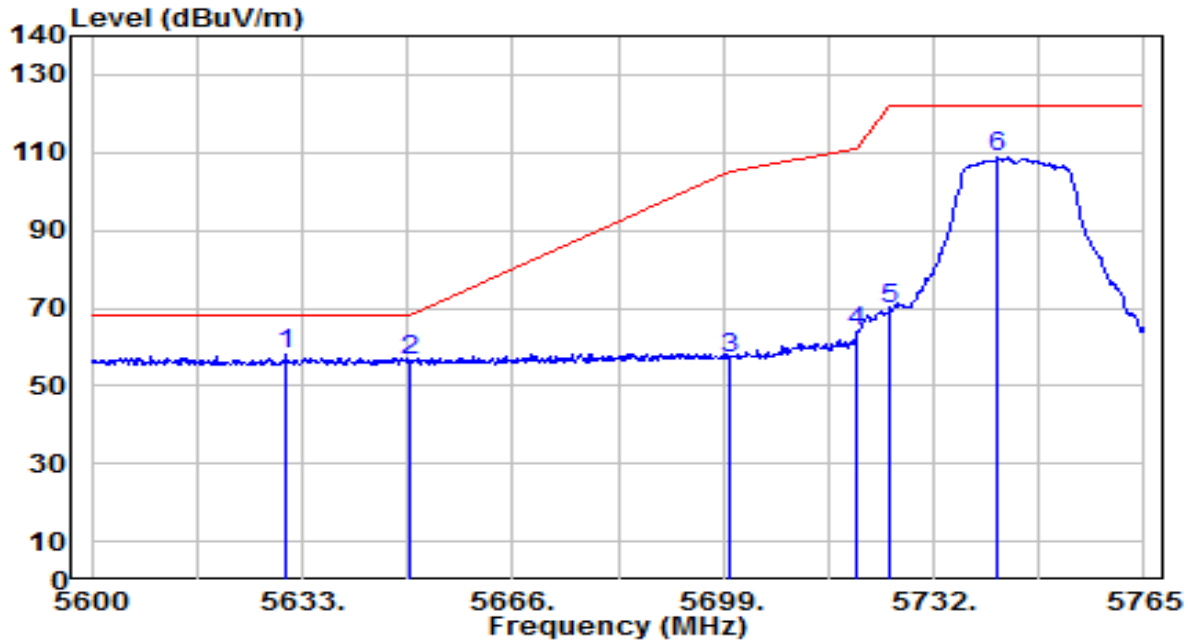


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5630.525        | 52.76          | 5.45       | 58.22                | -9.98       | 68.20          | 150         | 270         | Peak              |
| 2  |   | 5650.000        | 50.87          | 5.44       | 56.31                | -11.89      | 68.20          | 150         | 270         | Peak              |
| 3  |   | 5700.000        | 51.53          | 5.58       | 57.11                | -48.09      | 105.20         | 150         | 270         | Peak              |
| 4  |   | 5720.000        | 58.48          | 5.59       | 64.06                | -46.74      | 110.80         | 150         | 270         | Peak              |
| 5  |   | 5725.000        | 64.17          | 5.59       | 69.76                | -52.44      | 122.20         | 150         | 270         | Peak              |
| 6  |   | 5742.065        | 103.01         | 5.60       | 108.61               | N/A         | N/A            | 150         | 270         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 149_ANT 0 | Test Voltage         | AC 120V/60Hz |

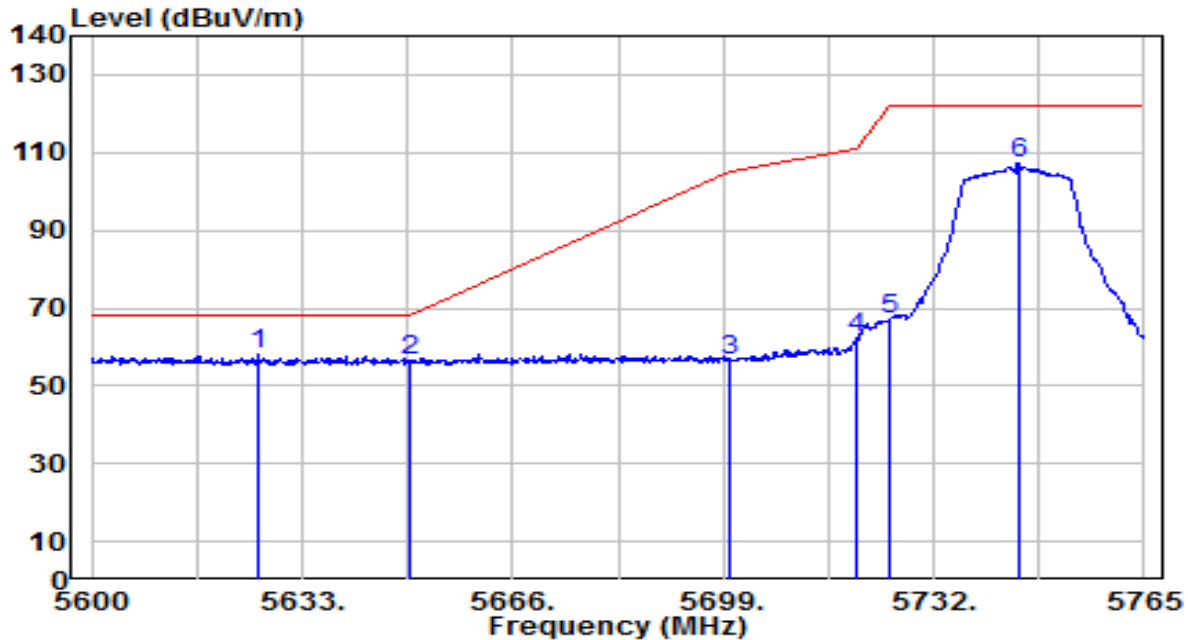


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5625.905      | 52.49          | 5.45       | 57.95                | -10.25      | 68.20          | 170         | 230         | Peak              |
| 2  | 5650.000        | 51.11          | 5.44       | 56.55                | -11.65      | 68.20          | 170         | 230         | Peak              |
| 3  | 5700.000        | 51.02          | 5.58       | 56.60                | -48.60      | 105.20         | 170         | 230         | Peak              |
| 4  | 5720.000        | 56.60          | 5.59       | 62.18                | -48.62      | 110.80         | 170         | 230         | Peak              |
| 5  | 5725.000        | 61.68          | 5.59       | 67.27                | -54.93      | 122.20         | 170         | 230         | Peak              |
| 6  | 5745.200        | 101.56         | 5.60       | 107.16               | N/A         | N/A            | 170         | 230         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 165_ANT 0 | Test Voltage         | AC 120V/60Hz |

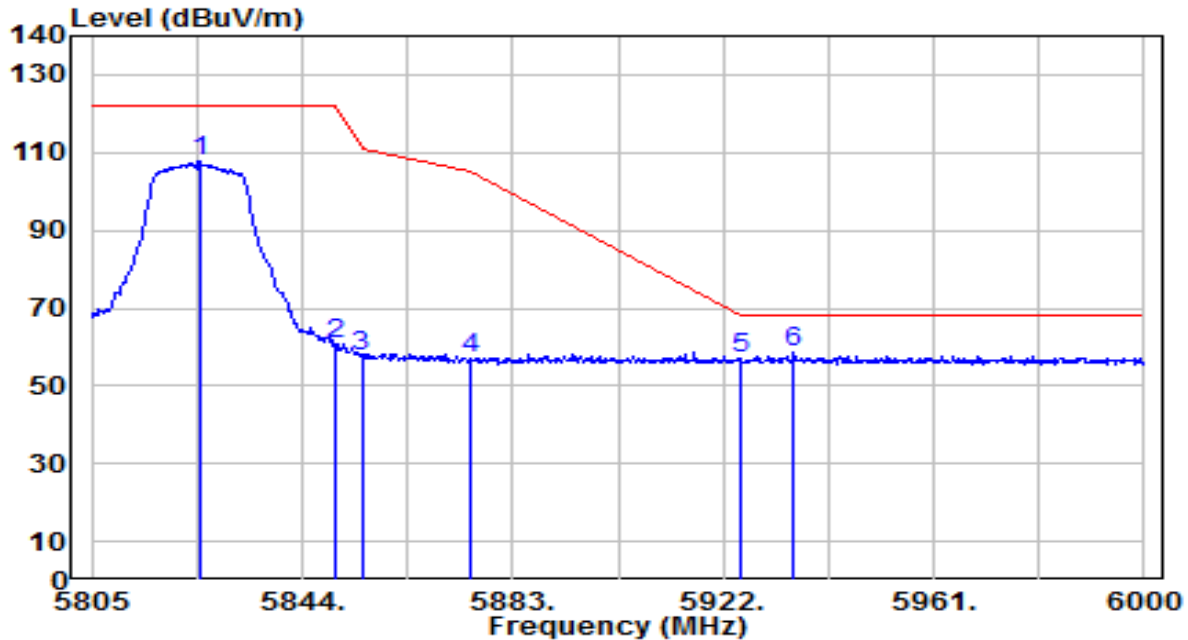


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5824.890        | 102.29         | 5.64       | 107.93               | N/A         | N/A            | 150         | 270         | Peak              |
| 2  | 5850.000        | 55.12          | 5.50       | 60.62                | -61.58      | 122.20         | 150         | 270         | Peak              |
| 3  | 5855.000        | 52.11          | 5.50       | 57.60                | -53.20      | 110.80         | 150         | 270         | Peak              |
| 4  | 5875.000        | 51.35          | 5.48       | 56.82                | -48.38      | 105.20         | 150         | 270         | Peak              |
| 5  | 5925.000        | 51.40          | 5.55       | 56.95                | -11.25      | 68.20          | 150         | 270         | Peak              |
| 6  | * 5935.065      | 53.12          | 5.59       | 58.72                | -9.48       | 68.20          | 150         | 270         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                             | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 165_ANT 0 | Test Voltage         | AC 120V/60Hz |

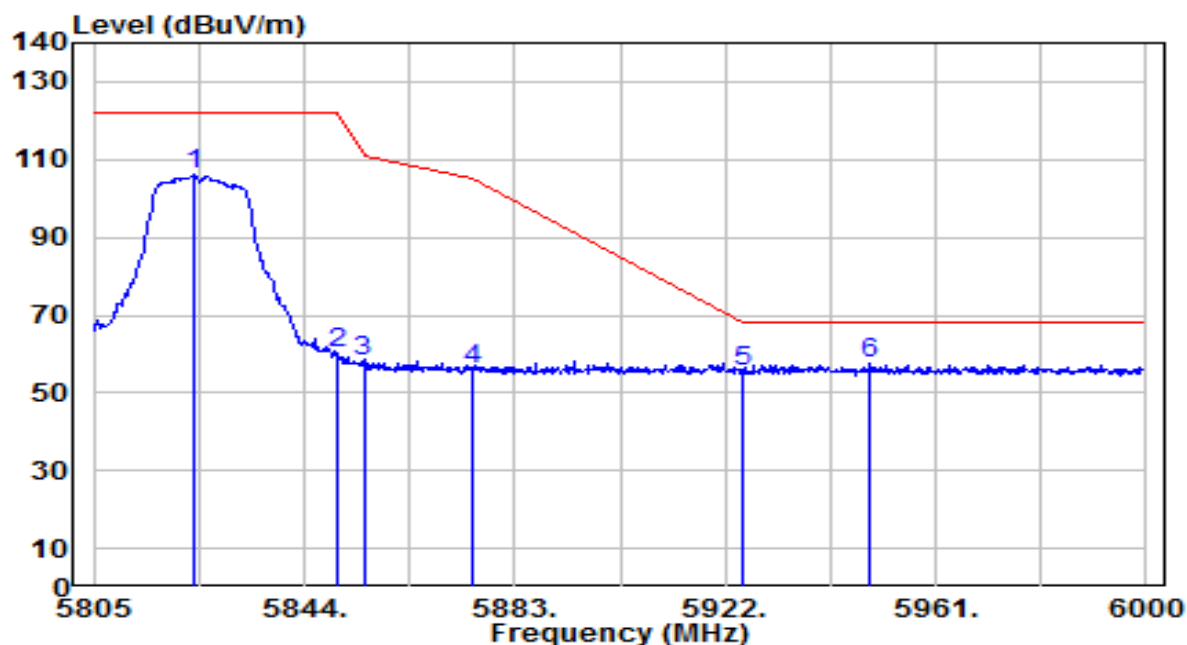


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5823.720        | 100.44         | 5.65       | 106.08               | N/A         | N/A            | 175         | 230         | Peak              |
| 2  | 5850.000        | 54.64          | 5.50       | 60.14                | -62.06      | 122.20         | 175         | 230         | Peak              |
| 3  | 5855.000        | 52.82          | 5.50       | 58.32                | -52.48      | 110.80         | 175         | 230         | Peak              |
| 4  | 5875.000        | 50.57          | 5.48       | 56.04                | -49.16      | 105.20         | 175         | 230         | Peak              |
| 5  | 5925.000        | 49.87          | 5.55       | 55.42                | -12.78      | 68.20          | 175         | 230         | Peak              |
| 6  | * 5948.910      | 51.69          | 5.65       | 57.34                | -10.86      | 68.20          | 175         | 230         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                            | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                         | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band1_CH 38_ANT 0 | Test Voltage         | AC 120V/60Hz |

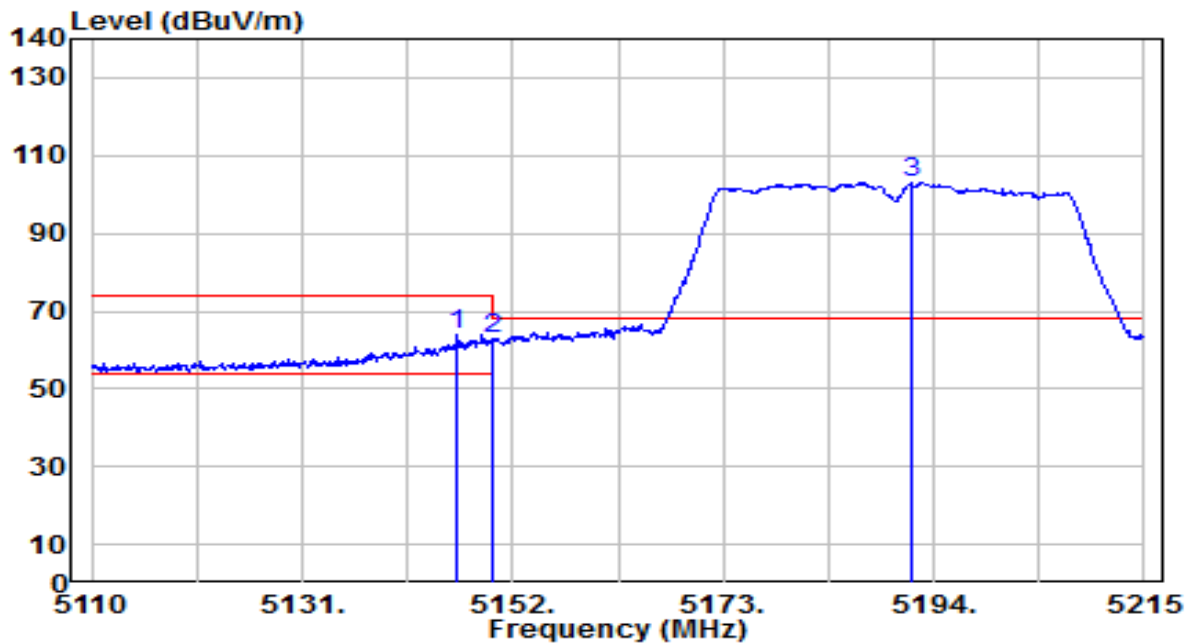


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5146.540        | 60.13          | 3.99       | 64.12                | -9.88       | 74.00          | 165         | 170         | Peak              |
| 2  |   | 5150.000        | 58.89          | 3.98       | 62.87                | -11.13      | 74.00          | 165         | 170         | Peak              |
| 3  |   | 5191.795        | 99.13          | 3.87       | 103.00               | N/A         | N/A            | 165         | 170         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                            | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                         | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band1_CH 38_ANT 0 | Test Voltage         | AC 120V/60Hz |

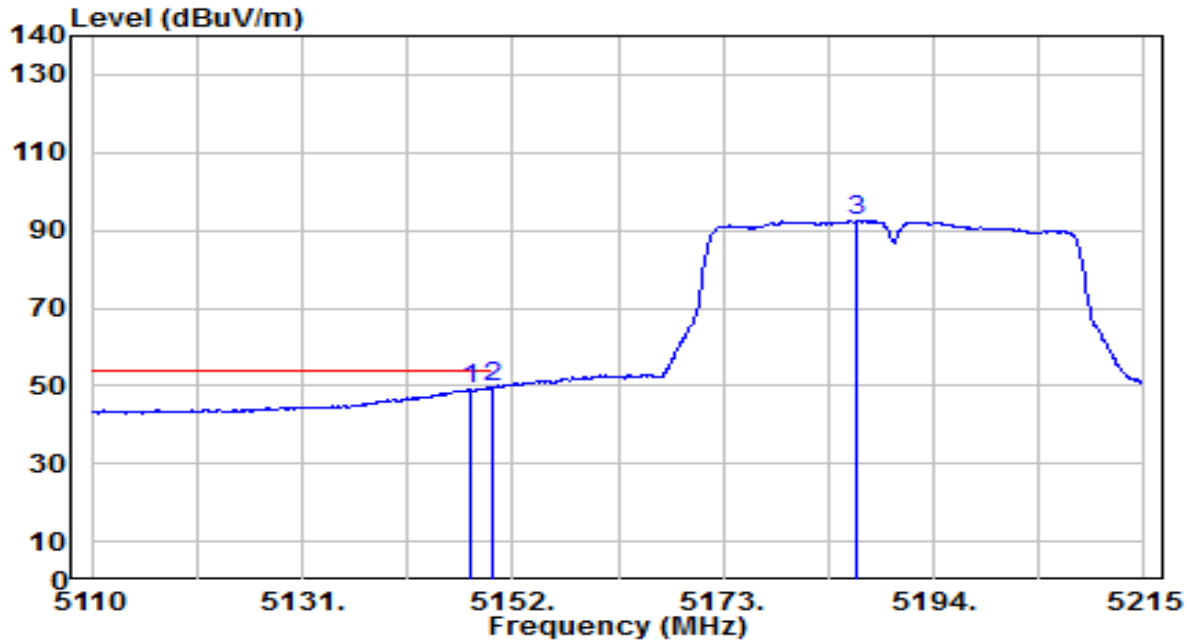


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5147.800        | 45.23          | 3.98       | 49.21                | -4.79       | 54.00          | 165         | 170         | Average           |
| 2  | * 5150.000      | 45.57          | 3.98       | 49.55                | -4.45       | 54.00          | 165         | 170         | Average           |
| 3  | 5186.335        | 88.59          | 3.88       | 92.47                | N/A         | N/A            | 165         | 170         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                            | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band1_CH 38_ANT 0 | Test Voltage         | AC 120V/60Hz |

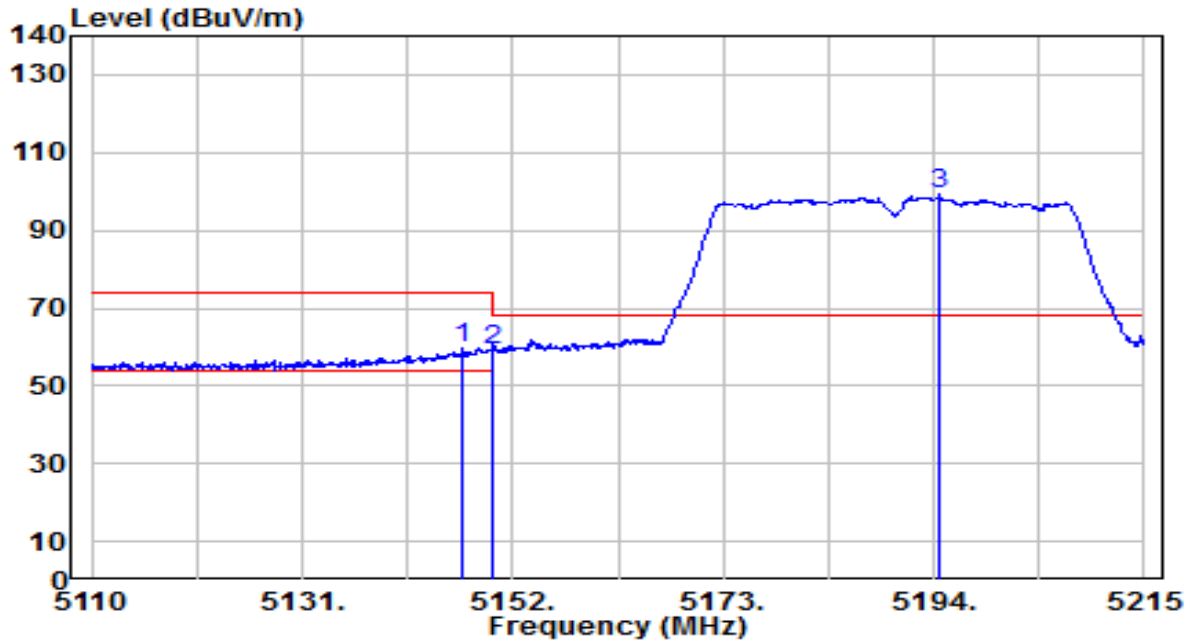


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5147.065        | 55.79          | 3.99       | 59.77                | -14.23      | 74.00          | 165         | 150         | Peak              |
| 2  |   | 5150.000        | 54.96          | 3.98       | 58.94                | -15.06      | 74.00          | 165         | 150         | Peak              |
| 3  |   | 5194.630        | 95.35          | 3.86       | 99.21                | N/A         | N/A            | 165         | 150         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                            | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band1_CH 38_ANT 0 | Test Voltage         | AC 120V/60Hz |

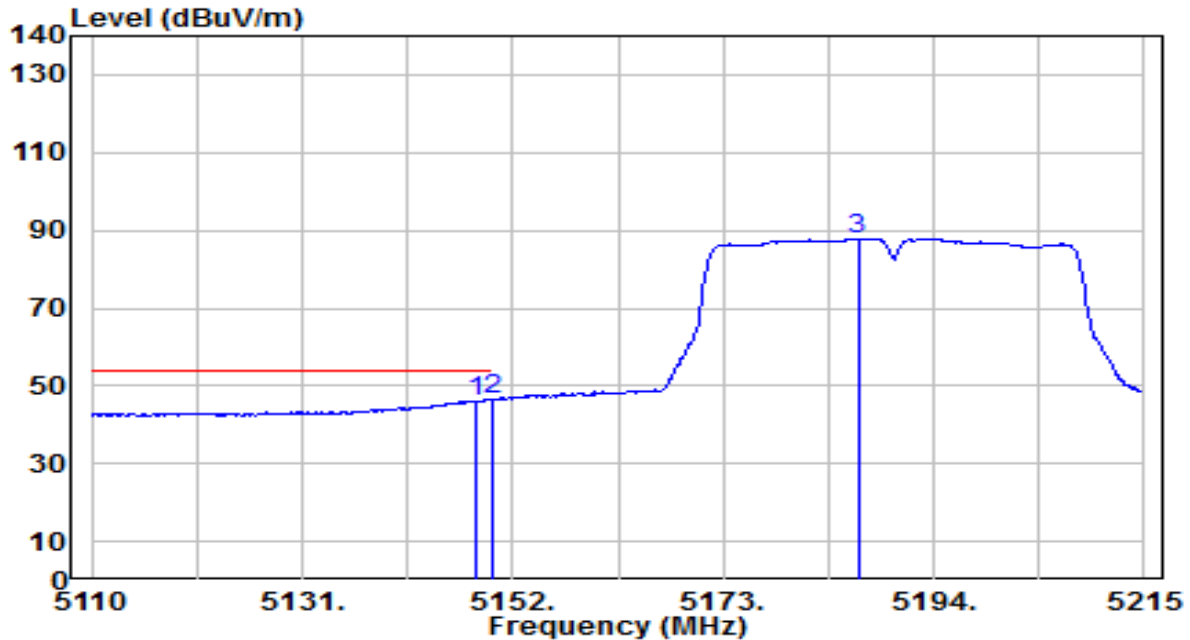


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5148.325        | 42.21          | 3.98       | 46.19                | -7.81       | 54.00          | 165         | 150         | Average           |
| 2  | * 5150.000      | 42.51          | 3.98       | 46.49                | -7.51       | 54.00          | 165         | 150         | Average           |
| 3  | 5186.440        | 84.08          | 3.88       | 87.96                | N/A         | N/A            | 165         | 150         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                            | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                         | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band2_CH 62_ANT 0 | Test Voltage         | AC 120V/60Hz |

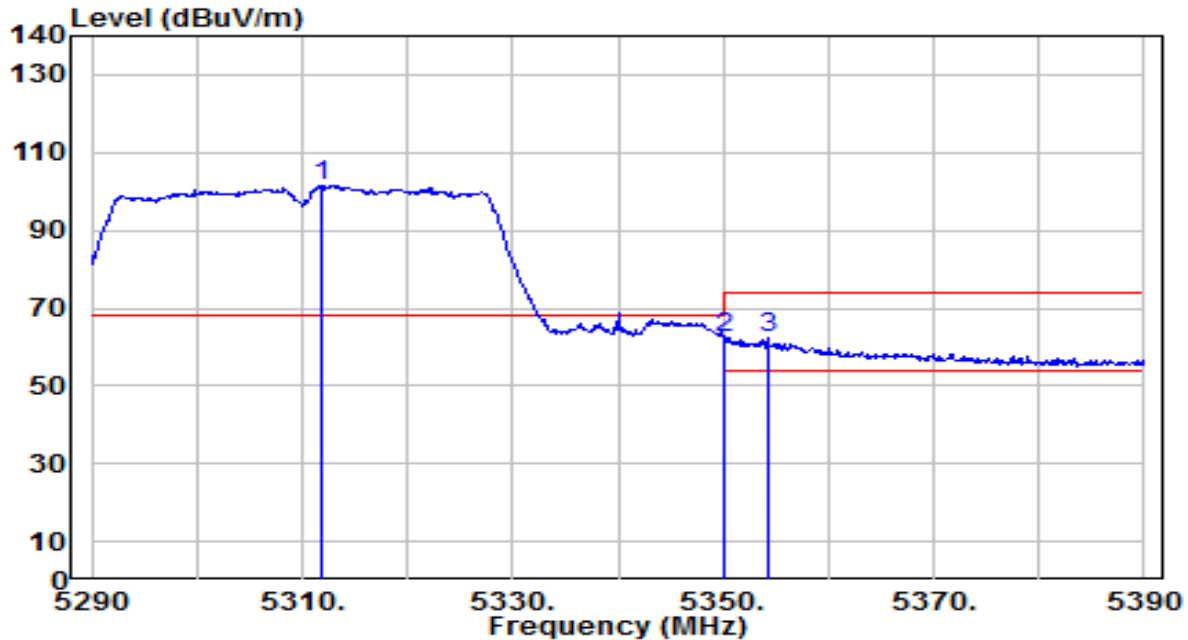


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5311.800        | 97.46          | 3.88       | 101.34               | N/A         | N/A            | 295         | 175         | Peak              |
| 2  | * 5350.000      | 58.78          | 3.78       | 62.56                | -5.64       | 68.20          | 295         | 175         | Peak              |
| 3  | 5354.200        | 58.72          | 3.77       | 62.49                | -11.51      | 74.00          | 295         | 175         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                            | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                         | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band2_CH 62_ANT 0 | Test Voltage         | AC 120V/60Hz |

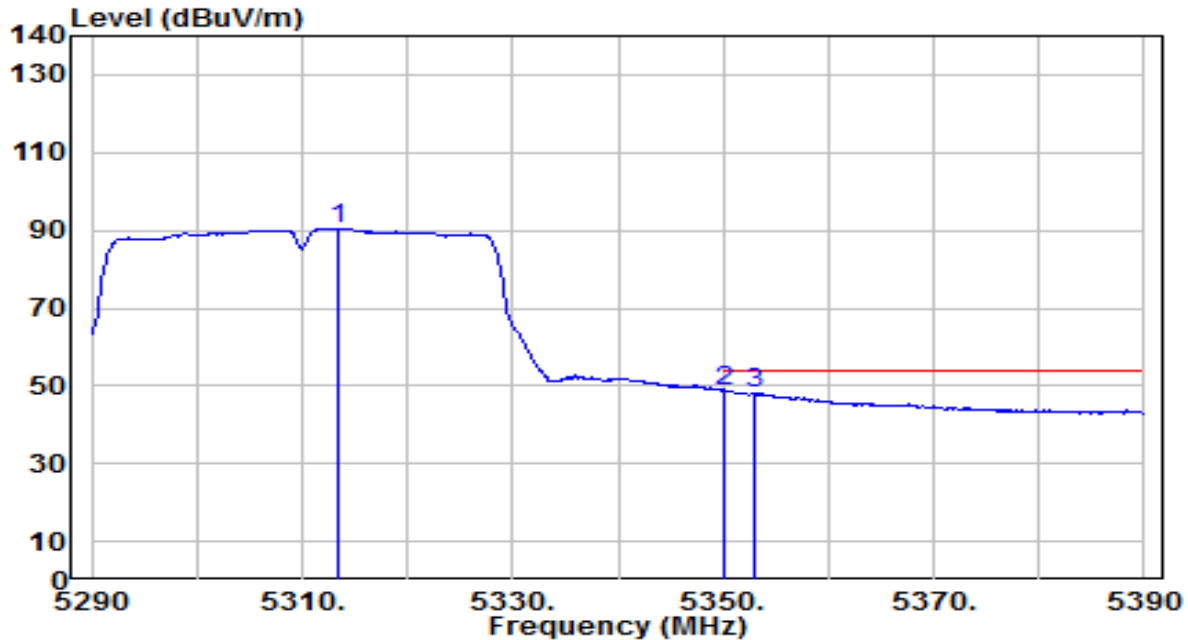


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5313.300        | 86.70          | 3.87       | 90.57                | N/A         | N/A            | 295         | 175         | Average           |
| 2  | * 5350.000      | 45.05          | 3.78       | 48.84                | -5.16       | 54.00          | 295         | 175         | Average           |
| 3  | 5352.900        | 44.41          | 3.78       | 48.18                | -5.82       | 54.00          | 295         | 175         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                            | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band2_CH 62_ANT 0 | Test Voltage         | AC 120V/60Hz |

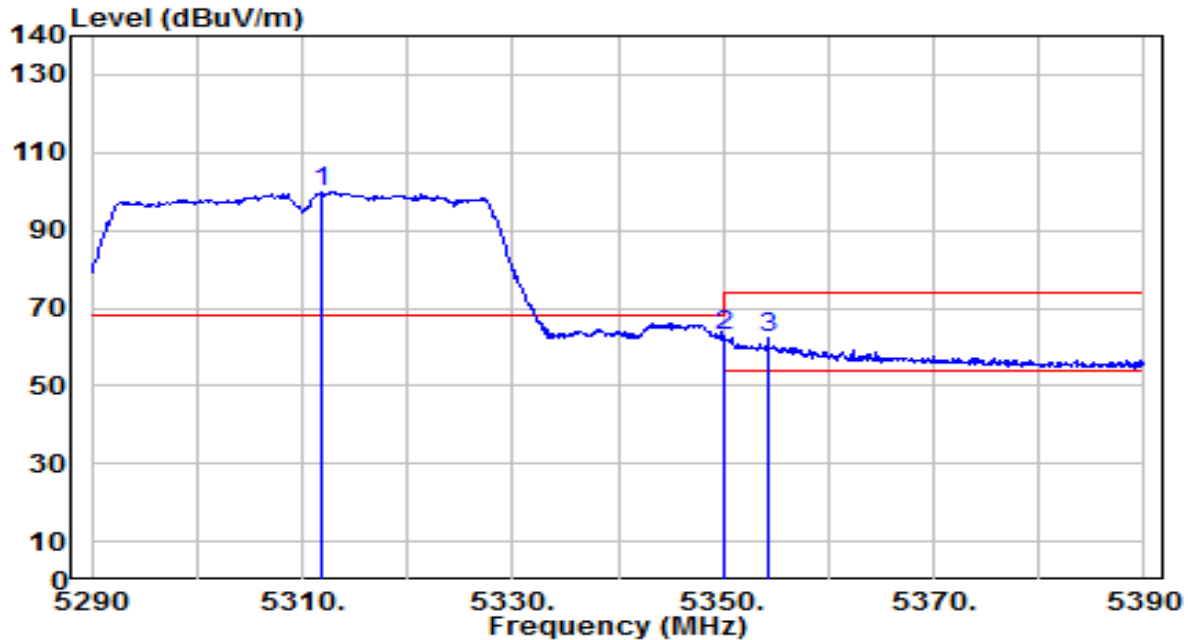


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5311.800        | 95.94          | 3.88       | 99.82                | N/A         | N/A            | 155         | 145         | Peak              |
| 2  | * 5350.000      | 58.94          | 3.78       | 62.72                | -5.48       | 68.20          | 155         | 145         | Peak              |
| 3  | 5354.300        | 58.61          | 3.77       | 62.38                | -11.62      | 74.00          | 155         | 145         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                    |                      |              |
|-----------|------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                       | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                            | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band2_CH 62_ANT 0 | Test Voltage         | AC 120V/60Hz |

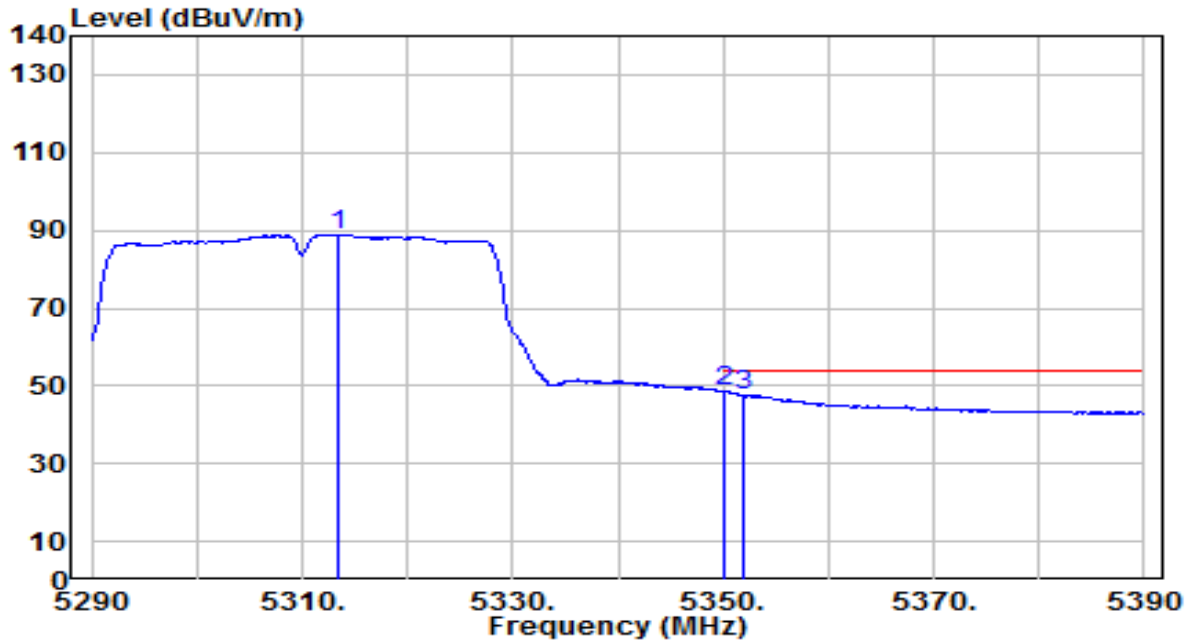


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5313.400        | 85.06          | 3.87       | 88.93                | N/A         | N/A            | 155         | 145         | Average           |
| 2  | * 5350.000      | 44.98          | 3.78       | 48.76                | -5.24       | 54.00          | 155         | 145         | Average           |
| 3  | 5351.800        | 43.90          | 3.78       | 47.68                | -6.32       | 54.00          | 155         | 145         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 102_ANT 0 | Test Voltage         | AC 120V/60Hz |

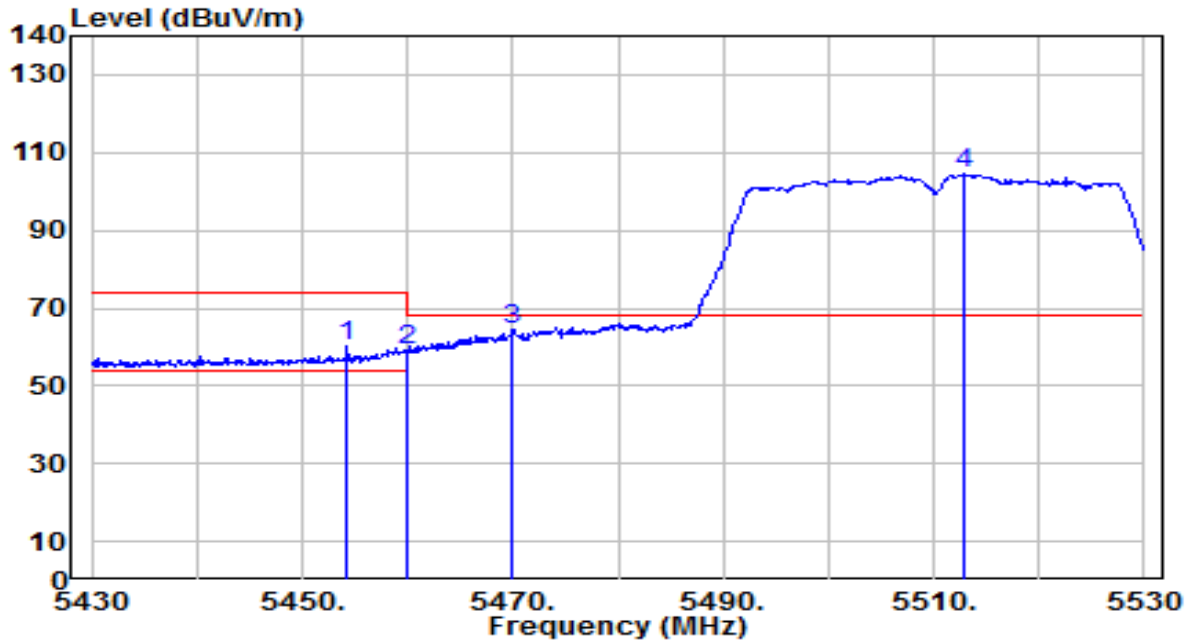


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5454.300        | 55.86          | 4.27       | 60.14                | -13.86      | 74.00          | 250         | 240         | Peak              |
| 2  | 5460.000        | 55.00          | 4.33       | 59.33                | -8.87       | 68.20          | 250         | 240         | Peak              |
| 3  | * 5470.000      | 59.99          | 4.44       | 64.43                | -3.77       | 68.20          | 250         | 240         | Peak              |
| 4  | 5512.800        | 99.50          | 4.88       | 104.38               | N/A         | N/A            | 250         | 240         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 102_ANT 0 | Test Voltage         | AC 120V/60Hz |

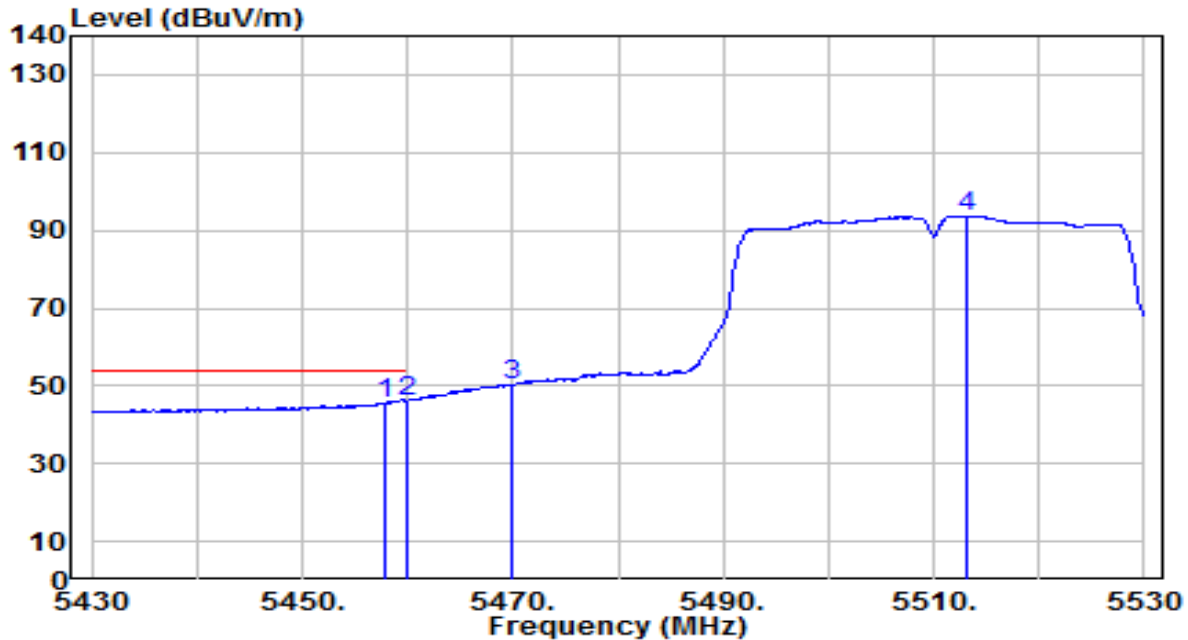


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5457.800        | 41.34          | 4.31       | 45.65                | -8.35       | 54.00          | 250         | 240         | Average           |
| 2  | * 5460.000      | 41.81          | 4.33       | 46.14                | -7.86       | 54.00          | 250         | 240         | Average           |
| 3  | 5470.000        | 45.88          | 4.44       | 50.31                | N/A         | N/A            | 250         | 240         | Average           |
| 4  | 5513.100        | 88.76          | 4.88       | 93.64                | N/A         | N/A            | 250         | 240         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 102_ANT 0 | Test Voltage         | AC 120V/60Hz |

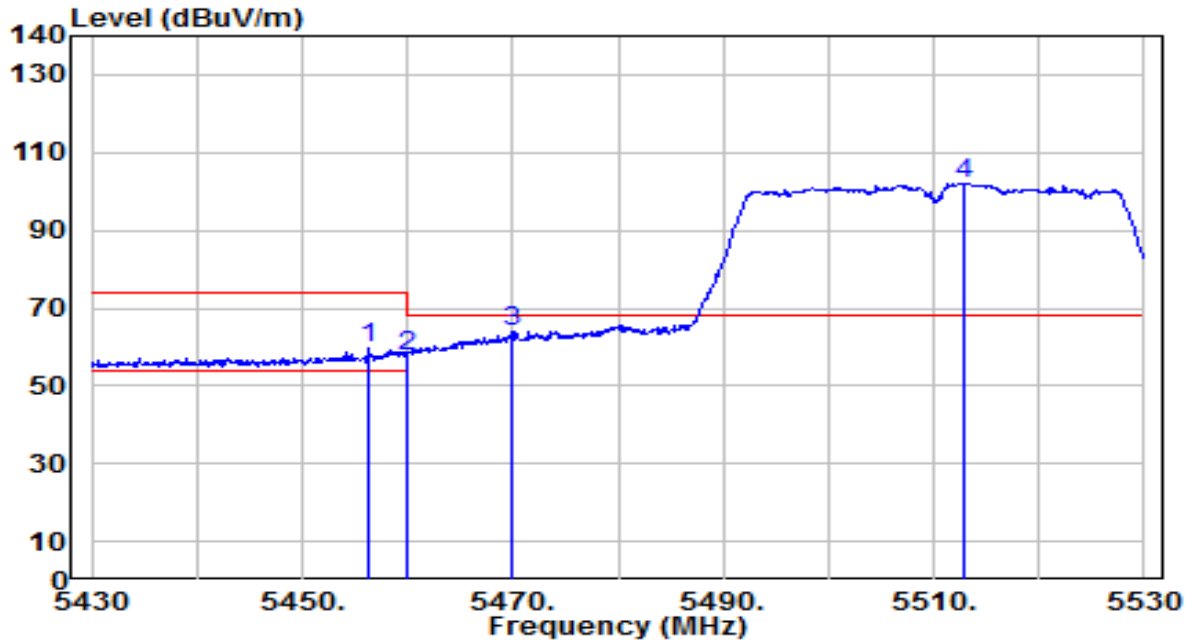


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5456.300        | 55.22          | 4.29       | 59.51                | -14.49      | 74.00          | 145         | 145         | Peak              |
| 2  | 5460.000        | 53.38          | 4.33       | 57.71                | -10.49      | 68.20          | 145         | 145         | Peak              |
| 3  | * 5470.000      | 59.34          | 4.44       | 63.77                | -4.43       | 68.20          | 145         | 145         | Peak              |
| 4  | 5512.800        | 97.28          | 4.88       | 102.16               | N/A         | N/A            | 145         | 145         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 102_ANT 0 | Test Voltage         | AC 120V/60Hz |

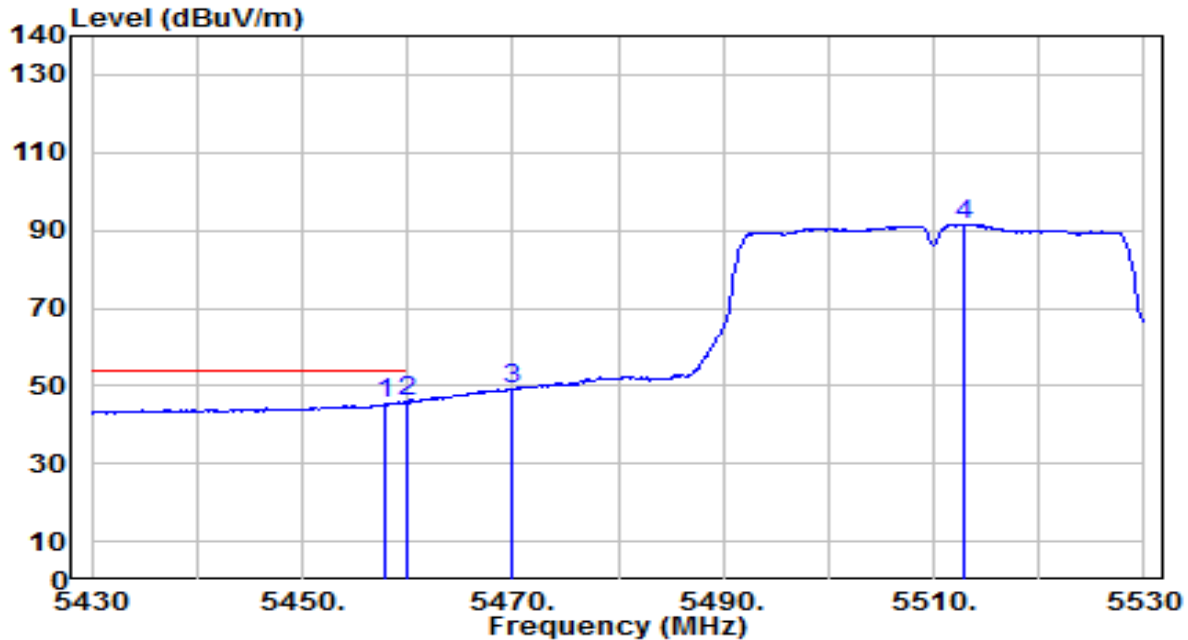


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5457.900        | 40.93          | 4.31       | 45.24                | -8.76       | 54.00          | 145         | 145         | Average           |
| 2  | * 5460.000      | 41.50          | 4.33       | 45.83                | -8.17       | 54.00          | 145         | 145         | Average           |
| 3  | 5470.000        | 44.73          | 4.44       | 49.17                | N/A         | N/A            | 145         | 145         | Average           |
| 4  | 5512.900        | 86.44          | 4.88       | 91.32                | N/A         | N/A            | 145         | 145         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 134_ANT 0 | Test Voltage         | AC 120V/60Hz |

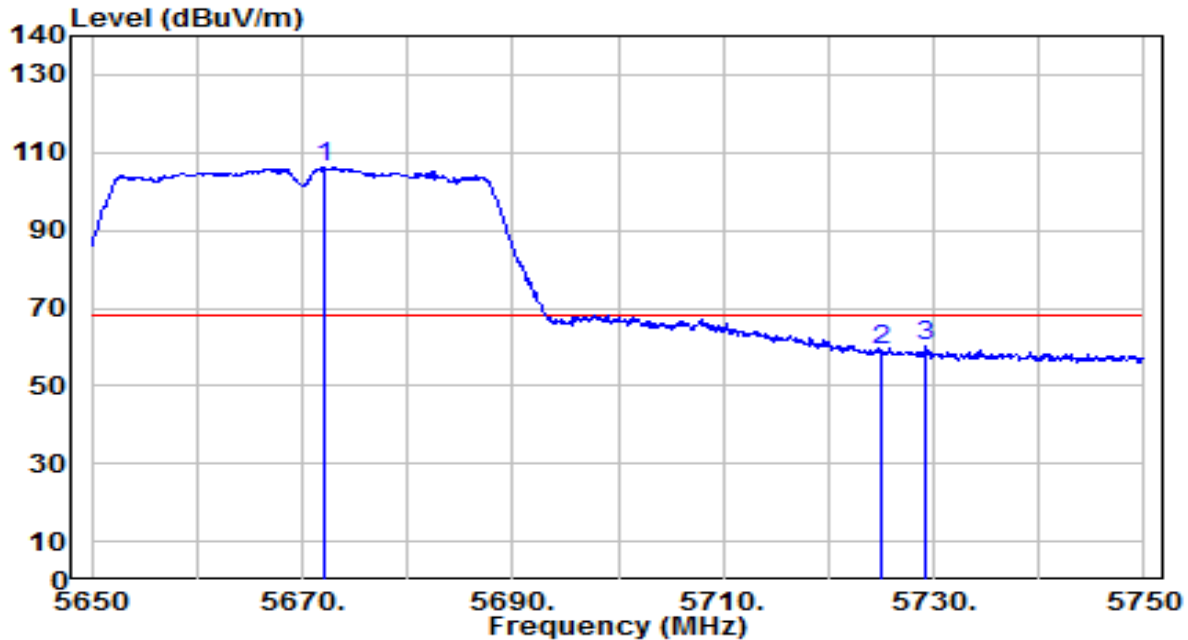


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5672.000        | 100.49         | 5.50       | 106.00               | N/A         | N/A            | 170         | 270         | Peak              |
| 2  | 5725.000        | 53.79          | 5.59       | 59.38                | -8.82       | 68.20          | 170         | 270         | Peak              |
| 3  | * 5729.100      | 54.84          | 5.59       | 60.43                | -7.77       | 68.20          | 170         | 270         | Peak              |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band3_CH 134_ANT 0 | Test Voltage         | AC 120V/60Hz |

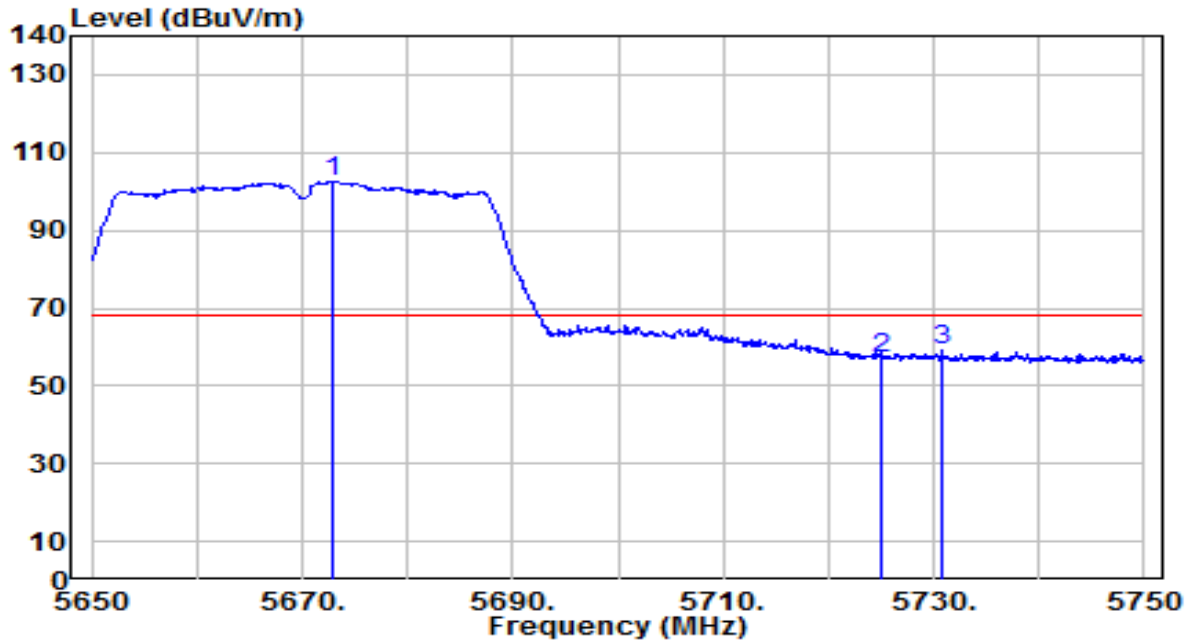


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5672.900        | 97.12          | 5.50       | 102.62               | N/A         | N/A            | 230         | 235         | Peak              |
| 2  | 5725.000        | 51.27          | 5.59       | 56.86                | -11.34      | 68.20          | 230         | 235         | Peak              |
| 3  | * 5730.800      | 53.36          | 5.59       | 58.95                | -9.25       | 68.20          | 230         | 235         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band4_CH 151_ANT 0 | Test Voltage         | AC 120V/60Hz |

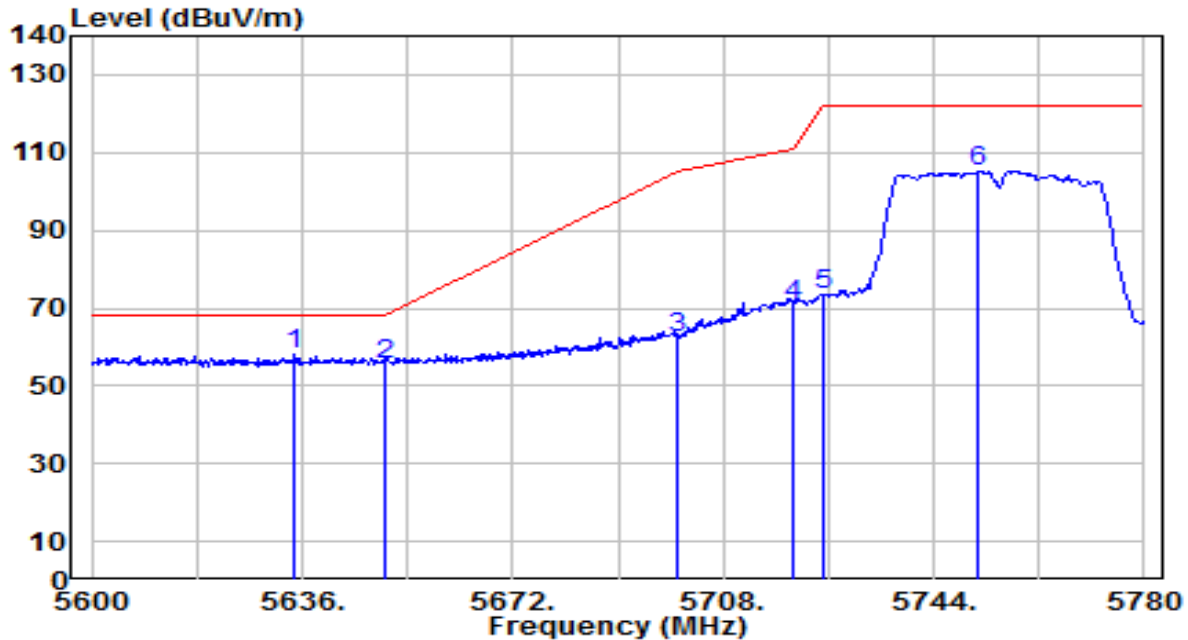


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5634.740        | 52.63          | 5.45       | 58.08                | -10.12      | 68.20          | 150         | 270         | Peak              |
| 2  |   | 5650.000        | 50.21          | 5.44       | 55.65                | -12.55      | 68.20          | 150         | 270         | Peak              |
| 3  |   | 5700.000        | 56.89          | 5.58       | 62.47                | -42.73      | 105.20         | 150         | 270         | Peak              |
| 4  |   | 5720.000        | 65.39          | 5.59       | 70.98                | -39.82      | 110.80         | 150         | 270         | Peak              |
| 5  |   | 5725.000        | 67.86          | 5.59       | 73.45                | -48.75      | 122.20         | 150         | 270         | Peak              |
| 6  |   | 5751.740        | 99.70          | 5.61       | 105.30               | N/A         | N/A            | 150         | 270         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band4_CH 151_ANT 0 | Test Voltage         | AC 120V/60Hz |

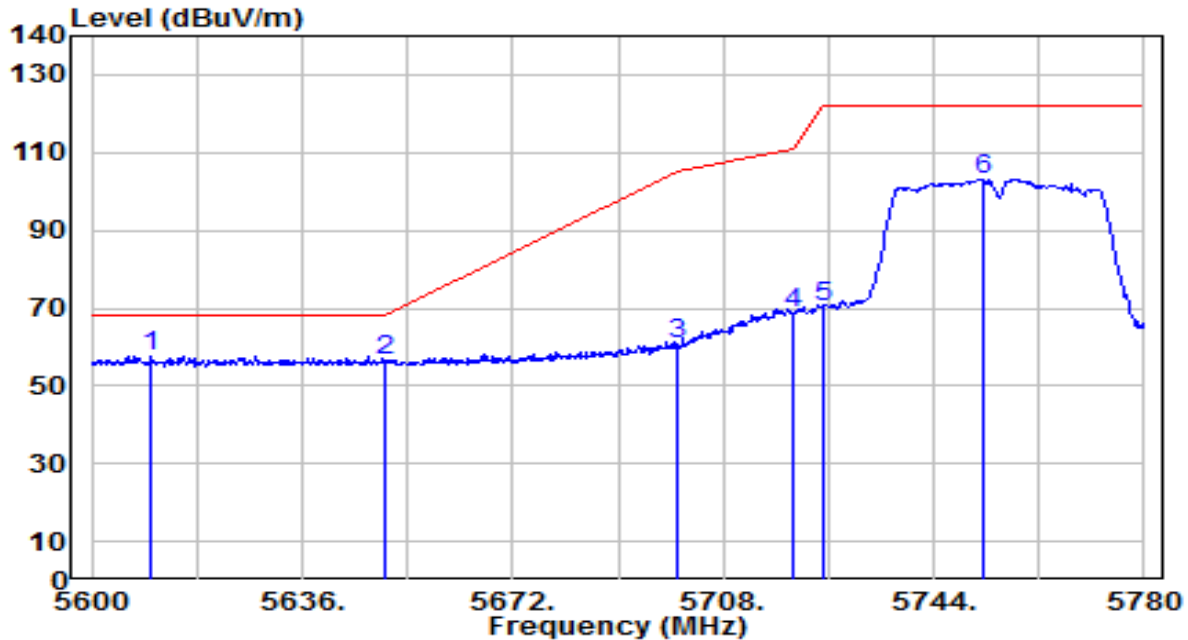


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 5610.260      | 52.14          | 5.46       | 57.60                | -10.60      | 68.20          | 170         | 230         | Peak              |
| 2  | 5650.000        | 50.99          | 5.44       | 56.43                | -11.77      | 68.20          | 170         | 230         | Peak              |
| 3  | 5700.000        | 55.39          | 5.58       | 60.97                | -44.23      | 105.20         | 170         | 230         | Peak              |
| 4  | 5720.000        | 63.26          | 5.59       | 68.84                | -41.96      | 110.80         | 170         | 230         | Peak              |
| 5  | 5725.000        | 64.93          | 5.59       | 70.52                | -51.68      | 122.20         | 170         | 230         | Peak              |
| 6  | 5752.460        | 97.58          | 5.61       | 103.19               | N/A         | N/A            | 170         | 230         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band4_CH 159_ANT 0 | Test Voltage         | AC 120V/60Hz |

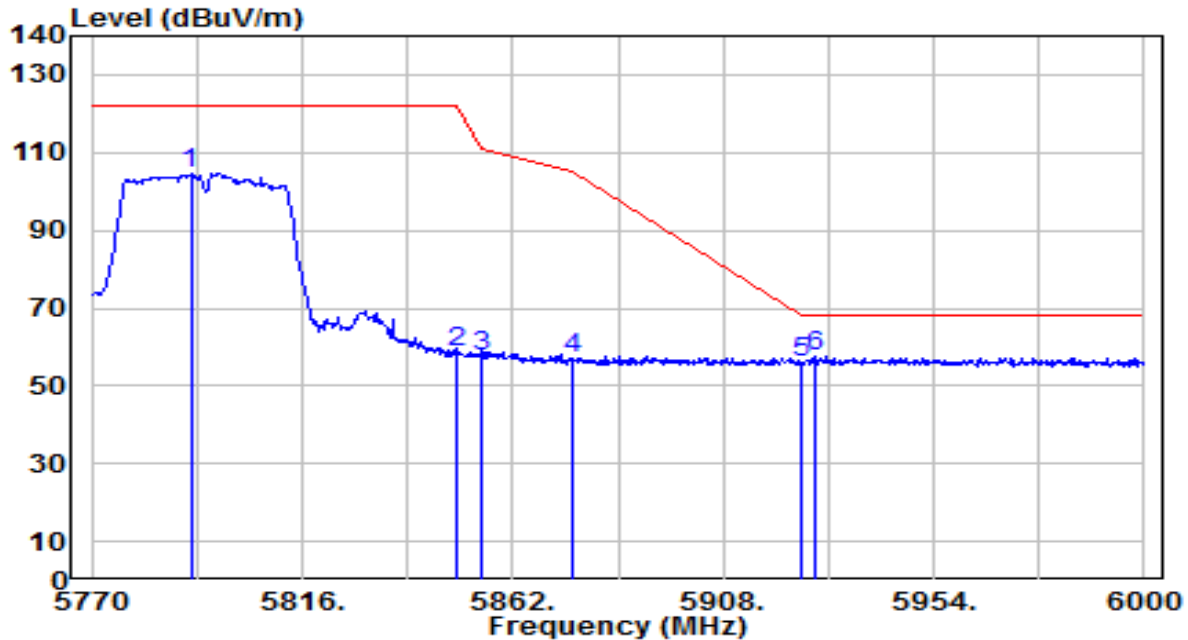


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5791.620        | 98.87          | 5.75       | 104.62               | N/A         | N/A            | 150         | 270         | Peak              |
| 2  | 5850.000        | 53.38          | 5.50       | 58.88                | -63.32      | 122.20         | 150         | 270         | Peak              |
| 3  | 5855.000        | 52.20          | 5.50       | 57.70                | -53.10      | 110.80         | 150         | 270         | Peak              |
| 4  | 5875.000        | 51.78          | 5.48       | 57.26                | -47.94      | 105.20         | 150         | 270         | Peak              |
| 5  | 5925.000        | 50.64          | 5.55       | 56.19                | -12.01      | 68.20          | 150         | 270         | Peak              |
| 6  | * 5928.240      | 52.05          | 5.57       | 57.61                | -10.59      | 68.20          | 150         | 270         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11n-40MHz_TX_Band4_CH 159_ANT 0 | Test Voltage         | AC 120V/60Hz |

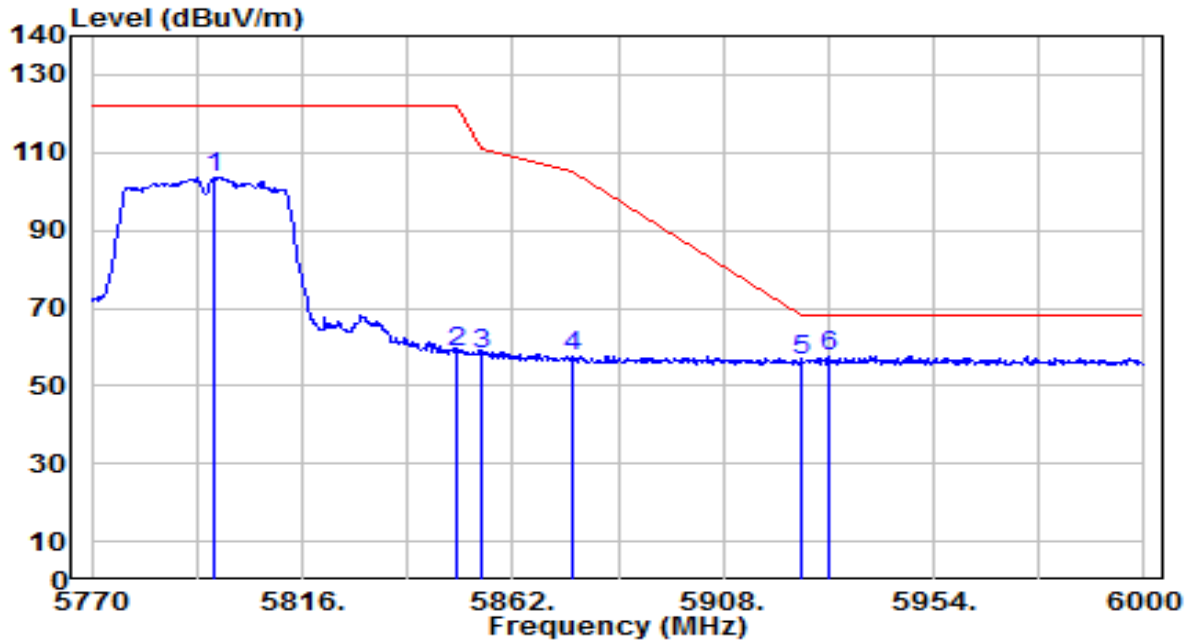


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5796.680        | 97.80          | 5.77       | 103.57               | N/A         | N/A            | 175         | 230         | Peak              |
| 2  | 5850.000        | 52.99          | 5.50       | 58.49                | -63.71      | 122.20         | 175         | 230         | Peak              |
| 3  | 5855.000        | 52.62          | 5.50       | 58.12                | -52.68      | 110.80         | 175         | 230         | Peak              |
| 4  | 5875.000        | 52.15          | 5.48       | 57.62                | -47.58      | 105.20         | 175         | 230         | Peak              |
| 5  | 5925.000        | 50.85          | 5.55       | 56.40                | -11.80      | 68.20          | 175         | 230         | Peak              |
| 6  | * 5931.000      | 52.22          | 5.58       | 57.80                | -10.40      | 68.20          | 175         | 230         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ANT 0 | Test Voltage         | AC 120V/60Hz |

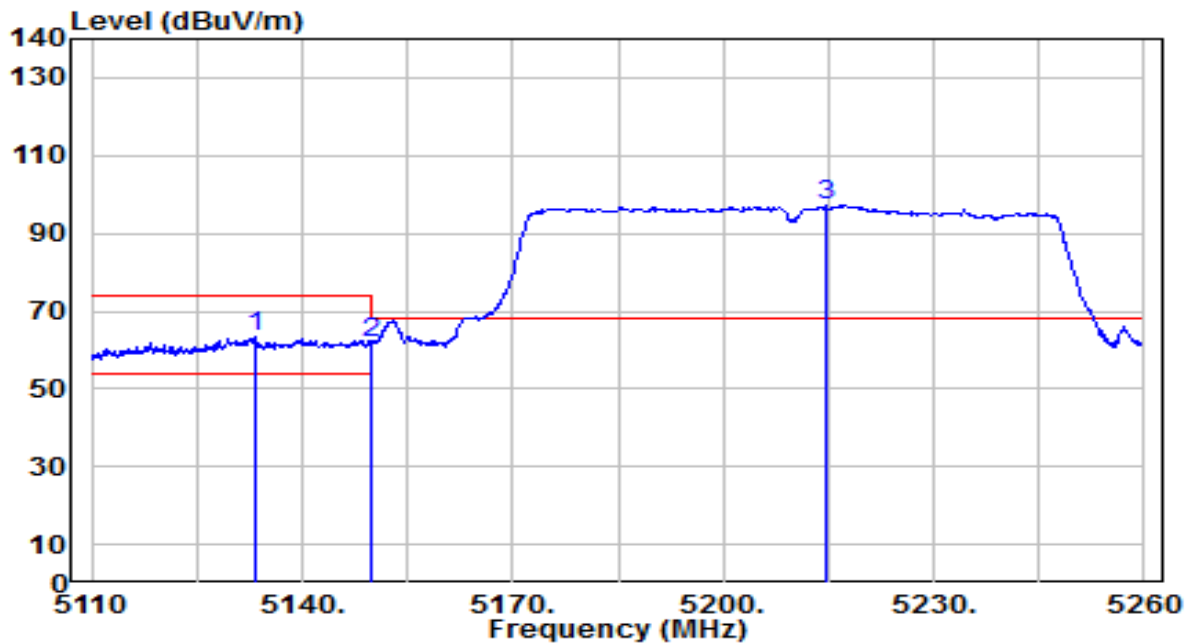


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5133.250        | 59.53          | 4.02       | 63.55                | -10.45      | 74.00          | 165         | 170         | Peak              |
| 2  |   | 5150.000        | 57.83          | 3.98       | 61.81                | -12.19      | 74.00          | 165         | 170         | Peak              |
| 3  |   | 5214.700        | 93.43          | 3.93       | 97.36                | N/A         | N/A            | 165         | 170         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ANT 0 | Test Voltage         | AC 120V/60Hz |

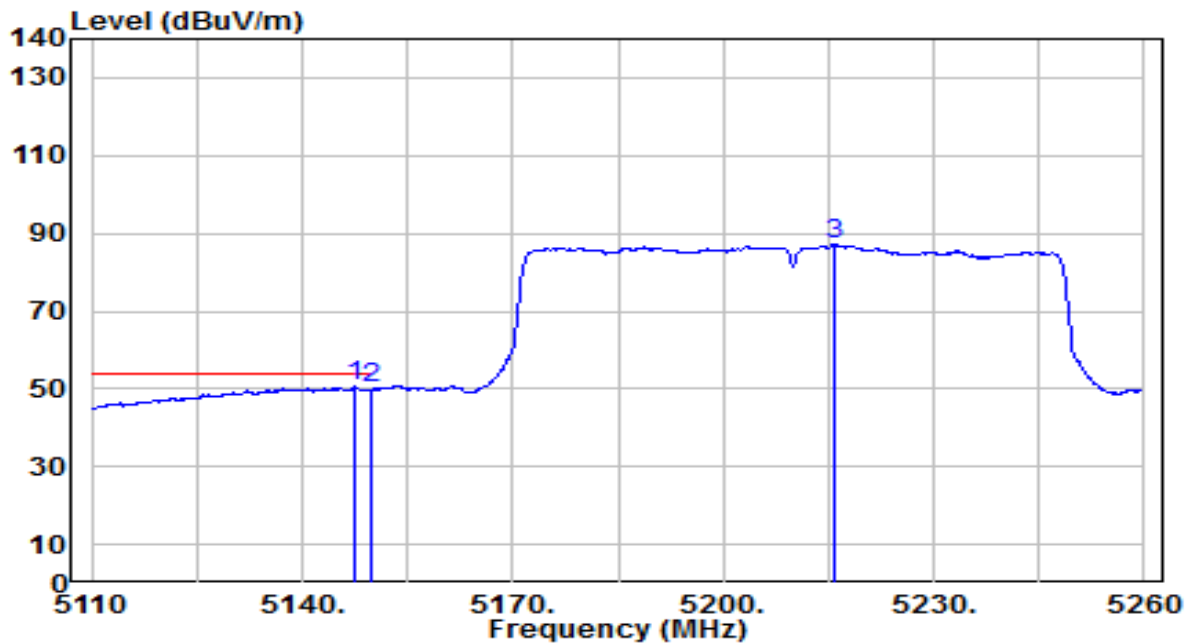


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5147.500        | 46.58          | 3.98       | 50.56                | -3.44       | 54.00          | 165         | 170         | Average           |
| 2  |   | 5150.000        | 46.00          | 3.98       | 49.98                | -4.02       | 54.00          | 165         | 170         | Average           |
| 3  |   | 5215.900        | 83.27          | 3.93       | 87.21                | N/A         | N/A            | 165         | 170         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ANT 0 | Test Voltage         | AC 120V/60Hz |

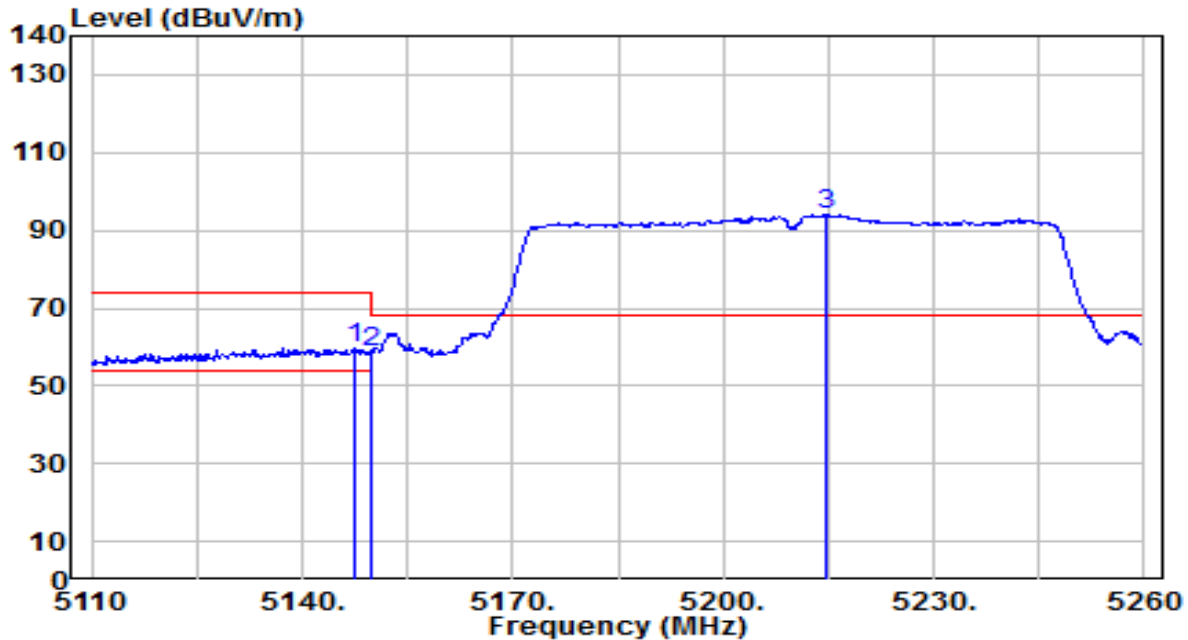


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5147.650        | 55.74          | 3.98       | 59.73                | -14.27      | 74.00          | 165         | 150         | Peak              |
| 2  |   | 5150.000        | 54.74          | 3.98       | 58.72                | -15.28      | 74.00          | 165         | 150         | Peak              |
| 3  |   | 5214.850        | 90.37          | 3.93       | 94.29                | N/A         | N/A            | 165         | 150         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-11   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ANT 0 | Test Voltage         | AC 120V/60Hz |

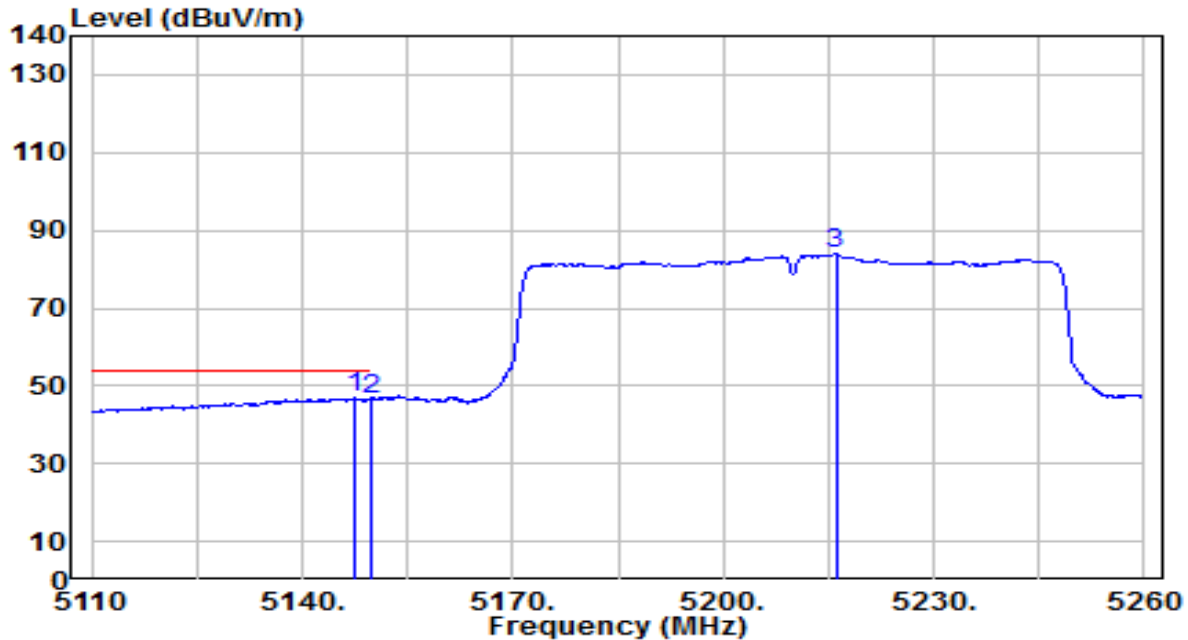


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5147.500        | 42.87          | 3.98       | 46.86                | -7.14       | 54.00          | 165         | 150         | Average           |
| 2  |   | 5150.000        | 42.67          | 3.98       | 46.65                | -7.35       | 54.00          | 165         | 150         | Average           |
| 3  |   | 5216.050        | 80.11          | 3.93       | 84.05                | N/A         | N/A            | 165         | 150         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ANT 0 | Test Voltage         | AC 120V/60Hz |

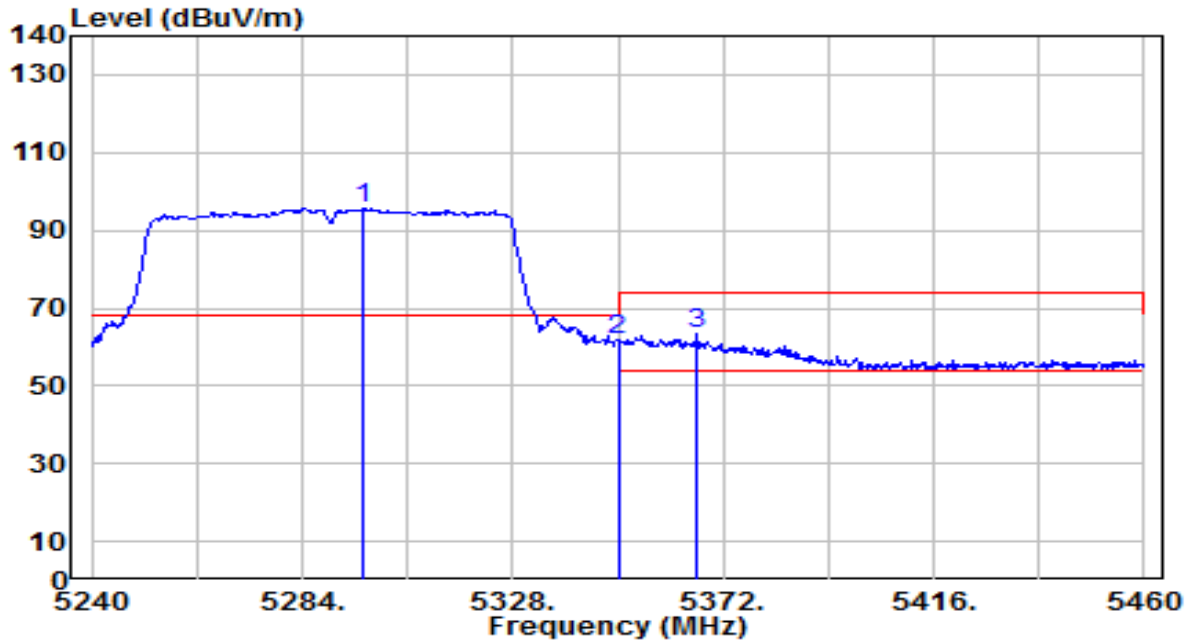


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5296.760        | 91.69          | 3.92       | 95.61                | N/A         | N/A            | 295         | 175         | Peak              |
| 2  | * 5350.000      | 58.19          | 3.78       | 61.98                | -6.22       | 68.20          | 295         | 175         | Peak              |
| 3  | 5366.500        | 59.47          | 3.74       | 63.21                | -10.79      | 74.00          | 295         | 175         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ANT 0 | Test Voltage         | AC 120V/60Hz |

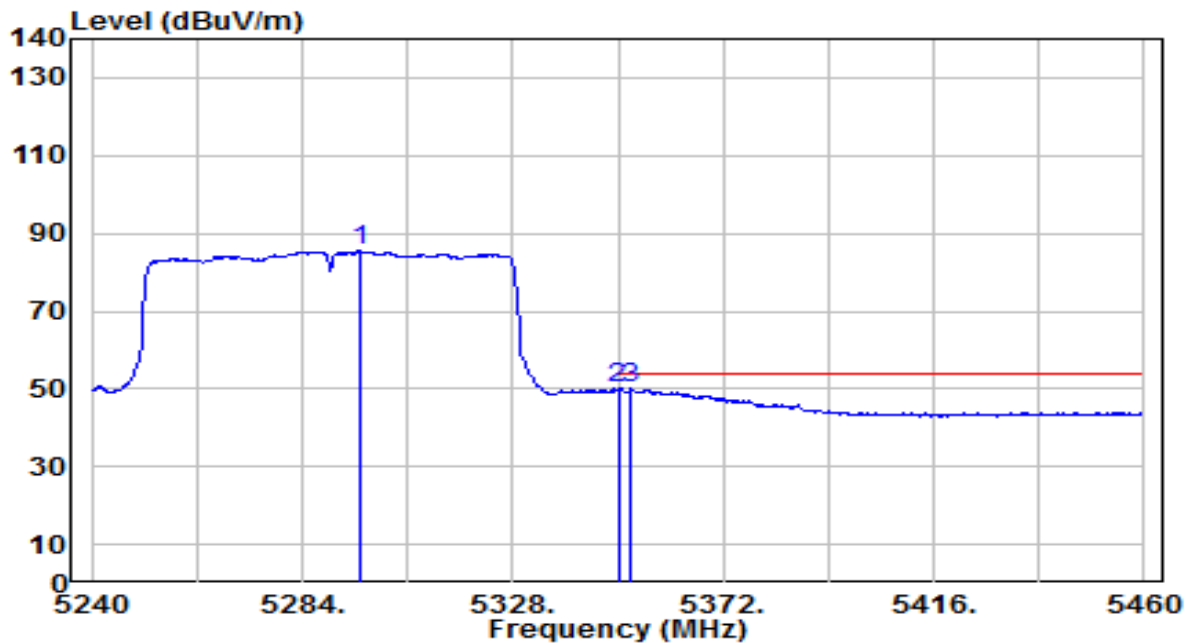


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5295.880        | 81.65          | 3.92       | 85.57                | N/A         | N/A            | 295         | 175         | Average           |
| 2  | * 5350.000      | 46.33          | 3.78       | 50.11                | -3.89       | 54.00          | 295         | 175         | Average           |
| 3  | 5352.860        | 46.19          | 3.78       | 49.97                | -4.03       | 54.00          | 295         | 175         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ANT 0 | Test Voltage         | AC 120V/60Hz |

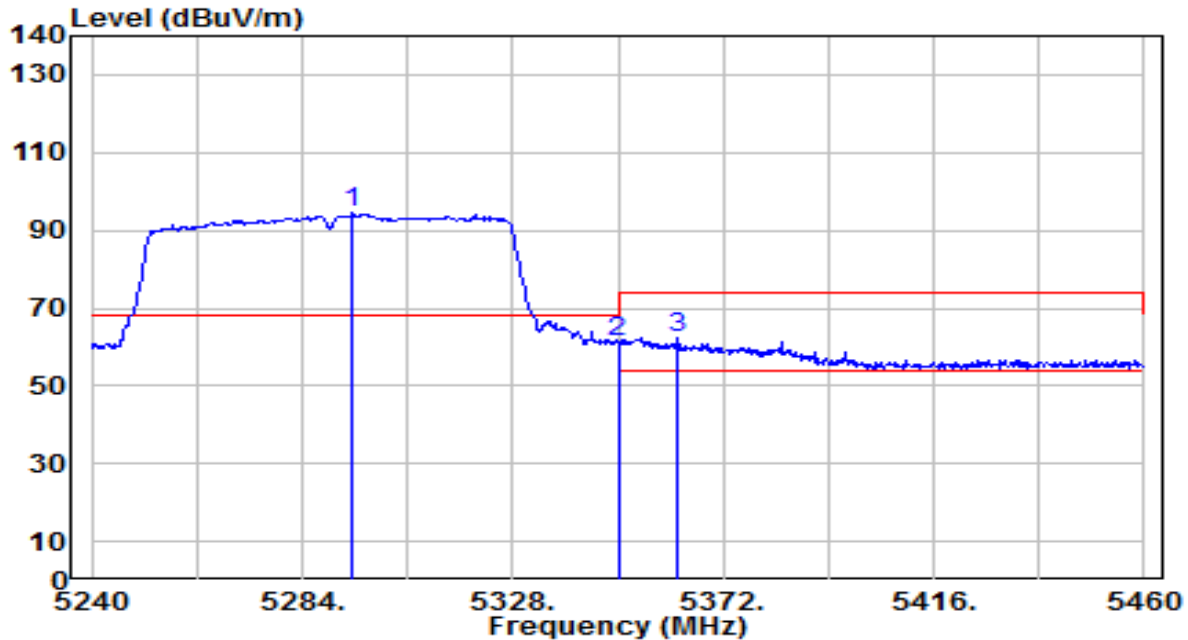


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5294.340        | 90.83          | 3.93       | 94.76                | N/A         | N/A            | 155         | 145         | Peak              |
| 2  | * 5350.000      | 57.41          | 3.78       | 61.20                | -7.00       | 68.20          | 155         | 145         | Peak              |
| 3  | 5362.540        | 58.58          | 3.75       | 62.34                | -11.66      | 74.00          | 155         | 145         | Peak              |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                        | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                             | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ANT 0 | Test Voltage         | AC 120V/60Hz |

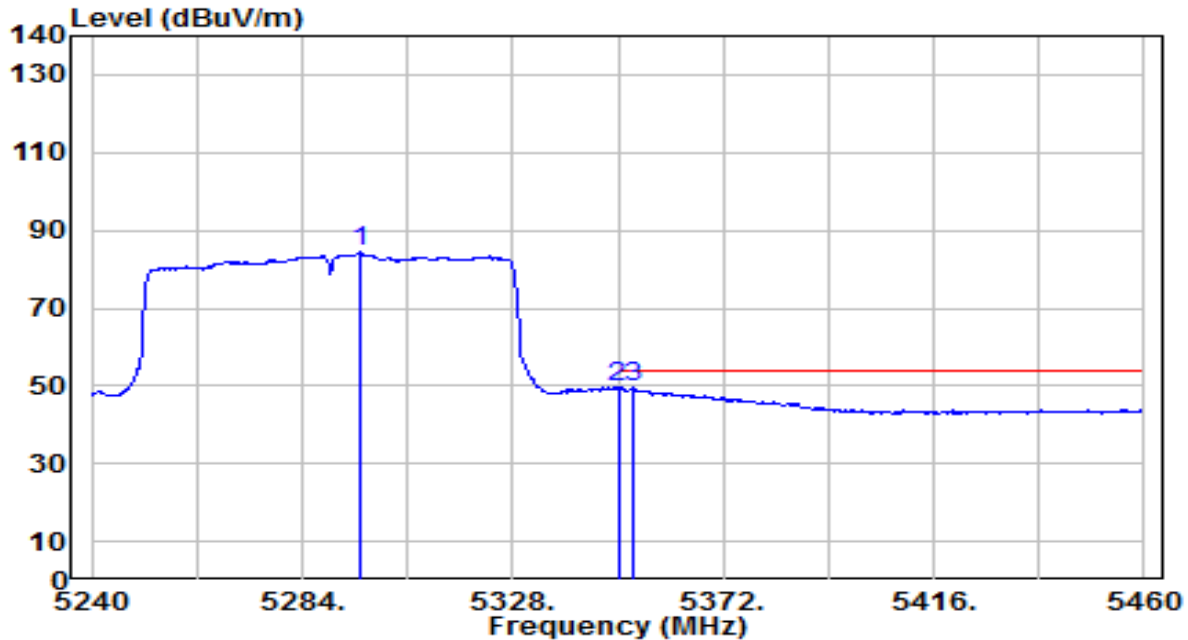


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5295.880        | 80.37          | 3.92       | 84.29                | N/A         | N/A            | 155         | 145         | Average           |
| 2  | * 5350.000      | 46.03          | 3.78       | 49.81                | -4.19       | 54.00          | 155         | 145         | Average           |
| 3  | 5353.080        | 45.64          | 3.77       | 49.42                | -4.58       | 54.00          | 155         | 145         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                      |                      |              |
|-----------|--------------------------------------|----------------------|--------------|
| EUT       | POS Terminal                         | Date of Test         | 2026-06-12   |
| Factor    | DRH18-E                              | Temp. / Humidity     | 25°C /41%    |
| Polarity  | Horizontal                           | Site / Test Engineer | AC1 / James  |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 106_ANT 0 | Test Voltage         | AC 120V/60Hz |

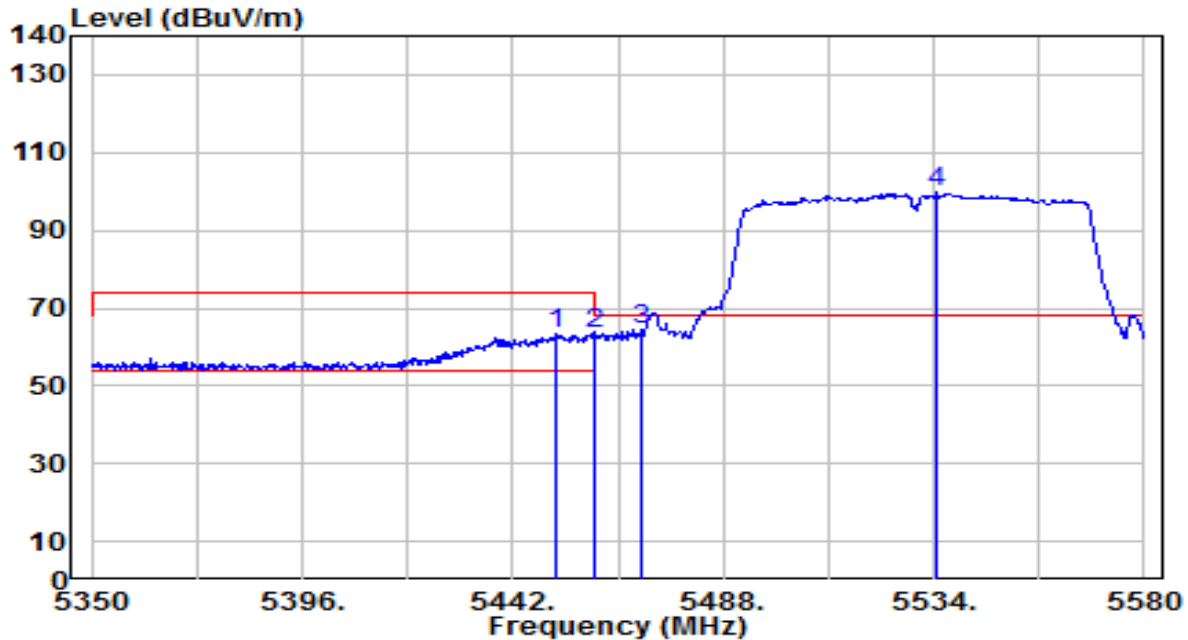

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5451.660        | 59.05          | 4.25       | 63.30                | -10.70      | 74.00          | 250         | 240         | Peak              |
| 2  | 5460.000        | 59.02          | 4.33       | 63.35                | -4.85       | 68.20          | 250         | 240         | Peak              |
| 3  | * 5470.000      | 60.15          | 4.44       | 64.58                | -3.62       | 68.20          | 250         | 240         | Peak              |
| 4  | 5534.690        | 94.74          | 5.10       | 99.84                | N/A         | N/A            | 250         | 240         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.