


EUT	POS Terminal	Date of Test	2026-06-12
Factor	DRH18-E	Temp. / Humidity	25°C /41%
Polarity	Horizontal	Site / Test Engineer	AC1 / James
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0	Test Voltage	AC 120V/60Hz

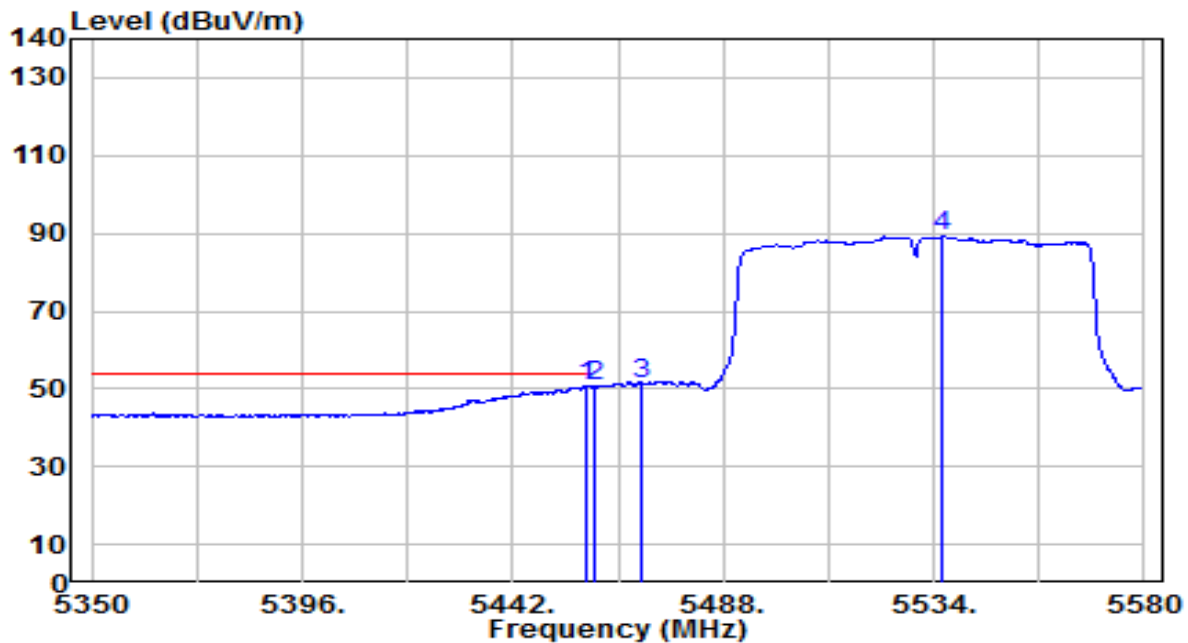


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.870	46.35	4.31	50.66	-3.34	54.00	250	240	Average
2	* 5460.000	46.46	4.33	50.79	-3.21	54.00	250	240	Average
3	5470.000	46.98	4.44	51.42	N/A	N/A	250	240	Average
4	5535.840	84.36	5.11	89.47	N/A	N/A	250	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	POS Terminal	Date of Test	2026-06-12
Factor	DRH18-E	Temp. / Humidity	25°C /41%
Polarity	Vertical	Site / Test Engineer	AC1 / James
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0	Test Voltage	AC 120V/60Hz

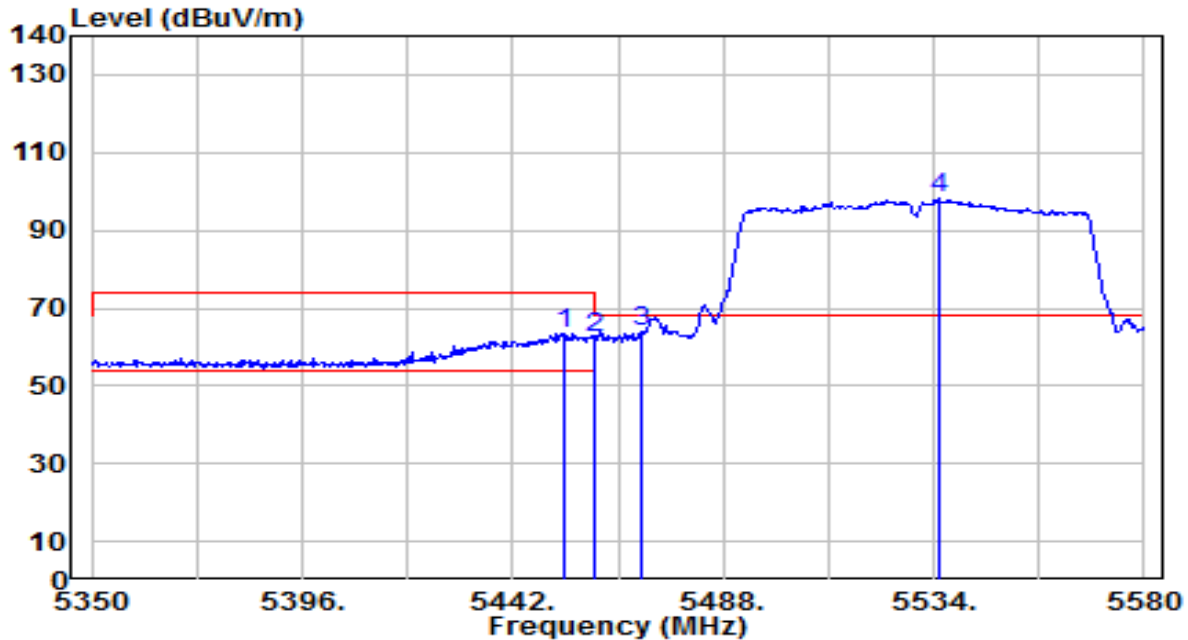


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.040	59.35	4.26	63.61	-10.39	74.00	145	145	Peak
2	5460.000	57.96	4.33	62.29	-5.91	68.20	145	145	Peak
3	* 5470.000	59.61	4.44	64.05	-4.15	68.20	145	145	Peak
4	5535.150	92.94	5.11	98.04	N/A	N/A	145	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	POS Terminal	Date of Test	2026-06-12
Factor	DRH18-E	Temp. / Humidity	25°C /41%
Polarity	Vertical	Site / Test Engineer	AC1 / James
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0	Test Voltage	AC 120V/60Hz

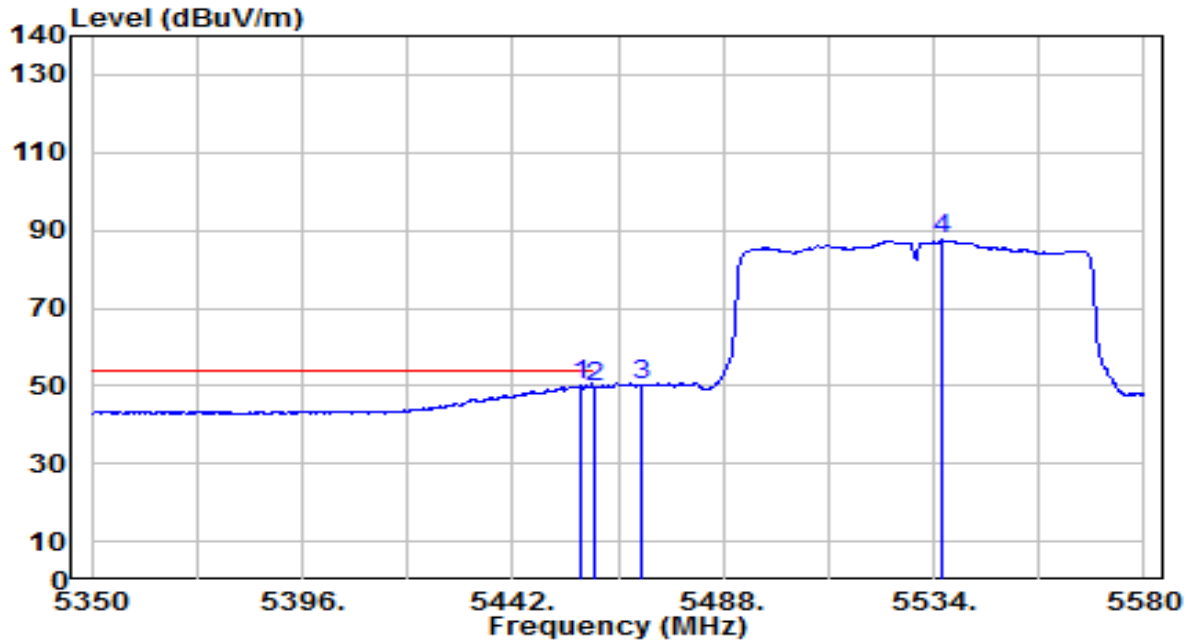


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5456.720	45.68	4.30	49.98	-4.02	54.00	145	145	Average
2	5460.000	45.45	4.33	49.78	-4.22	54.00	145	145	Average
3	5470.000	45.67	4.44	50.11	N/A	N/A	145	145	Average
4	5536.070	82.44	5.11	87.55	N/A	N/A	145	145	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	POS Terminal	Date of Test	2026-06-12
Factor	DRH18-E	Temp. / Humidity	25°C /41%
Polarity	Horizontal	Site / Test Engineer	AC1 / James
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

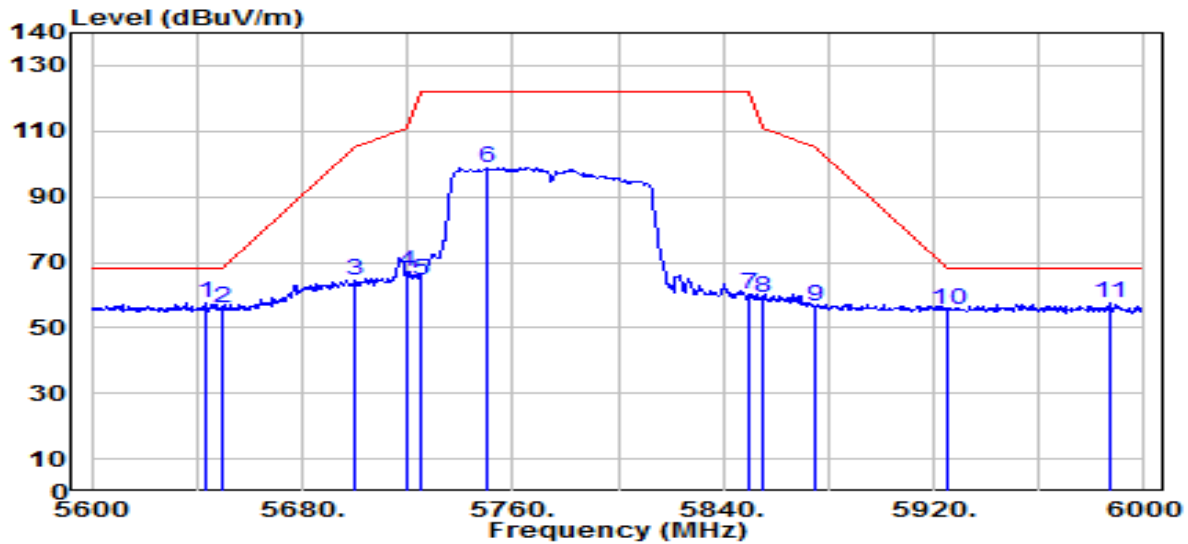


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.200	52.28	5.44	57.73	-10.47	68.20	175	270	Peak
2		5650.000	50.44	5.44	55.88	-12.32	68.20	175	270	Peak
3		5700.000	58.68	5.58	64.26	-40.94	105.20	175	270	Peak
4		5720.000	61.59	5.59	67.18	-43.62	110.80	175	270	Peak
5		5725.000	59.00	5.59	64.59	-57.61	122.20	175	270	Peak
6		5750.400	93.44	5.60	99.04	N/A	N/A	175	270	Peak
7		5850.000	54.55	5.50	60.05	-62.15	122.20	175	270	Peak
8		5855.000	53.52	5.50	59.02	-51.78	110.80	175	270	Peak
9		5875.000	51.28	5.48	56.76	-48.44	105.20	175	270	Peak
10		5925.000	50.02	5.55	55.57	-12.63	68.20	175	270	Peak
11		5986.800	51.91	5.45	57.36	-10.84	68.20	175	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	POS Terminal	Date of Test	2026-06-12
Factor	DRH18-E	Temp. / Humidity	25°C /41%
Polarity	Vertical	Site / Test Engineer	AC1 / James
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

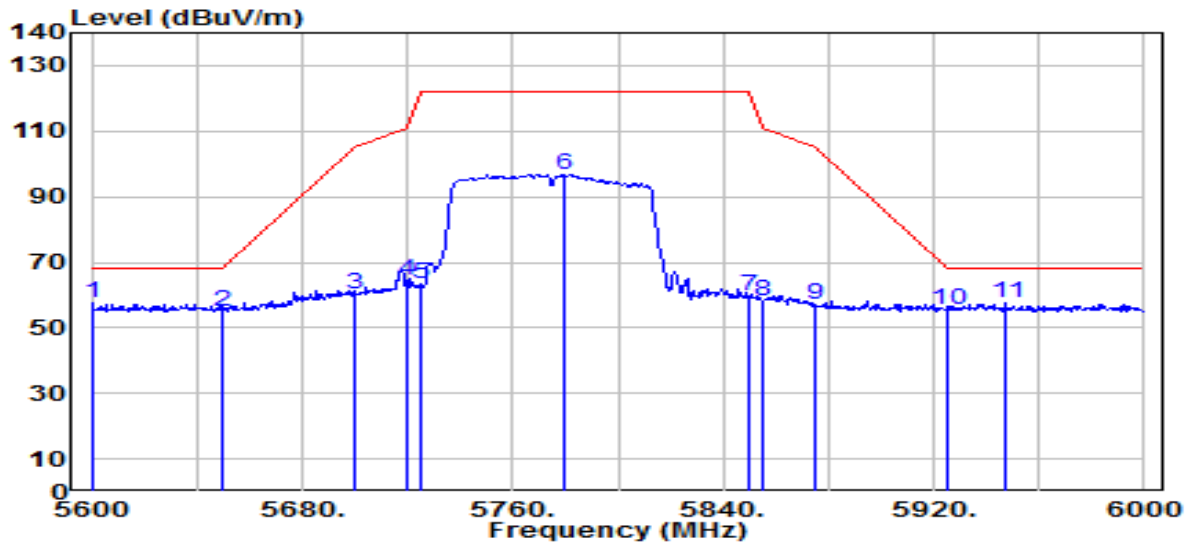


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5600.000	52.03	5.47	57.50	-10.70	68.20	170	230	Peak
2		5650.000	49.72	5.44	55.16	-13.04	68.20	170	230	Peak
3		5700.000	54.66	5.58	60.24	-44.96	105.20	170	230	Peak
4		5720.000	58.68	5.59	64.27	-46.53	110.80	170	230	Peak
5		5725.000	57.74	5.59	63.33	-58.87	122.20	170	230	Peak
6		5780.000	91.18	5.71	96.89	N/A	N/A	170	230	Peak
7		5850.000	54.00	5.50	59.50	-62.70	122.20	170	230	Peak
8		5855.000	52.51	5.50	58.01	-52.79	110.80	170	230	Peak
9		5875.000	51.69	5.48	57.17	-48.03	105.20	170	230	Peak
10		5925.000	49.96	5.55	55.51	-12.69	68.20	170	230	Peak
11		5947.600	51.75	5.65	57.40	-10.80	68.20	170	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

A.9 AC Conducted Emissions Test Result

EUT	POS Terminal	Date of Test	2026-06-02
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /49%
Polarity	Line1	Site / Test Engineer	SR2 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

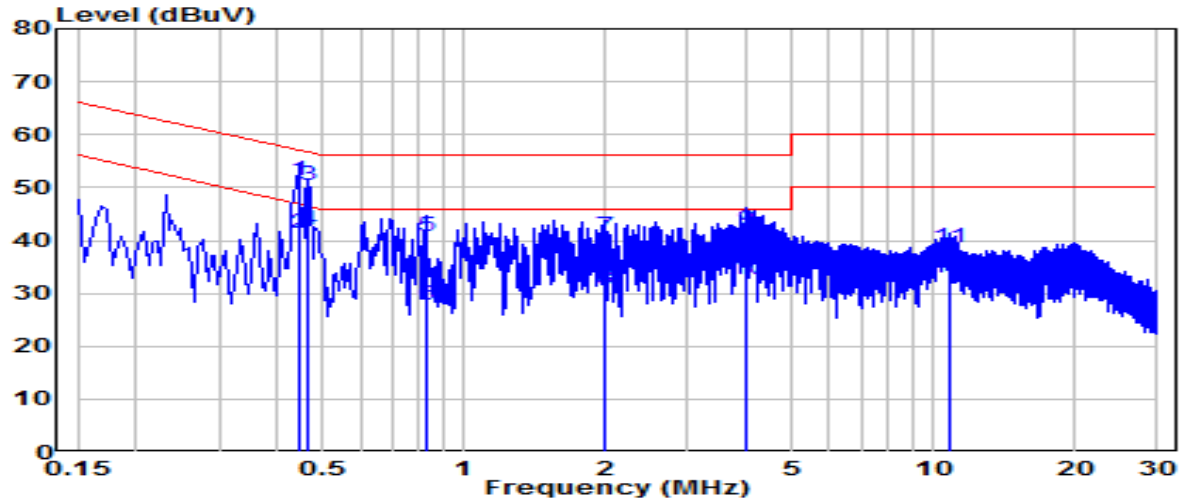


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.442	41.64	9.64	51.28	-5.73	57.02	QP
2	0.442	31.68	9.64	41.32	-5.70	47.02	Average
3	* 0.465	40.78	9.64	50.42	-6.18	56.60	QP
4	* 0.465	32.32	9.64	41.96	-4.65	46.60	Average
5	0.829	31.07	9.66	40.72	-15.28	56.00	QP
6	0.829	18.24	9.66	27.90	-18.10	46.00	Average
7	2.004	31.10	9.70	40.80	-15.20	56.00	QP
8	2.004	21.15	9.70	30.85	-15.15	46.00	Average
9	4.015	32.19	9.75	41.94	-14.06	56.00	QP
10	4.015	22.80	9.75	32.55	-13.45	46.00	Average
11	10.769	28.78	9.87	38.65	-21.35	60.00	QP
12	10.769	22.94	9.87	32.80	-17.20	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	POS Terminal	Date of Test	2026-06-02
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /49%
Polarity	Neutral	Site / Test Engineer	SR2 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

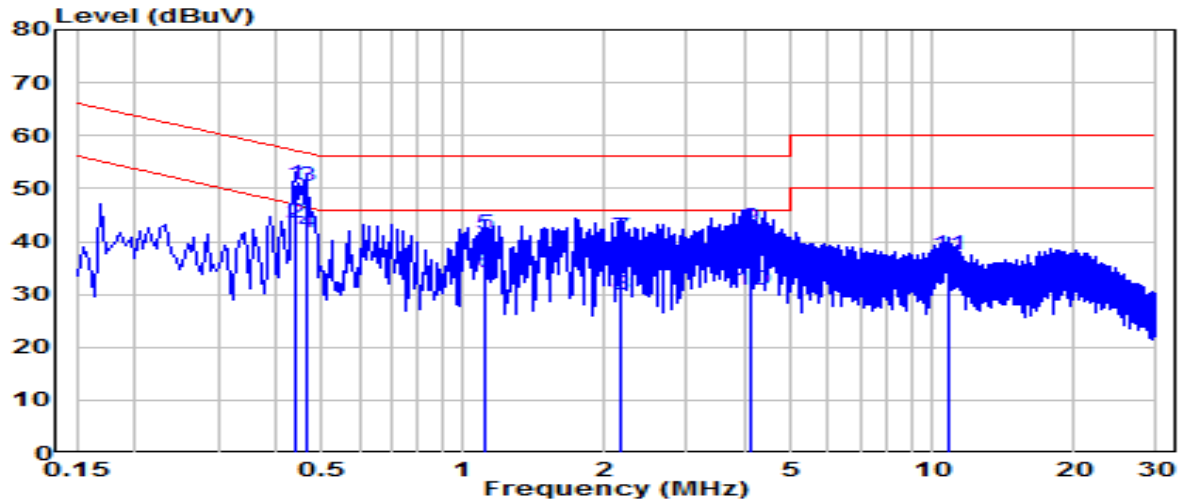

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.438	41.11	9.64	50.76	-6.34	57.10	QP
2	*	0.438	33.97	9.64	43.61	-3.49	47.10	Average
3		0.465	40.66	9.64	50.31	-6.30	56.60	QP
4		0.465	32.01	9.64	41.65	-4.95	46.60	Average
5		1.108	31.78	9.67	41.46	-14.54	56.00	QP
6		1.108	24.35	9.67	34.02	-11.98	46.00	Average
7		2.152	31.09	9.69	40.78	-15.22	56.00	QP
8		2.152	20.24	9.69	29.94	-16.06	46.00	Average
9		4.110	32.73	9.75	42.48	-13.52	56.00	QP
10		4.110	21.13	9.75	30.88	-15.12	46.00	Average
11		10.769	27.59	9.88	37.47	-22.53	60.00	QP
12		10.769	21.33	9.88	31.21	-18.79	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

Appendix B - Test Setup Photograph

Refer to 2605TW8704-UT" file.

Appendix C - External Photograph

Refer to "2605TW8704-UE" file.

Appendix D - Internal Photograph

Refer to "2605TW8704-UI" file.

_____ The End _____