

Partial FCC Test Report (Part 90 – LTE B26)

Report No.: RFBBGM-WTW-P22110832-3

FCC ID: WIYSLM500QA

Test Model: SLM500

Received Date: Nov. 30, 2022

Test Date: Dec. 28, 2022 ~ Jan. 11, 2023

Issued Date: Mar. 14, 2023

Applicant: CASTLES TECHNOLOGY CO., LTD.

Address: 6F, NO. 207-5, SEC. 3, BEIXIN RD., XINDIAN DISTRICT, NEW TAIPEI CITY 23143, TAIWAN (R. O. C.)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN

FCC Registration / 788550 / TW0003
Designation Number:



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments.....	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units.....	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	11
3.5 General Description of Applied Standards and References	11
4 Test Types and Results	12
4.1 Output Power Measurement	12
4.1.1 Limits of Output Power Measurement.....	12
4.1.2 Test Procedures.....	12
4.1.3 Test Setup.....	12
4.1.4 Test Results	13
4.2 Radiated Emission Measurement	17
4.2.1 Limits of Radiated Emission Measurement.....	17
4.2.2 Test Procedure	17
4.2.3 Deviation from Test Standard	17
4.2.4 Test Setup.....	18
4.2.5 Test Results	19
5 Pictures of Test Arrangements.....	26
Appendix – Information of the Testing Laboratories	27

Release Control Record

Issue No.	Description	Date Issued
RFBBGM-WTW-P22110832-3	Original release	Mar. 14, 2023

1 Certificate of Conformity

Product: Smart module

Brand:  **CASTLES**
TECHNOLOGY

Test Model: SLM500

Sample Status: Identical Prototype

Applicant: CASTLES TECHNOLOGY CO., LTD.

Test Date: Dec. 28, 2022 ~ Jan. 11, 2023

Standards: FCC Part 90, Subpart I, S

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Mar. 14, 2023
Celine Chou / Senior Specialist

Approved by : Jeremy Lin , **Date:** Mar. 14, 2023
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1055 90.213	Frequency Stability	N/A	Refer to Note
2.1049 90.209	Occupied Bandwidth	N/A	Refer to Note
90.691	Emission Mask	N/A	Refer to Note
2.1051 90.691	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -30.59dB at 1629.40MHz.

Note:

1. This report is a Class II change partial report. Therefore, only test item of Radiated Spurious Emissions tests and Effective Radiated Power were performed for this report. Other testing data please refer to SGS report no.: SZCR210300003007 (Smart module, Brand: Meig Link, Model: SLM500, FCC ID: 2APJ4-SLM500).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.44 dB
	30MHz ~ 200MHz	2.93 dB
	200MHz ~ 1000MHz	2.95 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 27, 2022	Apr. 26, 2023
Signal Analyzer Agilent	N9010A	MY52220207	Jan. 06, 2022	Jan. 05, 2023
			Jan. 03, 2023	Jan. 02, 2024
Loop Antenna TESEQ	HLA 6121	45745	Jul. 27, 2022	Jul. 26, 2023
Pre-amplifier EMCI	EMC001340	980201	Sep. 23, 2022	Sep. 22, 2023
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	Jan. 15, 2022	Jan. 14, 2023
Preamplifier EMCI	EMC 330H	980112	Oct. 01, 2022	Sep. 30, 2023
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Oct. 21, 2022	Oct. 20, 2023
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 01, 2022	Sep. 30, 2023
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 13, 2022	Nov. 12, 2023
Preamplifier EMCI	EMC 012645	980115	Oct. 01, 2022	Sep. 30, 2023
RF Coaxial Cable EMCI	EMC104-SM-SM-8 000	171005	Oct. 01, 2022	Sep. 30, 2023
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140 807)	Oct. 01, 2022	Sep. 30, 2023
RF FLITER MICRO-TRONICS	BRM50716	060	Jan. 10, 2022	Jan. 09, 2023
			Jan. 11, 2023	Jan. 10, 2024
RF FLITER MICRO-TRONICS	BRM17690	004	Jan. 10, 2022	Jan. 09, 2023
			Jan. 11, 2023	Jan. 10, 2024
Pre-Amplifier EMCI	EMC 184045	980116	Oct. 01, 2022	Sep. 30, 2023
Broadband Horn Antenna SCHWARZBECK	BBHA 9170	148	Nov. 13, 2022	Nov. 12, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM-6 00	150928	Jul. 09, 2022	Jul. 08, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM-3 000	150929	Jul. 09, 2022	Jul. 08, 2023
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower Max-Full	MFA-440H	AT93021705	NA	NA
Turn Table Max-Full	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller Max-Full	MF-7802	NA	NA	NA
Boresight antenna tower fixture BV	BAF-02	7	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 26, 2021	Aug. 22, 2023

Note: 1. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HY - 966 chamber 5.

3 General Information

3.1 General Description of EUT

Product	Smart module		
Brand			
Test Model	SLM500		
Sample Status	Identical Prototype		
Power Supply Rating	3.55-4.40Vdc		
Modulation Type	QPSK, 16QAM		
Operating Frequency	LTE Band 26 (Channel Bandwidth 1.4MHz)	814.7MHz ~ 823.3MHz	
	LTE Band 26 (Channel Bandwidth 3MHz)	815.5MHz ~ 822.5MHz	
	LTE Band 26 (Channel Bandwidth 5MHz)	816.5MHz ~ 821.5MHz	
	LTE Band 26 (Channel Bandwidth 10MHz)	819.0MHz	
Max. ERP Power		QPSK	16QAM
	LTE Band 26 (Channel Bandwidth 1.4MHz)	38.548mW (15.86dBm)	29.444mW (14.69dBm)
	LTE Band 26 (Channel Bandwidth 3MHz)	37.931mW (15.79dBm)	27.416mW (14.38dBm)
	LTE Band 26 (Channel Bandwidth 5MHz)	38.459mW (15.85dBm)	27.542mW (14.40dBm)
	LTE Band 26 (Channel Bandwidth 10MHz)	38.459mW (15.85dBm)	27.353mW (14.37dBm)
Antenna Type	Refer to Note as below		
Antenna Connector	Refer to Note as below		
Accessory Device	NA		
Cable Supplied	NA		

Note:

1. The EUT is authorized for use in specific End-product.

Product	Brand	Model
POS Terminal	 CASTLES TECHNOLOGY	SATURN1000MINI

2. The End-product contains following accessory devices.


Part	Brand	Model	Specification
Adapter	 CASTLES TECHNOLOGY	1A52-UB52A	I/P: 100-240Vac, 50-60Hz, 0.3A O/P: 5Vdc, 2A, 10W
Battery	 CASTLES TECHNOLOGY	S1Mini	Rating: 3.7Vdc, 1600mAh, 5.92Wh
USB Cable	CHANG YANG ELECTRON CO.,LTD	CY-AS-HK0059	0.95m shielded cable without core

3. The following antennas were provided to the End-product.


Type	Connector	Gain (dBi)							
		GSM 850	GSM 1900	WCDMA B2	WCDMA B4	WCDMA B5	LTE B2	LTE B4	LTE B5
PIFA	ipex(MHF)	-3.62	-0.95	-0.95	0.56	-3.62	-0.95	0.56	-3.62
		LTE B7	LTE B12	LTE B13	LTE B17	LTE B25	LTE B26 (814-824 MHz)	LTE B26 (824-849 MHz)	LTE B66
		-2.99	-12.50	-5.21	-12.50	-0.95	-4.21	-3.62	0.56

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Configuration of System under Test

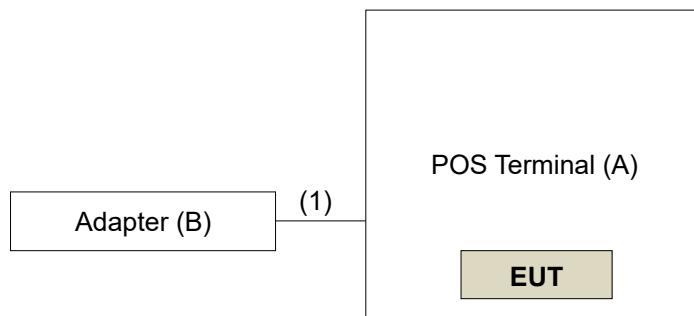

Remote site



3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	POS Terminal	 CASTLES TECHNOLOGY	SATURN1000MINI	NA	NA	Provided by manufacturer
B.	Adapter	 CASTLES TECHNOLOGY	1A52-UB52A	NA	NA	Provided by manufacturer
C.	Radio Communication Analyzer	Anritsu	MT8820C	6201300640	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item C acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Cable	1	0.95	Y	0	Provided by manufacturer

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and XYZ axis. The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
LTE Band 26	Y-Plane

LTE Band 26

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	RB #
-	ERP	26697 to 26783	26697 (814.7MHz), 26740 (819.0MHz), 26783 (823.3MHz)	1.4MHz	QPSK / 16QAM	1 Half Full
		26705 to 26775	26705 (815.5MHz), 26740 (819.0MHz), 26775 (822.5MHz)	3MHz	QPSK / 16QAM	1 Half Full
		26715 to 26765	26715 (816.5MHz), 26740 (819.0MHz), 26765 (821.5MHz)	5MHz	QPSK / 16QAM	1 Half Full
		26740	26740 (819.0MHz)	10MHz	QPSK / 16QAM	1 Half Full
-	Radiated Emission Below 1GHz	26697 to 26783	26697 (814.7MHz)	1.4MHz	QPSK	1
-	Radiated Emission Above 1GHz	26697 to 26783	26697 (814.7MHz), 26740 (819.0MHz), 26783 (823.3MHz)	1.4MHz	QPSK	1
		26715 to 26765	26715 (816.5MHz), 26740 (819.0MHz), 26765 (821.5MHz)	5MHz	QPSK	1
		26740	26740 (819.0MHz)	10MHz	QPSK	1

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25deg. C, 60%RH	120Vac, 60Hz (System)	Willy Cheng
Radiated Emission	24deg. C, 78%RH, 19deg. C, 67%RH	120Vac, 60Hz (System)	Vincent Chen, Thomas Cheng

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 90

ANSI 63.26-2015

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 971168 D02 Misc Rev Approv License Devices v02r01

ANSI/TIA/EIA-603-E 2016

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The output power shall be according to the specific rule Part 90.635 that “Mobile station are limited to 100 watts e.r.p”.

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. The power measurement was performed on emulator and power value was measured from power function on emulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
 (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

LTE Band 26						
BW	MCS Index	RB Size	RB Offset	Mid		
		Channel		26740		
		Frequency (MHz)		819		
10M	QPSK	1	0	22.21		
		1	24	22.14		
		1	49	22.03		
		25	0	21.19		
		25	12	21.14		
		25	25	20.87		
		50	0	20.93		
10M	16QAM	1	0	20.73		
		1	24	20.45		
		1	49	20.57		
		25	0	19.99		
		25	12	20.04		
		25	25	19.69		
		50	0	19.85		
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26715	26740	26765
		Frequency (MHz)		816.5	819	821.5
5M	QPSK	1	0	22.16	22.21	22.21
		1	12	22.17	22.14	22.17
		1	24	21.98	22.03	22.07
		12	0	21.18	21.19	21.23
		12	6	21.12	21.14	21.17
		12	13	20.88	20.87	20.97
		25	0	21.00	20.93	21.02
5M	16QAM	1	0	20.72	20.73	20.76
		1	12	20.46	20.45	20.52
		1	24	20.55	20.57	20.63
		12	0	20.03	19.99	20.09
		12	6	20.10	20.04	20.13
		12	13	19.70	19.69	19.77
		25	0	19.84	19.85	19.88

LTE Band 26						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26705	26740	26775
		Frequency (MHz)		815.5	819	822.5
3M	QPSK	1	0	22.15	22.09	22.06
		1	7	22.03	22.06	22.12
		1	14	21.94	21.90	22.00
		8	0	21.15	21.10	21.13
		8	3	21.02	21.12	21.16
		8	7	20.86	20.85	20.89
		15	0	20.90	20.89	21.02
3M	16QAM	1	0	20.67	20.65	20.74
		1	7	20.43	20.45	20.51
		1	14	20.48	20.43	20.60
		8	0	20.01	19.92	20.01
		8	3	20.05	19.95	20.02
		8	7	19.67	19.56	19.64
		15	0	19.77	19.83	19.85
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26697	26740	26783
		Frequency (MHz)		814.7	819	823.3
1.4M	QPSK	1	0	22.08	22.14	22.09
		1	2	22.01	22.06	22.09
		1	5	21.80	21.99	22.06
		3	0	22.01	22.18	22.22
		3	1	21.89	22.14	22.17
		3	3	21.84	21.80	21.96
		6	0	20.82	20.90	21.00
1.4M	16QAM	1	0	20.66	20.62	20.61
		1	2	20.34	20.45	20.39
		1	5	20.46	20.56	20.57
		3	0	20.95	20.86	21.05
		3	1	20.93	20.92	20.99
		3	3	20.60	20.60	20.73
		6	0	19.70	19.81	19.78

ERP Power (dBm)

LTE Band 26						
BW	MCS Index	RB Size	RB Offset	Mid		
		Channel		26740		
		Frequency (MHz)		819		
10M	QPSK	1	0	15.85		
		1	24	15.78		
		1	49	15.67		
		25	0	14.83		
		25	12	14.78		
		25	25	14.51		
		50	0	14.57		
10M	16QAM	1	0	14.37		
		1	24	14.09		
		1	49	14.21		
		25	0	13.63		
		25	12	13.68		
		25	25	13.33		
		50	0	13.49		
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26715	26740	26765
		Frequency (MHz)		816.5	819	821.5
5M	QPSK	1	0	15.80	15.85	15.85
		1	12	15.81	15.78	15.81
		1	24	15.62	15.67	15.71
		12	0	14.82	14.83	14.87
		12	6	14.76	14.78	14.81
		12	13	14.52	14.51	14.61
		25	0	14.64	14.57	14.66
5M	16QAM	1	0	14.36	14.37	14.40
		1	12	14.10	14.09	14.16
		1	24	14.19	14.21	14.27
		12	0	13.67	13.63	13.73
		12	6	13.74	13.68	13.77
		12	13	13.34	13.33	13.41
		25	0	13.48	13.49	13.52

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

LTE Band 26						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26705	26740	26775
		Frequency (MHz)		815.5	819	822.5
3M	QPSK	1	0	15.79	15.73	15.70
		1	7	15.67	15.70	15.76
		1	14	15.58	15.54	15.64
		8	0	14.79	14.74	14.77
		8	3	14.66	14.76	14.80
		8	7	14.50	14.49	14.53
		15	0	14.54	14.53	14.66
3M	16QAM	1	0	14.31	14.29	14.38
		1	7	14.07	14.09	14.15
		1	14	14.12	14.07	14.24
		8	0	13.65	13.56	13.65
		8	3	13.69	13.59	13.66
		8	7	13.31	13.20	13.28
		15	0	13.41	13.47	13.49
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		26697	26740	26783
		Frequency (MHz)		814.7	819	823.3
1.4M	QPSK	1	0	15.72	15.78	15.73
		1	2	15.65	15.70	15.73
		1	5	15.44	15.63	15.70
		3	0	15.65	15.82	15.86
		3	1	15.53	15.78	15.81
		3	3	15.48	15.44	15.60
		6	0	14.46	14.54	14.64
1.4M	16QAM	1	0	14.30	14.26	14.25
		1	2	13.98	14.09	14.03
		1	5	14.10	14.20	14.21
		3	0	14.59	14.50	14.69
		3	1	14.57	14.56	14.63
		3	3	14.24	14.24	14.37
		6	0	13.34	13.45	13.42

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm .

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz . The limit of emissions is equal to -40 dBm .

4.2.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7.
 $\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log (D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 $\text{ERP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log (D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

For radiated emission 30MHz to 1GHz

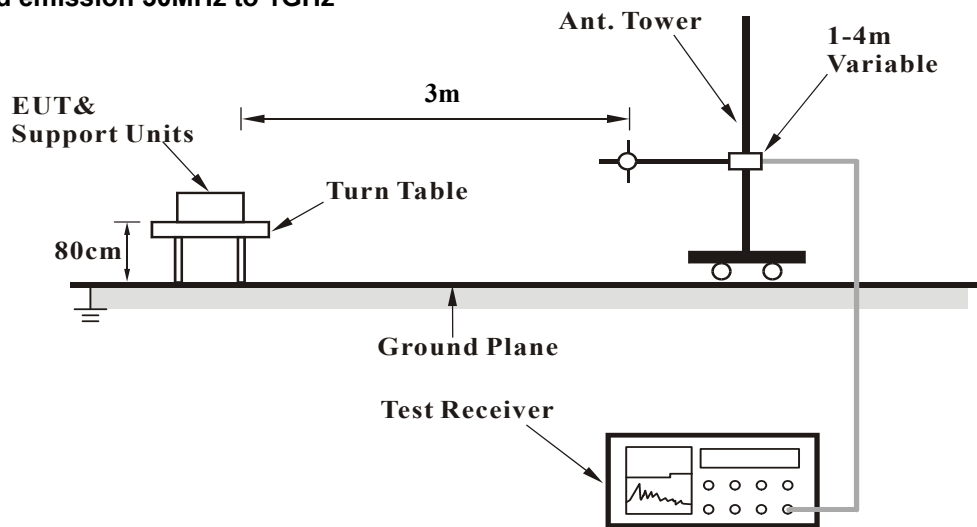

For radiated emission above 1GHz

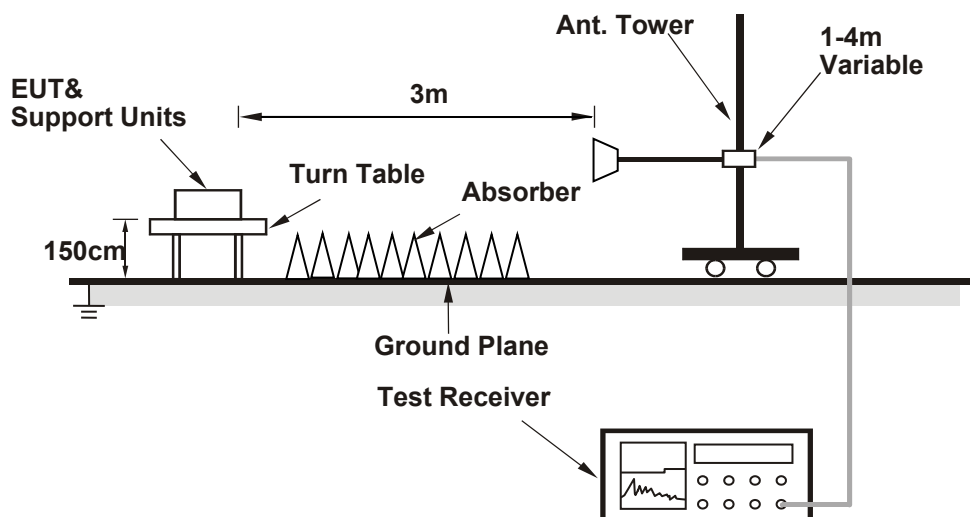

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

Below 1GHz


LTE Band 26, Channel Bandwidth 1.4MHz

Mode	TX channel 26697 (814.7MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	24deg. C, 78%RH	Input Power	120Vac, 60Hz (System)
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	82.38	-56.31	-13.00	-43.31	2.00 H	216	58.42	-114.73
2	114.39	-58.30	-13.00	-45.30	1.50 H	203	53.91	-112.21
3	204.60	-58.18	-13.00	-45.18	2.00 H	272	54.92	-113.10
4	481.05	-64.31	-13.00	-51.31	1.50 H	341	40.47	-104.78
5	811.82	-58.38	-13.00	-45.38	1.50 H	340	40.60	-98.98
6	906.88	-57.71	-13.00	-44.71	2.00 H	298	40.64	-98.35

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

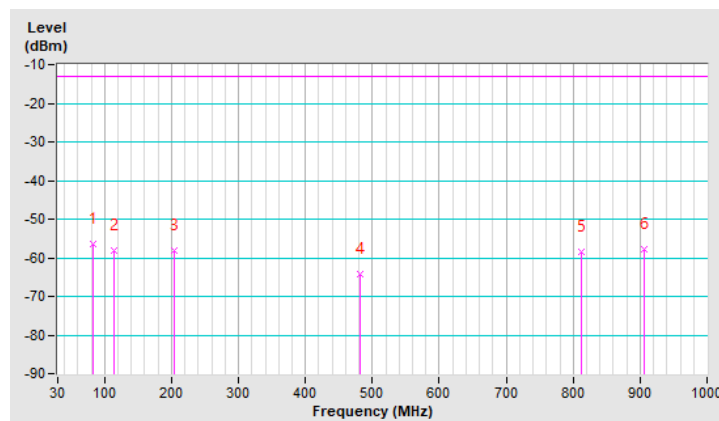


Mode	TX channel 26697 (814.7MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	24deg. C, 78%RH	Input Power	120Vac, 60Hz (System)
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	-52.24	-13.00	-39.24	1.00 V	103	57.50	-109.74
2	82.38	-51.10	-13.00	-38.10	1.50 V	130	63.63	-114.73
3	206.54	-57.28	-13.00	-44.28	1.50 V	348	55.80	-113.08
4	302.57	-59.42	-13.00	-46.42	2.00 V	149	49.68	-109.10
5	570.29	-62.43	-13.00	-49.43	1.50 V	18	41.01	-103.44
6	898.15	-57.58	-13.00	-44.58	1.50 V	217	40.91	-98.49

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

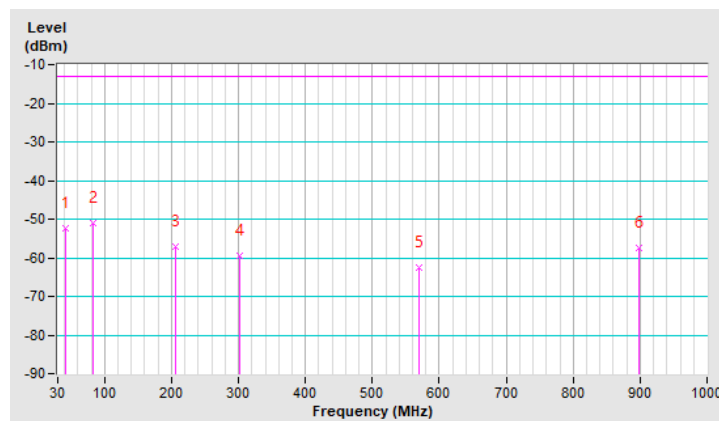

Above 1GHz

LTE Band 26, Channel Bandwidth 1.4MHz

Mode	TX channel 26697 (814.7MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	19deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1629.40	-47.54	-13.00	-34.54	1.18 H	178	70.46	-118.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1629.40	-43.59	-13.00	-30.59	2.23 V	243	74.41	-118.00

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$.
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value.
4. The other ERP levels were very low against the limit.

Mode	TX channel 26740 (819.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	19deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-47.26	-13.00	-34.26	3.56 H	341	70.73	-117.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-46.43	-13.00	-33.43	2.89 V	102	71.56	-117.99

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$.
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value.
4. The other ERP levels were very low against the limit.

Mode	TX channel 26783 (823.3MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	19deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1646.60	-47.27	-13.00	-34.27	1.44 H	297	70.71	-117.98
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1646.60	-46.23	-13.00	-33.23	2.82 V	120	71.75	-117.98

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$.
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value.
4. The other ERP levels were very low against the limit.

LTE Band 26, Channel Bandwidth 5MHz

Mode	TX channel 26715 (816.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	19deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1633.00	-47.40	-13.00	-34.40	2.00 H	51	70.61	-118.01
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1633.00	-46.46	-13.00	-33.46	3.28 V	130	71.55	-118.01

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$.
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value.
4. The other ERP levels were very low against the limit.

Mode	TX channel 26740 (819.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	19deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-47.37	-13.00	-34.37	2.51 H	61	70.62	-117.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-46.12	-13.00	-33.12	3.68 V	283	71.87	-117.99

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$.
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value.
4. The other ERP levels were very low against the limit.

Mode	TX channel 26765 (821.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	19deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1643.00	-47.38	-13.00	-34.38	3.49 H	85	70.61	-117.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1643.00	-46.32	-13.00	-33.32	2.27 V	178	71.67	-117.99

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$.
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value.
4. The other ERP levels were very low against the limit.

LTE Band 26, Channel Bandwidth 10MHz

Mode	TX channel 26740 (819.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	19deg. C, 67%RH	Input Power	120Vac, 60Hz (System)
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-47.19	-13.00	-34.19	2.16 H	10	70.80	-117.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1638.00	-46.29	-13.00	-33.29	1.31 V	258	71.70	-117.99

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m).$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value.
4. The other ERP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---