

承認書

APPROVAL SHEET

客 户
CUSTOMER:

品 名 规 格
DESCRIPTION: SMA-2dBi-Rubber Antenna/IPEX-SMA Female-L28mm

料 号
PART NO.: AW1006

客 户 料 号
CUS PART NO.:

日 期
Date: 2024. 8. 9

文 件 版 本
Revision: A/1

特高科技有限公司确认 TUKO TECHNOLOGY CO., LTD confirm			客户批准 Customer Approval
制作 Is used by	审核 Checked by	批准 Approval by	
朱万里	赵国春	Even	

联系电话: 0755 84160400 13544122582

※ 承认书一式两份, 惠蒙贵司承认签章


※ Approval in duplicate, please signed by your company.


目录

CONTENTS

1.封面 Cover-----	1
2.目录 Catalog-----	2
3.产品图纸 Product drawings-----	3-4
4.电气性能参数 Electrical performance parameters-----	5
5.测试报告 Testing report-----	6-9
6.环境性能测试 Environment performance test-----	10
7.接头规格参数 Connector specifications-----	11-12
8.线材规格参数 Wire specifications-----	13-14

产品图纸 (Product drawing)

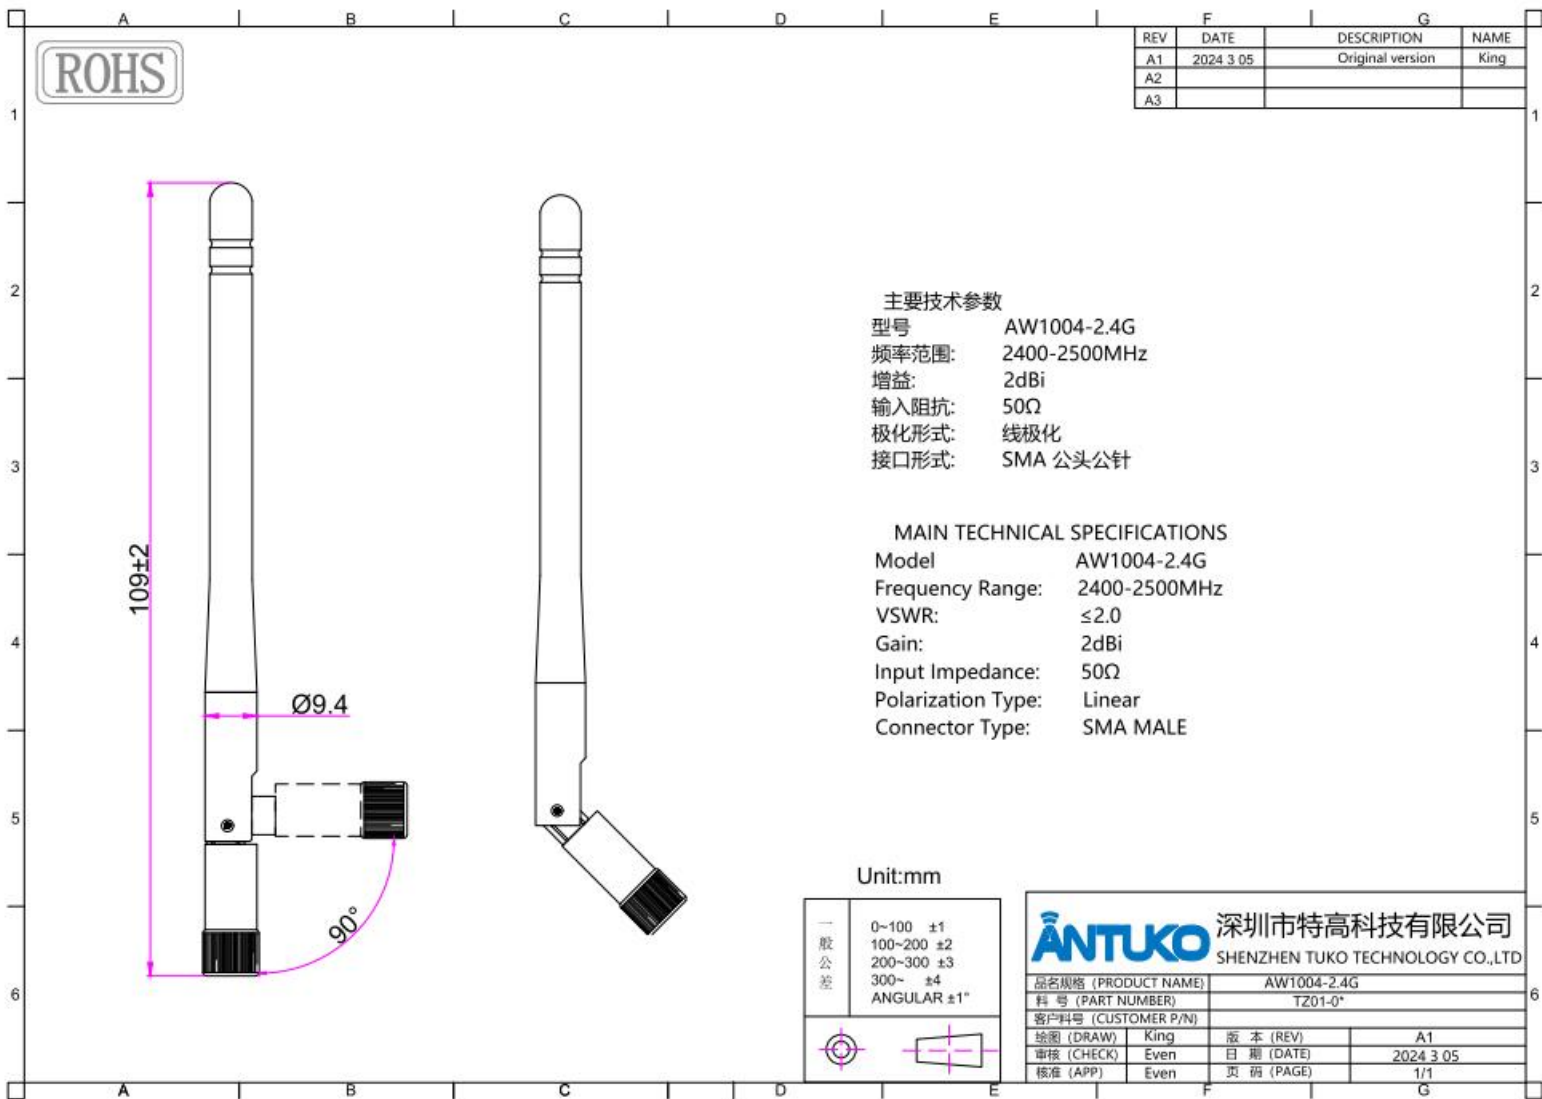

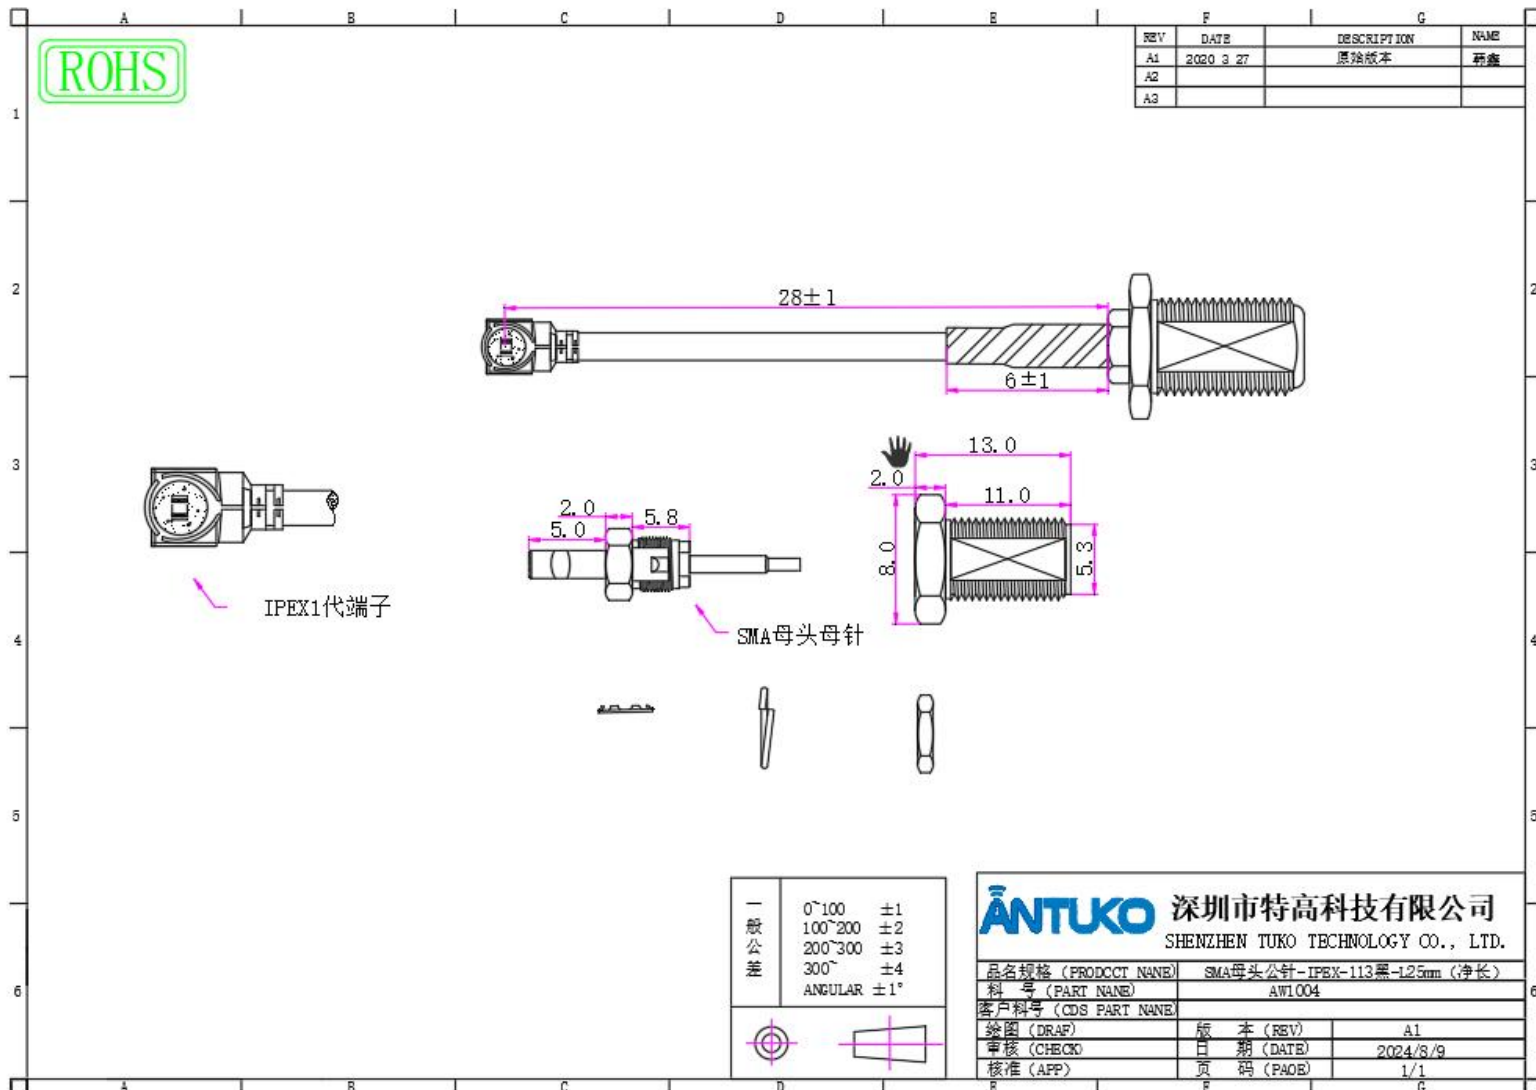

地址：深圳市龙华区观湖街道樟坑径社区安澜大道9号201友成工业园2栋2楼

Add: 2 floor, Plant 2, YouCheng industry Area, Anlan Road NO.9-201, Zhangkengjing Community, Guanhu Street, Longhua District, Shenzhen, China 518110

电气性能指标 (ELECTRICAL)

频率范围 Frequency Range(MHZ):	2400-2500
增益Gain (dBi) :	2.0
电压驻波比:	≤2.0
极化方向:	Linear
辐射方向 Radiation:	Omni
阻抗 Input Impedance(Ω)	50 Ohm


机械性能指标 (MECHANICAL)

天线尺寸 Size:	Φ 9.4*109mm
天线颜色 Color:	Black
天线外壳材质 Cover material:	TPEE
核心材料 Core Material:	Copper tube (Brass)
线材规格 Cable:	RG178
接头 Connector Type:	SMA Male
工作温度 Operatingtemperature:	-10℃~85℃
工作湿度 Operating humidity:	20~80%

连接线性能 (Coaxial connection line performance)

连接线长度 Cable length :	28mm
接头Connector Type:	IPEX Ito SMA Female (一代IPEX转SMA母头母针)
频率范围 Frequency Range (MHZ):	0-6000
工作温度 Operating temperature:	10℃~85℃
工作湿度 Operating humidity:	20~80%

VSWR & Return Loss & Smith

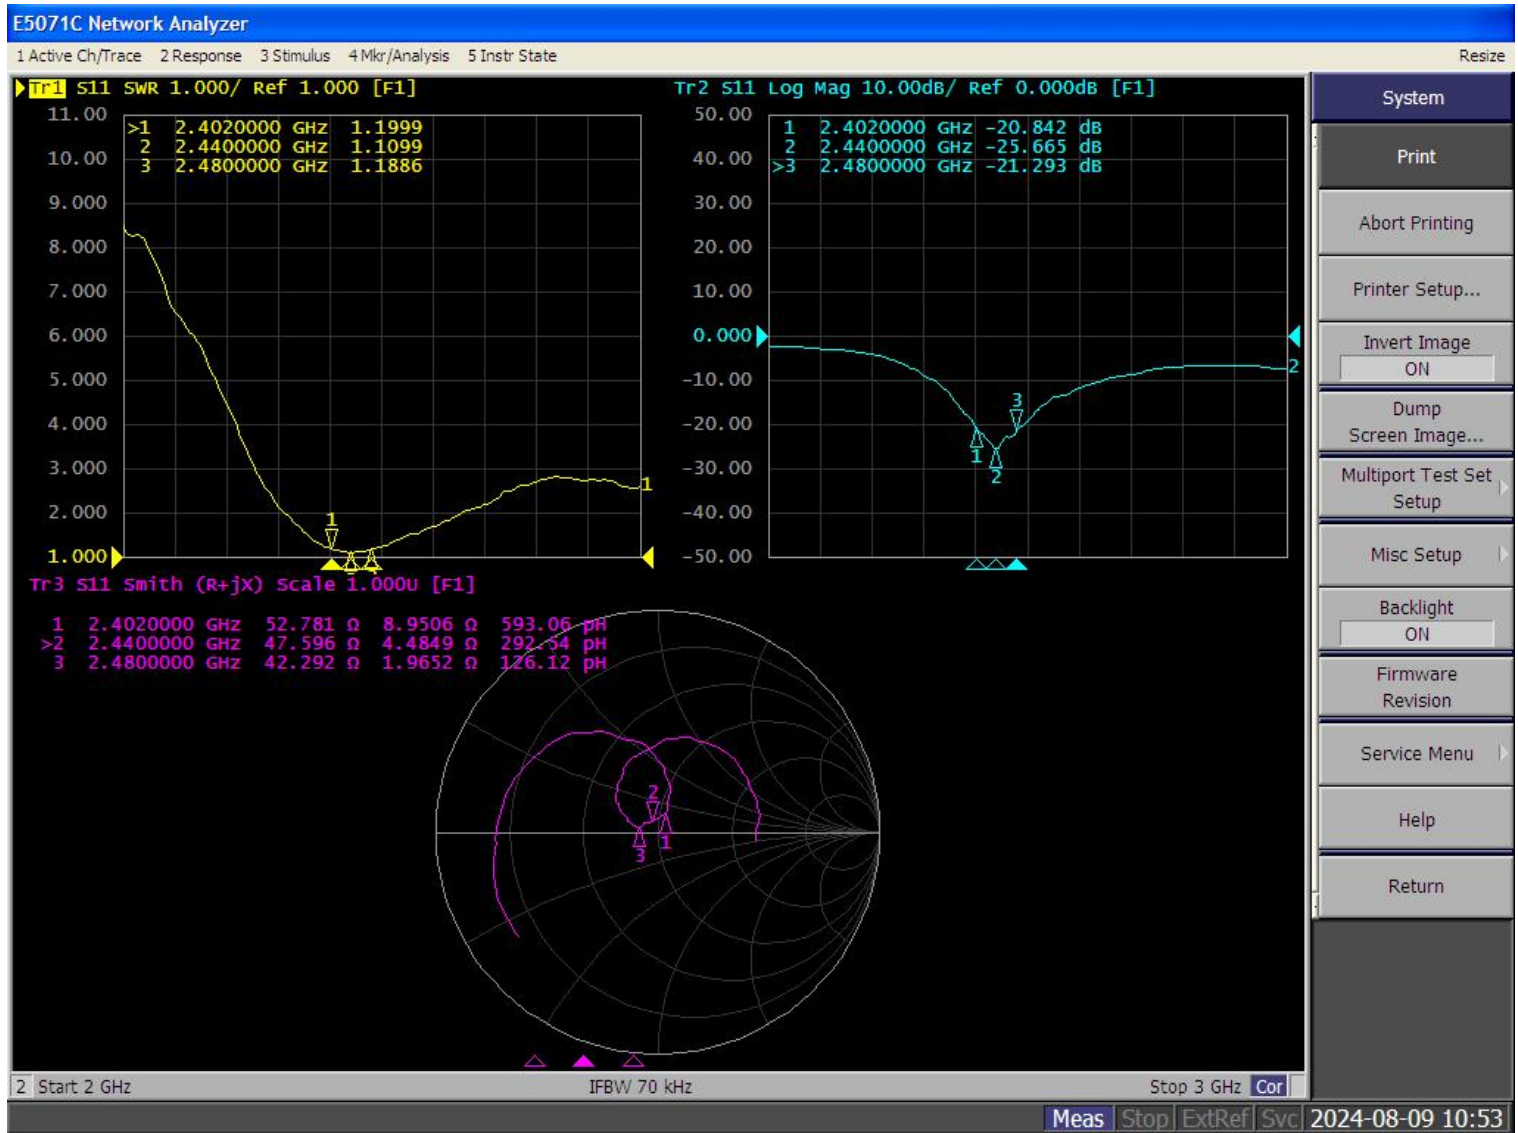


地址：深圳市龙华区观湖街道樟坑径社区安澜大道 9 号 201 友成工业园 2 栋 2 楼


Add: 2 floor, Plant 2, YouCheng industry Area, Anlan Road NO.9-201, Zhangkengjing Community, Guanhu Street, Longhua District, Shenzhen, China 518110

GAIN & Efficiency

2400.00MHz - 2500.00MHz Gain

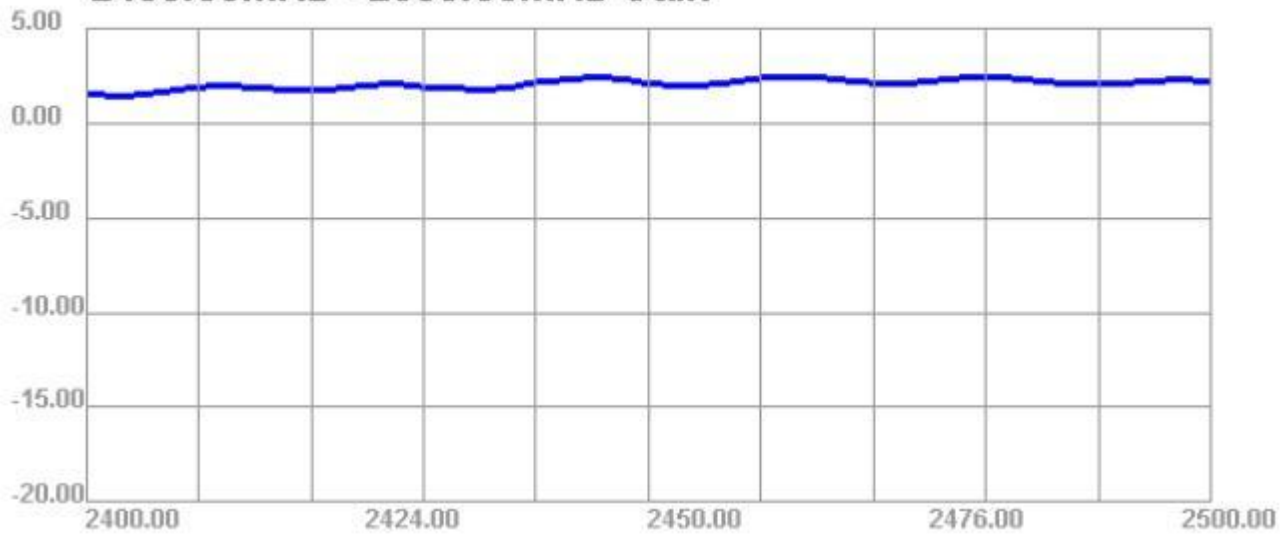

2400.00MHz - 2500.00MHz Efficiency

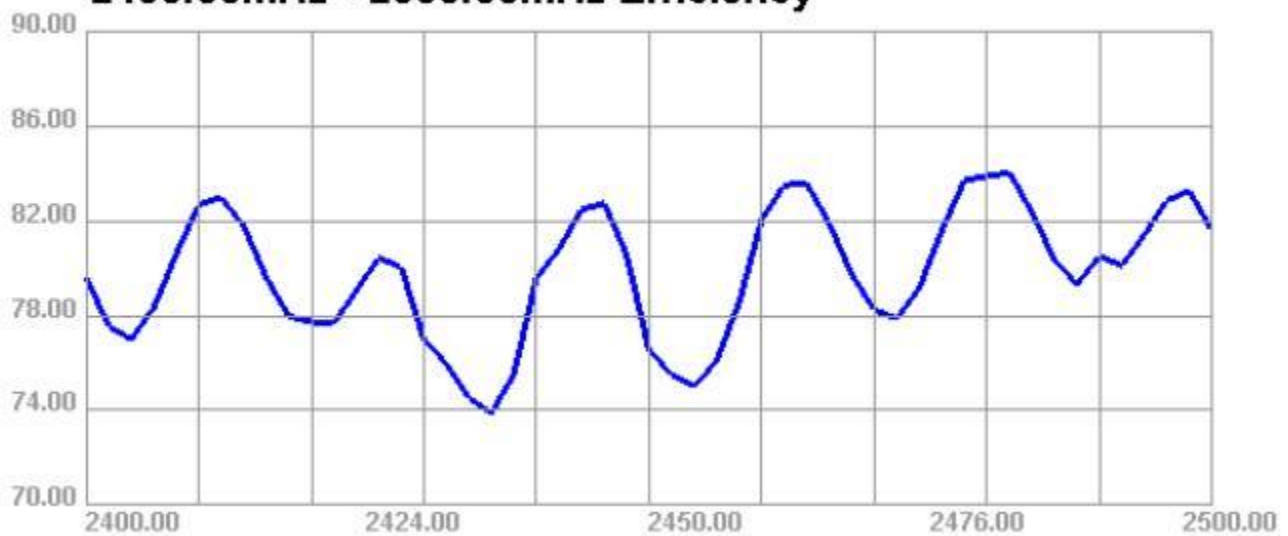


Radiation patterns: 2D


XY Plane (Theta90. /Phi0-360.)

XZ Plane (Theta0-360. /Phi0.)

Horizontal

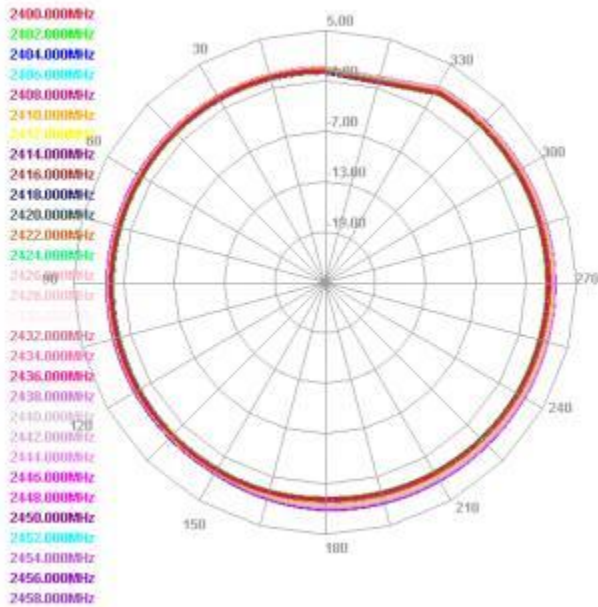


E1 Face

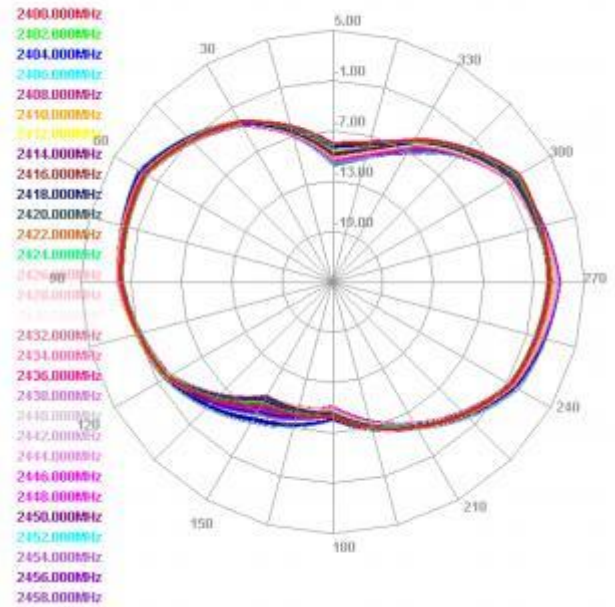

YZ Plane (Theta0-360. /Phi90.)

E2 Face

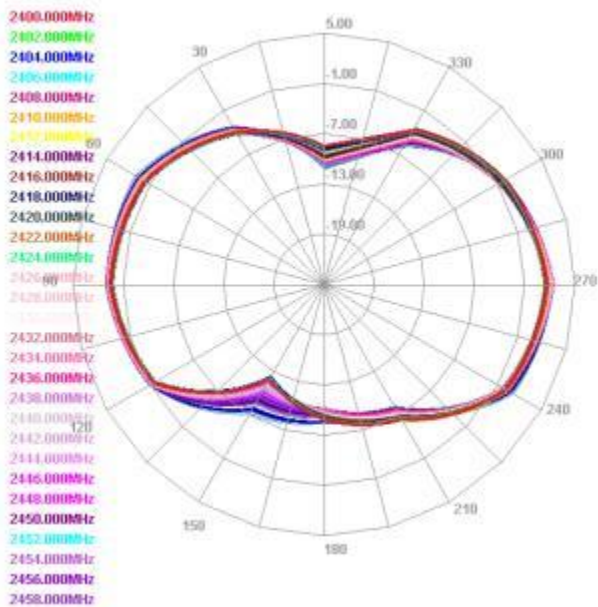


地址：深圳市龙华区观湖街道樟坑径社区安澜大道 9 号 201 友成工业园 2 栋 2 楼


Add: 2 floor, Plant 2, YouCheng industry Area, Anlan Road NO.9-201, Zhangkengjing Community, Guanhu Street, Longhua District, Shenzhen, China 518110

Radiation patterns: 3D (2400/2450/2500MHz)


2400.000MHz

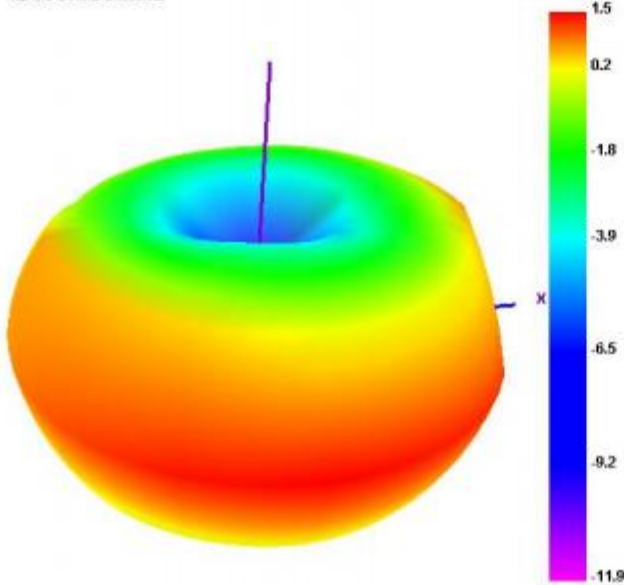

2450.000MHz

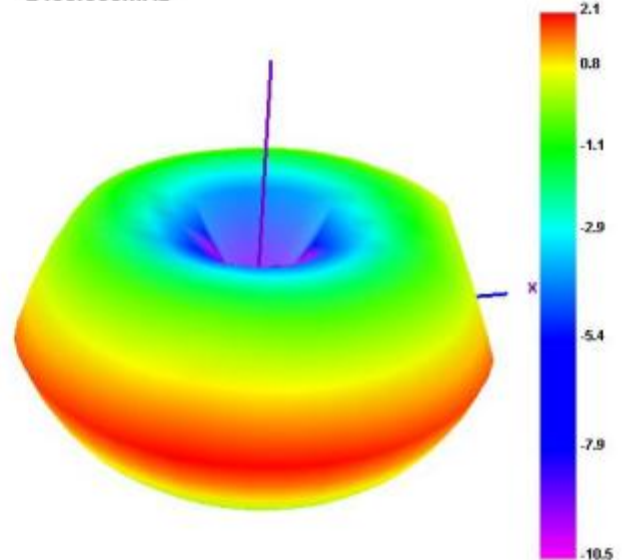

2500.000MHz

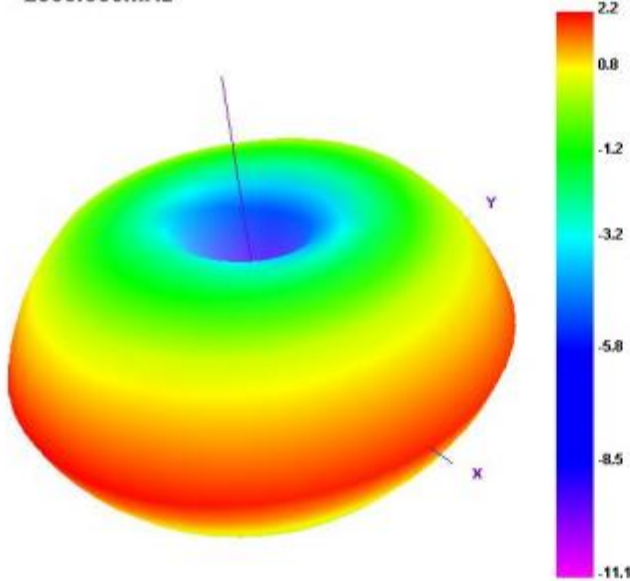

地址：深圳市龙华区观湖街道樟坑径社区安澜大道 9 号 201 友成工业园 2 栋 2 楼

Add: 2 floor, Plant 2, YouCheng industry Area, Anlan Road NO.9-201, Zhangkengjing Community, Guanhu Street, Longhua District, Shenzhen, China 518110

环境性能测试（ Environment performance test）：

项目	测试条件	测试结果
储存环境	在没有指定的情况下测试温度、湿度、气压如下： 1. 温度为-30℃~+80℃ 2. 相对湿度为45%-85% 3. 气压为86kpa-106kpa	电气机械性能正常
高低温试验	在70℃与-40℃之间进行5次循环，然后在正常条件下1-2H，检查外观质量。	尺寸应满足规定并应满足于机械、电气性能
耐恒定湿热试验	相对湿度95±3%，试验温度：40℃.持续2H作用后，试品取出后5min之内测定电气性能，试品在正常条件下1-2H，检查外观质量	尺寸应满足规定并应满足于机械、电气性能
振动试验	振频范围10-55HZ，位移幅值：0.35MM，加速度幅值：50.0M/S，扫频循环次数：30次	电气机械性能正常
跌落试验	1M高空按照互相垂直的轴方向自由跌落3次	电气机械性能正常

Project	Test condition	Test results
Storage environment	Test temperature, humidity, pressure without stated condition as follwings:1.Temperature: -30 ℃ ~ +80 ℃ ;2.Relative humidity: 45%-85%;3,Pressure: 86kpa-106kpa	Electrical and mechanical performance normal
High and low temperature test	Having 5 times cycle between -40℃ to 70℃,Then in common condition 1-2 hours test exterior quality.	Measurement satisfied with electrical and mechanical performance normal.
Resistance constant hot and humid test	Relative humidity:95±3%,Test temperature: 40℃,last 2 hours ,put it after 5 min test the electrical function .Test products during common condition 1-2 hours ,Then test exterior quality.	Measurement satisfied with electrical and mechanical performance normal.
Vibration test	Vibrate Frequency:10-55HZ; Distance :0.35mm;Acceleration :50.0m/s;Sweep frequency cycle:30 times	Electrical and mechanical performance normal
Fall test	From 1m height fall down 3 times freely (vertical direction)	Electrical and mechanical performance normal

SMA射频同轴连接器

RF COAXIAL CONNECTORS


编号：TG 11

主要技术特性 (TECHNICAL SPECIFICATIONS):

温度范围 (Temprange):	-55~+155℃	
特性阻抗 (Impedance):	50Ω	
频率范围 (Frequency Range):	DC~12.4GHz	
工作电压 (Working Voltage):	335V max(有效值)	
耐压 (Withstand Voltage):	1000V rms(海平面最小值)	
接触电阻 (Contact resistance):	内导体之间 (Center Contact)	≤3mΩ
	外导体之间 (Outer Contact)	≤2mΩ
	绝缘电阻 (Insulation resistance):	≥5000mΩ
电压驻波比 (VSWR):	直式 (Right angle)	≤1.10
耐用性 (Durability):	≥500次	

材料与涂覆 (MATERIAL AND PLATING):

壳体 (Shell):	黄铜 (Brass)	镀硬金 (Gold plated)
插针 (Contact pin):	黄铜 (Brass)	镀硬金 (Gold plated)
插孔 (Socket contact):	铍青铜 (Beryllium brass)	镀硬金 (Gold plated)
绝缘体 (Insulator):	聚四氟乙烯 (PTFE)	
O型密封件 (O-ring sealing):	硅橡胶 (6146 silastic)	

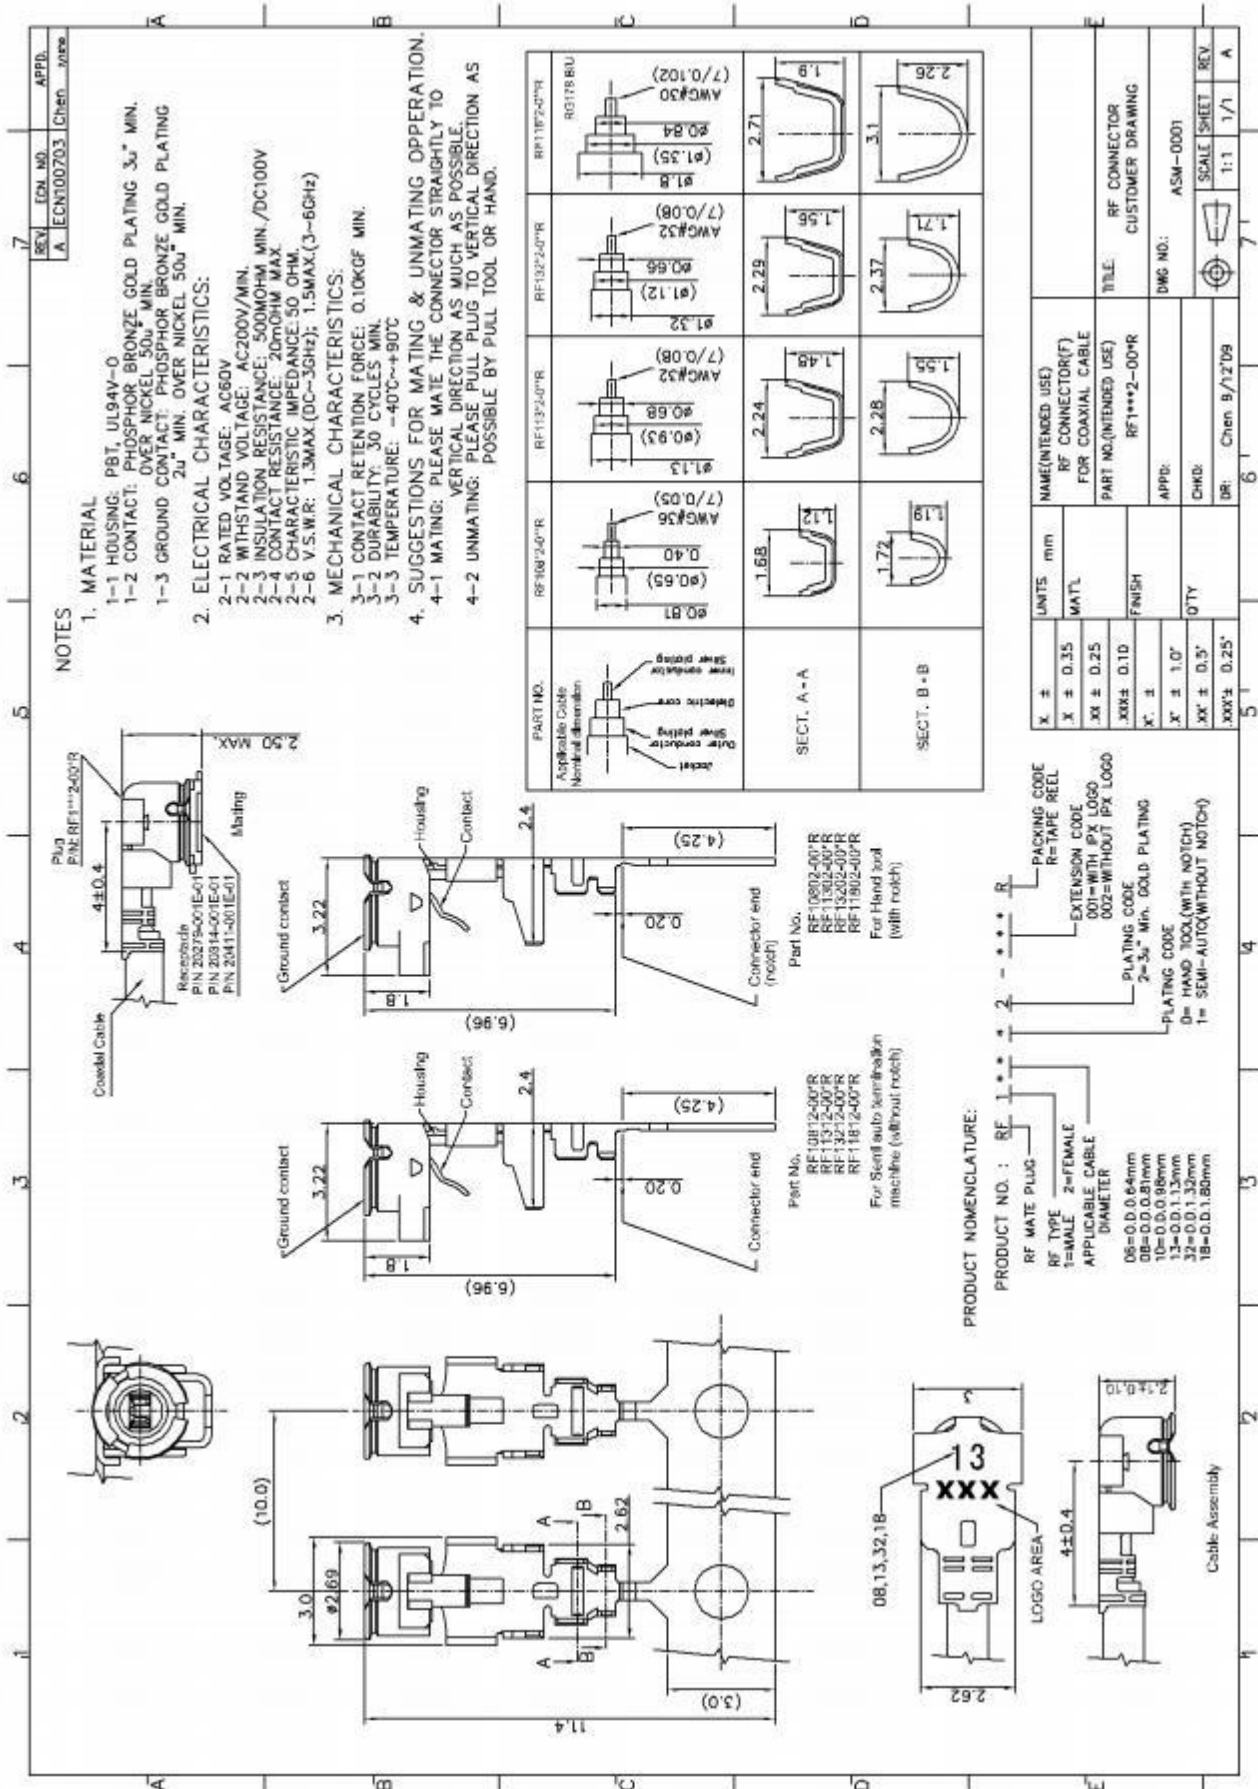

地址：深圳市龙华区观湖街道樟坑径社区安澜大道 9 号 201 友成工业园 2 栋 2 楼

Add: 2 floor, Plant 2, YouCheng industry Area, Anlan Road NO.9-201, Zhangkengjing Community, Guanhu Street, Longhua District, Shenzhen, China 518110

产品规格 product Type		RF113-F单银		
结构图 structure Drawing				
结构特性 structure characteristics				
结 构 structure	项目 Item	标准值 standard value		
内导体 Inner conductor	材质 Material	镀银铜线 silverplated copper wire		
	结 构 construction(mm)	7/0.085		
	标称外径 Nom. Dia(mm)	0.255±0.02		
	导体电阻 conductor Resistance	s482Q/km@ 20℃		
绝缘层 Insulation	材质 Material	聚全氟乙丙烯 FEP		
	标称外径 Nom. Dia(mm)	0.70±0.03		
	厚度Thickness (mm)	0.22±0.03		
	颜色color(mm)	Transparent		
	绝缘电阻 Insulation Resistance	≥ 3000 M Q/km		
外导体 outer conductor	材质 Material	镀锡铜线Tinned copper wire 16/4*0.05		
	标称外径 Nom. Dia(mm)	0.92±0.05		
	编织覆盖率coverage Ratio(%)	90±5		
护套 Jacket	材质 Material	聚全氟乙丙烯 FEP		
	标称外径 Nom. Dia(mm)	1.13±0.05		
	厚度Thickness (mm)	0.11±0.01		
电气性能 Electr ical characteristics				
项目 Item	标准值 standard value	项目 Item	频率 Frequency	标准值 standard value
阻抗 Impe danc (Q)	50±2	衰减 Attenuation@20℃ (dB/m)	1GHZ	2.20
电容capacitance(PF/m)	98		2GHZ	3.10
速率velocity(%)	70		3GHZ	3.80
驻波比 VSWR	≤ 1.30@ DC-6GHZ		4GHZ	4.40
最大工作电压 Max. operating voltage(v)	1000		5GHZ	4.90
额定电流 current Rating(A)	0.13		6GHZ	5.40
最大工作频率 Max. operating Frequency(GHZ)	6			
可 靠 性 Dependabi l ity				
最小弯曲半径(单次)Min. Bending Radius/single		mm	5	
最小弯曲半径 (重复) Min. Bending Radius/Repeated		mm	10	
工作温度范围operating Temperature		℃	-55-+200	

包装 packing	
包装方式packing Mode	纸盘 papery Reel
包装长度The Length of Each Reel(m)	1000
每盘段数The Joints of Each Reel	≤4
最小段长Min. segment Length(m)	≥20
使用提示 Trips for use	
存储环境storage Environment	温度：30℃以下，湿度：20-65% Temperature: Below 30°C, Humidity: 20-65%
最佳保存周期The Best save cycle	2 个月，2 个月以上上锡效果变差，但电性能不受影响，夏季高温高湿环境开剥后需尽快流转 2 months. After 2 months, the effect of tinning wil lbecomeworse, but it will not affect the electrical performance. After stripping the wire in the high temperatureand high humidity environment in summer, it needs to be used as soon as possible.
加工温度processing Temperature	可短时承受 260℃的高温，300℃以上易发生分解，400℃以上发生显著的热分解 It can withstand a high temperature of260°Cfor a short time, easily decomposes above 300°Cand significantly thermally decomposes above 400°C.
铁氟龙收缩Teflon shrink	材料的固有属性，绝缘0.2mm 以下，护套0.3mm 以下 The inherent properties of the material, the insulation is less than0.2mm, and the sheath is less than 0.3mm.
护套窜动Jacket Ta averse	加工长度（护套残留长度）低于 5CM 时易发生 It is easy to occur when the processing length (sheath residual length) is less than 5CM