



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03



中国认可
国际互认
检测
TESTING
CNAS L5785

Test Report

Report No.: CQASZ20250902271E-01
Applicant: Avantronics Limited
Address of Applicant: The 4th Floor, Yuepeng Building, No.1019 Jiabin Rd, Luohu District, Shenzhen, 518002, China
Equipment Under Test (EUT):
EUT Name: Avantree AudiTour
Model No.: WSTR-1010
Test Model No.: WSTR-1010
Brand Name: Avantree
FCC ID: WJ5-WSTR-1010
Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
Date of Receipt: 2025-09-23
Date of Test: 2025-09-23 to 2025-10-29
Date of Issue: 2025-11-05
Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

Timo Lei

(Timo Lei)

Approved By:

Jack Ai

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250902271E-01	Rev.01	Initial report	2025-11-05

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2020)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2020)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2020)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2020)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2020)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2020)	PASS

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT AND MODE	7
4.4 DESCRIPTION OF SUPPORT UNITS	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
4.6 TEST LOCATION	9
4.7 TEST FACILITY	9
4.8 DEVIATION FROM STANDARDS	9
4.9 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
4.11 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA	11
5.1 ANTENNA REQUIREMENT	11
5.2 CONDUCTED EMISSIONS	12
5.3 RADIATED EMISSION	15
5.4 20dB BANDWIDTH	23
6 PHOTOGRAPHS	26
6.1 RADIATED EMISSION TEST SETUP	26
6.2 CONDUCTED EMISSION TEST SETUP	27
6.3 EUT CONSTRUCTIONAL DETAILS	28
*** END OF REPORT ***	33

4 General Information

4.1 Client Information

Applicant:	Avantronics Limited
Address of Applicant:	The 4th Floor, Yuepeng Building, No.1019 Jiabin Rd, Luohu District, Shenzhen, 518002, China
Manufacturer:	Avantronics Limited
Address of Manufacturer:	The 4th Floor, Yuepeng Building, No.1019 Jiabin Rd, Luohu District, Shenzhen, 518002, China
Factory:	Shenzhen Shuaixian Electronic Equipment Co., Ltd
Address of Factory:	Production/Business Address: Floor3, Building C, No.10, Lane 3, Longxing Road, Dakang Community, Yuanshan Subdistrict, Longgang District, Shenzhen City, Guangdong Prov.

4.2 General Description of EUT

EUT Name:	Avantree AudiTour
Model No.:	WSTR-1010
Test Model No.:	WSTR-1010
Trade Mark:	Avantree
Software Version:	V0.2
Hardware Version:	V1.0
Frequency Range:	2402MHz~2480MHz
Modulation Type:	GFSK
Number of Channels:	79
Sample Type:	☐ Mobile ☒ Portable ☐ Fix Location
Test Software of EUT:	FCC
Antenna Type:	Glue stick antenna
Antenna Gain:	2.46dBi
Power Supply:	Li-ion battery: DC 3.7V 1200mAh, Charge by DC 5V for adapter

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	27 °C
Humidity:	59 % RH
Atmospheric Pressure:	1009mbar
Temperature:	26 °C
Humidity:	59 % RH
Atmospheric Pressure:	1009mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009mbar
Test mode:	
Transmitting mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Adapter	Mi	/	/	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	5.12dB	(1)
Radiated Emission	Above 1GHz	4.60dB	(1)
Conducted Disturbance	0.15~30MHz	3.34dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.7 Test Facility

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/08/31	2026/08/30
Spectrum analyzer	R&S	FSU26	CQA-038	2025/08/31	2026/08/30
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/08/31	2026/08/30
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/08/31	2026/08/30
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2025/08/31	2026/08/30
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2025/08/31	2026/08/30
Antenna Connector	CQA	RFC-01	CQA-080	2025/08/31	2026/08/30
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/08/31	2026/08/30
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/08/31	2026/08/30
EMI Test Receiver	R&S	ESPI3	CQA-013	2025/08/31	2026/08/30
LISN	R&S	ENV216	CQA-003	2025/08/31	2026/08/30
Coaxial cable	CQA	N/A	CQA-C009	2025/08/31	2026/08/30

Note:

The temporary antenna connector is soldered on the pcb board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement


Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Glue stick antenna. The best case gain of the antenna is 2.46dBi.	

Page:12 of 33

Test Mode:	Charge +Transmitting mode.
Final Test Mode:	Charge +Transmitting mode
Test Results:	Pass

Measurement Data:

Live line:

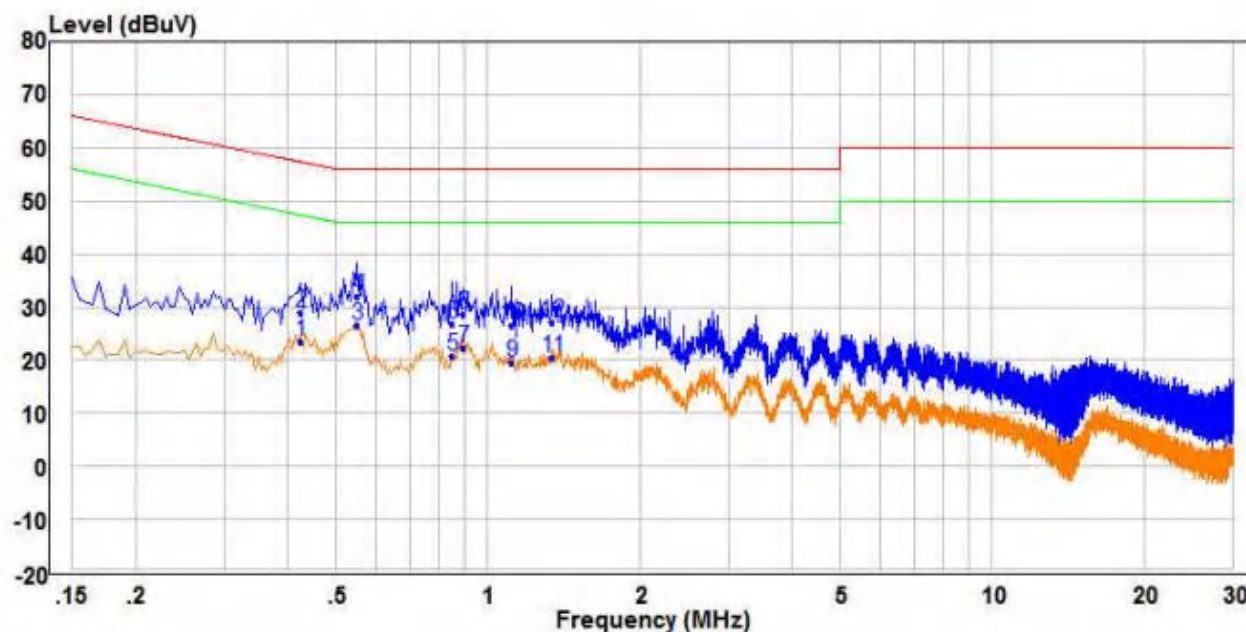


	Freq	Read		Limit	Over		
	MHz	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	Pol/Phase
1	0.425	13.89	9.51	23.40	47.35	-23.95	Average
2	0.425	19.57	9.51	29.08	57.35	-28.27	QP
3 PP	0.550	16.92	9.61	26.53	46.00	-19.47	Average
4 QP	0.550	22.40	9.61	32.01	56.00	-23.99	QP
5	0.850	10.94	9.69	20.63	46.00	-25.37	Average
6	0.850	17.23	9.69	26.92	56.00	-29.08	QP
7	0.895	12.71	9.64	22.35	46.00	-23.65	Average
8	0.895	18.93	9.64	28.57	56.00	-27.43	QP
9	1.115	10.06	9.53	19.59	46.00	-26.41	Average
10	1.115	16.96	9.53	26.49	56.00	-29.51	QP
11	1.340	10.88	9.53	20.41	46.00	-25.59	Average
12	1.340	17.62	9.53	27.15	56.00	-28.85	QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

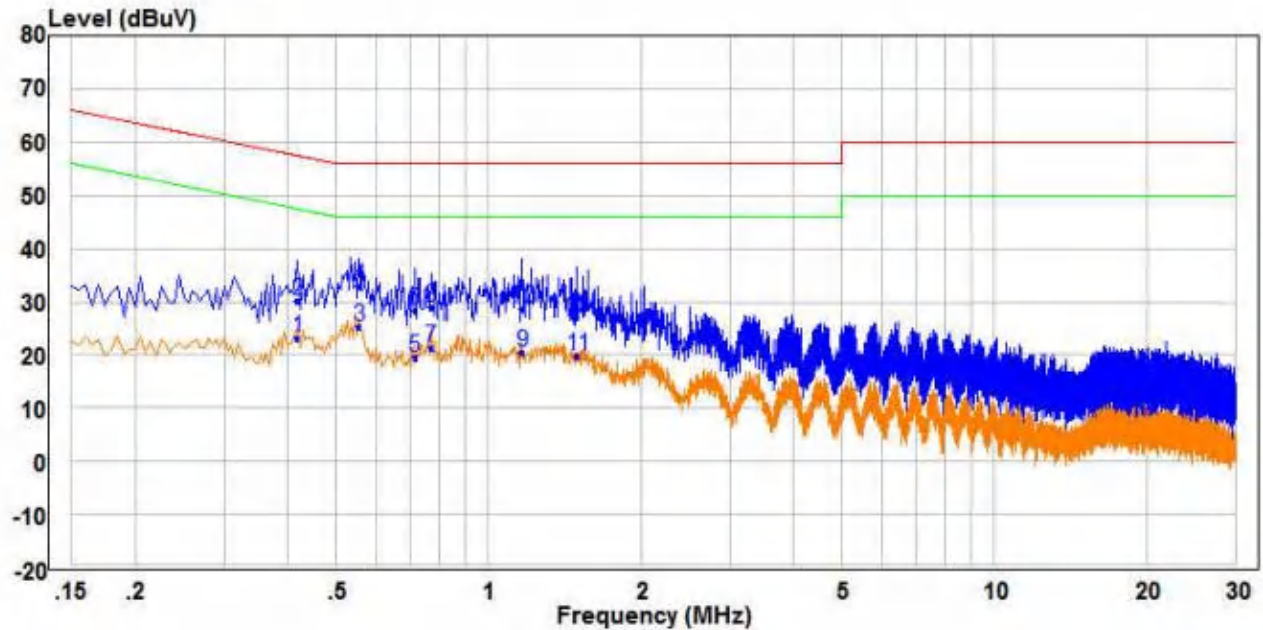

	Freq	Read		Limit	Over		
	MHz	Level	Factor	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dB		
1	0.420	13.45	9.62	23.07	47.45	-24.38 Average	Neutral
2	0.420	20.68	9.62	30.30	57.45	-27.15 QP	Neutral
3 PP	0.555	15.46	9.76	25.22	46.00	-20.78 Average	Neutral
4 QP	0.555	23.02	9.76	32.78	56.00	-23.22 QP	Neutral
5	0.715	9.59	9.89	19.48	46.00	-26.52 Average	Neutral
6	0.715	18.33	9.89	28.22	56.00	-27.78 QP	Neutral
7	0.770	11.54	9.85	21.39	46.00	-24.61 Average	Neutral
8	0.770	19.14	9.85	28.99	56.00	-27.01 QP	Neutral
9	1.165	10.59	9.71	20.30	46.00	-25.70 Average	Neutral
10	1.165	18.97	9.71	28.68	56.00	-27.32 QP	Neutral
11	1.500	10.11	9.72	19.83	46.00	-26.17 Average	Neutral
12	1.500	17.44	9.72	27.16	56.00	-28.84 QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209 and 15.205				
Test Method:	ANSI C63.10: 2020				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. 2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	
		114.0		Peak Value	

Test Setup:

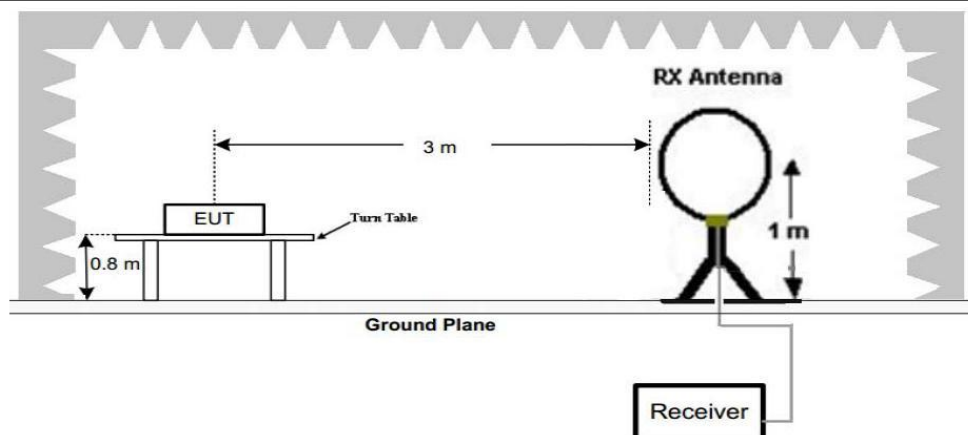


Figure 1. Below 30MHz

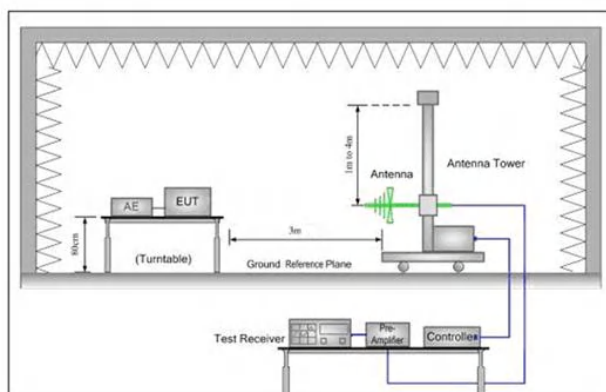


Figure 2. 30MHz to 1GHz

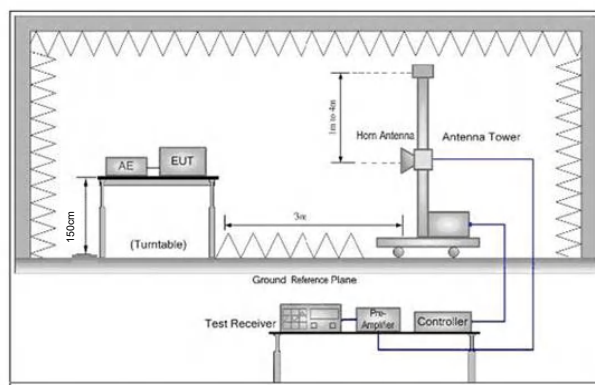


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table

	was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel,the middle channel,the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case. For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data

30MHz~1GHz		
Test mode:	Transmitting	Vertical

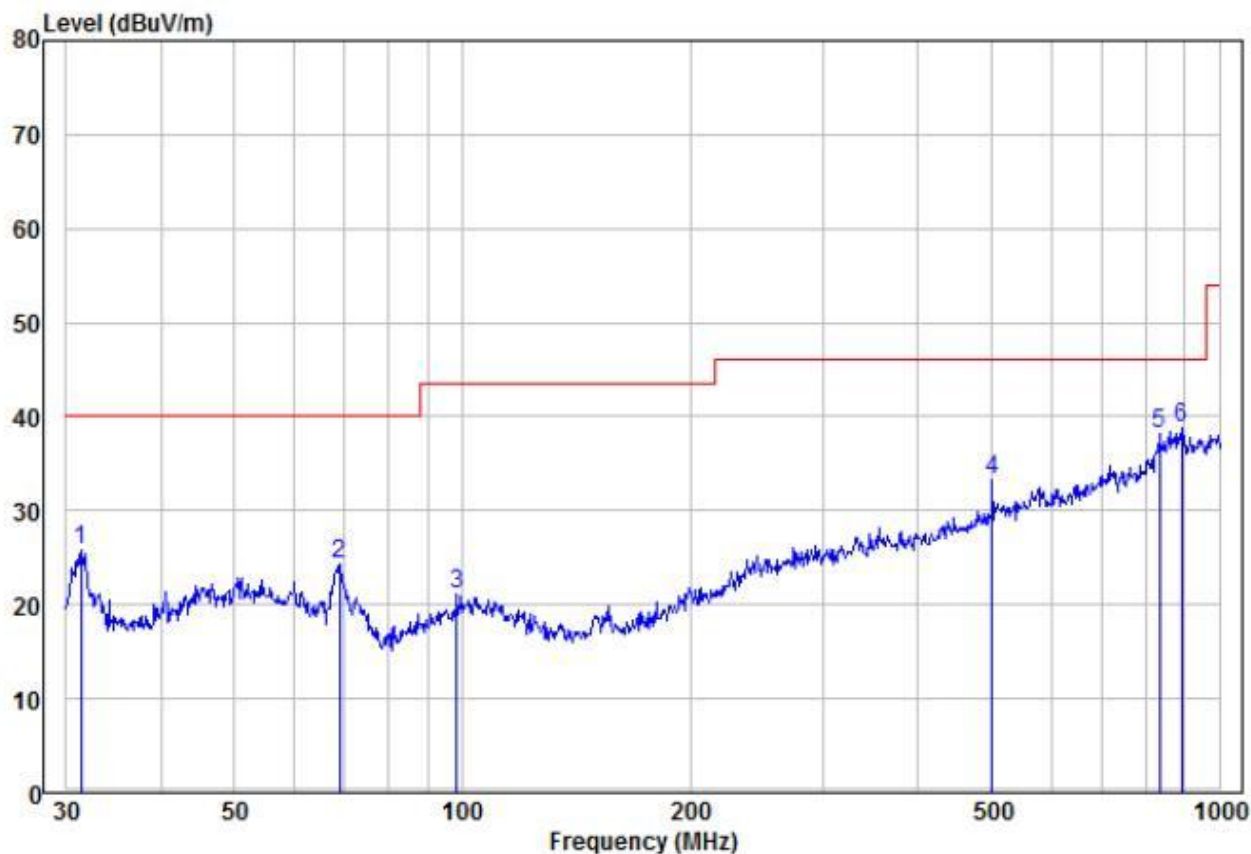

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	31.40	17.43	8.34	25.77	40.00	-14.23	Peak	VERTICAL	100	42
2	68.87	14.40	9.89	24.29	40.00	-15.71	Peak	VERTICAL	100	123
3	98.49	9.48	11.63	21.11	43.50	-22.39	Peak	VERTICAL	100	87
4	501.18	12.32	20.94	33.26	46.00	-12.74	Peak	VERTICAL	100	98
5	833.32	10.08	28.00	38.08	46.00	-7.92	Peak	VERTICAL	100	306
6 pp	890.73	9.77	29.15	38.92	46.00	-7.08	Peak	VERTICAL	100	221

Test mode:	Transmitting	Horizontal
------------	--------------	------------

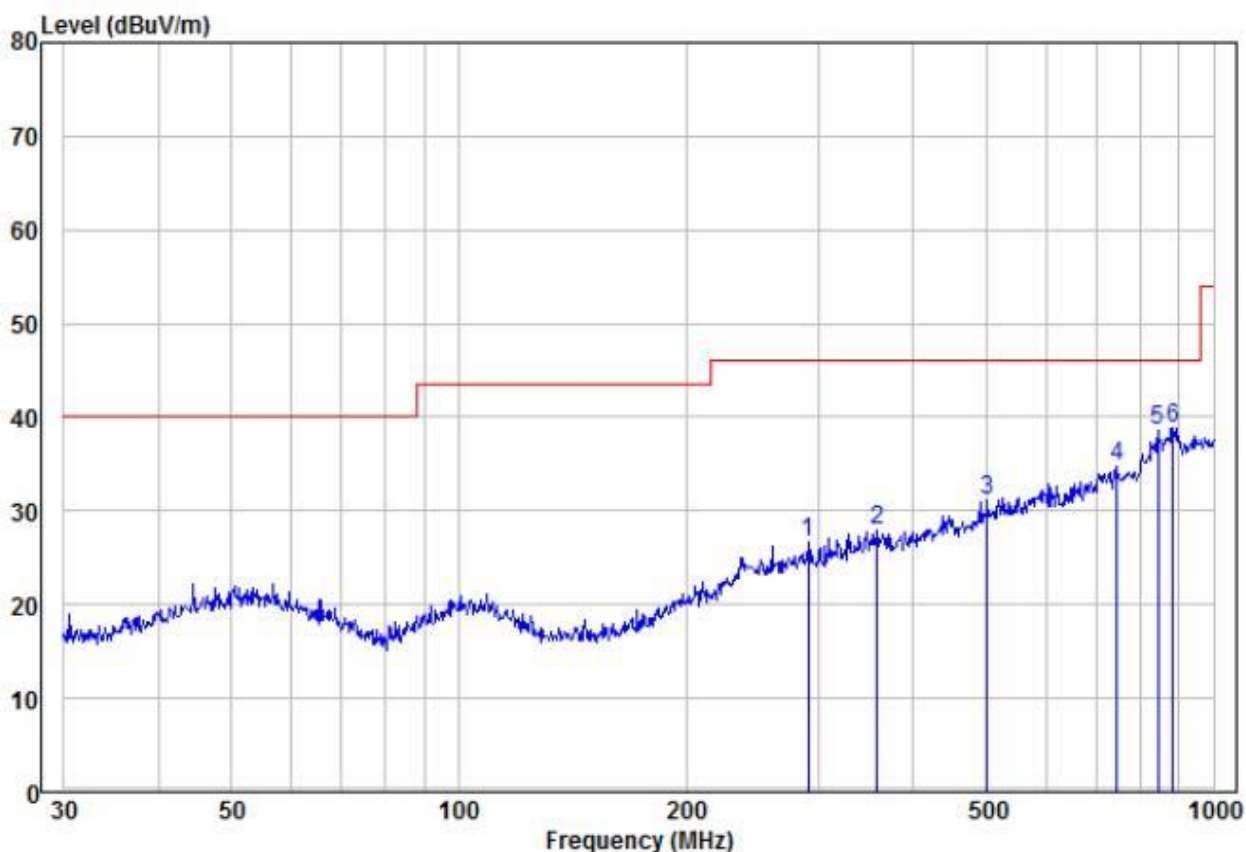

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	290.02	10.00	16.64	26.64	46.00	-19.36	Peak	HORIZONTAL	100	102
2	357.93	9.62	18.33	27.95	46.00	-18.05	Peak	HORIZONTAL	100	56
3	501.18	10.11	20.94	31.05	46.00	-14.95	Peak	HORIZONTAL	100	15
4	744.87	9.94	24.73	34.67	46.00	-11.33	Peak	HORIZONTAL	100	152
5	845.09	10.21	28.37	38.58	46.00	-7.42	Peak	HORIZONTAL	100	35
6 pp	884.50	9.77	29.04	38.81	46.00	-7.19	Peak	HORIZONTAL	100	210

Above 1GHz									
Test mode:		Transmitting		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant Pol	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390	62.16	-9.2	52.96	74	-21.04	Peak	H	1.5	359
2390	44.11	-9.2	34.91	54	-19.09	AVG	H	1.5	70
2400	45.40	-9.39	36.01	74	-37.99	Peak	H	1.5	17
2400	45.25	-9.39	35.86	54	-18.14	AVG	H	1.5	147
2402	99.93	-9.33	90.60	114	-23.40	peak	H	1.5	115
2402	95.94	-9.33	86.61	94	-7.39	AVG	H	1.5	296
4804	56.74	-4.28	52.46	74	-21.54	peak	H	1.5	261
4804	41.94	-4.28	37.66	54	-16.34	AVG	H	1.5	145
7206	53.40	1.13	54.53	74	-19.47	peak	H	1.5	171
7206	36.07	1.13	37.20	54	-16.80	AVG	H	1.5	2
2390	61.79	-9.2	52.59	74	-21.41	peak	V	1.5	53
2390	45.69	-9.2	36.49	54	-17.51	AVG	V	1.5	261
2400	62.57	-9.39	53.18	74	-20.82	peak	V	1.5	314
2400	44.48	-9.39	35.09	54	-18.91	AVG	V	1.5	283
2402	96.83	-9.33	87.50	114	-26.50	peak	V	1.5	259
2402	92.24	-9.33	82.91	94	-11.09	AVG	V	1.5	214
4804	57.23	-4.28	52.95	74	-21.05	peak	V	1.5	176
4804	40.99	-4.28	36.71	54	-17.29	AVG	V	1.5	210
7206	50.71	1.13	51.84	74	-22.16	peak	V	1.5	302
7206	36.50	1.13	37.63	54	-16.37	AVG	V	1.5	108


Test mode:		Transmitting		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant . Pol.	Antenna Height	Table Angle
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
2441	99.01	-9.37	89.64	114	-24.36	peak	H	1.5	130
2441	97.13	-9.37	87.76	94	-6.24	AVG	H	1.5	80
4882	57.55	-4.14	53.41	74	-20.59	peak	H	1.5	33
4882	41.20	-4.14	37.06	54	-16.94	AVG	H	1.5	218
7323	51.70	0.56	52.26	74	-21.74	peak	H	1.5	205
7323	35.92	0.56	36.48	54	-17.52	AVG	H	1.5	136
2441	96.73	-9.36	87.37	114	-26.63	peak	V	1.5	250
2441	92.82	-9.36	83.46	94	-10.54	AVG	V	1.5	264
4882	57.04	-4.14	52.90	74	-21.10	peak	V	1.5	196
4882	41.79	-4.14	37.65	54	-16.35	AVG	V	1.5	254
7323	51.41	0.56	51.97	74	-22.03	peak	V	1.5	77
7323	38.32	0.56	38.88	54	-15.12	AVG	V	1.5	299

Test mode:		Transmitting		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant Pol	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2480	99.38	-9.23	90.15	114	-23.85	peak	H	1.5	76
2480	96.32	-9.23	87.09	94	-6.91	AVG	H	1.5	138
2483.5	59.82	-9.29	50.53	74	-23.47	Peak	H	1.5	27
2483.5	45.40	-9.29	36.11	54	-17.89	AVG	H	1.5	174
4960	57.14	-4.03	53.11	74	-20.89	peak	H	1.5	291
4960	42.30	-4.03	38.27	54	-15.73	AVG	H	1.5	30
7440	53.62	1.68	55.30	74	-18.70	peak	H	1.5	47
7440	35.77	1.68	37.45	54	-16.55	AVG	H	1.5	219
2480	95.95	-9.23	86.72	114	-27.28	peak	V	1.5	68
2480	94.47	-9.23	85.24	94	-8.76	AVG	V	1.5	202
2483.5	61.99	-9.29	52.70	74	-21.30	peak	V	1.5	144
2483.5	43.24	-9.29	33.95	54	-20.05	AVG	V	1.5	17
4960	56.54	-4.03	52.51	74	-21.49	peak	V	1.5	145
4960	41.65	-4.03	37.62	54	-16.38	AVG	V	1.5	264
7440	52.49	1.68	54.17	74	-19.83	peak	V	1.5	148
7440	36.05	1.68	37.73	54	-16.27	AVG	V	1.5	271

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz,The disturbance above 10GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

5.4 20dB Bandwidth

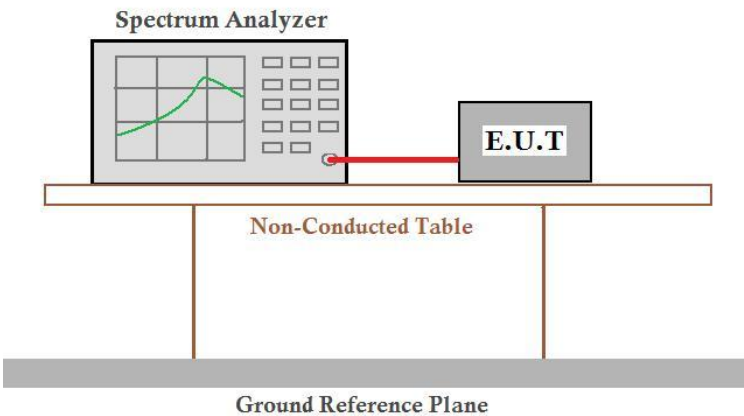
Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2020
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Mode:	Transmitting with GFSK modulation.
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	0.93	Pass
Middle	0.94	Pass
Highest	0.94	Pass


Test plot as follows:

Test channel: Lowest

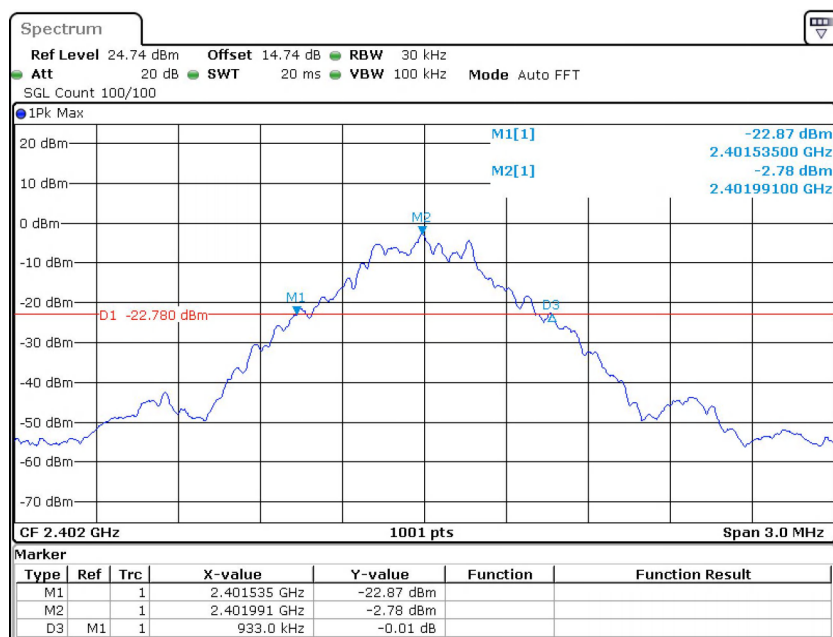


Date: 27.OCT.2025 09:40:41

Test channel: Middle

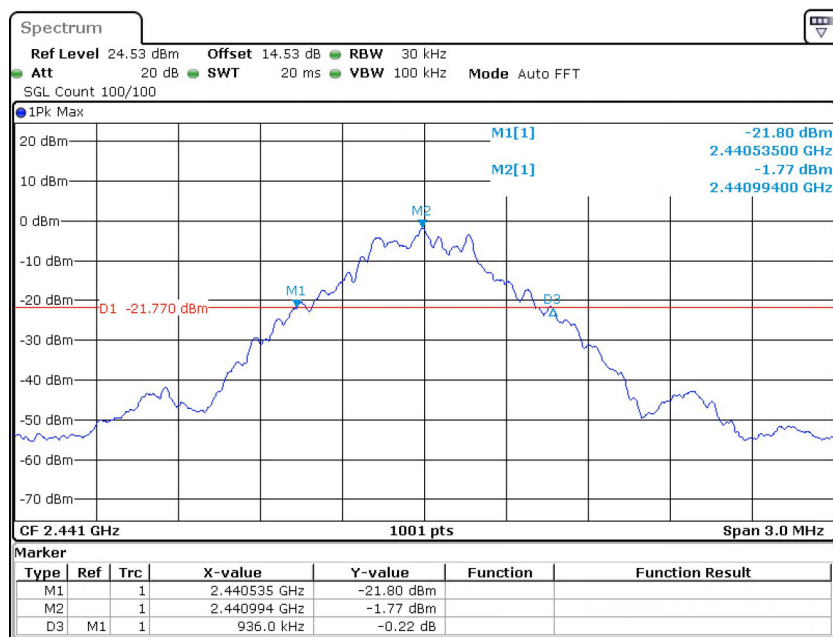

Date: 27.OCT.2025 09:41:55

Test channel: Highest

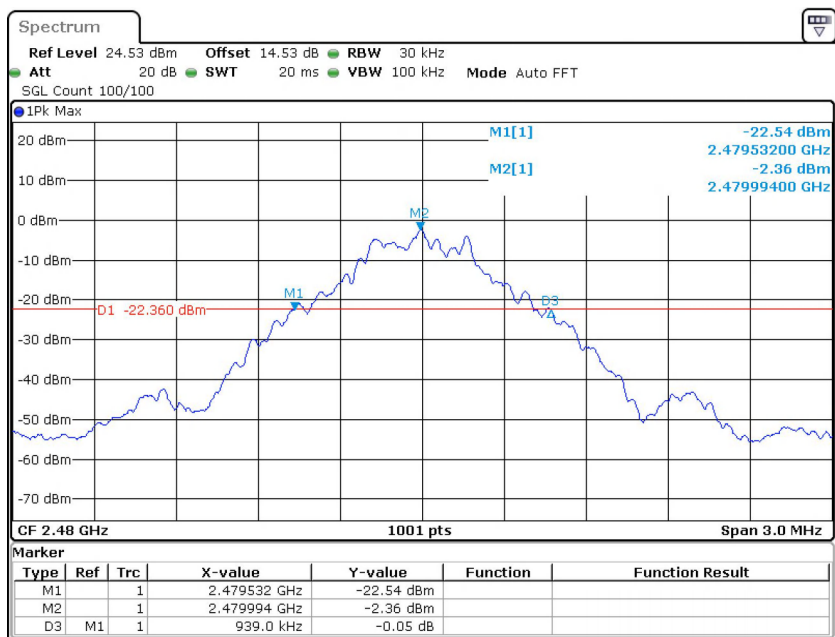


Date: 27.OCT.2025 09:42:42


6 Photographs

6.1 Radiated Emission Test Setup


9kHz~30MHz

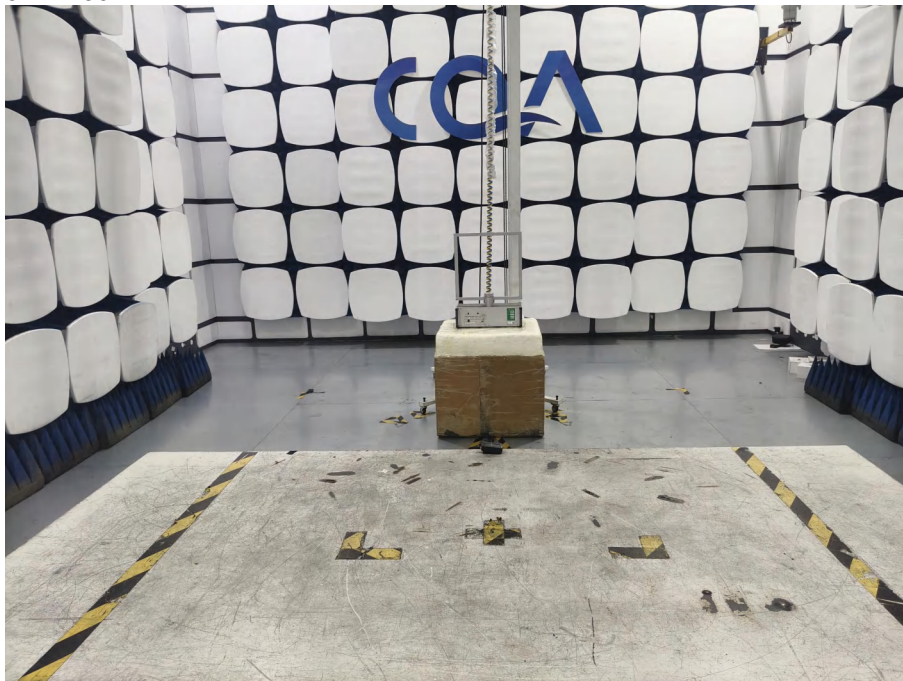

30MHz~1GHz:

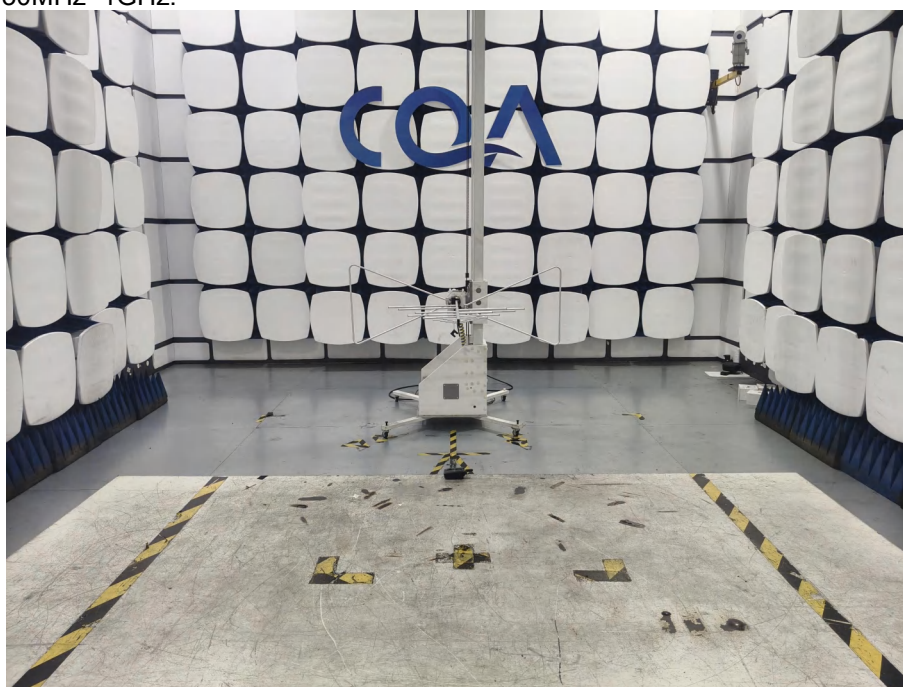

Above 1GHz:

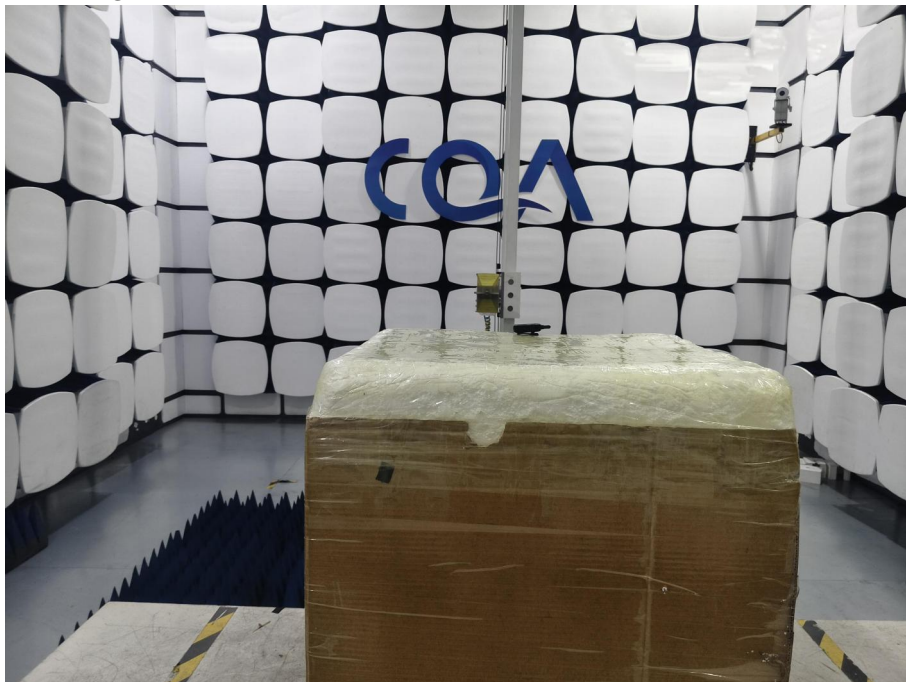

6.2 Conducted Emission Test Setup




6.3 EUT Constructional Details









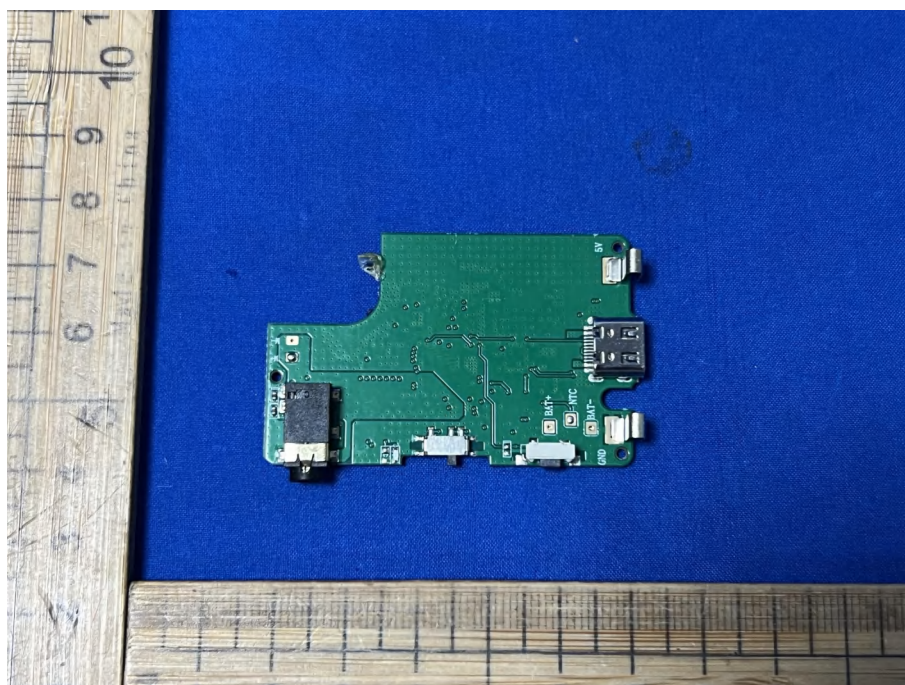



*** END OF REPORT ***