



Attachment C

(Photo documentation of the test set-up)

Type / Model Name : RRU 1400

Product Description : RFID UHF Reader 902-928 MHz

Applicant : Kathrein Sachsen GmbH

Address : Lindenstrasse 3

09241 Mühlau, Germany

Manufacturer : Kathrein Sachsen GmbH

Address : Lindenstrasse 3

09241 Mühlau, Germany

according to

File No. :	80086331	01. September 2021 Date of issue
-------------------	-----------------	-------------------------------------

The Attachment A merely corresponds to the test sample.
It is not permitted to copy extracts of these test results
without the written permission of the test laboratory.

Contents

1	<u>Photo documentation of the test set-up</u>	3
1.1	Conducted Emission:	3
1.2	20 dB bandwidth:	6
1.3	Maximum peak conducted output power:	6
1.4	Spurious RF conducted emission:	7
1.5	Spurious radiated emissions:	7
1.6	Hopping Sequence:	10
1.7	Equal hopping frequency use	10
1.8	Dwell time	11
1.9	Channel separation	11
1.10	Quantity of hopping channel	12


1 Photo documentation of the test set-up

1.1 Conducted Emission:


Antenna 52010083



Antenna 52010334

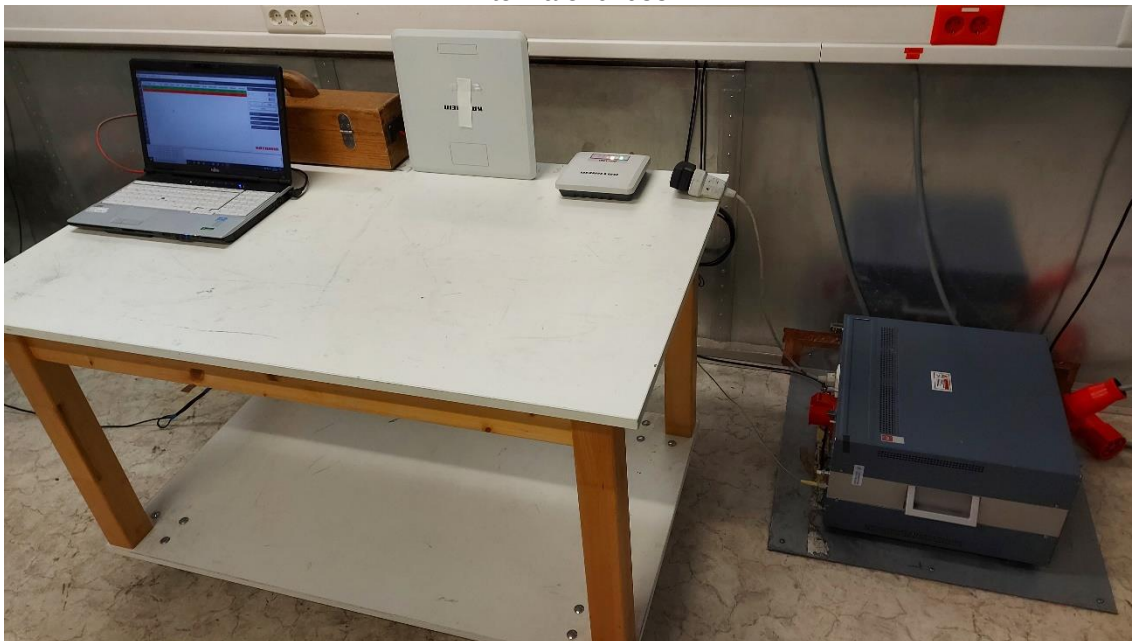

Antenna 52010424

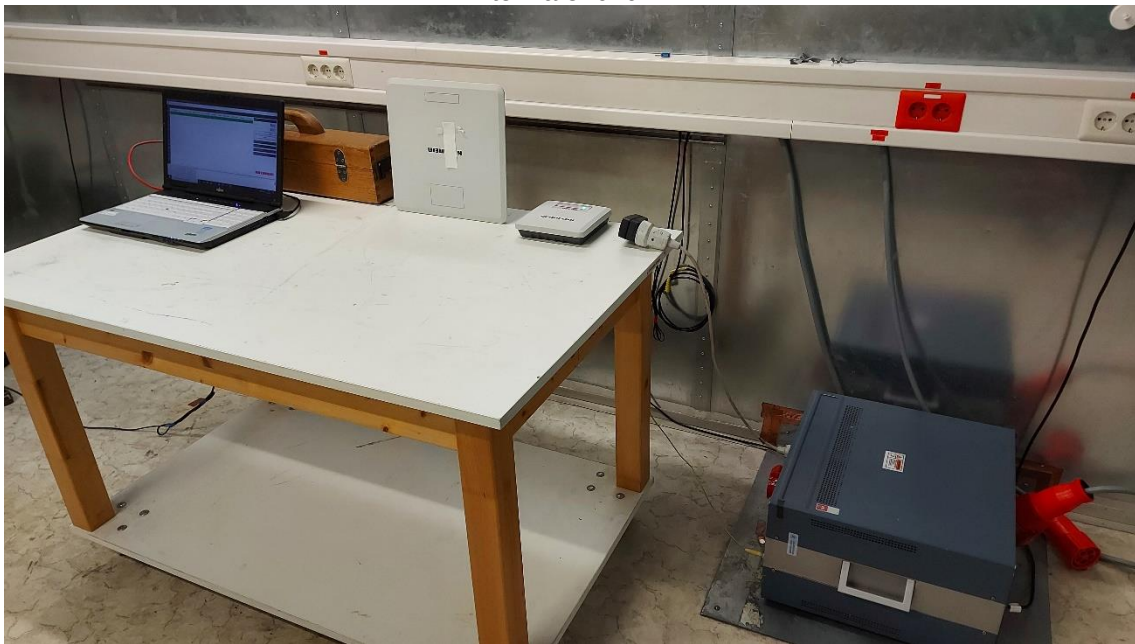

Antenna 52010087



Antenna 52010252




Antenna 52010252 – EuT powered via PoE



1.2 20 dB bandwidth:




1.3 Maximum peak conducted output power:

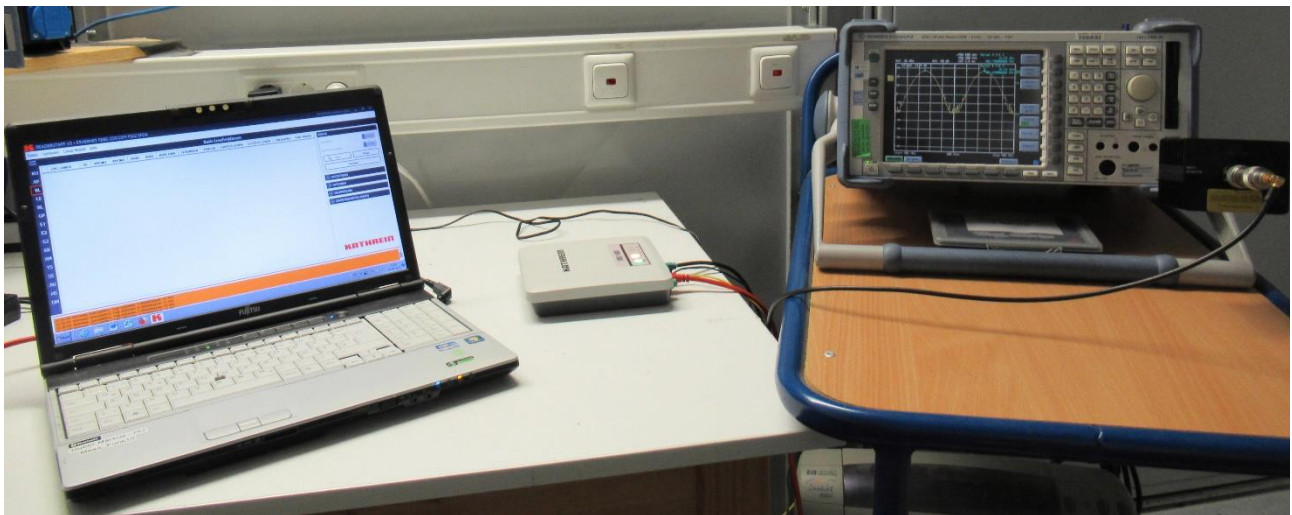


1.4 Spurious RF conducted emission:




1.5 Spurious radiated emissions:

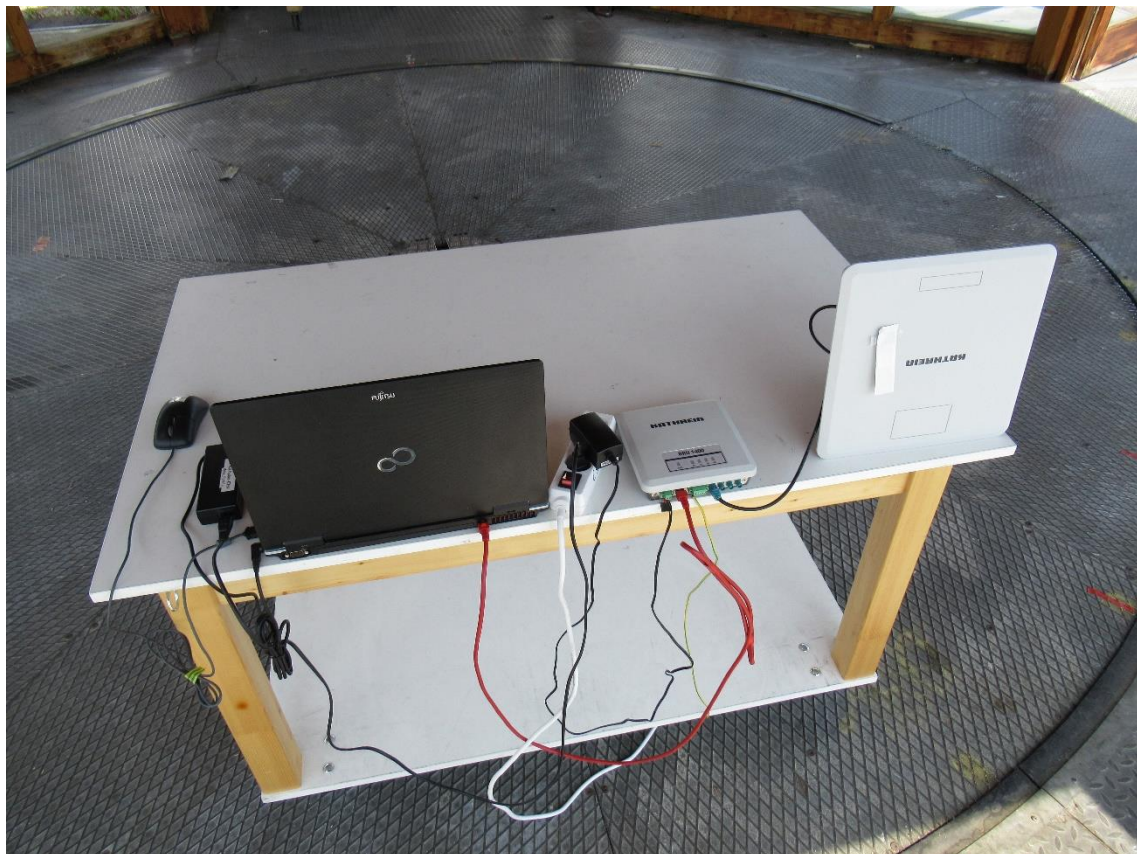




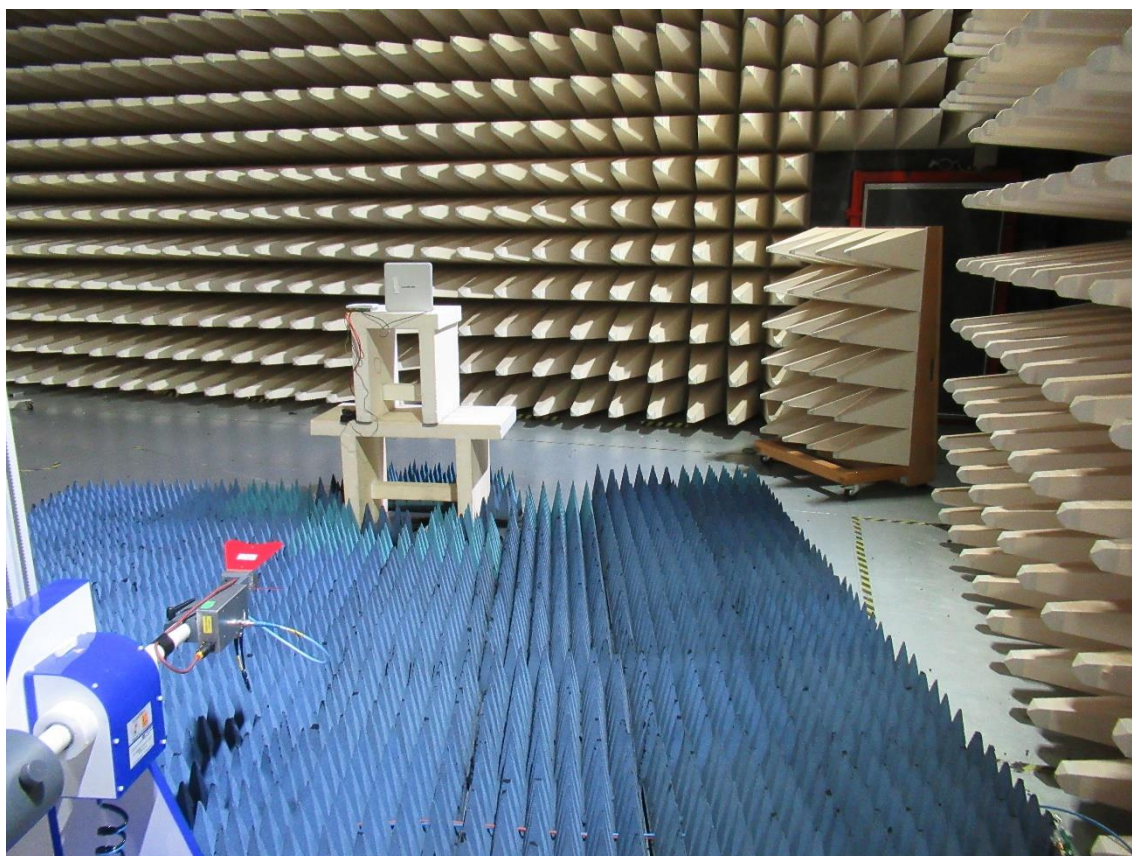


1.6 Hopping Sequence:

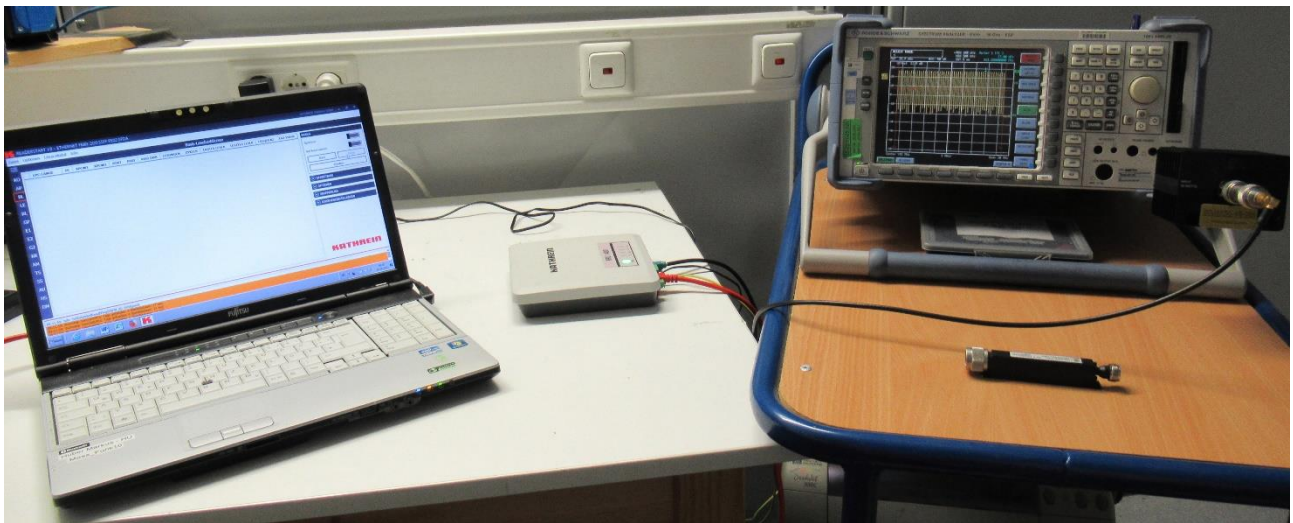


1.7 Equal hopping frequency use

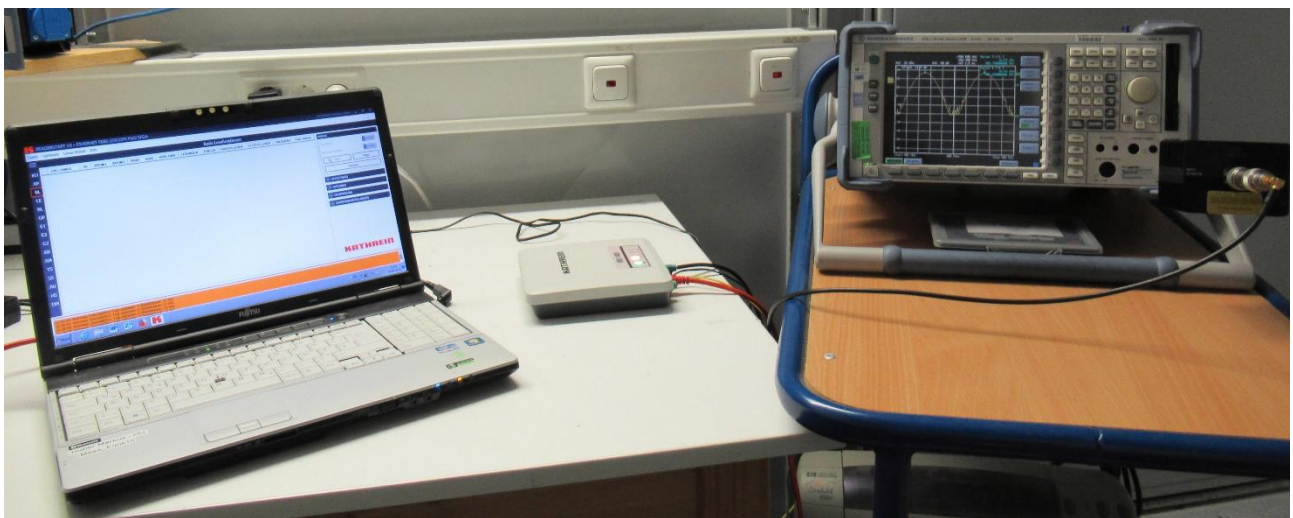

1.8 Dwell time

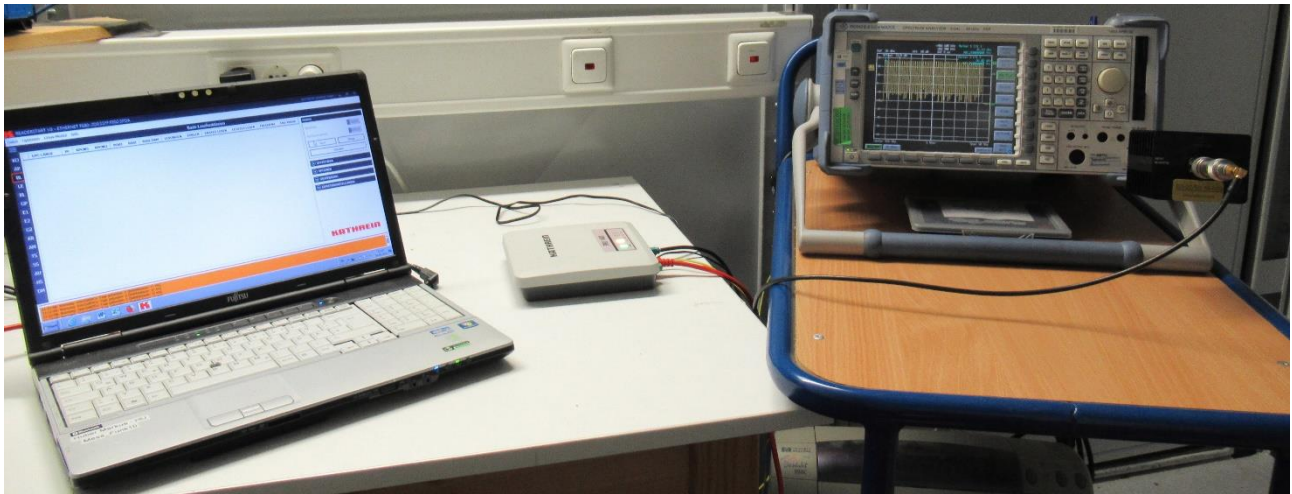

1.9 Channel separation

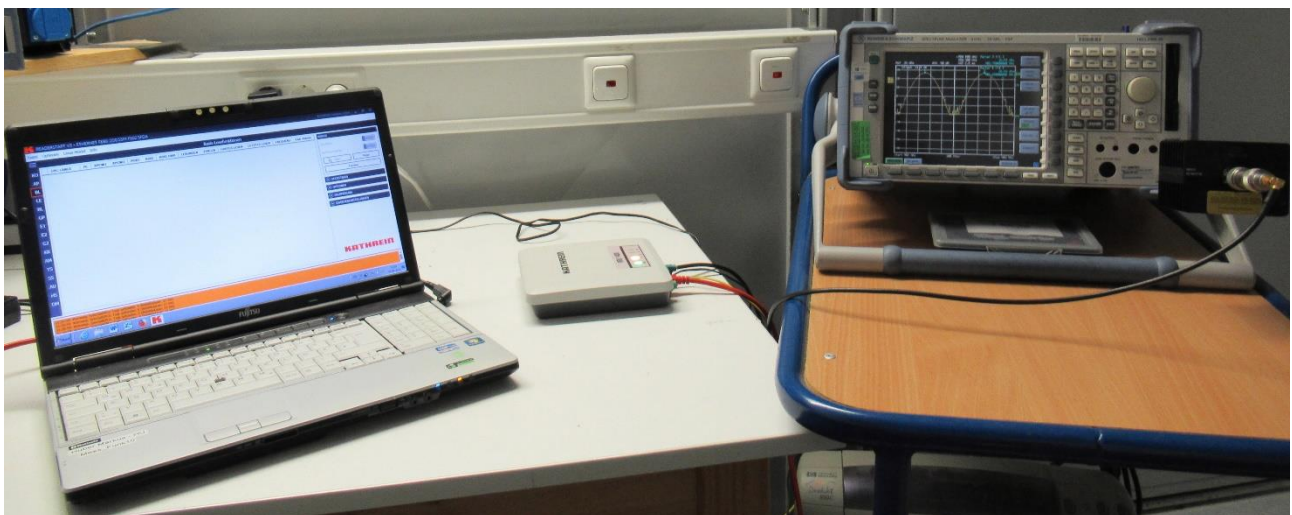

1.10 Quantity of hopping channel

