

6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 D01v03r03


1. RBW = 1MHz.
2. VBW $\geq 3 \times$ RBW.
3. Detector = RMS, if span/(# of points in sweep) $\leq$ (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (*i.e.*, RMS).
 - As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

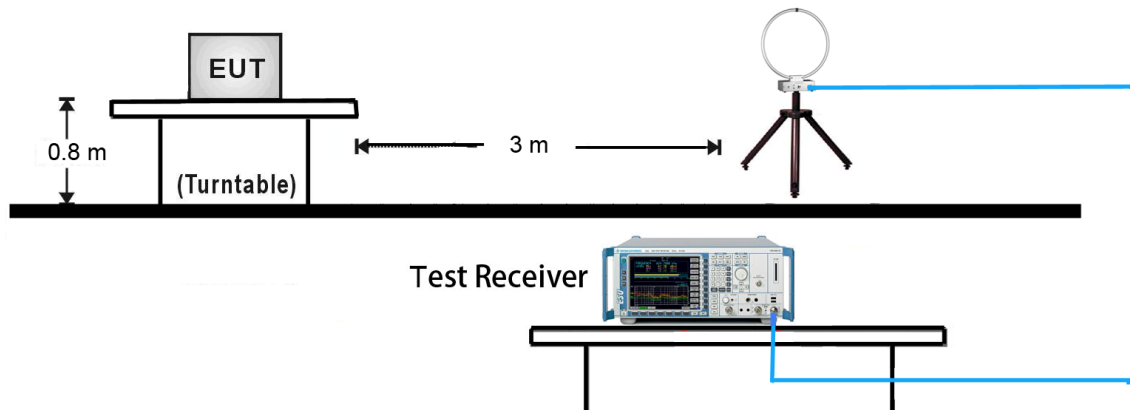

30MHz ~ 1GHz Test Setup:

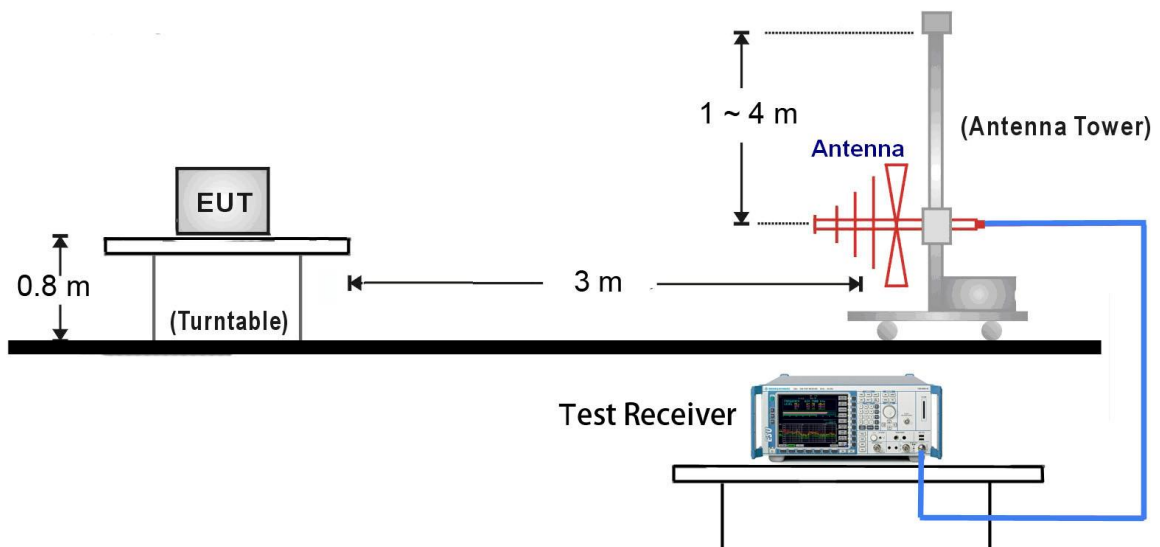

1GHz ~ 25GHz Test Setup:

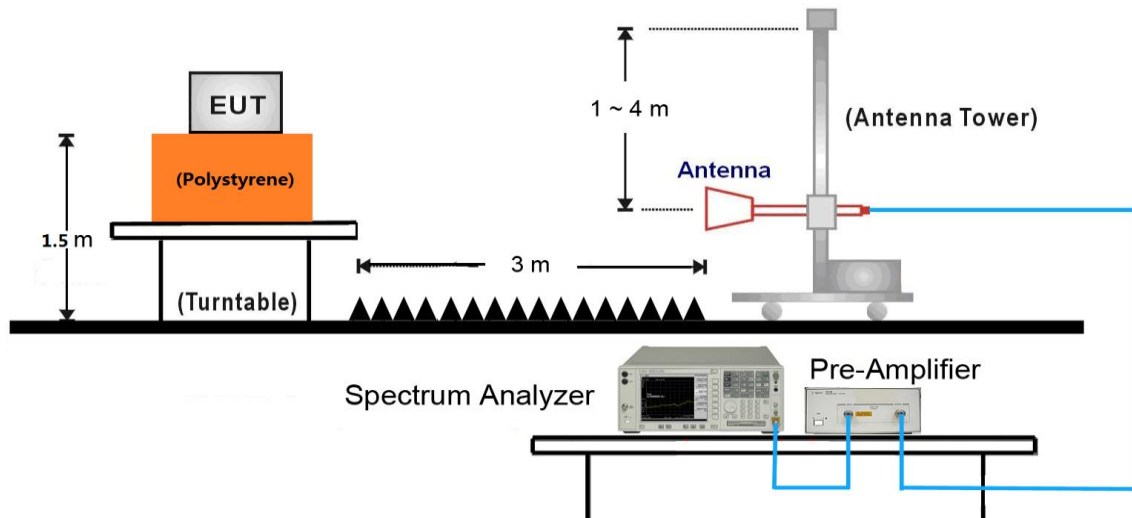

7.6.5. Test Result

Test Mode:	802.11b	Test Site:	AC1
Test Channel:	01	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4835.4	37.6	2.7	40.3	74.0	-33.7	Peak	Horizontal
*	6245.0	36.9	4.7	41.6	85.8	-44.2	Peak	Horizontal
	9148.6	34.9	9.8	44.7	74.0	-29.3	Peak	Horizontal
*	9648.0	36.5	11.0	47.5	85.8	-38.3	Peak	Horizontal
	4826.3	38.0	2.7	40.7	74.0	-33.3	Peak	Vertical
*	6749.3	36.8	5.7	42.5	85.8	-43.3	Peak	Vertical
	8472.1	36.3	8.2	44.5	74.0	-29.5	Peak	Vertical
*	9671.3	35.7	10.9	46.6	85.8	-39.2	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (105.8dBμV/m). Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11b	Test Site:	AC1
Test Channel:	06	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4871.0	37.5	2.7	40.2	74.0	-33.8	Peak	Horizontal
*	6241.8	36.9	4.7	41.6	85.9	-44.3	Peak	Horizontal
	8471.6	36.1	8.2	44.3	74.0	-29.7	Peak	Horizontal
*	9682.6	35.5	10.9	46.4	85.9	-39.5	Peak	Horizontal
	4873.7	37.4	2.7	40.1	74.0	-33.9	Peak	Vertical
*	6583.7	36.7	6.0	42.7	85.9	-43.2	Peak	Vertical
	8475.9	35.8	8.3	44.1	74.0	-29.9	Peak	Vertical
*	9678.3	35.5	10.9	46.4	85.9	-39.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.9dBμV/m).								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)								
Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11b	Test Site:	AC1
Test Channel:	11	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4861.6	37.3	2.7	40.0	74.0	-34.0	Peak	Horizontal
*	6258.4	36.3	4.8	41.1	85.2	-44.1	Peak	Horizontal
	8477.0	35.4	8.3	43.7	74.0	-30.3	Peak	Horizontal
*	9642.1	36.3	11.0	47.3	85.2	-37.9	Peak	Horizontal
	4872.0	36.9	2.7	39.6	74.0	-34.4	Peak	Vertical
*	6253.3	36.9	4.7	41.6	85.2	-43.6	Peak	Vertical
	8472.3	36.1	8.2	44.3	74.0	-29.7	Peak	Vertical
*	9625.6	35.4	10.9	46.3	85.2	-38.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.2dBμV/m). Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	01	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4872.4	37.1	2.7	39.8	74.0	-34.2	Peak	Horizontal
*	6254.9	36.3	4.7	41.0	82.7	-41.7	Peak	Horizontal
	8357.9	35.1	8.0	43.1	74.0	-30.9	Peak	Horizontal
*	9647.3	35.6	11.0	46.6	82.7	-36.1	Peak	Horizontal
	4842.4	36.8	2.7	39.5	74.0	-34.5	Peak	Vertical
*	6243.6	36.1	4.7	40.8	82.7	-41.9	Peak	Vertical
	8472.6	35.2	8.2	43.4	74.0	-30.6	Peak	Vertical
*	9684.6	35.2	10.9	46.1	82.7	-36.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (102.7dBμV/m).								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)								
Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	06	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4853.4	37.5	2.7	40.2	74.0	-33.8	Peak	Horizontal
*	6253.5	36.5	4.7	41.2	87.5	-46.3	Peak	Horizontal
	8473.2	35.4	8.3	43.7	74.0	-30.3	Peak	Horizontal
*	9653.4	35.2	11.0	46.2	87.5	-41.3	Peak	Horizontal
	4865.4	35.7	2.7	38.4	74.0	-35.6	Peak	Vertical
*	6532.9	35.0	5.9	40.9	87.5	-46.6	Peak	Vertical
	8347.2	35.4	8.0	43.4	74.0	-30.6	Peak	Vertical
*	9653.2	34.3	11.0	45.3	87.5	-42.2	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (107.5dBμV/m).								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)								
Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11g	Test Site:	AC1
Test Channel:	11	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4872.3	36.4	2.7	39.1	74.0	-34.9	Peak	Horizontal
*	6253.9	35.8	4.7	40.5	84.3	-43.8	Peak	Horizontal
	8462.9	35.7	8.2	43.9	74.0	-30.1	Peak	Horizontal
*	9647.6	34.9	11.0	45.9	84.3	-38.4	Peak	Horizontal
	4876.9	36.8	2.7	39.5	74.0	-34.5	Peak	Vertical
*	6587.9	36.9	6.0	42.9	84.3	-41.4	Peak	Vertical
	8471.6	36.2	8.2	44.4	74.0	-29.6	Peak	Vertical
*	9679.6	35.8	10.9	46.7	84.3	-37.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (104.3dBμV/m).								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)								
Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11n-HT20	Test Site:	AC1
Test Channel:	01	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4871.6	36.5	2.7	39.2	74.0	-34.8	Peak	Horizontal
*	6383.0	35.9	5.3	41.2	85.3	-44.1	Peak	Horizontal
	8215.4	35.9	8.3	44.2	74.0	-29.8	Peak	Horizontal
*	9655.3	34.9	11.0	45.9	85.3	-39.4	Peak	Horizontal
	4871.6	36.4	2.7	39.1	74.0	-34.9	Peak	Vertical
*	6253.4	36.0	4.7	40.7	85.3	-44.6	Peak	Vertical
	8410.3	35.3	8.1	43.4	74.0	-30.6	Peak	Vertical
*	9685.3	34.7	10.9	45.6	85.3	-39.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.3dBμV/m).								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)								
Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11n-HT20	Test Site:	AC1
Test Channel:	06	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4872.3	36.8	2.7	39.5	74.0	-34.5	Peak	Horizontal
*	6255.9	35.6	4.7	40.3	87.8	-47.5	Peak	Horizontal
	8245.2	35.5	8.1	43.6	74.0	-30.4	Peak	Horizontal
*	9658.6	35.1	11.0	46.1	87.8	-41.7	Peak	Horizontal
	4872.3	36.8	2.7	39.5	74.0	-34.5	Peak	Vertical
*	6589.6	36.1	6.0	42.1	87.8	-45.7	Peak	Vertical
	8421.3	34.7	8.2	42.9	74.0	-31.1	Peak	Vertical
*	9633.3	35.8	11.0	46.8	87.8	-41.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (107.8dBμV/m).								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)								
Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	802.11n-HT20	Test Site:	AC1
Test Channel:	11	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4872.4	36.3	2.7	39.0	74.0	-35.0	Peak	Horizontal
*	6254.3	35.8	4.7	40.5	84.1	-43.6	Peak	Horizontal
	8453.3	35.4	8.2	43.6	74.0	-30.4	Peak	Horizontal
*	9671.2	35.0	10.9	45.9	84.1	-38.2	Peak	Horizontal
	4871.2	36.6	2.7	39.3	74.0	-34.7	Peak	Vertical
*	6148.3	35.4	4.5	39.9	84.1	-44.2	Peak	Vertical
	8248.3	35.4	8.1	43.5	74.0	-30.5	Peak	Vertical
*	9657.2	34.4	11.0	45.4	84.1	-38.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (104.1dBμV/m). Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2015/04/02 - 14:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Worse Case Mode: 802.11g at Channel 2412MHz	

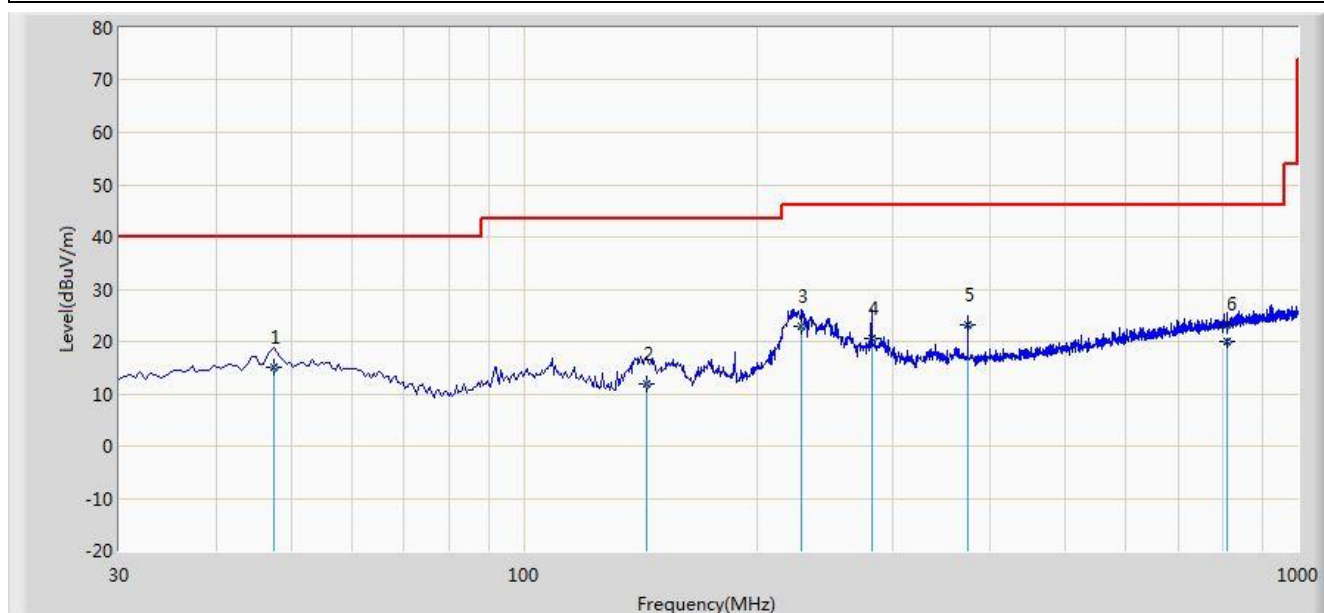


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			47.460	15.196	0.250	-24.804	40.000	14.946	QP
2			143.975	11.766	2.350	-31.734	43.500	9.416	QP
3			228.365	22.942	9.988	-23.058	46.000	12.955	QP
4			281.350	20.497	6.337	-25.503	46.000	14.159	QP
5		*	375.024	23.138	6.985	-22.862	46.000	16.152	QP
6			809.880	23.033	0.150	-22.967	46.000	22.883	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/20 - 13:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Worse Case Mode: 802.11g at Channel 2412MHz	

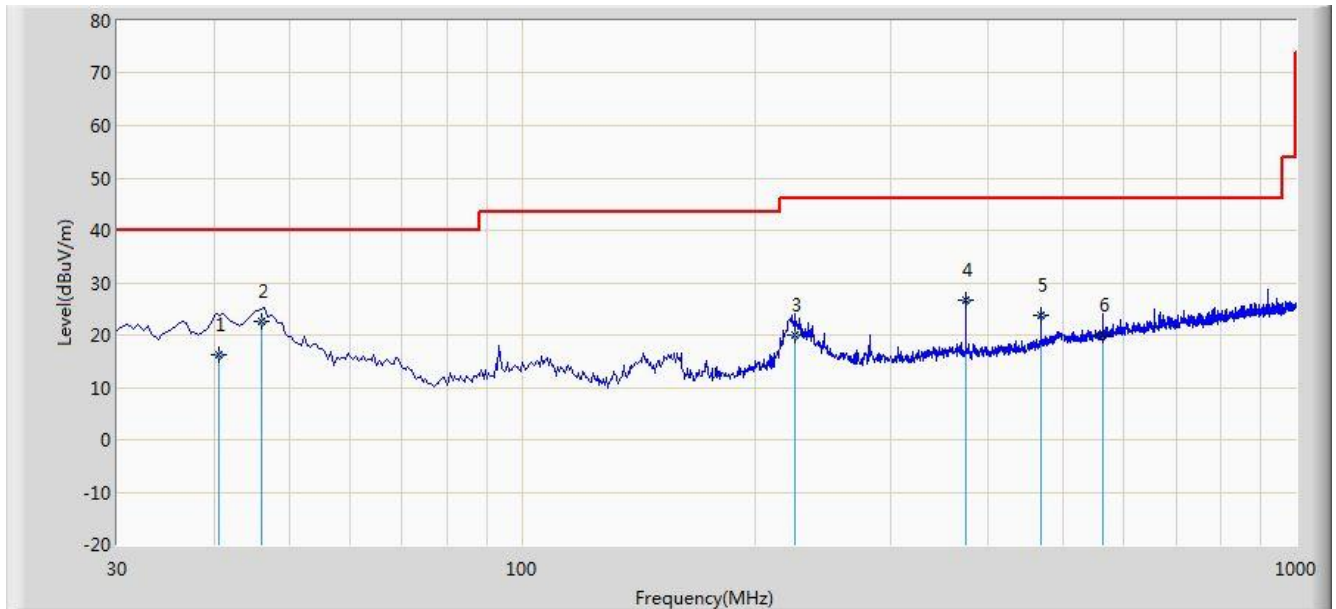


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			40.670	16.321	2.350	-23.679	40.000	13.971	QP
2		*	46.005	22.495	7.525	-17.505	40.000	14.970	QP
3			225.455	19.961	7.140	-26.039	46.000	12.821	QP
4			375.020	26.698	10.545	-19.302	46.000	16.152	QP
5			468.922	23.660	5.974	-22.340	46.000	17.686	QP
6			562.530	20.064	0.755	-25.936	46.000	19.309	QP

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/27 - 15:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: Tablet PC	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

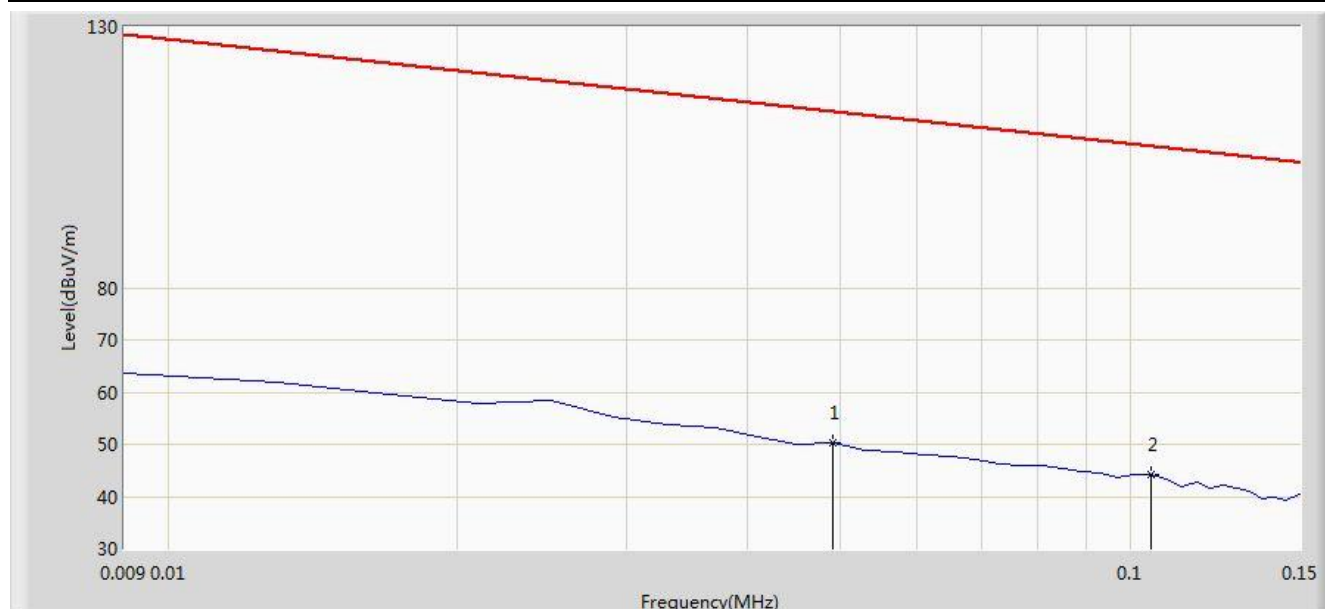


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.049	50.367	29.861	-63.422	113.789	20.505	QP
2		*	0.105	44.143	23.996	-63.029	107.173	20.147	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/27 - 15:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: Tablet PC	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

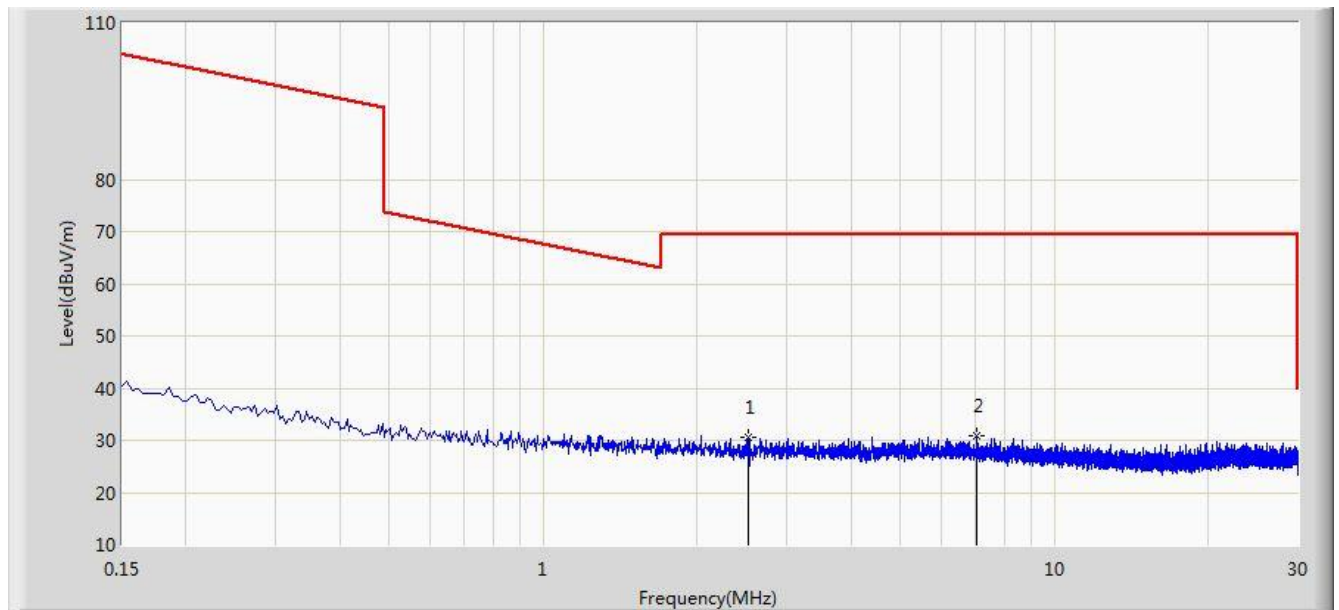


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2.513	30.495	10.336	-39.005	69.500	20.159	QP
2		*	7.041	30.974	10.579	-38.526	69.500	20.395	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/27 - 15:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18 ~ 25GHz.	

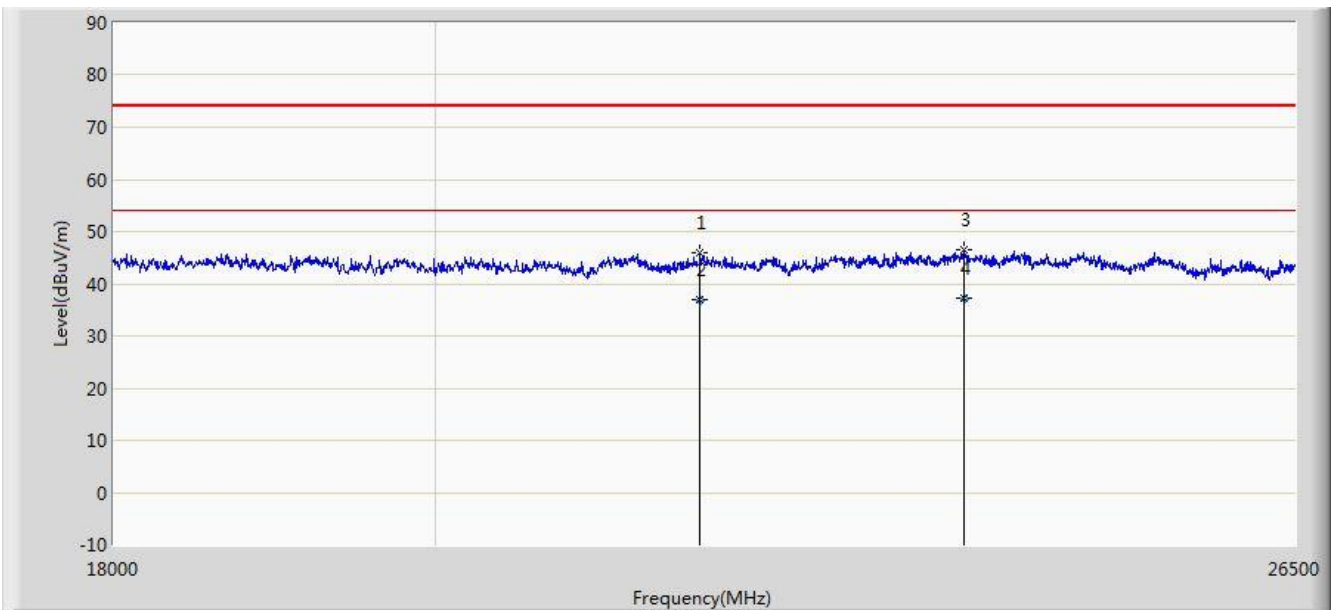


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			21812.250	45.806	29.003	-28.194	74.000	16.803	PK
2			21812.325	36.857	20.054	-17.143	54.000	16.803	AV
3			23775.750	46.455	26.496	-27.545	74.000	19.958	PK
4		*	23775.850	37.113	17.154	-16.887	54.000	19.958	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/03/27 - 15:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18 ~ 25GHz.	

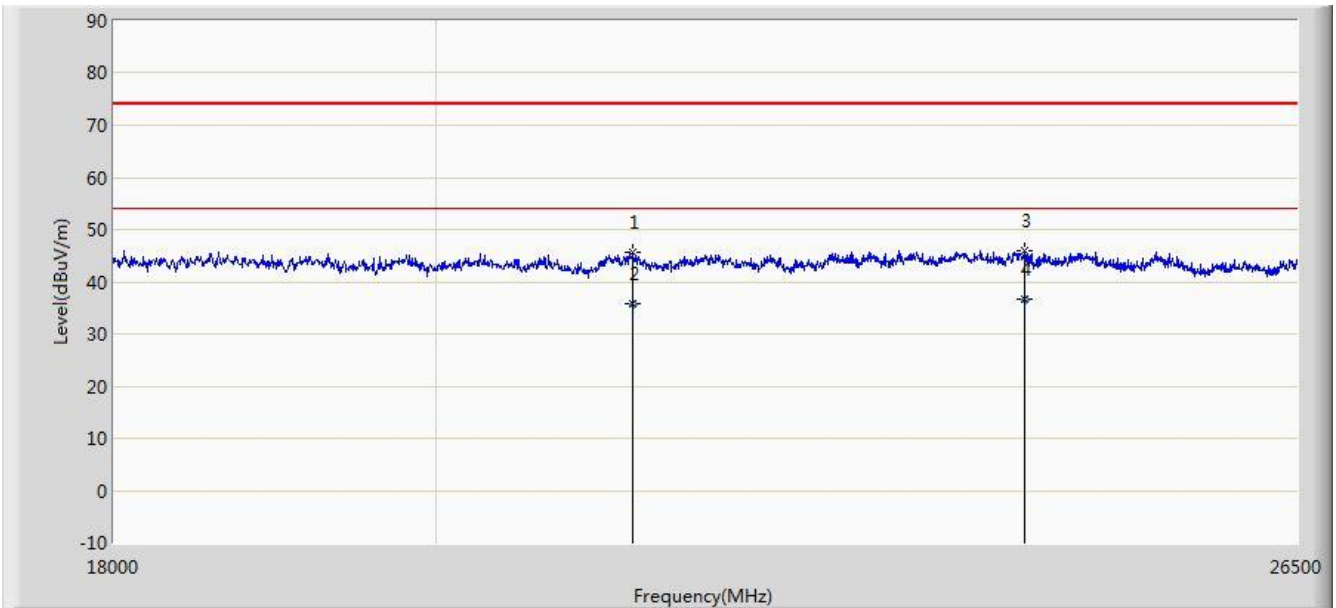

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			21332.000	45.658	28.830	-28.342	74.000	16.828	PK
2		*	21332.020	35.761	18.933	-18.239	54.000	16.828	AV
3			24239.000	46.056	25.484	-27.944	74.000	20.572	PK
4			24239.040	36.783	16.210	-17.217	54.000	20.572	AV


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Result

Site: AC1	Time: 2015/03/26 - 10:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11b	

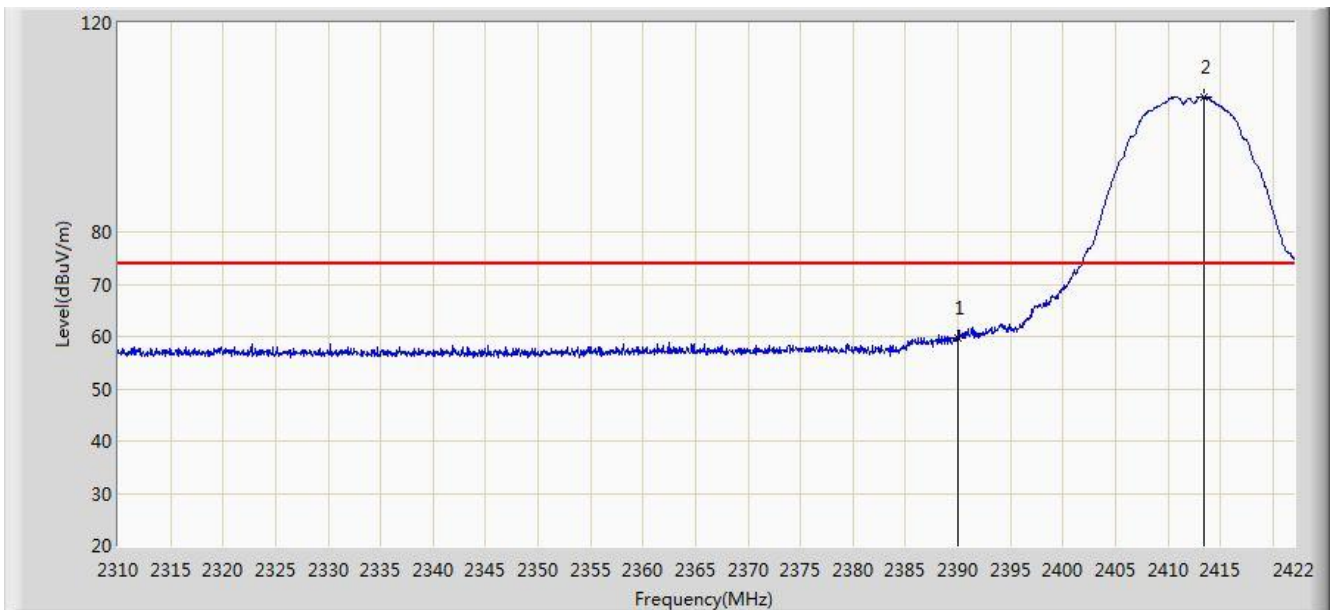


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	59.817	28.614	-14.183	74.000	31.203	PK
2		*	2413.432	105.789	74.622	N/A	N/A	31.168	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11b	

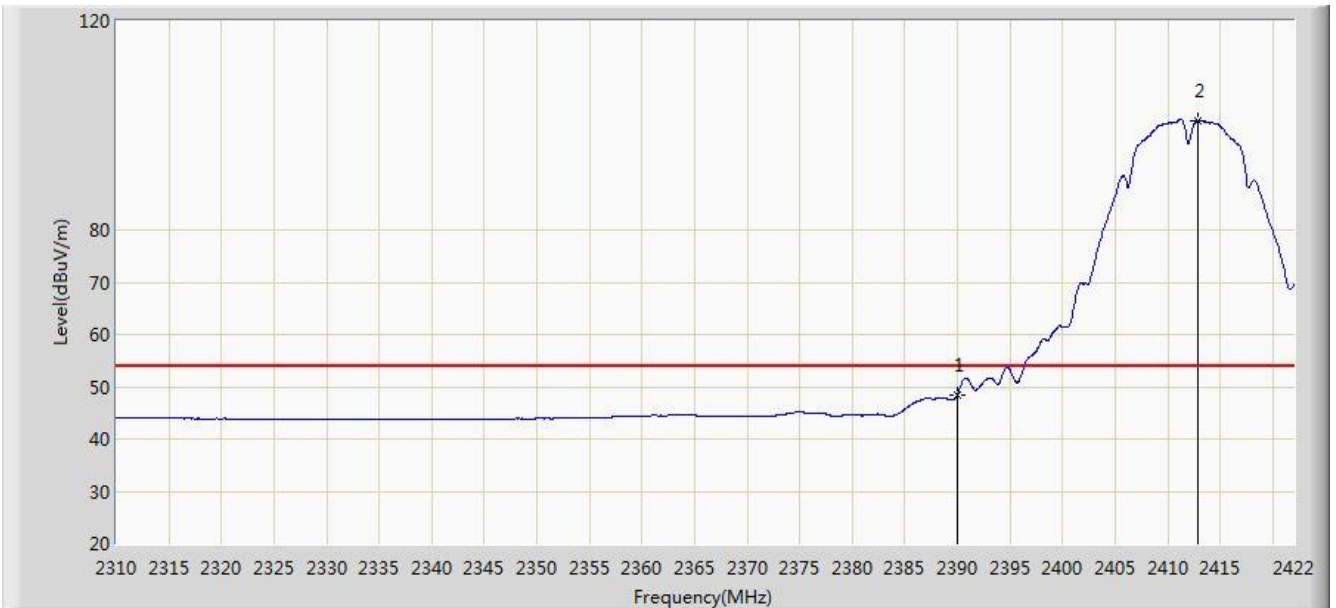


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.521	17.319	-5.479	54.000	31.203	AV
2		*	2412.872	100.926	69.758	N/A	N/A	31.168	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11b	

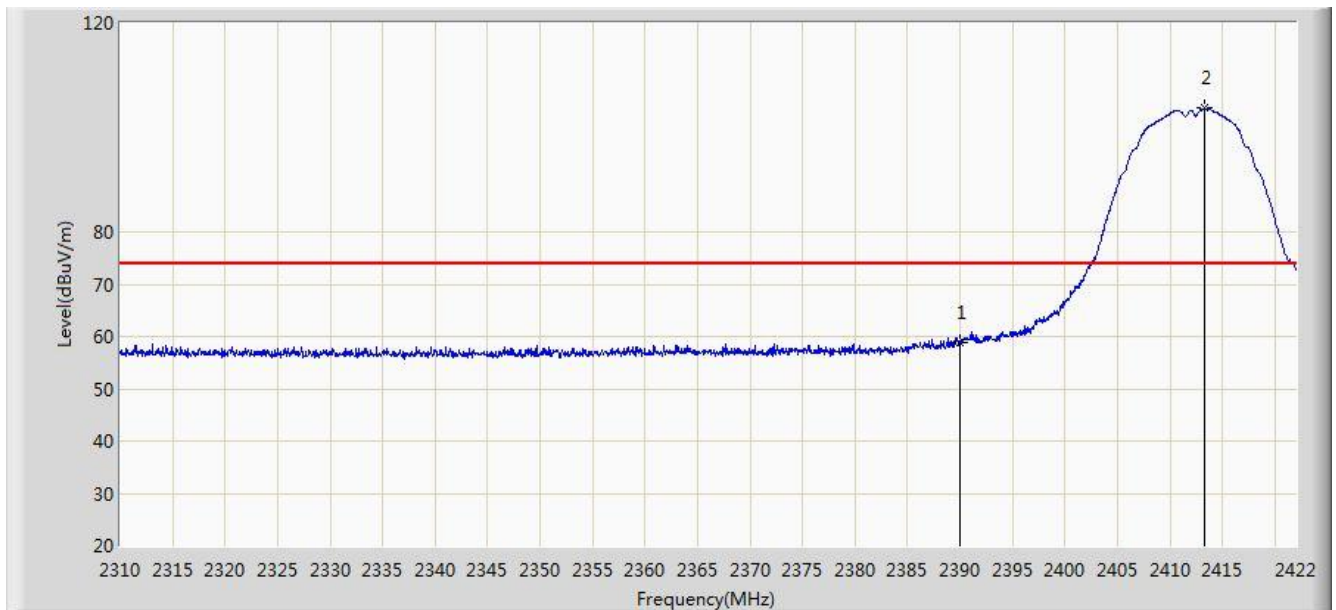


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	58.944	27.741	-15.056	74.000	31.203	PK
2		*	2413.264	103.708	72.541	N/A	N/A	31.167	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11b	

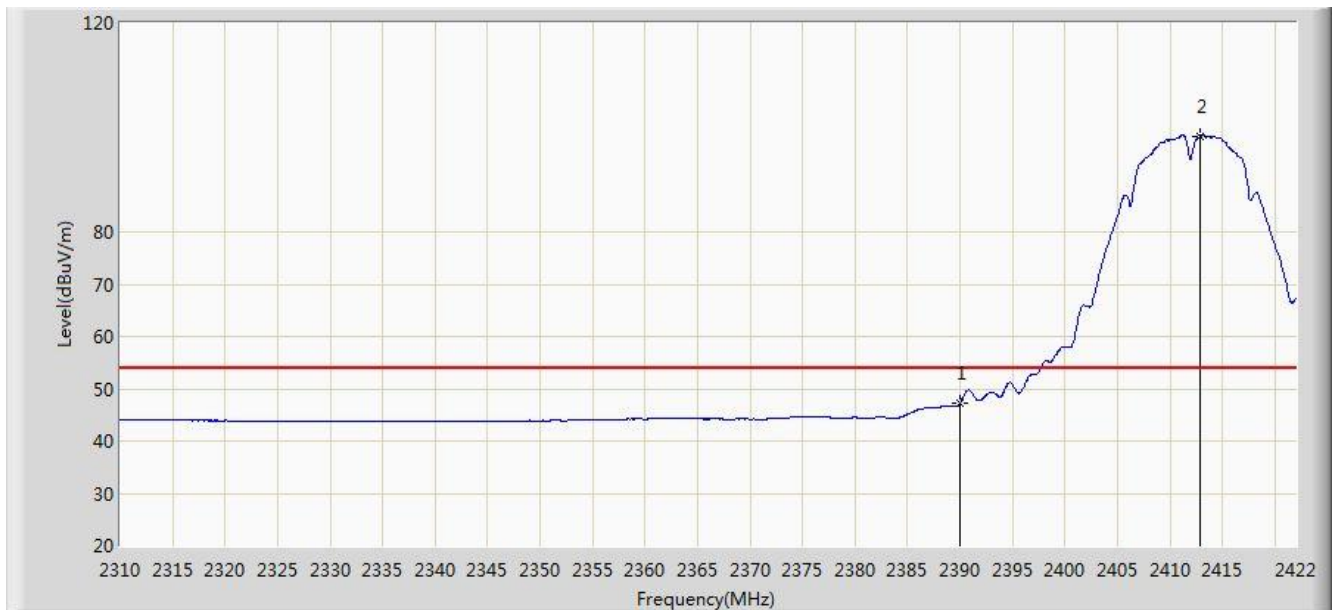


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.309	16.106	-6.691	54.000	31.203	AV
2		*	2412.872	98.401	67.233	N/A	N/A	31.168	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11b	

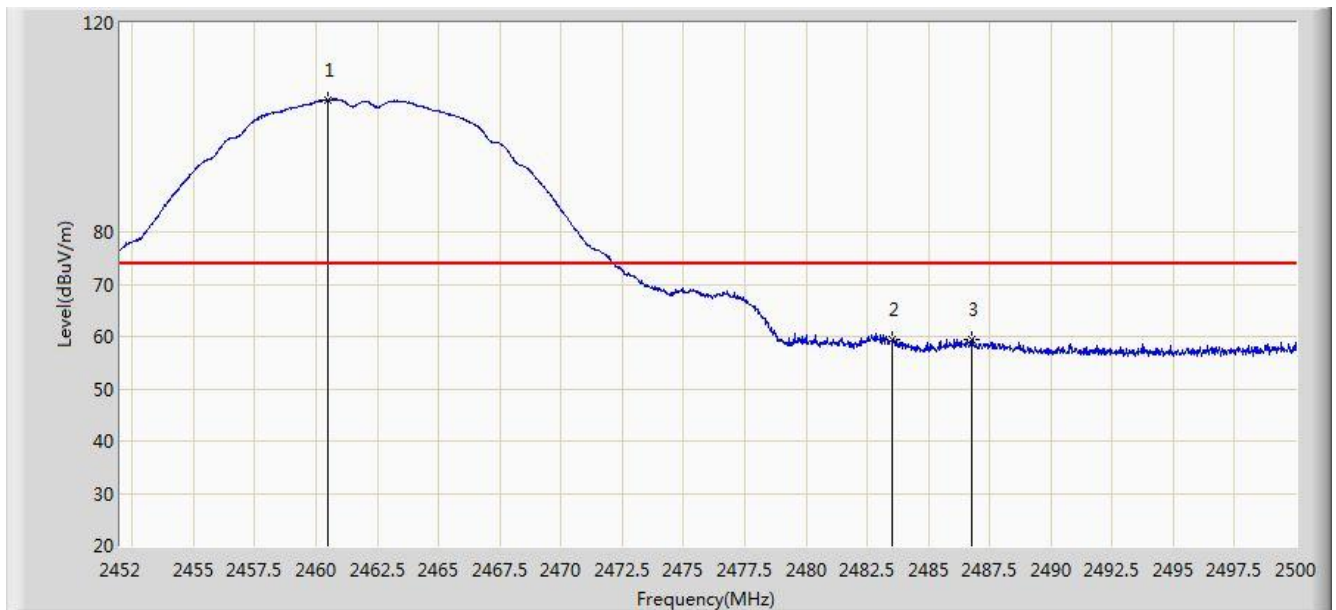

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.496	105.211	74.078	N/A	N/A	31.133	PK
2			2483.500	59.314	28.121	-14.686	74.000	31.194	PK
3			2486.752	59.550	28.352	-14.450	74.000	31.201	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11b	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	100.662	69.528	N/A	N/A	31.134	AV
2			2483.500	49.426	18.233	-4.574	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11b	

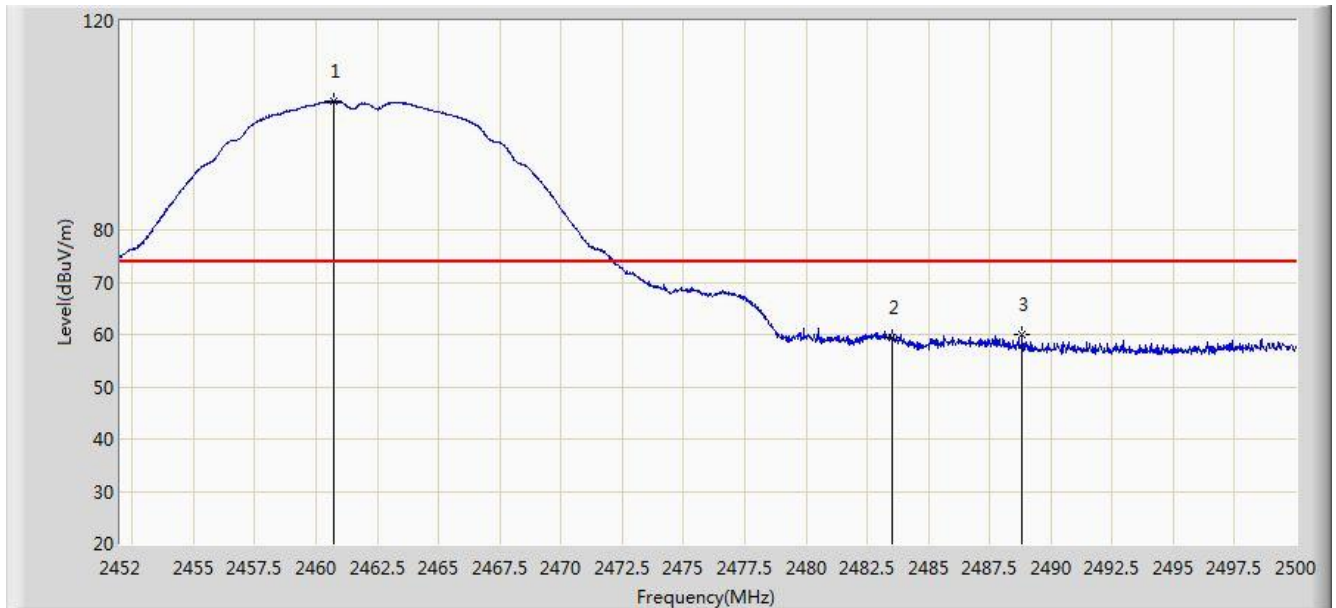

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.712	104.653	73.521	N/A	N/A	31.133	PK
2			2483.500	59.535	28.342	-14.465	74.000	31.194	PK
3			2488.840	60.056	28.855	-13.944	74.000	31.207	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11b	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.240	99.444	68.310	N/A	N/A	31.134	AV
2			2483.500	48.363	17.169	-5.637	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11g	

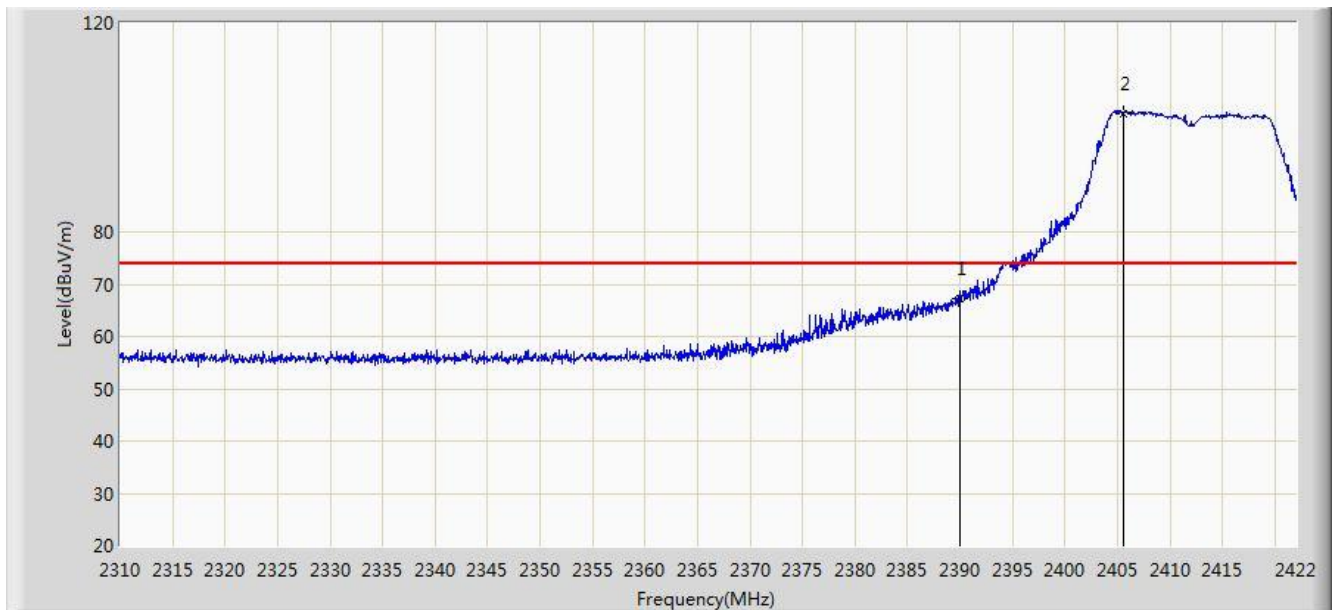


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	67.390	36.187	-6.610	74.000	31.203	PK
2		*	2405.592	102.680	71.501	N/A	N/A	31.179	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11g	

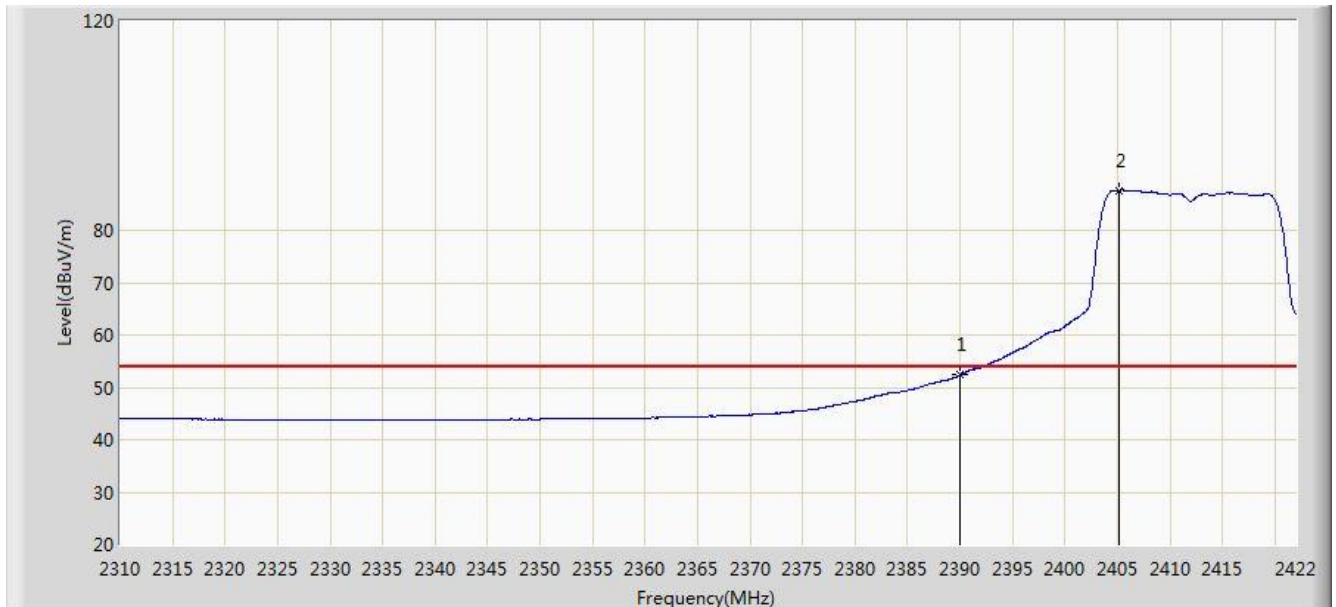


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.321	21.118	-1.679	54.000	31.203	AV
2		*	2405.200	87.660	56.480	N/A	N/A	31.180	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11g	

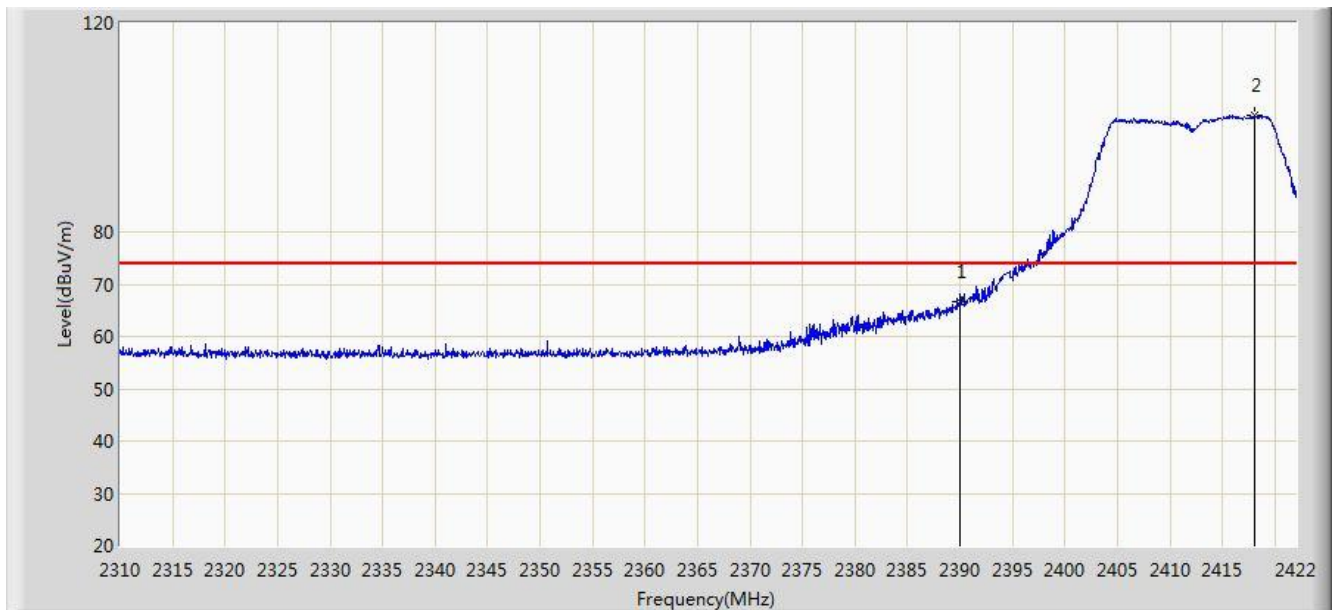


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	66.565	35.362	-7.435	74.000	31.203	PK
2		*	2418.080	102.186	71.027	N/A	N/A	31.159	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11g	

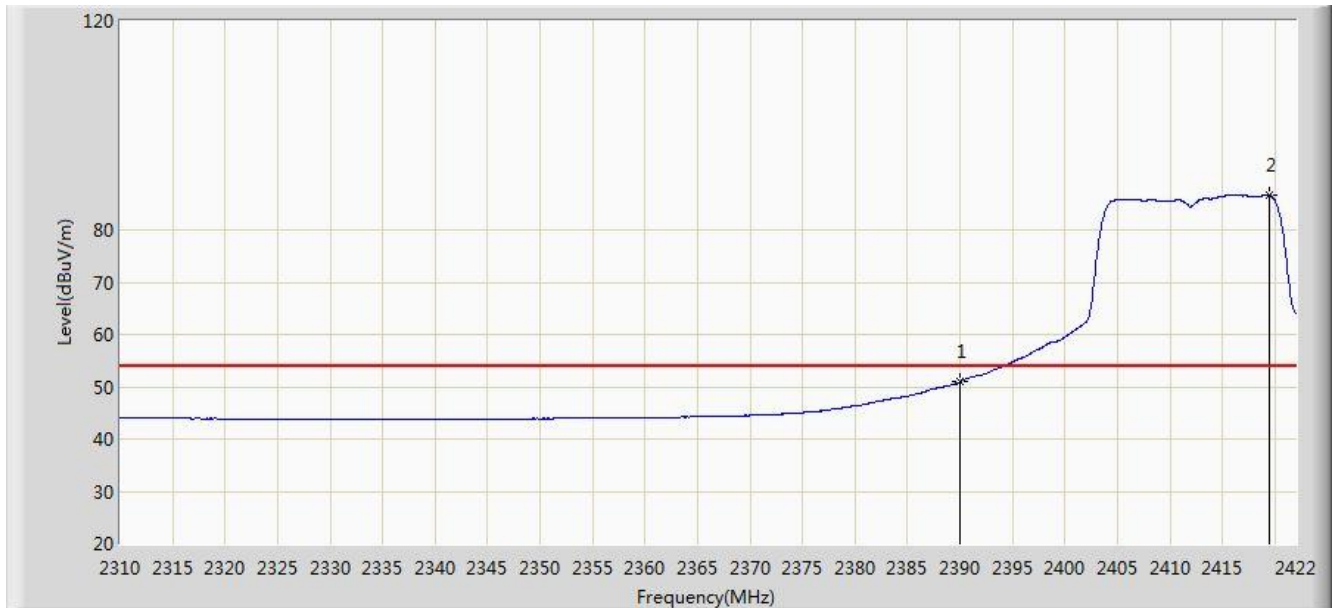


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.936	19.733	-3.064	54.000	31.203	AV
2		*	2419.480	86.725	55.568	N/A	N/A	31.156	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11g	

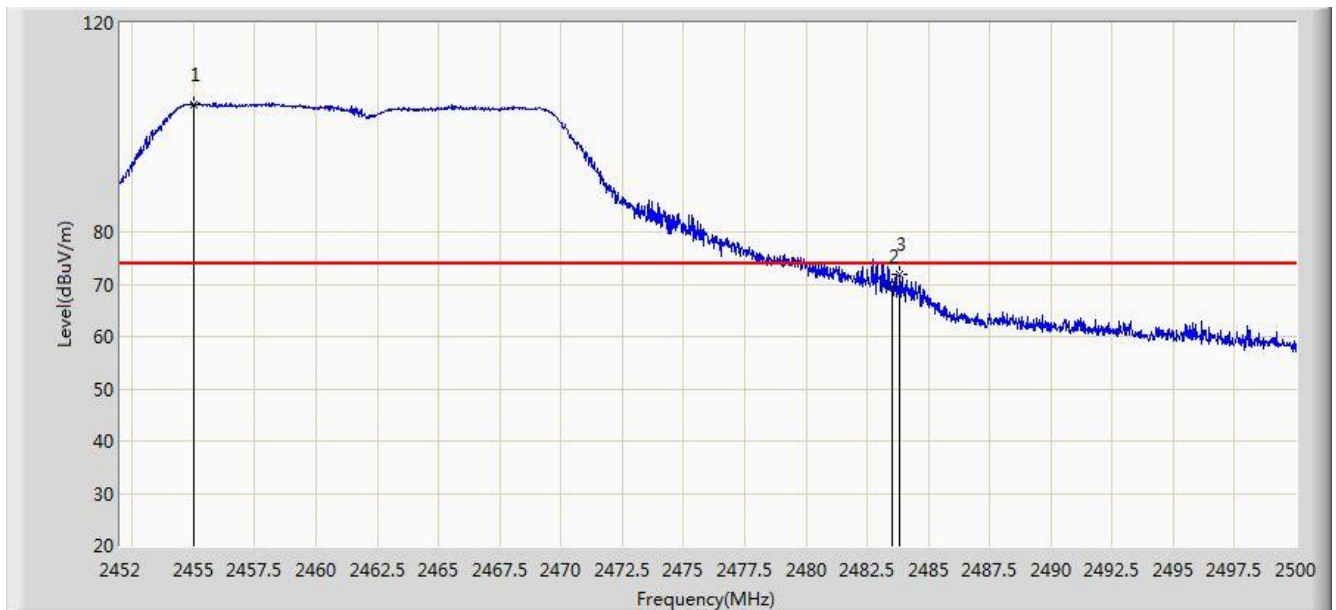


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.024	104.322	73.199	N/A	N/A	31.123	PK
2			2483.500	69.462	38.269	-4.538	74.000	31.194	PK
3			2483.848	71.761	40.567	-2.239	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11g	

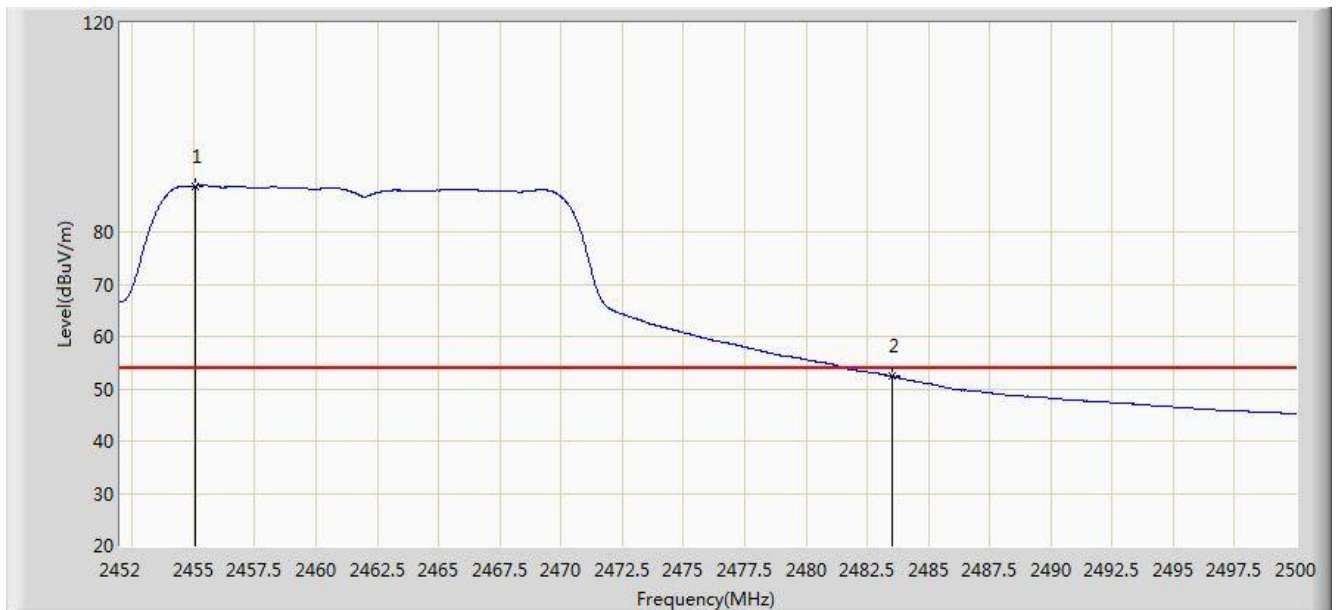


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.096	88.792	57.669	N/A	N/A	31.123	AV
2			2483.500	52.415	21.222	-1.585	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11g	

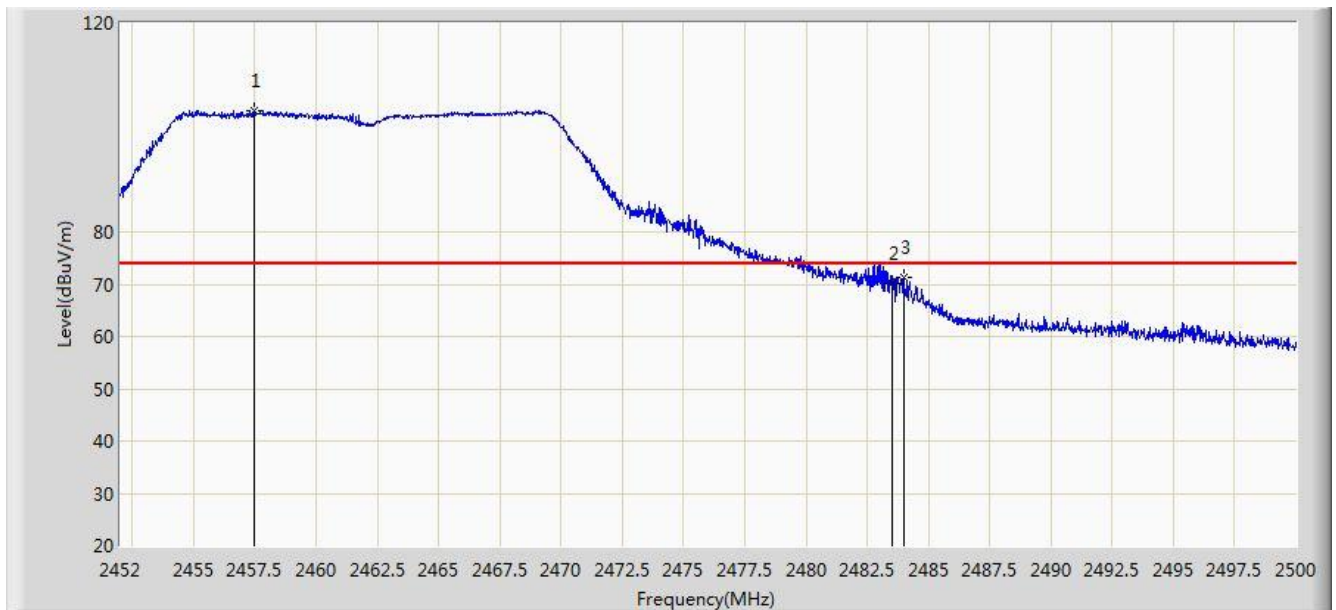


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.448	103.139	72.012	N/A	N/A	31.127	PK
2			2483.500	70.189	38.996	-3.811	74.000	31.194	PK
3			2483.992	71.315	40.120	-2.685	74.000	31.195	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11g	

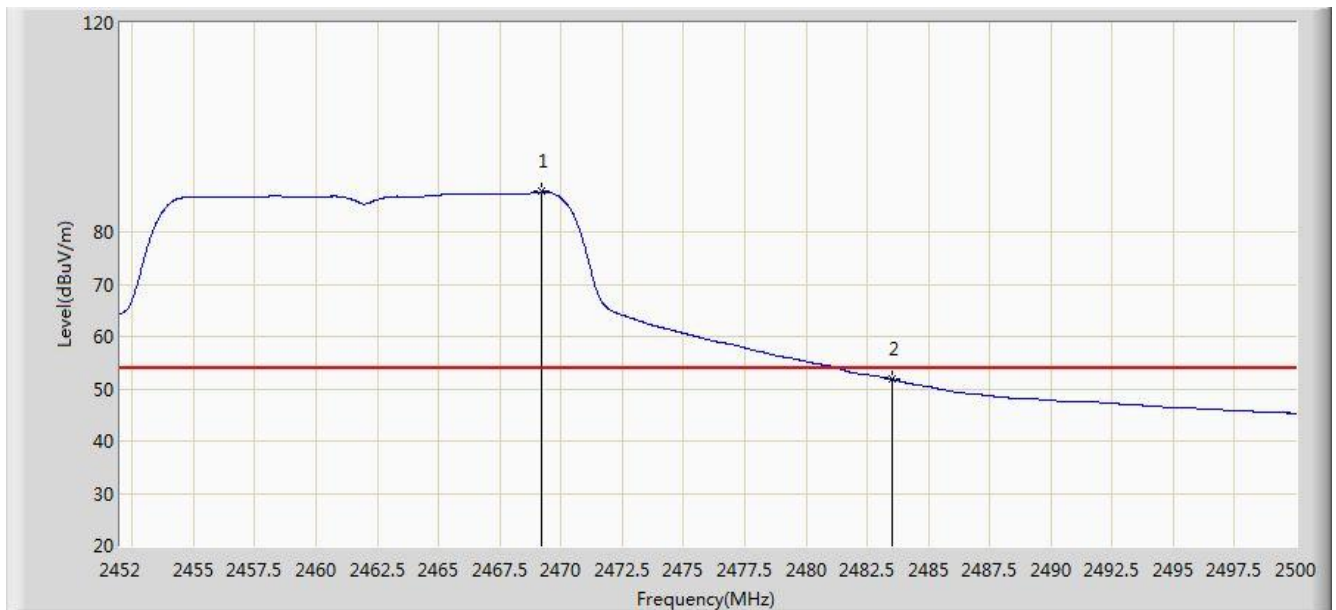


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2469.208	87.687	56.533	N/A	N/A	31.154	AV
2			2483.500	51.835	20.642	-2.165	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11n-HT20	

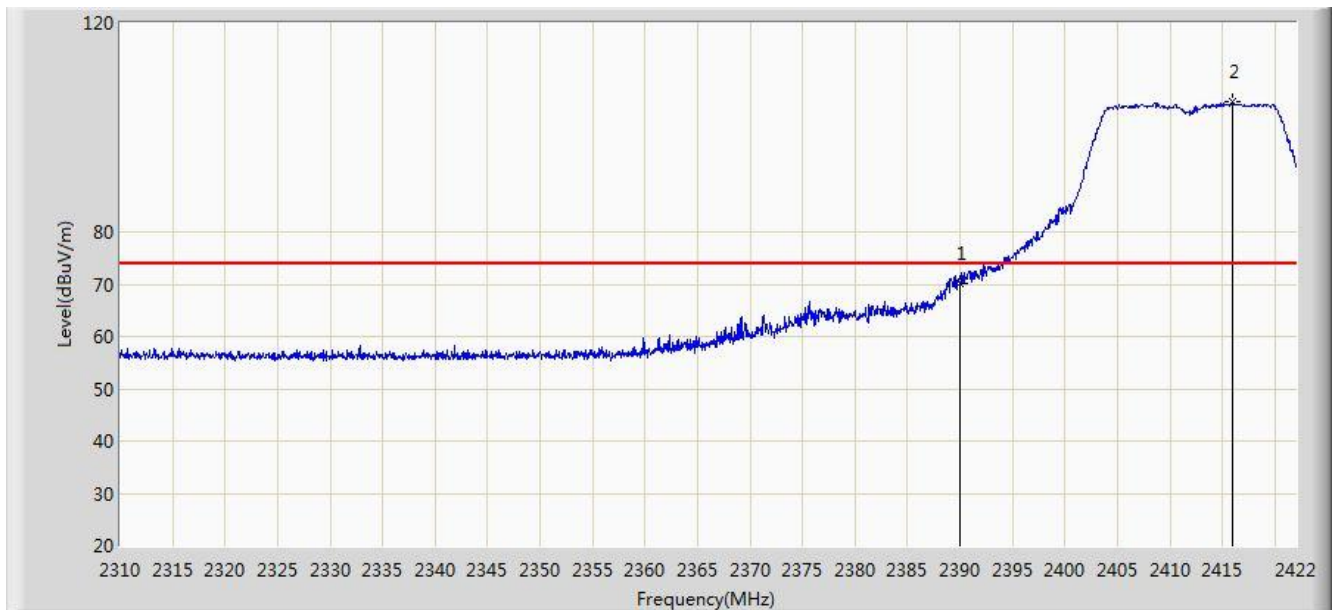


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	70.282	39.079	-3.718	74.000	31.203	PK
2		*	2415.952	105.034	73.871	N/A	N/A	31.163	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11n-HT20	

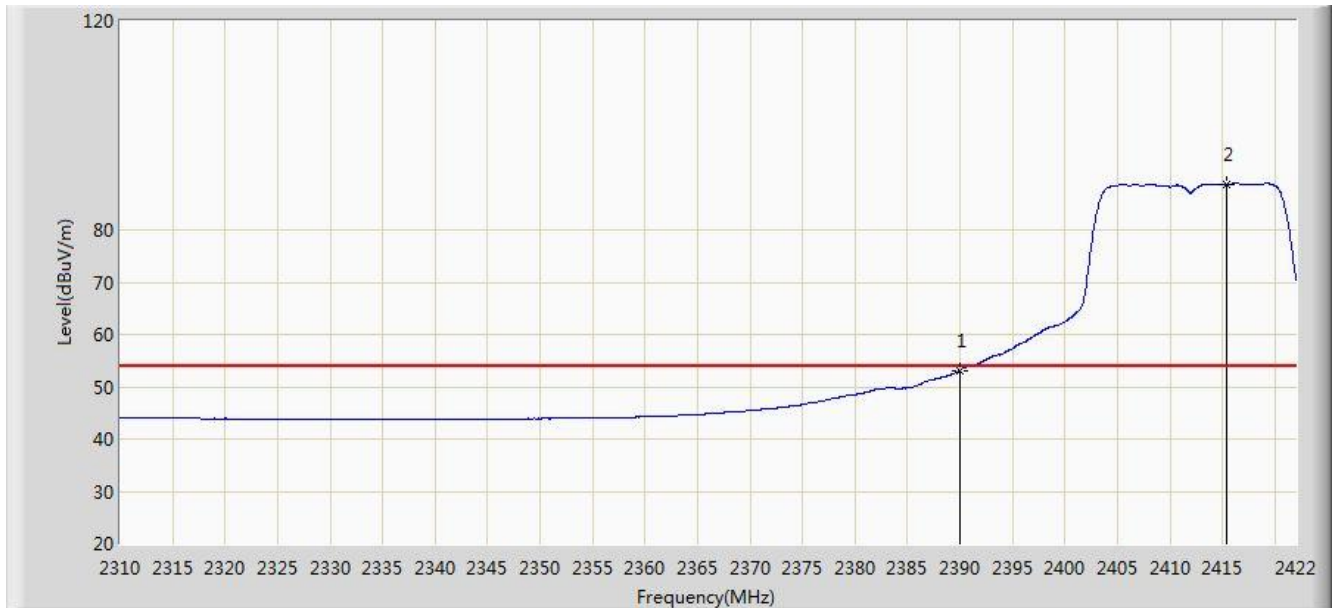


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.148	21.945	-0.852	54.000	31.203	AV
2		*	2415.336	88.821	57.657	N/A	N/A	31.164	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11n-HT20	

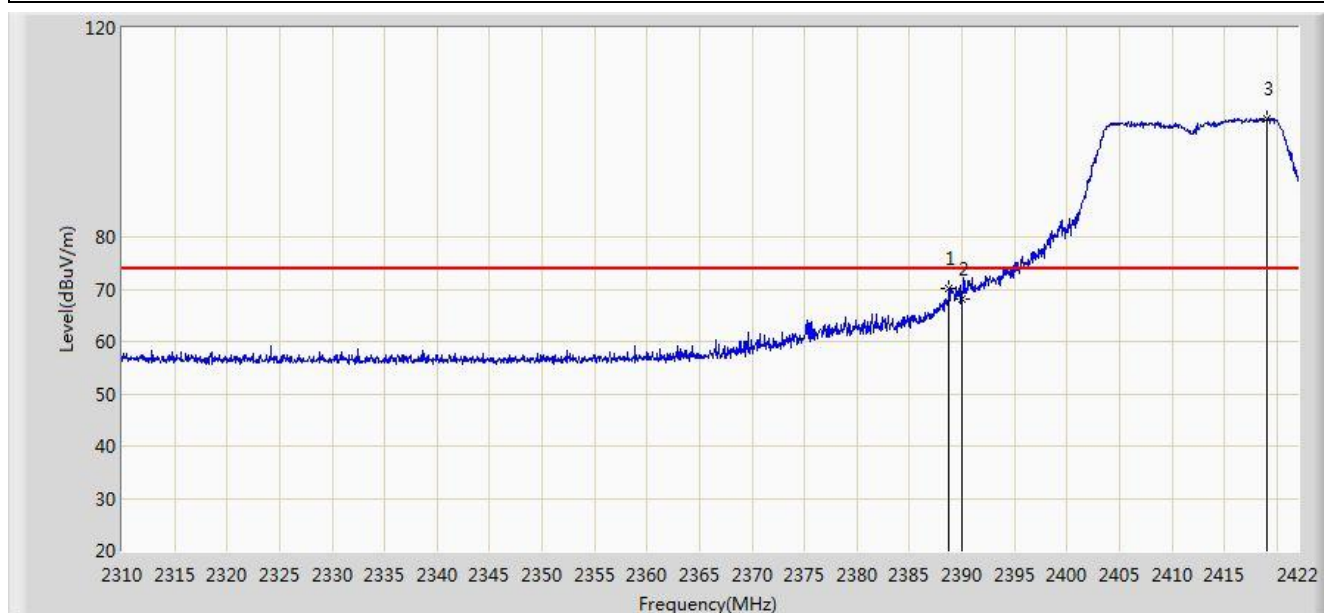


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.736	70.164	38.959	-3.836	74.000	31.205	PK
2			2390.000	67.982	36.779	-6.018	74.000	31.203	PK
3		*	2419.032	102.587	71.430	N/A	N/A	31.157	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2412MHz by 802.11n-HT20	

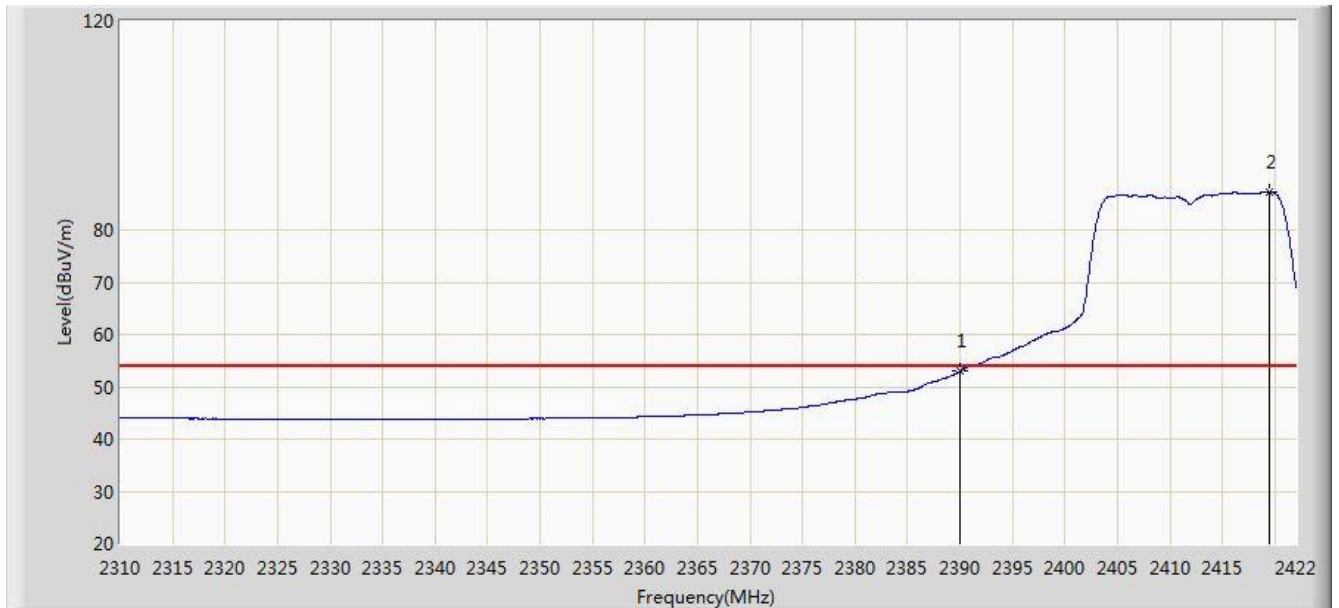


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.926	21.723	-1.074	54.000	31.203	AV
2		*	2419.480	87.278	56.121	N/A	N/A	31.156	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11n-HT20	

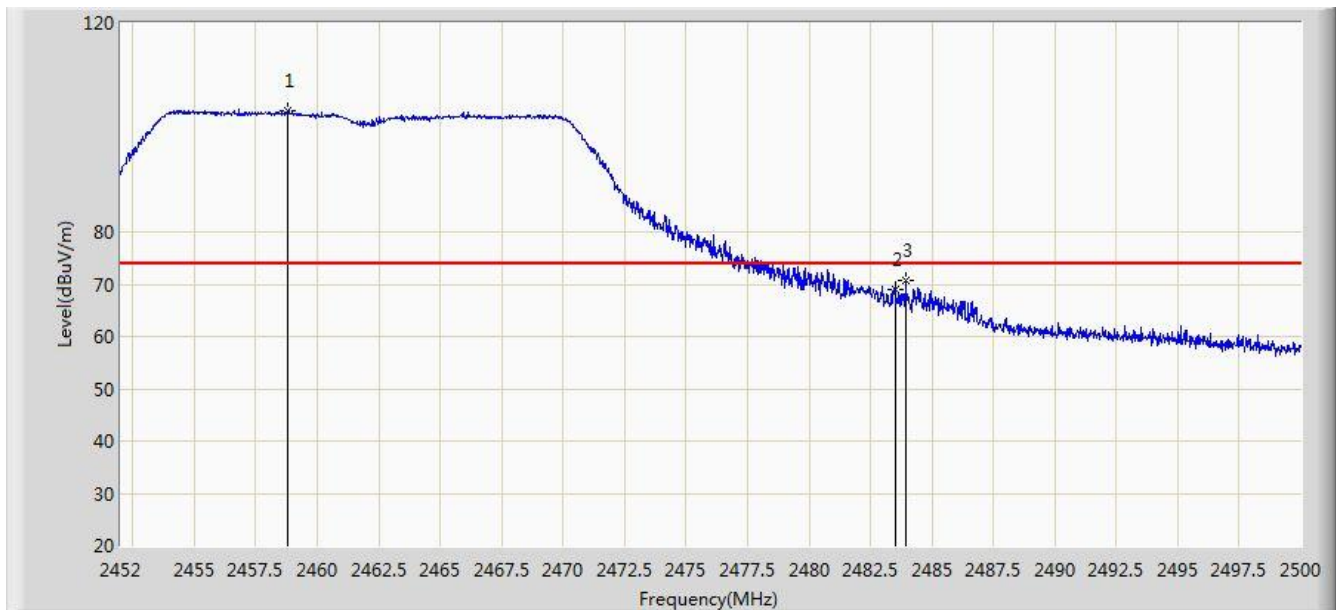


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.600	104.099	72.970	N/A	N/A	31.129	PK
2			2483.500	69.078	37.885	-4.922	74.000	31.194	PK
3			2483.920	70.668	39.474	-3.332	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11n-HT20	

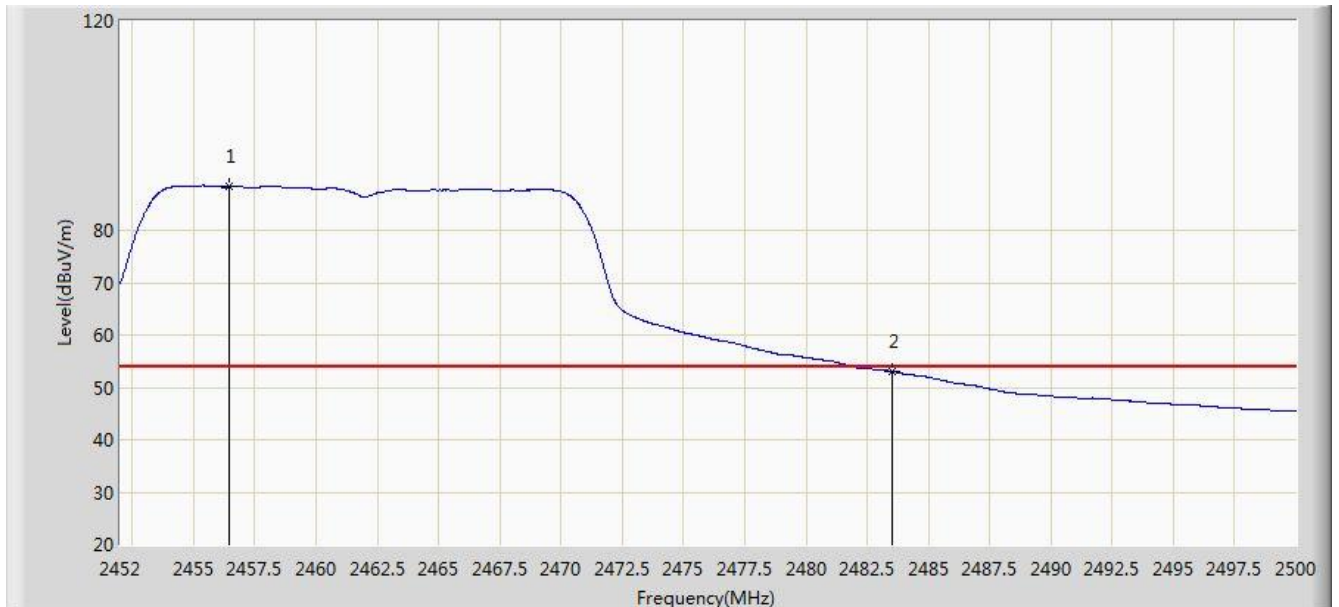


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.464	88.299	57.174	N/A	N/A	31.125	AV
2			2483.500	53.056	21.863	-0.944	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11n-HT20	

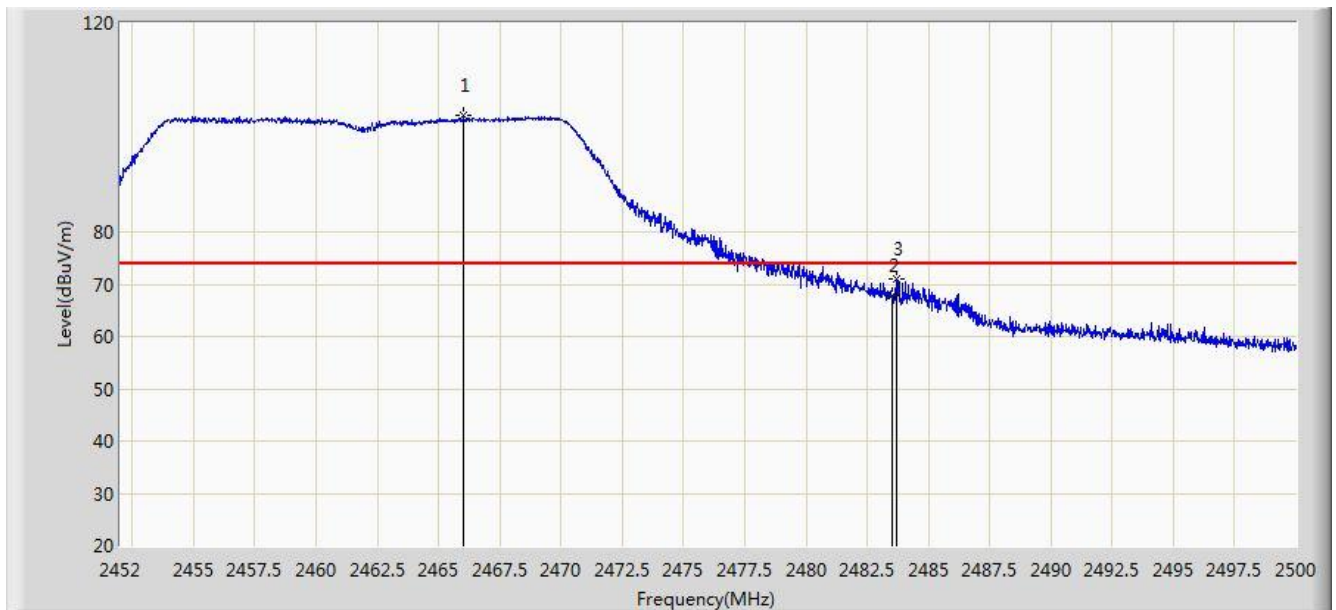


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.016	102.187	71.042	N/A	N/A	31.145	PK
2			2483.500	67.775	36.582	-6.225	74.000	31.194	PK
3			2483.728	70.949	39.755	-3.051	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/03/26 - 10:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2462MHz by 802.11n-HT20	

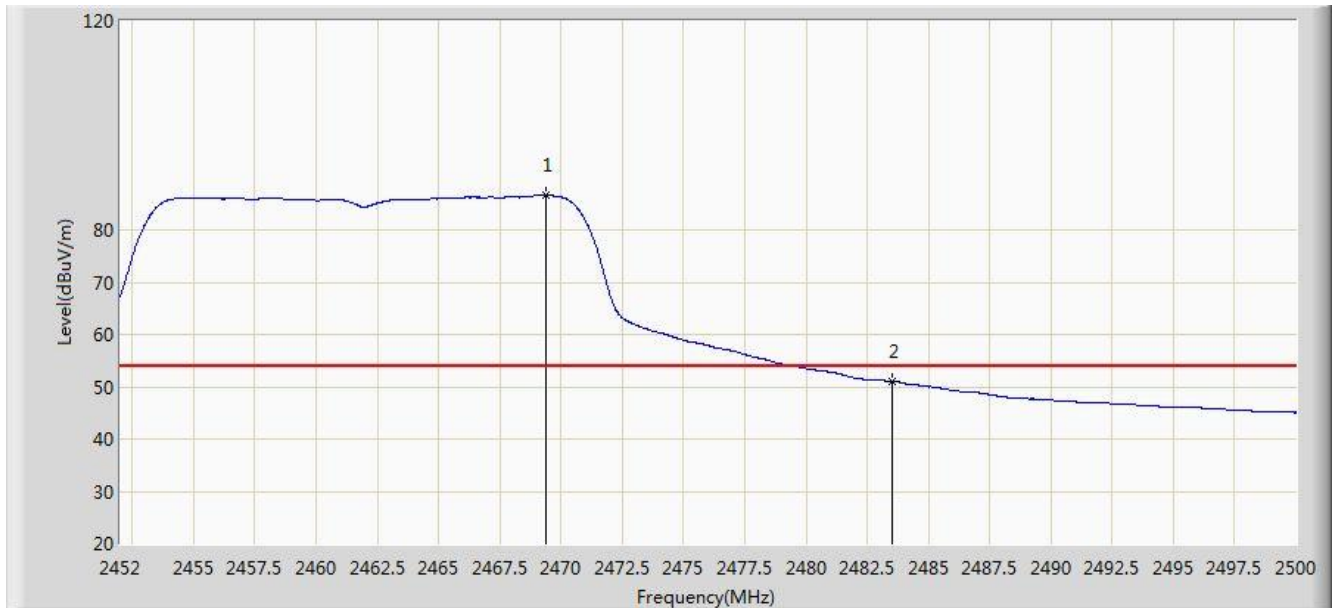

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2469.376	86.626	55.472	N/A	N/A	31.154	AV
2			2483.500	51.075	19.882	-2.925	54.000	31.194	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

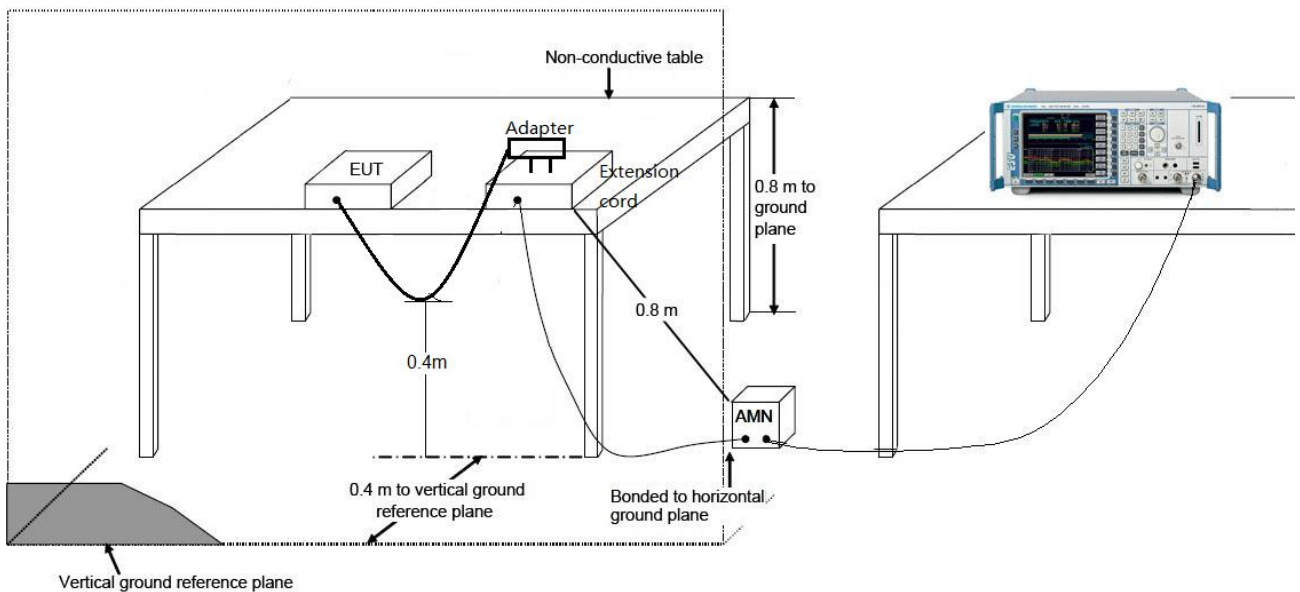

7.8.3. Test Result

Site: SR2	Time: 2015/03/25 - 15:56
Limit: FCC_Part15.207_CE_AC Power	Engineer: Line Chen
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: 802.11g at Channel 2462MHz	

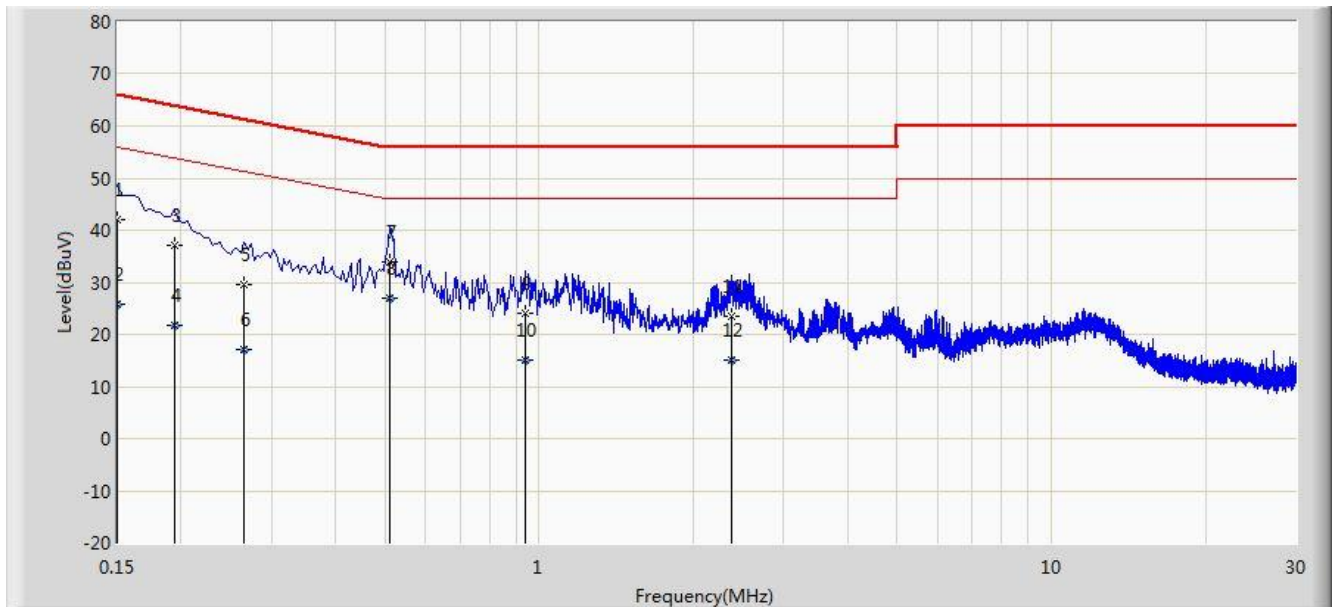


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor	Type
1			0.150	42.098	30.929	-23.902	66.000	11.168	QP
2			0.150	25.871	14.702	-30.129	56.000	11.168	AV
3			0.194	36.995	26.978	-26.869	63.864	10.017	QP
4			0.194	21.649	11.632	-32.215	53.864	10.017	AV
5			0.266	29.610	19.633	-31.632	61.242	9.977	QP
6			0.266	17.161	7.184	-34.081	51.242	9.977	AV
7			0.510	33.947	23.790	-22.053	56.000	10.157	QP
8		*	0.510	26.904	16.748	-19.096	46.000	10.157	AV
9			0.938	23.991	14.051	-32.009	56.000	9.940	QP
10			0.938	15.136	5.196	-30.864	46.000	9.940	AV
11			2.378	23.477	13.616	-32.523	56.000	9.861	QP
12			2.378	15.169	5.308	-30.831	46.000	9.861	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/03/25 - 16:02
Limit: FCC_Part15.207_CE_AC Power	Engineer: Line Chen
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Tablet PC	Power: AC 120V/60Hz
Test Mode: 802.11g at Channel 2462MHz	

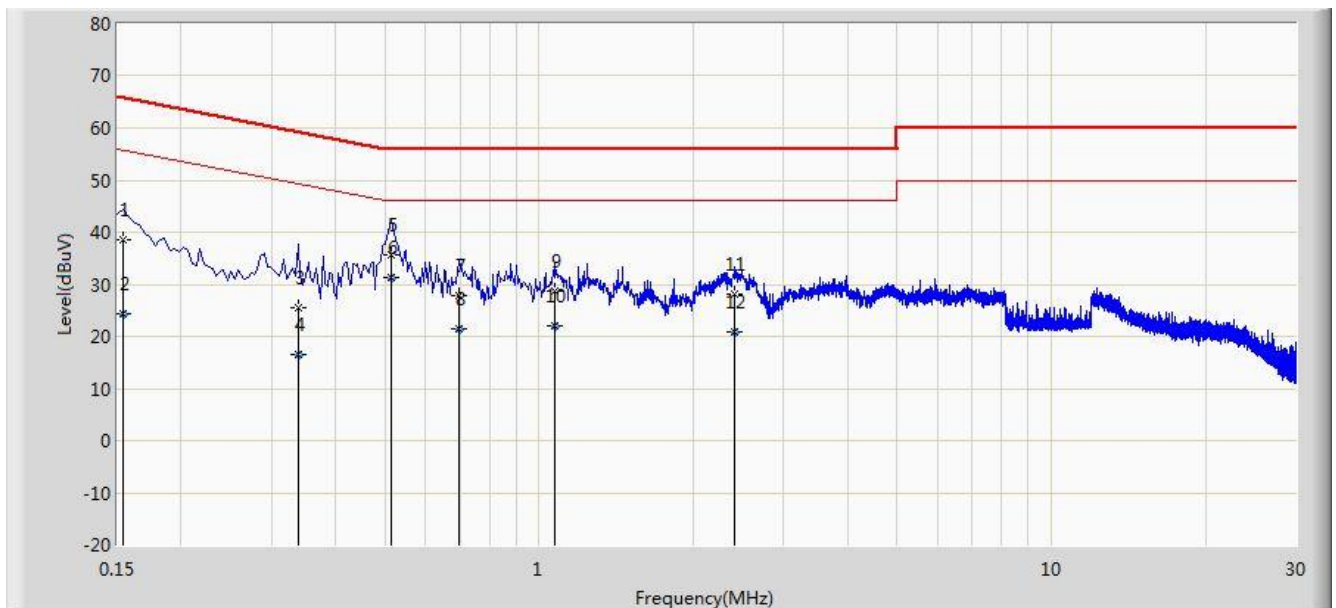

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor	Type
1			0.154	38.590	27.874	-27.192	65.781	10.716	QP
2			0.154	24.266	13.550	-31.515	55.781	10.716	AV
3			0.338	25.452	15.387	-33.800	59.252	10.066	QP
4			0.338	16.413	6.348	-32.839	49.252	10.066	AV
5			0.514	35.750	25.574	-20.250	56.000	10.176	QP
6		*	0.514	31.214	21.038	-14.786	46.000	10.176	AV
7			0.698	27.911	17.835	-28.089	56.000	10.076	QP
8			0.698	21.407	11.331	-24.593	46.000	10.076	AV
9			1.070	28.659	18.752	-27.341	56.000	9.906	QP
10			1.070	22.042	12.135	-23.958	46.000	9.906	AV
11			2.410	28.208	18.344	-27.792	56.000	9.864	QP
12			2.410	20.930	11.066	-25.070	46.000	9.864	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Tablet PC FCC ID:**

WL6-TE69SA3 is in compliance with Part 15C of the FCC Rules.

The End