

APPLICATION FOR CERTIFICATION

On Behalf of

Elitegroup Computer Systems Co., Ltd.

Intelligent Gateway

Model No. : GWS-QX.

FCC ID : WL6GWS-QX

Brand: ECS

Prepared for : Elitegroup Computer Systems Co., Ltd.
No. 239, Sec. 2, TiDing Blvd,
Taipei, Taiwan 11493

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1409210
Report Number : EM-F140584
Date of Test : 2014. 09. 24 ~ 11. 25
Date of Report : 2014. 11. 25

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. DESCRIPTION OF REVISION HISTORY	5
2. GENERAL INFORMATION	6
2.1. Description of Device (EUT).....	6
2.2. Description of Key Component Lists	7
2.3. Data Rate Relative to Output Power.....	8
2.4. Test Configuration for Each Test Item	9
2.5. Tested Supporting System Details.....	9
2.6. Description of Test Facility	10
2.7. Measurement Uncertainty.....	10
3. CONDUCTED EMISSION MEASUREMENT.....	11
3.1. Test Equipments	11
3.2. Block Diagram of Test Setup.....	11
3.3. Powerline Conducted Emission Limit (§15.207).....	11
3.4. Operating Condition of EUT	12
3.5. Test Procedure	12
3.6. Conducted Emission Measurement Results.....	12
4. RADIATED EMISSION MEASUREMENT	15
4.1. Test Equipments	15
4.2. Test Setup	15
4.3. Radiated Emission Limits (§15.209)	17
4.4. Operating Condition of EUT	17
4.5. Test Procedure	18
4.6. Test Results.....	19
5. 6dB BANDWIDTH MEASUREMENT	52
5.1. Test Equipment.....	52
5.2. Block Diagram of Test Setup.....	52
5.3. Specification Limits [§15.247(a)(2)]	52
5.4. Operating Condition of EUT	52
5.5. Test Procedure	52
5.6. Test Results.....	53
6. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	60
6.1. Test Equipments	60
6.2. Block Diagram of Test Setup.....	60
6.3. Specification Limits (§15.247(b)-(3)).....	60
6.4. Operating Condition of EUT	60
6.5. Test Procedure	60
6.6. Test Results.....	61
7. EMISSION LIMITATIONS MEASUREMENT	62
7.1. Test Equipment.....	62
7.2. Block Diagram of Test Setup.....	62
7.3. Specification Limits [§15.247(c)].....	62
7.4. Operating Condition of EUT	62
7.5. Test Procedure	62
7.6. Test Results.....	62
8. BAND EDGES MEASUREMENT	93
8.1. Test Equipment.....	93
8.2. Block Diagram of Test Setup.....	93

8.3. Specification Limits [§15.247(c)].....	93
8.4. Operating Condition of EUT	93
8.5. Test Procedure	93
8.6. Test Results.....	93
9. POWER SPECTRAL DENSITY MEASUREMENT	99
9.1. Test Equipment.....	99
9.2. Block Diagram of Test Setup.....	99
9.3. Specification Limits [§15.247(d)].....	99
9.4. Operating Condition of EUT	99
9.5. Test Procedure	99
9.6. Test Results.....	100
10. DEVIATION TO TEST SPECIFICATIONS.....	107
11. PHOTOGRAPHS.....	108
11.1. Photos of Conducted Disturbance Measurement.....	108
11.2. Photos of Radiated Measurement at Semi-Anechoic Chamber	109
11.3. Photo of Section RF Conducted Measurement.....	110
11.4. Photo of Maximum Peak Output Power Measurement	110

TEST REPORT CERTIFICATION

Applicant : Elitegroup Computer Systems Co., Ltd.
Manufacturer : Golden Elite Technology (SHENZHEN) CO., LTD.
EUT Description : Intelligent Gateway
FCC ID : **WL6GWS-QX**
(A) Model No. : GWS-QX.
(B) Serial No. : N/A
(C) Brand : ECS
(D) Power Supply : DC 24V
(E) Test Voltage : AC 120V, 60Hz (Via AC Adapter)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C, Oct 2013
(FCC 47 CFR Part 15C, §15.205 and §15.207 and §15.209 and §15.247)
And ANSI C63.4:2003


The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits.


The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the requirements of FCC standard.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test: 2014. 09. 24 ~ 11. 25

Date of Report: 2014. 11. 25

Producer: 
(Tina Huang/Administrator)

Signatory: 
(Ben Cheng/Manager)

1. DESCRIPTION OF REVISION HISTORY

Edition No.	Date of Revision	Revision Summary	Report Number
0	2014. 11. 25	Original Report.	EM-F140584

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product	Intelligent Gateway
Model Number	GWS-QX. (The dots "." in the model name can be 0 to 9, A to Z, a to z, "-", "_", "\", "/" or blank, for marketing use only.) The model GWS-QX is test in this report
Serial Number	N/A
Brand Name	ECS
Applicant	Elitegroup Computer Systems Co., Ltd. No. 239, Sec. 2., TiDing Blvd., Taipei, Taiwan 11493
Manufacturer	Golden Elite Technology (SHENZHEN) CO., LTD. No.1, Nan-Huan Rd., ShaJing, BaoAn, Shenzhen, China
FCC ID	WL6GWS-QX
Fundamental Range	802.11b/g/n-HT20: 2412MHz ~ 2462MHz 802.11n-HT40: 2422MHz ~ 2452MHz Bluetooth and BLE: 2402MHz ~ 2480MHz
Frequency Channel	802.11b/g/n-HT20: 11 channels 802.11n-HT40: 7 channels Bluetooth: 79 channels BLE: 40 channels
Radio Technology	802.11b: DSSS Modulation (DBPSK/DQPSK/CCK) 802.11g: OFDM Modulation (BPSK/QPSK/16QAM/64QAM) 802.11n: OFDM Modulation (BPSK/QPSK/16QAM/64QAM) Bluetooth: FHSS (GFSK, π /4DQPSK, 8-DPSK) BLE: GFSK
Data Transfer Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps BT: 1/2/3Mbps BLE: 1Mbps
Antenna Type	Type: External Dipole Antenna + RF Cable Assembly, VSO, M/N 13-130-764090
Antenna Gain	3.1dBi
Date of Receipt of Sample	2014. 09. 19
Date of Test	2014. 09. 24 ~ 11. 25
Note: This EUT has 2.4GHz (WLAN, Bluetooth and BLE) function. See below for related test reports based on radio functionality. 1. The 2.4GHz (WLAN and BLE) function has tested in other report of EM-F140584. 2. The Bluetooth function has been test in other report of EM-F140585.	

2.2. Description of Key Component Lists

Item	Supplier	Model / Type	Character
CPU	Intel	Quark SoC X1021	400MHz
Memory	---	---	DDR3 1G (512MB x 2)
Storage	---	---	Mirco SD 8GB up to 32G
Wi-Fi +BT Combo Module	AzureWave (REALTEK)	AW-NB159H (RTL8723BE)	Wi-Fi with Bluetooth 4.0/3.0 + HS Combo Half Mini Card
AC Adapter	Asian Power Devices Inc.	DA-120B24	Input: AC 100-240V, 47-63Hz, 2.0A Output: DC 24V, 5A
	DC Power Cord: Non-Shielded, Undetachable, 1.8m AC Power Cord: Non-Shielded, Detachable, 1.8m (3pin)		
RS-232 Cable	Shielded, Detachable, 1.6m		

Remark: For a more detailed features description, please refer to the manufacturer's specifications or the user manual.

2.3. Data Rate Relative to Output Power

802.11b			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)
1	BPSK	1	18.31
1	BPSK	2	18.29
1	QPSK	5.5	18.28
1	QPSK	11	18.20

802.11g			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)
1	BPSK	6	22.57
1	BPSK	9	22.54
1	QPSK	12	22.56
1	QPSK	18	22.43
1	16-QAM	24	22.42
1	16-QAM	36	22.41
1	64-QAM	48	22.51
1	64-QAM	54	22.45

802.11n-HT20				802.11n-HT40			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)	Channel	Modulation	Date Rate (Mbps)	Power (dBm)
1	BPSK	6.5	21.56	3	BPSK	6.5	21.72
1	QPSK	13	21.51	3	QPSK	13	21.68
1	QPSK	19.5	21.45	3	QPSK	19.5	21.61
1	16-QAM	26	21.39	3	16-QAM	26	21.63
1	16-QAM	39	21.40	3	16-QAM	39	21.57
1	64-QAM	52	21.35	3	64-QAM	52	21.48
1	64-QAM	58.6	21.31	3	64-QAM	58.6	21.44
1	64-QAM	65	21.30	3	64-QAM	65	21.31

2.4. Test Configuration for Each Test Item

Test Item	802.11b	802.11g	802.11n-HT20	802.11n-HT40
	Data Rate for Test (Mbps)			
6db Bandwidth	1	6	6.5	6.5
Maximum Peak Output Power	1	6	6.5	6.5
Emission Limitations	1	6	6.5	6.5
Band Edges	1	6	6.5	6.5
Power Spectral Density	1	6	6.5	6.5

2.5. Tested Supporting System Details

2.5.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	Approval
1.	PC System	Acer	Veriton M2630G	N/A	By DoC
2.	LCD Monitor	LG	22LK330	N/A	By DoC
		ASUS	VE228N	N/A	By DoC
3.	USB Keyboard	Agilent	K120	N/A	By DoC
		Lenovo	KU-0225	0904414	By DoC
4.	USB Mouse	Acer	Mini N5	N/A	By DoC
		Lenovo	MO28UOL	4413524	By DoC

2.5.2. Used Cable Lists

Cable Description Of The Above Support Units	
1.	Power Cord: Non-Shielded, Detachable, 1.8m (3 Pin)
2.	D-Sub Cable: Shielded, Detachable, 1.8m Bonded two ferrite cores Power Cord: Non-Shielded, Detachable, 1.8m
3.	USB Cable: Shielded, Undetachable, 1.8m
4.	USB Cable: Shielded, Undetachable, 1.8m

2.6. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation**
EMC Department
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan

Test Location & Facility : **No. 8 Shielded Room**
Semi-Anechoic Chamber
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan
 May 11, 2012 File on
 Federal Communication Commission
 Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

2.7. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	$\pm 3.43\text{dB}$
Radiation Test (Distance: 3m)	30MHz~300MHz	$\pm 2.91\text{dB}$
	300MHz~1000MHz	$\pm 2.74\text{dB}$
	Above 1GHz	$\pm 5.02\text{dB}$

Remark : Uncertainty = $k_{uc}(y)$

Test Item	Uncertainty
6dB Bandwidth	$\pm 0.05\text{kHz}$
Maximum peak output power	$\pm 0.33\text{dBm}$
Emission Limitations	$\pm 0.13\text{dB}$
Band edges	$\pm 0.13\text{dB}$
Power spectral density	$\pm 0.13\text{dB}$


3. CONDUCTED EMISSION MEASUREMENT

3.1. Test Equipments

The following Test equipments were used during the conducted emission measurement : (No. 8 Shielded Room)

Item	Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2014. 02. 19	1 Year
2.	A.M.N.	R&S	ESH2-Z5	100366	2014. 06. 21	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2013. 12. 26	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2014. 01. 18	1 Year

3.2. Block Diagram of Test Setup

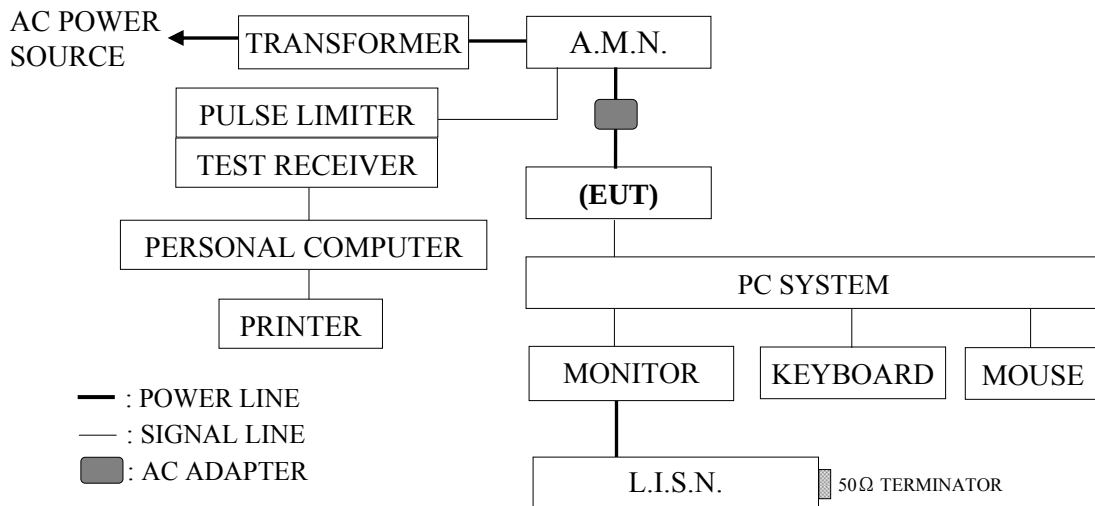

EUT: INTELLIGENT GATEWAY

3.3. Powerline Conducted Emission Limit (§15.207)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dBμV	56 ~ 46 dBμV
500kHz ~ 5MHz	56 dBμV	46 dBμV
5MHz ~ 30MHz	60 dBμV	50 dBμV

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

2.: The lower limit applies at the band edges.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown on 3.2.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Set to EUT (Intelligent Gateway) on transmitting and receiving during all testing.

3.5. Test Procedure

The EUT link to power adapter was placed on the table which was above the ground by 80cm and adapter's power cord connected to the AC mains through an Artificial Mains Network (A.M.N.). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions simulators of the interface cables should be manipulated according to ANSI C63.4-2003 regulation during conducted measurement.

The bandwidth of the R&S Test Receiver ESR3 was set at 9kHz.

The frequency range from 150kHz to 30MHz was checked.

All the final readings from Test Receiver were measured with the Quasi-Peak detector and Average detector. Remark: If the Average limit is met when using a Quasi-Peak detector, the Average detector is unnecessary)

3.6. Conducted Emission Measurement Results

PASSED.

(All the emissions not reported below are too low against the prescribed limits.)

EUT was performed during this section testing and all the test results are attached in next pages.

EUT : Intelligent Gateway M/N : GWS-QX

Test Date : 2014. 09. 26 Temperature : 26°C Humidity : 64%

The details are as follows :

Mode	Reference Test Data	
	Neutral	Line
1.	# 2	# 1




AUDIX TECHNOLOGY Corp. EMC Department
 No.53-11, Dingfu, Linkou Dist., New Taipei City
 24442, Taiwan R.O.C.
 Tel: +886-2-26092133 Fax: +886-2-26099303
 Email: emc@audixtech.com

Data: 2

File: D:\test data\REPORT\2014\1M1409XXX\1M1409210-C-D(rf).EM6 (4)

Date: 2014-09-26

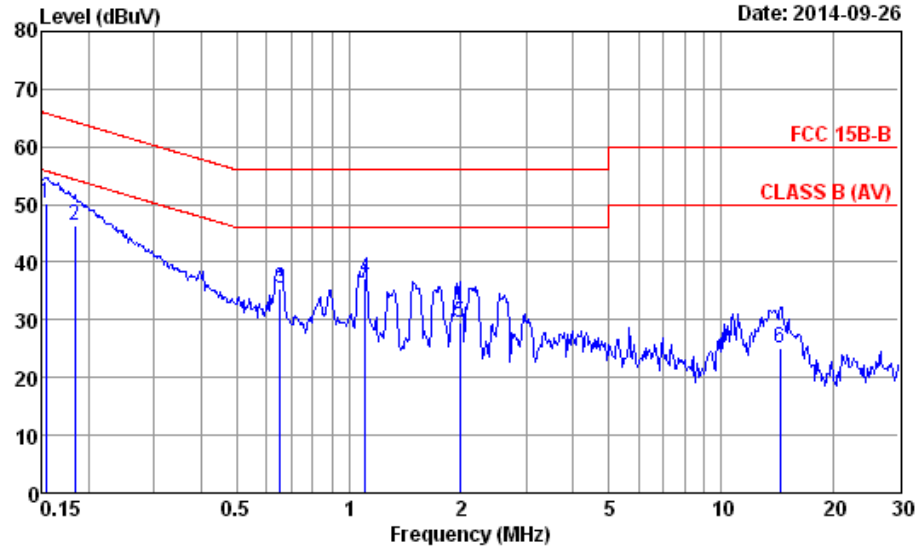

Site no. : No.8 Shielded Room Data no. : 2
 Condition : ESH2-Z5 366 Phase : NEUTRAL
 Limit : FCC 15B-B
 Env. / Ins. : 26°C / 64% ESR3 (1774) Engineer : John
 EUT : GWS-QX
 Power Rating : 120Vac/60Hz
 Test Mode : OPERATING


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	0.21	0.02	9.85	40.04	50.12	65.82	15.70	QP
2	0.183	0.21	0.03	9.85	36.36	46.45	64.33	17.88	QP
3	0.654	0.23	0.04	9.85	25.32	35.44	56.00	20.56	QP
4	1.106	0.23	0.04	9.86	27.11	37.24	56.00	18.76	QP
5	1.991	0.25	0.06	9.84	19.29	29.44	56.00	26.56	QP
6	14.364	0.64	0.17	9.91	14.45	25.17	60.00	34.83	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.



AUDIX TECHNOLOGY Corp. EMC Department
No.53-11, Dingfu, Linkou Dist., New Taipei City
24442, Taiwan R.O.C.
Tel: +886-2-26092133 Fax: +886-2-26099303
Email: emc@audixtech.com

Data: 1 File: D:\test data\REPORT\2014\1M1409XXX\1M1409210-C-D(rf).EM6 (4)

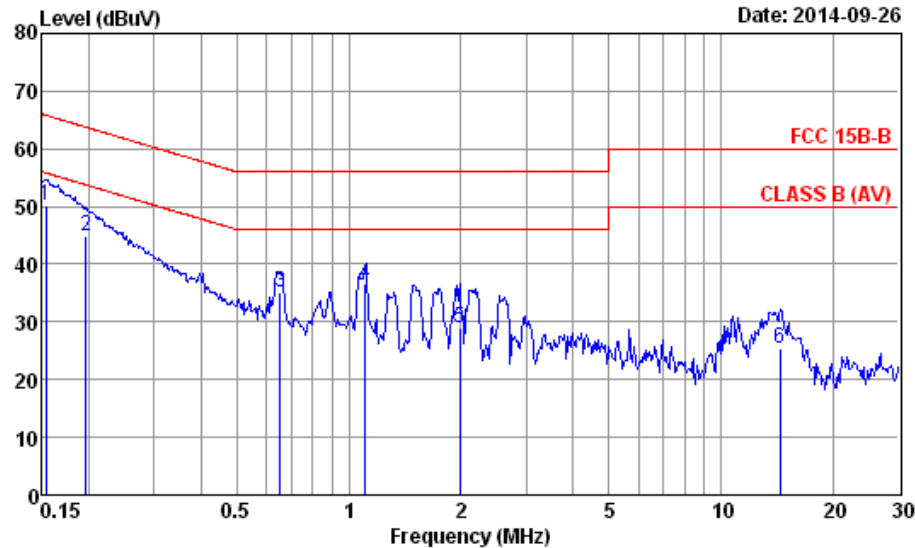

Site no. : No.8 Shielded Room Data no. : 1
Condition : ESH2-Z5 366 Phase : LINE
Limit : FCC 15B-B
Env. / Ins. : 26°C / 64% ESR3 (1774) Engineer : John
EUT : GWS-QX
Power Rating : 120Vac/60Hz
Test Mode : OPERATING

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	0.18	0.02	9.85	40.00	50.05	65.82	15.77	QP
2	0.197	0.18	0.03	9.85	34.96	45.02	63.76	18.74	QP
3	0.654	0.20	0.04	9.85	25.09	35.18	56.00	20.82	QP
4	1.106	0.21	0.04	9.86	26.63	36.74	56.00	19.26	QP
5	1.991	0.24	0.06	9.84	18.82	28.96	56.00	27.04	QP
6	14.364	0.56	0.17	9.91	14.61	25.25	60.00	34.75	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipments

The following Test equipments were used during the radiated emission measurement:

4.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)


Item	Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2014. 09. 15	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2014. 06. 24	1 Year
3.	Amplifier	HP	8447D	2944A06305	2014. 02. 18	1 Year
4.	Bilog Antenna	CHASE	CBL6112D	33821	2014. 08. 02	1 Year

4.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)

Item	Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2014. 09. 15	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2014. 06. 24	1 Year
3.	Amplifier	HP	8447D	2944A06305	2014. 02. 18	1 Year
4.	2.4GHz Notch Filter	K&L	7NSL10-2441.5E130.5-00	1	2014. 06. 12	1 Year
5.	3G High Pass Filter	Microwave Circuits	H3G018G1	484796	2014. 06. 12	1 Year
6.	Horn Antenna	EMCO	3115	9609-4927	2014. 06. 16	1 Year
7.	Horn Antenna	EMCO	3116	2653	2014. 10. 10	1 Year


4.2. Test Setup

4.2.1. Block Diagram of connection between EUT and simulators

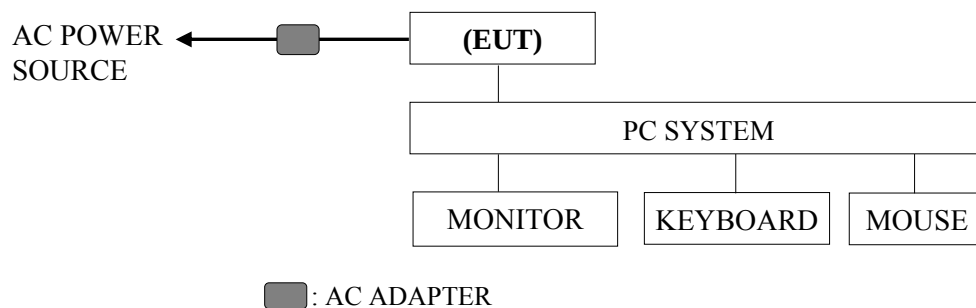


EUT: INTELLIGENT GATEWAY

4.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

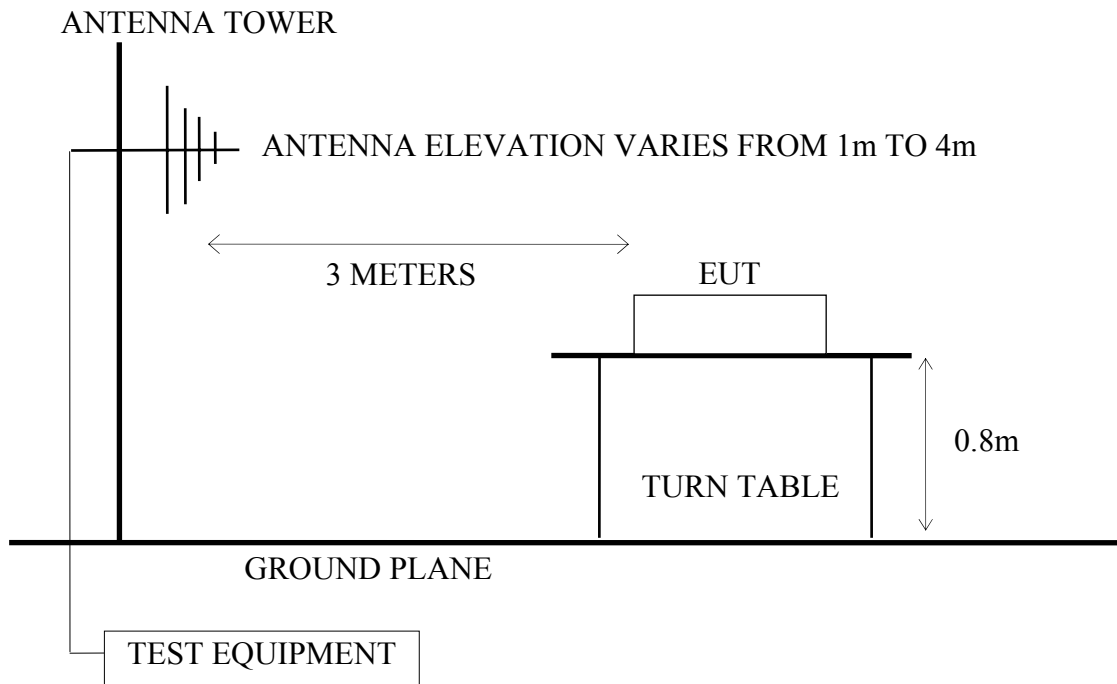

4.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

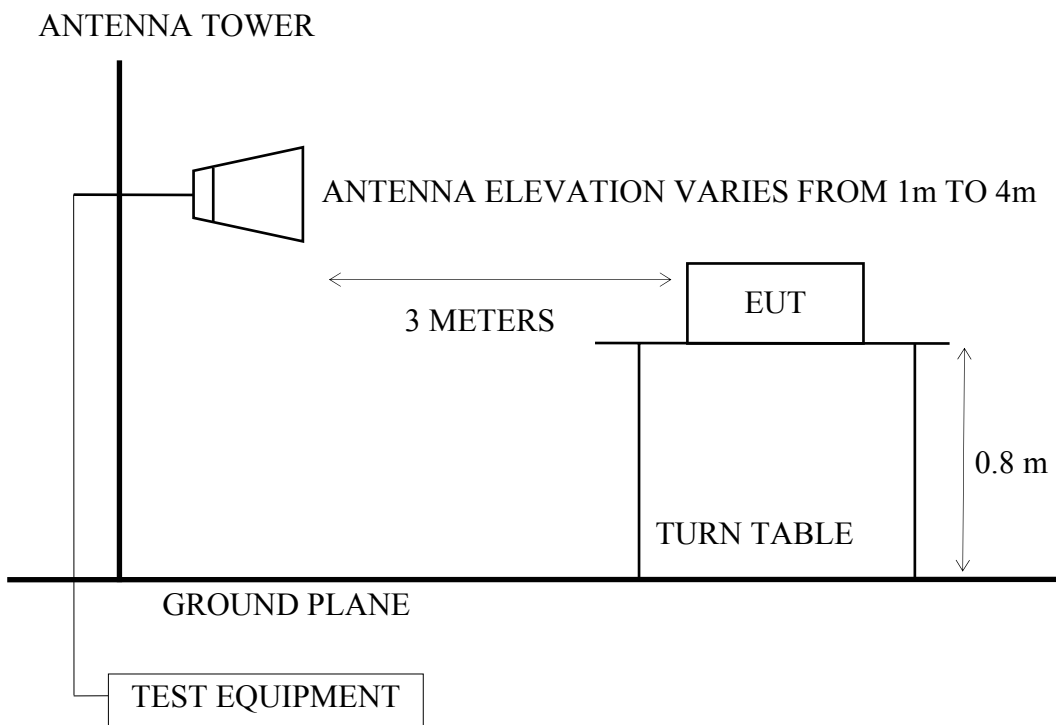

4.3. Radiated Emission Limits (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35(b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT (Intelligent Gateway) and simulator as shown on 4.2.
- 4.4.2. To turn on the power of all equipments.
- 4.4.3. The EUT was set the PC System using test program “Teraterm”.
- 4.4.4. The EUT supports 802.11b/g/n-HT20/n-HT40 and BLE modes, In WLAN Mode, we performed pre-scan high, middle, low channels for each mode for spurious emission and listed the worst channel of each mode in test report.

The worst channel of each mode as following:

Mode	Type	Channel	Frequency
1	802.11b	CH 11	2462MHz
2	802.11g	CH 6	2437MHz
3	802.11n-HT20	CH 6	2437MHz
4	802.11n-HT40	CH 6	2437MHz

4.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antennas such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of the R&S Test Receiver ESCS30 was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked. 30MHz to 1000MHz was measured with Quasi-Peak detector.

Pursuant to ANSI 63.4: 4.2, peak detector is an alternate option for frequency from 30MHz to 1000MHz.

Above 1GHz was measured with peak and average detector. For frequency from 1000Hz to 25000Hz, we checked it in 1 meter distance and with a shorter cable 2 meter instead of original's. There is no signal exist.

Pursuant to ANSI C63.4 8.3.1.2, when peak value complies with the average limit, we didn't perform measurement in average detector.

4.6. Test Results

PASSED.

(All emissions not reported below are too low against the prescribed limits.)

4.6.1. For WLAN Function

Test Date: 2014. 09. 29 Temperature: 26°C Humidity: 43%

For Frequency Range 30MHz~1000MHz:

The EUT was tested in restricted bands and all the test results are listed in section 4.6.1.1

No	Test Mode	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1	802.11b	CH 11	2462MHz	Transmit	# 2	# 1
2	802.11g	CH 6	2437MHz		# 2	# 1
3	802.11n-HT20	CH 6	2437MHz		# 2	# 1
4	802.11n-HT40	CH 6	2437MHz		# 2	# 1

* Above all final readings were measured with Peak detector.

Frequency above 1GHz:

The emissions (up to 25GHz) not reported are too low to be measured.

For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 4.6.1.2. (The restricted bands defined in part 15.205(a))

No	Test Mode	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1	802.11b	CH 1	2412MHz	Transmit	# 3, # 4	# 1, # 2
2		CH 11	2462MHz		# 7, # 8	# 5, # 6
3	802.11g	CH 1	2412MHz		# 3, # 4	# 1, # 2
4		CH 11	2462MHz		# 7, # 8	# 5, # 6
5	802.11n-HT20	CH 1	2412MHz		# 3, # 4	# 1, # 2
6		CH 11	2462MHz		# 7, # 8	# 5, # 6
7	802.11n-HT40	CH 3	2422MHz		# 3, # 4	# 1, # 2
8		CH 9	2452MHz		# 7, # 8	# 5, # 6

4.6.1.1. For 30-1000MHz Frequency Range Measurement Results

802.11b, Transmit, Frequency: 2462MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11b 2462MHz

Data no. : 2
 Ant. pol. : HORIZONTAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	99.84	10.90	3.22	14.26	28.38	43.50	15.12	Peak
2	350.10	14.43	5.20	11.06	30.69	46.00	15.31	Peak
3	831.22	20.20	7.28	8.85	36.33	46.00	9.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11b 2462MHz

Data no. : 1
 Ant. pol. : VERTICAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	41.64	12.45	2.53	23.53	38.51	40.00	1.49	Peak
2	98.87	10.72	3.21	14.77	28.70	43.50	14.80	Peak
3	350.10	14.43	5.20	7.31	26.94	46.00	19.06	Peak
4	900.09	20.58	7.54	4.77	32.89	46.00	13.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

802.11g, Transmit, Frequency: 2437MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11g 2437MHz

Data no. : 2
 Ant. pol. : HORIZONTAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	93.05	9.67	3.17	15.34	28.18	43.50	15.32	Peak
2	350.10	14.43	5.20	13.56	33.19	46.00	12.81	Peak
3	900.09	20.58	7.54	5.77	33.89	46.00	12.11	Peak
4	996.12	21.07	8.09	7.83	36.99	54.00	17.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11g 2437MHz

Data no. : 1
 Ant. pol. : VERTICAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	41.64	12.45	2.53	24.90	39.88	40.00	0.12	Peak
2	120.21	12.28	3.37	13.59	29.24	43.50	14.26	Peak
3	350.10	14.43	5.20	9.70	29.33	46.00	16.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT20, Transmit, Frequency: 2437MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2437MHz

Data no. : 2
 Ant. pol. : HORIZONTAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	137.67	11.35	3.51	8.92	23.78	43.50	19.72	Peak
2	255.04	12.47	4.36	13.27	30.10	46.00	15.90	Peak
3	350.10	14.43	5.20	14.80	34.43	46.00	11.57	Peak
4	998.06	21.07	8.09	10.81	39.97	54.00	14.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2437MHz

Data no. : 1
 Ant. pol. : VERTICAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	42.61	11.98	2.55	20.74	35.27	40.00	4.73	Peak
2	120.21	12.28	3.37	14.78	30.43	43.50	13.07	Peak
3	350.10	14.43	5.20	11.20	30.83	46.00	15.17	Peak
4	690.57	18.69	6.70	10.98	36.37	46.00	9.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT40, Transmit, Frequency: 2437MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2437MHz

Data no. : 2
 Ant. pol. : HORIZONTAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	42.61	11.98	2.55	10.87	25.40	40.00	14.60	Peak
2	350.10	14.43	5.20	15.22	34.85	46.00	11.15	Peak
3	949.56	20.83	7.82	5.32	33.97	46.00	12.03	Peak
4	995.15	21.07	8.09	5.34	34.50	54.00	19.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2437MHz

Data no. : 1
 Ant. pol. : VERTICAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	43.58	11.52	2.56	25.89	39.97	40.00	0.03	Peak
2	93.05	9.67	3.17	17.06	29.90	43.50	13.60	Peak
3	450.98	16.31	6.08	8.86	31.25	46.00	14.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

4.6.1.2. Restricted Bands Measurement Results

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11b , Transmit, Channel: 01, Frequency: 2412MHz

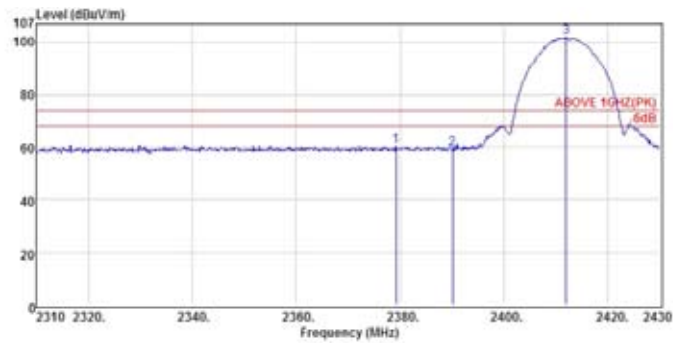

Site no. : Audix NO.1 Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11b 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2379.24	28.19	5.22	26.87	80.28	74.00	13.72	Peak
2	2390.04	28.20	5.24	25.81	59.25	74.00	14.75	Peak
3	2411.88	28.22	5.27	68.41	101.90	74.00	-27.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

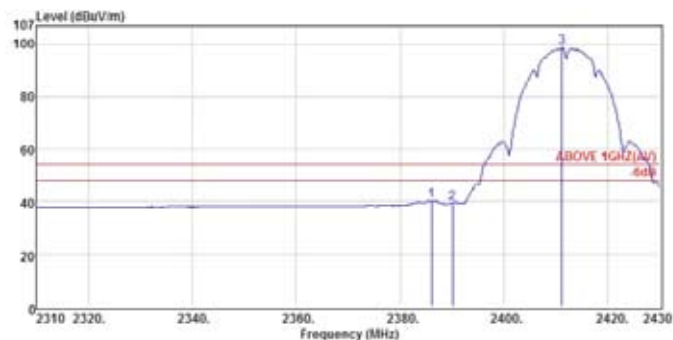

Site no. : Audix NO.1 Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11b 2412MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.08	28.20	5.23	6.88	40.31	54.00	13.89	Average
2	2390.04	28.20	5.24	8.08	39.50	54.00	14.50	Average
3	2411.18	28.22	5.27	65.15	98.64	54.00	-44.64	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C


EUT: Intelligent Gateway Humidity: 43%

Test Mode: 802.11b , Transmit, Channel: 01, Frequency: 2412MHz

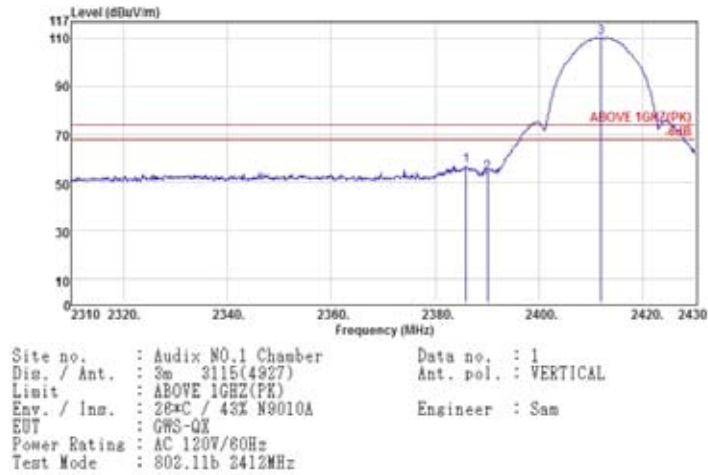

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
1	2385.96	28.20	5.23	23.63	57.06	74.00	16.94	Peak
2	2390.04	28.20	5.24	20.42	53.88	74.00	20.14	Peak
3	2411.88	28.22	5.27	77.15	110.64	74.00	-36.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

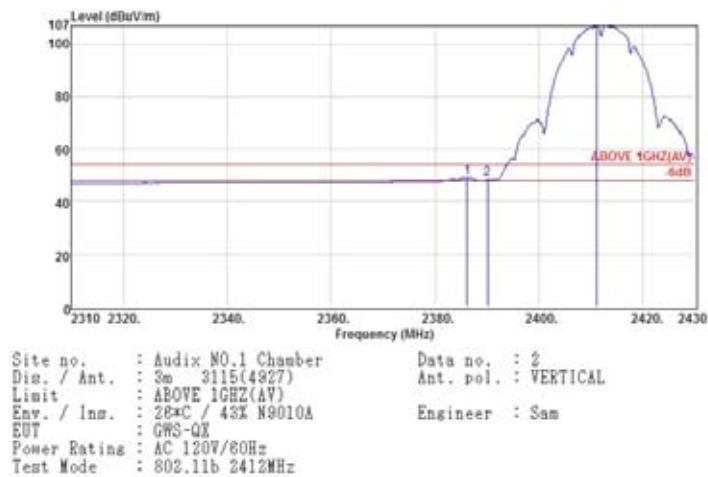


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
1	2388.20	28.20	5.23	15.68	49.11	54.00	4.89	Average
2	2390.04	28.20	5.24	15.00	48.44	54.00	5.56	Average
3	2411.18	28.22	5.27	73.71	107.20	54.00	-53.20	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11b , Transmit, Channel: 11, Frequency: 2462MHz

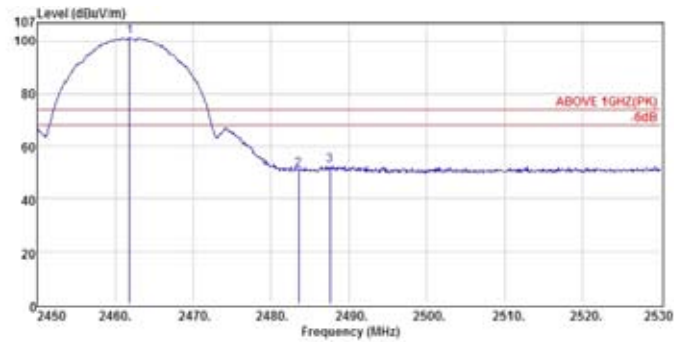

Site no. : Audix NO.1 Chamber Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11b 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2461.84	28.27	5.34	67.65	101.26	74.00	-27.26	Peak
2	2483.52	28.29	5.37	17.42	51.03	74.00	22.92	Peak
3	2487.52	28.29	5.37	18.98	52.64	74.00	21.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

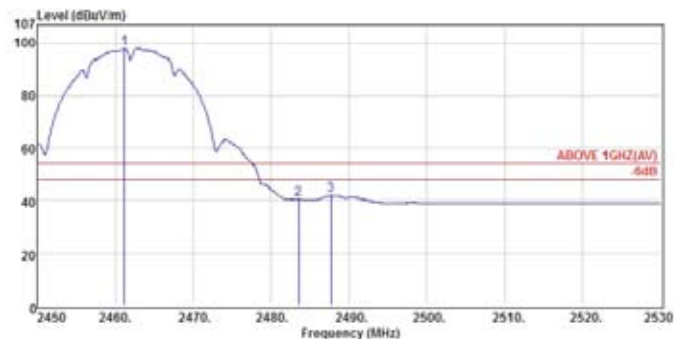

Site no. : Audix NO.1 Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11b 2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2461.20	28.27	5.34	64.40	98.01	54.00	-44.01	Average
2	2483.52	28.29	5.37	8.82	40.48	54.00	13.52	Average
3	2487.68	28.29	5.37	8.32	41.98	54.00	12.02	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11b , Transmit, Channel: 11, Frequency: 2462MHz

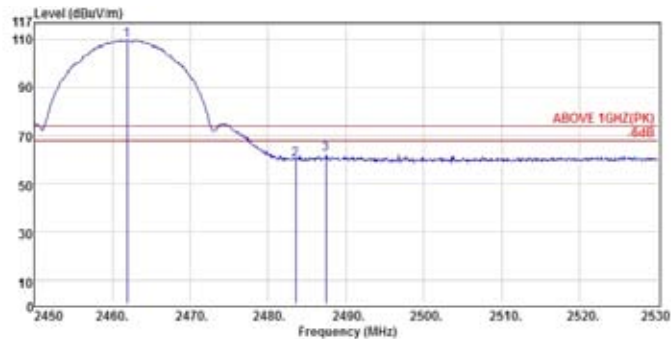

Site no. : Audix NO.1 Chamber Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11b 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2461.92	28.27	5.34	76.09	109.70	74.00	-35.70	Peak
2	2483.52	28.29	5.37	28.38	80.04	74.00	13.98	Peak
3	2487.44	28.29	5.37	28.37	82.03	74.00	11.97	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

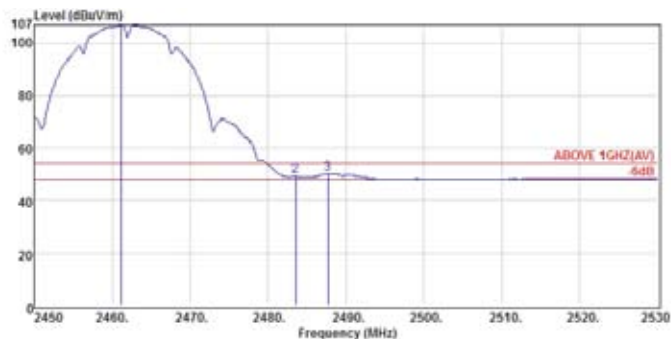

Site no. : Audix NO.1 Chamber Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11b 2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2461.20	28.27	5.34	73.32	106.93	54.00	-52.93	Average
2	2483.52	28.29	5.37	15.49	49.15	54.00	4.85	Average
3	2487.68	28.29	5.37	16.54	50.20	54.00	3.80	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11g , Transmit, Channel: 01, Frequency: 2412MHz

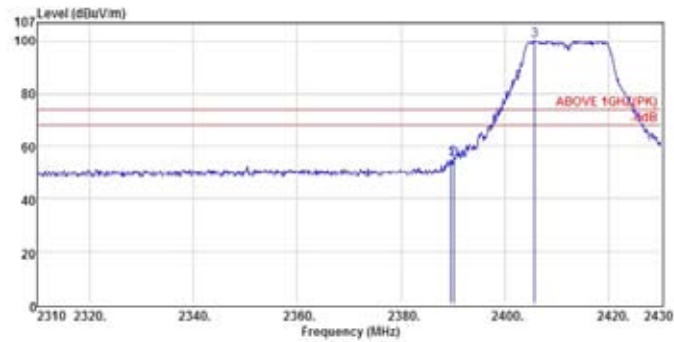

Site no. : Audix NO.1 Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11g 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.56	28.20	5.24	21.41	54.85	74.00	19.15	Peak
2	2390.04	28.20	5.24	22.04	55.48	74.00	18.52	Peak
3	2405.64	28.22	5.26	66.57	100.05	74.00	-26.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

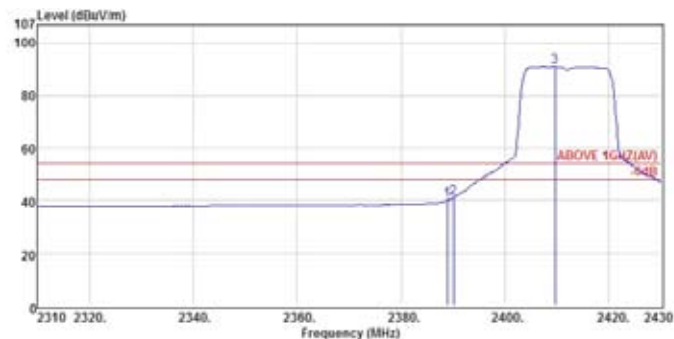

Site no. : Audix NO.1 Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11g 2412MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.84	28.20	5.24	8.84	40.08	54.00	13.92	Average
2	2390.04	28.20	5.24	7.72	41.18	54.00	12.84	Average
3	2409.80	28.22	5.27	57.54	81.03	54.00	-27.03	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11g , Transmit, Channel: 01, Frequency: 2412MHz

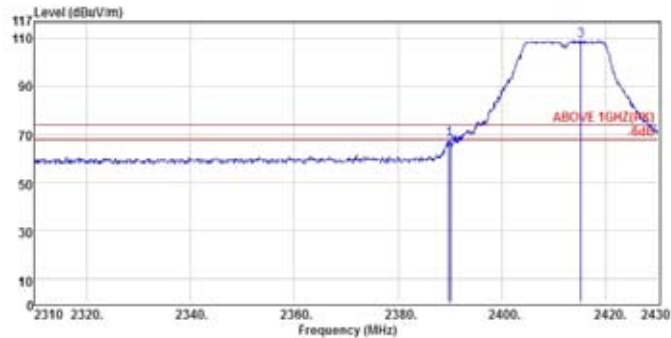

Site no. : Audix NO.1 Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Ratings : AC 120V/60Hz
 Test Mode : 802.11g 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.80	28.20	5.24	34.29	67.73	74.00	6.27	Peak
2	2390.04	28.20	5.24	31.38	64.82	74.00	9.18	Peak
3	2415.12	28.22	5.27	75.54	109.03	74.00	-35.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

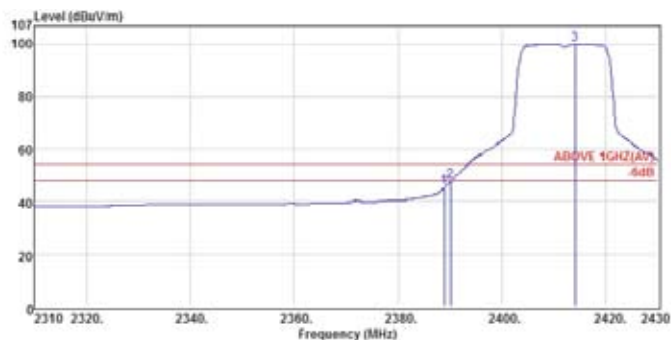

Site no. : Audix NO.1 Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Ratings : AC 120V/60Hz
 Test Mode : 802.11g 2412MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.84	28.20	5.24	11.88	45.30	54.00	8.70	Average
2	2390.04	28.20	5.24	14.18	47.82	54.00	6.38	Average
3	2414.04	28.22	5.27	88.53	100.02	54.00	-46.02	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11g , Transmit, Channel: 11, Frequency: 2462MHz

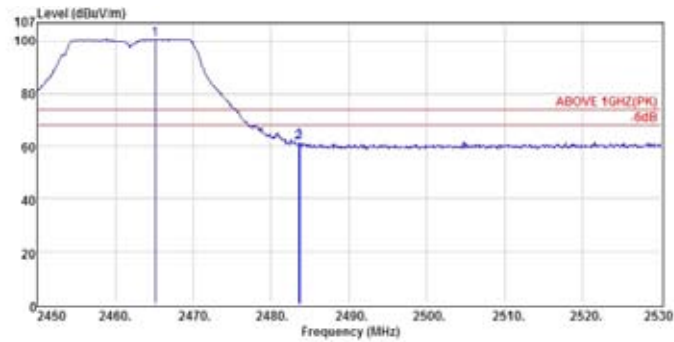

Site no. : Audix NO.1 Chamber Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11g 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2485.12	28.27	5.34	67.12	100.73	74.00	-26.73	Peak
2	2483.52	28.29	5.37	27.49	81.15	74.00	12.85	Peak
3	2483.68	28.29	5.37	28.16	81.82	74.00	12.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

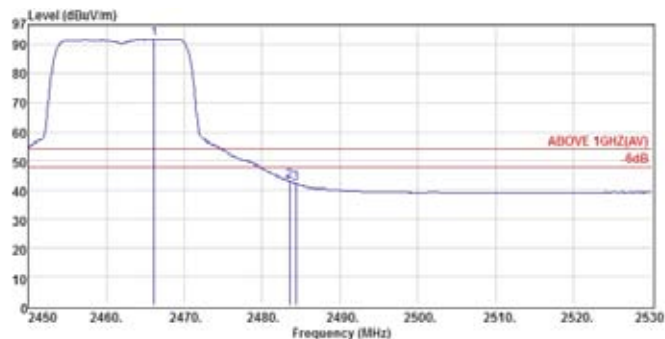

Site no. : Audix NO.1 Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11g 2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2486.16	28.27	5.34	58.42	92.03	54.00	-38.03	Average
2	2483.52	28.29	5.37	9.29	42.95	54.00	11.05	Average
3	2484.32	28.29	5.37	8.50	42.18	54.00	11.84	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11g , Transmit, Channel: 11, Frequency: 2462MHz

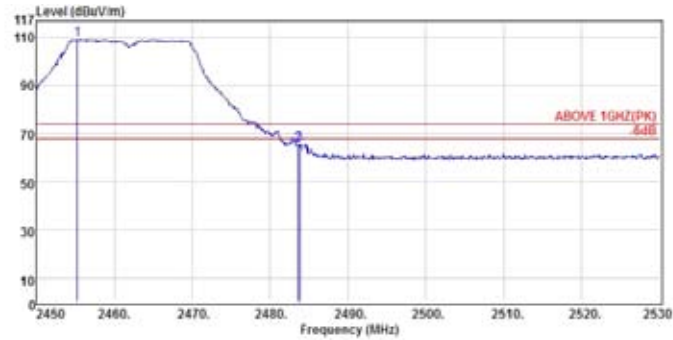

Site no. : Audix NO.1 Chamber Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11g 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2455.28	28.28	5.33	75.48	109.05	74.00	-35.05	Peak
2	2493.52	28.29	5.37	31.45	85.11	74.00	8.89	Peak
3	2493.76	28.29	5.37	32.18	85.84	74.00	8.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

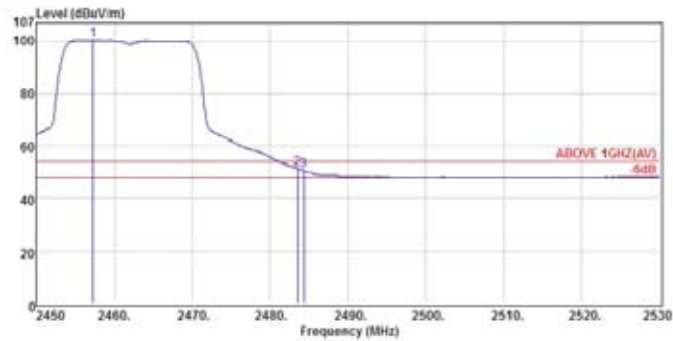

Site no. : Audix NO.1 Chamber Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11g 2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2457.28	28.28	5.33	66.66	100.25	54.00	-46.25	Average
2	2493.52	28.29	5.37	17.71	51.37	54.00	2.63	Average
3	2494.32	28.29	5.37	16.91	50.57	54.00	3.43	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT20 , Transmit, Channel: 01, Frequency: 2412MHz

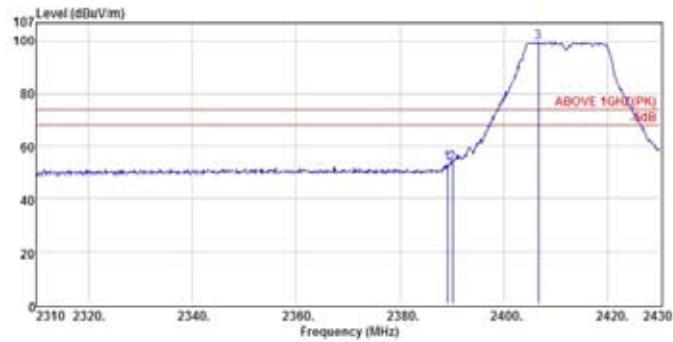

Site no. : Audix NO.1 Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.08	28.20	5.24	20.01	53.45	74.00	20.55	Peak
2	2390.04	28.20	5.24	20.08	53.50	74.00	20.50	Peak
3	2408.80	28.22	5.28	66.00	88.48	74.00	-25.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

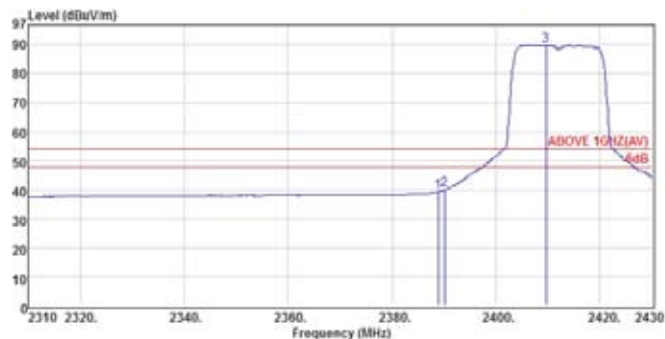

Site no. : Audix NO.1 Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2412MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.84	28.20	5.24	5.88	39.30	54.00	14.70	Average
2	2390.04	28.20	5.24	8.58	40.00	54.00	14.00	Average
3	2408.80	28.22	5.27	58.48	89.95	54.00	-35.95	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT20 , Transmit, Channel: 01, Frequency: 2412MHz

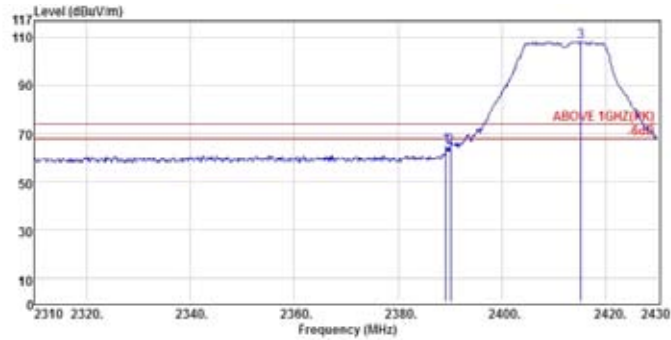

Site no. : Audix NO.1 Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.20	28.20	5.24	31.26	64.70	74.00	9.30	Peak
2	2390.04	28.20	5.24	30.78	64.22	74.00	9.78	Peak
3	2415.12	28.22	5.27	74.60	108.03	74.00	-34.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

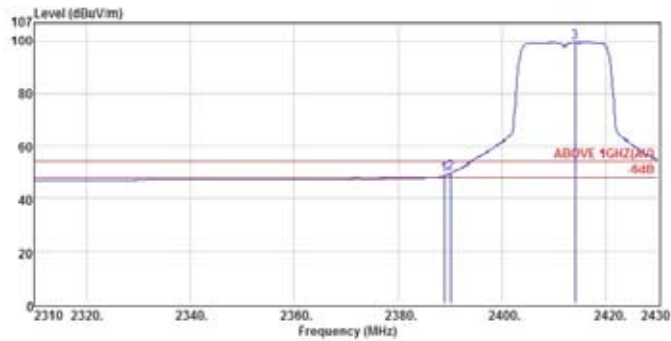

Site no. : Audix NO.1 Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2412MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.84	28.20	5.24	15.32	48.76	54.00	5.24	Average
2	2390.04	28.20	5.24	18.18	49.80	54.00	4.40	Average
3	2414.04	28.22	5.27	65.95	93.44	54.00	-45.44	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT20 , Transmit, Channel: 11, Frequency: 2462MHz

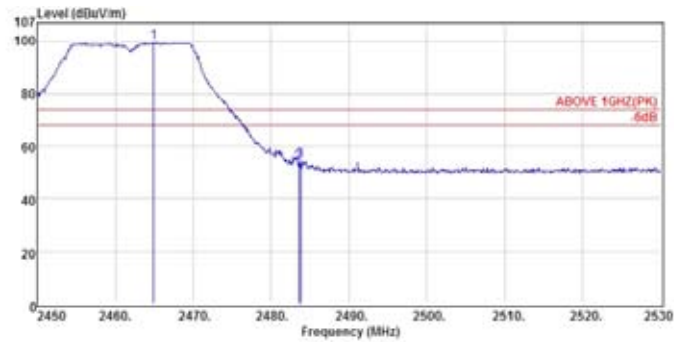

Site no. : Audix NO.1 Chamber Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2464.96	28.27	5.34	85.74	88.35	74.00	-25.35	Peak
2	2483.52	28.29	5.37	20.08	53.72	74.00	20.28	Peak
3	2483.76	28.29	5.37	20.77	54.43	74.00	19.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

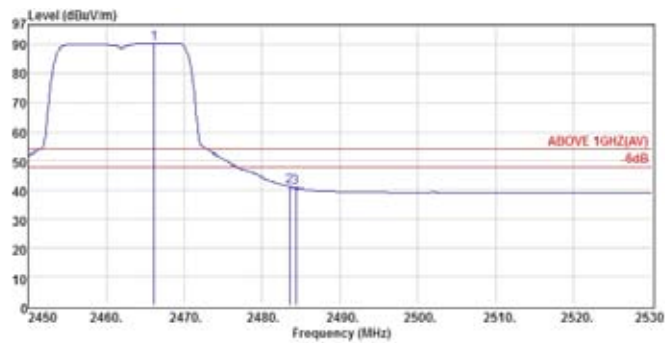

Site no. : Audix NO.1 Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2466.16	28.27	5.34	56.99	80.60	54.00	-26.60	Average
2	2483.52	28.29	5.37	7.47	41.13	54.00	12.87	Average
3	2484.32	28.29	5.37	7.03	40.69	54.00	13.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT20 , Transmit, Channel: 11, Frequency: 2462MHz

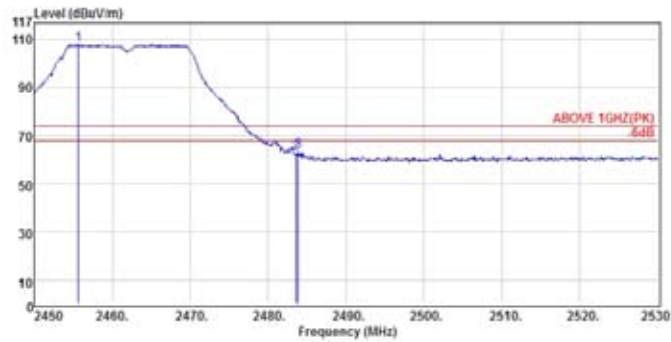

Site no. : Audix NO.1 Chamber Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2455.88	28.28	5.33	74.22	107.81	74.00	-33.81	Peak
2	2483.52	28.29	5.37	28.93	82.59	74.00	11.41	Peak
3	2483.84	28.29	5.37	30.05	63.71	74.00	10.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

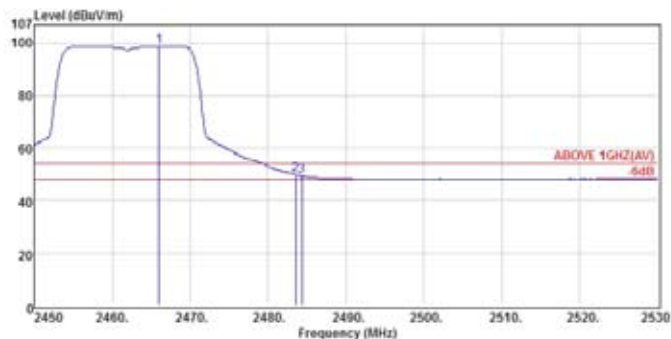

Site no. : Audix NO.1 Chamber Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n20 2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2466.00	28.27	5.34	85.18	98.79	54.00	-44.79	Average
2	2483.52	28.29	5.37	18.24	49.90	54.00	4.10	Average
3	2484.32	28.29	5.37	15.78	49.44	54.00	4.56	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT40 , Transmit, Channel: 3, Frequency: 2422MHz

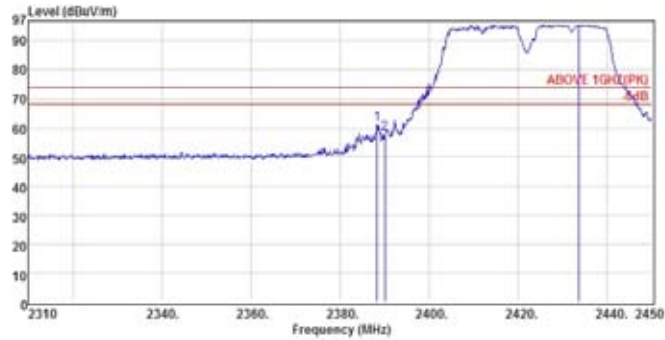

Site no. : Audix NO.1 Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2422MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.26	28.20	5.24	27.84	61.28	74.00	12.72	Peak
2	2390.08	28.20	5.24	24.47	57.91	74.00	16.09	Peak
3	2433.62	28.24	5.30	62.12	85.66	74.00	-21.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

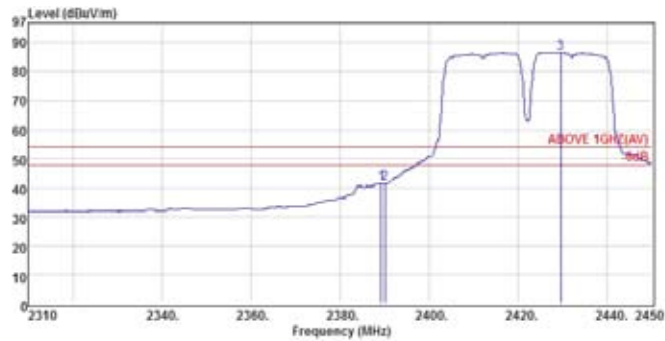

Site no. : Audix NO.1 Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2422MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.24	28.20	5.24	8.10	41.54	54.00	12.46	Average
2	2390.08	28.20	5.24	7.95	41.39	54.00	12.61	Average
3	2429.56	28.24	5.29	53.18	86.71	54.00	-32.71	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT40 , Transmit, Channel: 3, Frequency: 2422MHz

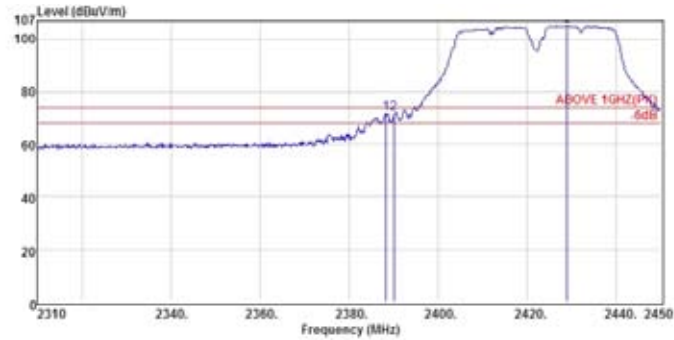

Site no. : Audix NO.1 Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2422MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.26	28.20	5.24	38.05	71.49	74.00	2.51	Peak
2	2390.08	28.20	5.24	38.28	71.72	74.00	2.28	Peak
3	2428.88	28.24	5.29	71.59	105.12	74.00	-31.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

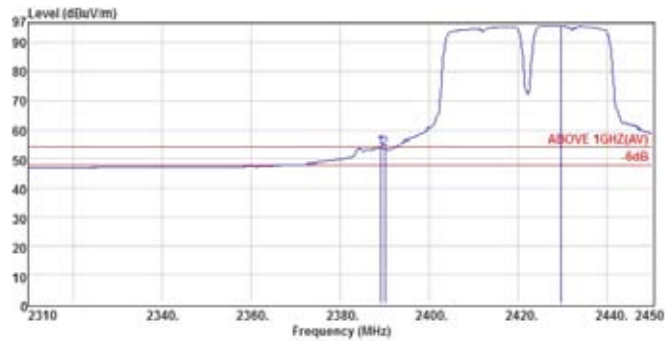

Site no. : Audix NO.1 Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2422MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.10	28.20	5.24	20.18	53.62	54.00	0.38	Average
2	2390.08	28.20	5.24	19.95	53.29	54.00	0.71	Average
3	2429.58	28.24	5.29	62.55	96.08	54.00	-42.08	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT40 , Transmit, Channel: 9, Frequency: 2452MHz

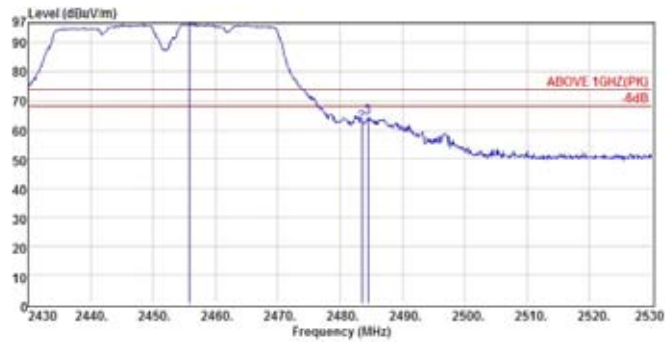

Site no. : Audix NO.1 Chamber Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK) -6dB
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2452MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2455.90	28.28	5.33	83.04	88.63	74.00	-22.83	Peak
2	2483.50	28.29	5.37	28.89	82.55	74.00	11.45	Peak
3	2484.50	28.29	5.37	30.81	84.27	74.00	9.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

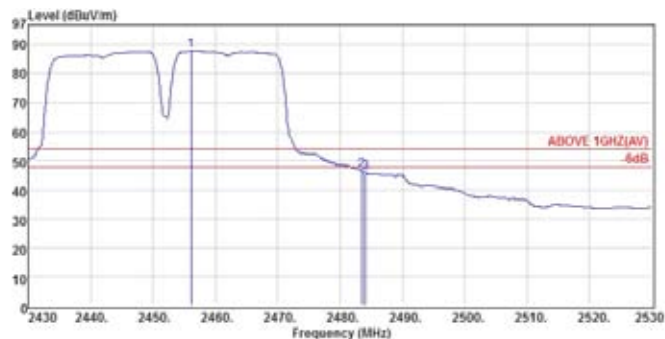

Site no. : Audix NO.1 Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV) -6dB
 Env. / Inn. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2452MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2456.10	28.28	5.33	54.29	87.83	54.00	-33.88	Average
2	2483.50	28.29	5.37	12.85	48.51	54.00	7.49	Average
3	2484.10	28.29	5.37	12.19	45.85	54.00	8.15	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT40 , Transmit, Channel: 9, Frequency: 2452MHz

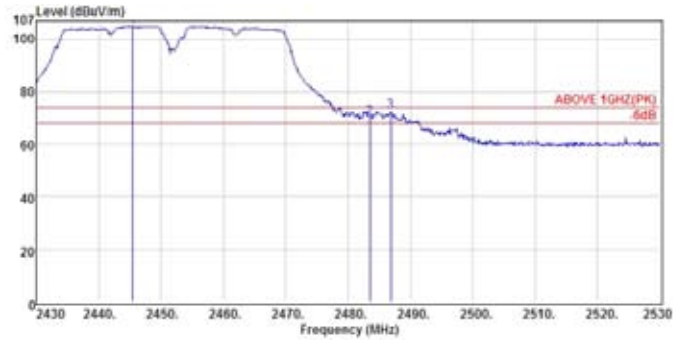

Site no. : Audix NO.1 Chamber Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2452MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2445.50	28.25	5.32	71.30	104.87	74.00	-30.87	Peak
2	2493.50	28.29	5.37	38.32	89.98	74.00	4.02	Peak
3	2498.80	28.29	5.37	38.73	72.45	74.00	1.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

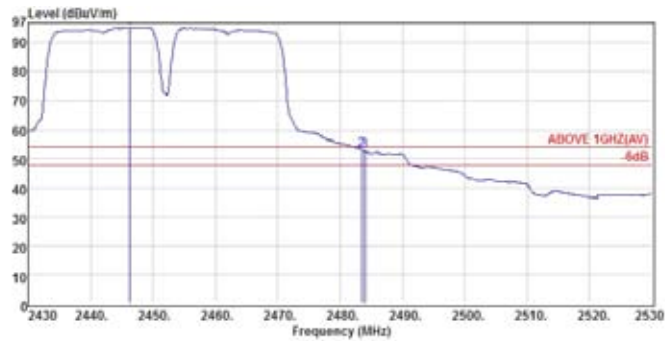

Site no. : Audix NO.1 Chamber Data no. : 6
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2452MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2448.20	28.25	5.32	61.84	95.21	54.00	-41.21	Average
2	2493.50	28.29	5.37	19.48	53.14	54.00	0.88	Average
3	2494.00	28.29	5.37	19.02	52.68	54.00	1.32	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 11. 25 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT40 , Transmit, Channel: 4, Frequency: 2427MHz

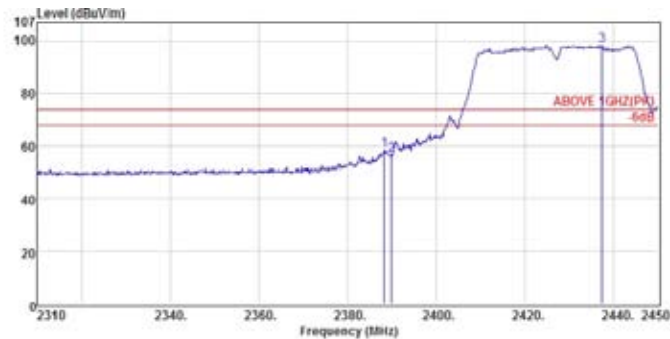

Site no. : Audix NO.1 Chamber Data no. : 11
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2427MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2388.28	28.20	5.24	25.15	58.59	74.00	15.41	Peak
2	2389.94	28.20	5.24	23.24	58.68	74.00	17.32	Peak
3	2427.40	28.24	5.30	64.56	98.10	74.00	-24.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

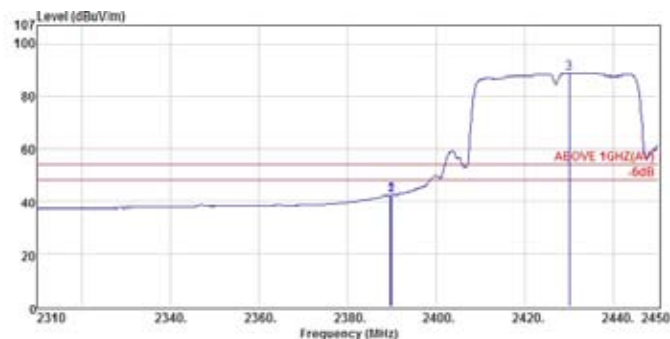

Site no. : Audix NO.1 Chamber Data no. : 12
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2427MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2388.88	28.20	5.24	8.84	42.28	54.00	11.72	Average
2	2389.94	28.20	5.24	8.90	42.34	54.00	11.66	Average
3	2429.98	28.24	5.29	55.32	88.85	54.00	-34.85	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 11. 25 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT40 , Transmit, Channel: 4, Frequency: 2427MHz

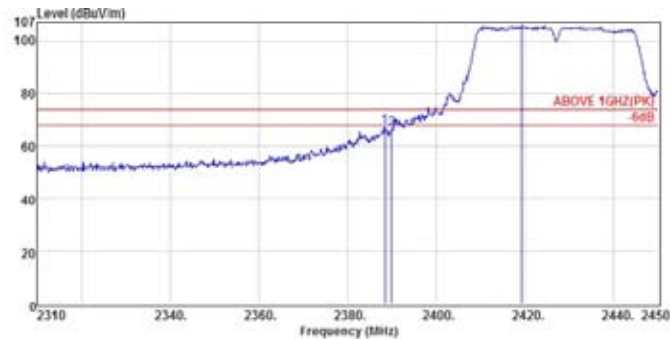

Site no. : Audix NO.1 Chamber Data no. : 9
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2427MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2388.40	28.20	5.24	33.89	87.13	74.00	8.87	Peak
2	2389.94	28.20	5.24	33.13	88.57	74.00	7.43	Peak
3	2419.34	28.23	5.28	72.52	108.03	74.00	-32.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

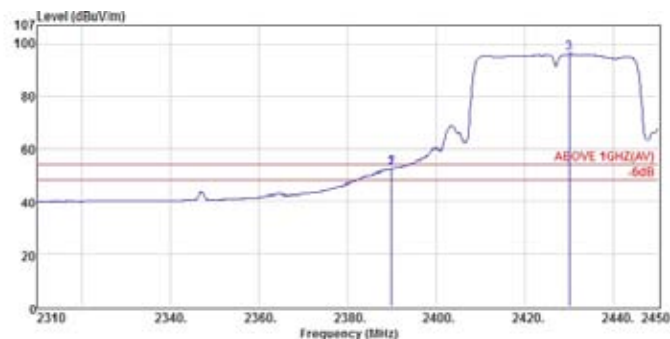

Site no. : Audix NO.1 Chamber Data no. : 10
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2427MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2388.80	28.20	5.24	18.91	52.35	54.00	1.85	Average
2	2389.94	28.20	5.24	18.94	52.38	54.00	1.82	Average
3	2429.98	28.24	5.29	82.55	98.08	54.00	-42.08	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 11. 25 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT40 , Transmit, Channel: 8, Frequency: 2447MHz

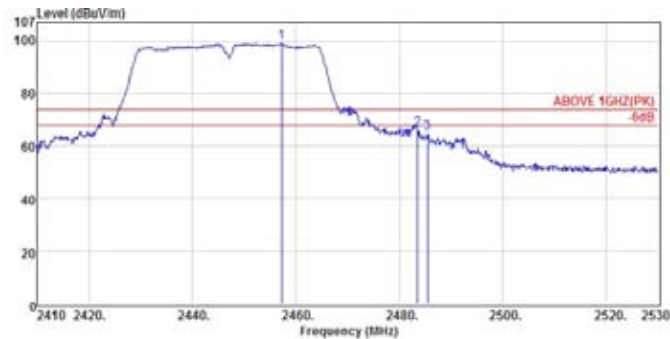

Site no. : Audix NO.1 Chamber Data no. : 15
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2447MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2457.28	28.28	5.33	85.73	89.32	74.00	-25.32	Peak
2	2483.56	28.29	5.37	32.58	88.24	74.00	7.78	Peak
3	2485.48	28.29	5.37	31.33	84.99	74.00	9.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

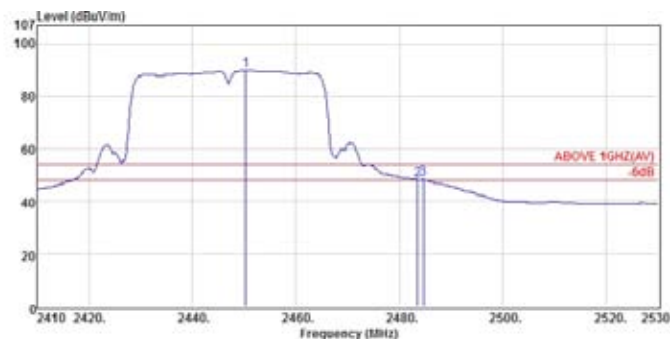

Site no. : Audix NO.1 Chamber Data no. : 16
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2447MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2450.32	28.25	5.32	58.28	89.83	54.00	-35.83	Average
2	2483.56	28.29	5.37	14.83	48.29	54.00	5.71	Average
3	2484.84	28.29	5.37	14.88	48.34	54.00	5.88	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 11. 25 Temperature: 24°C

EUT: Intelligent Gateway Humidity: 43%


Test Mode: 802.11n-HT40 , Transmit, Channel: 8, Frequency: 2447MHz

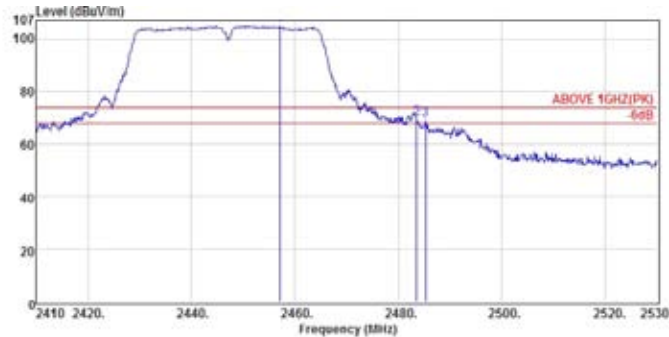

Site no. : Audix NO.1 Chamber Data no. : 13
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2447MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2457.04	28.28	5.33	71.41	105.00	74.00	-31.00	Peak
2	2483.56	28.29	5.37	35.92	89.58	74.00	4.42	Peak
3	2485.24	28.29	5.37	35.88	89.34	74.00	4.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

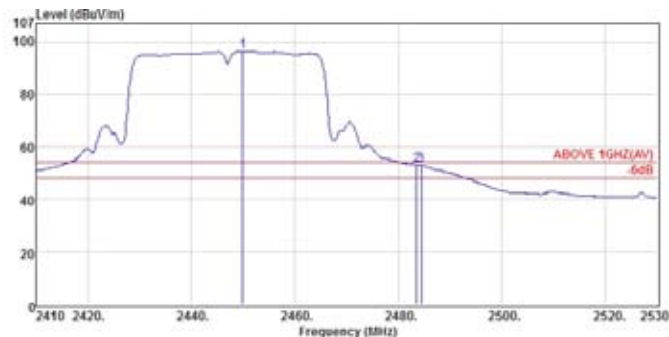

Site no. : Audix NO.1 Chamber Data no. : 14
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : 802.11n40 2447MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2448.98	28.25	5.32	82.73	98.30	54.00	-42.30	Average
2	2483.56	28.29	5.37	19.28	52.92	54.00	1.08	Average
3	2484.40	28.29	5.37	19.21	52.87	54.00	1.13	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

4.6.2. For BLE Function

Test Date: 2014. 10. 16 Temperature: 26°C Humidity: 43%

For Frequency Range 30MHz~1000MHz:

The EUT was measured during this section testing and all the test results are listed in section 4.6.2.1

No	Test Mode	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1.	BLE	CH 0	2402MHz	Transmit	# 2	# 1
2.	BLE	CH 19	2440MHz		# 2	# 1
3.	BLE	CH 39	2480MHz		# 2	# 1

* Above all final readings were measured with Peak detector.

Frequency above 1GHz:

The emissions (up to 25GHz) not reported are too low to be measured.

For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 4.6.2.2. (The restricted bands defined in part 15.205(a))

No	Test Mode	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1	BLE	CH 0	2402MHz	Transmit	# 3, # 4	# 1, # 2
2		CH 39	2480MHz		# 7, # 8	# 5, # 6

4.6.2.1. For 30-1000MHz Frequency Range Measurement Results

BLE, Transmit, Frequency: 2402MHz

Site no.	: Audix NO.1 Chamber	Data no.	: 2
Dis. / Ant.	: 3m CBL6112D 33821	Ant. pol.	: HORIZONTAL
Limit	: 30M-1G		
Env. / Ins.	: 26°C / 43% N9010A	Engineer	: Sam
EUT	: GWS-QX		
Power Rating	: AC 120V/60Hz		
Test Mode	: Tx2402MHz BLE		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	179.38	9.14	3.83	15.61	28.58	43.50	14.92	Peak
2	350.10	14.43	5.20	9.10	28.73	46.00	17.27	Peak
3	800.18	20.02	7.16	3.80	30.98	46.00	15.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no.	: Audix NO.1 Chamber	Data no.	: 1
Dis. / Ant.	: 3m CBL6112D 33821	Ant. pol.	: VERTICAL
Limit	: 30M-1G		
Env. / Ins.	: 26°C / 43% N9010A	Engineer	: Sam
EUT	: GWS-QX		
Power Rating	: AC 120V/60Hz		
Test Mode	: Tx2402MHz BLE		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	75.59	7.10	2.95	27.77	37.82	40.00	2.18	Peak
2	122.15	12.18	3.39	25.00	40.57	43.50	2.93	Peak
3	513.06	17.16	6.45	7.91	31.52	46.00	14.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

BLE, Transmit, Frequency: 2440MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2442MHz BLE

Data no. : 2
 Ant. pol. : HORIZONTAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	175.50	9.28	3.80	15.31	28.39	43.50	15.11	Peak
2	250.19	12.40	4.33	10.84	27.57	46.00	18.43	Peak
3	350.10	14.43	5.20	10.18	29.81	46.00	16.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2442MHz BLE

Data no. : 1
 Ant. pol. : VERTICAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	37.76	14.45	2.48	16.76	33.69	40.00	6.31	Peak
2	129.91	11.75	3.45	20.36	35.56	43.50	7.94	Peak
3	649.83	18.53	6.61	7.39	32.53	46.00	13.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

BLE, Transmit, Frequency: 2480MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2480MHz BLE

Data no. : 2
 Ant. pol. : HORIZONTAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	179.38	9.14	3.83	15.78	28.75	43.50	14.75	Peak
2	355.92	14.55	5.25	9.00	28.80	46.00	17.20	Peak
3	801.15	20.04	7.17	5.61	32.82	46.00	13.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2480MHz BLE

Data no. : 1
 Ant. pol. : VERTICAL
 Engineer : Sam

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	40.67	12.98	2.52	19.30	34.80	40.00	5.20	Peak
2	131.85	11.66	3.46	17.00	32.12	43.50	11.38	Peak
3	832.19	20.22	7.29	6.90	34.41	46.00	11.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

4.6.2.2. Restricted Bands Measurement Results

Date of Test : 2014. 09. 29 Temperature : 26°C

EUT : Intelligent Gateway Humidity : 43%


Test Mode : BLE, Transmit, Channel: 0, Frequency: 2402MHz

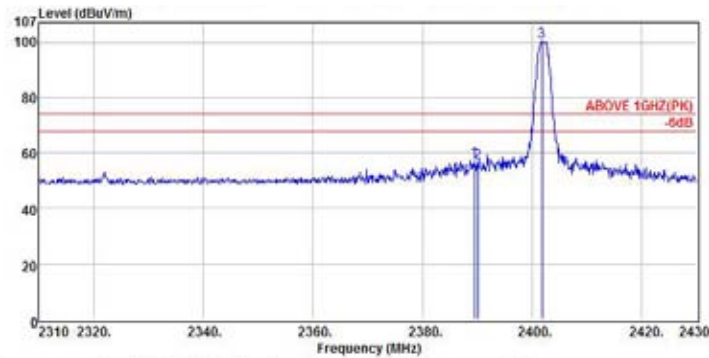

Site no. : Audix NO.1 Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 26°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2402MHz BLE

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Readings (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2389.44	28.20	5.24	23.75	57.19	74.00	16.81	Peak
2	2390.04	28.20	5.24	23.24	56.88	74.00	17.32	Peak
3	2401.80	28.21	5.25	66.83	100.39	74.00	-26.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

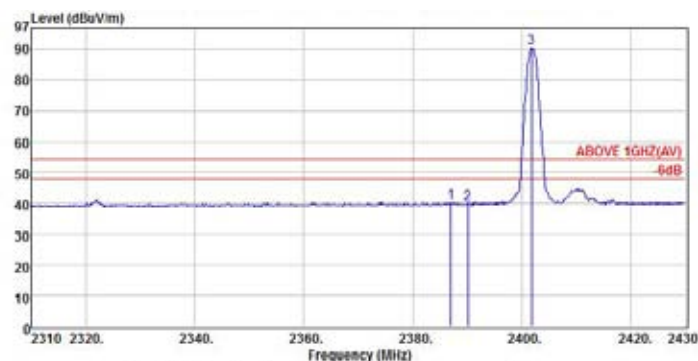

Site no. : Audix NO.1 Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 26°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2402MHz BLE


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Readings (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2388.82	28.20	5.23	8.70	40.13	54.00	13.87	Average
2	2390.04	28.20	5.24	6.32	39.76	54.00	14.24	Average
3	2401.80	28.21	5.25	57.22	90.68	54.00	-36.68	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature : 26°C

EUT : Intelligent Gateway Humidity : 43%


Test Mode : BLE, Transmit, Channel: 0, Frequency: 2402MHz

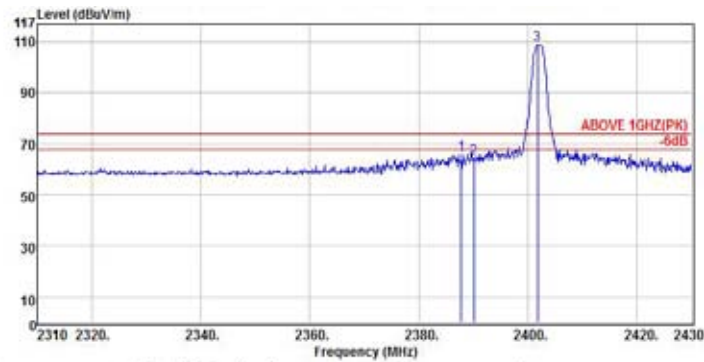

Site no. : Audix NO.1 Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 26°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2402MHz BLE

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2387.76	28.20	5.24	32.40	65.84	74.00	8.16	Peak
2	2390.04	28.20	5.24	30.77	64.21	74.00	9.79	Peak
3	2401.80	28.21	5.25	75.40	108.86	74.00	-34.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

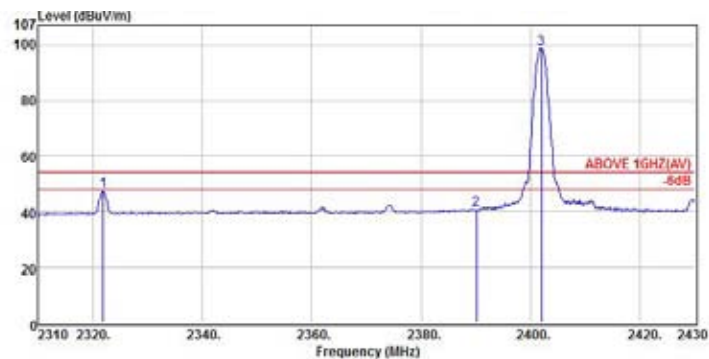

Site no. : Audix NO.1 Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 26°C / 43% N9010A Engineer : Sam
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2402MHz BLE


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2321.88	28.18	5.14	13.98	47.23	54.00	8.77	Average
2	2390.04	28.20	5.24	7.16	40.60	54.00	13.40	Average
3	2401.82	28.21	5.28	65.95	98.82	54.00	-44.82	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature : 26°C

EUT : Intelligent Gateway Humidity : 43%


Test Mode : BLE, Transmit, Channel: 39, Frequency: 2480MHz

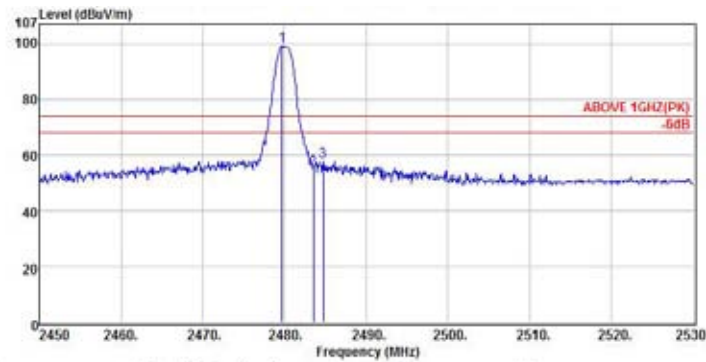

Site no. : Audix NO.1 Chamber Data no. : 7
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N8010A Engineer : San
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2480MHz BLE

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μV)	Emission Level (dB μV/m)	Limits (dB μV/m)	Margin (dB)	Remark
1	2479.68	28.28	5.36	65.23	98.87	74.00	-24.87	Peak
2	2483.52	28.29	5.37	21.42	55.08	74.00	18.92	Peak
3	2484.72	28.29	5.37	24.07	57.73	74.00	16.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

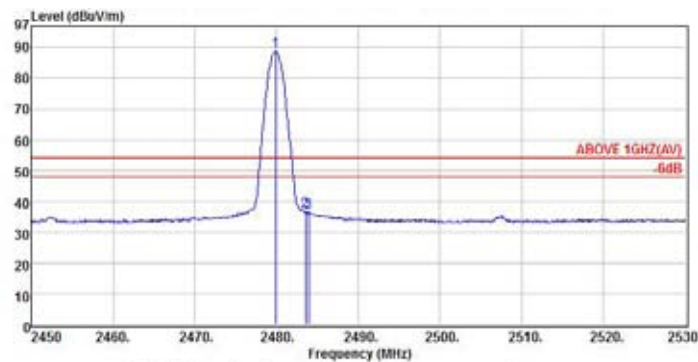

Site no. : Audix NO.1 Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N8010A Engineer : San
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2480MHz BLE


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μV)	Emission Level (dB μV/m)	Limits (dB μV/m)	Margin (dB)	Remark
1	2479.92	28.28	5.36	55.07	88.71	54.00	-34.71	Average
2	2483.52	28.29	5.37	3.00	36.88	54.00	17.34	Average
3	2483.92	28.29	5.37	2.84	36.50	54.00	17.50	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 09. 29 Temperature : 26°C

EUT : Intelligent Gateway Humidity : 43%


Test Mode : BLE, Transmit, Channel: 39, Frequency: 2480MHz

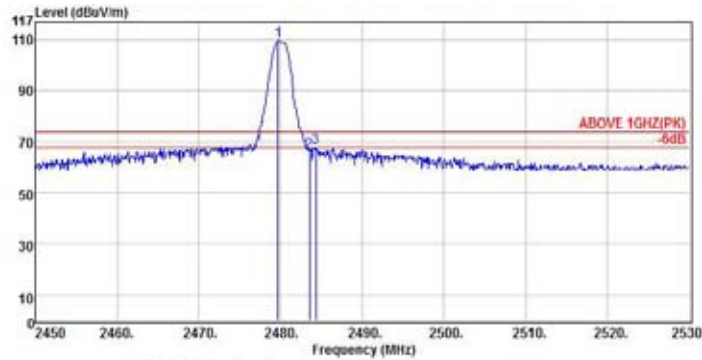

Site no. : Audix NO.1 Chamber Data no. : 5
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(PK)
 Env. / Ins. : 28°C / 43% N8010A Engineer : San
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2480MHz BLE

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2479.68	28.28	5.38	75.88	109.52	74.00	-35.52	Peak
2	2483.52	28.29	5.37	32.33	65.99	74.00	8.01	Peak
3	2484.32	28.29	5.37	34.24	67.90	74.00	6.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

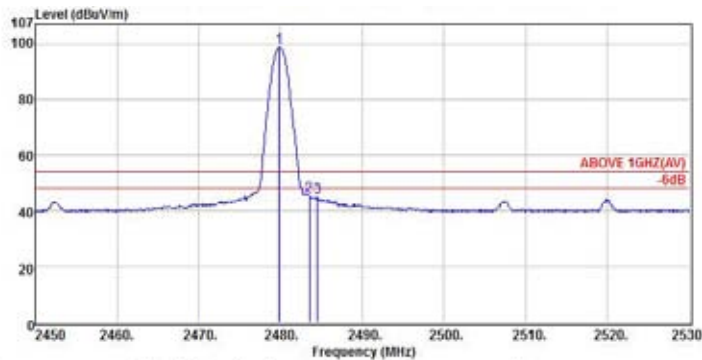

Site no. : Audix NO.1 Chamber Data no. : 8
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : ABOVE 1GHZ(AV)
 Env. / Ins. : 28°C / 43% N8010A Engineer : San
 EUT : GWS-QX
 Power Rating : AC 120V/60Hz
 Test Mode : Tx2480MHz BLE

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2479.84	28.28	5.38	85.07	98.71	54.00	-44.71	Average
2	2483.52	28.29	5.37	11.63	45.29	54.00	8.71	Average
3	2484.56	28.29	5.37	11.36	45.02	54.00	8.98	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.


5. 6dB BANDWIDTH MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	R&S	FSV30	101181	2014. 03. 14	1 Year

5.2. Block Diagram of Test Setup

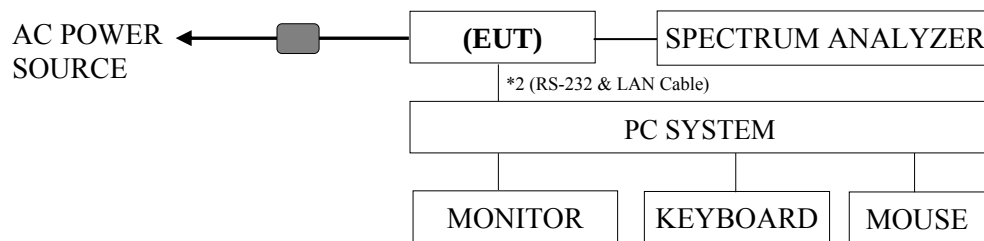

: AC ADAPTER

EUT: INTELLIGENT GATEWAY

5.3. Specification Limits [§15.247(a)(2)]

The minimum 6dB bandwidth shall be at least 500kHz.

5.4. Operating Condition of EUT

The test program “Teraterm” for WLAN and BLE was used to enable the EUT to transmit data at different channel frequency individually.

5.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 1.5% EBW, $VBW \geq 3 \times RBW$. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

The measurement guideline was according to KDB 558074 D01 DTS Meas Guidance is v03r02.

5.6. Test Results

PASSED. All the test results are attached in next pages.


5.6.1. WLAN Function

Test Date : 2014. 09. 24 Temperature : 26°C Humidity : 50%


No	Test Mode	Channel	Frequency	6dB Bandwidth(MHz)
1	802.11b	CH 1	2412MHz	10.0900
2		CH 6	2437MHz	10.1100
3		CH 11	2462MHz	10.0900
4	802.11g	CH 1	2412MHz	16.6330
5		CH 6	2437MHz	16.5830
6		CH 11	2462MHz	16.5830
7	802.11n-HT20	CH 1	2412MHz	16.6330
8		CH 6	2437MHz	16.5830
9		CH 11	2462MHz	16.5830
10	802.11n-HT40	CH 3	2422MHz	36.5630
11		CH 6	2437MHz	36.5630
12		CH 9	2452MHz	36.5630

[Limit: least 500kHz]


802.11b, Frequency: 2412MHz

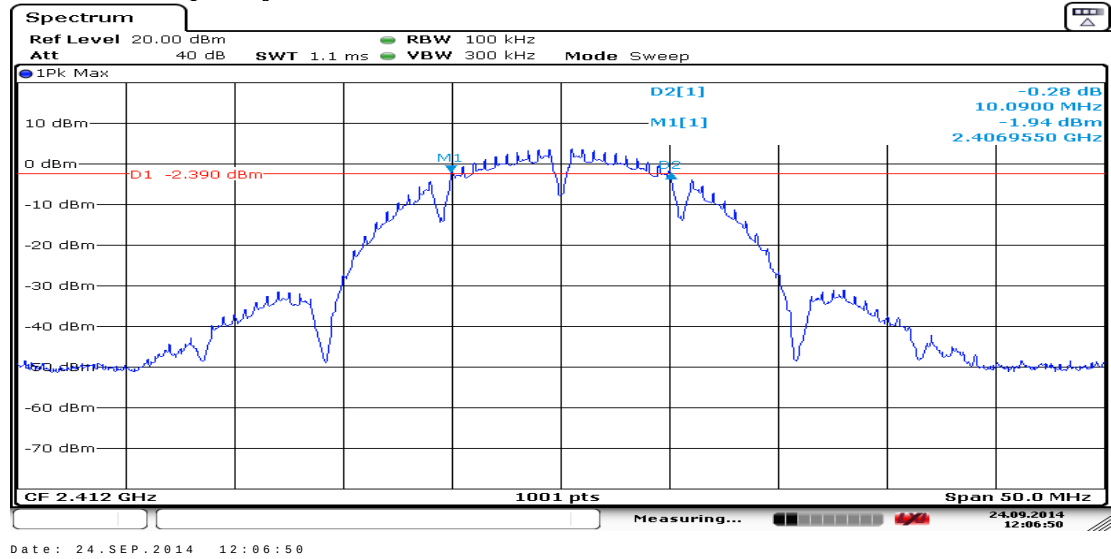


802.11b, Frequency: 2437MHz

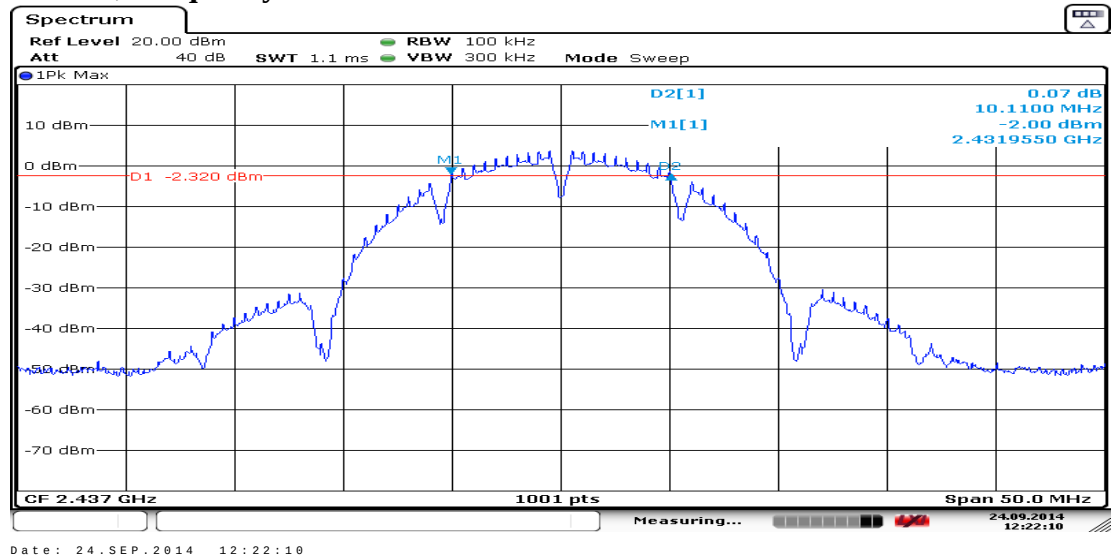


802.11b, Frequency: 2462MHz

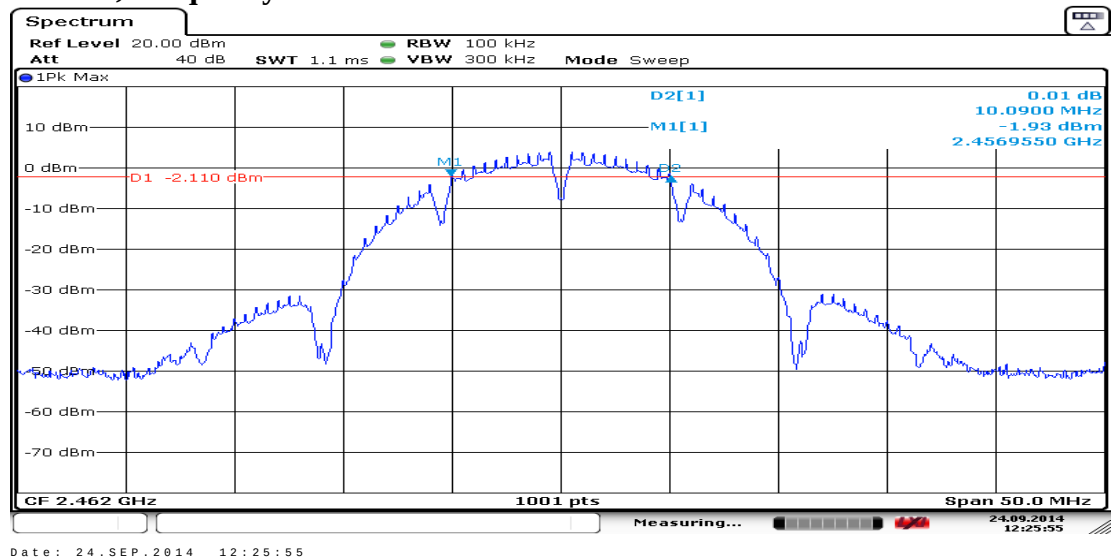


802.11g, Frequency: 2412MHz

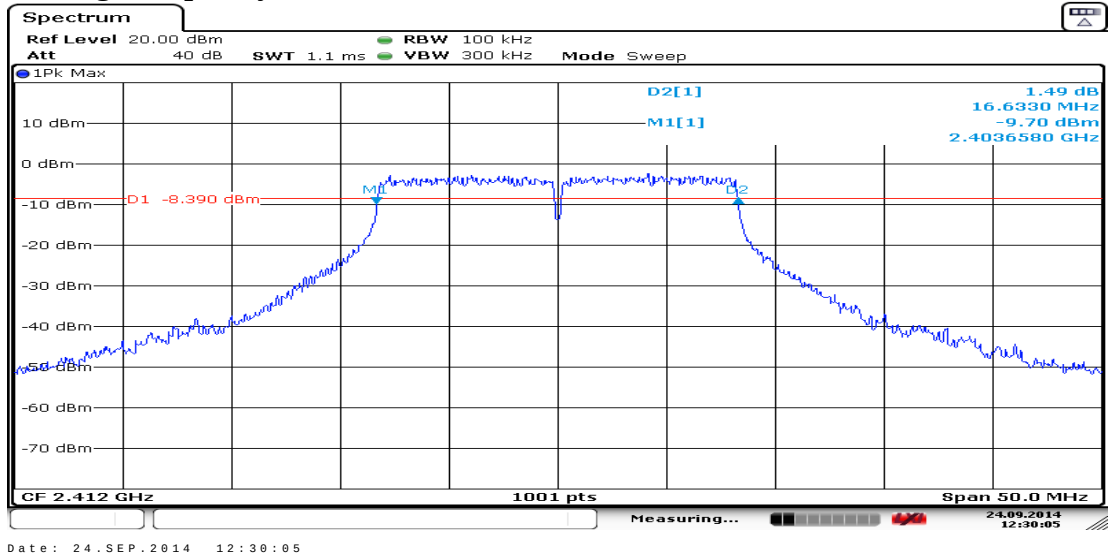


802.11g, Frequency: 2437MHz

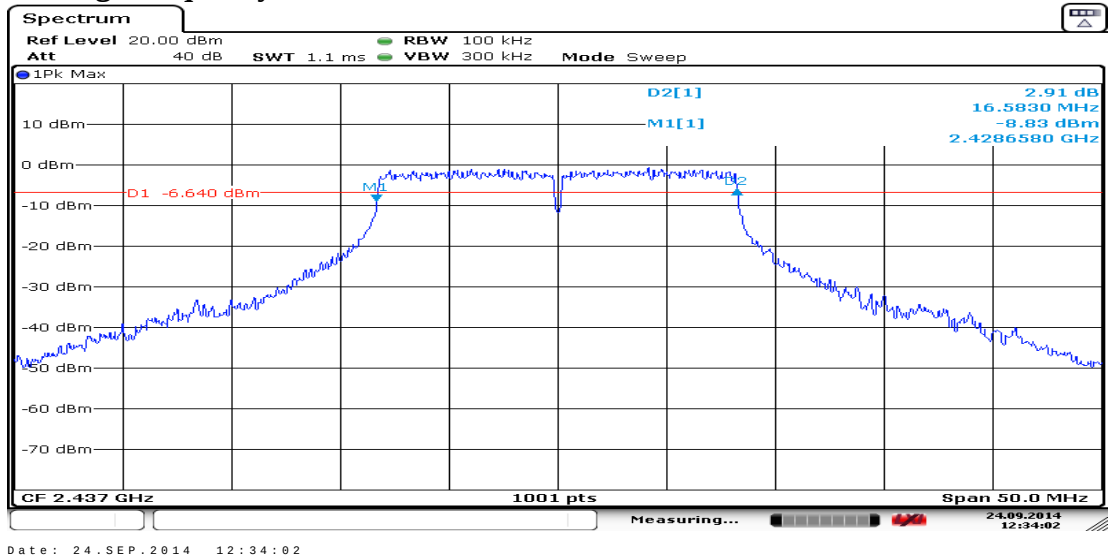


802.11g, Frequency: 2462MHz

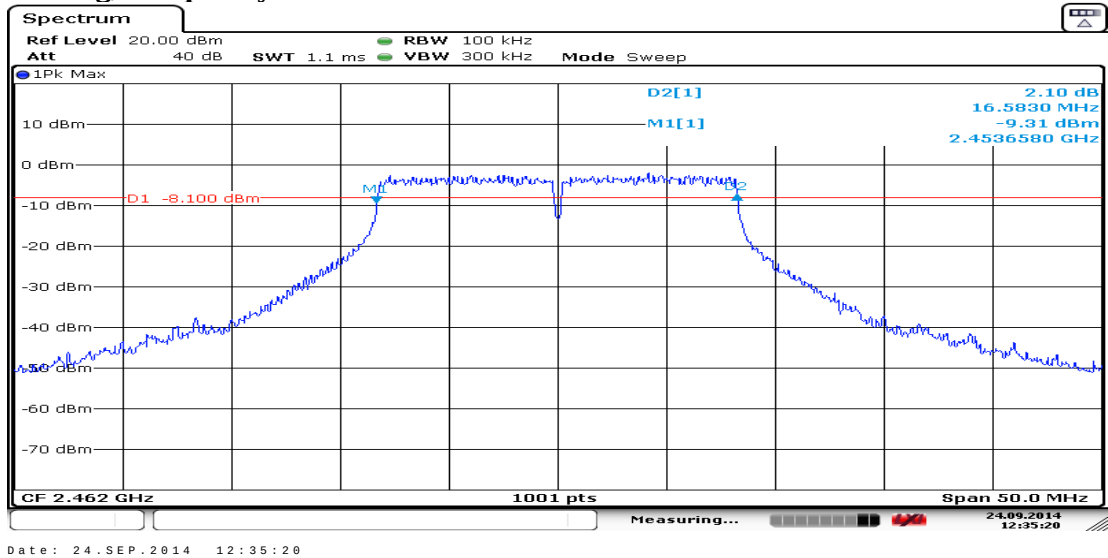


802.11n-HT20, Frequency: 2412MHz

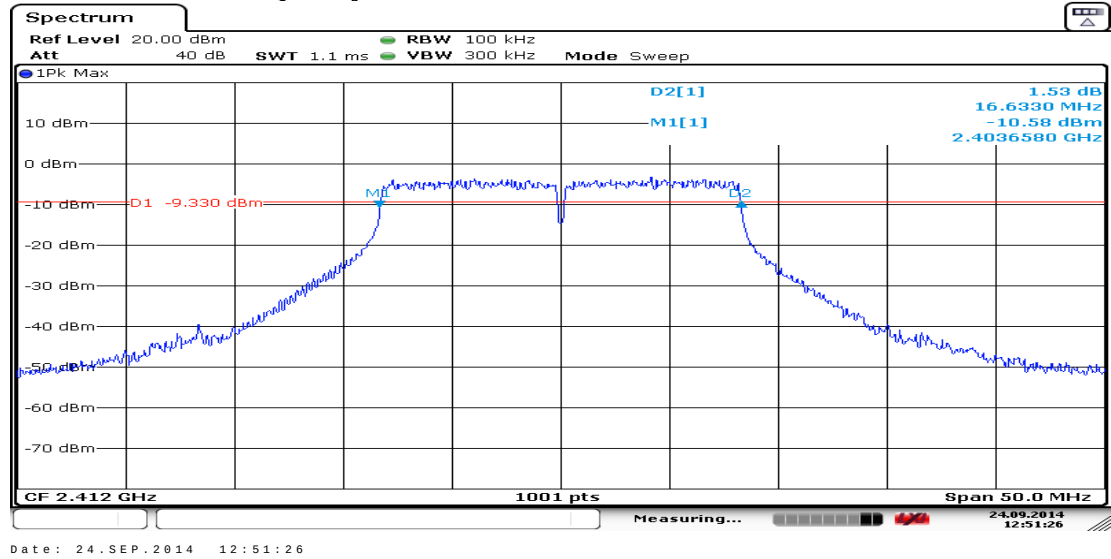


802.11n-HT20, Frequency: 2437MHz

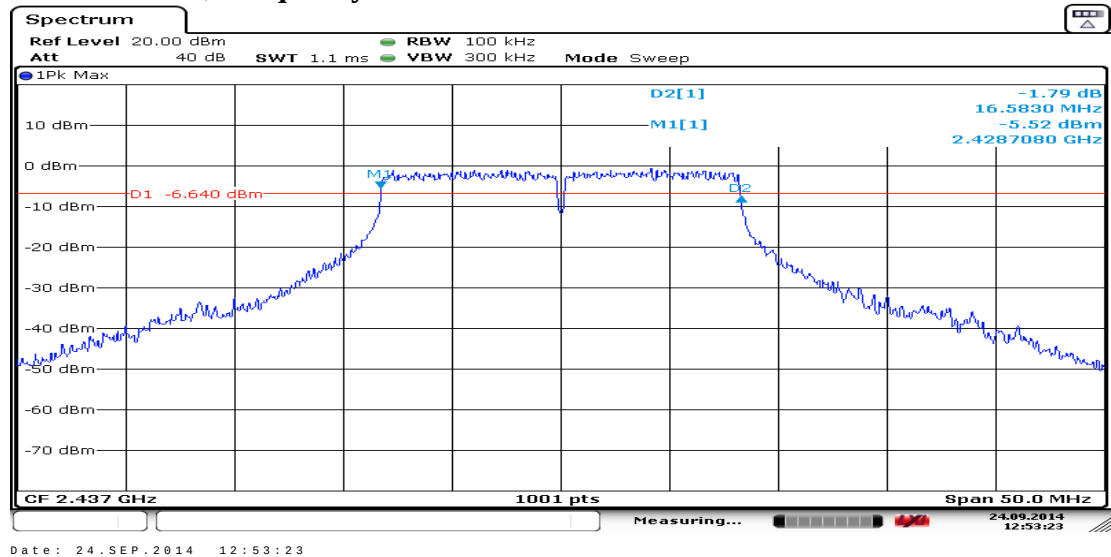


802.11n-HT20, Frequency: 2462MHz

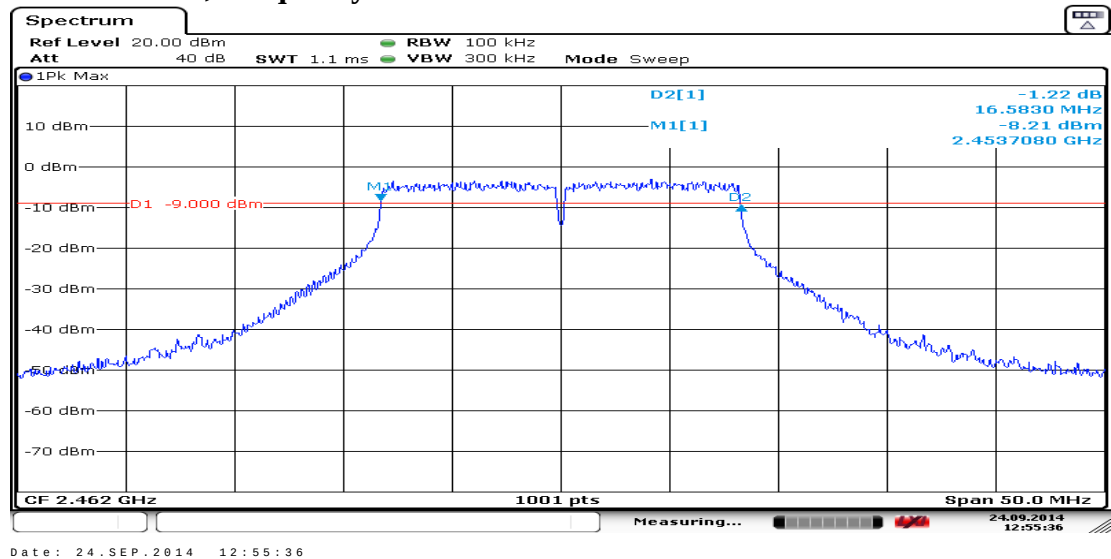


802.11n-HT40, Frequency: 2422MHz

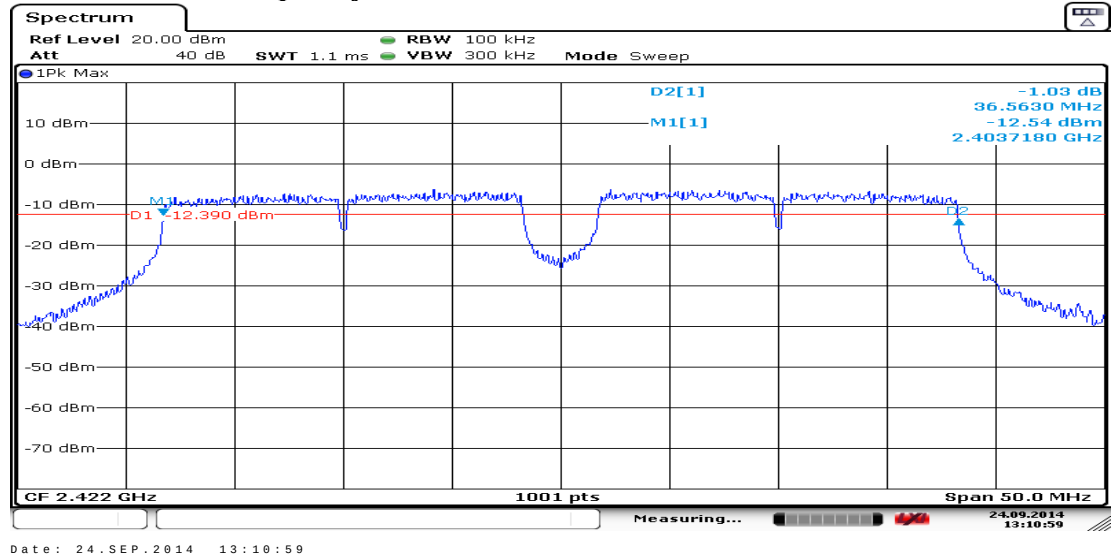

802.11n-HT40, Frequency: 2437MHz

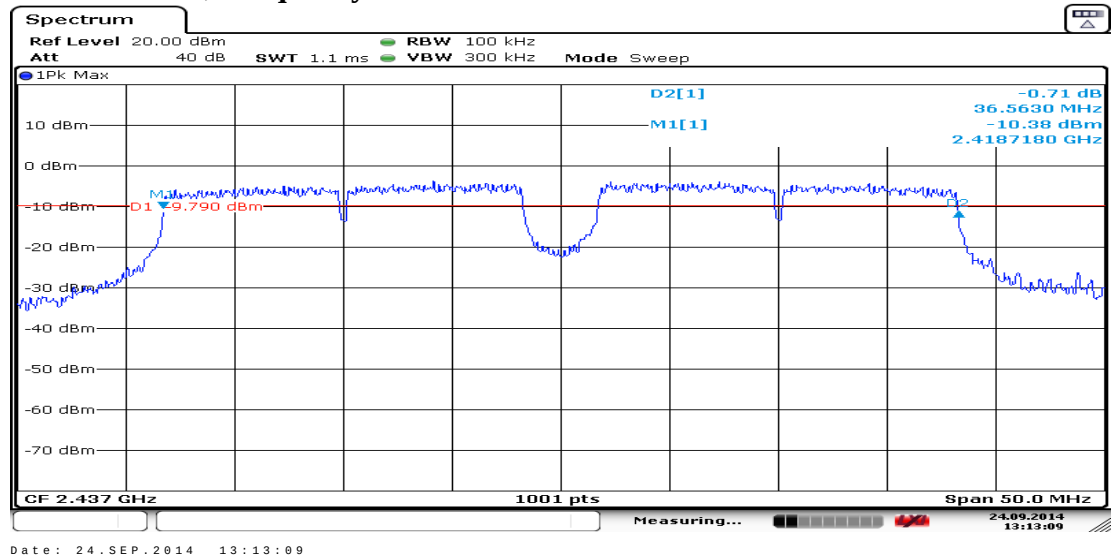

802.11n-HT40, Frequency: 2452MHz

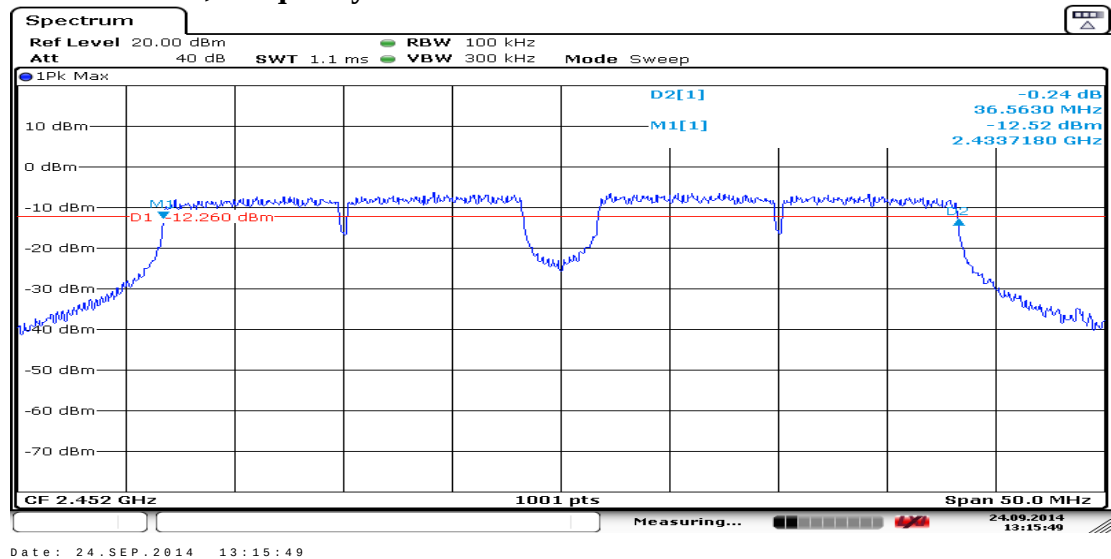


5.6.2. BLE Function

Test Date : 2014. 10. 07 Temperature : 24°C Humidity : 58%

No	Test Mode	Channel	Frequency	6dB Bandwidth(kHz)
1	BLE	CH 0	2402MHz	610
2		CH 19	2440MHz	610
3		CH 39	2480MHz	610


[Limit: least 500kHz]

BLE, Frequency: 2402MHz

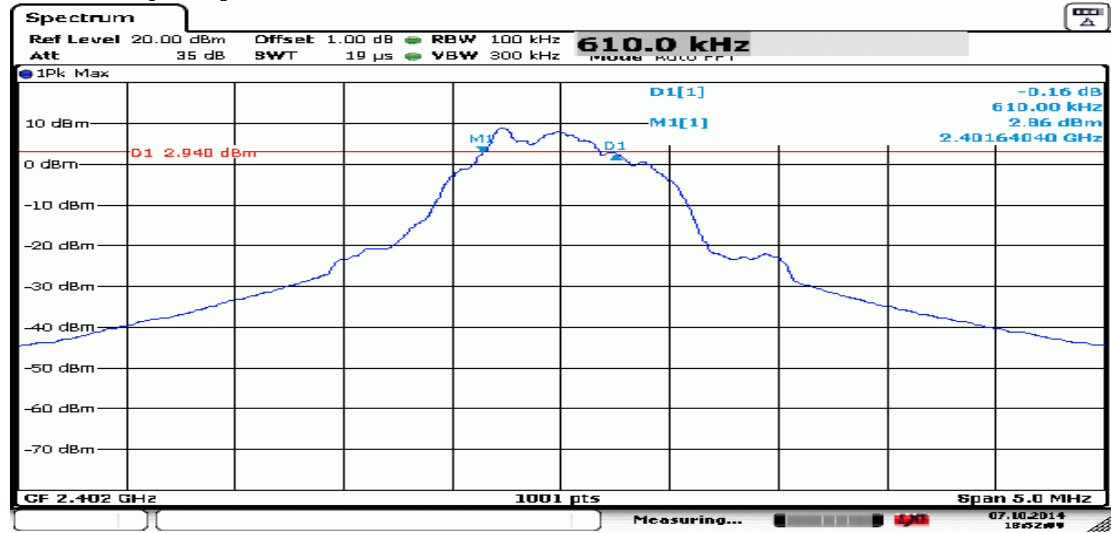


Date: 7.OCT.2014 18:52:09

BLE, Frequency: 2440MHz

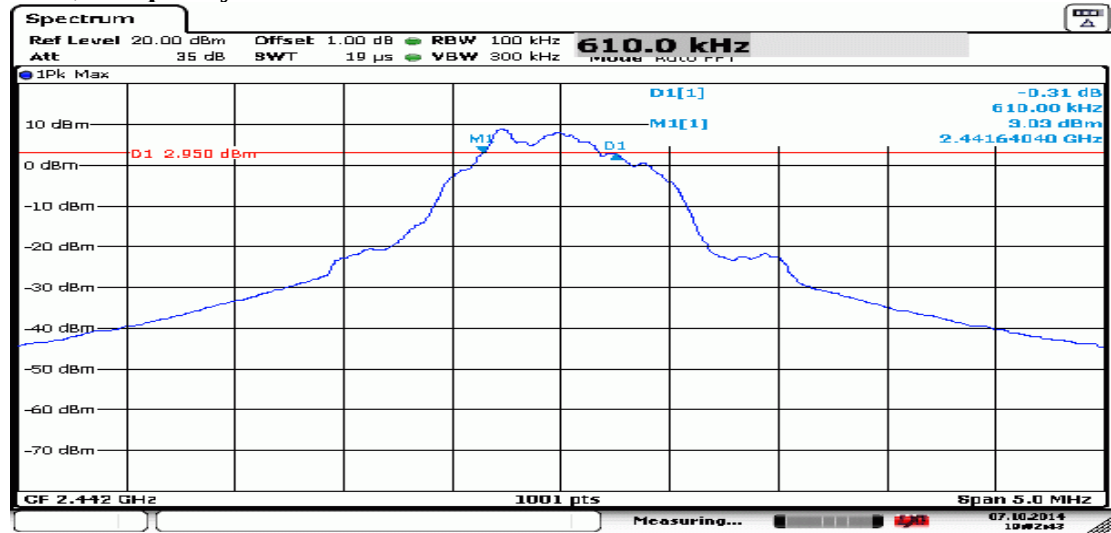

Date: 7.OCT.2014 19:02:44

BLE, Frequency: 2480MHz

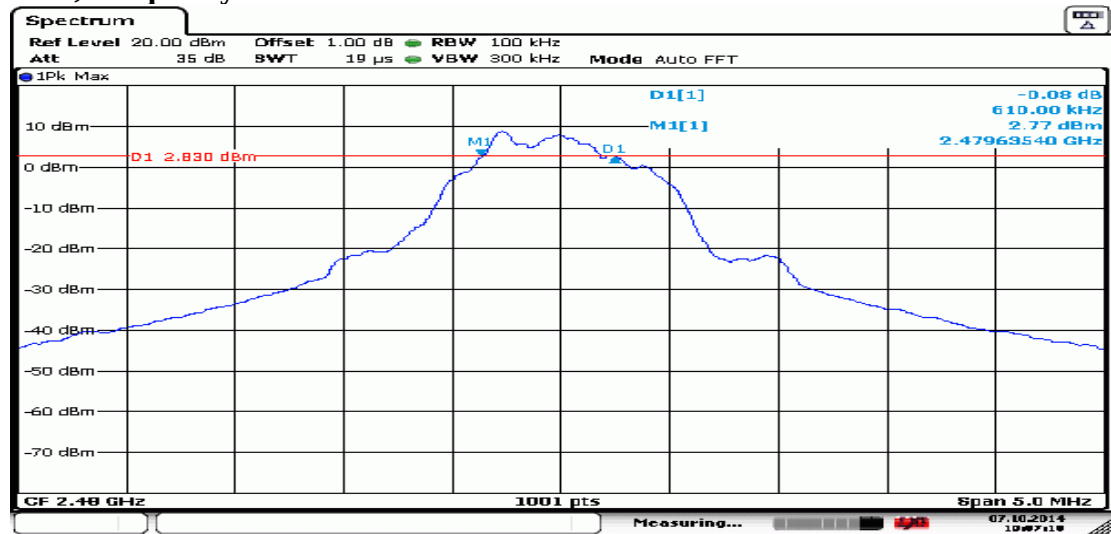

Date: 7.OCT.2014 19:07:10


6. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

6.1. Test Equipments

The following Test equipments were used during the maximum peak output power measurement:

Item	Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Interval
1.	Power Meter	Anritsu	ML2495A	1145008	2013. 10. 23	1 Year
2.	Power Sensor	Anritsu	MA2411B	1126096	2013. 10. 23	1 Year

6.2. Block Diagram of Test Setup

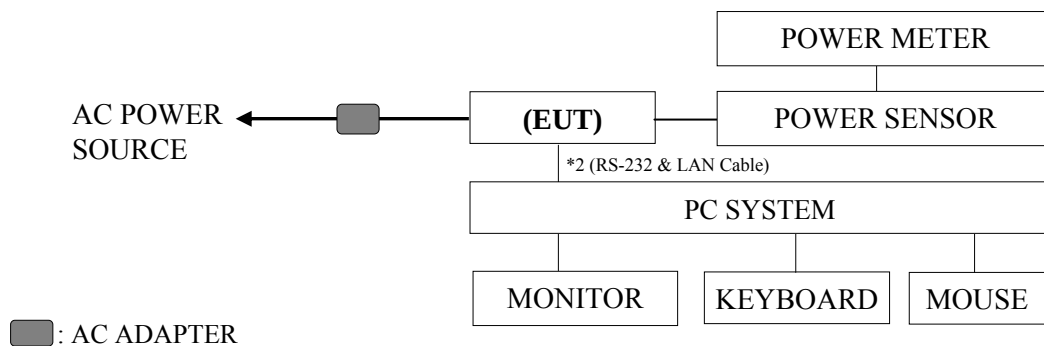

EUT: INTELLIGENT GATEWAY

6.3. Specification Limits (§15.247(b)-(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is: 1Watt. (30dBm)

6.4. Operating Condition of EUT

The test program “Teraterm” for WLAN and BLE was used to enable the EUT to transmit data at different channel frequency individually.

6.5. Test Procedure

The transmitter output was connected to the power sensor and record the reading of power meter.

The measurement guideline was according to KDB 558074 D01 DTS Meas Guidance is v03r02.

6.6. Test Results

PASSED. All the test results are listed below.

6.6.1. WLAN Function

Test Date: 2014. 09. 24 Temperature: 26°C Humidity: 50%
 Test Date: 2014. 11. 25 Temperature: 25°C Humidity: 53%

No	Test Mode	Channel	Frequency	Peak Output Power (dBm)	Power Setting
1	802.11b	CH 1	2412MHz	18.31	47
2		CH 6	2437MHz	18.19	46
3		CH 11	2462MHz	18.50	46
4	802.11g	CH 1	2412MHz	22.57	54
5		CH 6	2437MHz	23.65	57
6		CH 11	2462MHz	22.91	53
7	802.11n-HT20	CH 1	2412MHz	21.56	52
8		CH 6	2437MHz	23.33	57
9		CH 11	2462MHz	21.90	50
10	802.11n-HT40	CH 3	2422MHz	21.72	53
11		CH 6	2437MHz	23.33	58
12		CH 9	2452MHz	21.89	52
13	802.11n-HT40	CH 4	2427MHz	23.22	58
14		CH 8	2447MHz	22.84	56

[Limit: 1Watt. (30dBm)]

6.6.2. BLE Function

Test Date : 2014. 10. 07 Temperature : 24°C Humidity : 58%

No	Test Mode	Channel	Frequency	Peak Output Power (dBm)	Power Setting
1.	BLE	CH 0	2402MHz	6.70	47
2.		CH 19	2440MHz	6.85	46
3.		CH 39	2480MHz	6.66	46

[Limit: 1Watt. (30dBm)]

7. EMISSION LIMITATIONS MEASUREMENT

7.1. Test Equipment

The following test equipment was used during the emission limitations test :

Item	Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	R&S	FSV30	101181	2014. 03. 14	1 Year

7.2. Block Diagram of Test Setup

The same as section.5.2

7.3. Specification Limits [§15.247(c)]

7.3.1. In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).(※This test result attaching to §4.6.1.2 and §4.6.2.2)

7.3.2. The reference level for determining limit of emission limitations is according to the value measured indicated in plots at section 9.6.

7.4. Operating Condition of EUT

Test program RF Test is used for enabling the EUT transmitting continuing.

7.5. Test Procedure

The RF output of EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 100kHz RBW and 300kHz VBW.

The measurement guideline was according to KDB 558074 D01 DTS Meas Guidance is v03r02.

7.6. Test Results

PASSED. The testing data was attached in the next pages.


7.6.1. WLAN Function


802.11b, Frequency: 2412MHz

Test Date: 2014.10. 26

Temperature: 26°C

Humidity: 50%

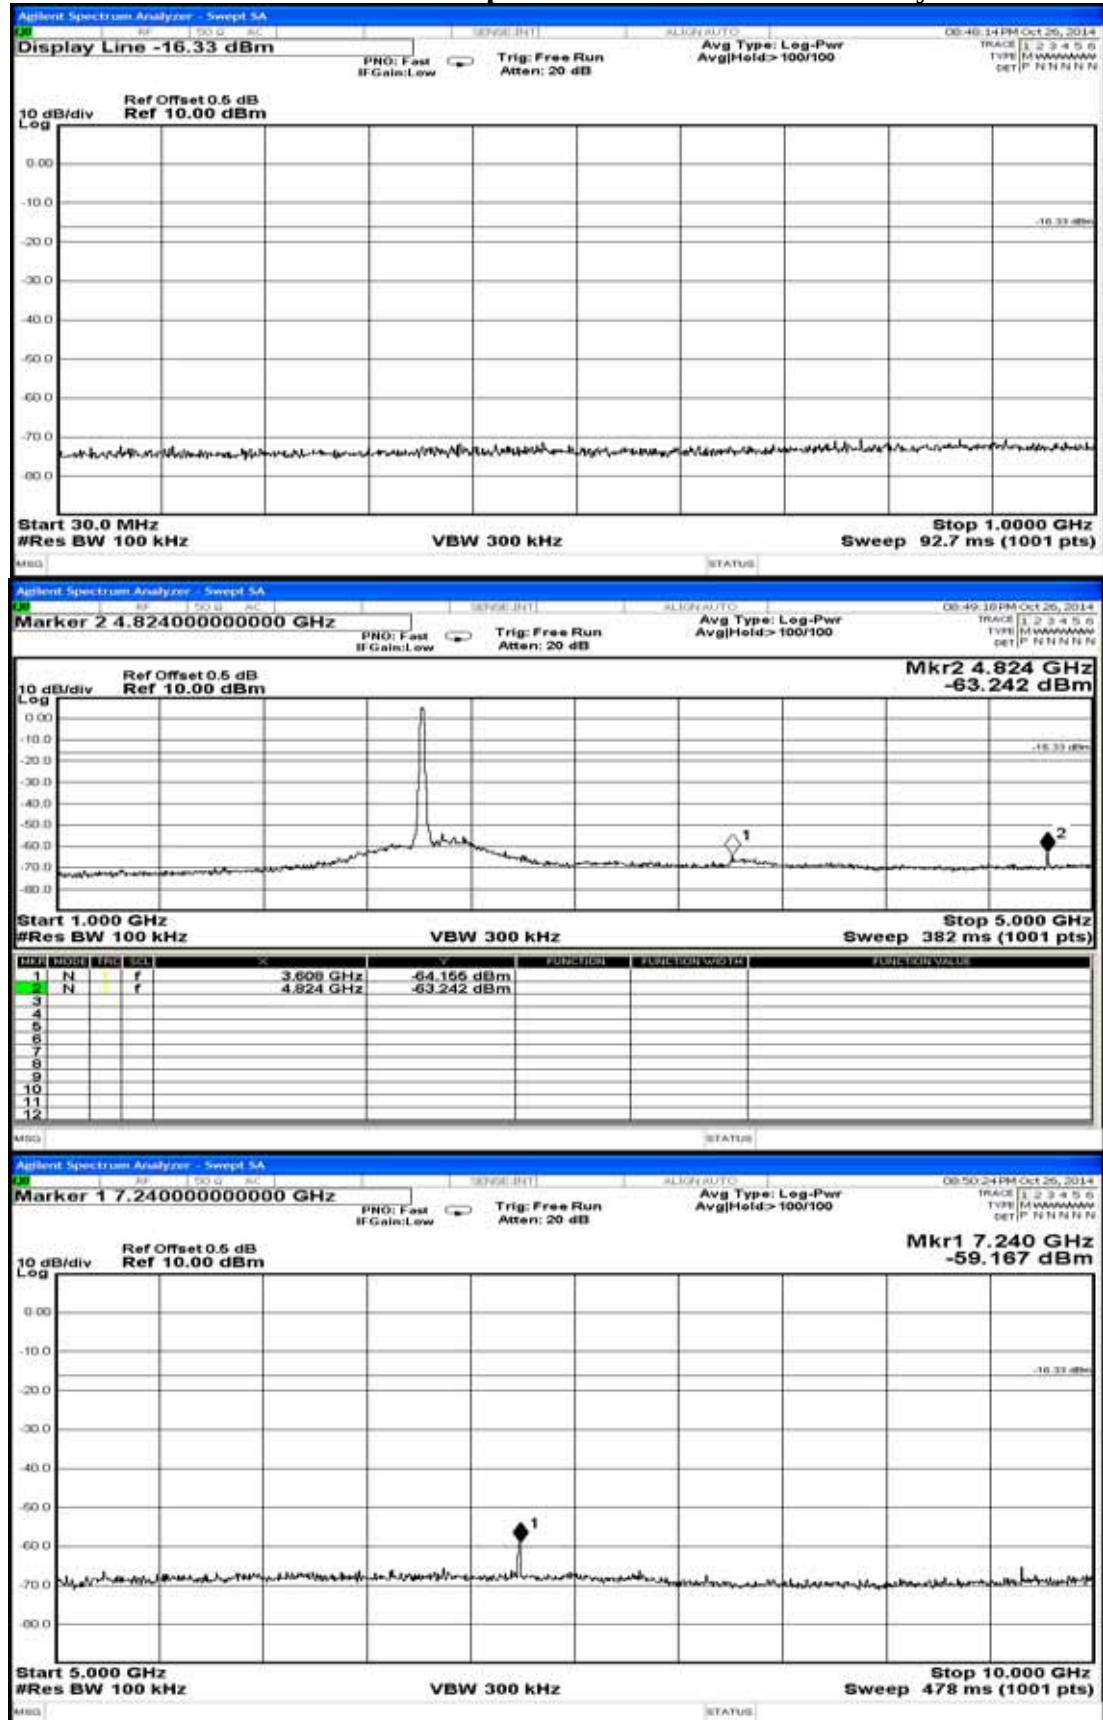

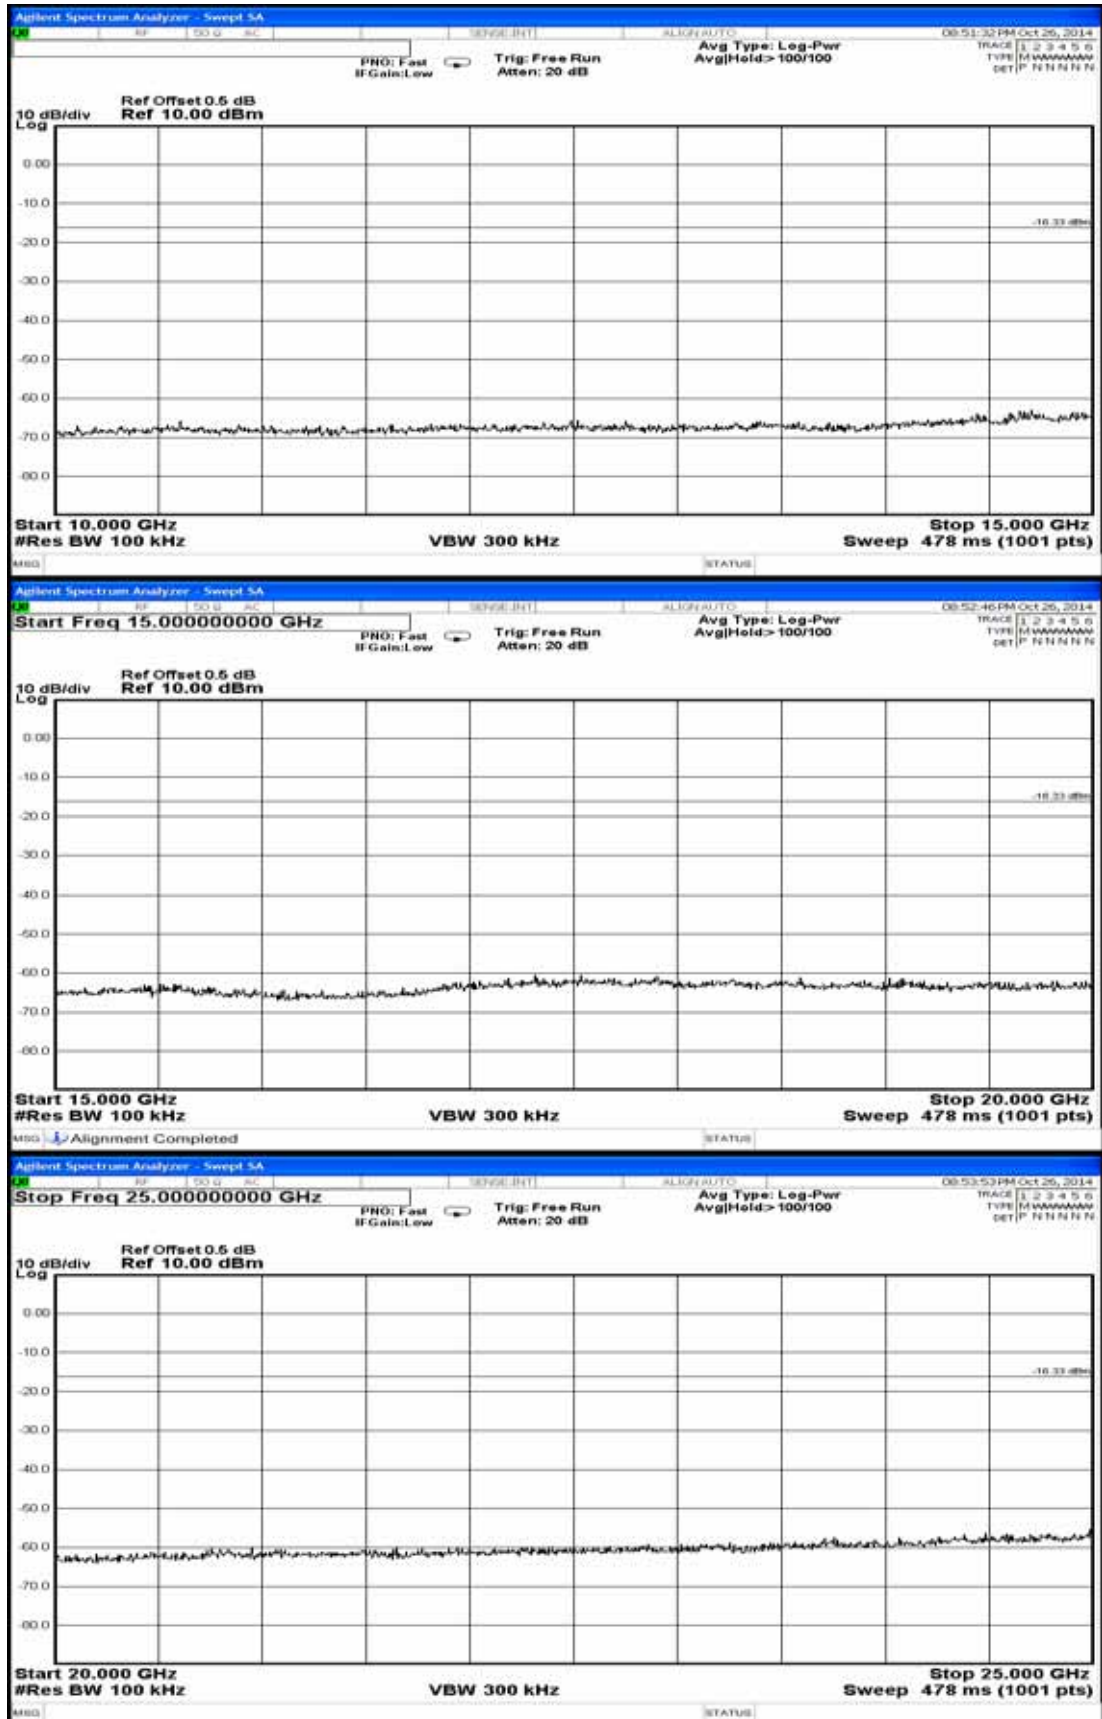



802.11b, Frequency: 2437MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 50%

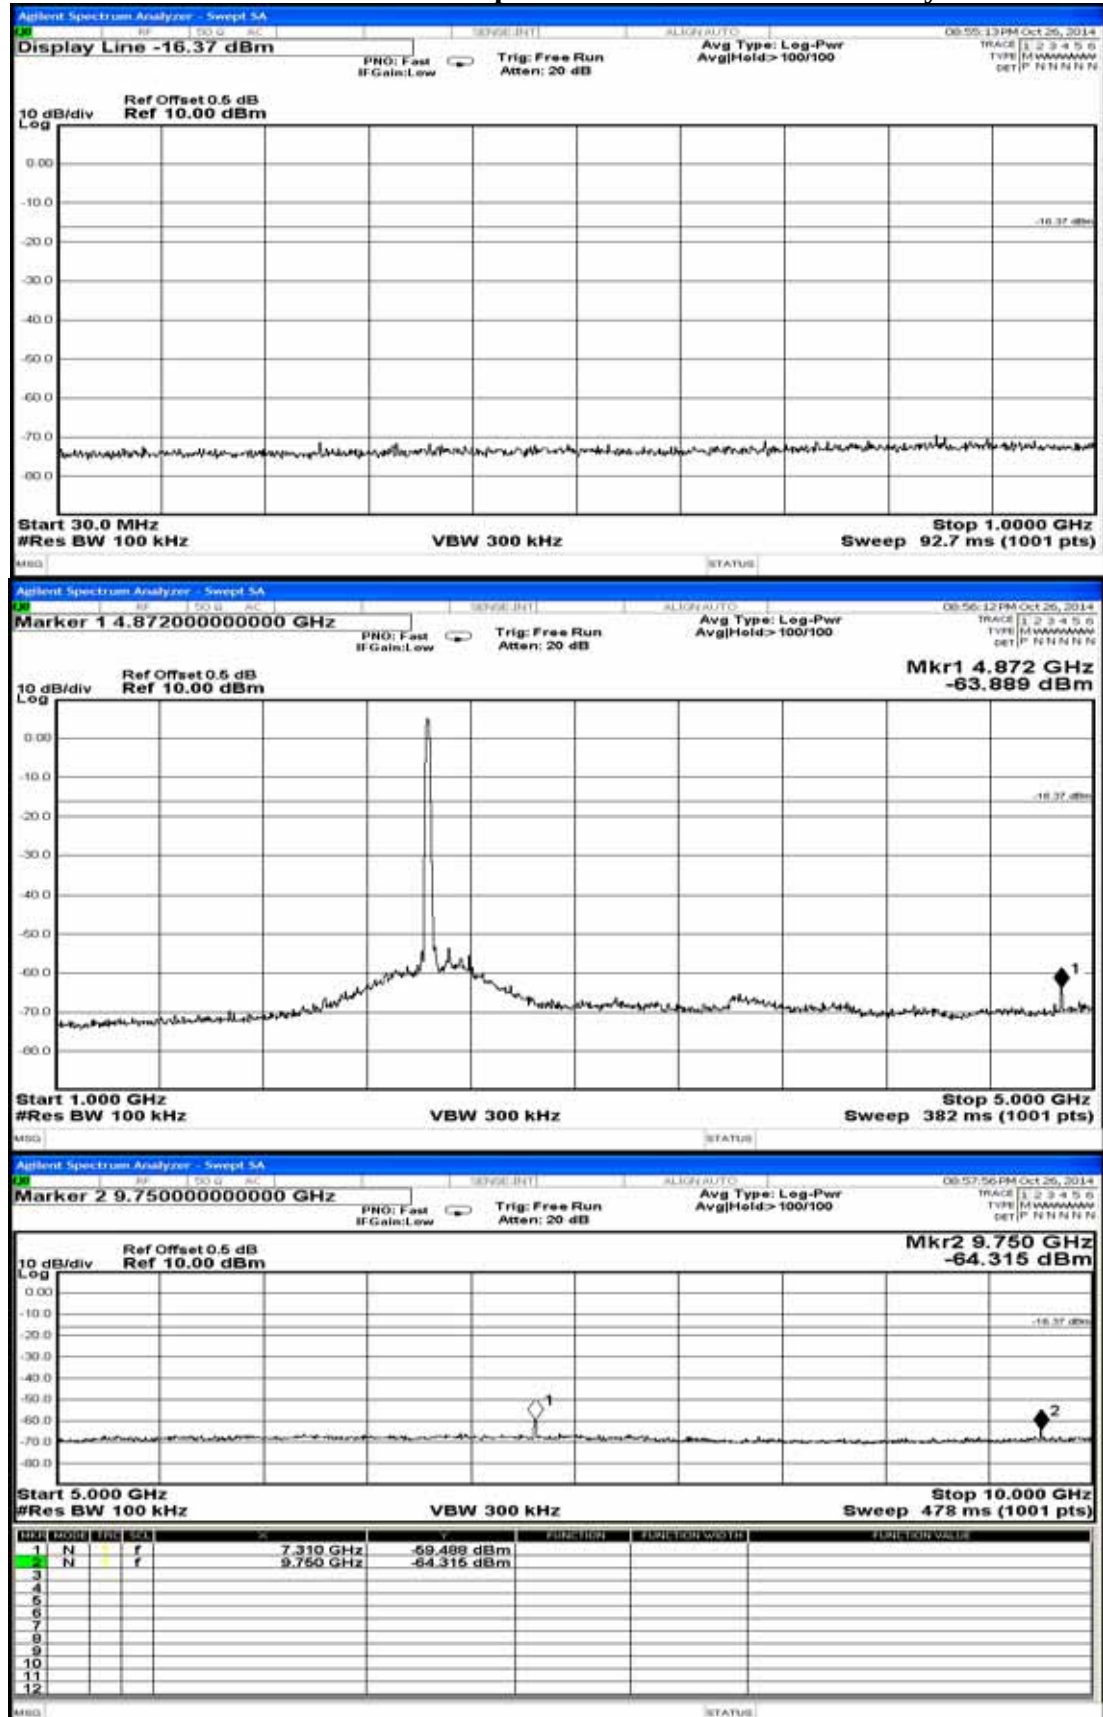

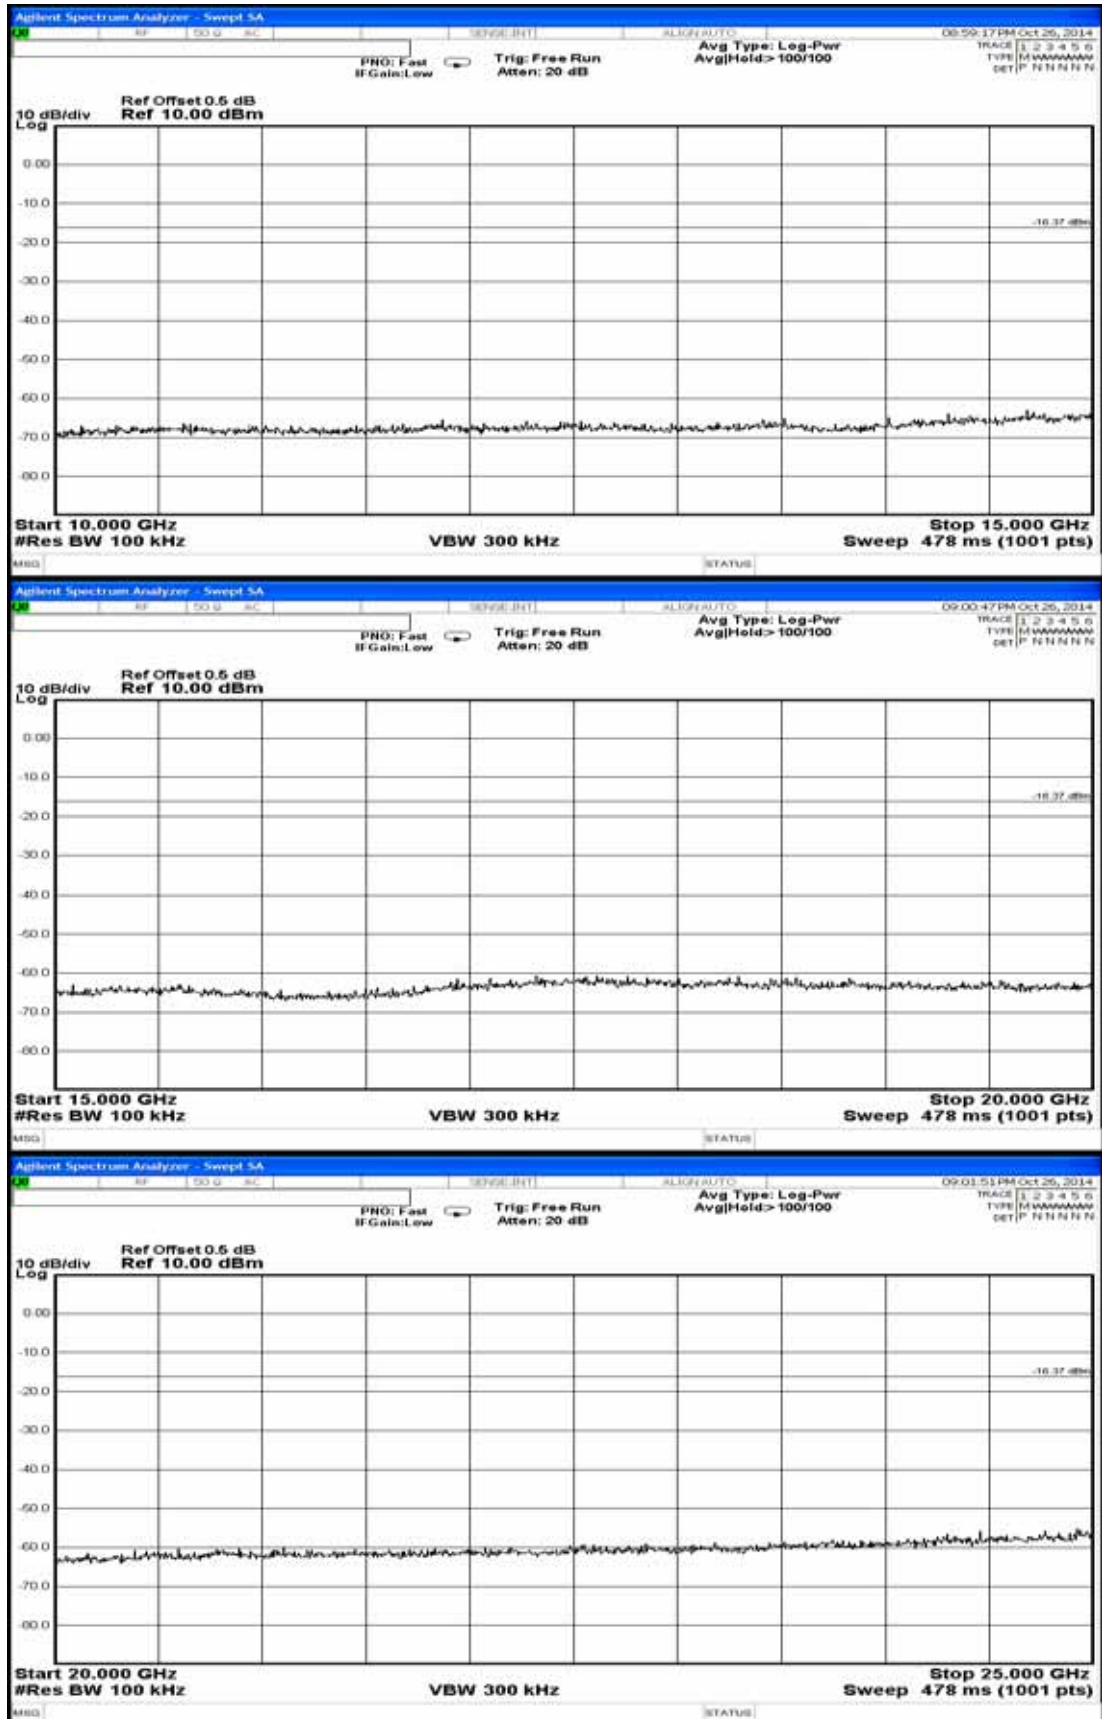



802.11b, Frequency: 2462MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 50%

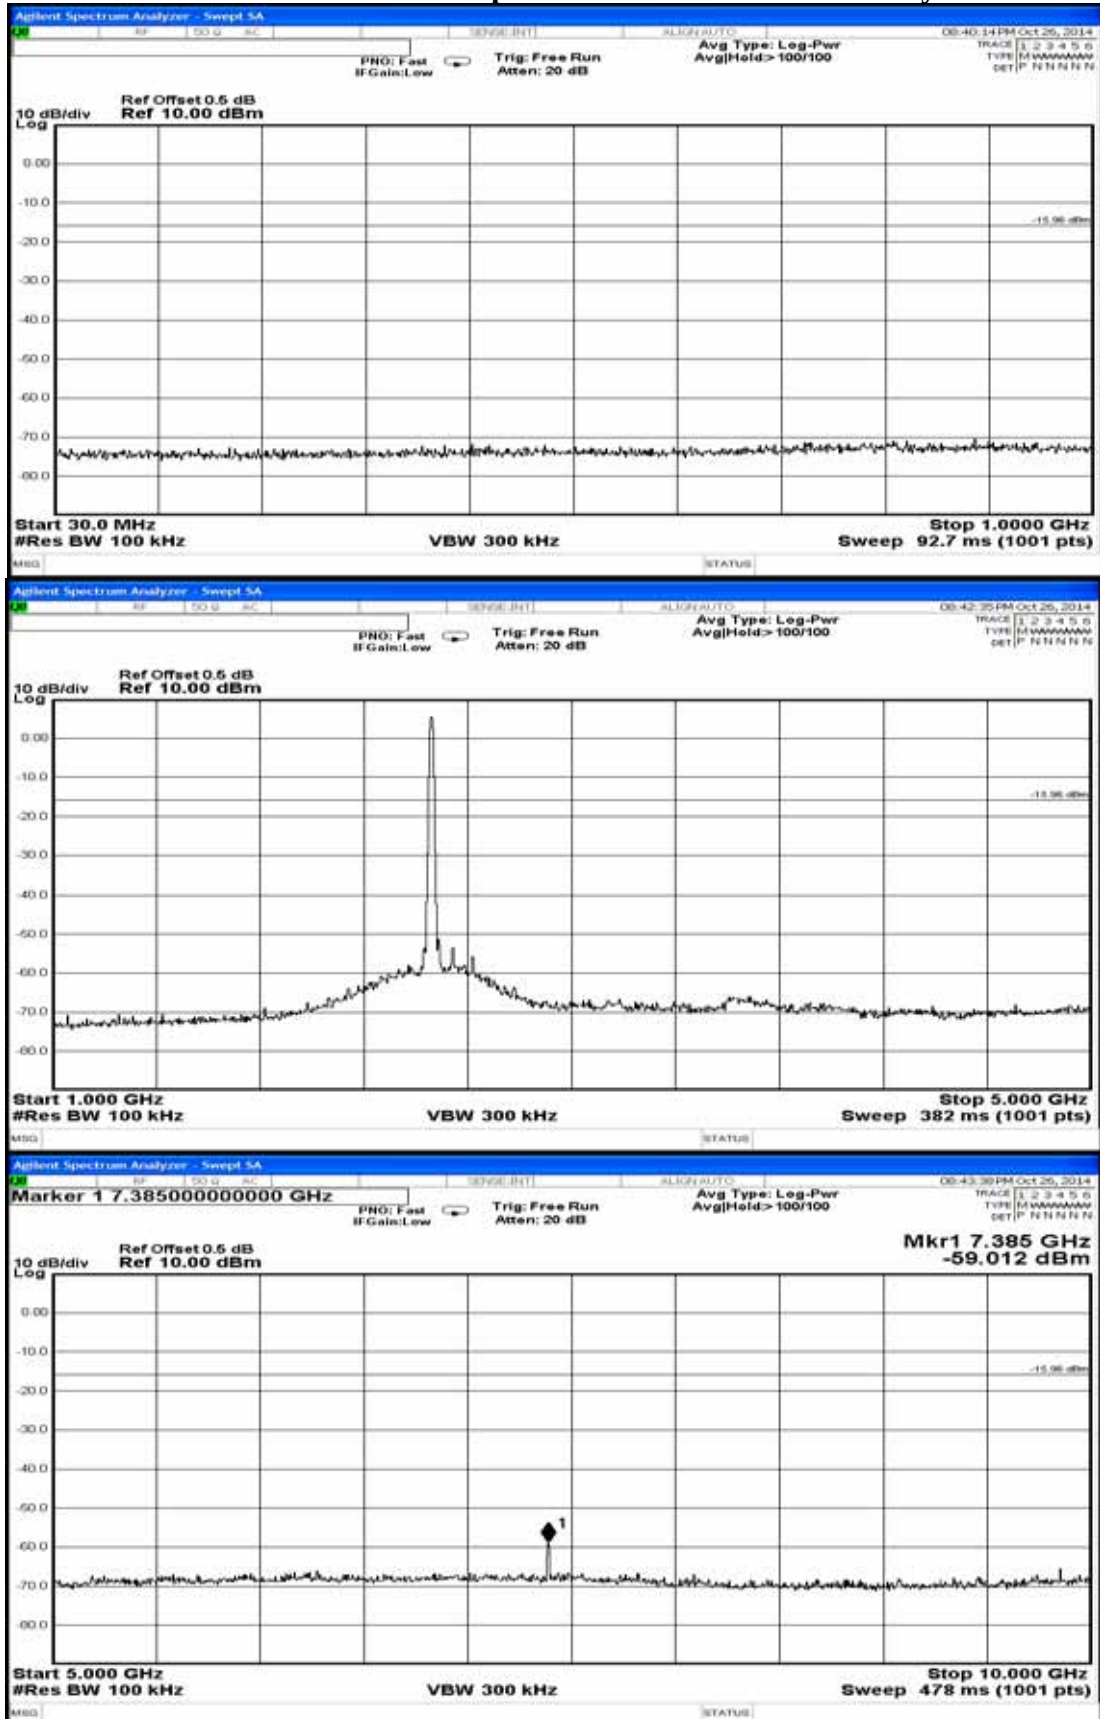

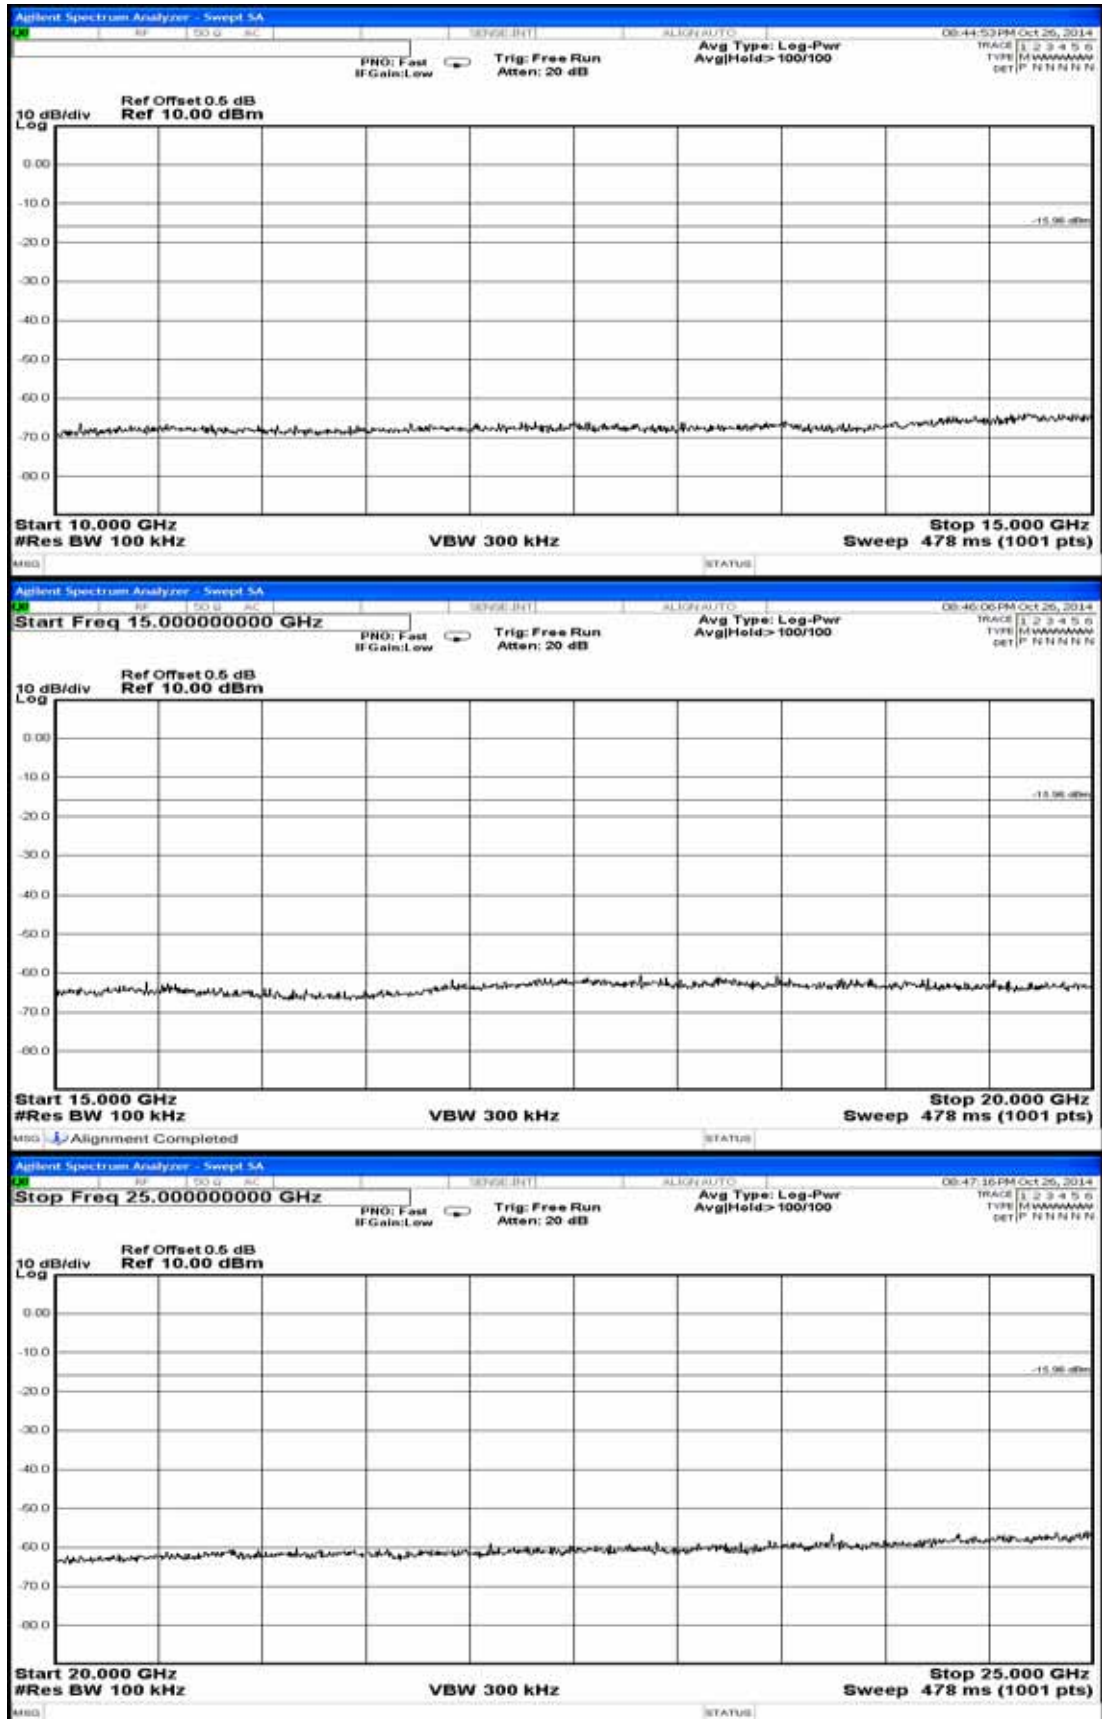



802.11g, Frequency: 2412MHz

Test Date: 2014.10. 26

Temperature: 26°C

Humidity: 52%

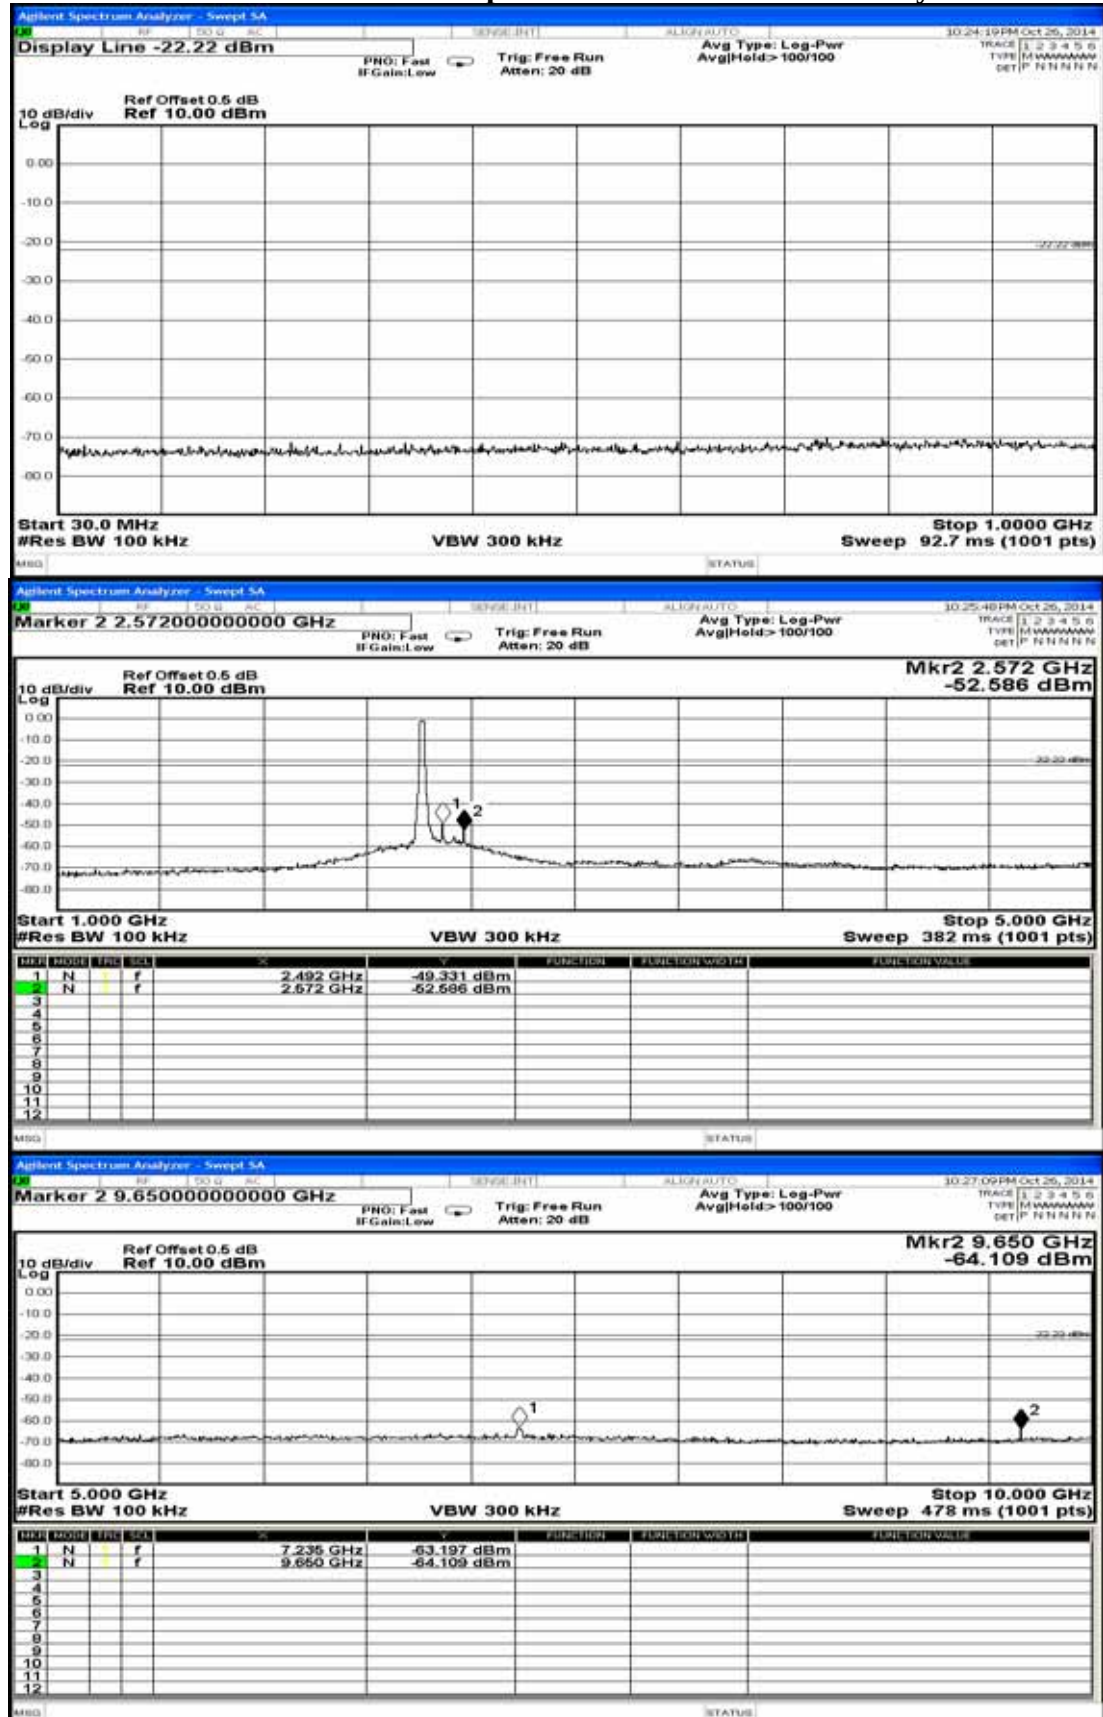

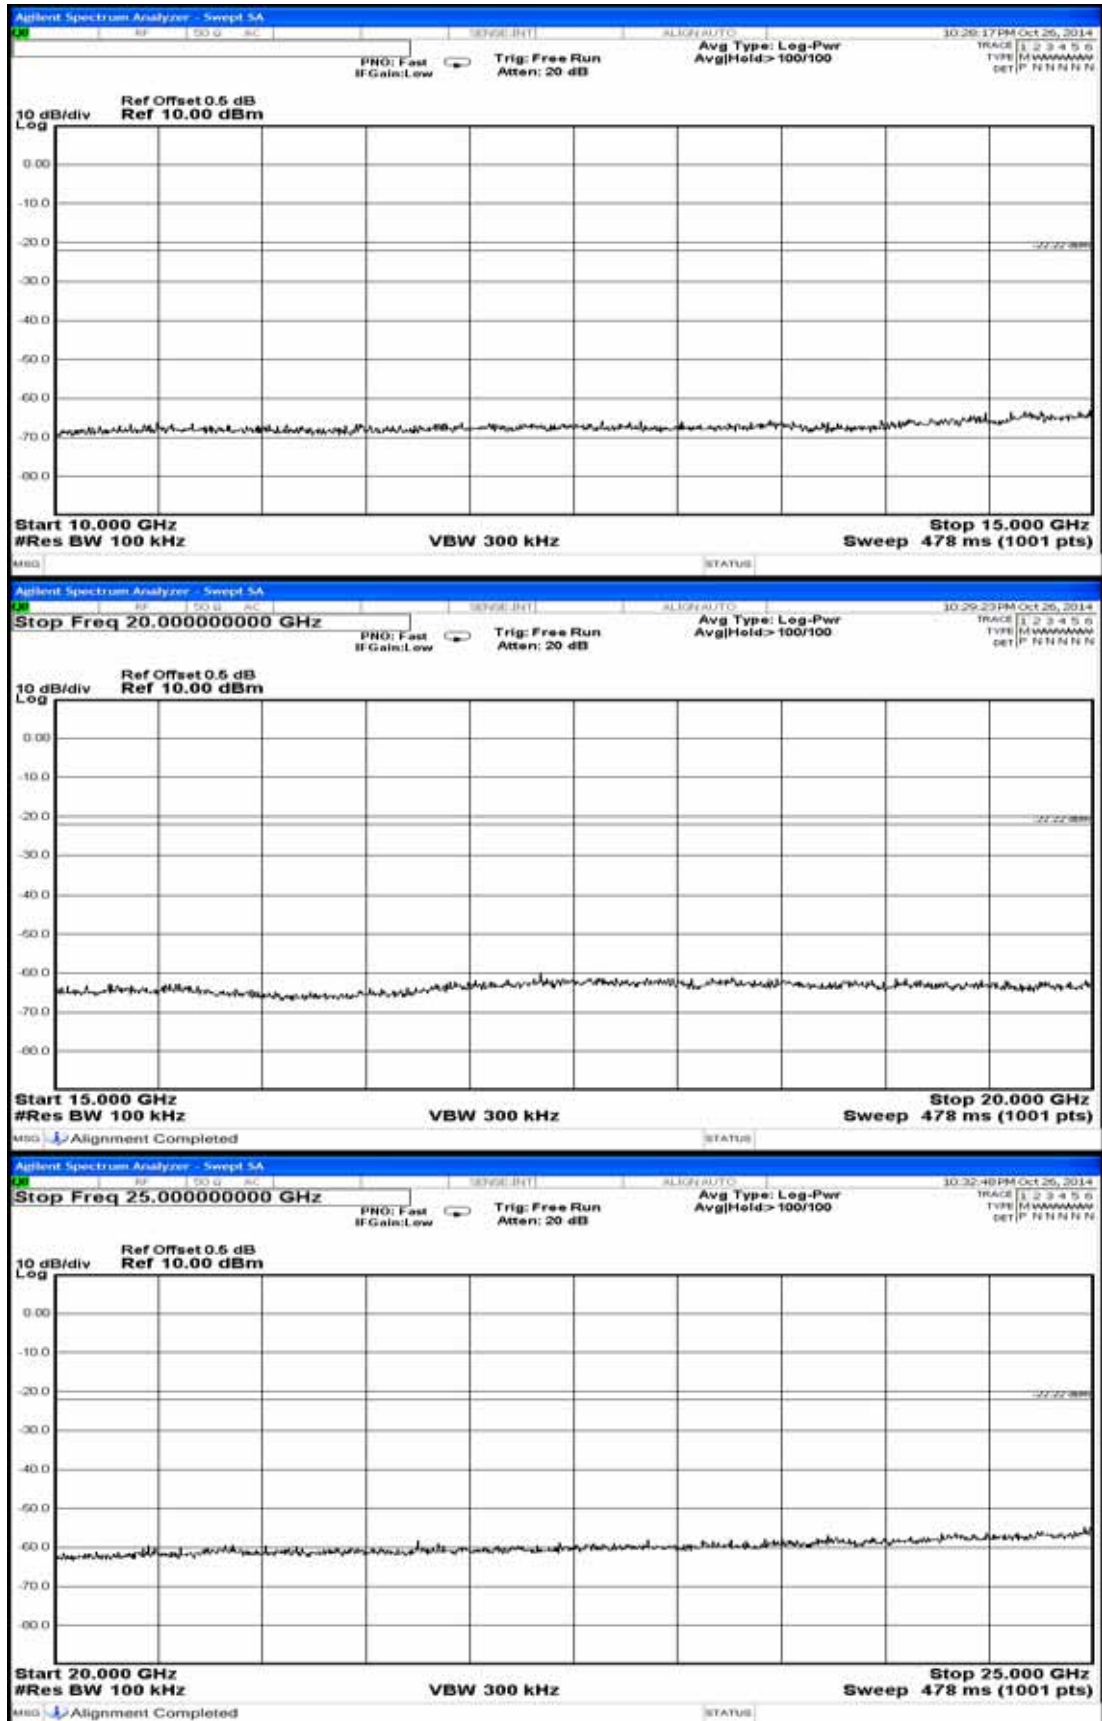



802.11g, Frequency: 2437MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 52%

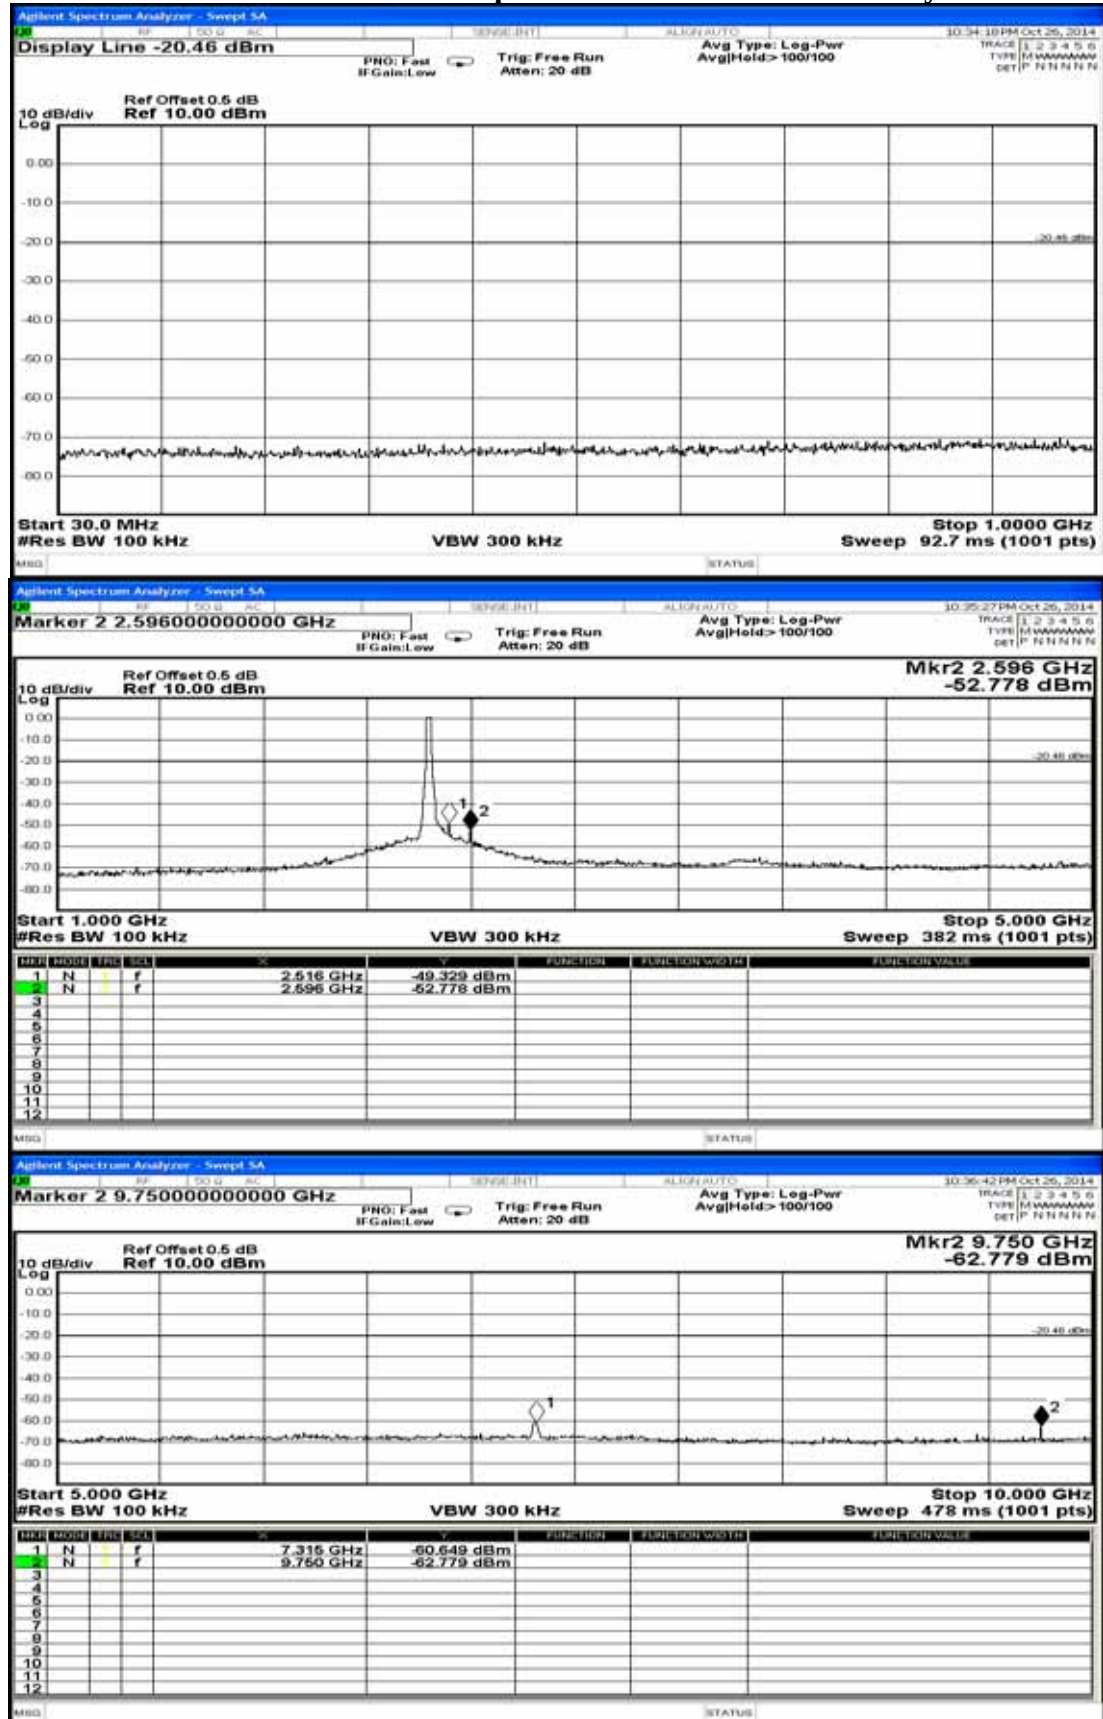

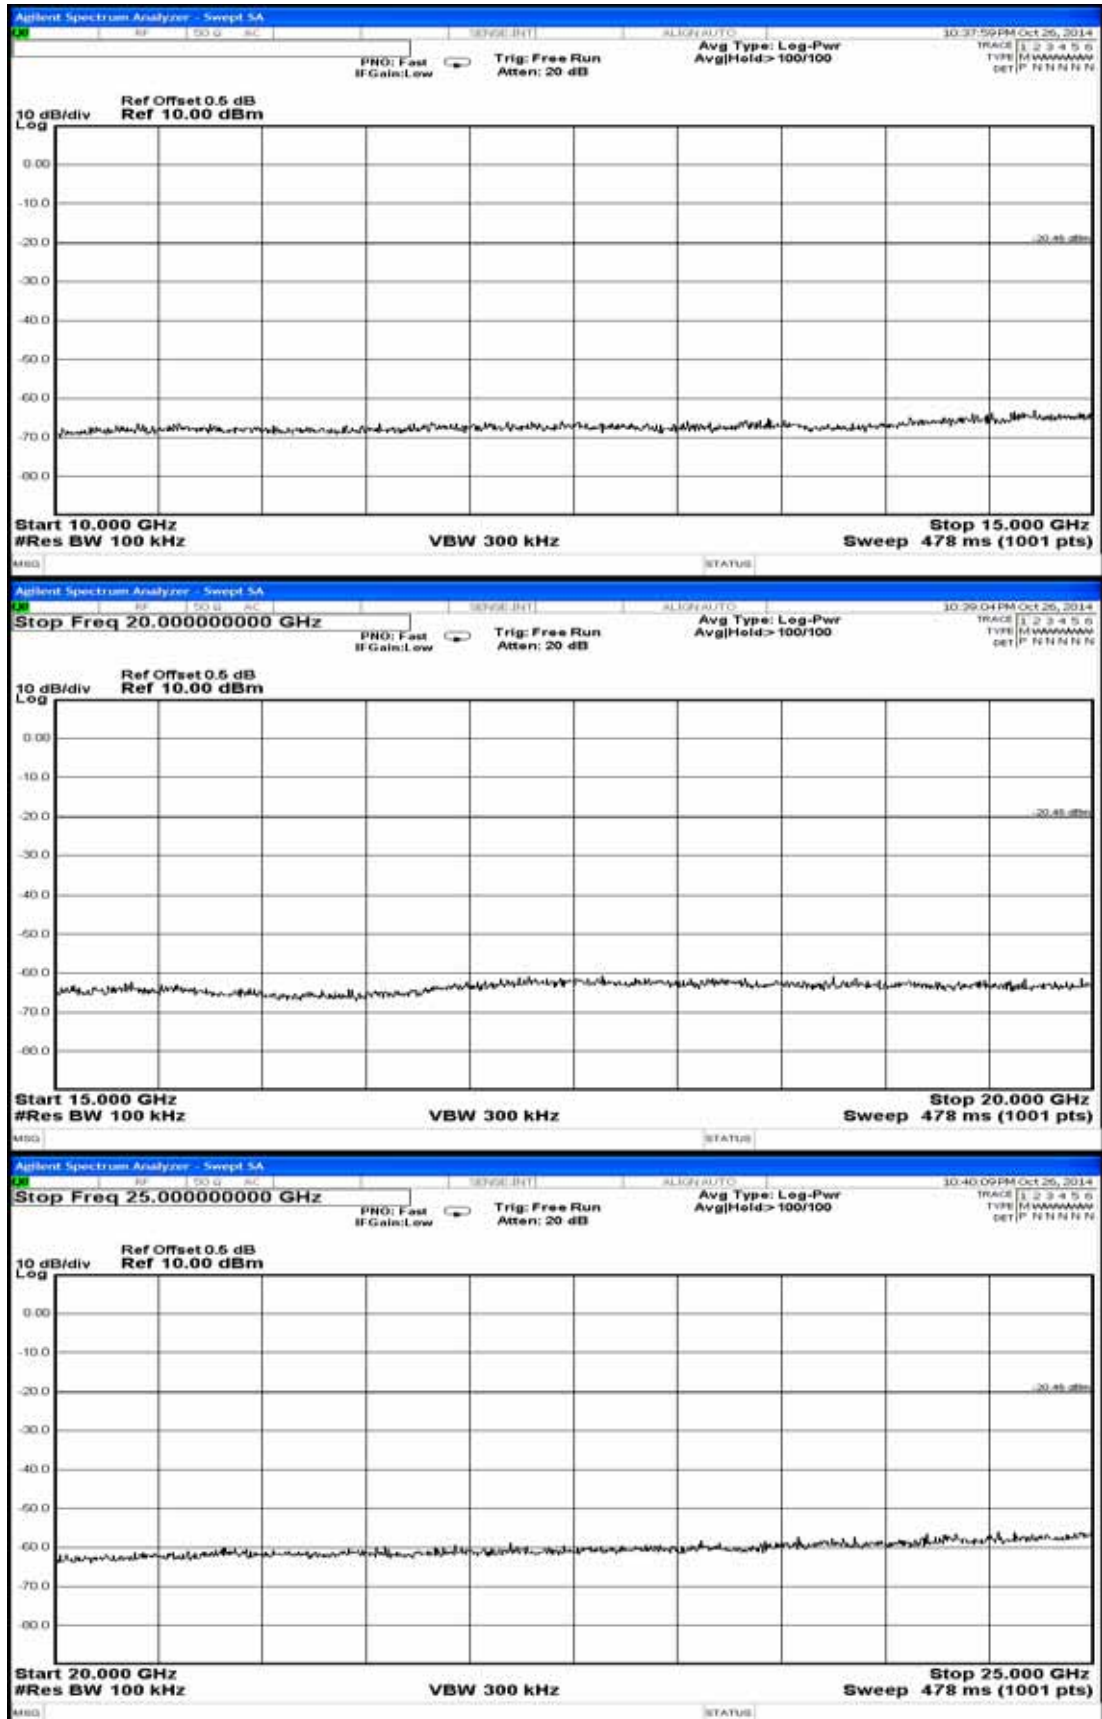



802.11g, Frequency: 2462MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 52%

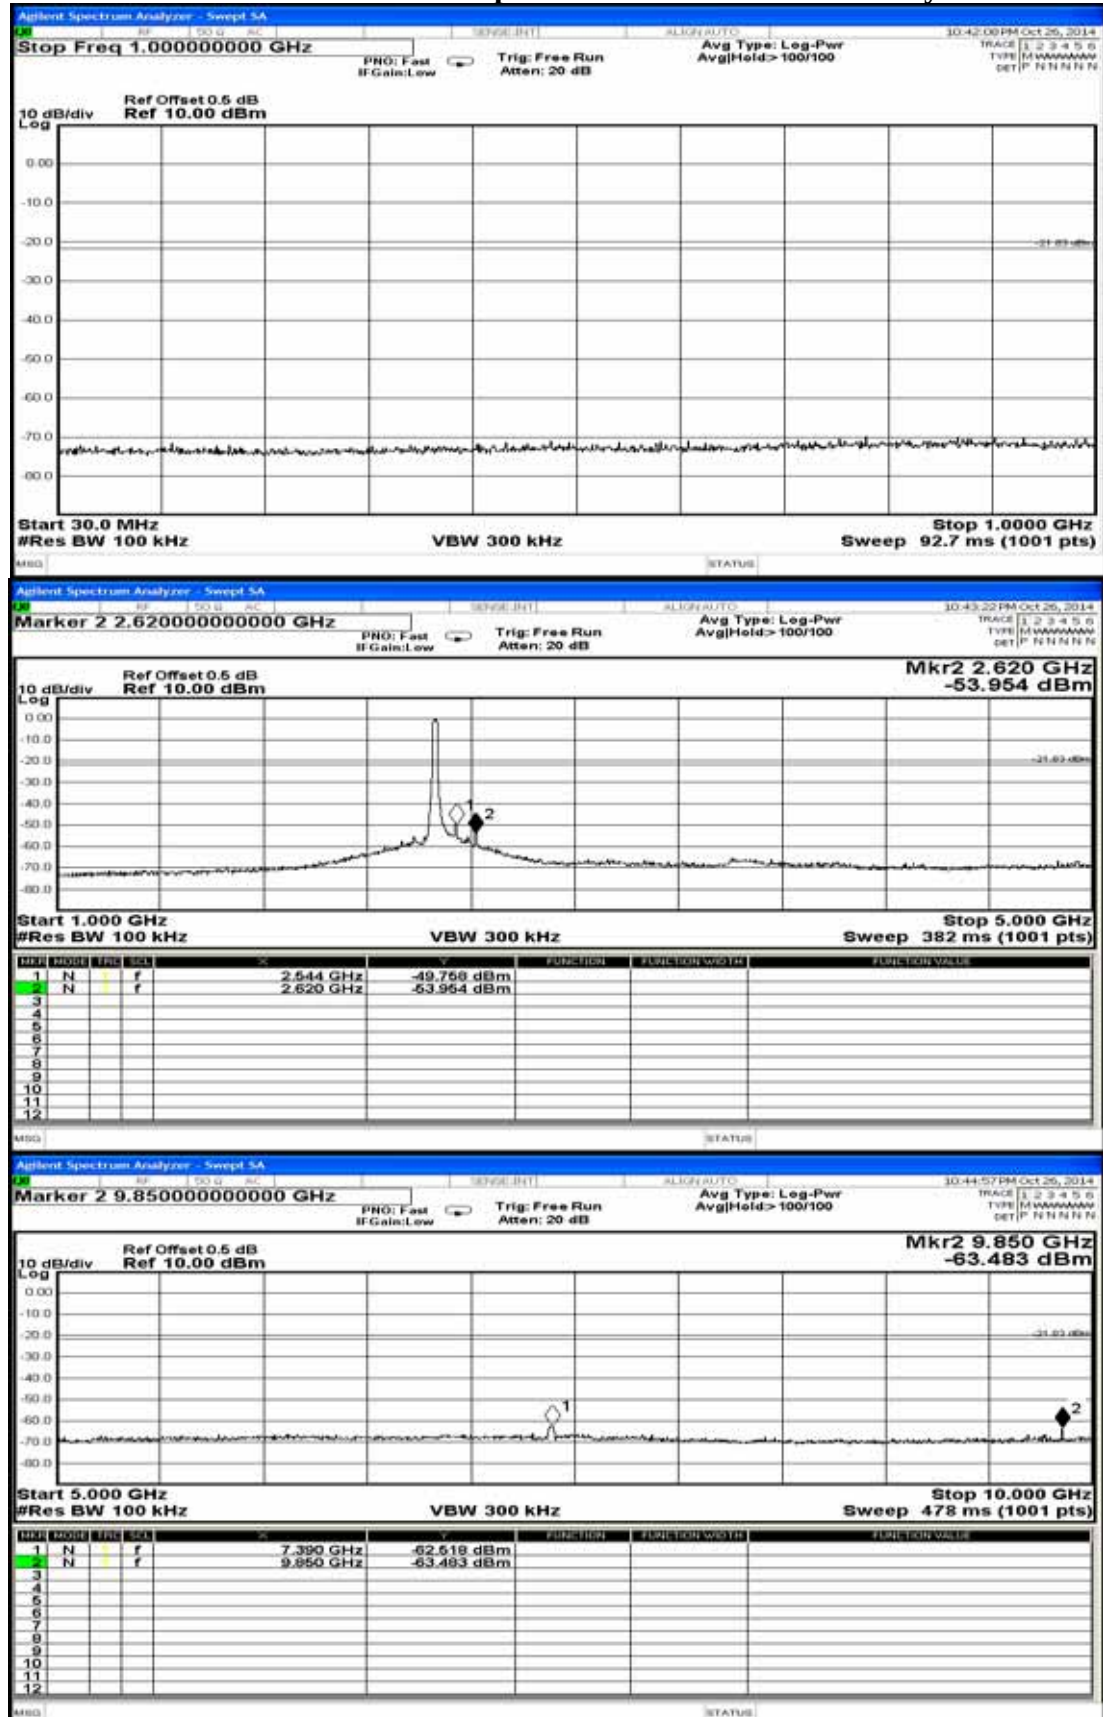

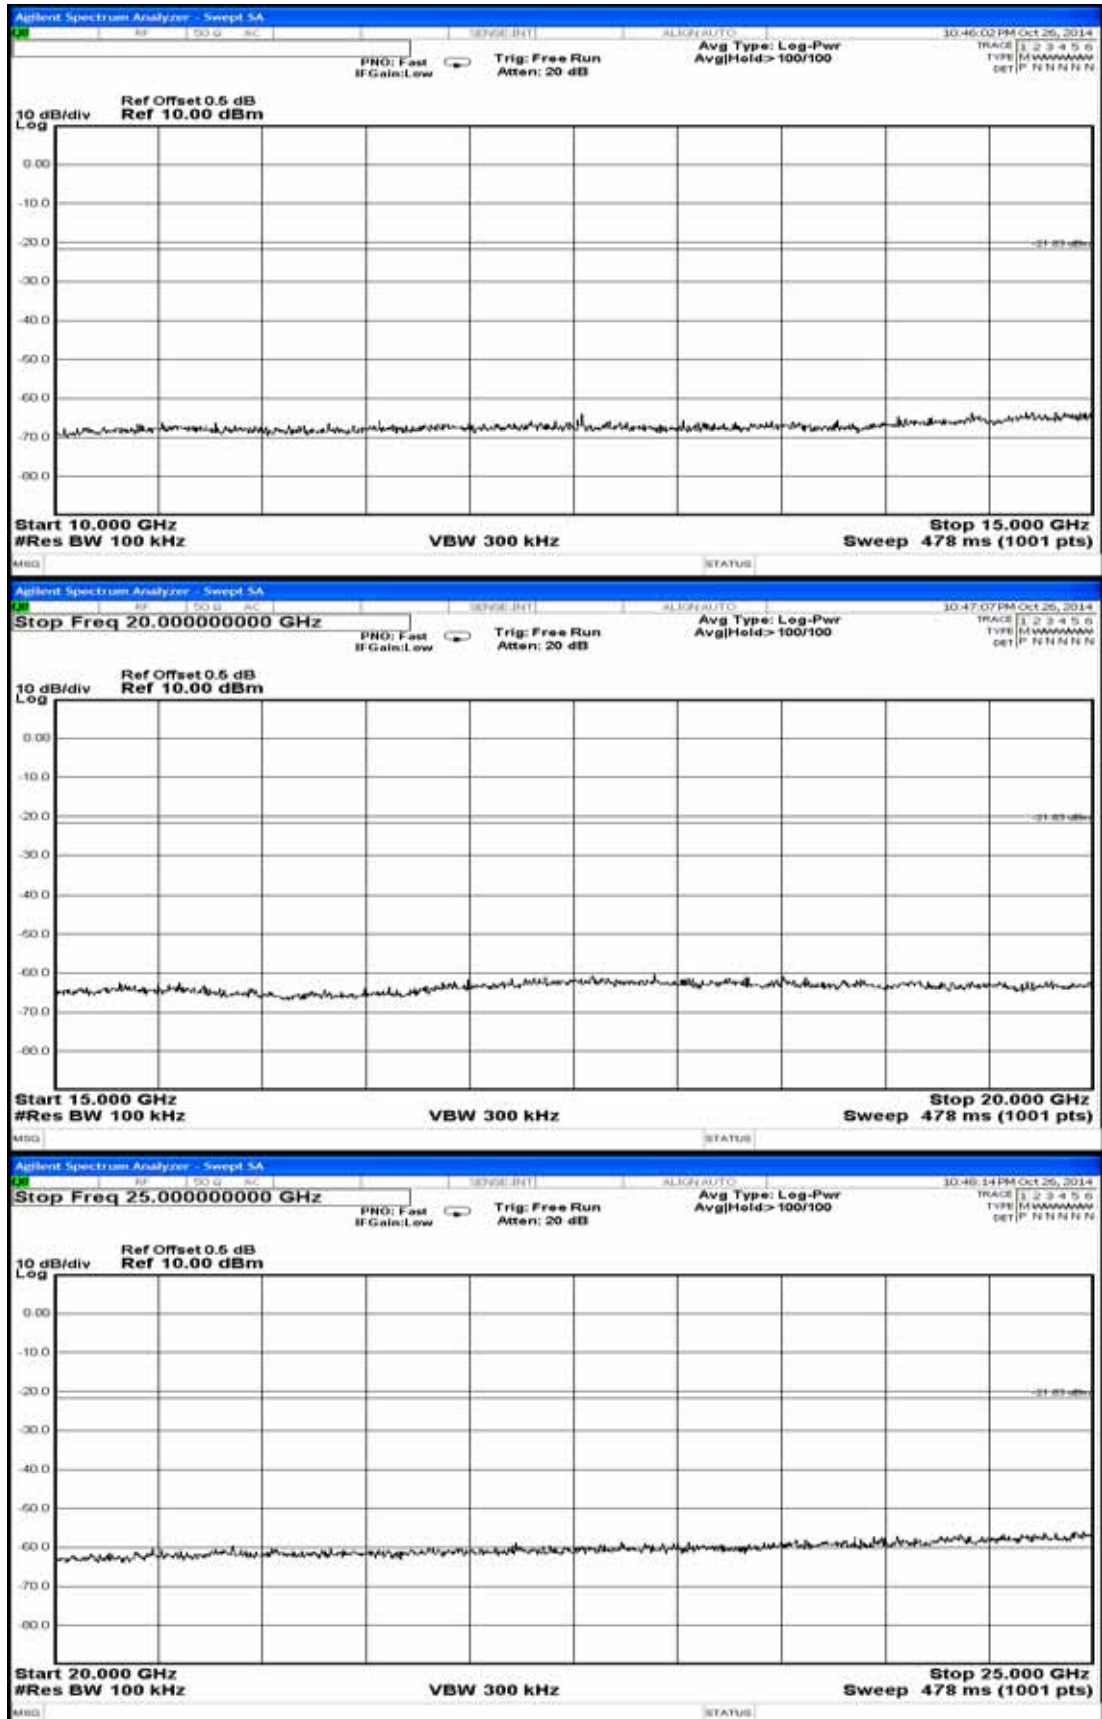



802.11n-HT20, Frequency: 2412MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 52%

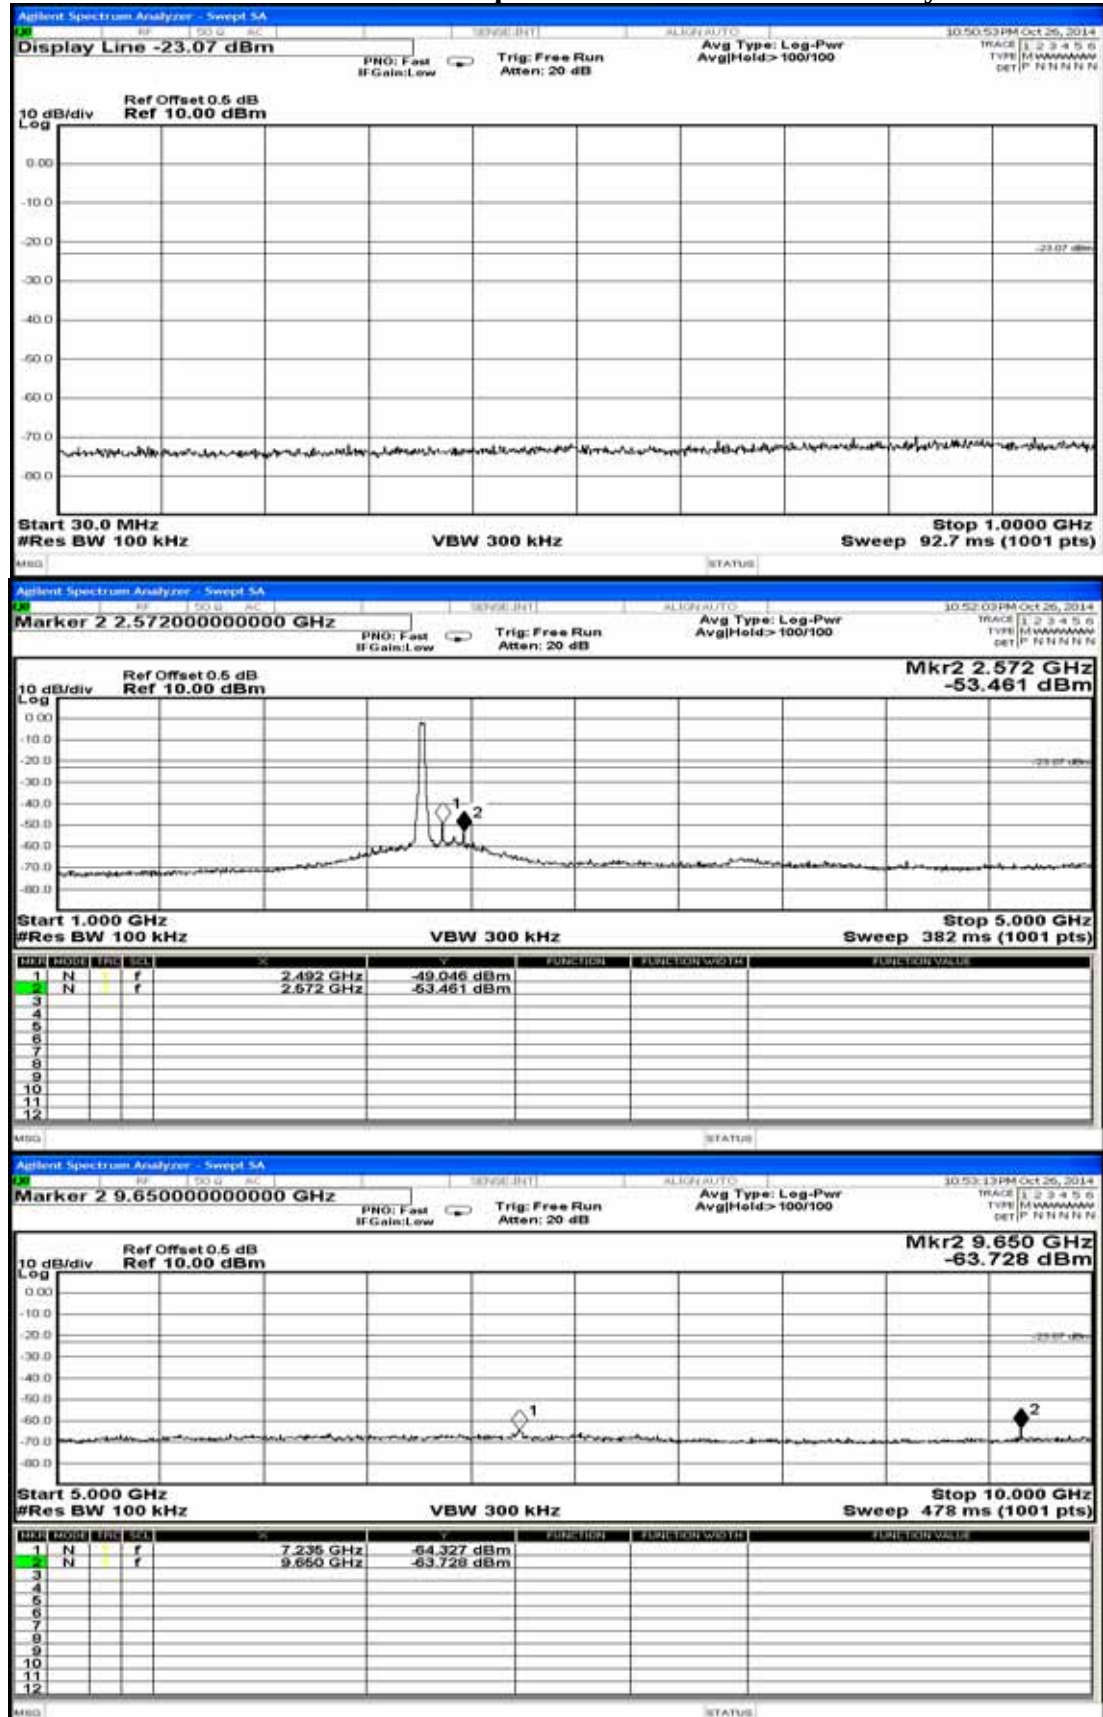

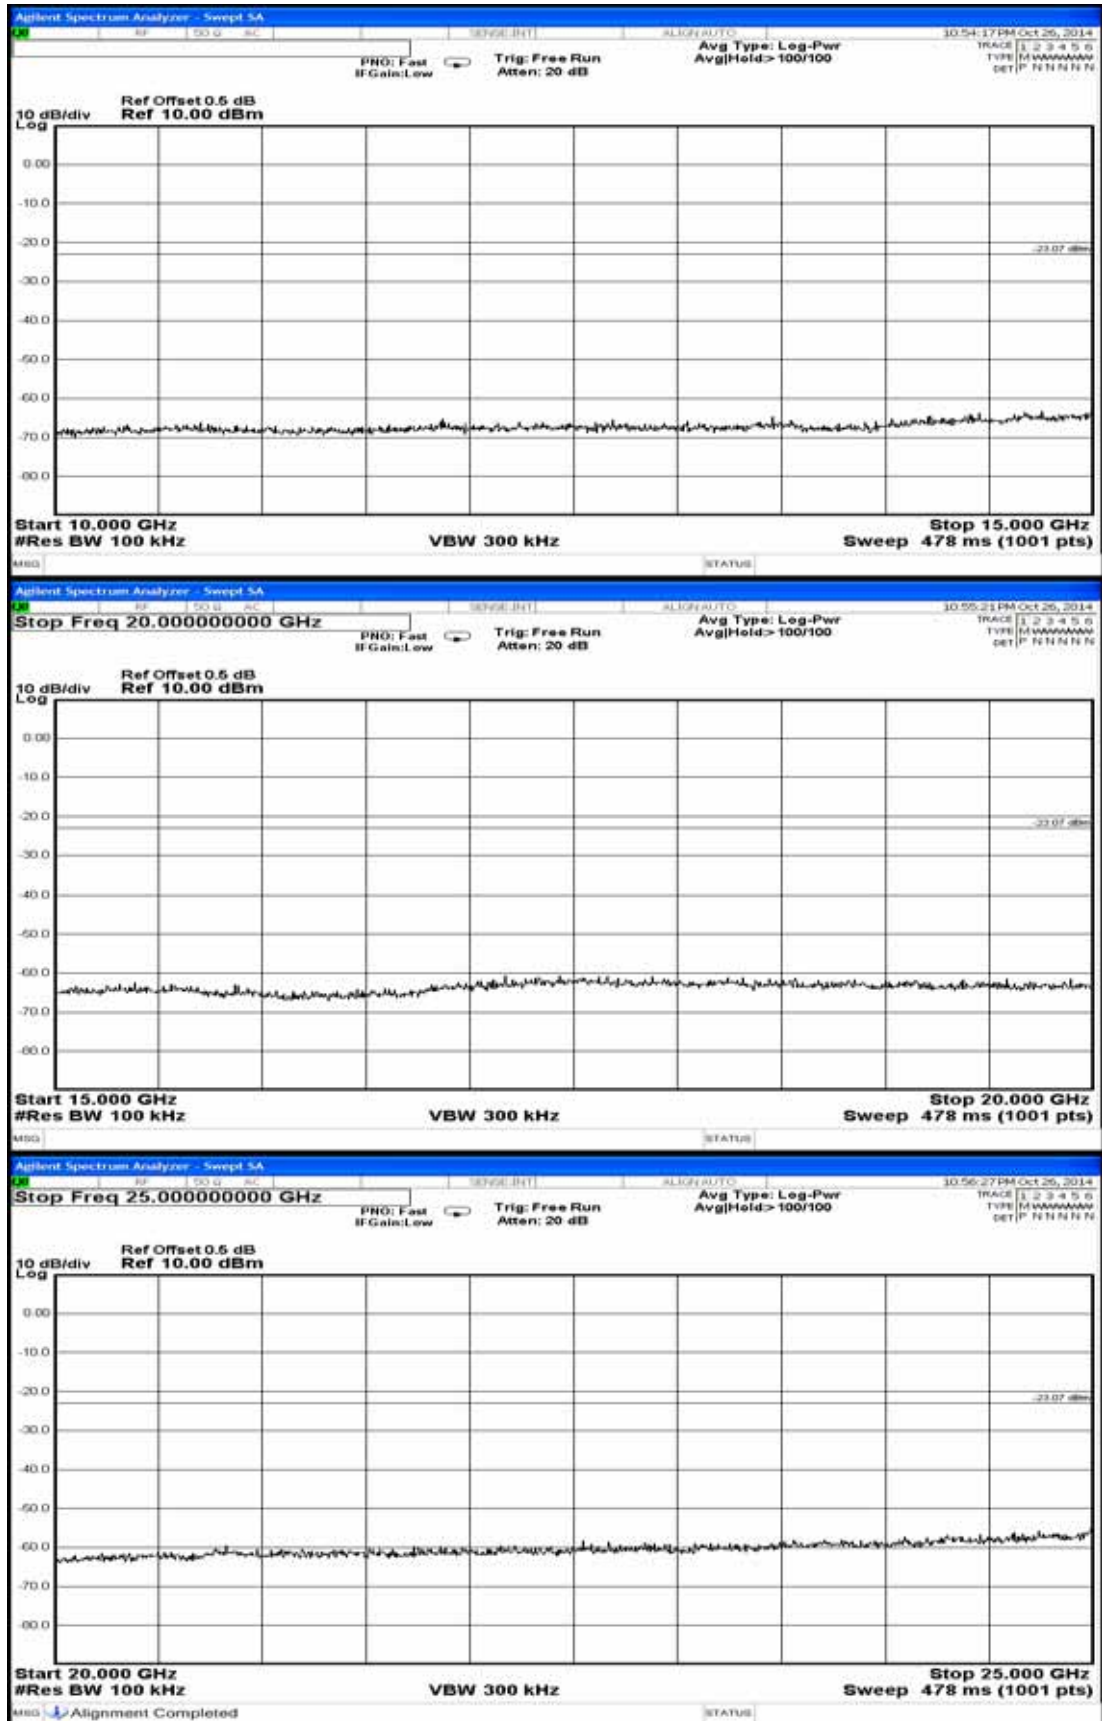



802.11n-HT20, Frequency: 2437MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 52%

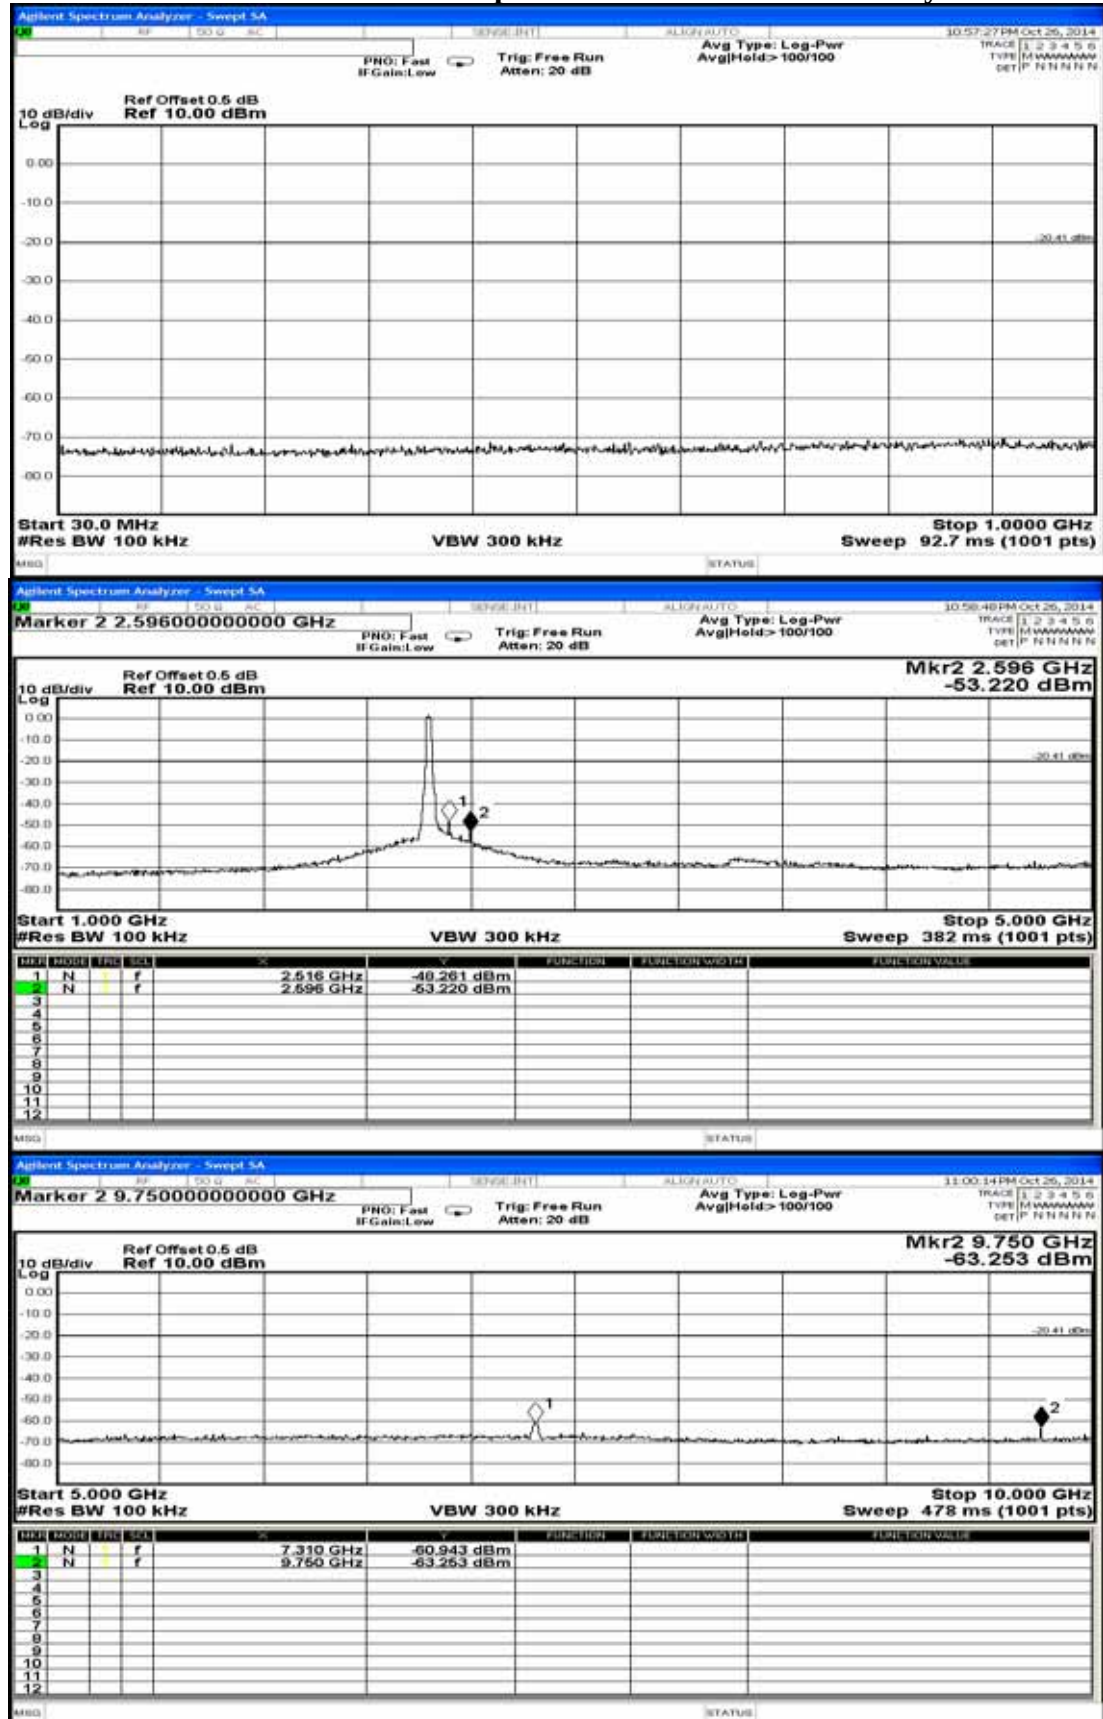

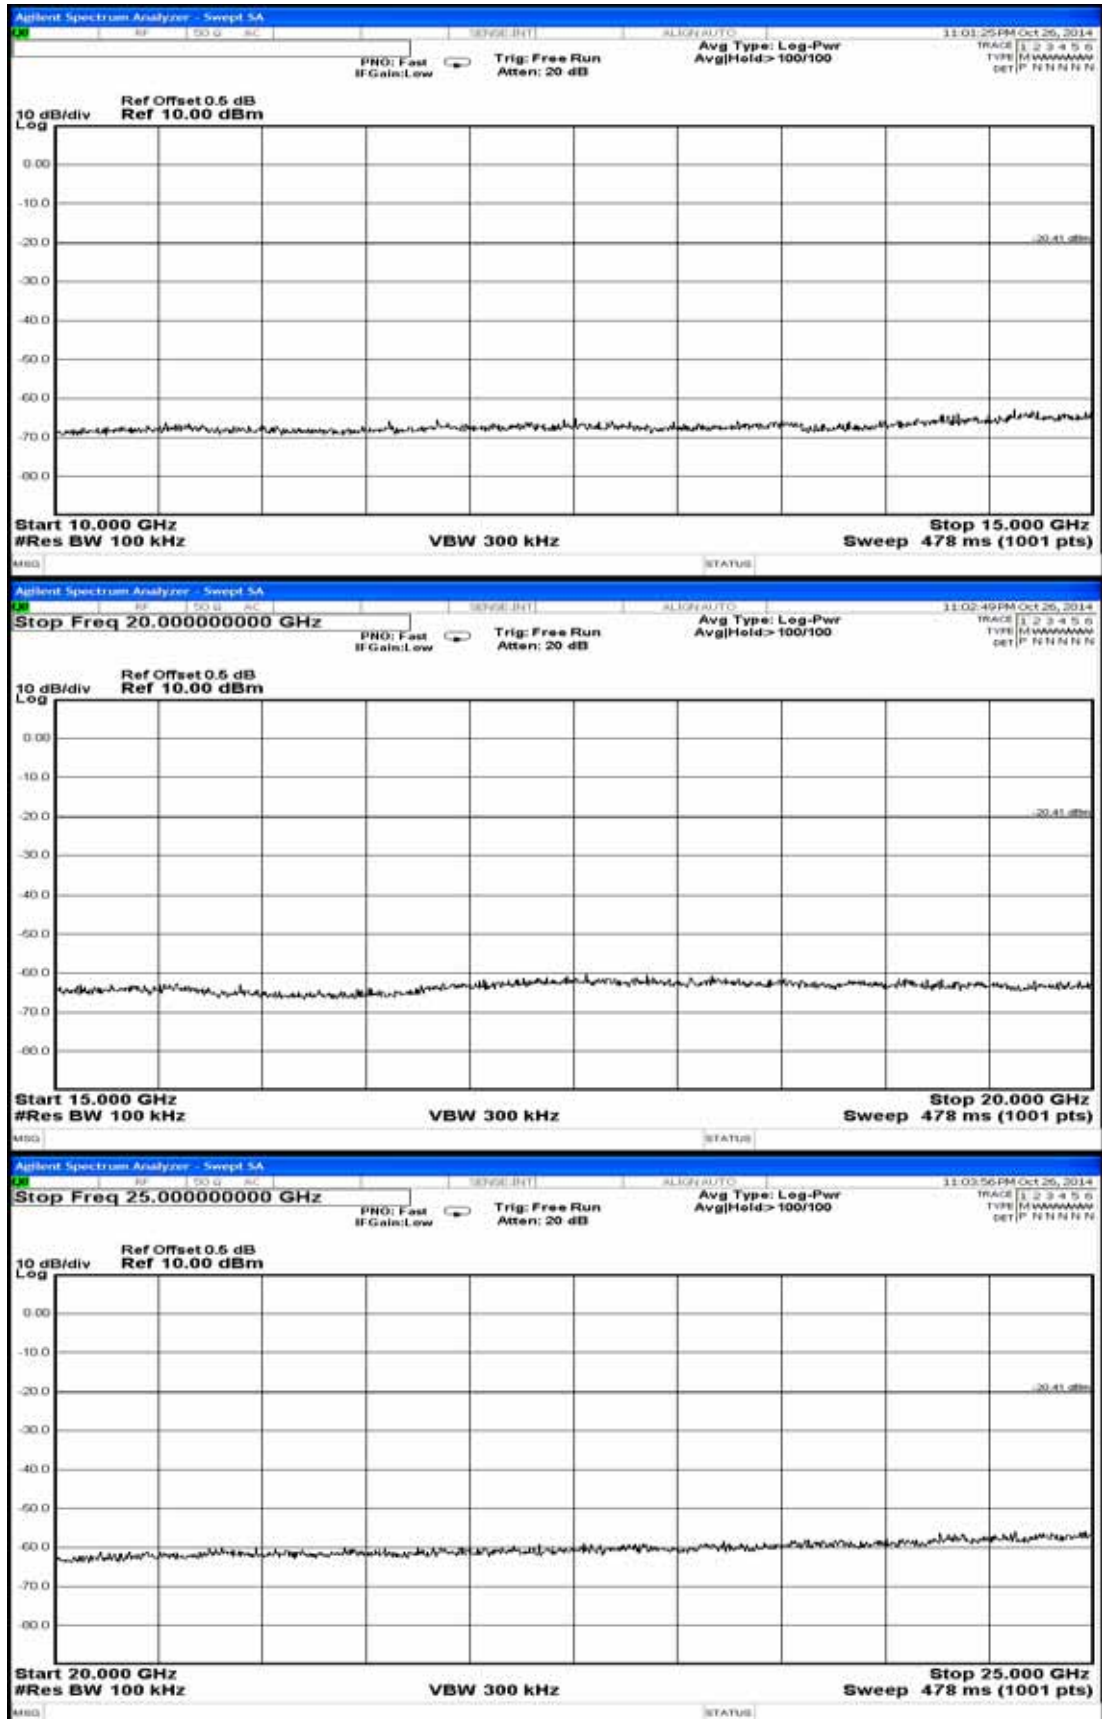



802.11n-HT20, Frequency: 2462MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 52%

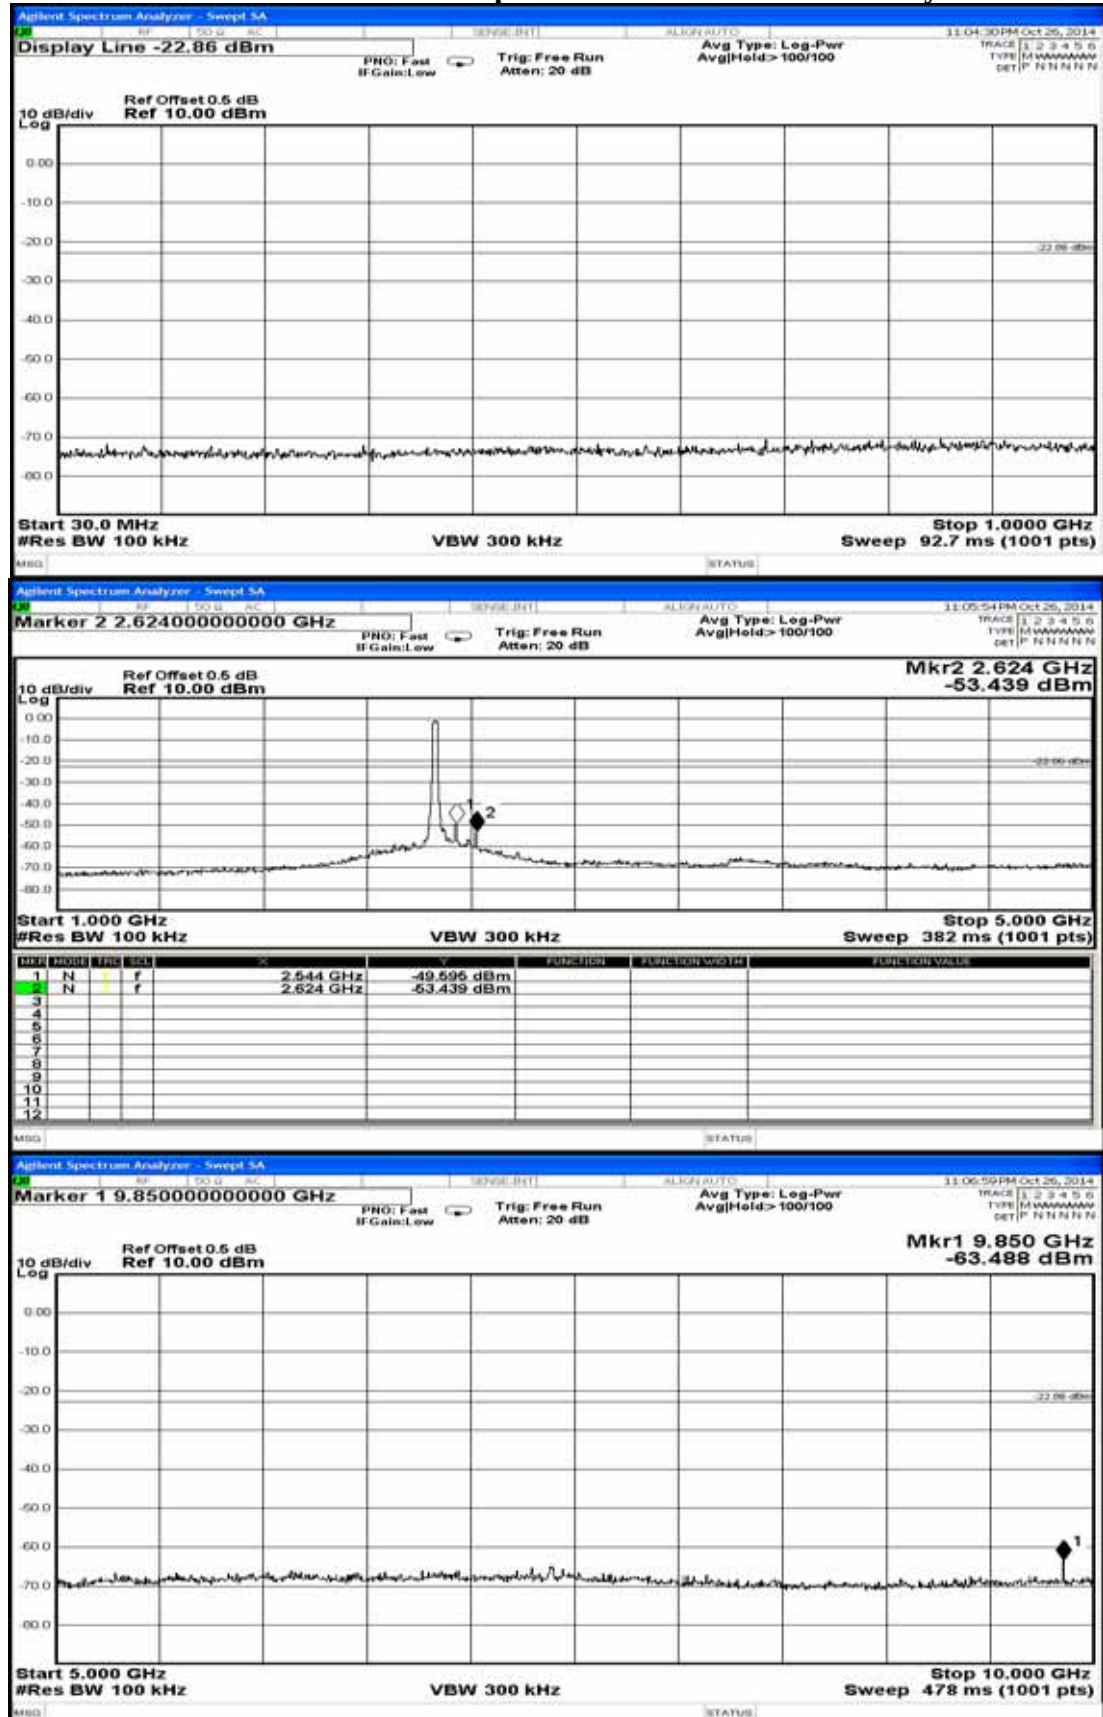

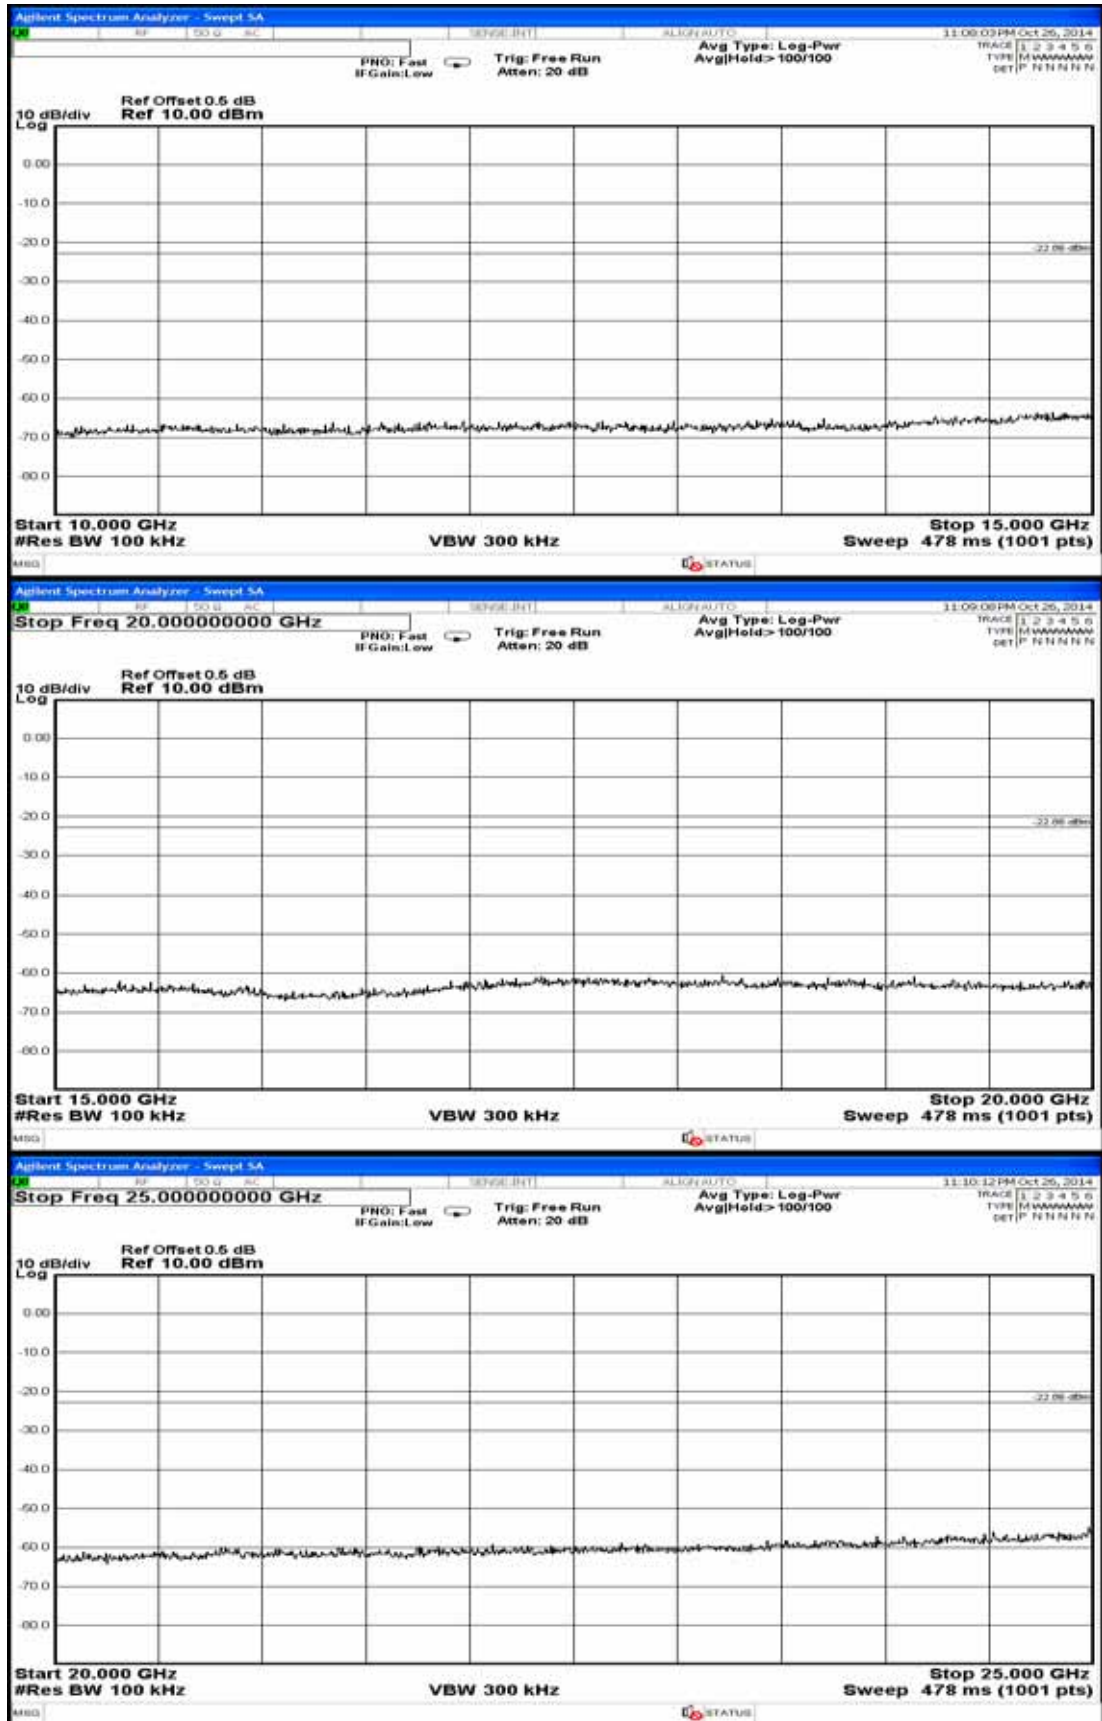



802.11n-HT40, Frequency: 2422MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 52%

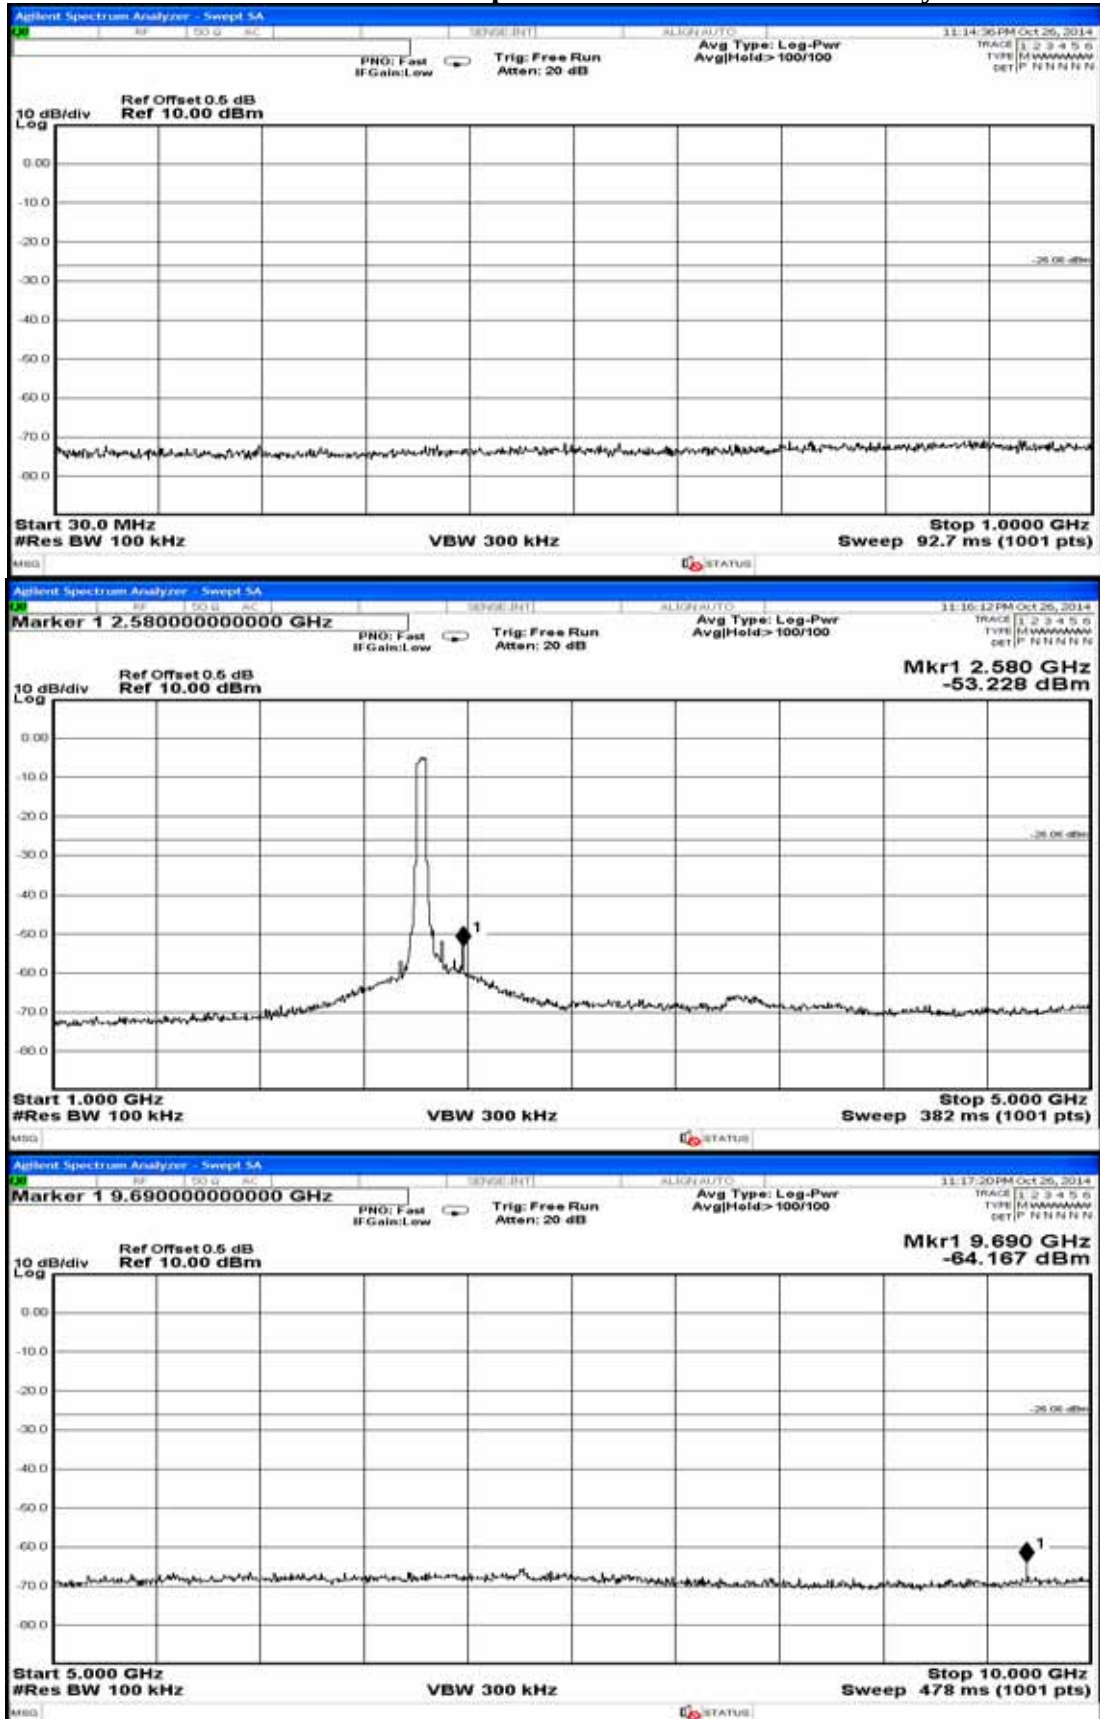

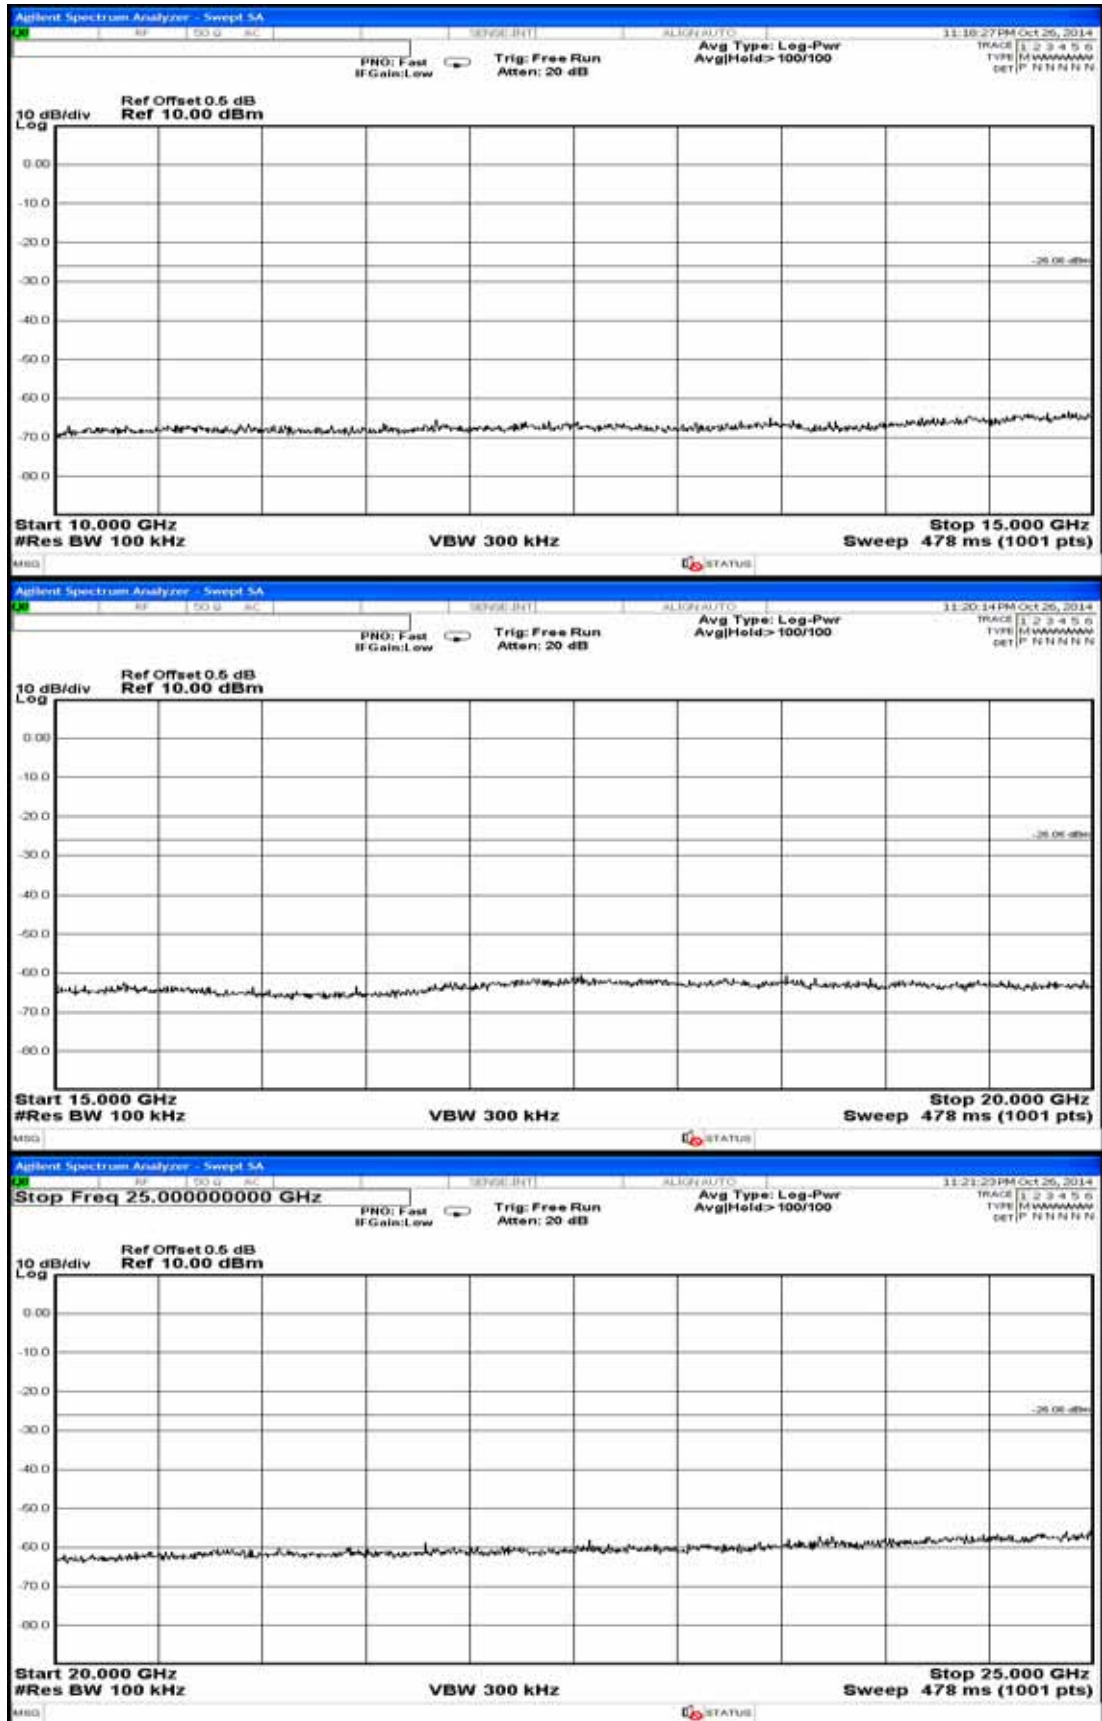



802.11n-HT40, Frequency: 2437MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 52%

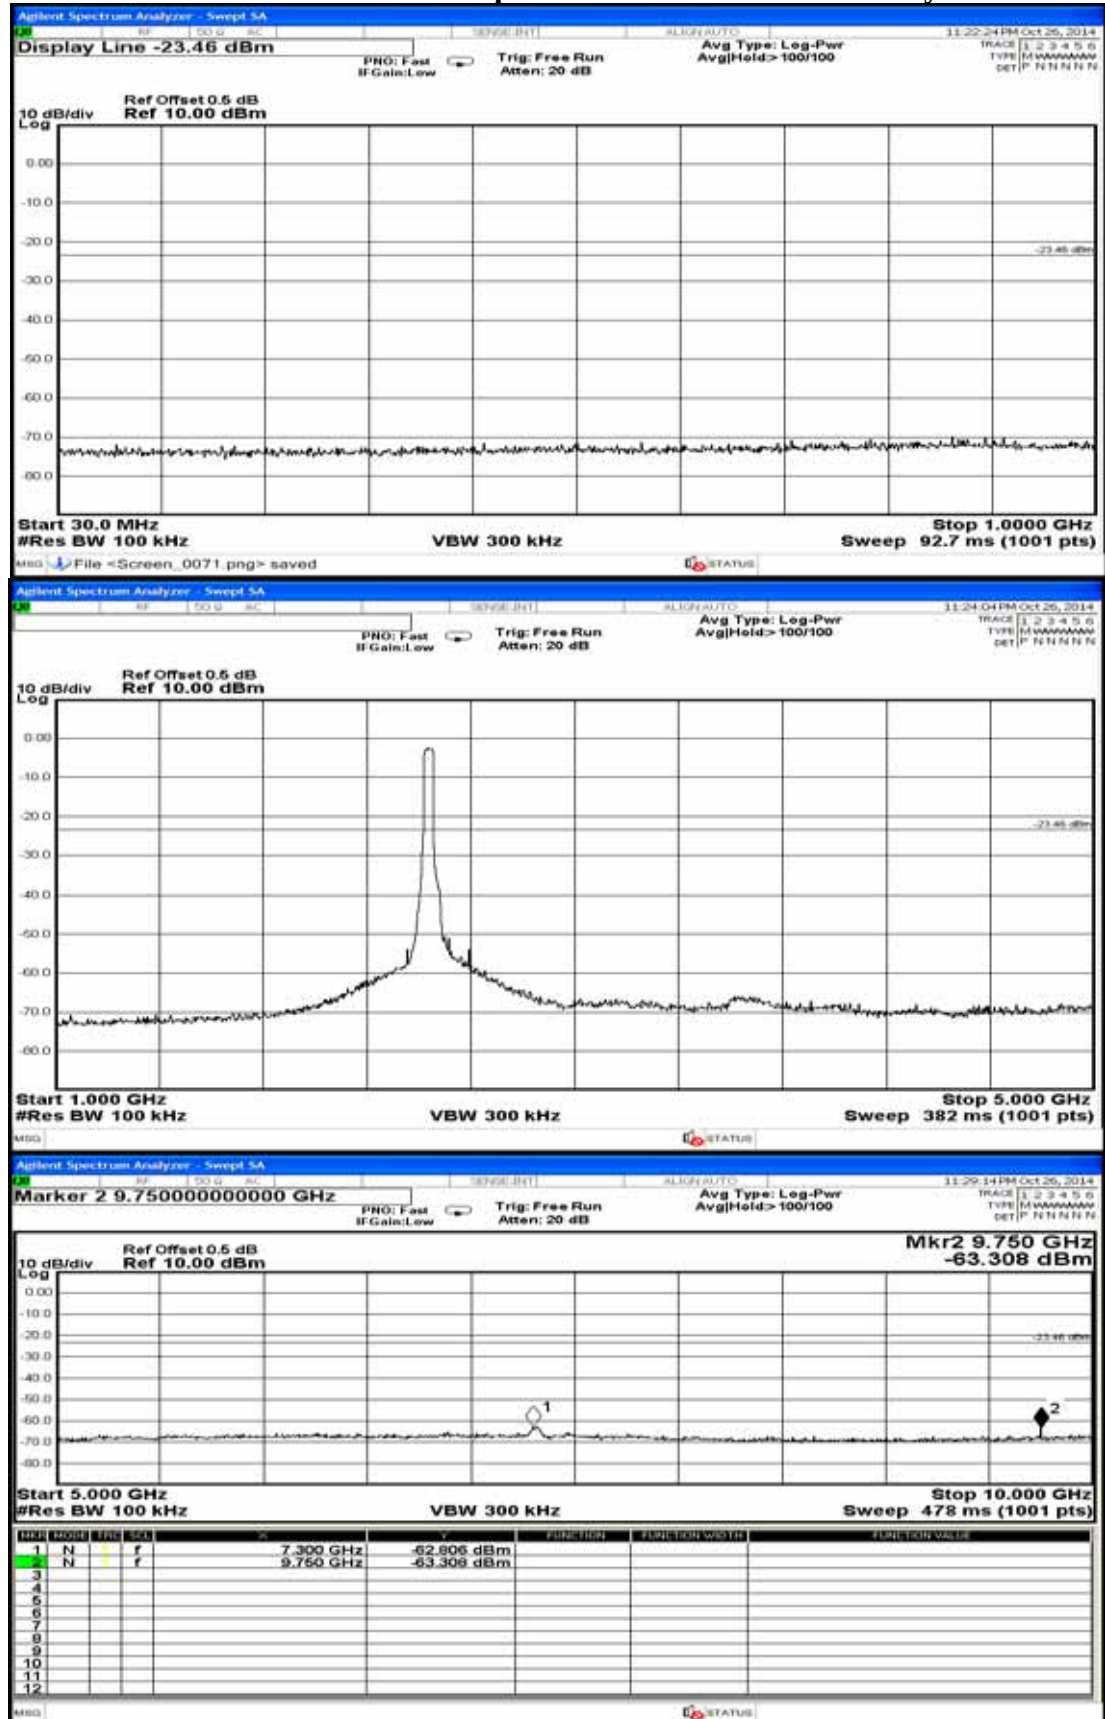

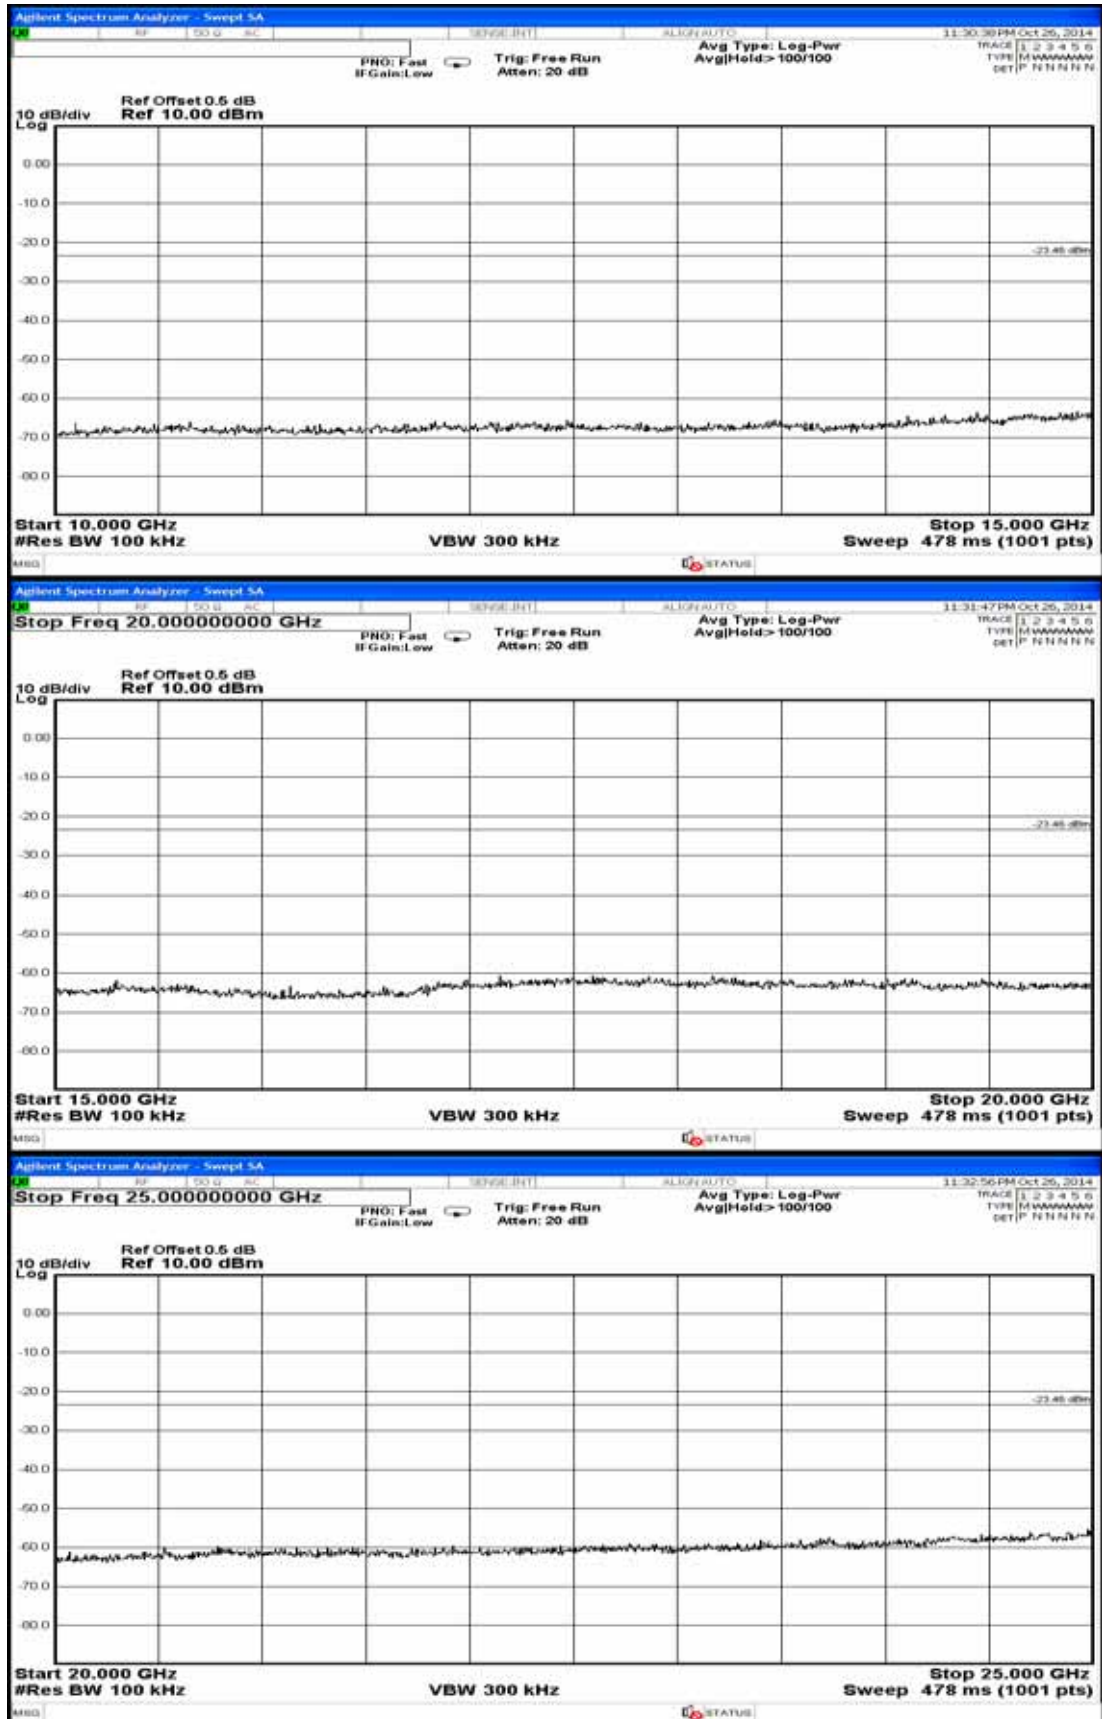



802.11n-HT40, Frequency: 2452MHz

Test Date: 2014. 10. 26

Temperature: 26°C

Humidity: 52%

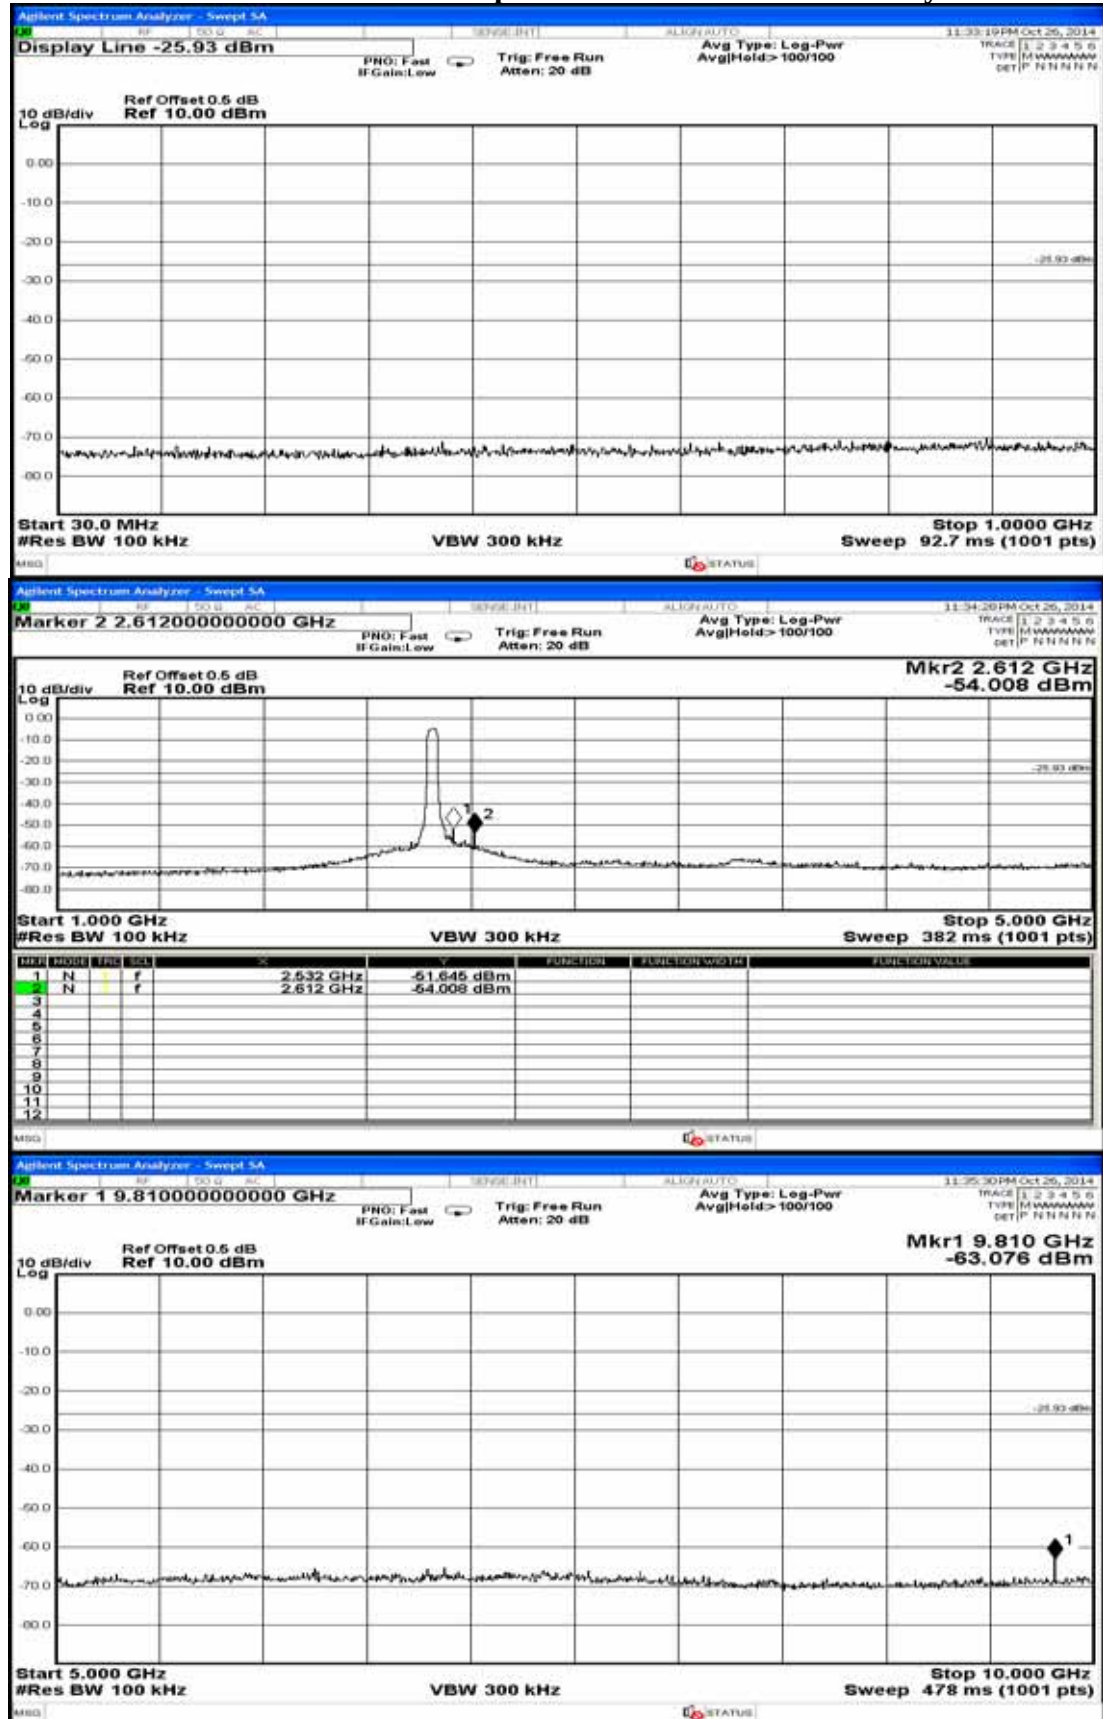

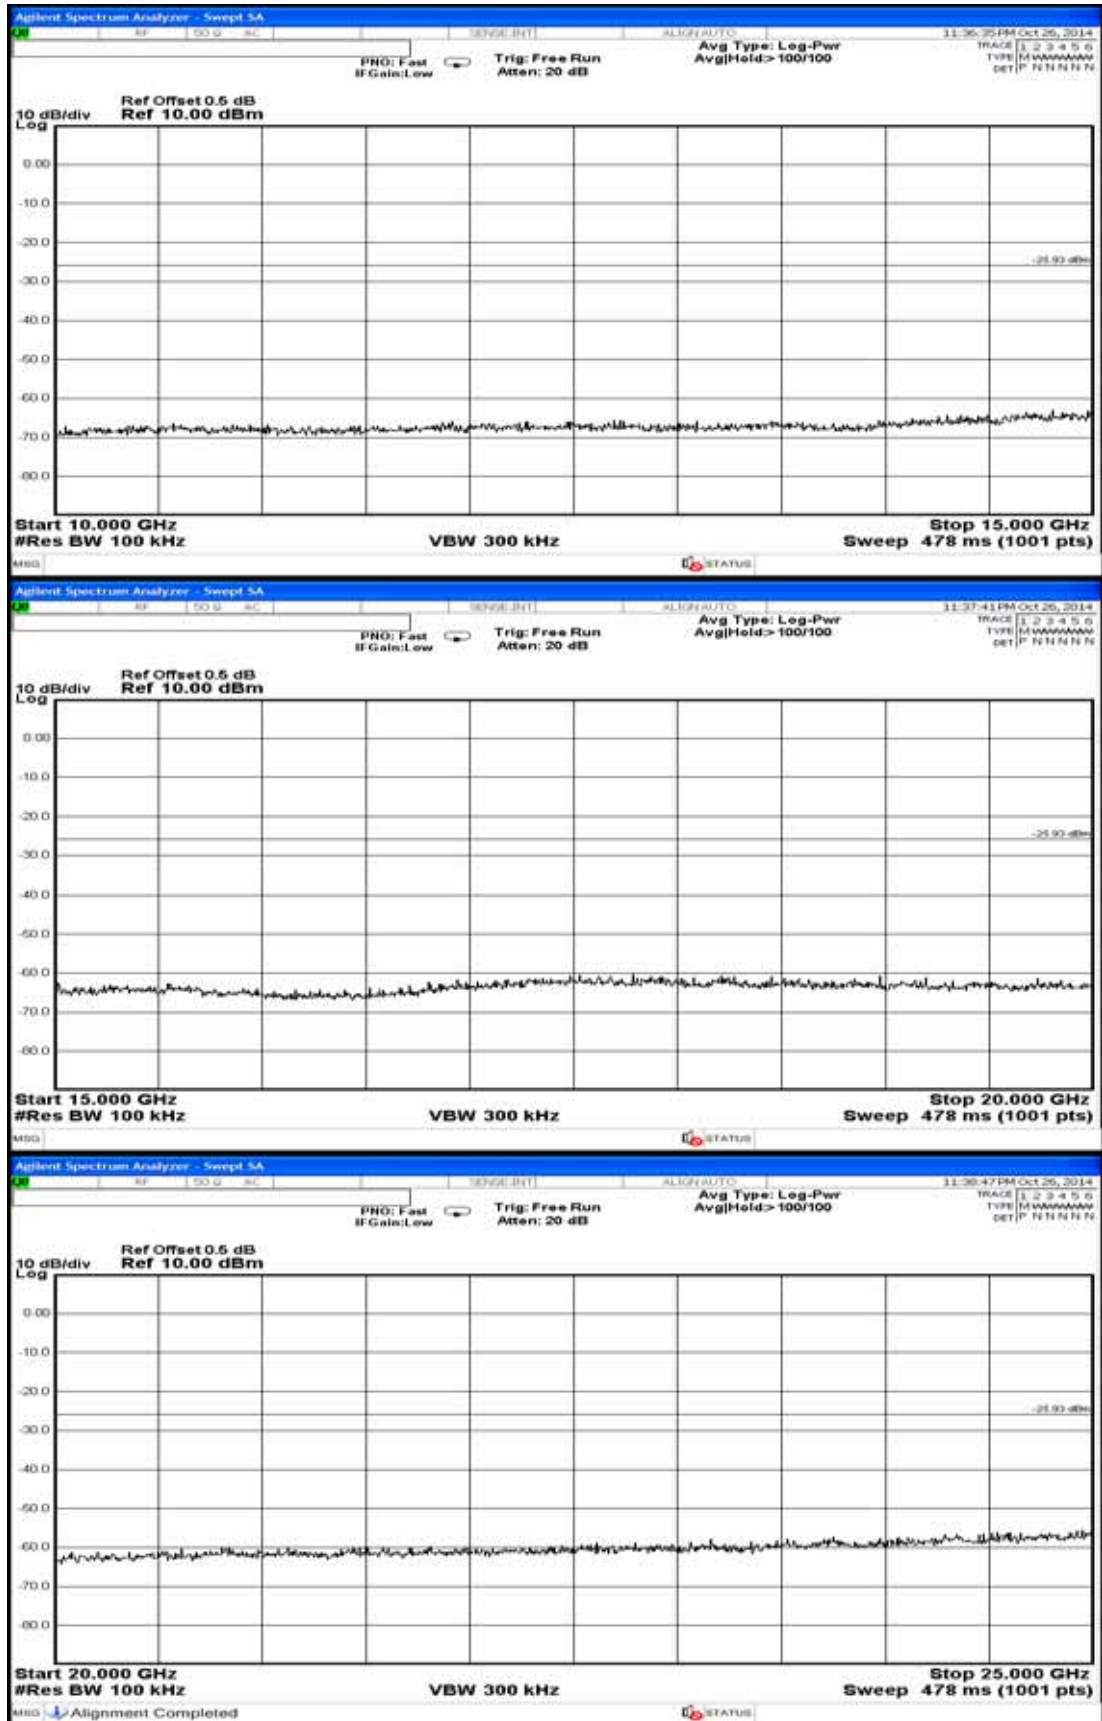


7.6.2. BLE Function


BLE, Frequency: 2402MHz

Test Date : 2014. 10. 27

Temperature : 24°C

Humidity : 58%

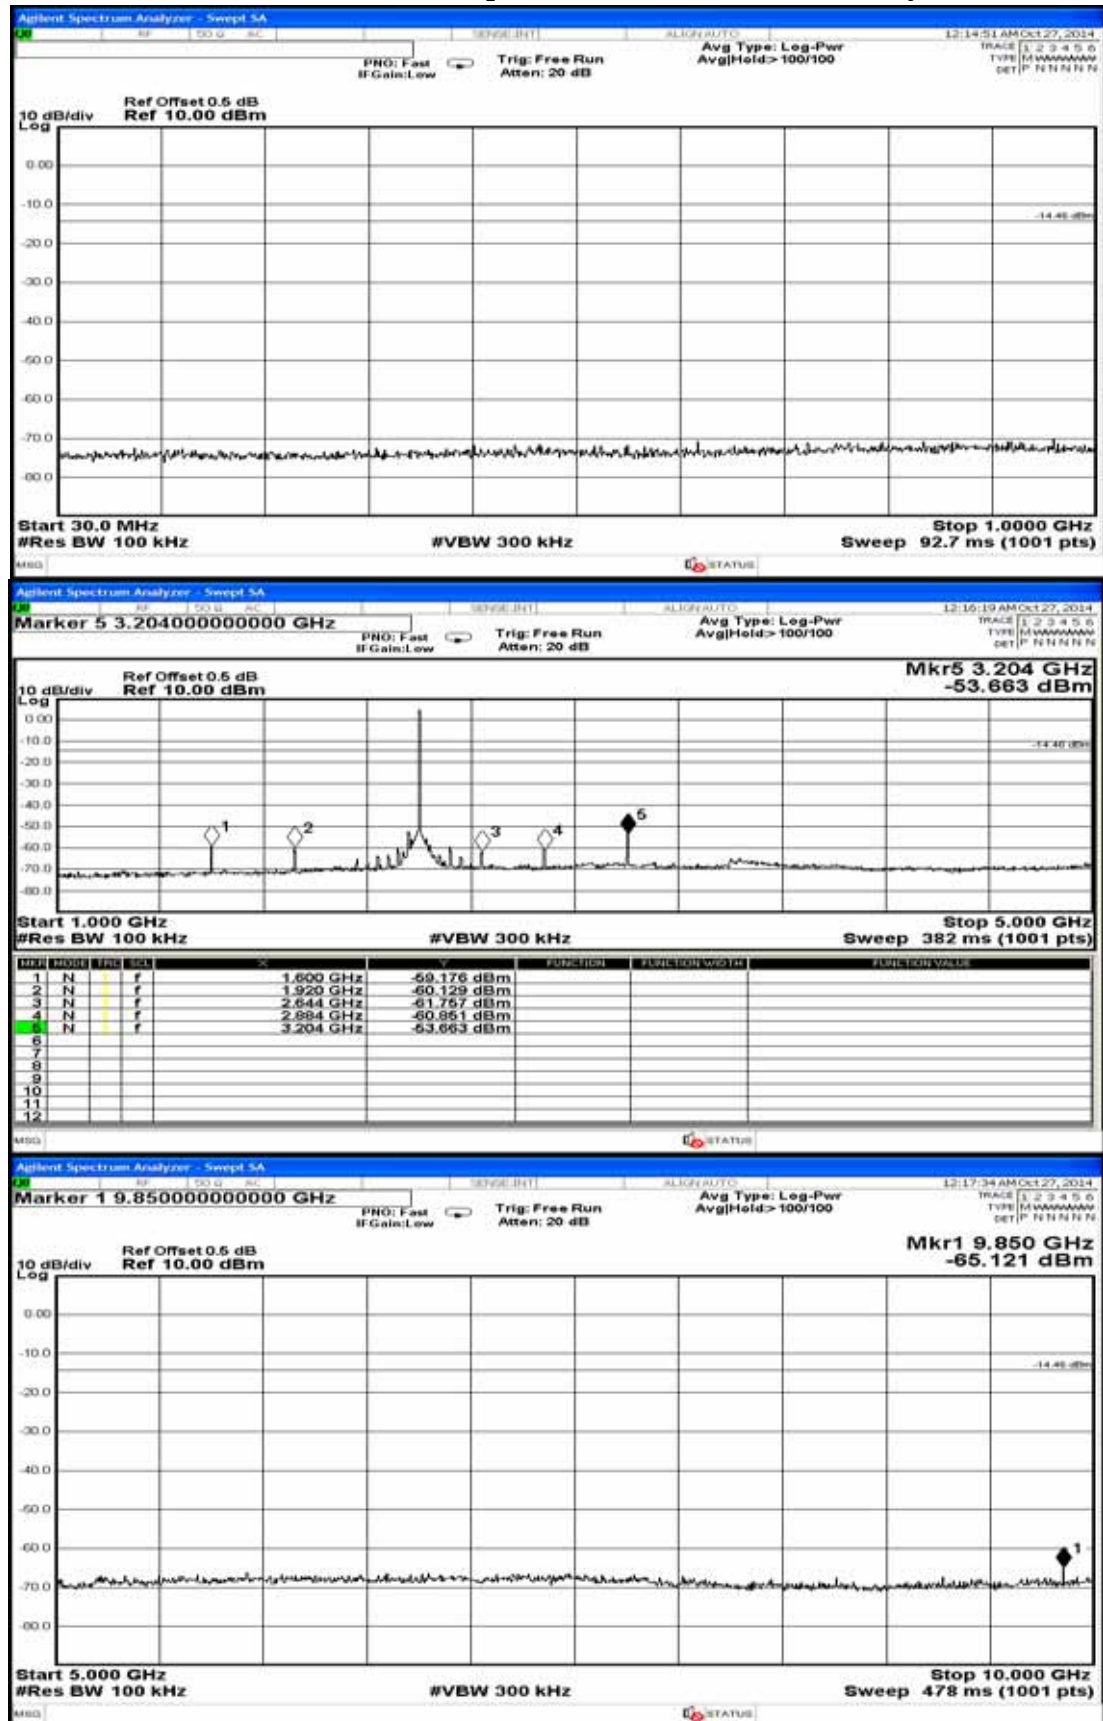

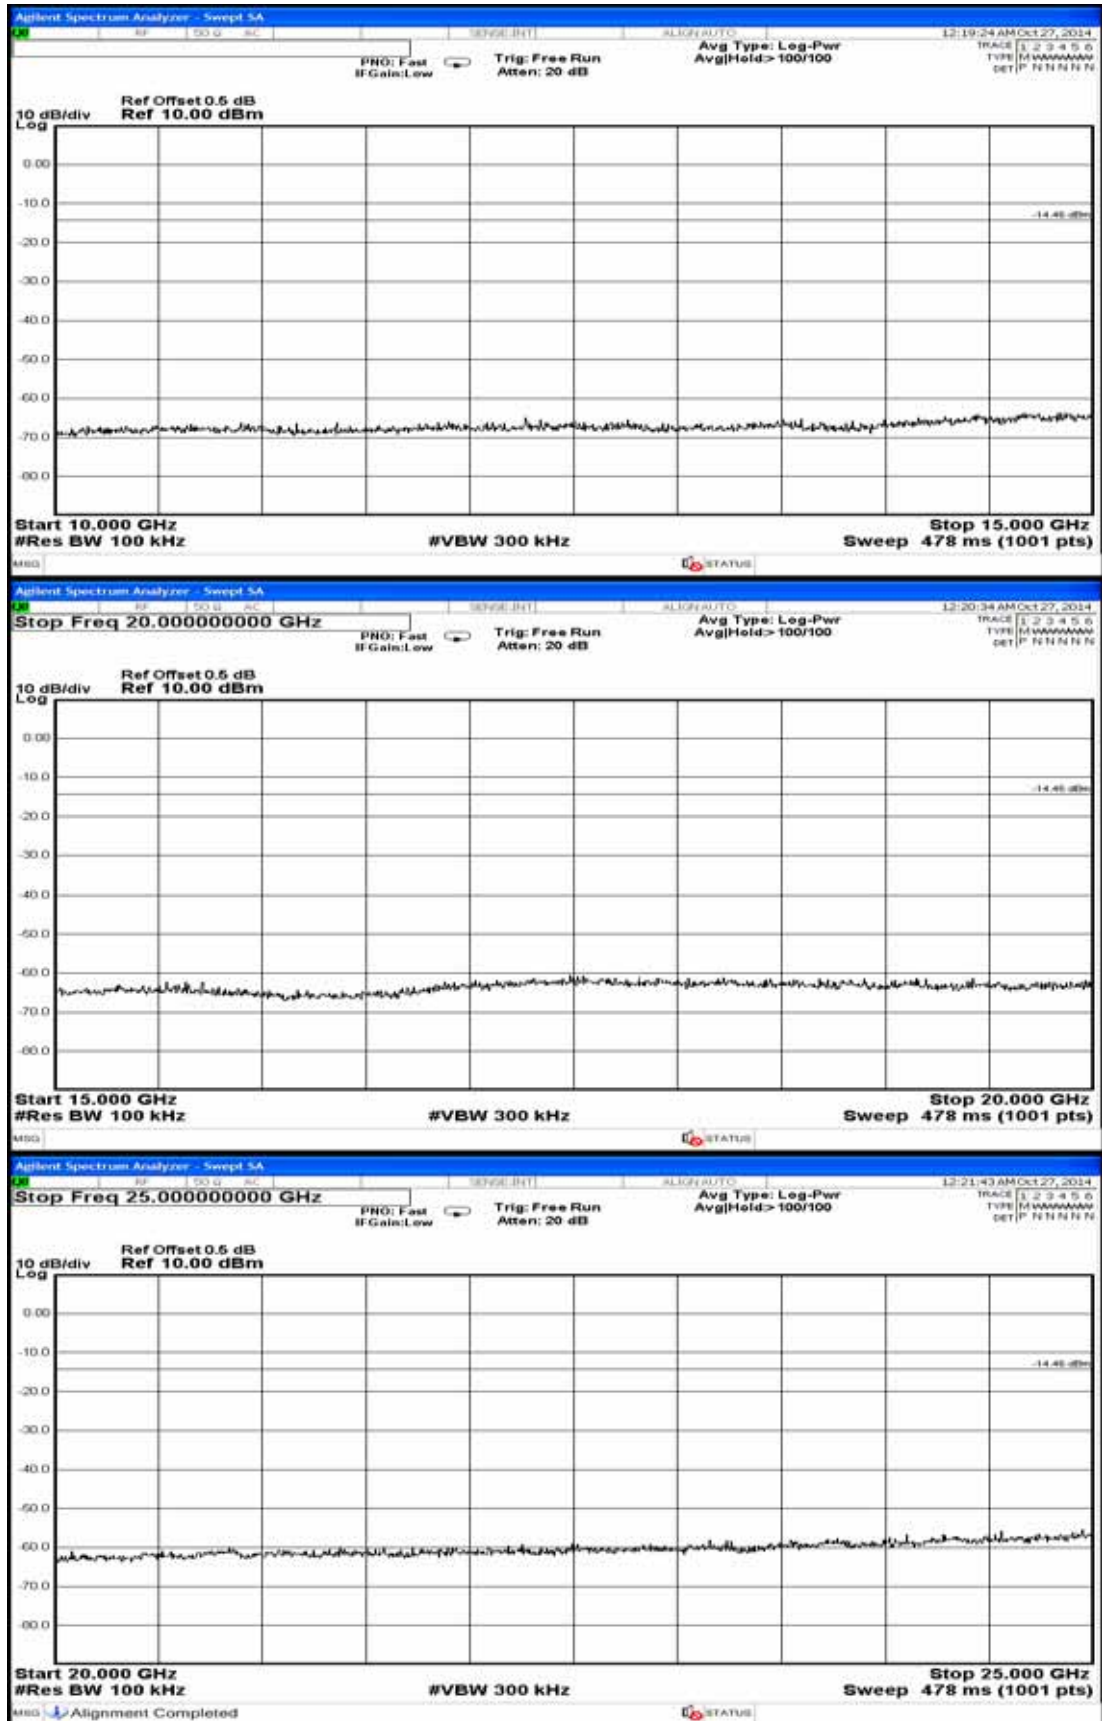



BLE, Frequency: 2440MHz

Test Date : 2014. 10. 27

Temperature : 24°C

Humidity : 58%

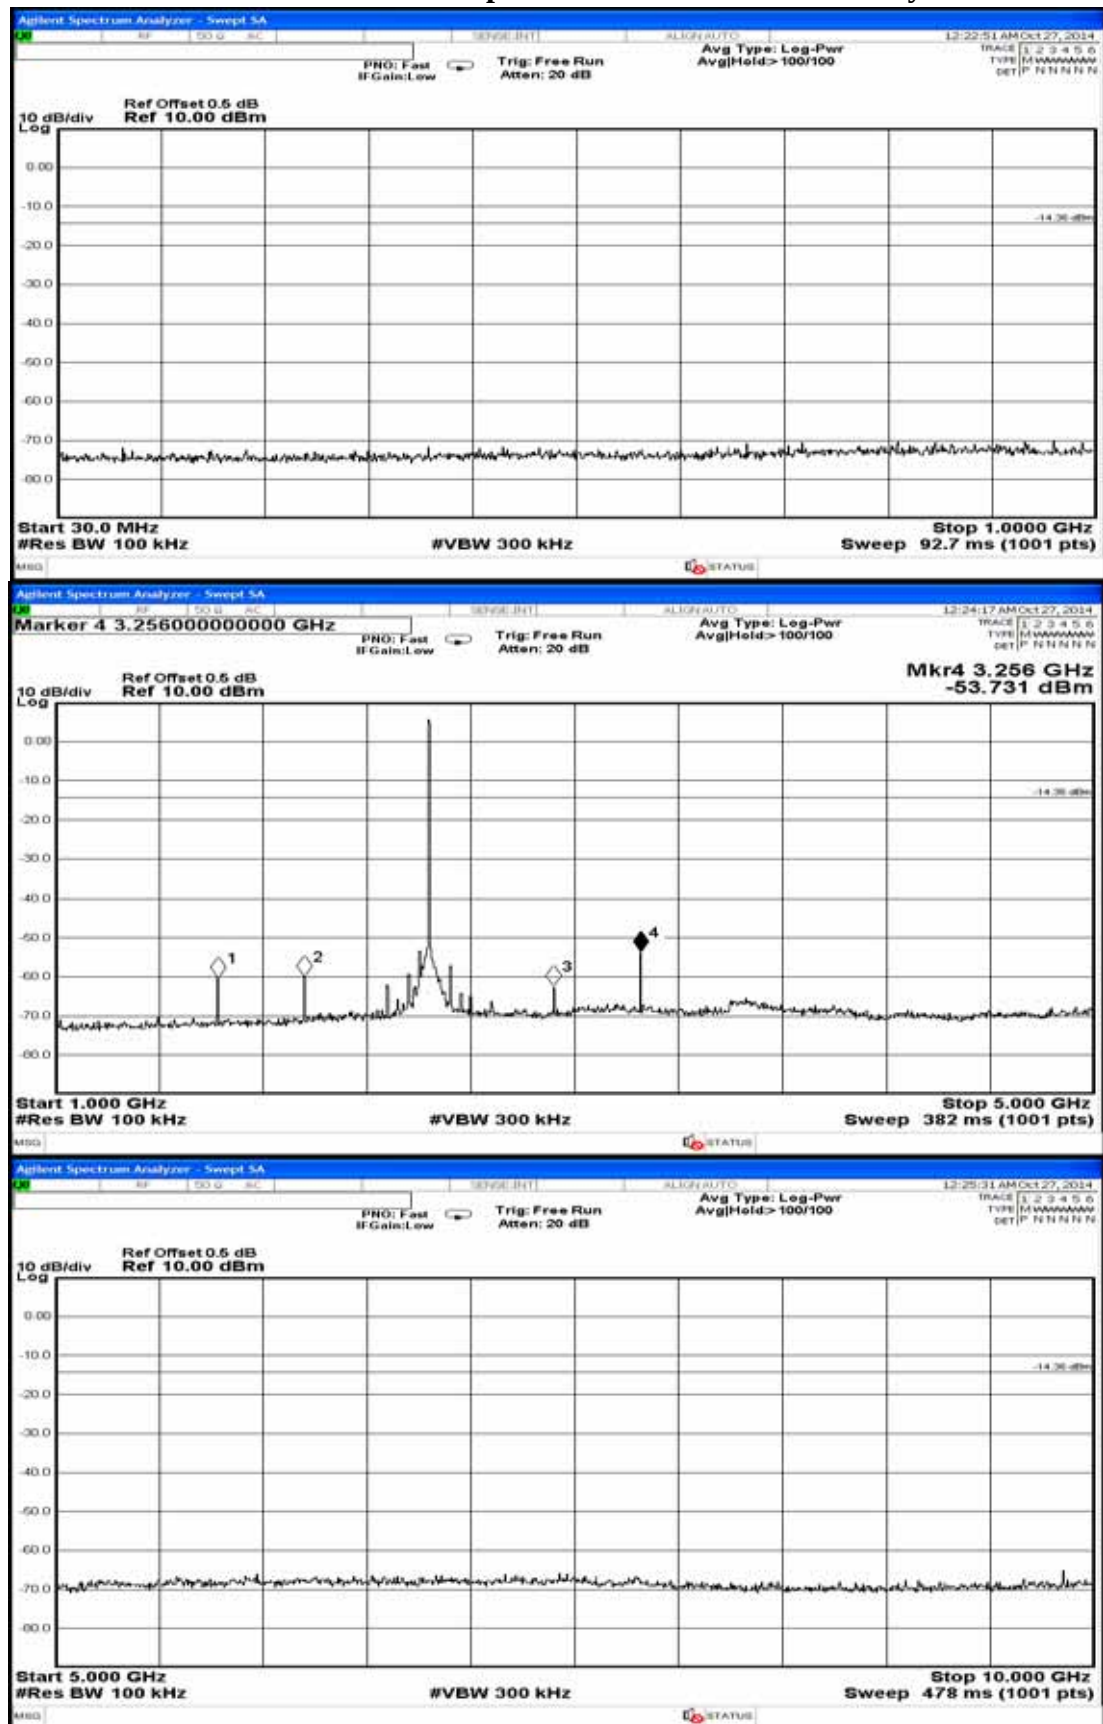

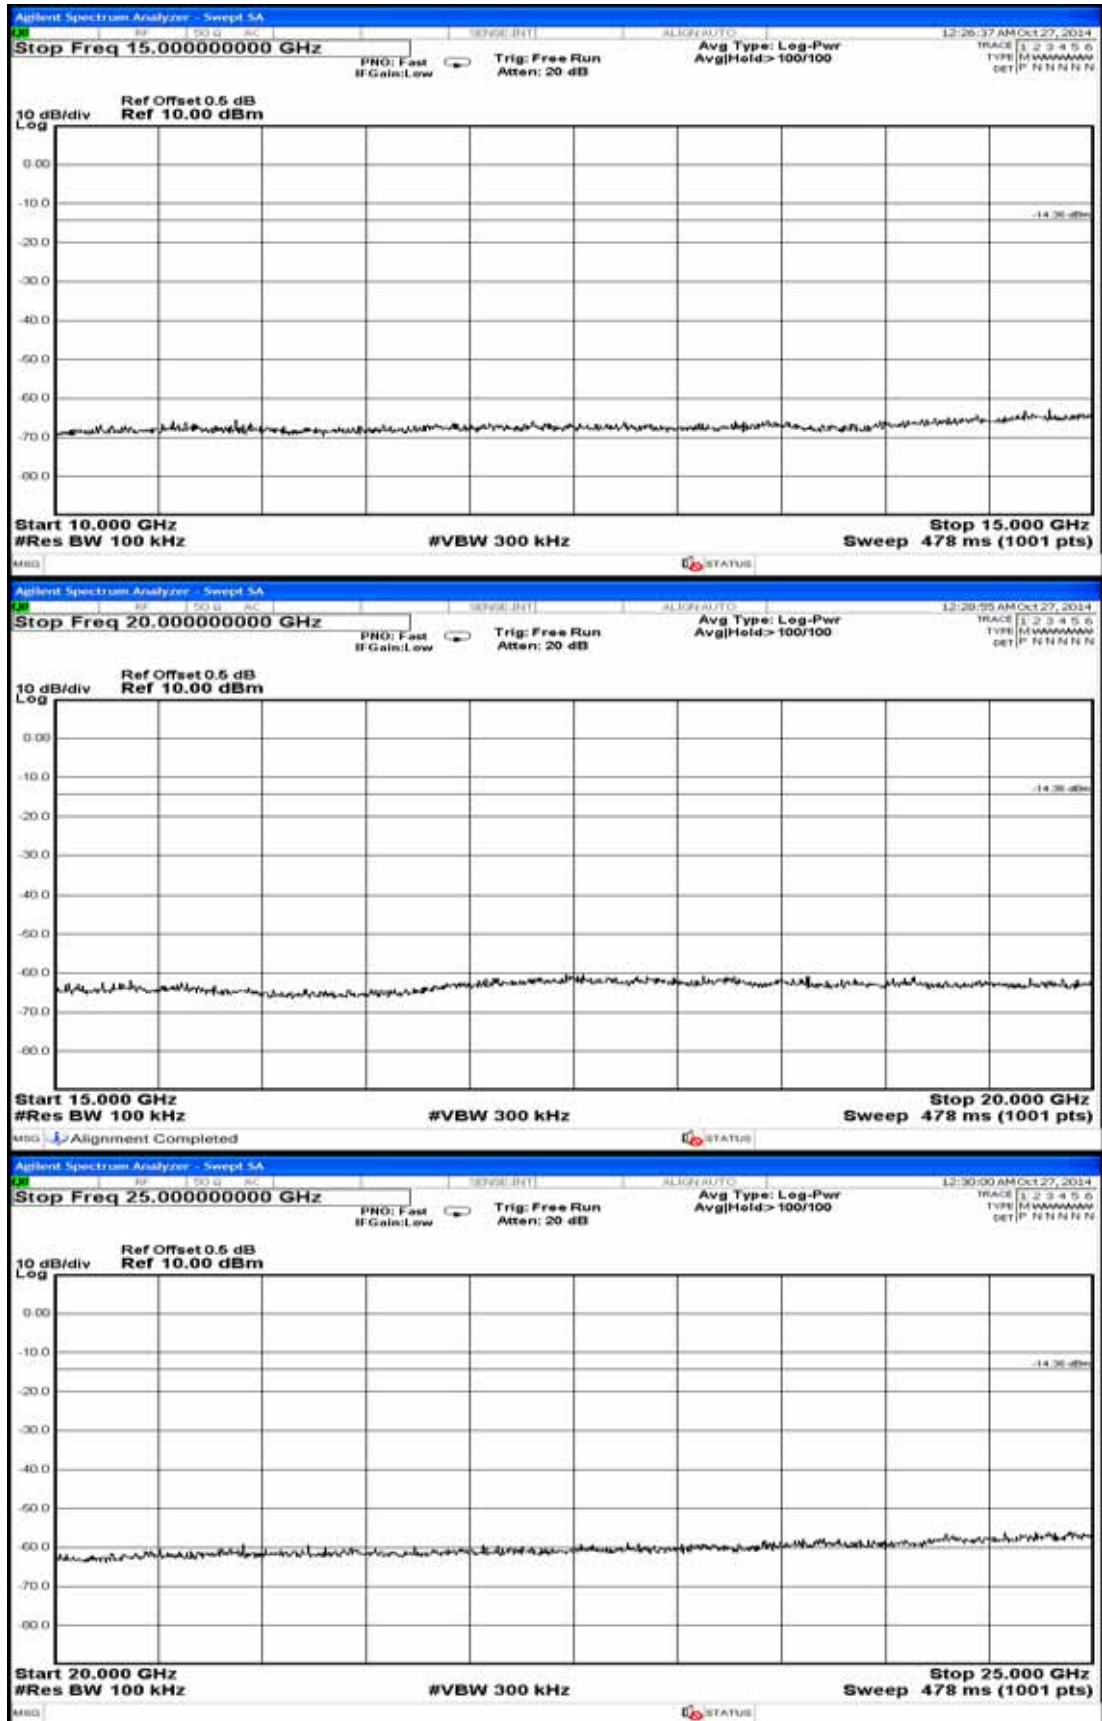



BLE, Frequency: 2480MHz

Test Date : 2014. 10. 27

Temperature : 24°C

Humidity : 58%

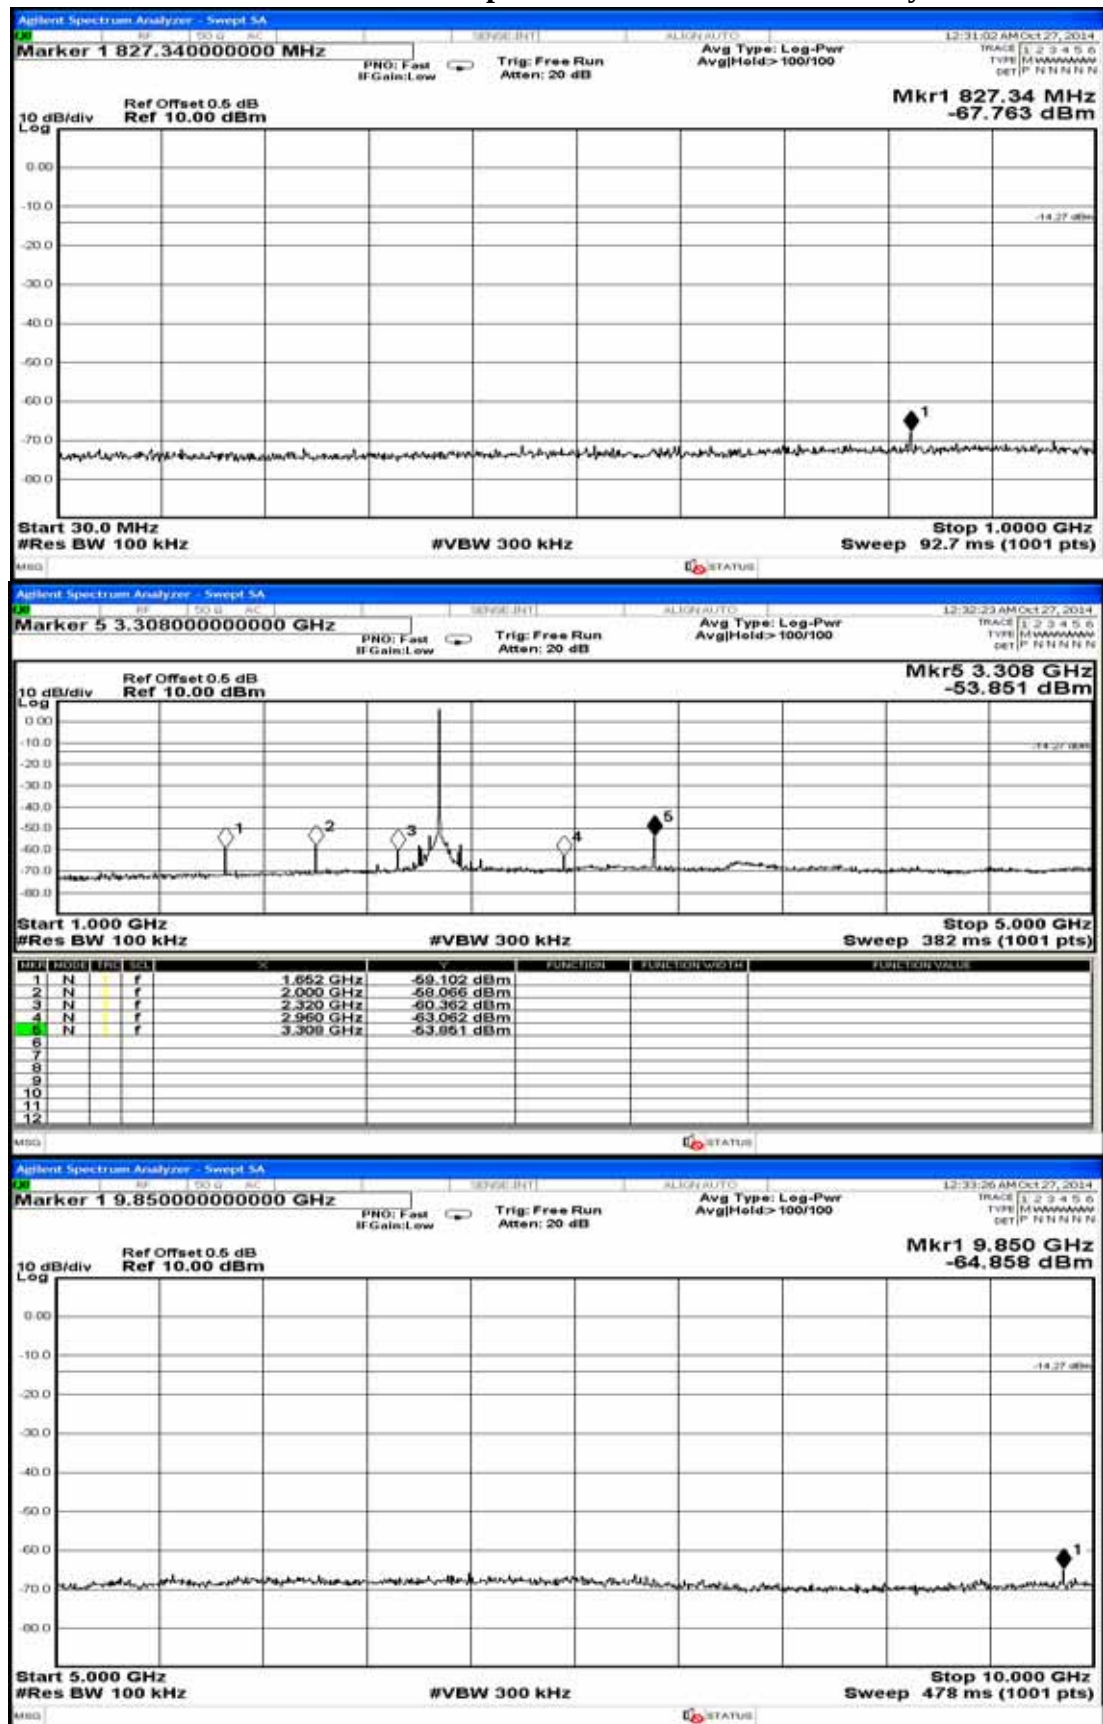

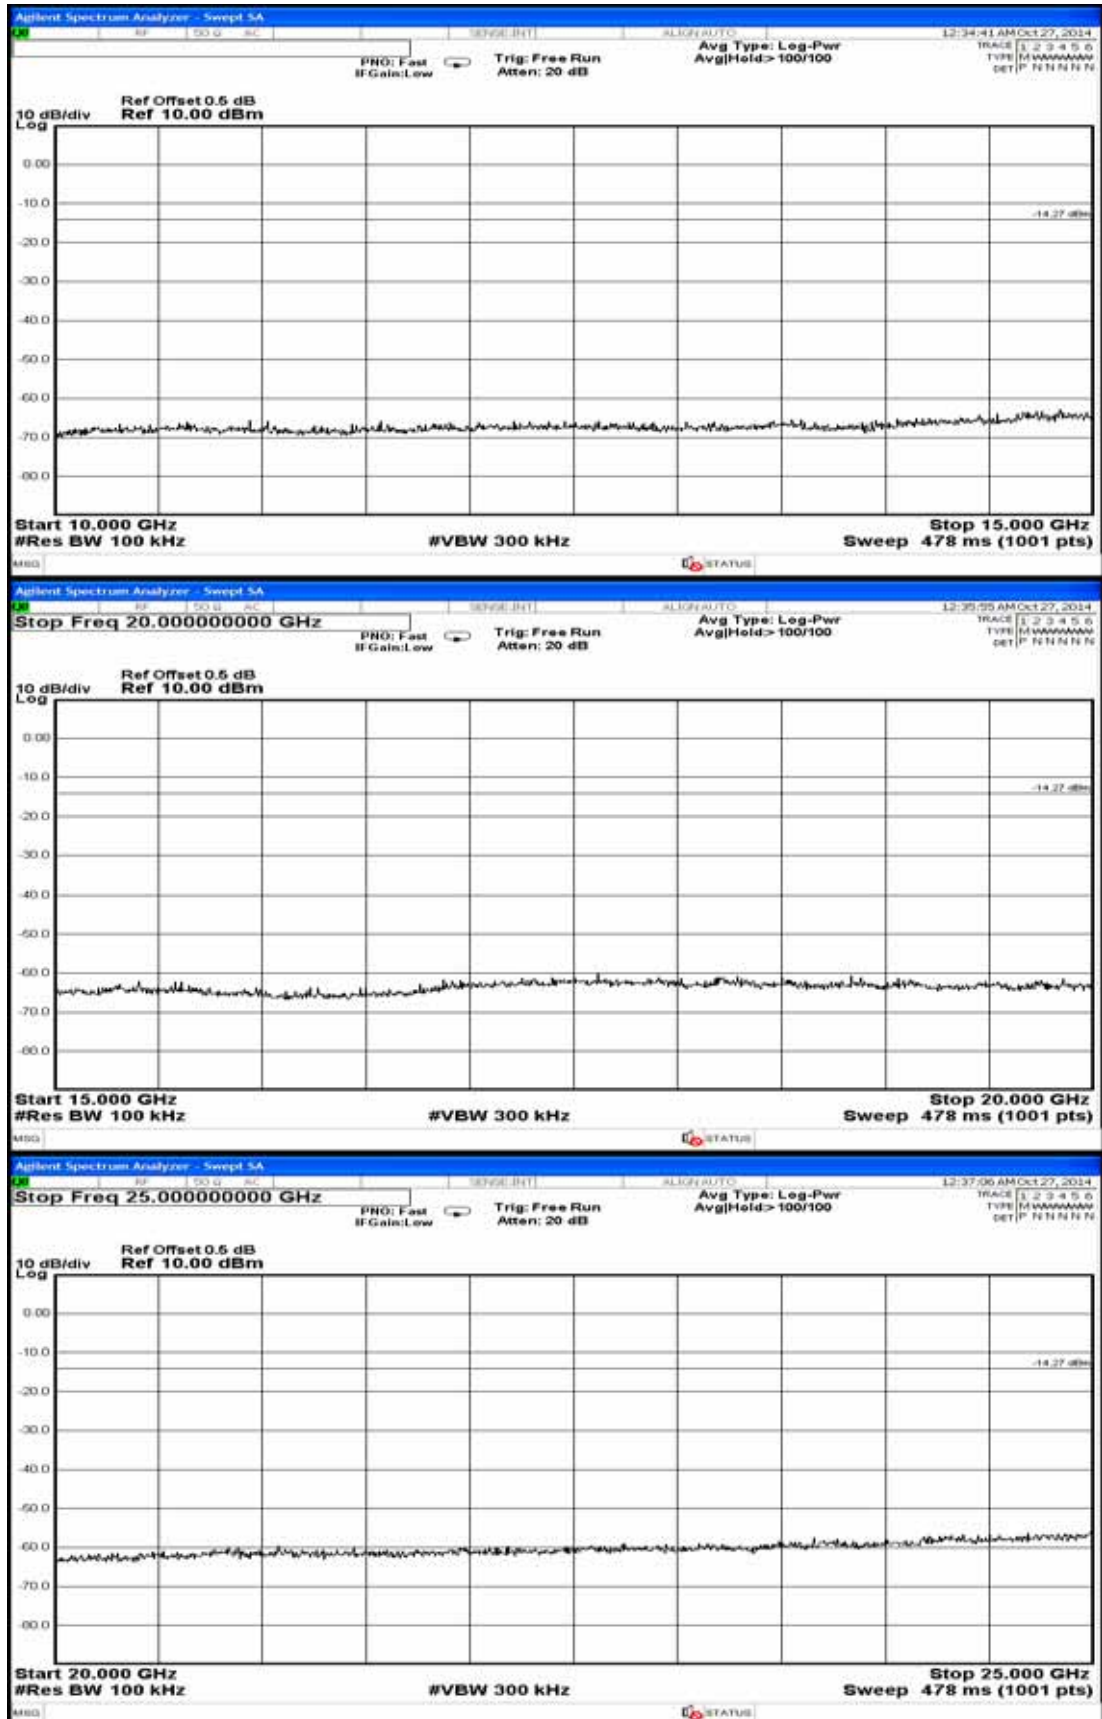

8. BAND EDGES MEASUREMENT

8.1. Test Equipment

The following test equipment was used during the band edges measurement:

Item	Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	R&S	FSV30	101181	2014. 03. 14	1 Year

8.2. Block Diagram of Test Setup

The same as section.5.2.

8.3. Specification Limits [§15.247(c)]

The highest level should be at least 20 dB below reference level as measured in section 9.6.

8.4. Operating Condition of EUT

The test program “Teraterm” for WLAN and BLE was used to enable the EUT to transmit data at different channel frequency individually.

8.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW=100 kHz and VBW to 300kHz with suitable frequency span including 100kHz bandwidth from band edge.

The measurement guideline was according to KDB 558074 D01 DTS Meas Guidance is v03r02.

8.6. Test Results

PASSED. All the test results are attached in next pages.

8.6.1. WLAN Function


Test Date: 2014. 10. 26

Temperature: 26°C


Humidity : 50%

802.11b


Below Band edge

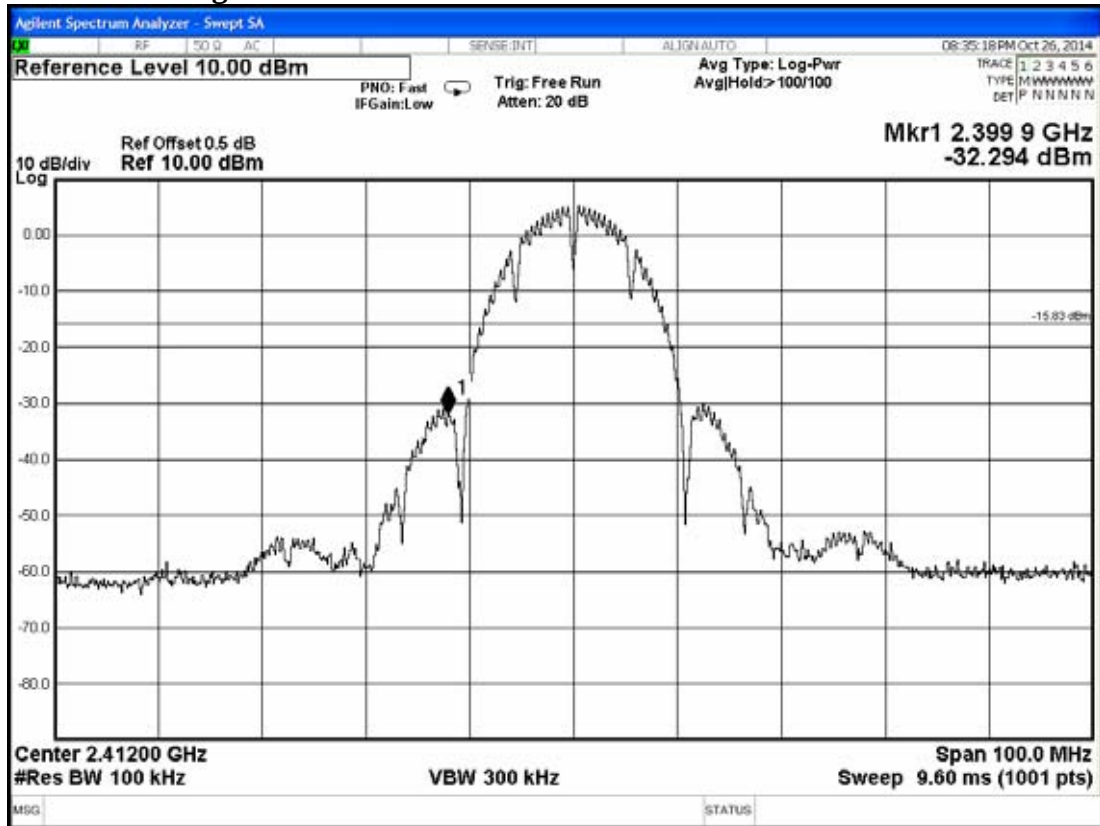


Upper Band edge

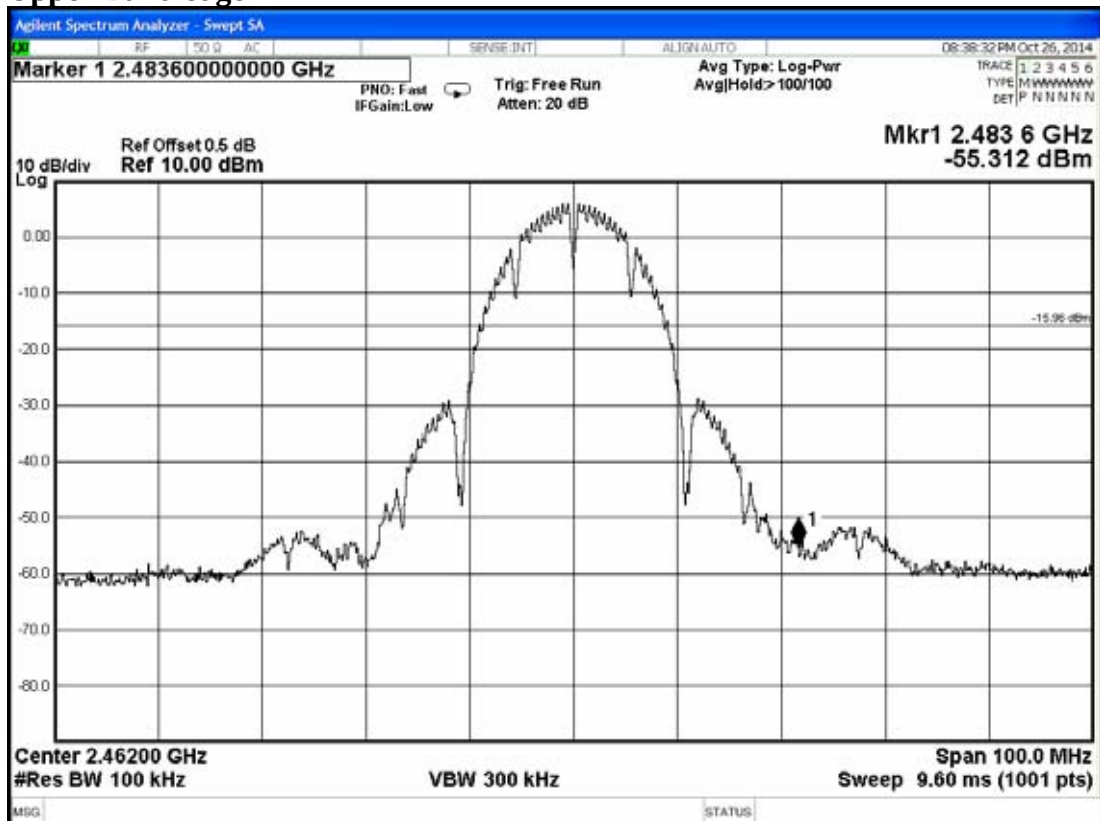

802.11g Below Band edge

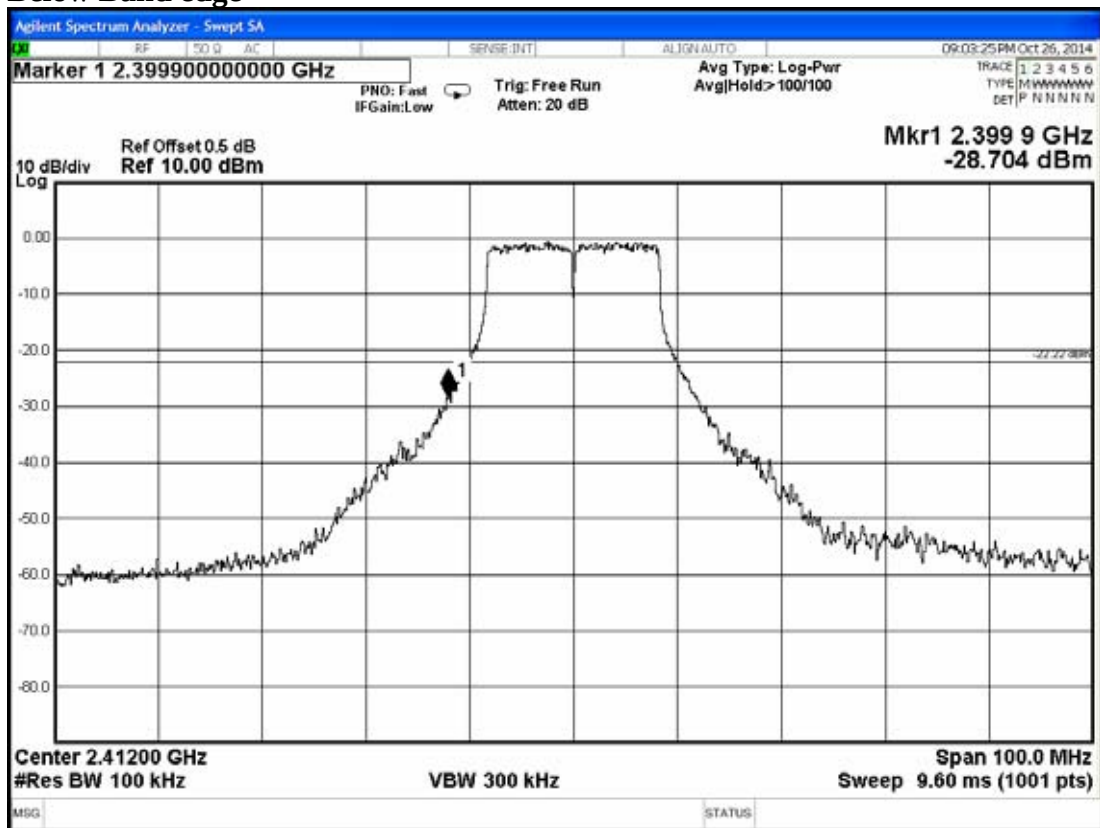


Upper Band edge

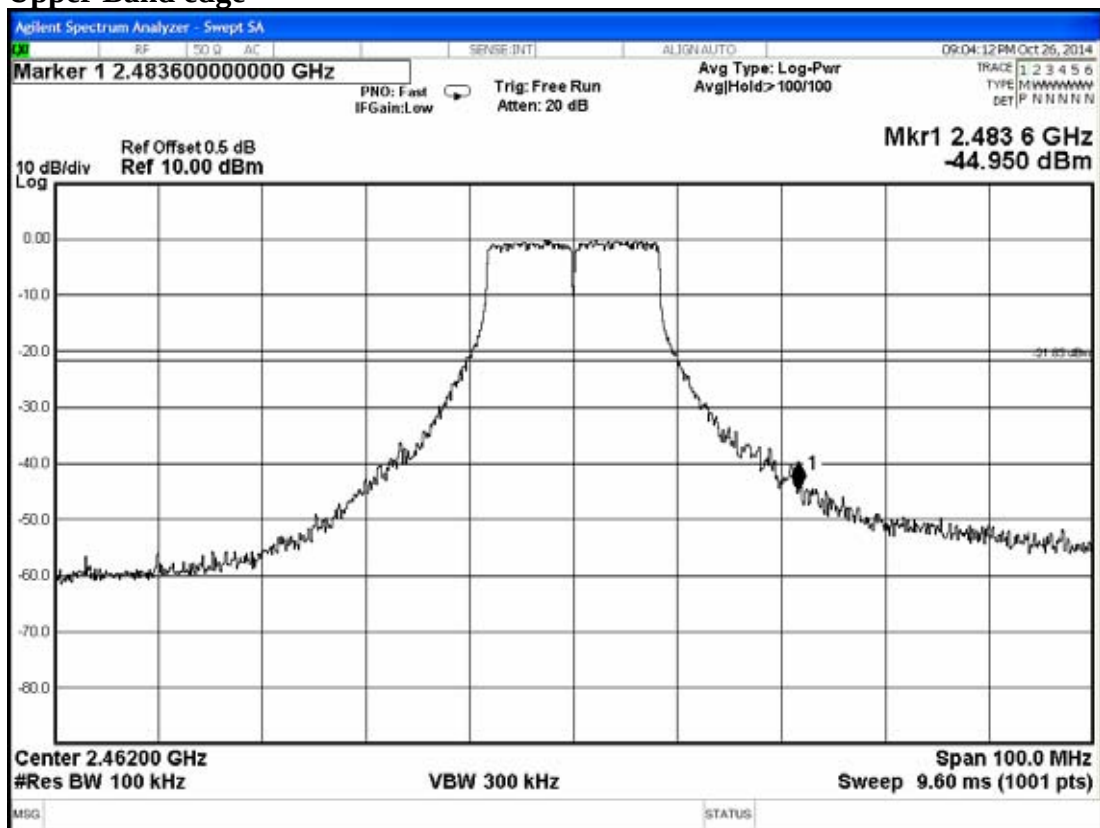


802.11n-HT20

Below Band edge

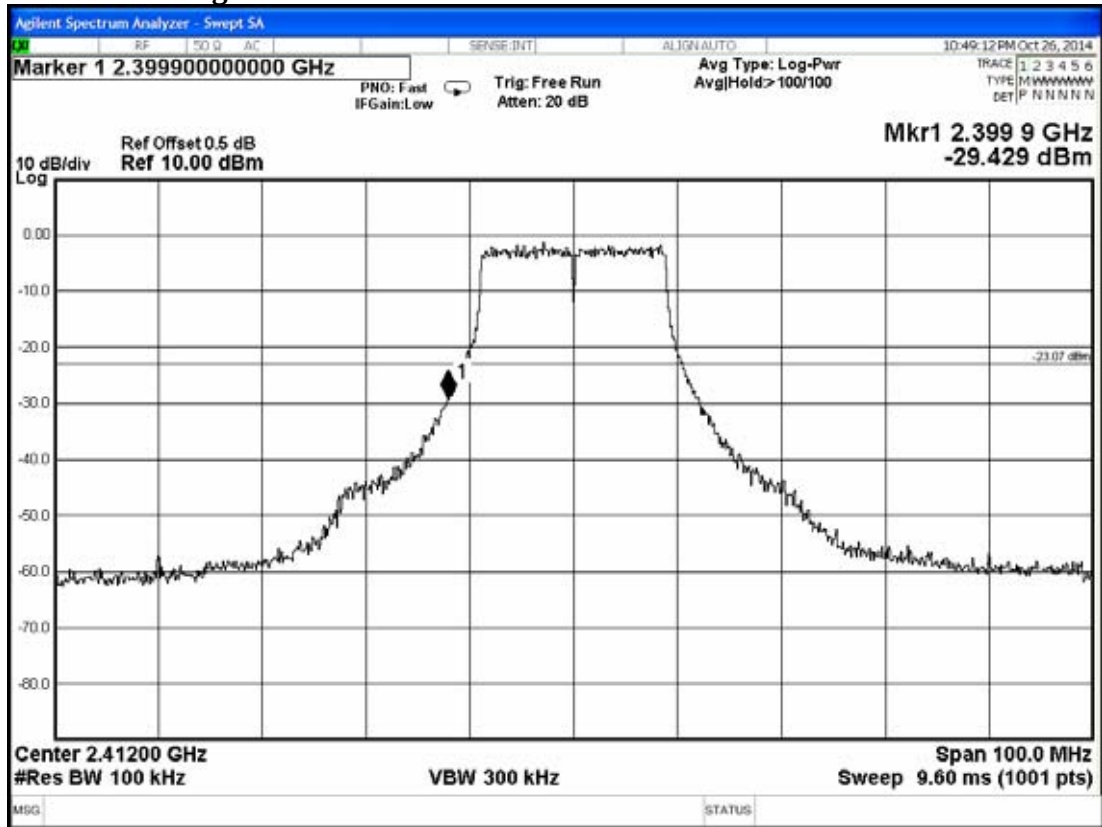


Upper Band edge

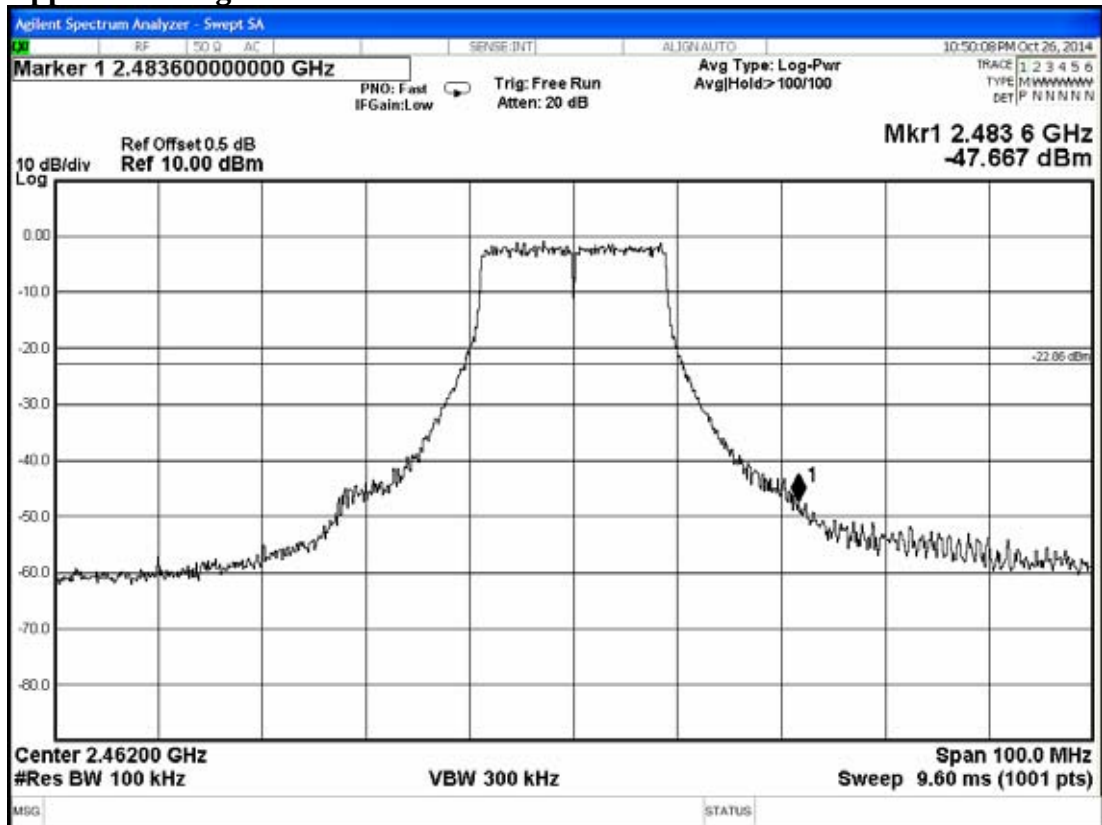


802.11n-HT40

Below Band edge

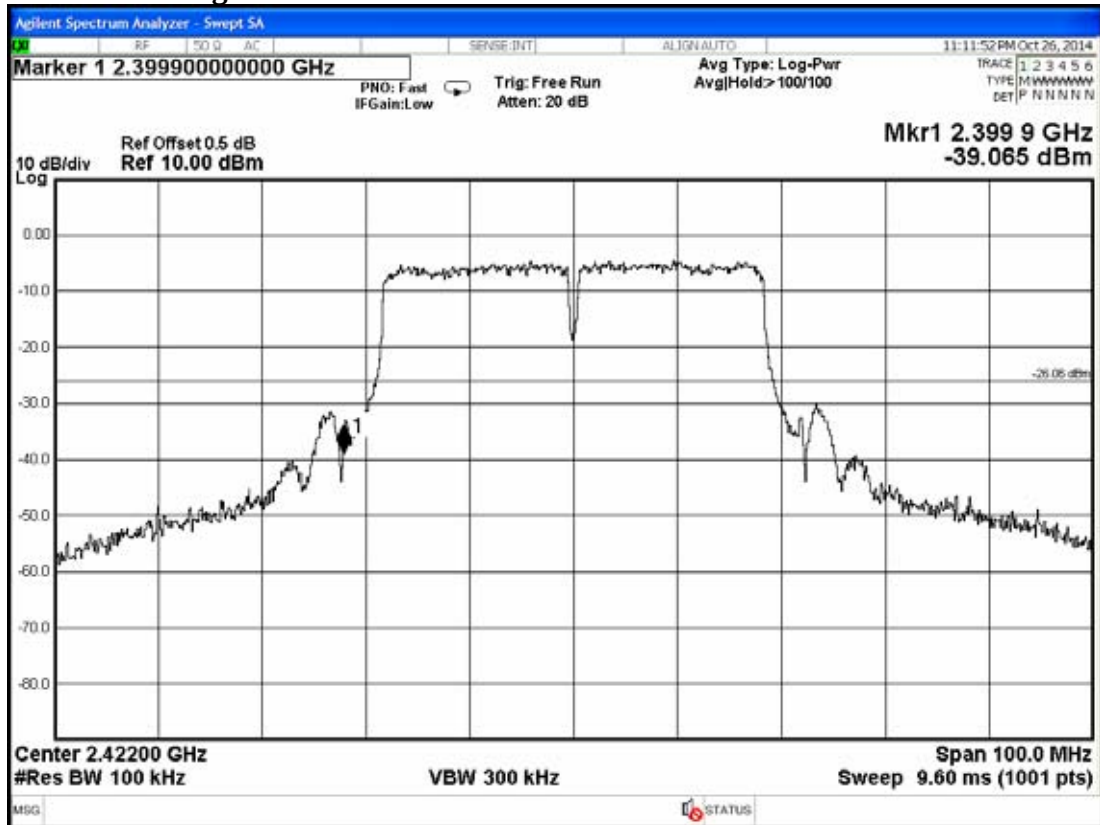

Upper Band edge


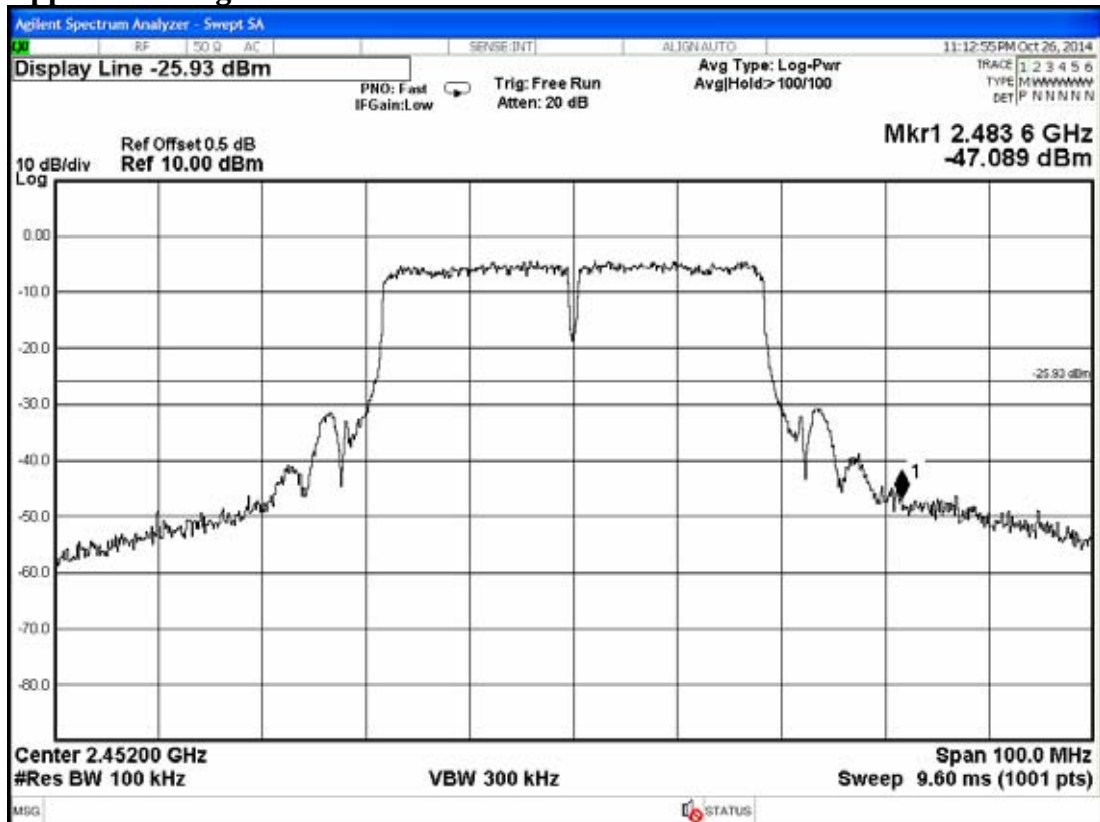


8.6.2. BLE Function

Test Date : 2014. 10. 27

Temperature : 24°C

Humidity : 58%

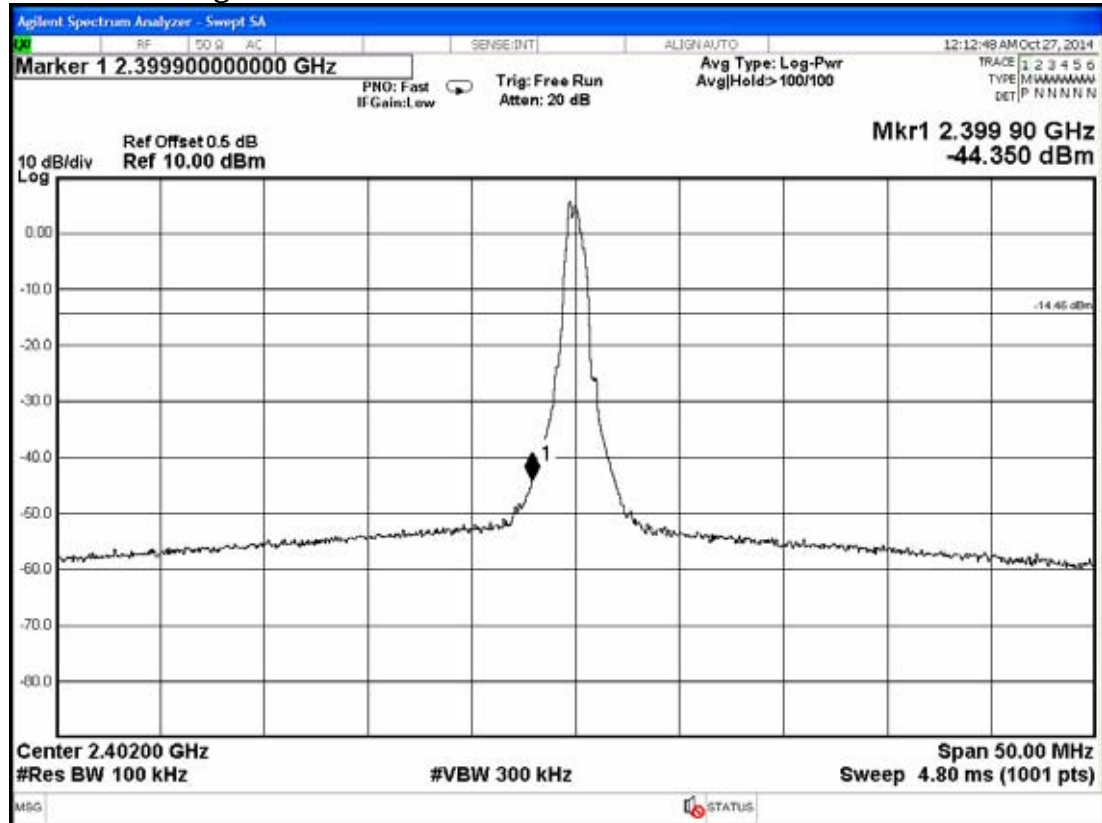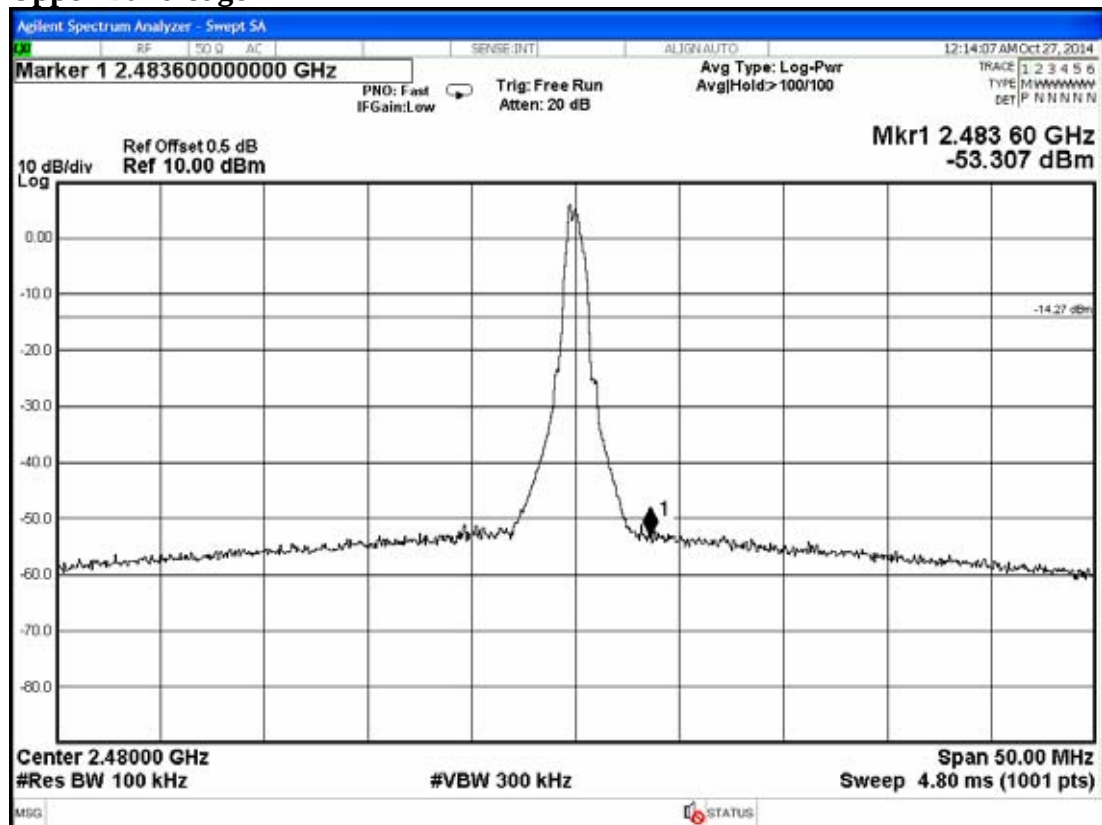Below Band edge**Upper Band edge**

9. POWER SPECTRAL DENSITY MEASUREMENT

9.1. Test Equipment

The following test equipment was used during the power spectral density measurement:

Item	Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	R&S	FSV30	101181	2014. 03. 14	1 Year
		Agilent	N9030A-526	MY53310269	2014. 09. 19	1 Year

9.2. Block Diagram of Test Setup

The same as section.5.2.

9.3. Specification Limits [§15.247(d)]

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

9.4. Operating Condition of EUT

The test program “Teraterm” for WLAN and BLE was used to enable the EUT to transmit data at different channel frequency individually.

9.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using 100kHz RBW and ≥ 300 kHz VBW, set sweep time = Auto.

The measurement guideline was according to KDB 558074 D01 DTS Meas Guidance is v03r02.

9.6. Test Results


PASSED. All the test results are attached in next pages.

9.6.1. WLAN Function


Test Date : 2014. 09. 24 Temperature : 26°C Humidity : 50%

No	Test Mode	Channel	Frequency	Power Spectral Density (dBm)
1	802.11b	CH 1	2412MHz	3.67
2		CH 6	2437MHz	3.63
3		CH 11	2462MHz	4.04
4	802.11g	CH 1	2412MHz	-2.22
5		CH 6	2437MHz	-0.46
6		CH 11	2462MHz	-1.83
7	802.11n-HT20	CH 1	2412MHz	-3.07
8		CH 6	2437MHz	-0.41
9		CH 11	2462MHz	-2.86
10	802.11n-HT40	CH 3	2422MHz	-6.06
11		CH 6	2437MHz	-3.46
12		CH 9	2452MHz	-5.93


[Limit: 8dBm]

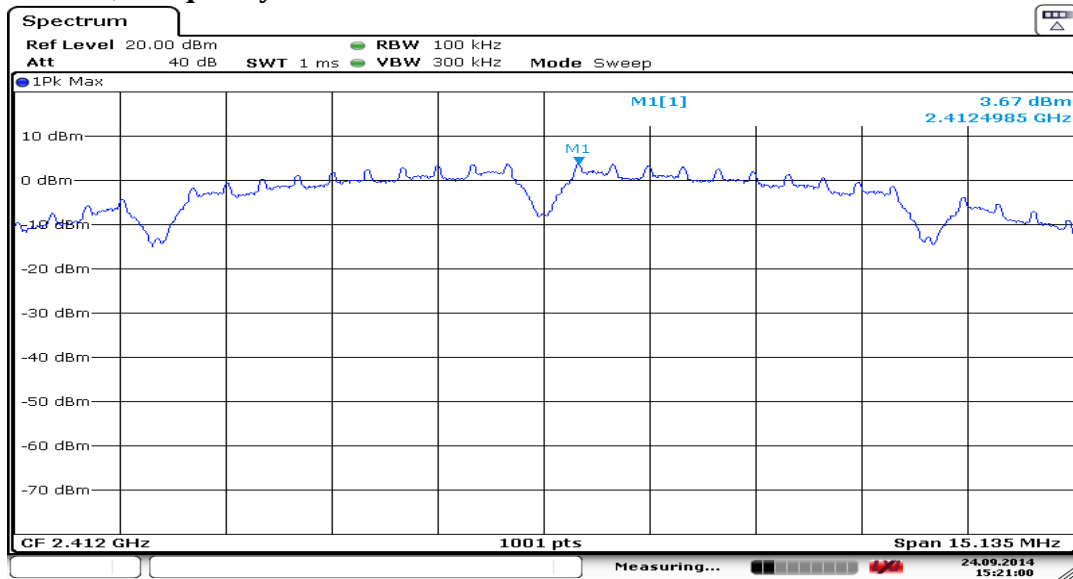802.11b, Frequency: 2412MHz




Date: 24.SEP.2014 15:21:01

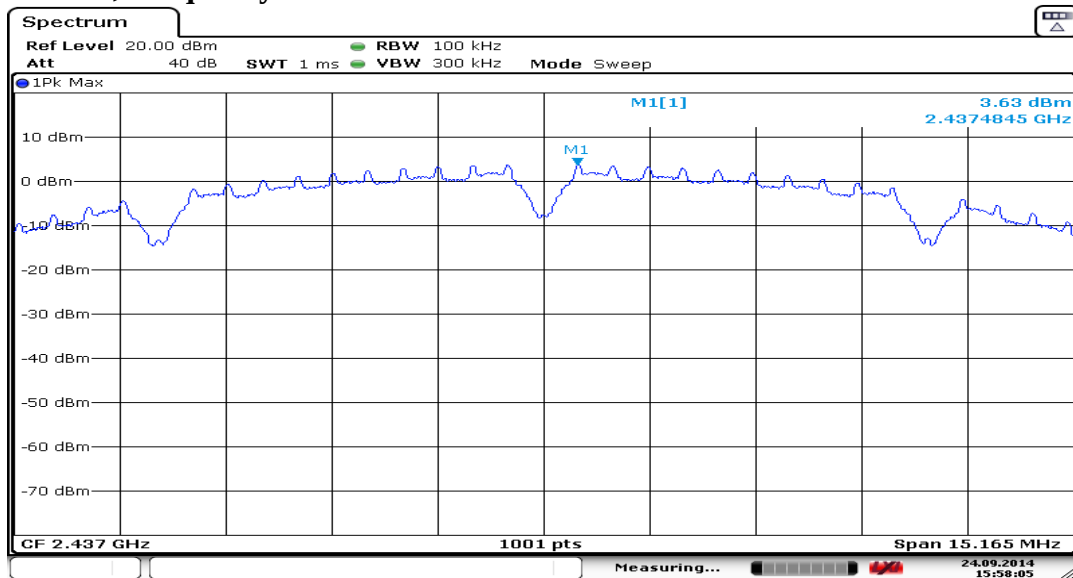
802.11b, Frequency: 2437MHz

Date: 24.SEP.2014 15:58:05

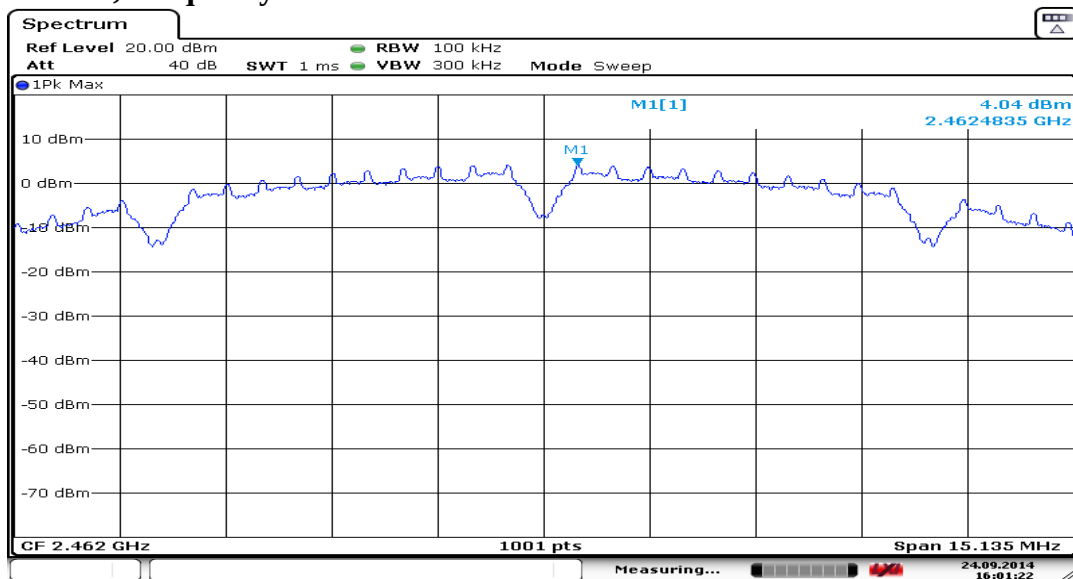
802.11b, Frequency: 2462MHz

Date: 24.SEP.2014 16:01:23

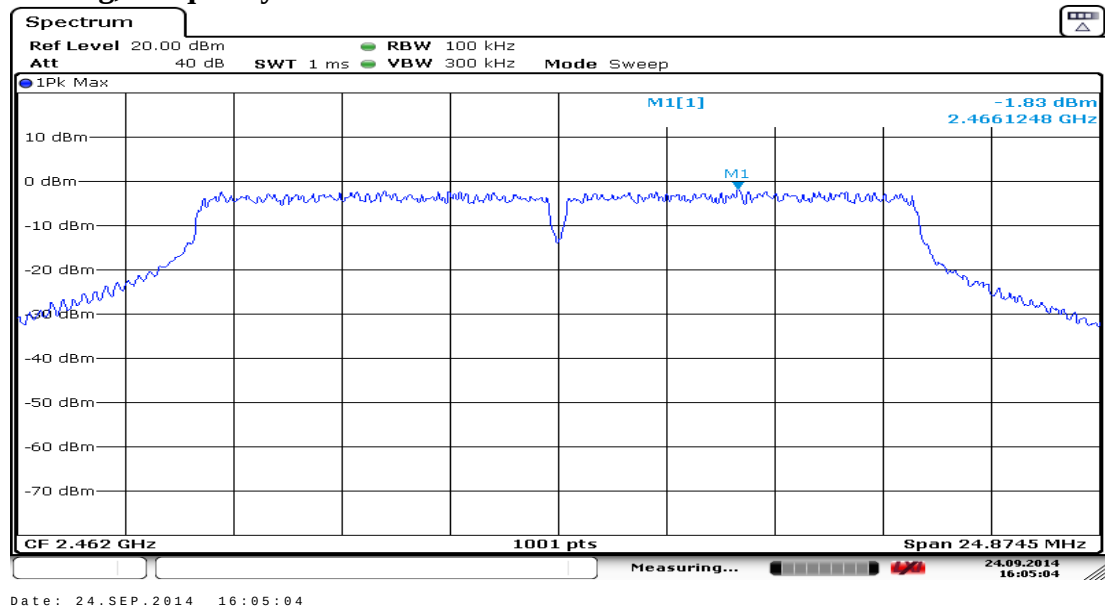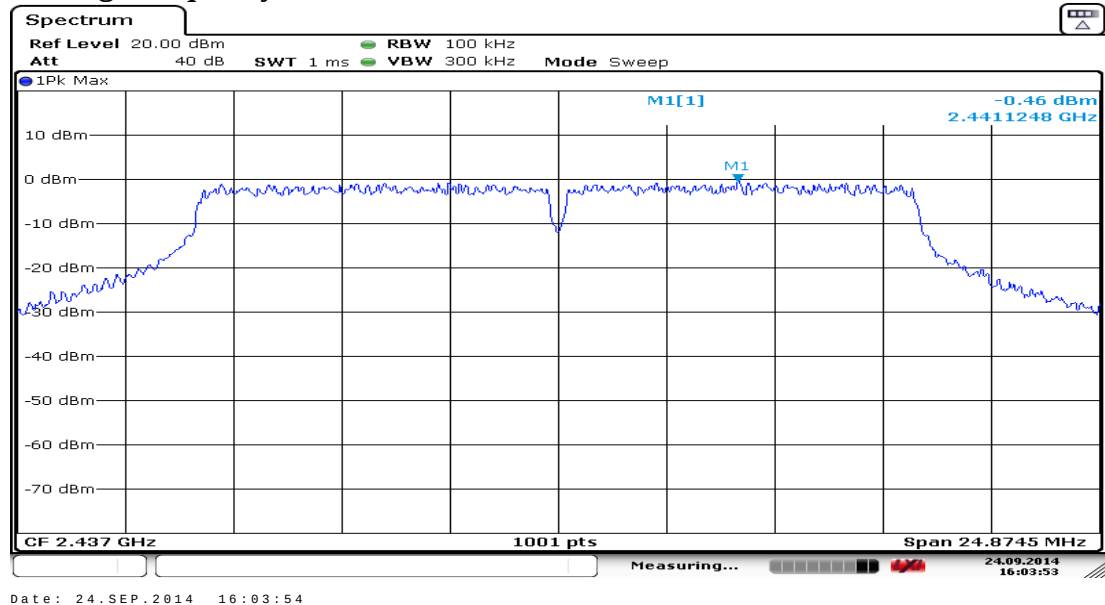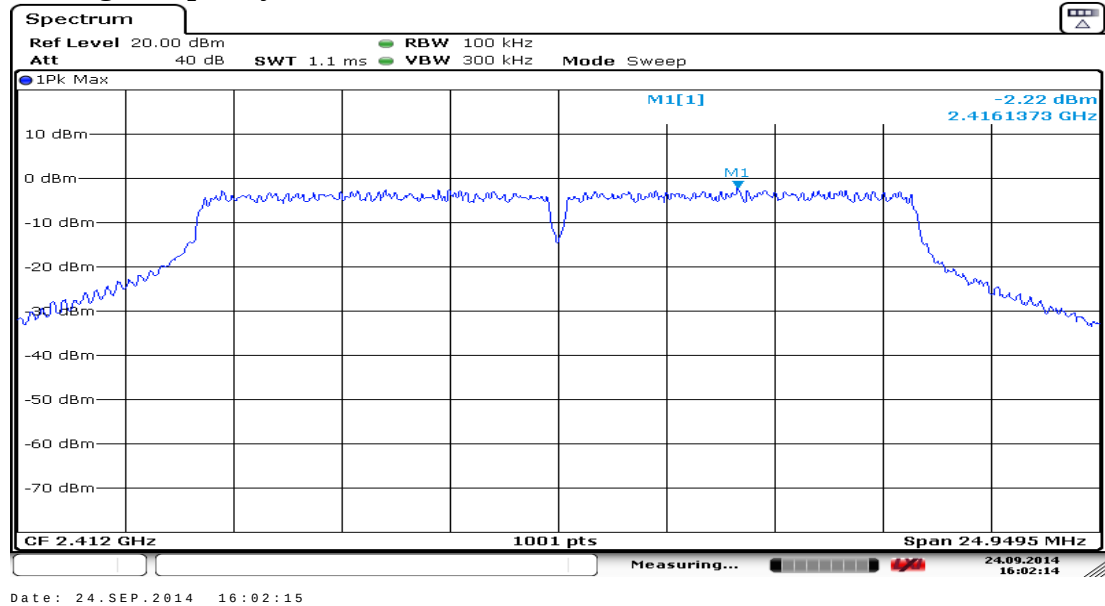


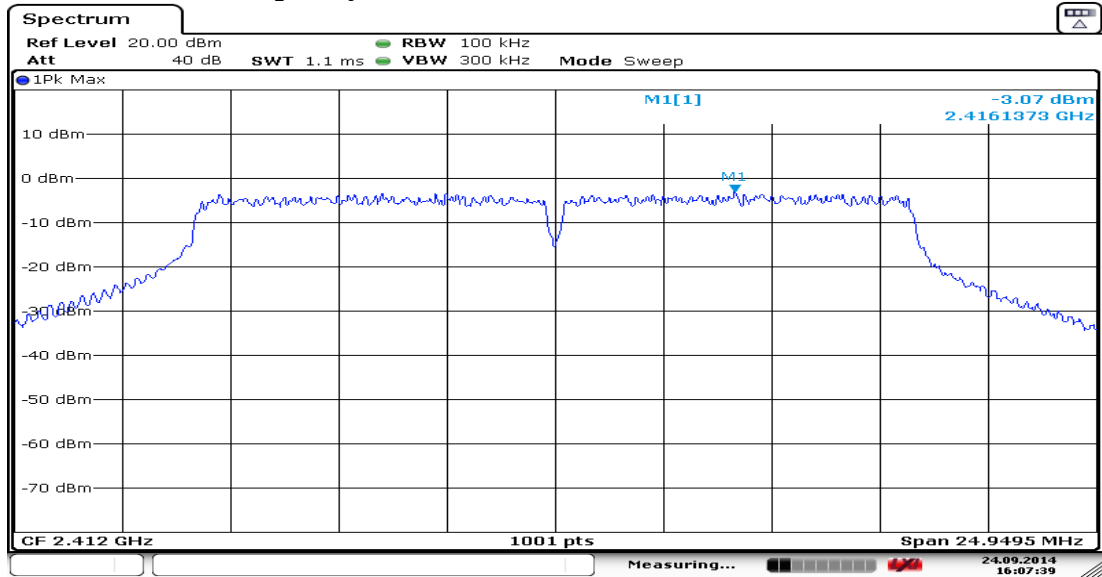802.11n-HT20, Frequency: 2412MHz


Date: 24.SEP.2014 16:07:39

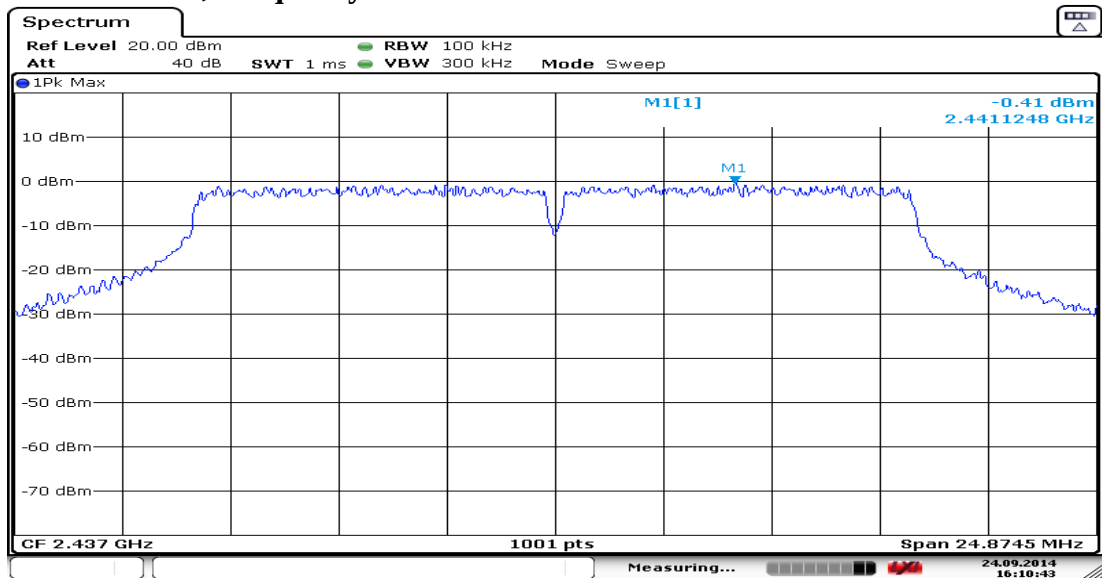802.11n-HT20, Frequency: 2437MHz


Date: 24.SEP.2014 16:10:43

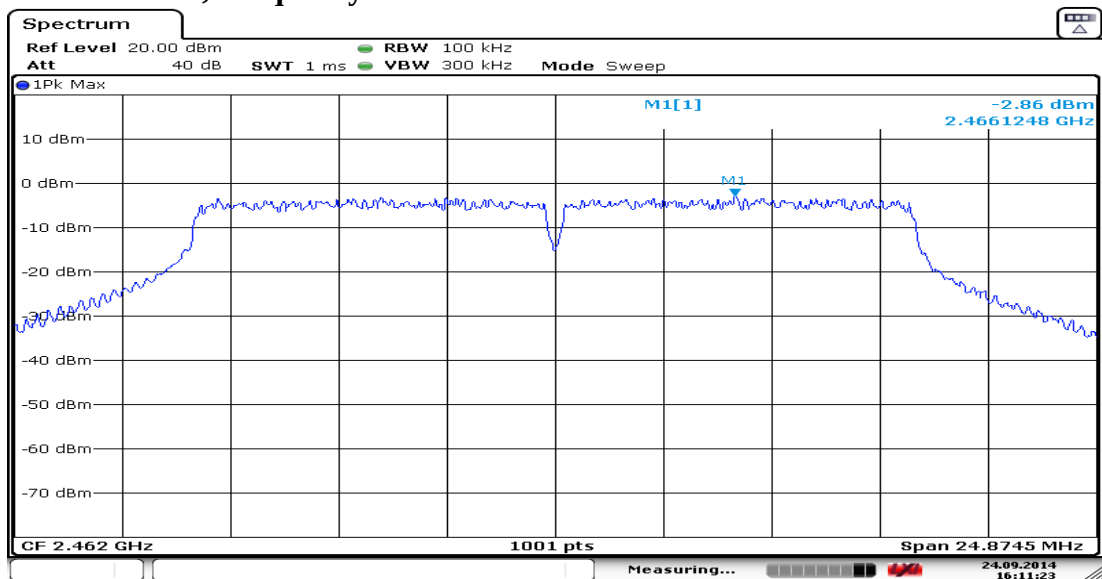802.11n-HT20, Frequency: 2462MHz


Date: 24.SEP.2014 16:11:23

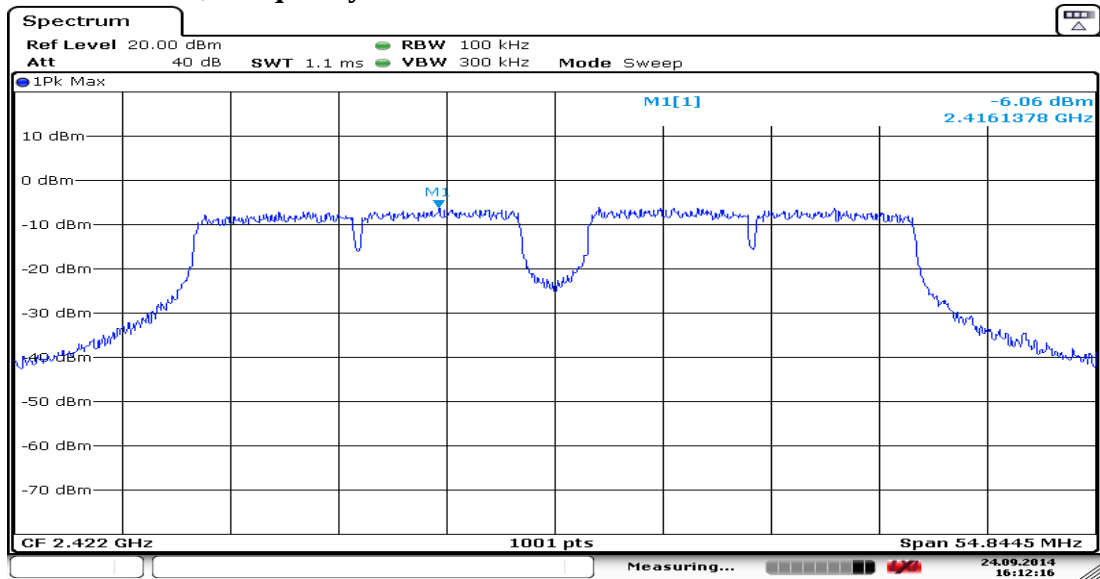802.11n-HT40, Frequency: 2422MHz

Date: 24.SEP.2014 16:12:16

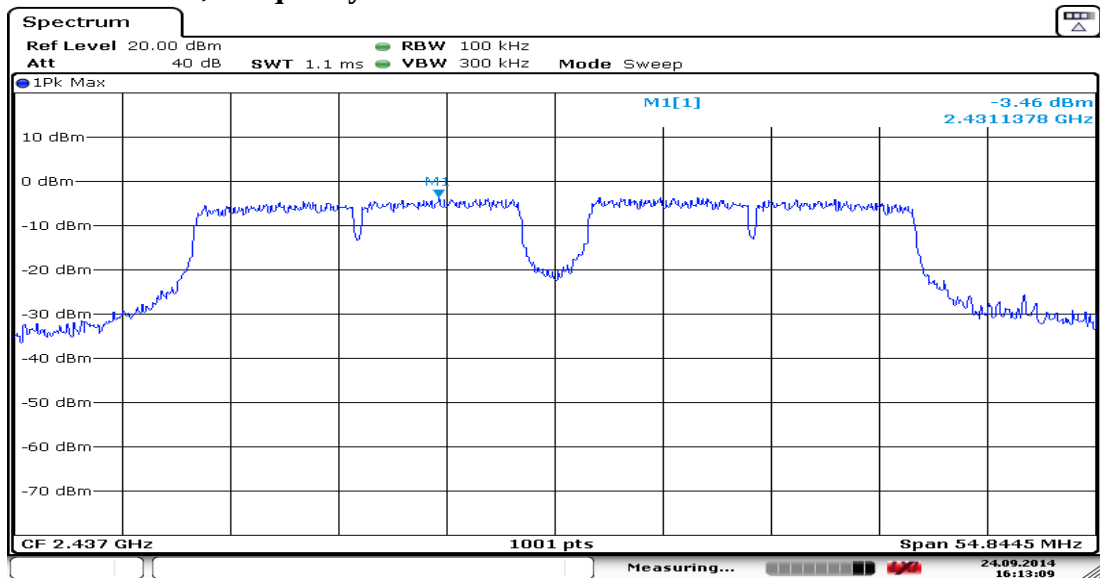802.11n-HT40, Frequency: 2437MHz

Date: 24.SEP.2014 16:13:09

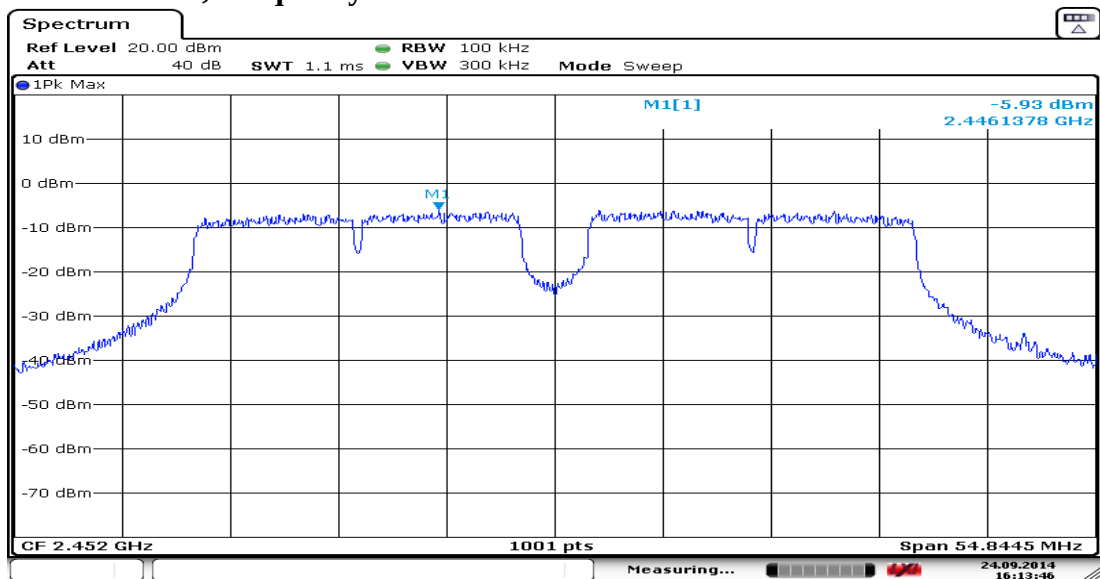802.11n-HT40, Frequency: 2452MHz

Date: 24.SEP.2014 16:13:47

9.6.2. BLE Function

Test Date : 2014. 10. 27


Temperature : 24°C

Humidity : 58%


No	Test Mode	Channel	Frequency	Power Spectral Density (dBm)
1	BLE	CH 0	2402MHz	5.541
2		CH 19	2440MHz	5.726
3		CH 39	2480MHz	5.641

[Limit: 8dBm]

BLE, Frequency: 2402MHz

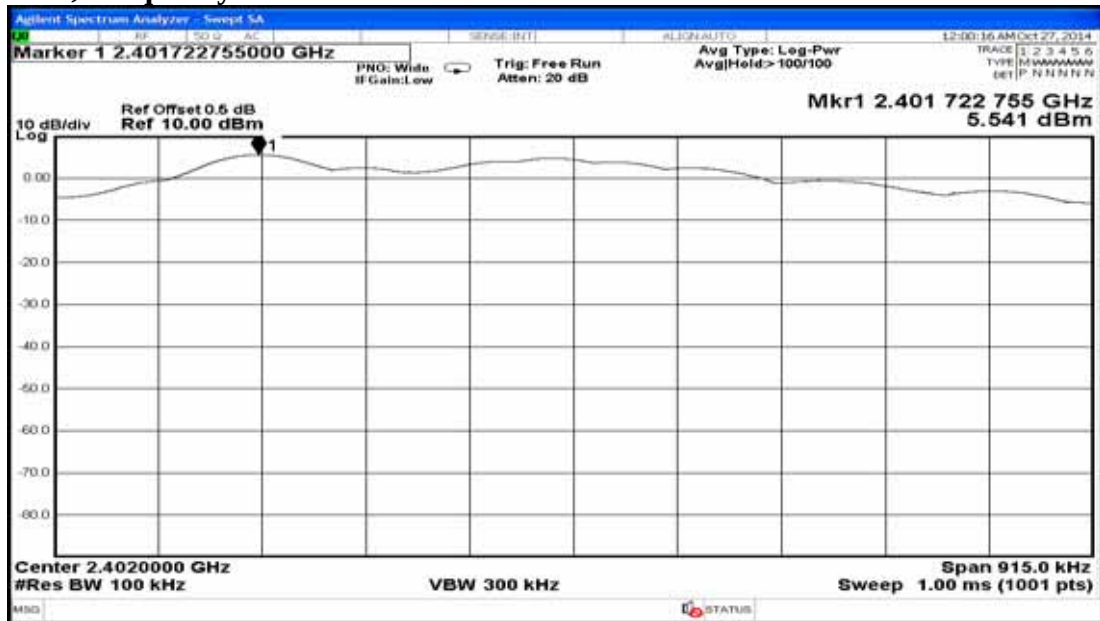

BLE, Frequency: 2440MHz

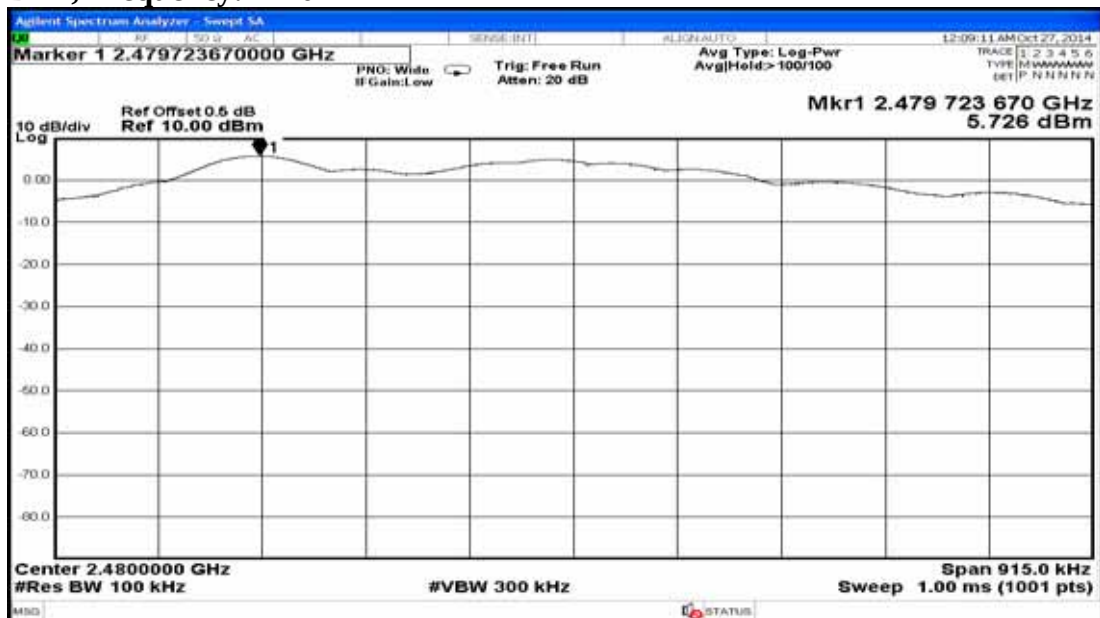

BLE, Frequency: 2480MHz



10.DEVIATION TO TEST SPECIFICATIONS

【NONE】

11.PHOTOGRAPHS

11.1.Photos of Conducted Disturbance Measurement



FRONT VIEW OF CONDUCTED MEASUREMENT



BACK VIEW OF CONDUCTED MEASUREMENT

11.2.Photos of Radiated Measurement at Semi-Anechoic Chamber


11.2.1. Frequency Range 30MHz-1GHz



11.2.2. Frequency Range Above 1GHz



11.3.Photo of Section RF Conducted Measurement

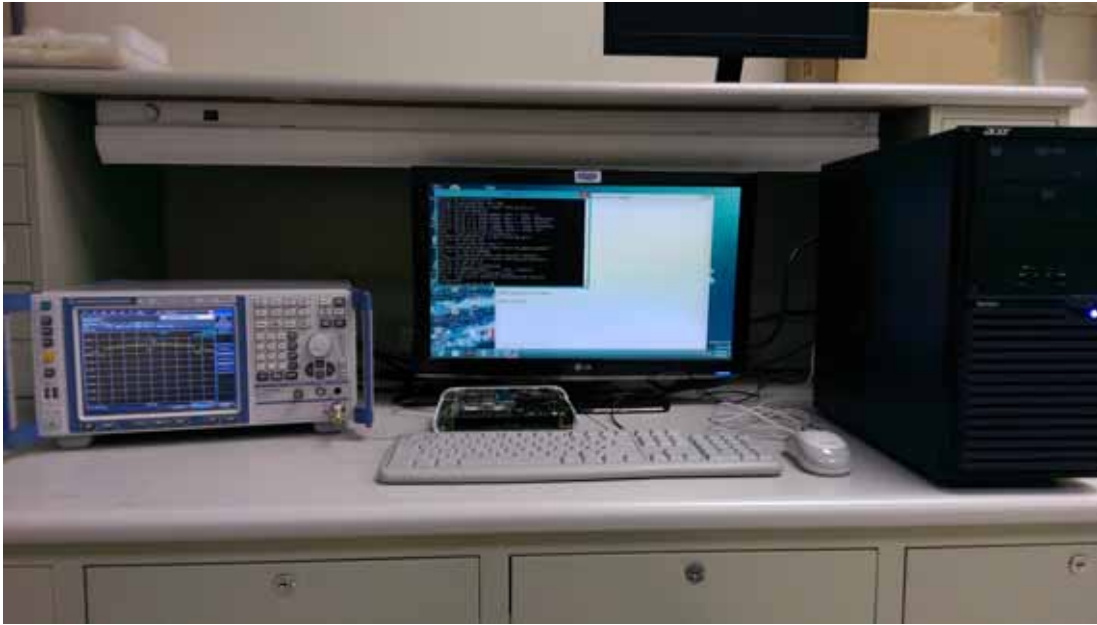

11.4.Photo of Maximum Peak Output Power Measurement

