



AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX A

TEST PLOTS

(Model: mPAD-7.....)

TABLE OF CONTENTS

A.1 6dB BANDWIDTH MEASUREMENT	2
A.1.1 6dB Bandwidth Result.....	2
A.1.2 Measurement Plots	3
A.2 MAXIMUM PEAK OUTPUT POWER MEASUREMENT	6
A.2.1 Peak Output Power	6
A.2.2 Average Output Power (Reporting only).....	7
A.2.3 Measurement Plots	8
A.3 EMISSION LIMITATIONS MEASUREMENT	9
A.4 POWER SPECTRAL DENSITY	24
A.4.1 Power Spectral Density Result	24
A.4.2 Measurement Plots	25


A.1 6dB BANDWIDTH MEASUREMENT

Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	---	Test Voltage	DC 3.7V


A.1.1 6dB Bandwidth Result

Modulation Type	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Limit
802.11b	2412	10.11	>500kHz
	2437	10.11	
	2462	10.11	
802.11g	2412	16.63	
	2437	16.63	
	2462	16.63	
802.11n-HT20	2412	17.87	
	2437	17.87	
	2462	17.86	
802.11n-HT40	2422	36.53	
	2437	36.55	
	2452	36.54	
BLE	2402	0.8015	
	2440	0.8003	
	2480	0.8005	






A.1.2 Measurement Plots

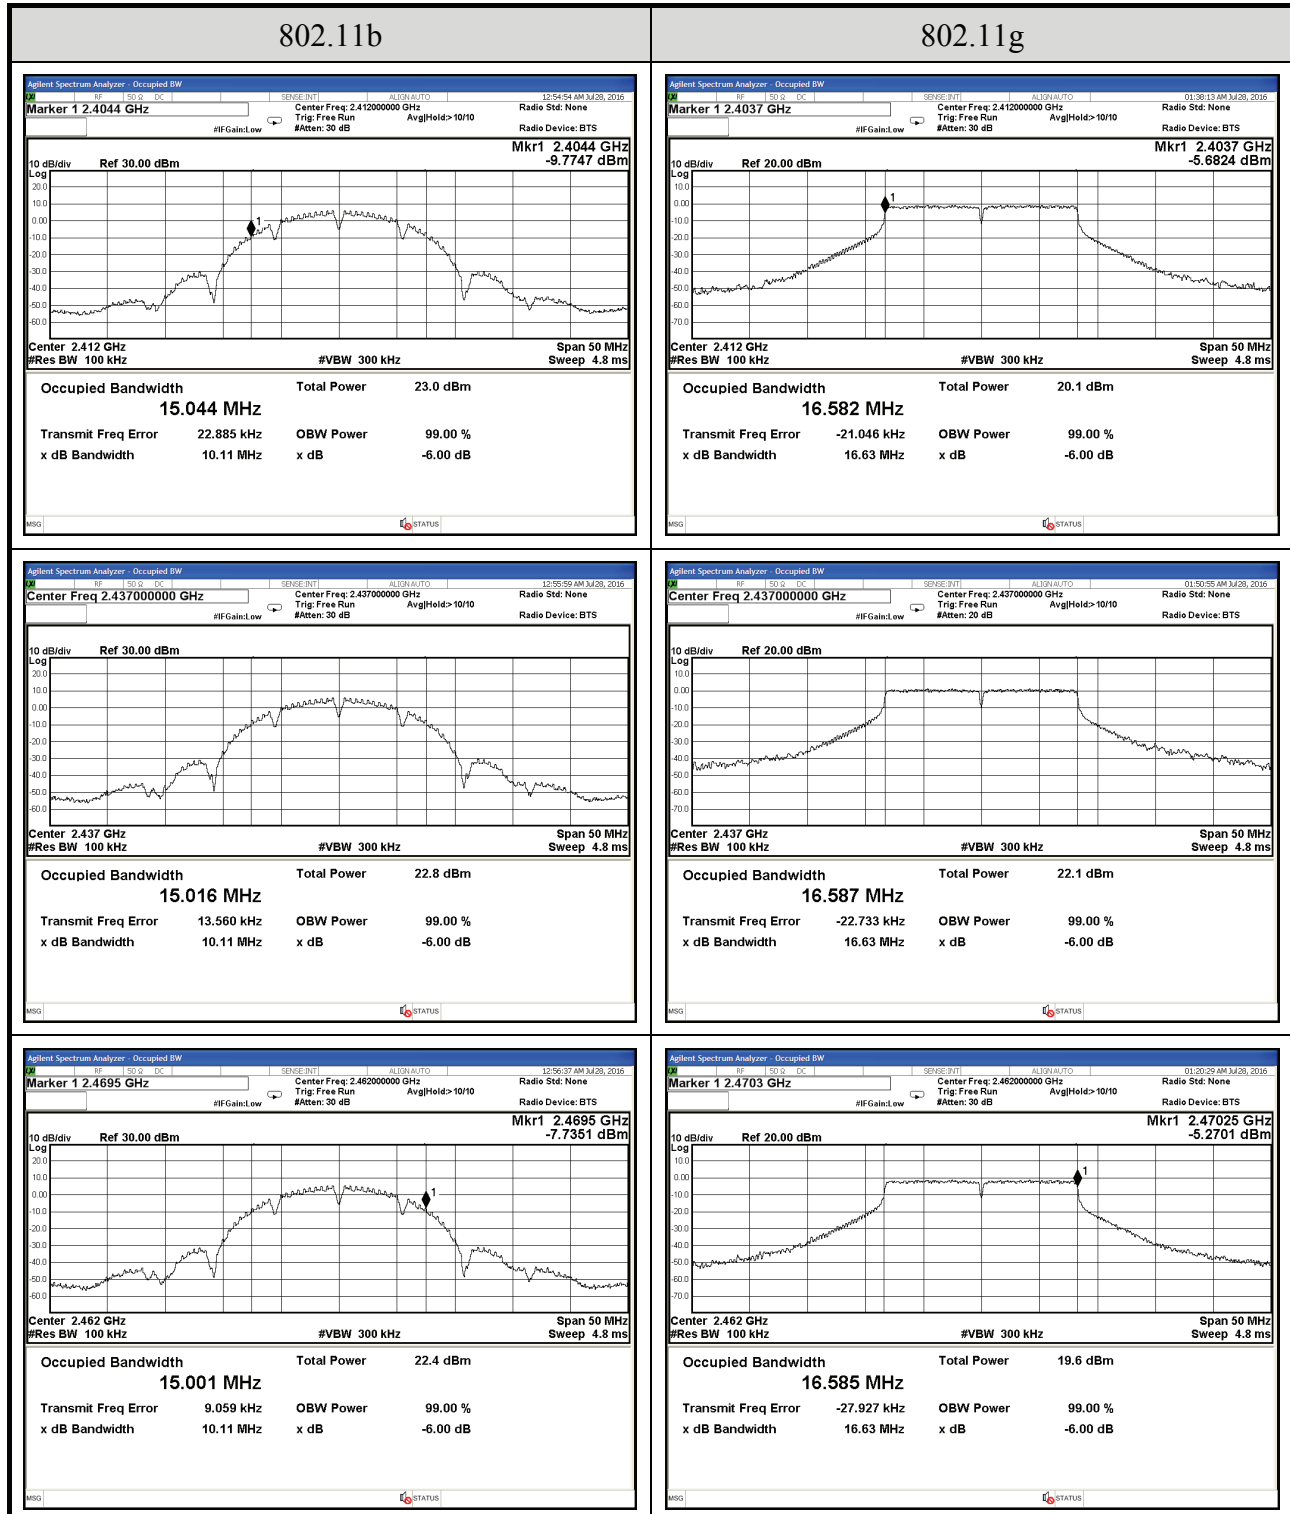

802.11n-HT20

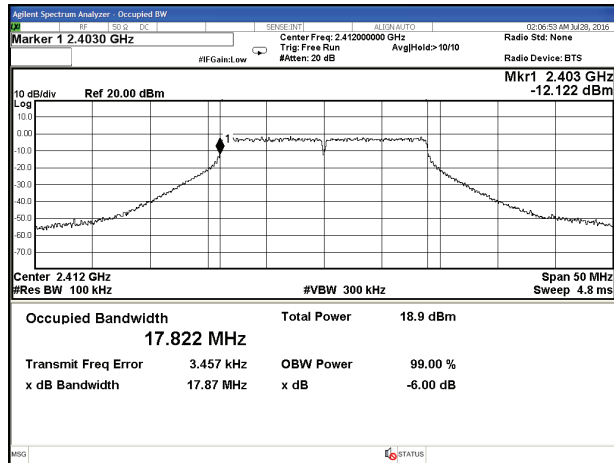


802.11n-HT40

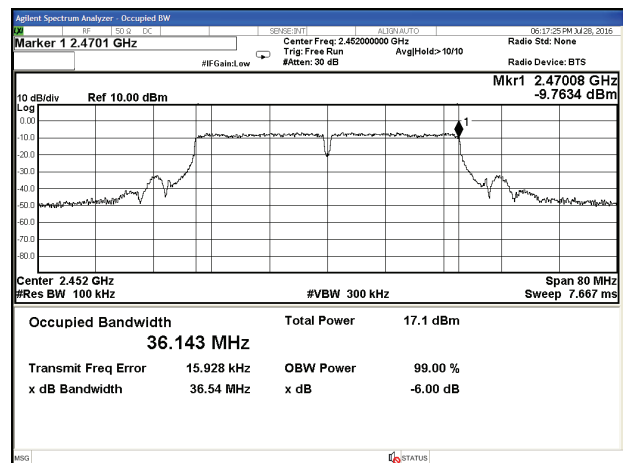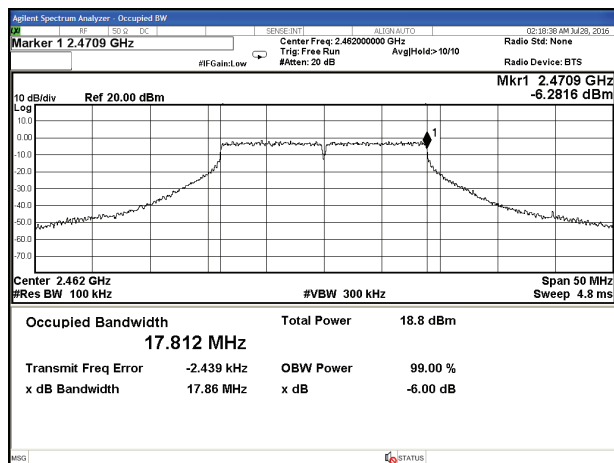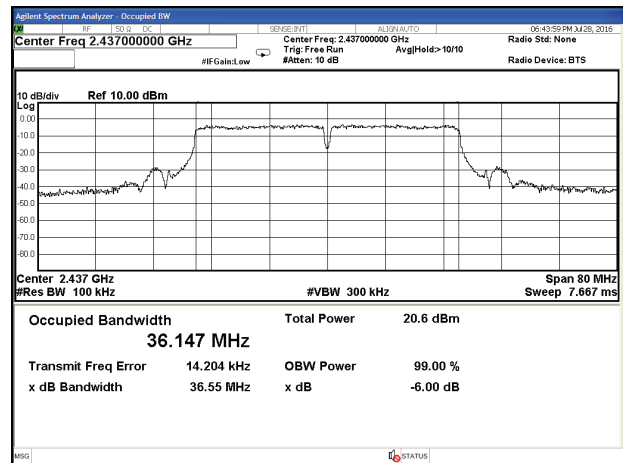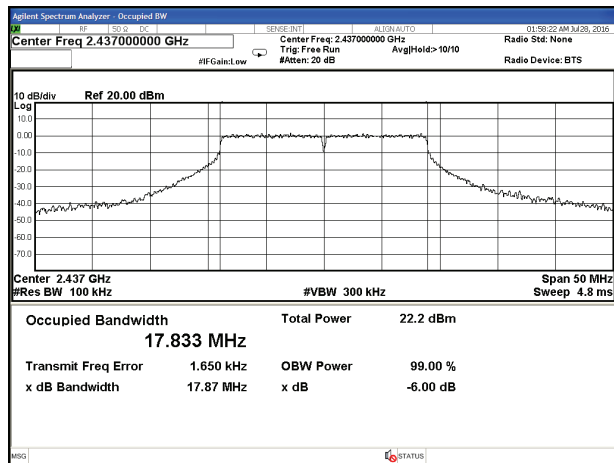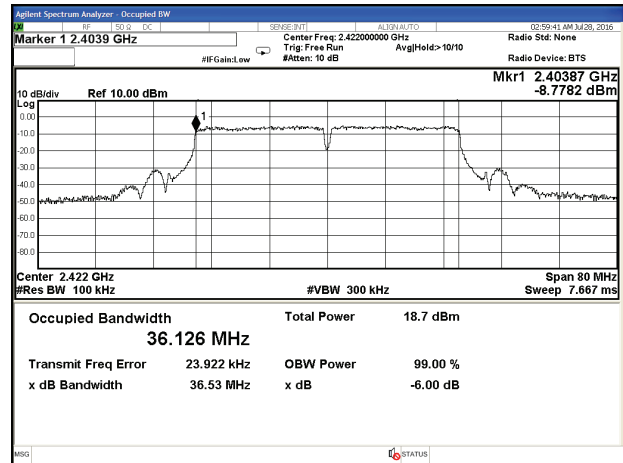

AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

BLE

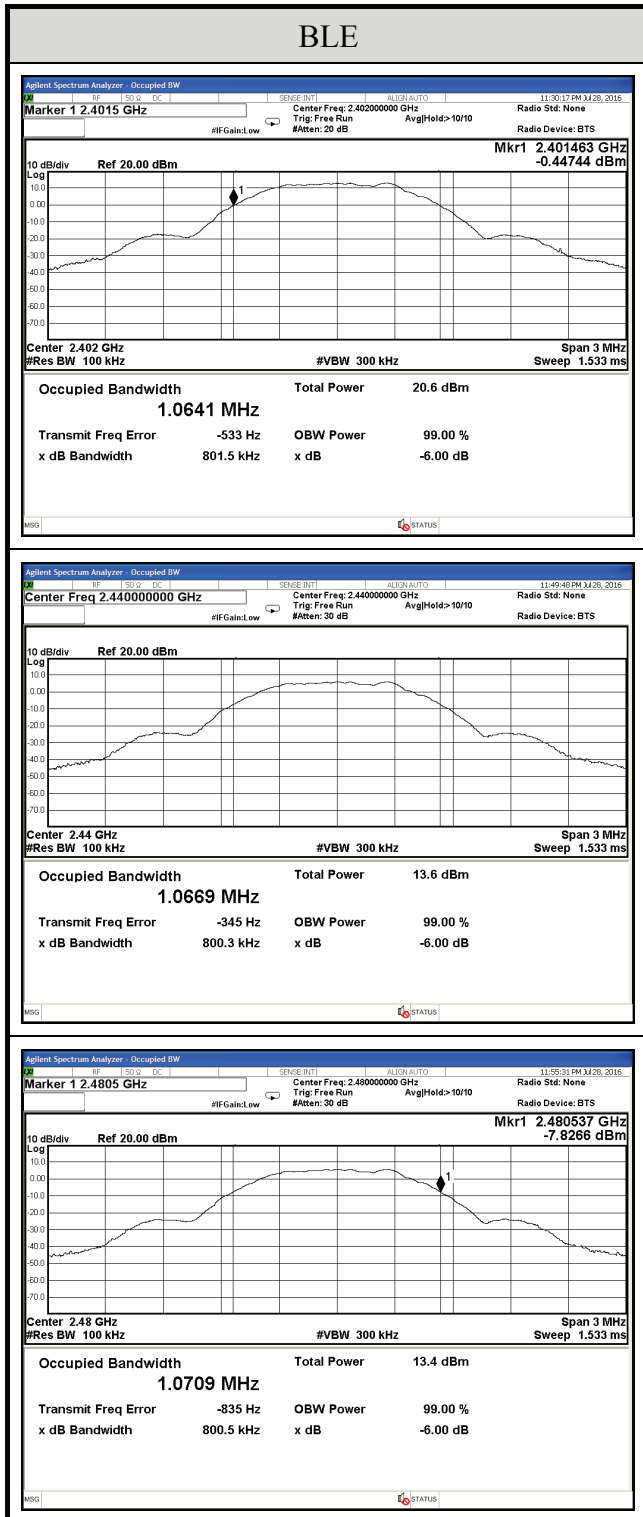

A.2 MAXIMUM PEAK OUTPUT POWER MEASUREMENT

Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	---	Test Voltage	DC 3.7V

A.2.1 Peak Output Power

Modulation Type	Centre Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	
802.11b	2412	18.37	0.068707	< 30dBm (1W)
	2437	18.13	0.065013	
	2462	17.94	0.062230	
802.11g	2412	22.58	0.181134	
	2437	23.29	0.213304	
	2462	22.51	0.178238	
802.11n-HT20	2412	21.36	0.136773	
	2437	23.16	0.207014	
	2462	21.59	0.144212	
802.11n-HT40	2422	21.68	0.147231	
	2437	22.57	0.180717	
	2452	21.51	0.141579	

Note: The results have been included cable loss.

Modulation Type	Centre Frequency (MHz)	MAX Output Power		Limit
		(dBm)	(W)	
BLE	2402	7.875	0.006131	< 30dBm (1W)
	2440	8.298	0.006758	
	2480	8.095	0.006449	

Note: The results have been included cable loss.

AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.2 Average Output Power (Reporting only)

Modulation Type	Centre Frequency (MHz)	Average Output Power		Limit
		(dBm)	(W)	
802.11b	2412	16.45	0.044157	< 30dBm (1W)
	2437	16.37	0.043351	
	2462	16.02	0.039994	
802.11g	2412	14.36	0.027290	
	2437	16.27	0.042364	
	2462	14.22	0.026424	
802.11n-HT20	2412	13.22	0.020989	
	2437	16.22	0.041879	
	2462	13.31	0.021429	
802.11n-HT40	2422	13.27	0.021232	
	2437	14.75	0.029854	
	2452	13.01	0.019999	


Note: The results have been included cable loss.

A.2.3 Measurement Plots

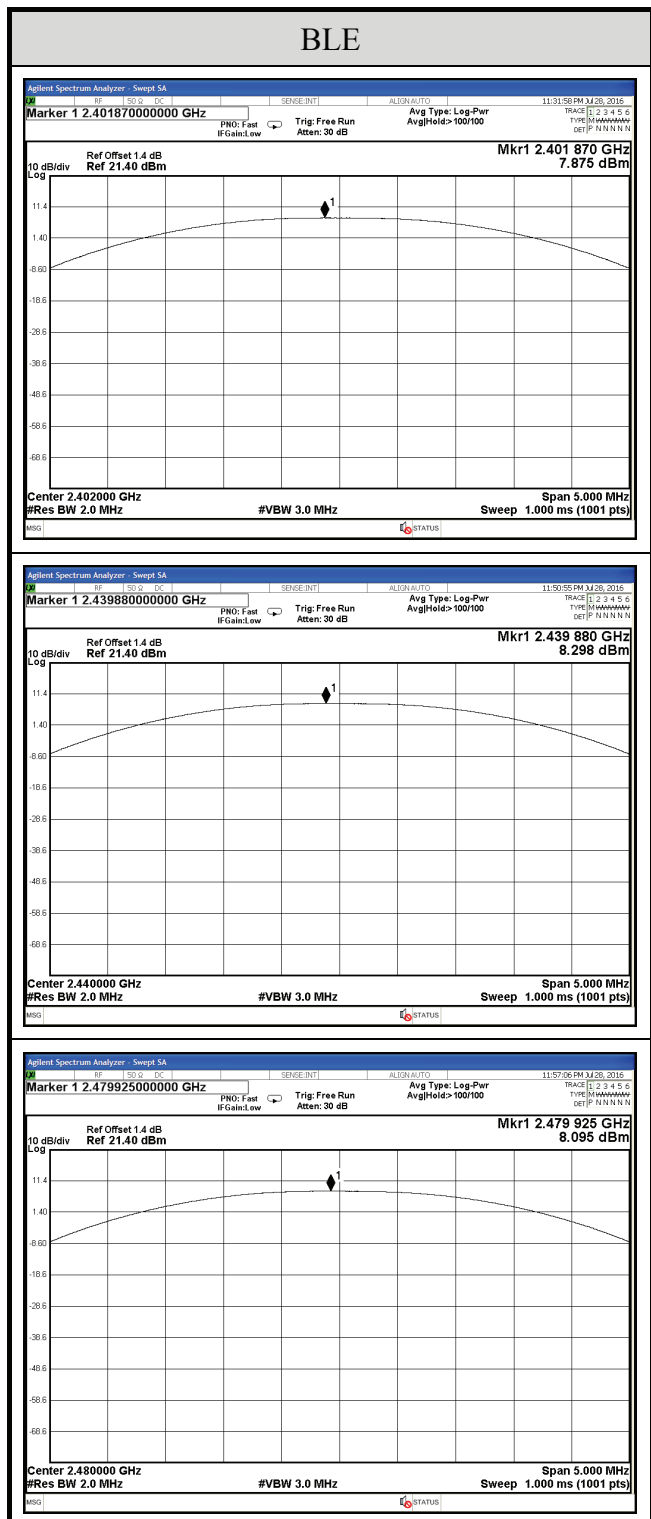


A.3 EMISSION LIMITATIONS MEASUREMENT


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1dB	Test Voltage	DC 3.7V
Mode	802.11b	Frequency	TX 2412MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)		0	

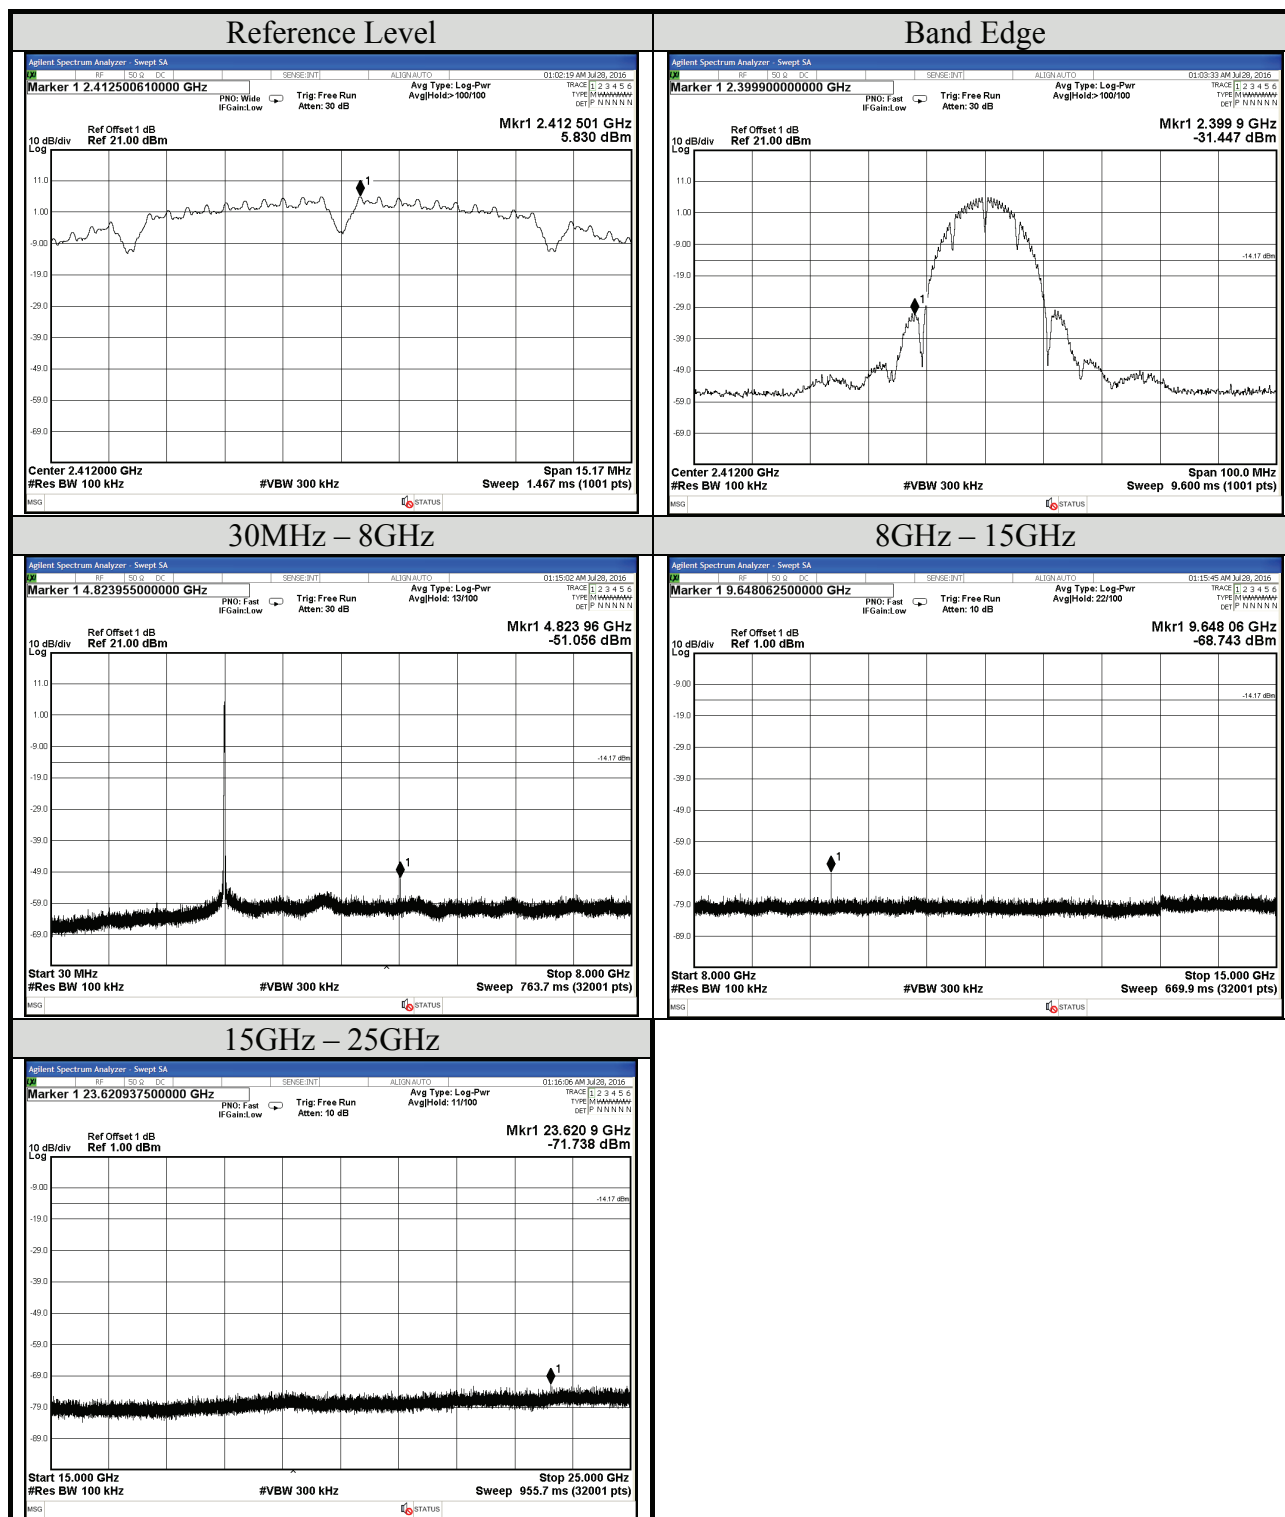


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1dB	Test Voltage	DC 3.3V
Mode	802.11b	Frequency	TX 2437MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

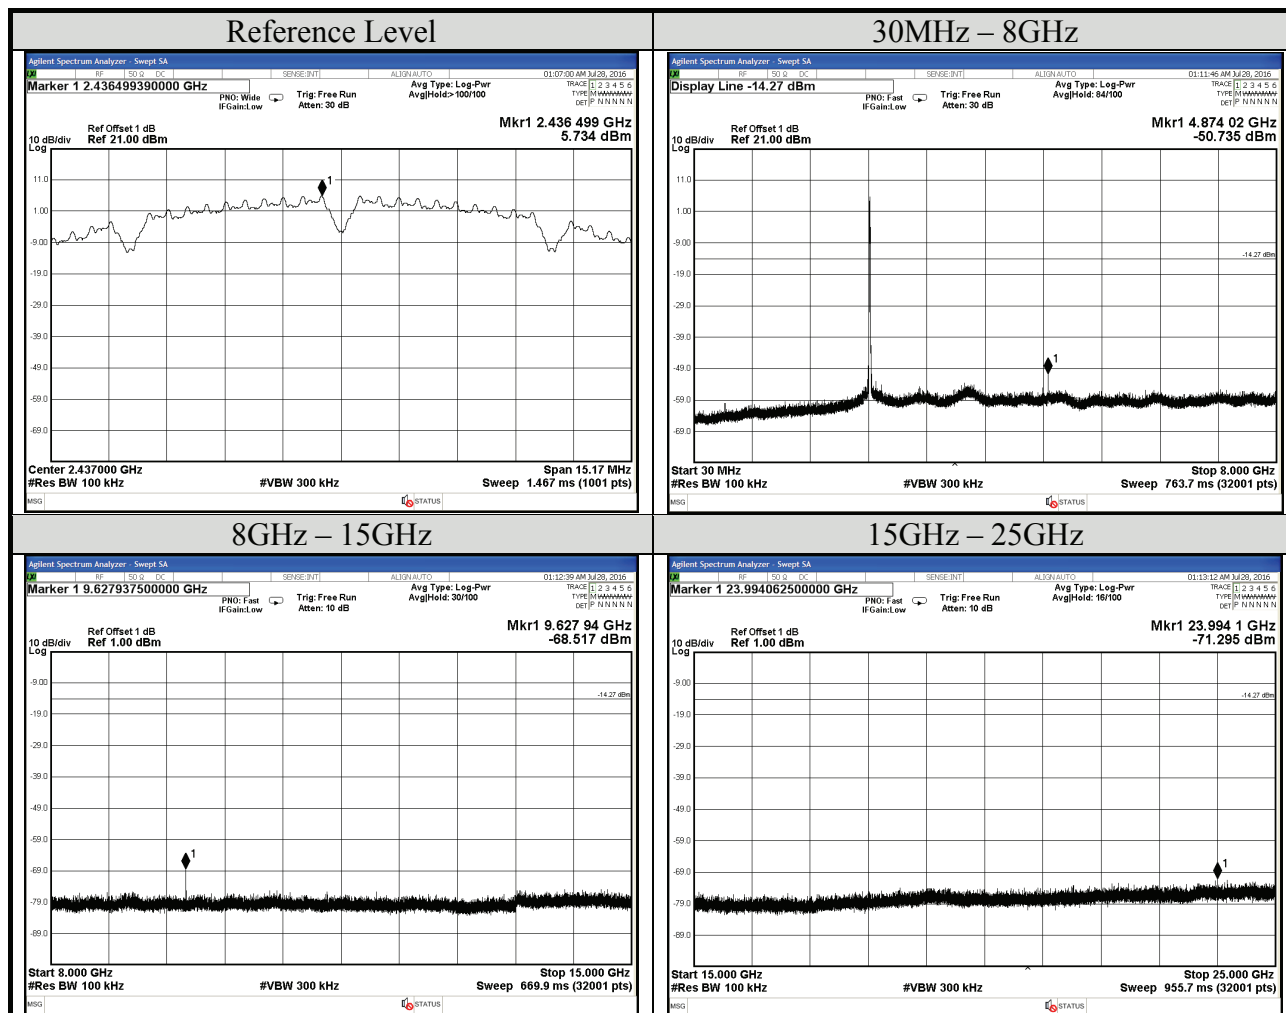

Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1dB	Test Voltage	DC 3.7V
Mode	802.11b	Frequency	TX 2462MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

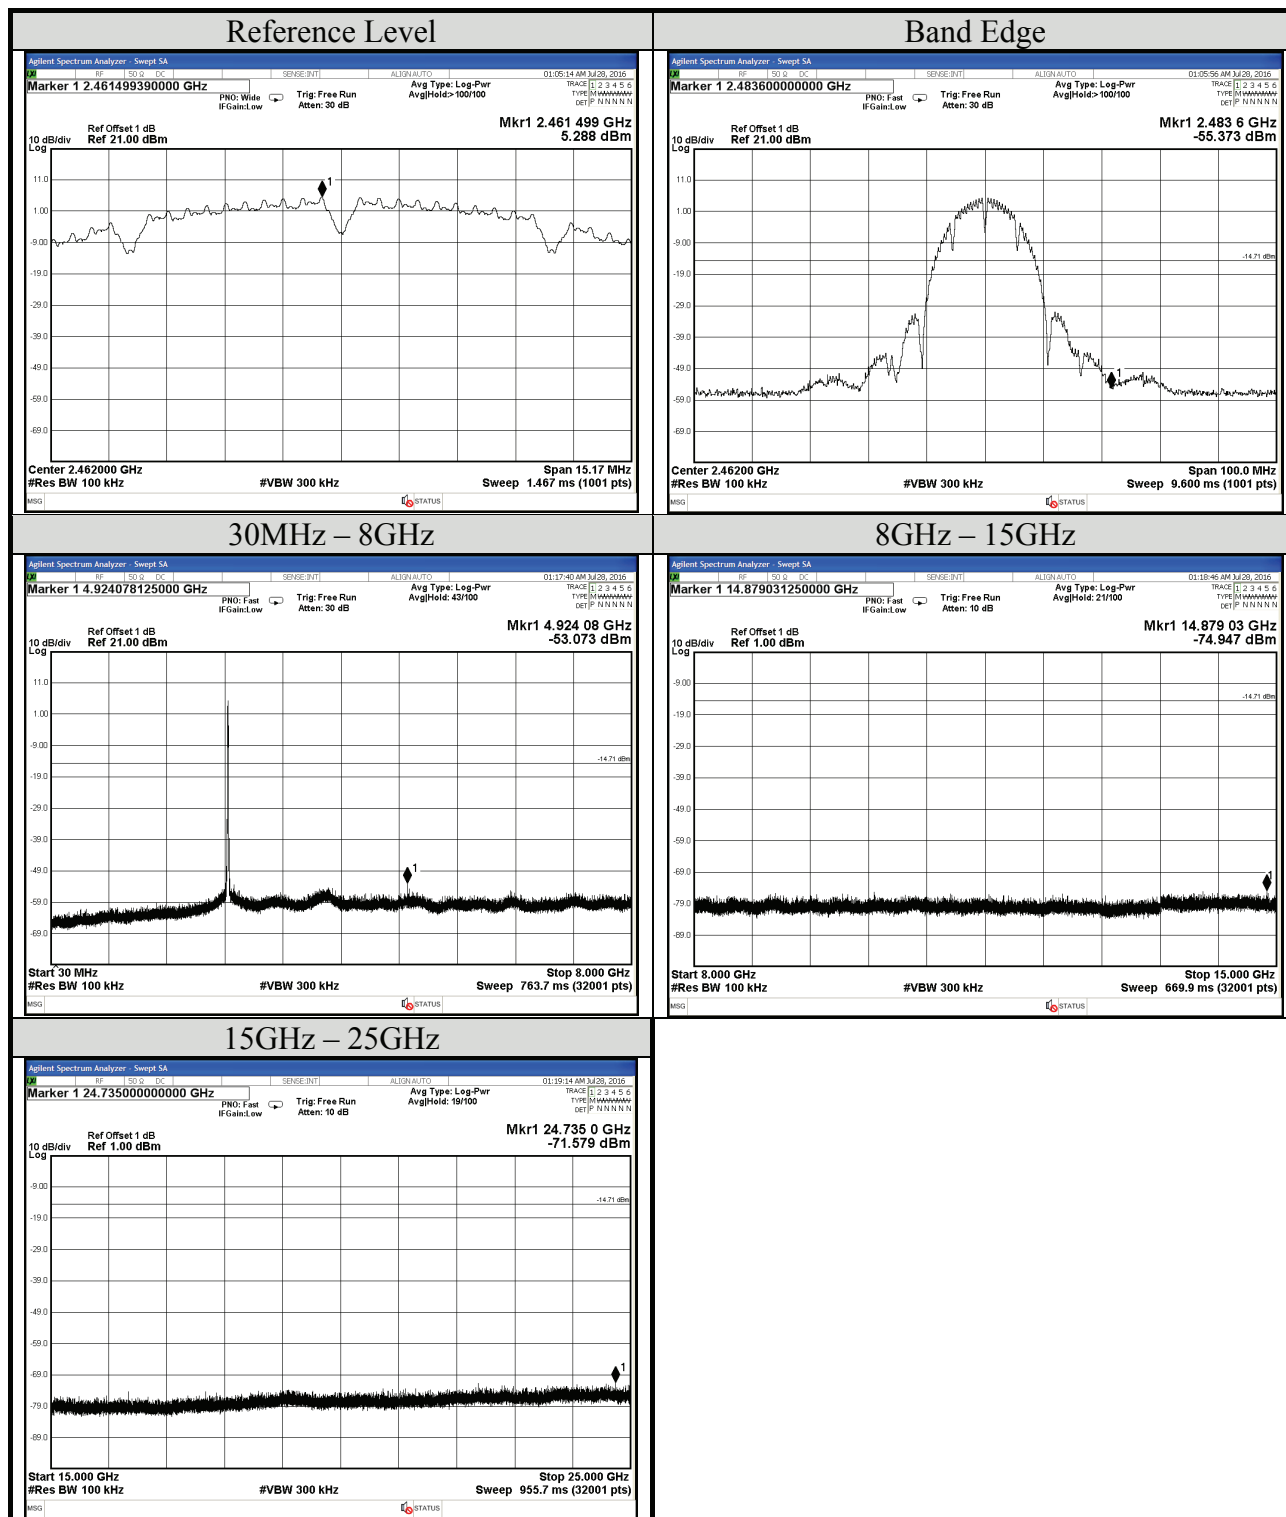


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1dB	Test Voltage	DC 3.7V
Mode	802.11g	Frequency	TX 2412MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

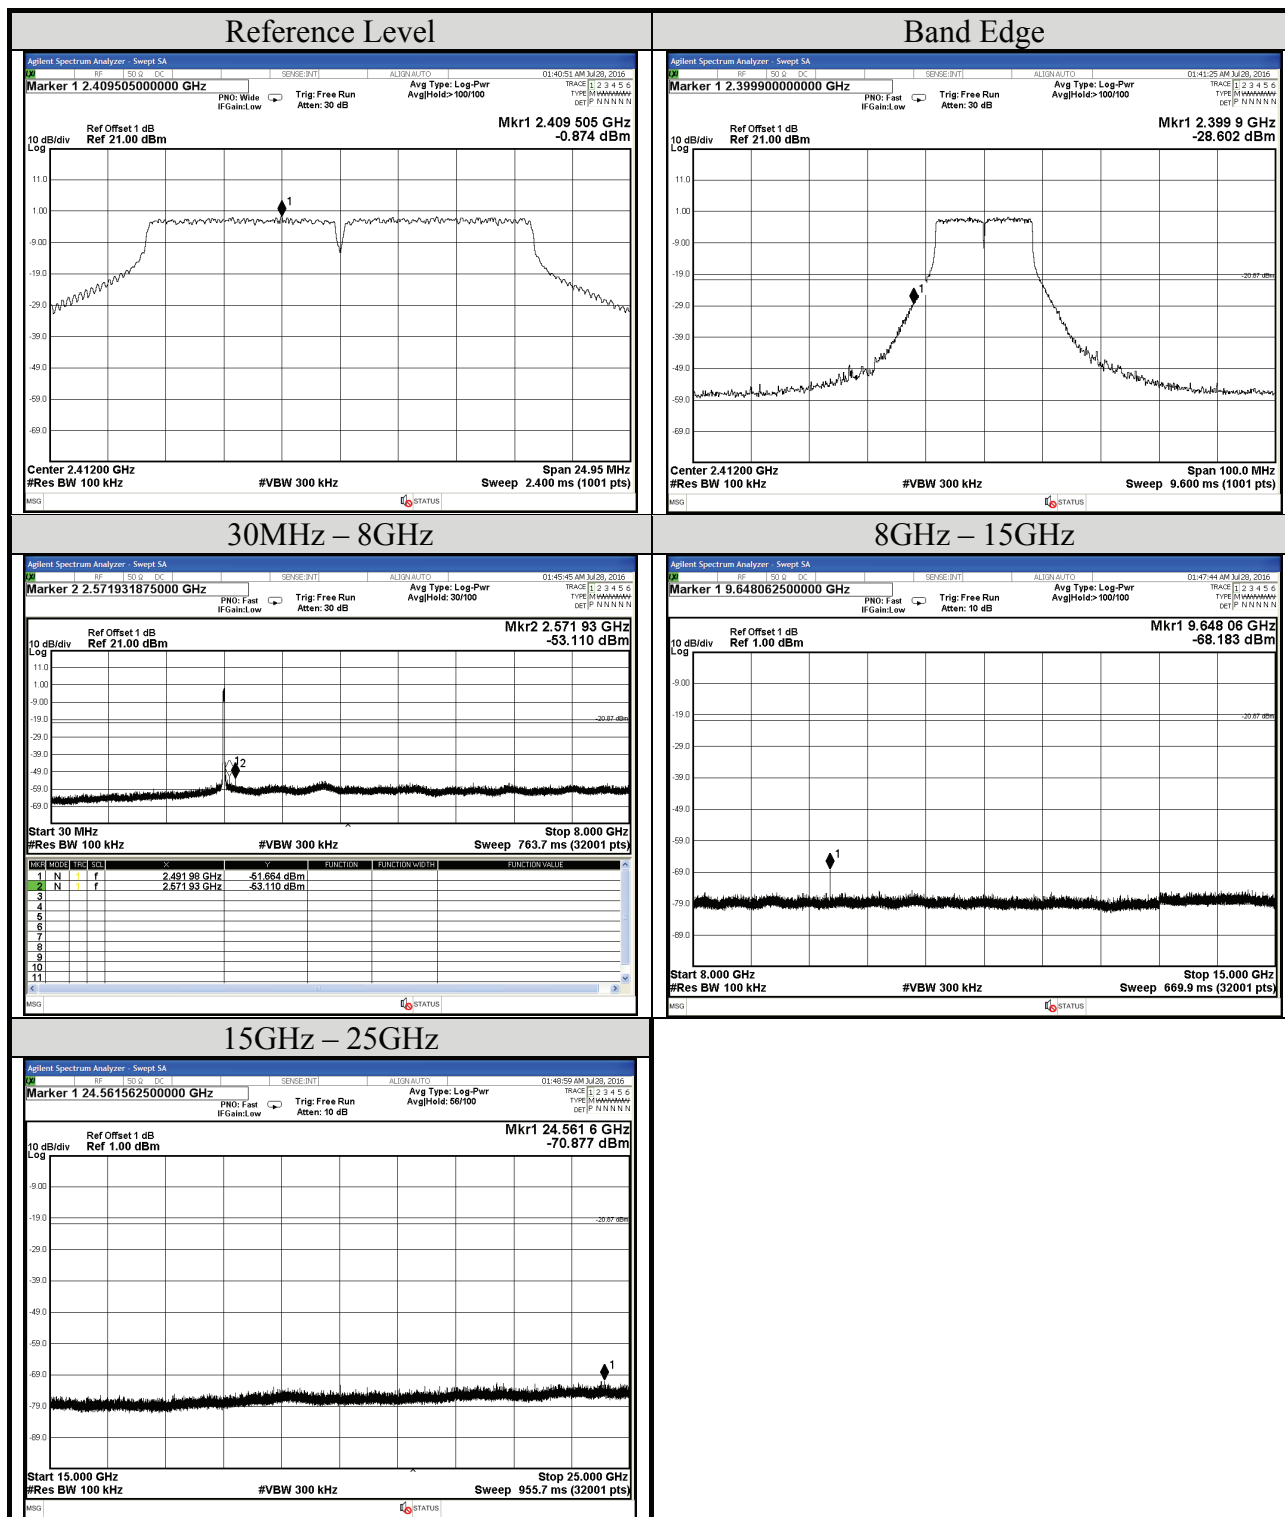


AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1dB	Test Voltage	DC 3.7V
Mode	802.11g	Frequency	TX 2437MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

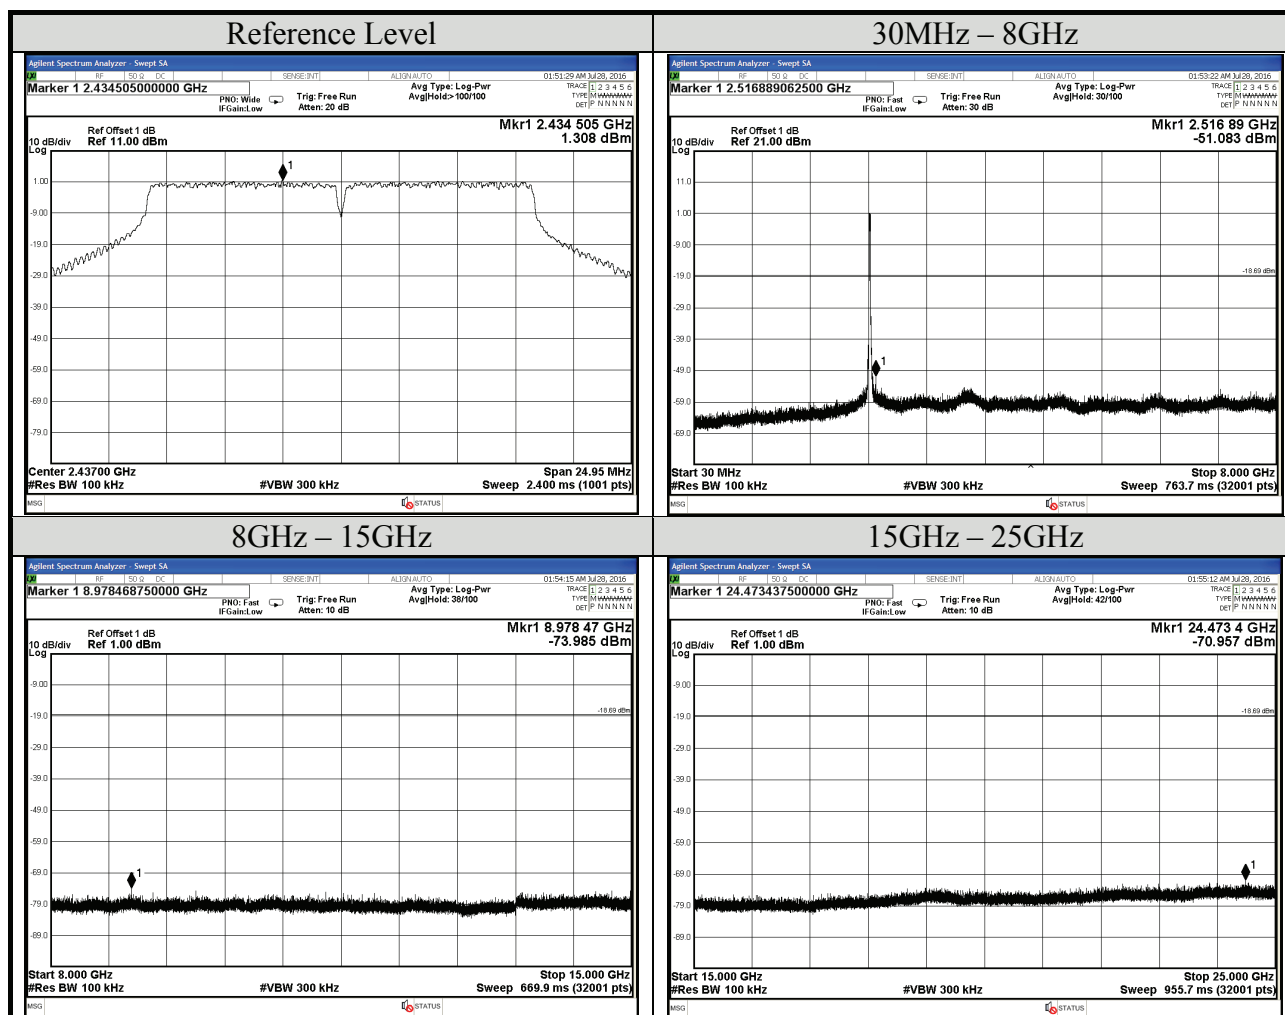


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1dB	Test Voltage	DC 3.7V
Mode	802.11g	Frequency	TX 2462MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

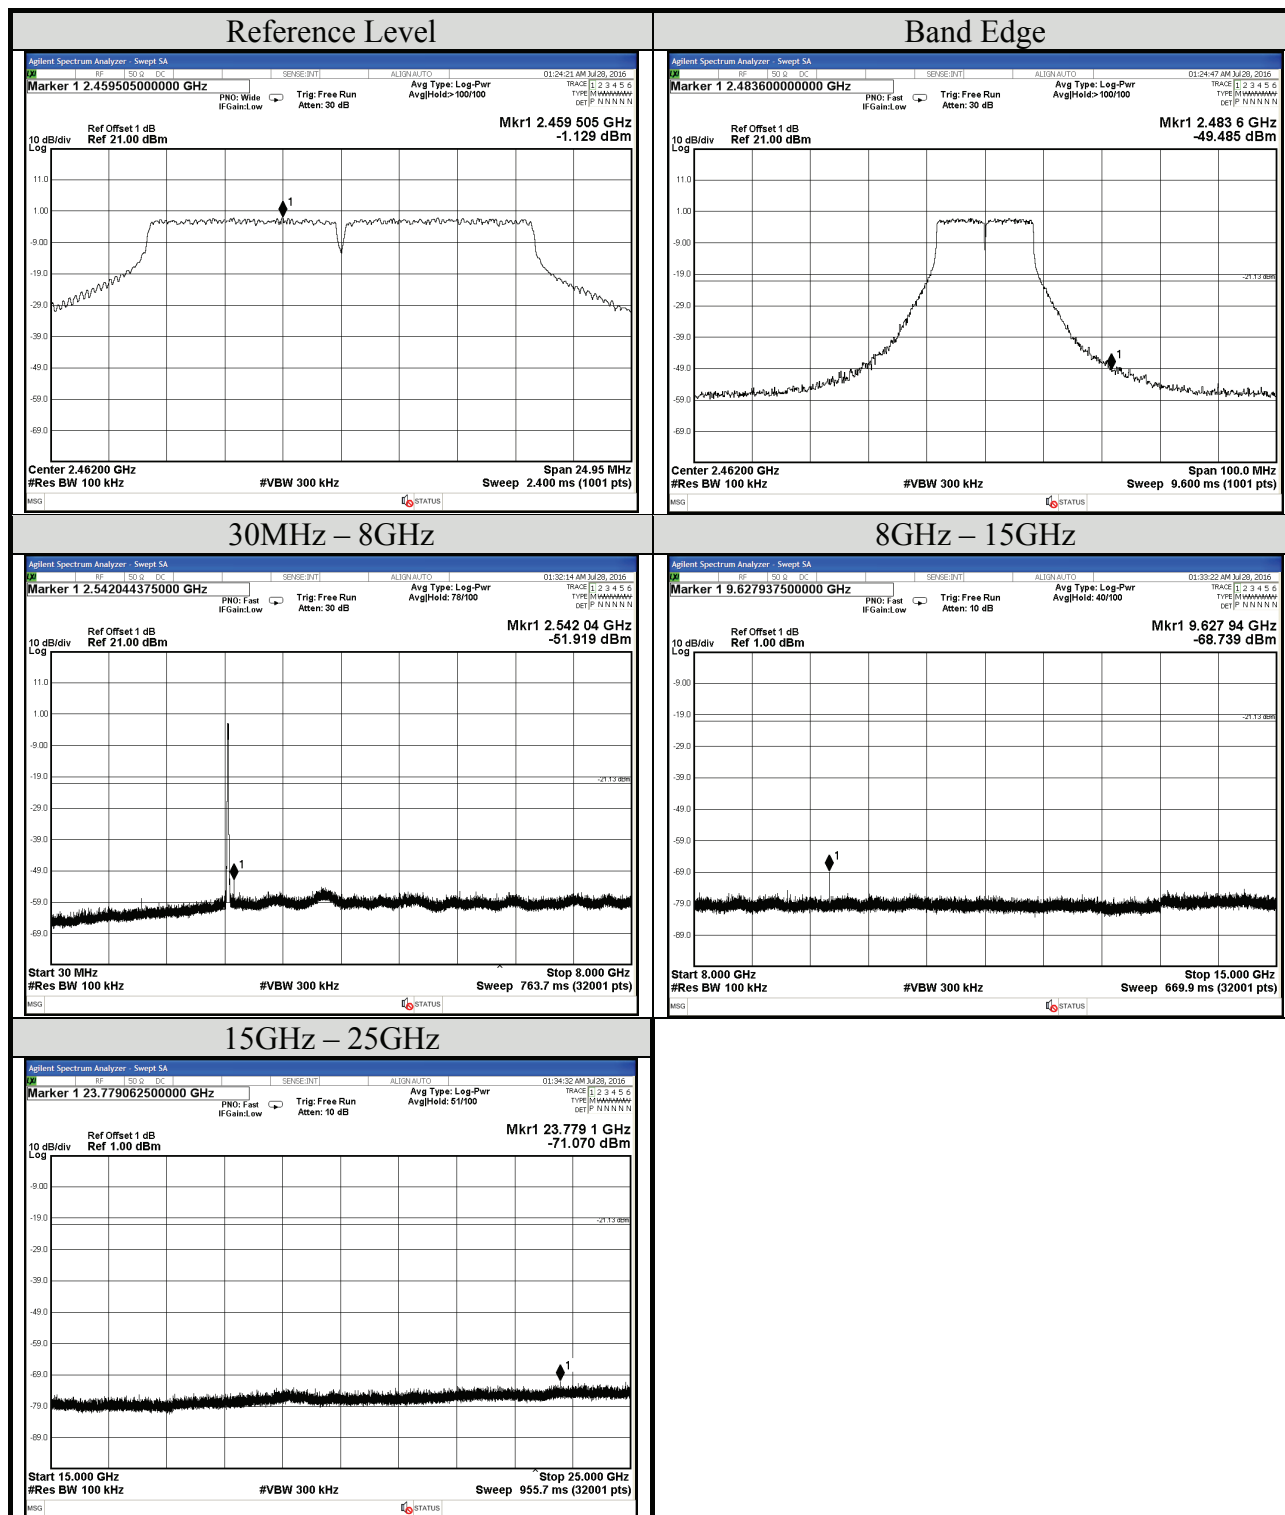

AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1dB	Test Voltage	DC 3.7V
Mode	802.11n-HT20	Frequency	TX 2412MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

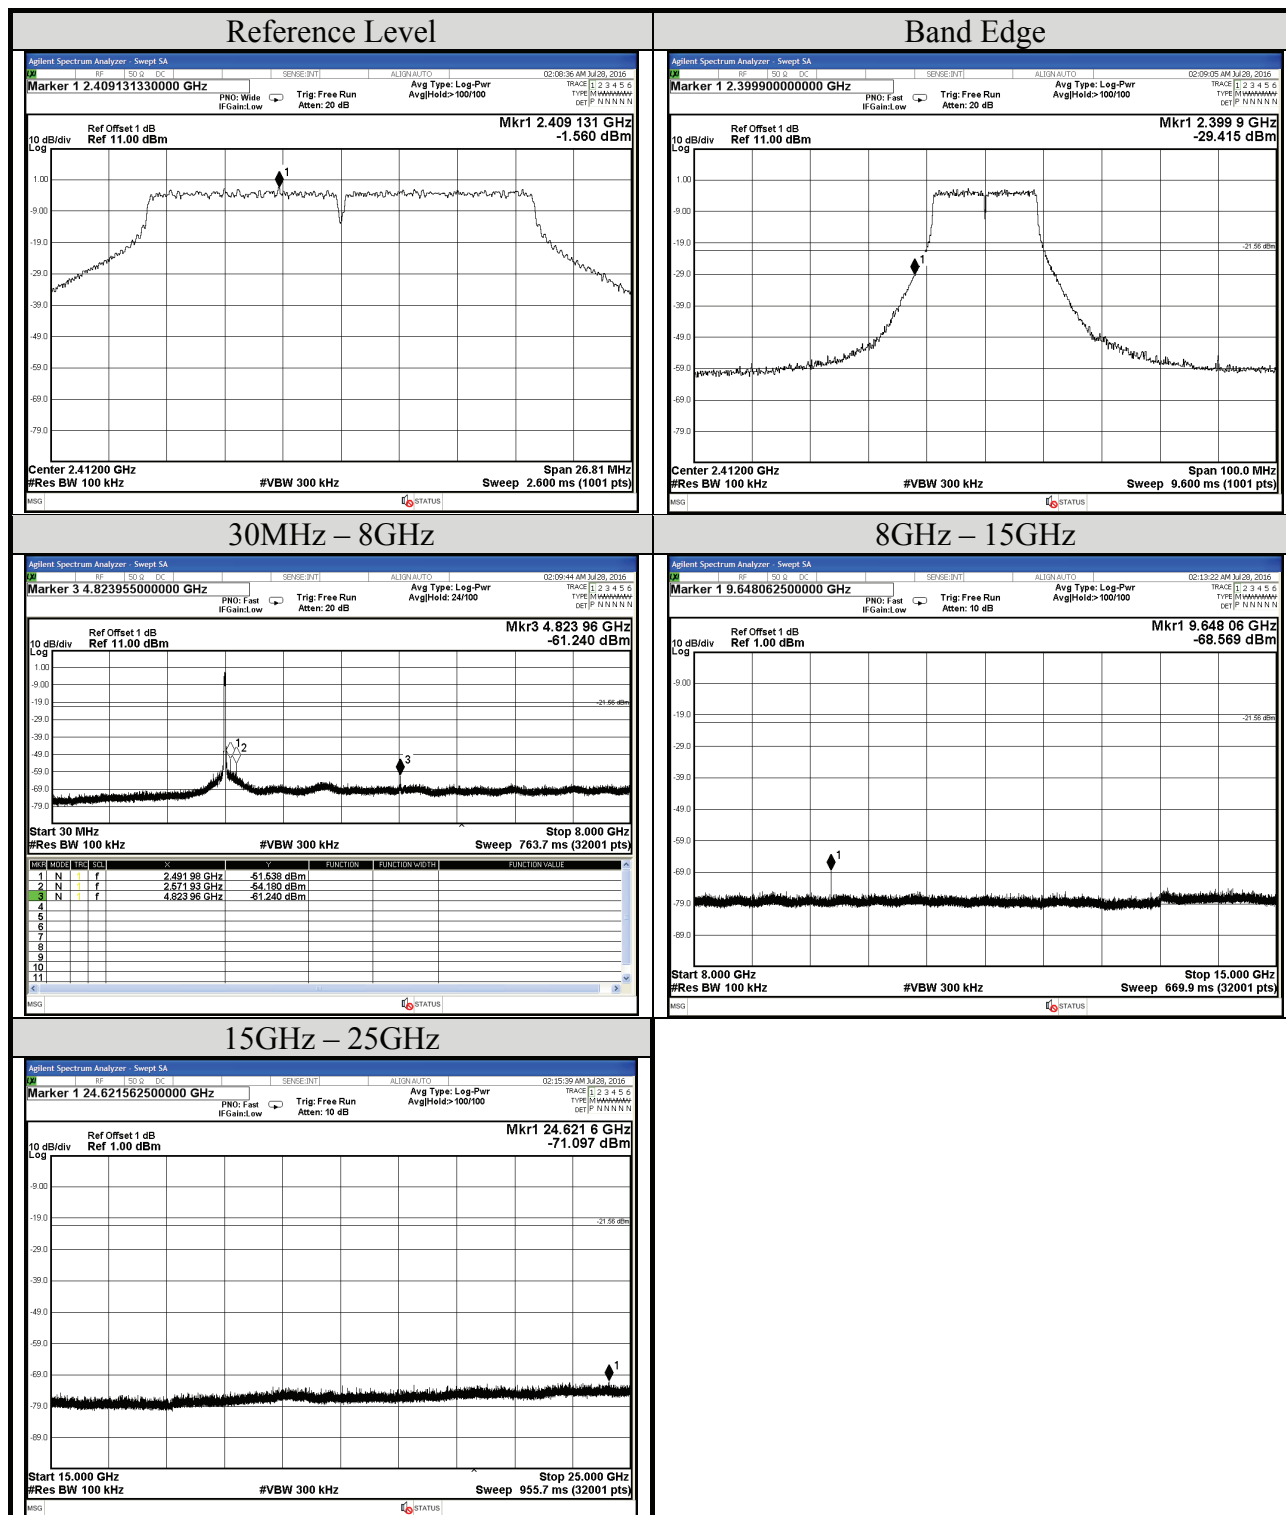

AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1dB	Test Voltage	DC 3.7V
Mode	802.11n-HT20	Frequency	TX 2437MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

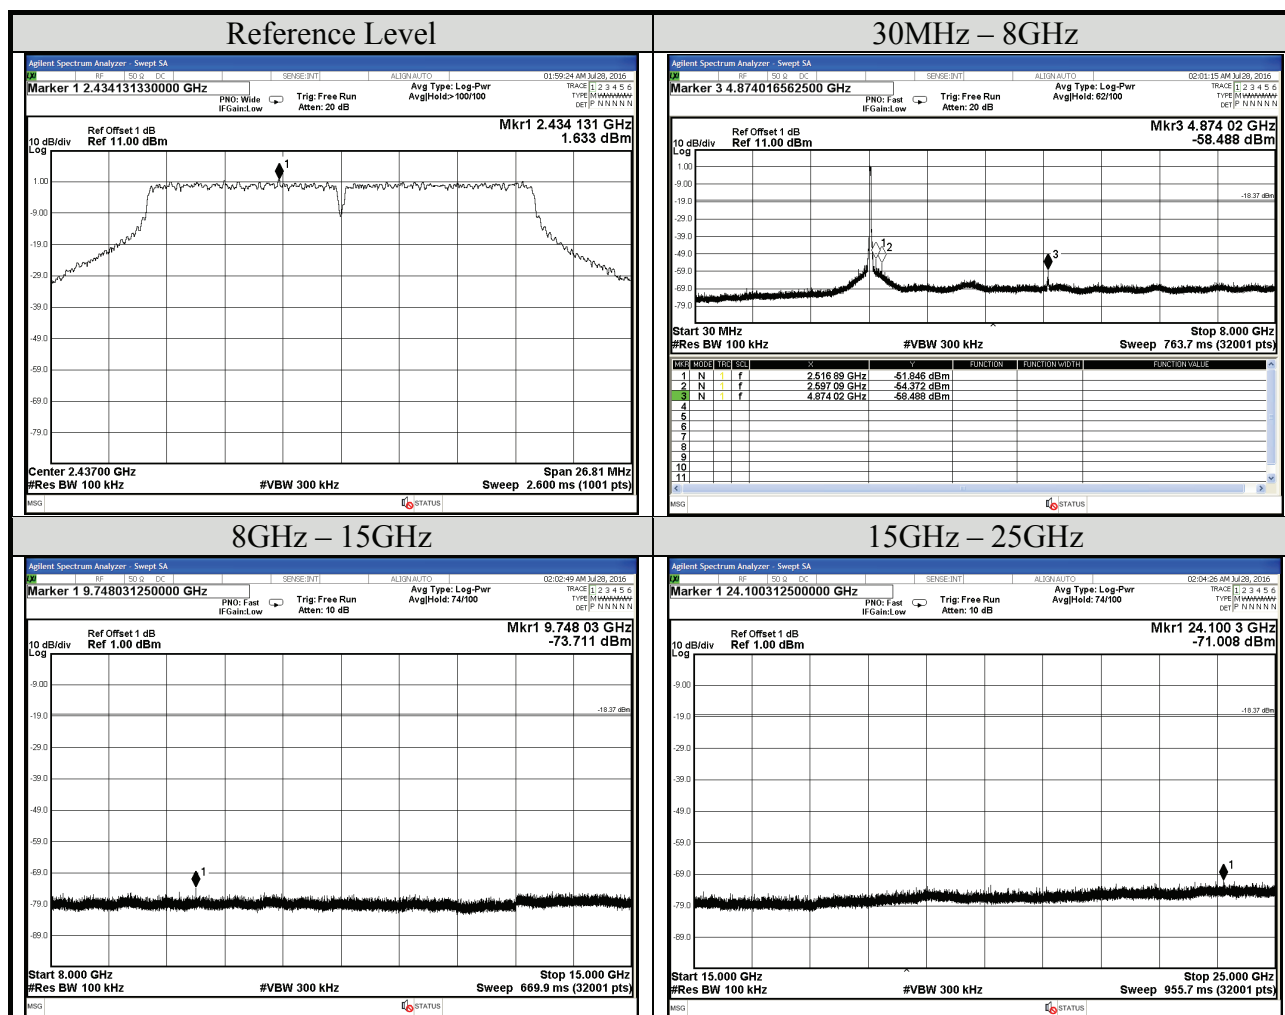


AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1dB	Test Voltage	DC 3.7V
Mode	802.11n-HT20	Frequency	TX 2462MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

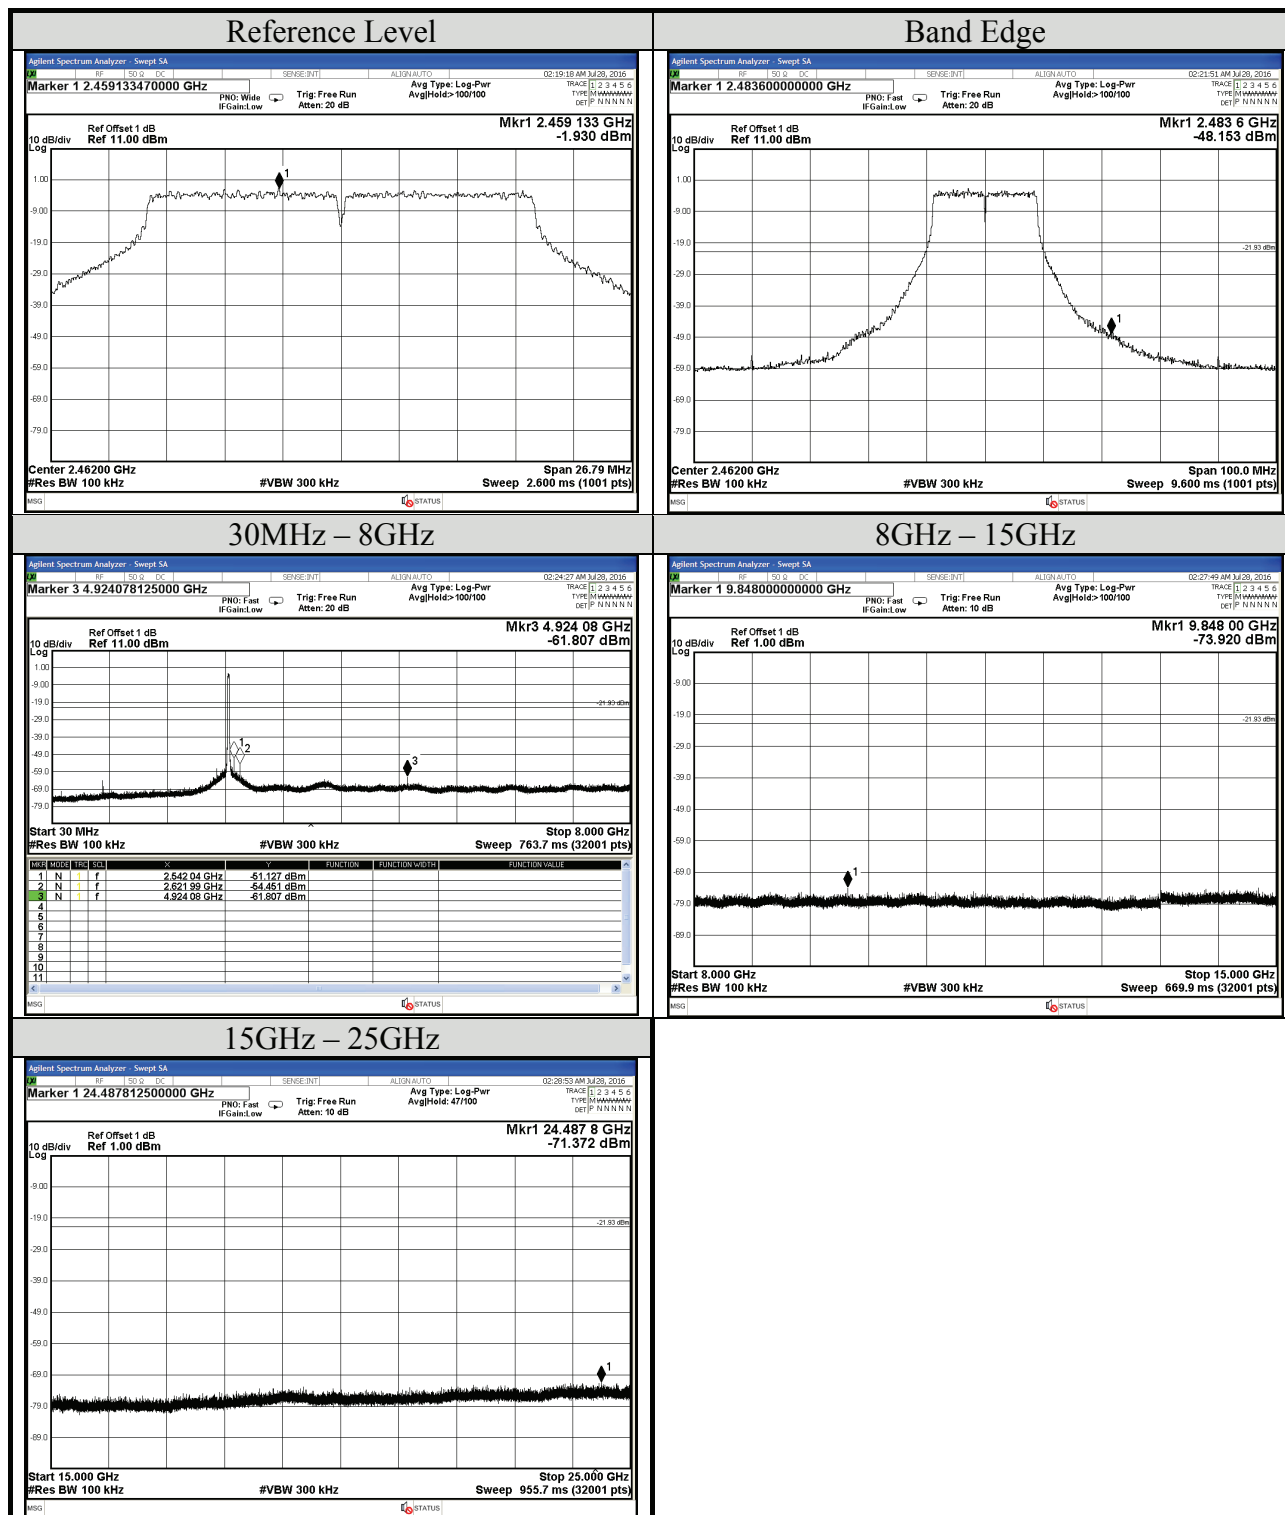


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1.4dB	Test Voltage	DC 3.7V
Mode	802.11n-HT40	Frequency	TX 2422MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

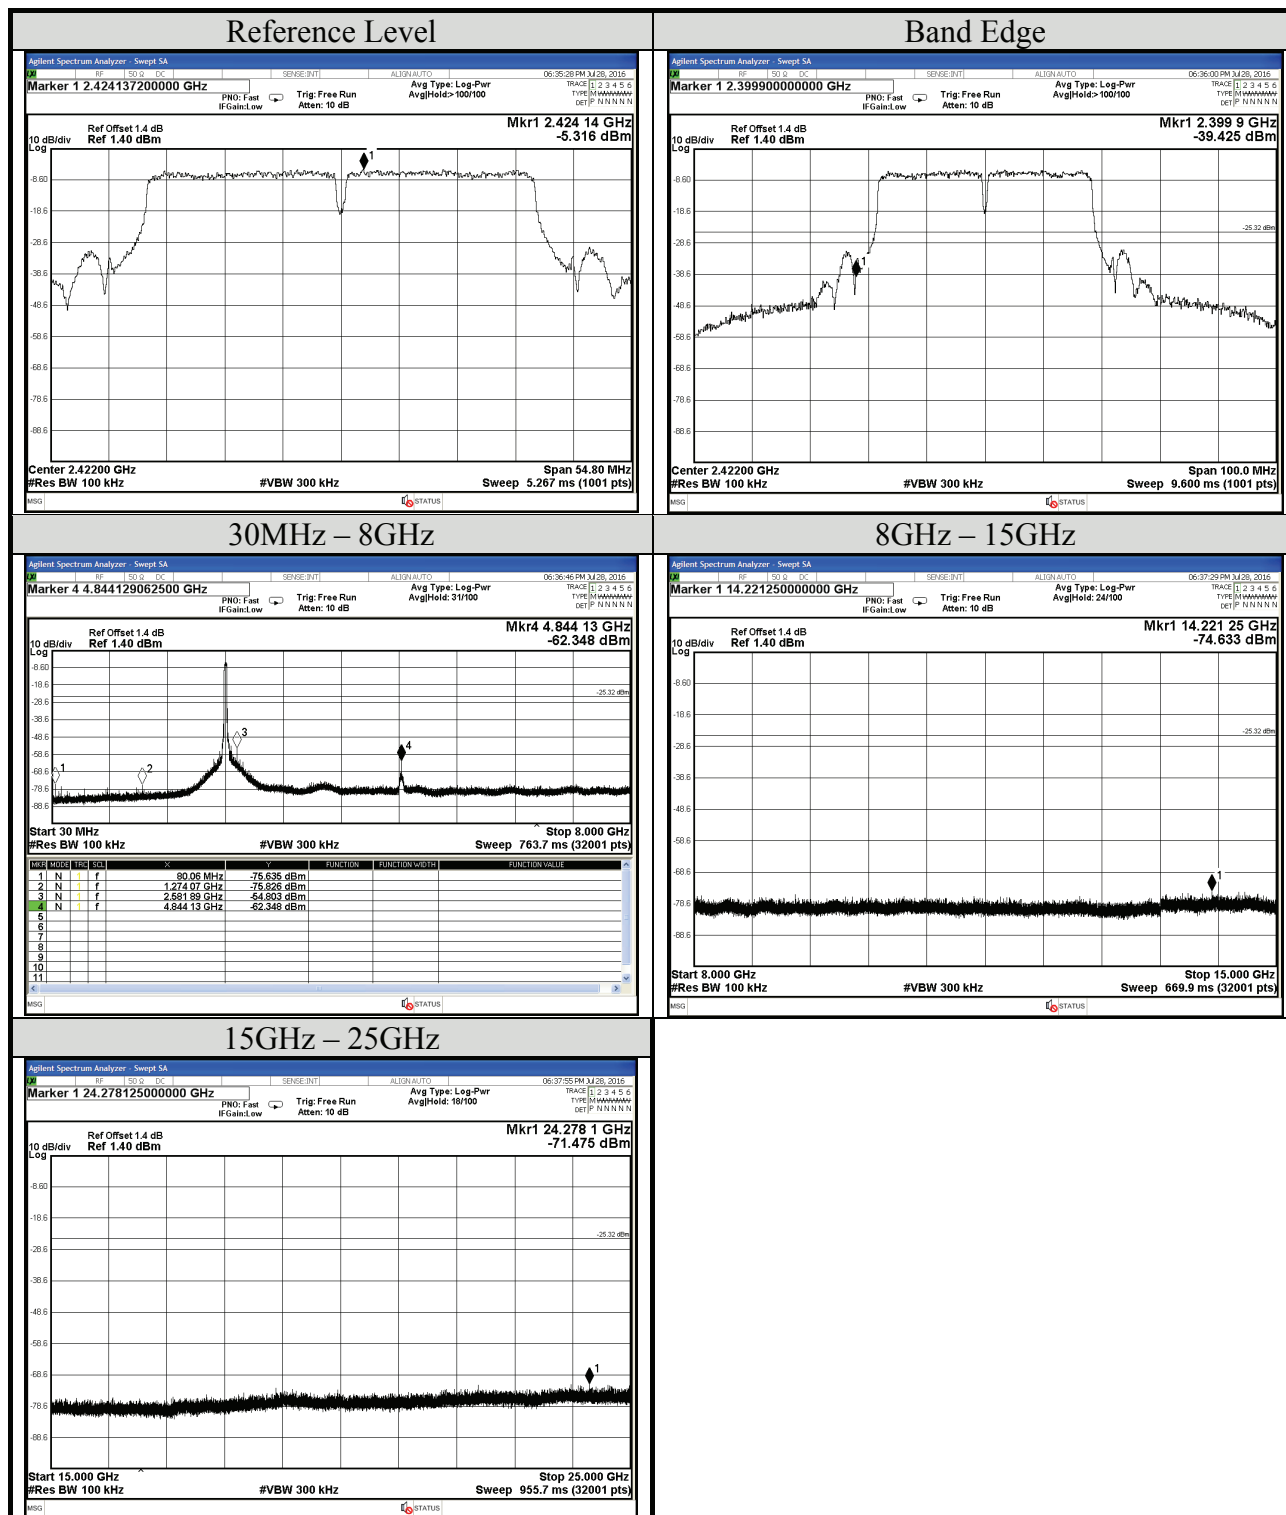


AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1.4dB	Test Voltage	DC 3.7V
Mode	802.11n-HT40	Frequency	TX 2437MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

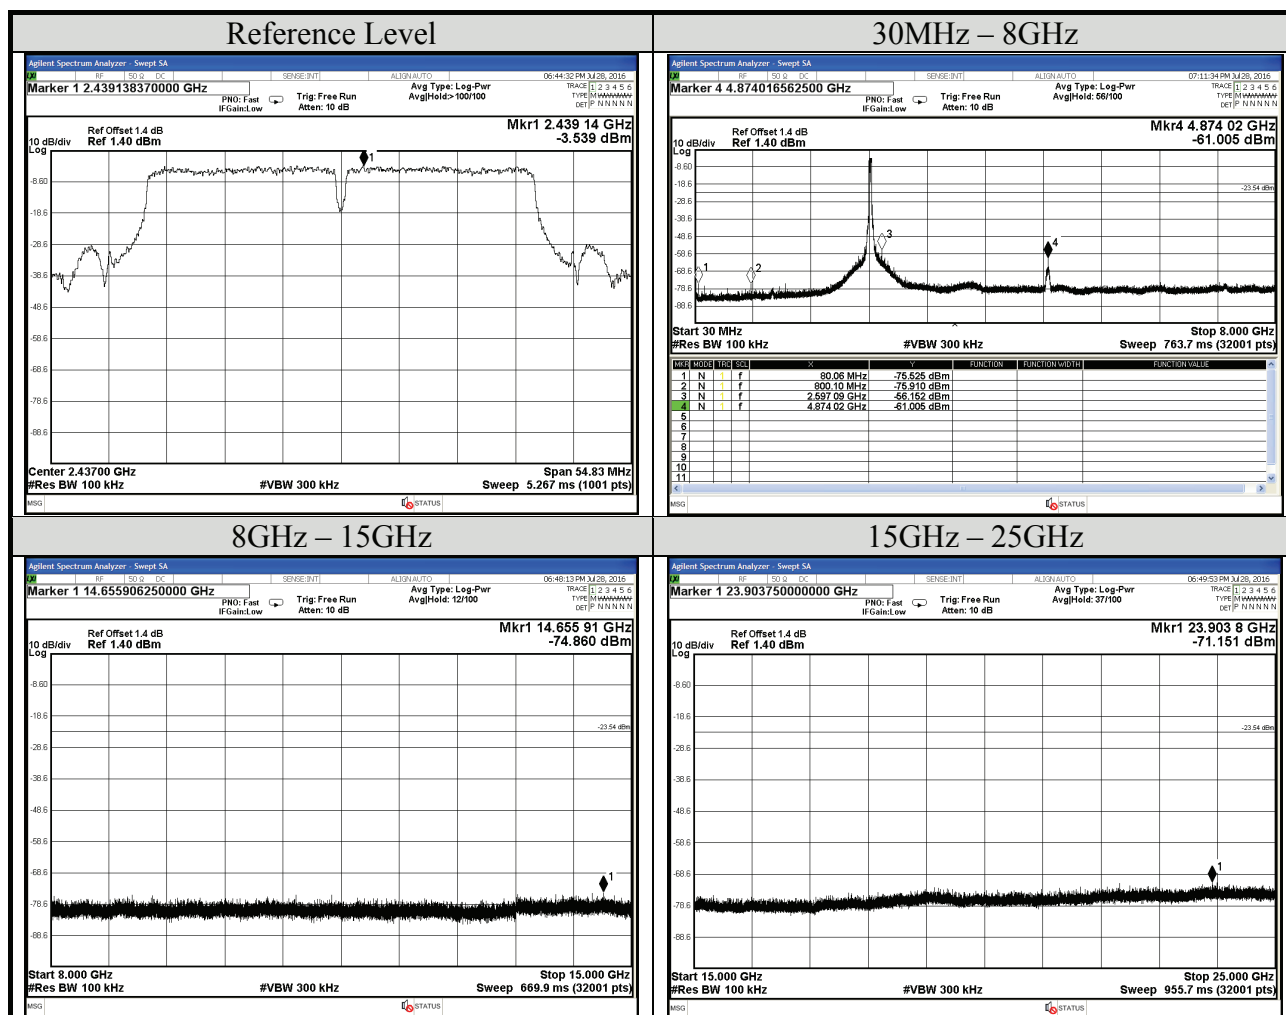

Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1.4dB	Test Voltage	DC 3.7V
Mode	802.11n-HT40	Frequency	TX 2452MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

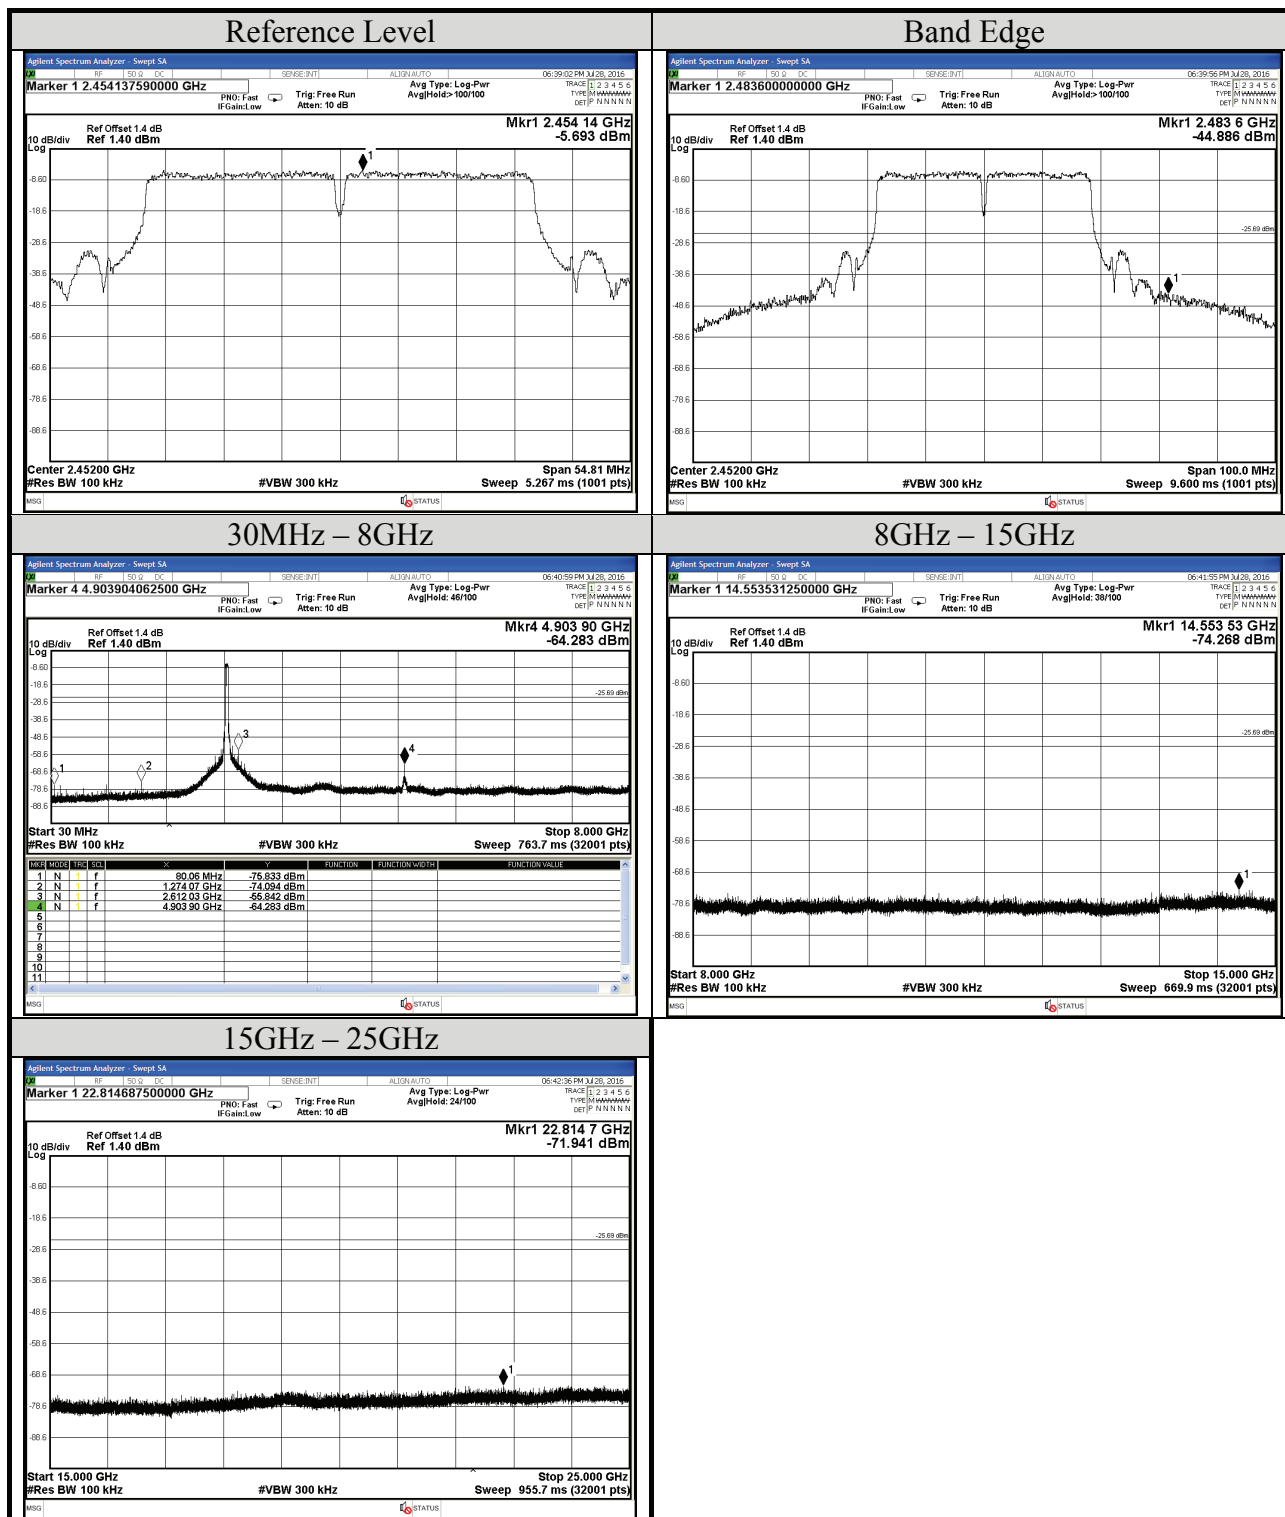


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1.4dB	Test Voltage	DC 3.7V
Mode	BLE	Frequency	TX 2402MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)	N/A		

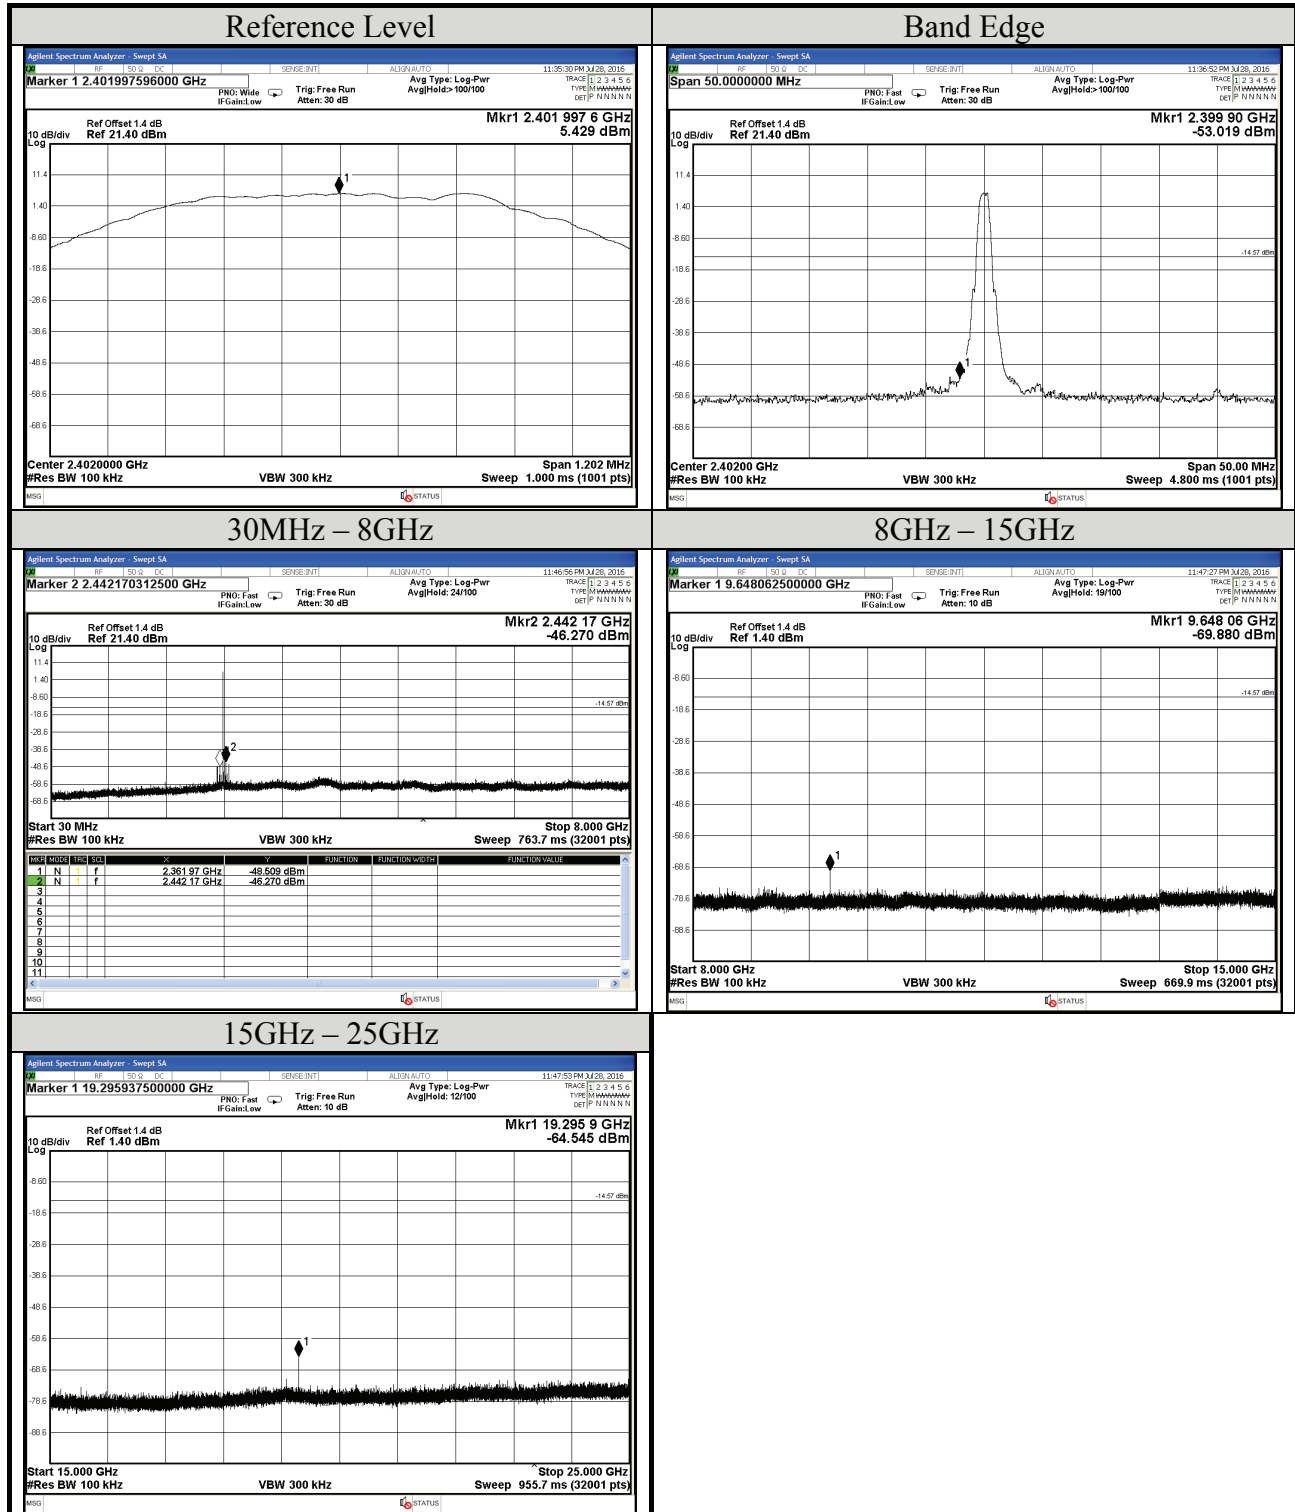


AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1.4dB	Test Voltage	DC 3.3V
Mode	BLE	Frequency	TX 2440MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		N/A

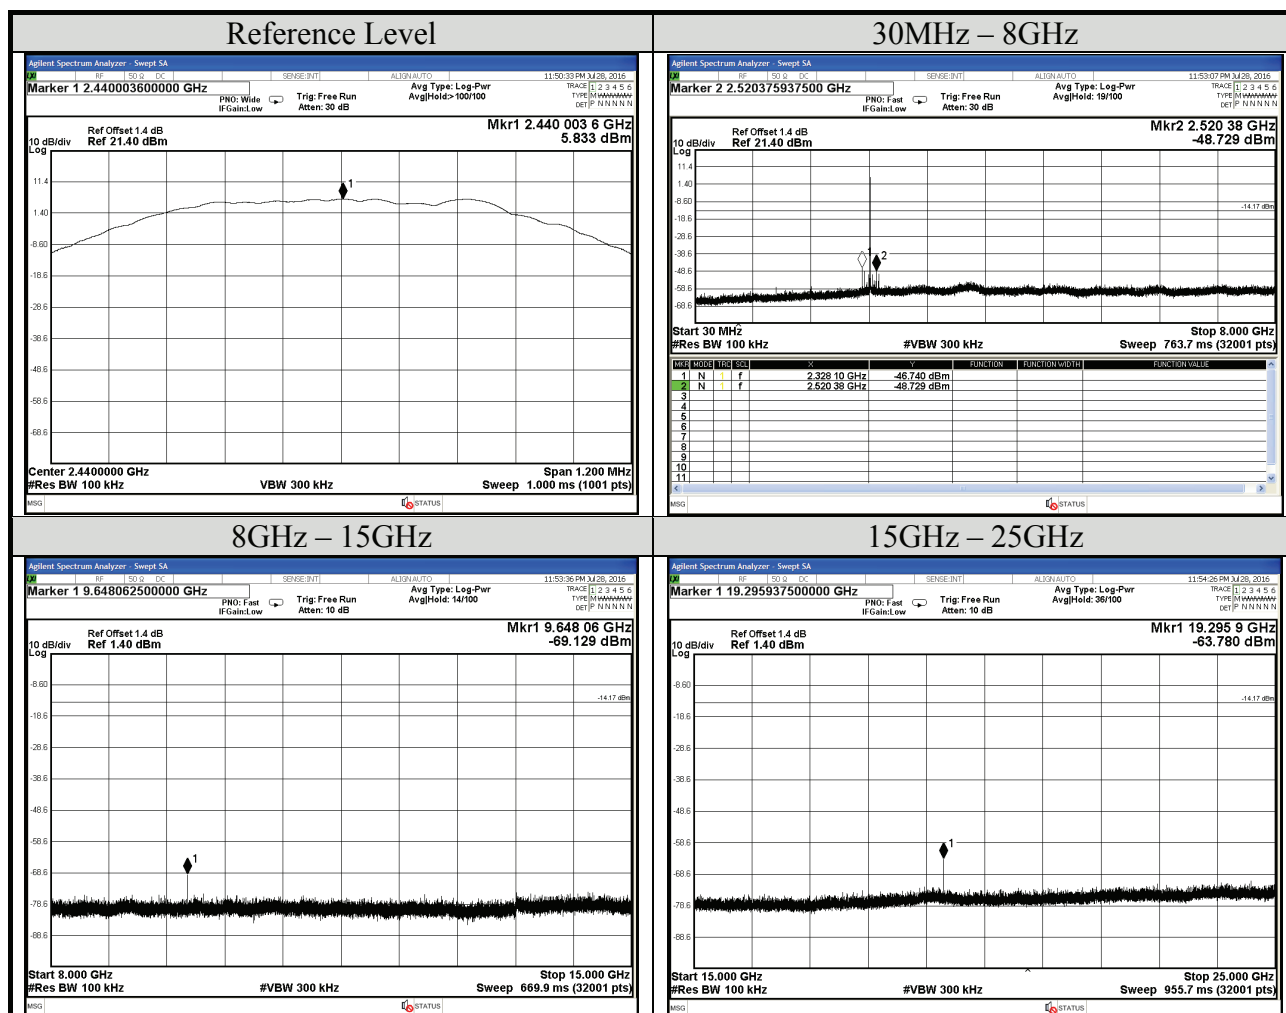

Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	1.4dB	Test Voltage	DC 3.7V
Mode	BLE	Frequency	TX 2480MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)		N/A	

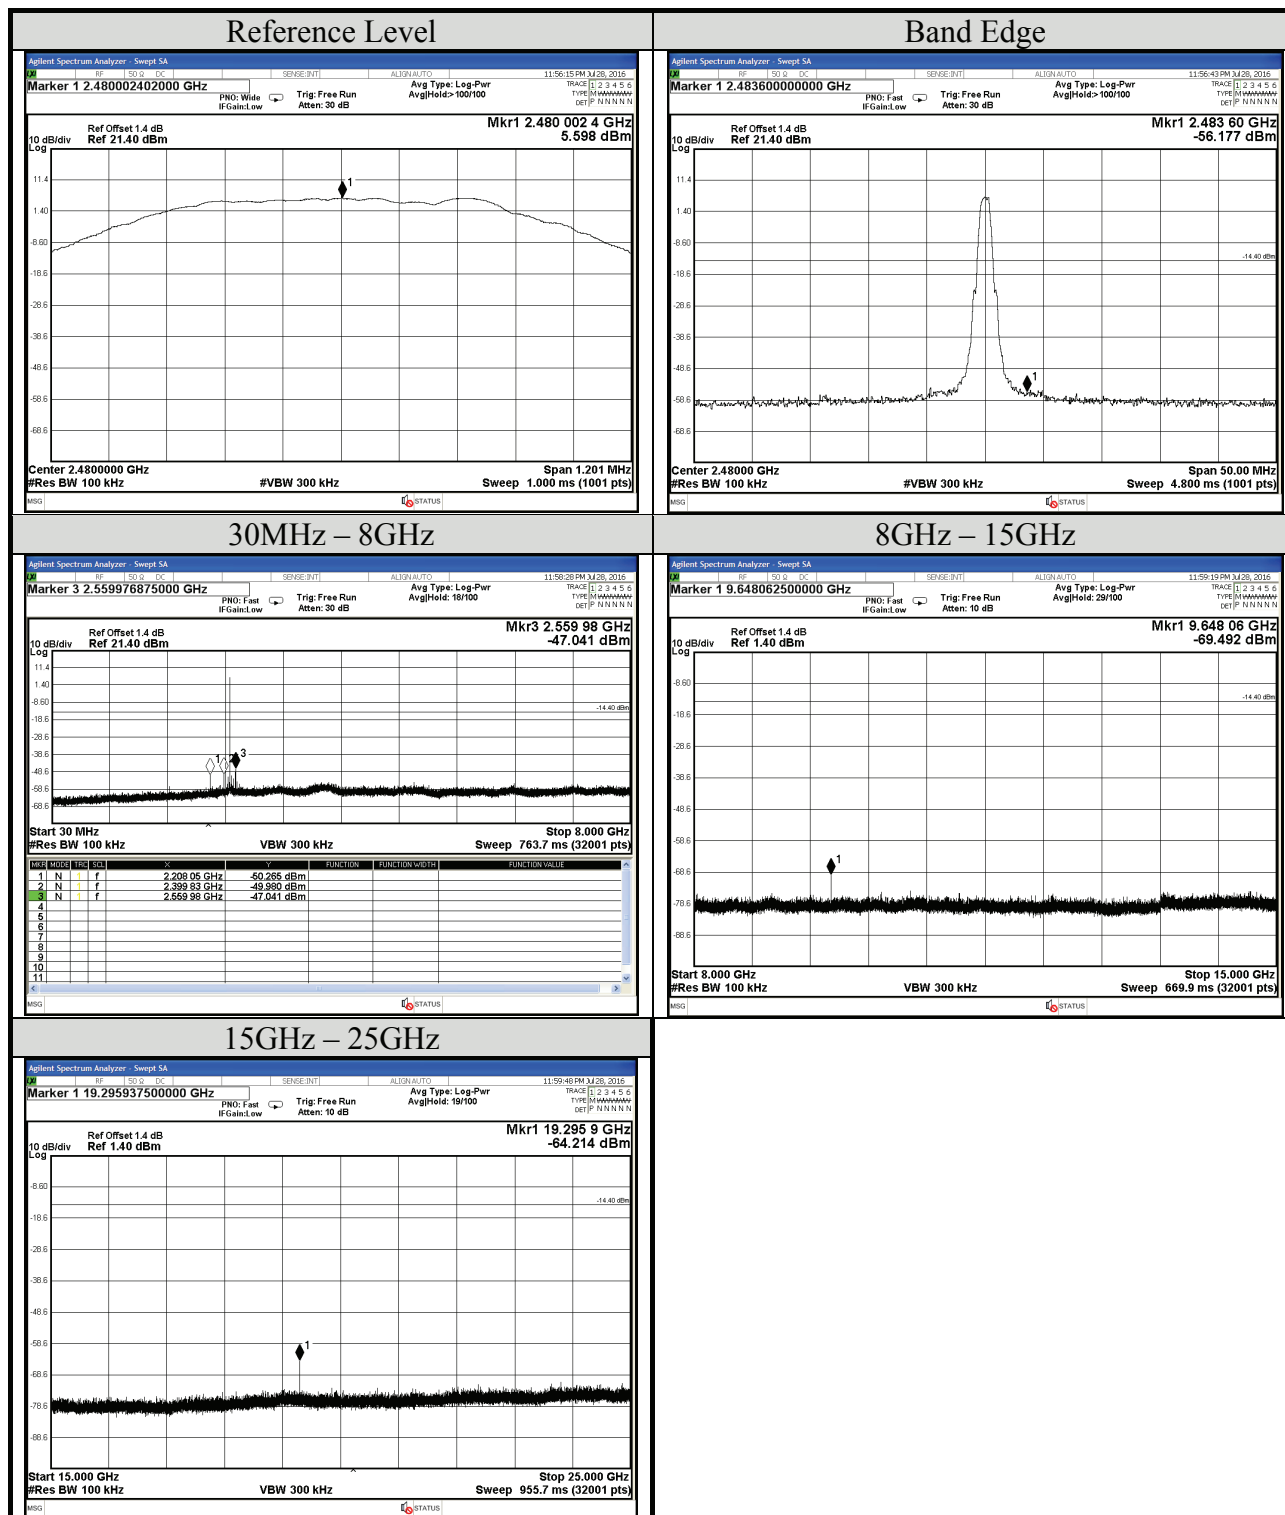

A.4 POWER SPECTRAL DENSITY


Test Date	2016/07/28	Temp./Hum.	25°C/58%
Cable Loss	802.11b/g/n-HT20: 1dB 802.11n-HT40/BLE: 1.4dB	Test Voltage	DC 3.7V
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			N/A

A.4.1 Power Spectral Density Result


Modulation Type	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11b	2412	5.830	< 8 dBm/3kHz
	2437	5.734	
	2462	5.288	
802.11g	2412	-0.874	
	2437	1.308	
	2462	-1.129	
802.11n-HT20	2412	-1.560	
	2437	1.633	
	2462	-1.930	
802.11n-HT40	2422	-5.316	
	2437	-3.539	
	2452	-5.693	
BLE	2402	5.429	
	2440	5.833	
	2480	5.598	

Note: All results have been included cable loss and Simultaneous Factor.


A.4.2 Measurement Plots

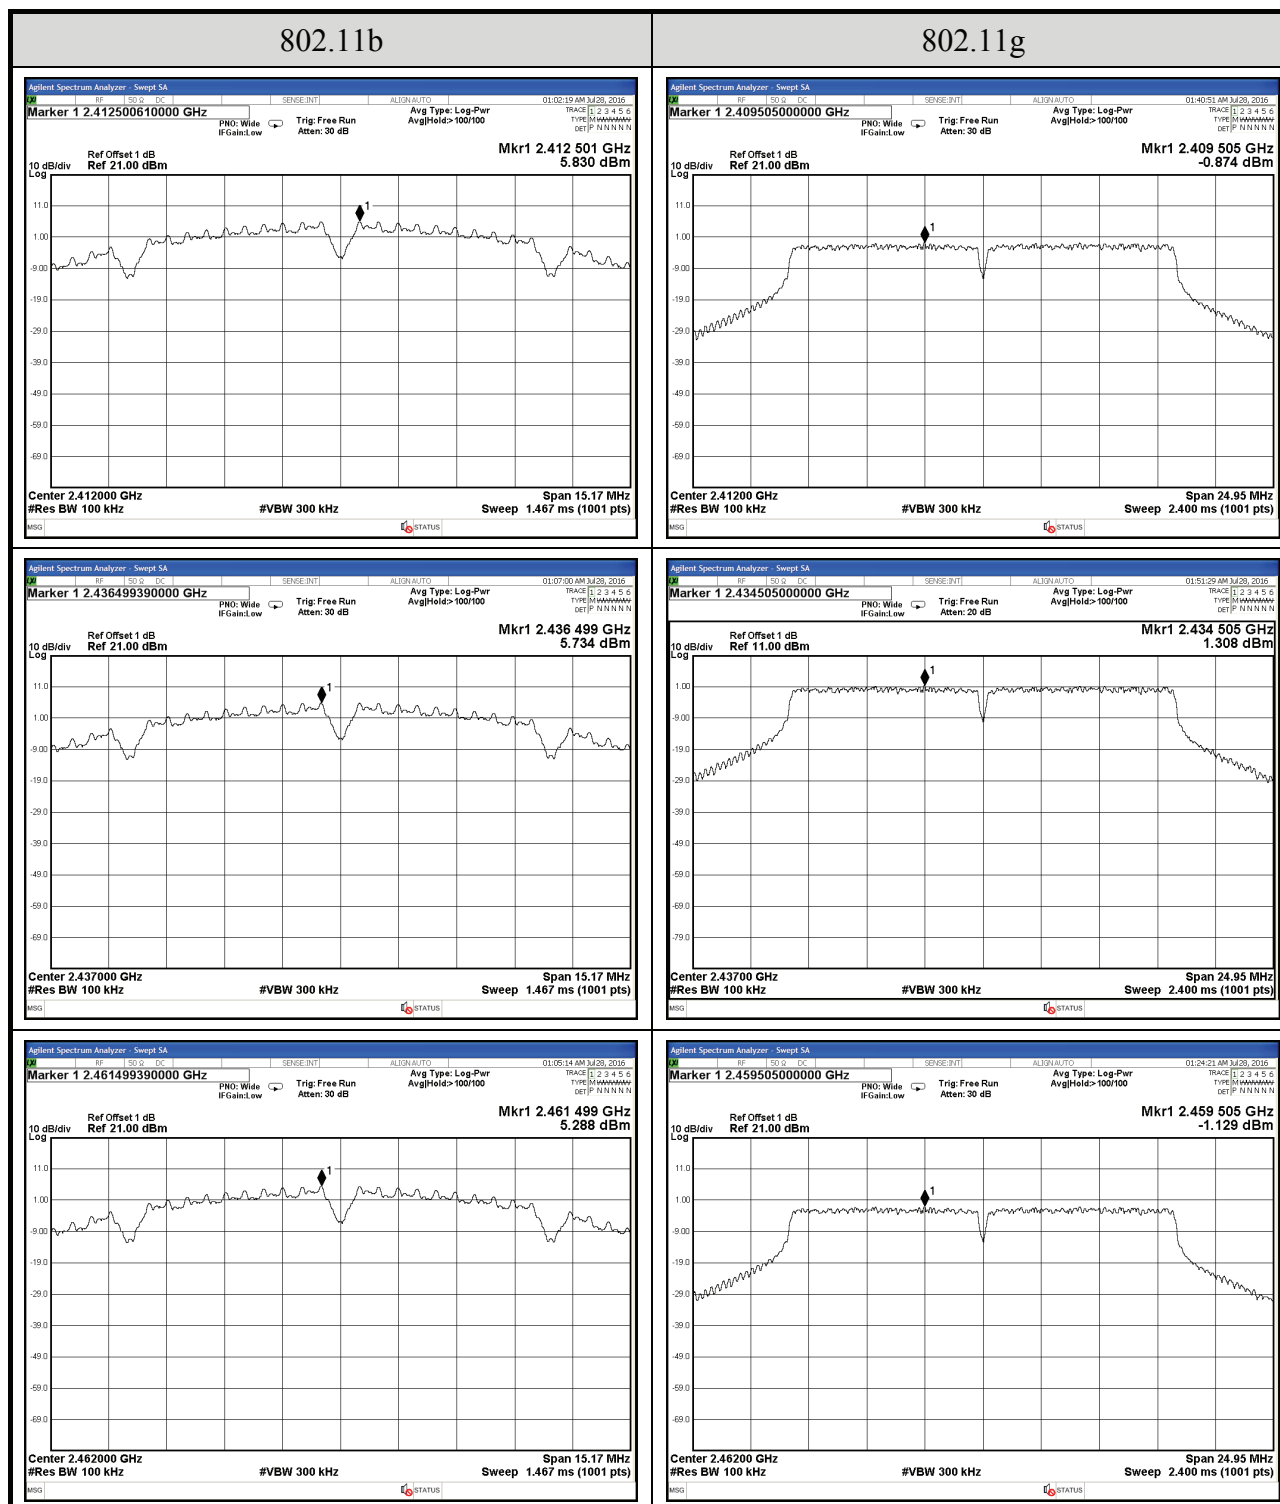

Note: All results have been included cable loss and Simultaneous Factor.

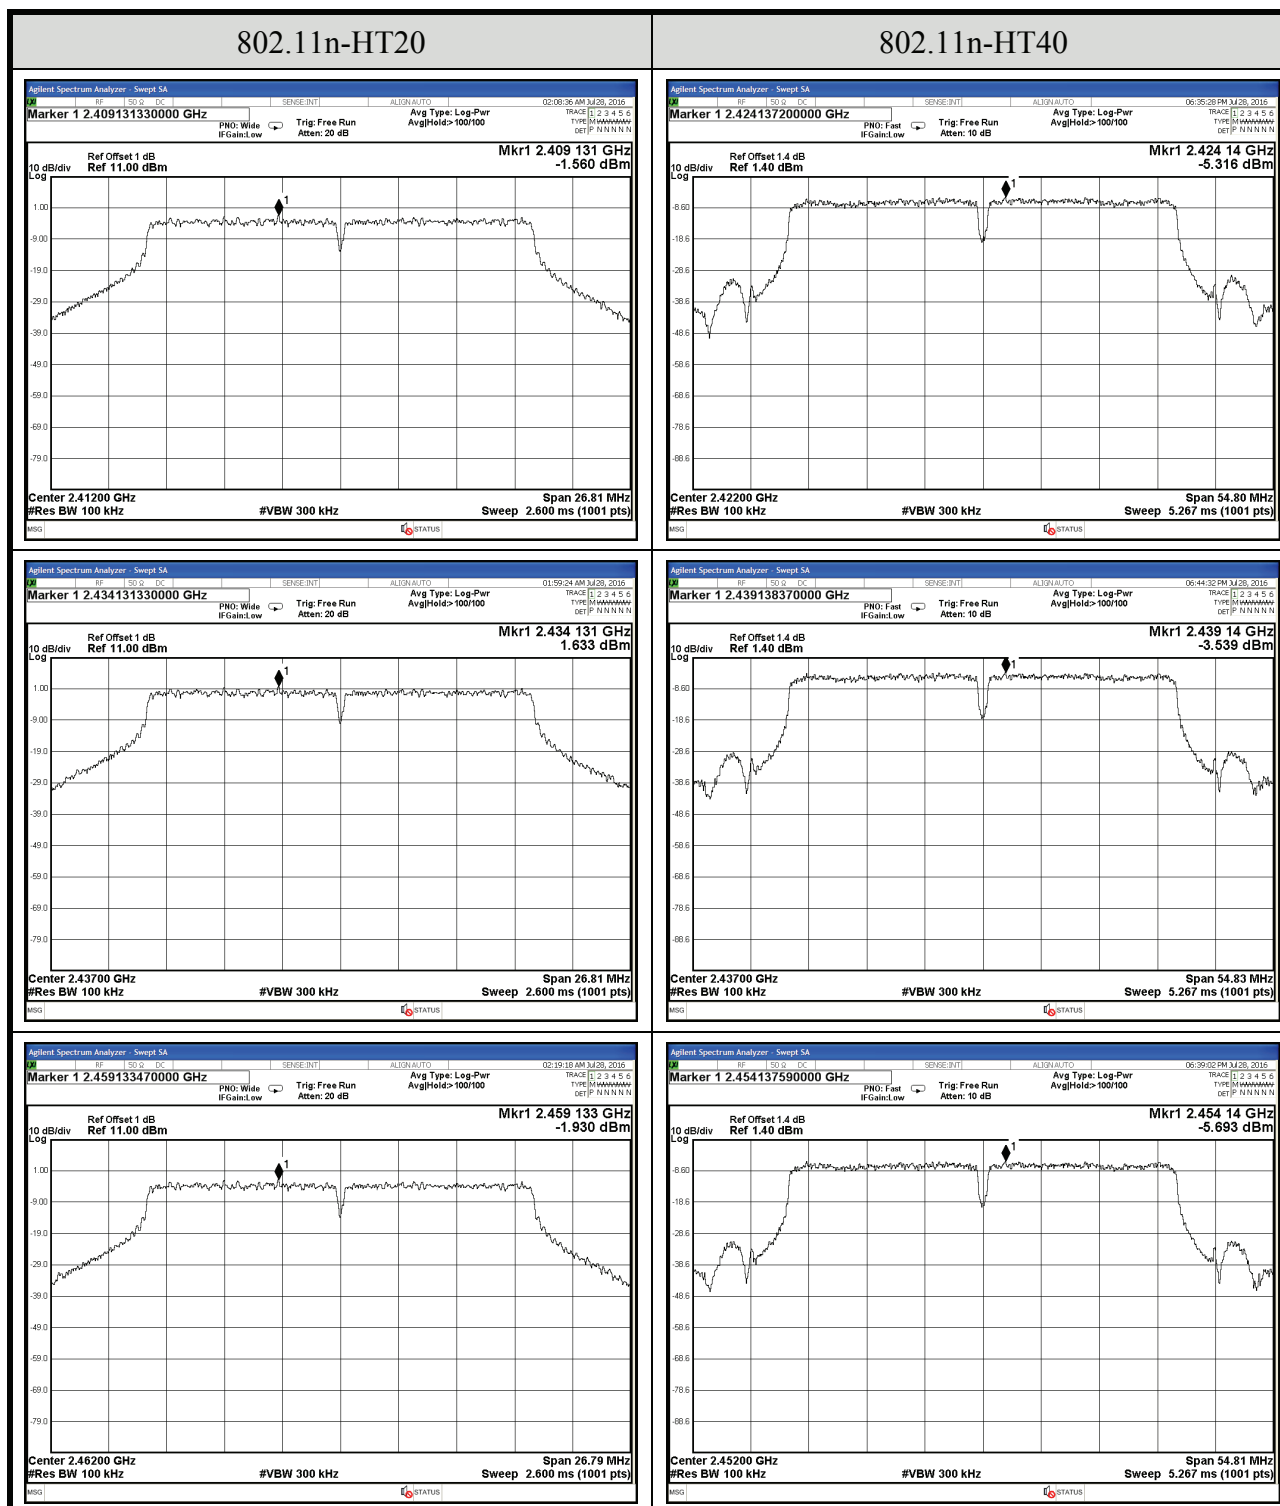

Note: All results have been included cable loss and Simultaneous Factor.

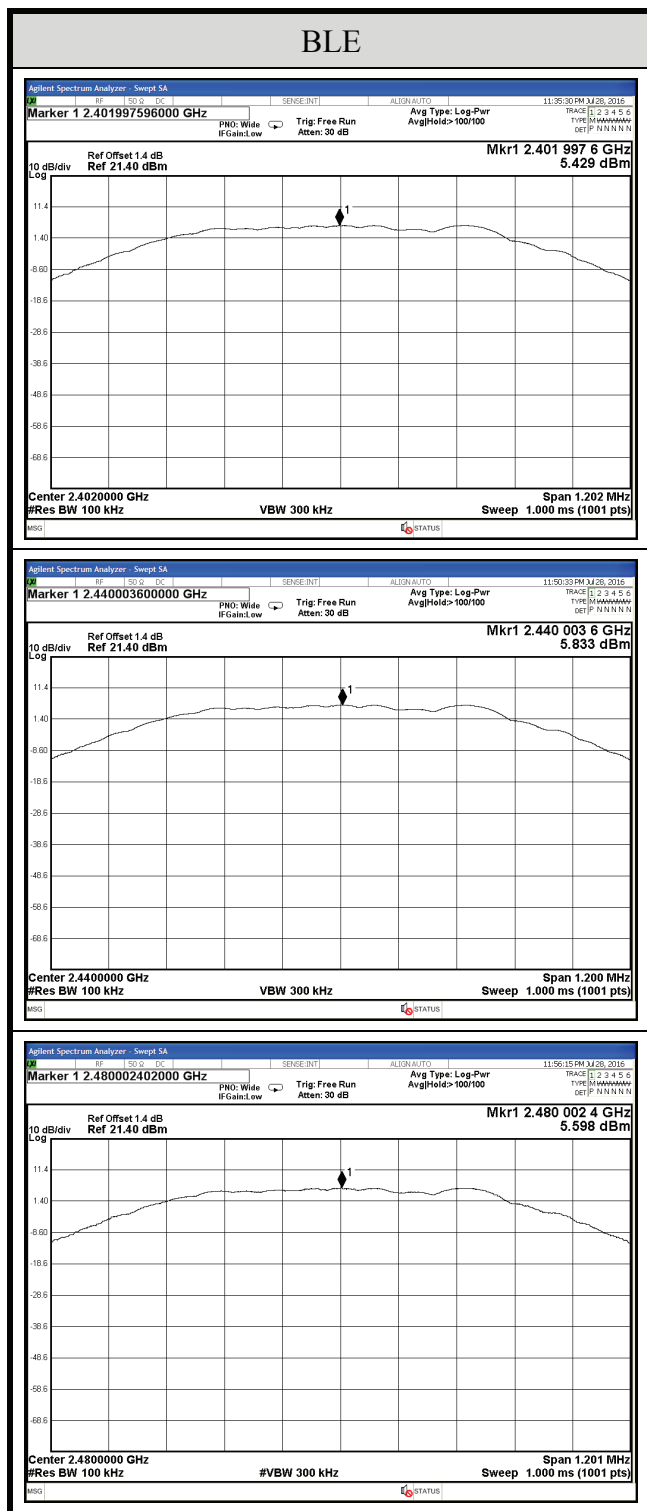

Note: All results have been included cable loss and Simultaneous Factor.