

APPLICATION FOR CERTIFICATION

On Behalf of

Elitegroup Computer Systems Co., Ltd.

7" Pocketable Pad

Model No. : (1)MICA-07..... (2)TABLET TB71.....

FCC ID : WL6TB71A-W

Brand: (1)ADVANTECH (2)ECS

Prepared for : Elitegroup Computer Systems Co., Ltd.
No. 239, Sec. 2, Ti Ding Blvd.,
Taipei, Taiwan

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou
Dist., New Taipei City 244,
Taiwan

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1S1404136
Report Number : EM-F140296
Date of Test : 2014. 05. 02~ 21
Date of Report : 2014. 05. 23

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. DESCRIPTION OF REVISION HISTORY	5
2. GENERAL INFORMATION	6
2.1. Description of Device (EUT).....	6
2.2. Antenna Information.....	8
2.3. Description of Key Component Lists	9
2.4. Data Rate Relative to Output Power.....	10
2.5. Test Configuration for Each Test Item	10
2.6. Tested Supporting System Details	11
2.7. Description of Test Facility	12
2.8. Measurement Uncertainty	12
3. CONDUCTED EMISSION MEASUREMENT.....	13
3.1. Test Equipment.....	13
3.2. Block Diagram of Test Setup.....	13
3.3. Powerline Conducted Emission Limit (§15.207).....	13
3.4. Operating Condition of EUT	14
3.5. Test Procedure	14
3.6. Conducted Emission Measurement Results.....	14
4. RADIATED EMISSION MEASUREMENT	17
4.1. Test Equipment.....	17
4.2. Test Setup	17
4.3. Radiated Emission Limits (§15.209)	19
4.4. Operating Condition of EUT	19
4.5. Test Procedure	20
4.6. Test Results.....	21
5. 6dB BANDWIDTH MEASUREMENT	45
5.1. Test Equipment.....	45
5.2. Block Diagram of Test Setup.....	45
5.3. Specification Limits [§15.247(a)(2)]	45
5.4. Operating Condition of EUT	45
5.5. Test Procedure	45
5.6. Test Results.....	46
6. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	54
6.1. Test Equipment.....	54
6.2. Block Diagram of Test Setup.....	54
6.3. Specification Limits (§15.247(b)-(3)).....	54
6.4. Operating Condition of EUT	54
6.5. Test Procedure	54
7. EMISSION LIMITATIONS MEASUREMENT	56
7.1. Test Equipment.....	56
7.2. Block Diagram of Test Setup.....	56
7.3. Specification Limits [§15.247(c)].....	56
7.4. Operating Condition of EUT	56
7.5. Test Procedure	56
7.6. Test Results.....	56
8. BAND EDGES MEASUREMENT	81
8.1. Test Equipment.....	81
8.2. Block Diagram of Test Setup.....	81

8.3. Specification Limits [§15.247(c)]..... 81

8.4. Operating Condition of EUT 81

8.5. Test Procedure 81

8.6. Test Results..... 81

9. POWER SPECTRAL DENSITY MEASUREMENT 86

9.1. Test Equipment..... 86

9.2. Block Diagram of Test Setup..... 86

9.3. Specification Limits [§15.247(d)]..... 86

9.4. Operating Condition of EUT 86

9.5. Test Procedure 86

9.6. Test Results..... 87

10. DEVIATION TO TEST SPECIFICATIONS..... 94

11. PHOTOGRAPHS..... 95

11.1. Photos of Conducted Disturbance Measurement..... 95

11.2. Photos of Radiated Measurement at Semi-Anechoic Chamber 96

11.3. Photo of Section RF Conducted Measurement..... 100

11.4. Photo of Maximum Peak Output Power Measurement 100

TEST REPORT CERTIFICATION

Applicant : Elitegroup Computer Systems Co., Ltd.
Manufacturer : Elitegroup Computer Systems Co., Ltd.
EUT Description : 7" Pocketable Pad
FCC ID : **WL6TB71A-W**
(A) Model No. : (1)MICA-07.....
(2)TABLET TB71.....
(B) Serial No. : N/A
(C) Brand : (1)ADVANTECH (2)ECS
(D) Power Supply : DC 3.7V (Battery) or DC 5V (USB)
(E) Test Voltage : AC 120V, 60Hz
(Via Docking Power Adapter)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C, Oct 2013
(FCC 47 CFR Part 15C, §15.205 and §15.207 and §15.209 and §15.247)
And ANSI C63.4:2003


The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits.

The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the requirements of FCC standard.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test: 2014. 05. 02~ 21

Date of Report: 2014. 05. 23

Producer: 
(Tina Huang/Administrator)

Signatory: 
(Ben Cheng/Manager)

1. DESCRIPTION OF REVISION HISTORY

Edition No.	Date of Revision	Revision Summary	Report Number
0	2014. 05. 23	Original Report.	EM-F140296

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product	7" Pocketable Pad
Model Number	(1)MICA-07..... (2)TABLET TB71..... (The “.” in the model name can be 0 to 9, A to Z, a to z, "-", "_", "\", "/" or blank, for marketing use only.) Above two models difference in brand and model name, others are the same. The model TABLET TB71A-W is test in this report
Serial Number	N/A
Brand Name	(1)ADVANTECH (2)ECS
Applicant	Elitegroup Computer Systems Co., Ltd. No. 239, Sec. 2, Ti Ding Blvd., Taipei, Taiwan
Manufacturer	Elitegroup Computer Systems Co., Ltd. No. 239, Sec. 2, Ti Ding Blvd., Taipei, Taiwan
FCC ID	WL6TB71A-W
Fundamental Range	802.11b/g/n-HT20: 2412MHz ~ 2462MHz 802.11a: 5180MHz ~ 5240MHz (UNII Band I) and 5260MHz ~ 5320MHz (UNII Band II-2A) and 5500MHz ~ 5700MHz (UNII Band II-2C) and 5745MHz ~ 5825MHz (UNII Band III) UNII Band II (DFS Function, Slave/no In service monitor, no Ad-Hoc mode) 802.11n-HT20: 2412MHz ~ 2462MHz and 5180MHz ~ 5240MHz (UNII Band I) and 5260MHz ~ 5320MHz (UNII Band II-2A) and 5500MHz ~ 5700MHz (UNII Band II-2C) and 5745MHz ~ 5825MHz (UNII Band III) UNII Band II (DFS Function, Slave/no In service monitor, no Ad-Hoc mode) 802.11n-HT40: 5190MHz ~ 5230MHz (UNII Band I) and 5270MHz ~ 5310MHz (UNII Band II-2A) and 5510MHz ~ 5670MHz (UNII Band II-2C) and 5755MHz ~ 5795MHz (UNII Band III) UNII Band II (DFS Function, Slave/no In service monitor, no Ad-Hoc mode) Bluetooth and BLE: 2402MHz ~ 2480MHz NFC: 13.56MHz GPS: 1575.42MHz

Frequency Channel	802.11b/g: 11 channels 802.11a: UNII Band I: 4 channels UNII Band II-2A: 4 channels UNII Band II-2C: 8 channels UNII Band III: 5 channels 802.11n-HT20: 2.4GHz: 11 channels 2.4G UNI Band I: 4channels UNII Band II-2A: 4 channels UNII Band II-2C: 8 channels UNII Band III: 5 channels 802.11n-HT40: UNII Band I: 2 channels UNII Band II-2A: 2 channels UNII Band II-2C: 3 channels UNII Band III: 2 channels Bluetooth: 79 channels BLE: 40 channels NFC: 1 Channel
Radio Technology	802.11b: DSSS Modulation (DBPSK/DQPSK/CCK) 802.11g: OFDM Modulation (BPSK/QPSK/16QAM/64QAM) 802.11a: OFDM Modulation (BPSK/QPSK/16QAM/64QAM) 802.11n: OFDM Modulation (MIMO) (BPSK/QPSK/16QAM/64QAM) Bluetooth: FHSS (GFSK, $\pi/4$ DQPSK, 8-DPSK) BLE: GFSK NFC: ASK
Data Transfer Rate	802.11b: 1/2/5.5/11Mbps 802.11a/g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 270Mbps BT: 1/2/3Mbps BLE: 1Mbps
Date of Receipt of Sample	2014. 04. 21
Note: This EUT has 2.4GHz (WLAN, Bluetooth and BLE), 5GHz and NFC function. See below for related test reports based on radio functionality. 1. The 2.4GHz (WLAN and BLE) function has been test in other report of EM-F140296. 2. The 5GHz function has been test in other report of EM-F140297. 3. The Bluetooth function has been test in other report of EM-F140298. 4. The DFS function has been test in other report of EM-F140303. 5. The NFC function has been test in other report of EM-F140299.	

2.2. Antenna Information

Antenna Part Number	Manufacture	Antenna Type	Peak Gain W/ Cable loss (dBi)			
			Frequency (MHz)		Max Gain (Peak) (dBi)	
WLAN/BT Antenna: E22-003-007-037-8014b (Main)	INNETECH (Tianjin) Electronics Co. Ltd.	PCB Antenna	2400	5180	1.33	-1.53
			2412	5190	1.92	-1.53
			2417	5310	2.07	0.66
			2422	5320	2.19	0.05
			2427	5500	2.44	-0.19
			2432	5510	2.59	-0.41
			2437	5670	2.78	-1.57
			2442	5700	2.83	-3.16
			2447	5745	2.87	-3.55
			2450	5765	2.78	-2.70
			2452	5785	2.76	-2.93
			2457	5805	2.68	-3.46
			2462	5825	2.47	-3.15
			2467		2.38	
			2472		2.52	
			2500		2.17	
WLAN Antenna: E22-003-007-037-8014b (AUX)	INNETECH (Tianjin) Electronics Co. Ltd.	PCB Antenna	2400	5180	3.08	0.61
			2412	5190	3.43	0.39
			2417	5310	3.10	0.91
			2422	5320	3.07	0.14
			2427	5500	2.78	-0.35
			2432	5510	2.68	-0.40
			2437	5670	2.63	-0.62
			2442	5700	2.49	-1.25
			2447	5745	2.68	-1.02
			2450	5765	2.60	0.06
			2452	5785	2.77	-0.30
			2457	5805	2.75	-0.23
			2462	5825	2.82	-0.09
			2467		2.77	
			2472		2.68	
			2500		2.58	
GPS Antenna	INNETECH (Tianjin) Electronics Co. Ltd.	PCB Antenna	1565		-3.38	
			1575		-2.87	
			1585		-3.25	
			1597		-2.42	
			1602		-2.22	
			1606		-1.98	
			1616		-1.37	

2.3. Description of Key Component Lists

Item		Supplier	Description	Character
System		Microsoft	Windows 8	---
Main Board		ECS	TB71A-W	
LCD Module		CPTF	CLAT070WP0D	7 inch CPT 800x1280 -10 point touch
CPU		Intel	Intel® Atom™ Processor Bay Trail	T Z3770, 1.46GHz Burst frequency 2.39GHz (Socket: BGA1380)
GPU		Intel	---	HD Graphics
Memory		Hynix	H9CCNNN8KTMLBR-N TM	LP DDR3 2GB (up to 4G)
SSD		Sandisk	SDIN8DE4-32G	eMMC 32GB
Battery Pack		Sunwoda	MICA-071	3.7V / 4100 mAh /15.17Wh
Front Camera		LiteON	NL89A141	sensor Sony IMX175 .8MP
Rear Camera		LiteON	13P2SF206	sensor OV2722, 2MP
Barcode Scanner		Itermec	ED30	Decode Board + EA31 Imager
Touch Pad		CPTF	CLAA070WP03	--
WLAN+BT Combo Module		MITSUMI	DWM-W095A	WLAN: 2.412GHz to 2.472GHz 5.18GHz to 5.85GHz BT4.0+BLE: 2.402GHz to 2.480GHz
NFC		NXP	PN544PC	13.56MHz
GNSS		MITSUMI	SPG-SF102	GPS: 1575.42MHz GLONASS: 1598.0625 to 1605.375 MHz
WLAN/ BT Antenna	Main	INNETECH ELECTRONICS	e22-003-007-037-8014b	Laser Direct Structuring (LDS) Antenna on frame
	AUX	INNETECH ELECTRONICS	e22-003-007-037-8014b	Laser Direct Structuring (LDS) Antenna on frame
Stylus Pen		FO	BLACK/#8513.	CAPACITIVE TOUCH PEN
USB Charger		Chicony	W12-010N3A	I/P: 100-240V~, 50-60Hz, 0.3A O/P: 5V, 2A
Docking	AdvanTech		MICA-071-DCRE	DC 5V
	ECS		DOCKING TB71A-W	DC 5V
Docking Power Adapter	Asian		WA-20A05FU	I/P: 100-240V~, 0.6A, 50-60Hz O/P: 5V, 4A
	Power Cord: Non-Shielded, Undetached, 1.8m, Bonded a ferrite core			
USB Charge Docking Cable		Shielded, Detachable, 1.2m		
HDMI Docking Cable		Shielded, Detachable, 0.17m		
USB3.0 Docking Cable		Shielded, Detachable, 0.23m		

Remark: For a more detailed features description, please refer to the manufacturer's specifications or the user manual.

2.4. Data Rate Relative to Output Power

802.11b			
Channel	Modulation	Date Rate(Mbps)	Power(dBm)
1	DBPSK	1	15.95
1	DQPSK	2	15.93
1	CCK	5.5	15.93
1	CCK	11	15.91

802.11g			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)
1	BPSK	MCS0	12.51
1	BPSK	MCS1	12.48
1	QPSK	MCS2	12.47
1	QPSK	MCS3	12.45
1	16-QAM	MCS4	12.45
1	16-QAM	MCS5	12.41
1	64-QAM	MCS6	12.41
1	64-QAM	MCS7	12.40

802.11n-HT20			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)
1	BPSK	MCS0	14.19
1	QPSK	MCS1	14.17
1	QPSK	MCS2	14.18
1	16-QAM	MCS3	14.15
1	16-QAM	MCS4	14.15
1	64-QAM	MCS5	14.13
1	64-QAM	MCS6	14.18
1	64-QAM	MCS7	14.16

Note: This assessment is measured at main Ant.

2.5. Test Configuration for Each Test Item

Test Item	802.11b	802.11g	802.11n-HT20	802.11n-HT40
	Data Rate for Test(Mbps)			
6dB Bandwidth	1	6	6.5	13.5
Peak Power Spectral Density	1	6	6.5	13.5
Peak Output Power	1	6	6.5	13.5
Band Edge	1	6	6.5	13.5

2.6. Tested Supporting System Details

2.6.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	LCD Monitor	PHILIPS	273P3L	AU5A1222002498	FCC DoC Approved
2.	USB Keyboard	LENOVO	SK-8825	0056462	FCC DoC Approved
3.	USB Mouse	LENOVO	M-U0025-0	N/A	FCC DoC Approved
4.	USB 3.0 Hard Drive	BUFFALO	HD-HX1.0TU3-AP	15564891205965	FCC DoC Approved
5.	I-POD Earphone	APPLE	N/A	N/A	N/A
6.	Power Socket	AUDIX	N/A	N/A	N/A
7.	Micro SD Card	Kingston	NSDC4/8GB	N/A	N/A

2.6.2. Cable Lists

No.	Signal Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8m
2.	USB Cable: Shielded, Detachable, 1.8m
3.	USB Cable: Shielded, Detachable, 1.8m
4.	USB Cable: Shielded, Detachable, 1.0m
5.	Earphone Cable: Non-Shielded, Detachable, 0.9m
6.	N/A
7.	N/A

Note : 1. Support Unit 1 & 6: Power Cord: Non-Shielded, Detachable, 1.8m

2. Support Unit 4 AC Adapter: BUFFALO, M/N: WA-18H12, S/N: 219019279;
AC Cord: Non-Shielded, Undetachable, 1.5m

2.7. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation**
EMC Department
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan

Test Location & Facility : **No. 5 Shielded Room**
 (C5/AC) No. 67-4, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan

Semi-Anechoic Chamber
 No. 53-11, Dingfu, Linkou Dist.,
 New Taipei City 244, Taiwan
 May 11, 2012 File on
 Federal Communication Commission
 Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

2.8. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	±3.43dB
Radiation Test (Distance: 3m)	30MHz~300MHz	± 2.91dB
	300MHz~1000MHz	± 2.74dB
	Above 1GHz	± 5.02dB

Remark : Uncertainty = $k_{uc}(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dBm
Band edges	± 0.13dB
Power spectral density	± 0.13dB
Emission Limitations	± 0.13dB


3. CONDUCTED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the conducted emission measurement : (No. 5 Shielded Room)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Due Date
1.	Test Receiver	R&S	ESCS30	100039	2014. 06. 18
2.	A.M.N.	R&S	ENV4200	100003	2014. 05. 30
3.	L.I.S.N.	Kyoritsu	KNW-407	8-1539-2	2015. 01. 07
4.	Pulse Limiter	R&S	ESH3-Z2	100355	2015. 01. 17

3.2. Block Diagram of Test Setup

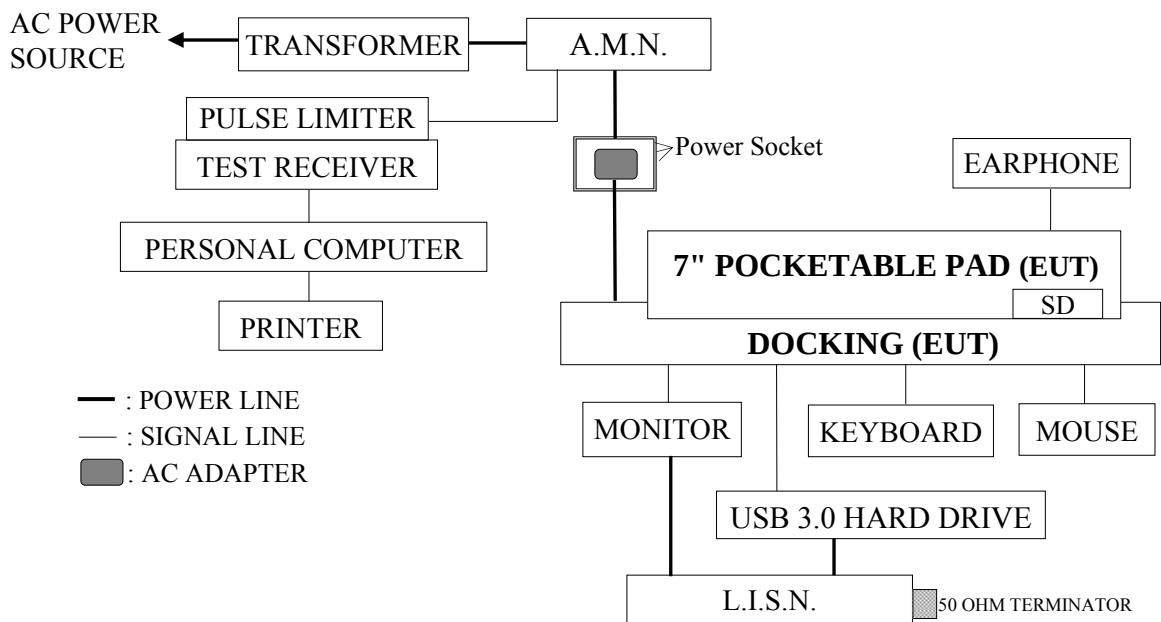

3.3. Powerline Conducted Emission Limit (§15.207)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

2.: The lower limit applies at the band edges.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown on 3.2.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Set to EUT (7" Pocketable Pad) on transmitting and receiving during all testing.

3.5. Test Procedure

The EUT link to docking power adapter through docking was placed on the table which was above the ground by 80cm and adapter's power cord connected to the AC mains through an Artificial Mains Network (A.M.N.). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions simulators of the interface cables should be manipulated according to ANSI C63.4-2003 regulation during conducted measurement.

The bandwidth of the R&S Test Receiver ESCS30 was set at 9kHz.

The frequency range from 150kHz to 30MHz was checked.

All the final readings from Test Receiver were measured with the Quasi-Peak detector and Average detector. Remark: If the Average limit is met when using a Quasi-Peak detector, the Average detector is unnecessary)

3.6. Conducted Emission Measurement Results

PASSED.

(All the emissions not reported below are too low against the prescribed limits.)

EUT was performed during this section testing and all the test results are attached in next pages.

EUT : 7" Pocketable Pad

M/N : TABLET TB71A-W

Test Date : 2014. 05. 05

Temperature : 22°C


Humidity : 52%

The details are as follows :

Mode	Reference Test Data	
	Neutral	Line
1.	# 2	# 1



AUDIX Technology Corp. EMC Department
No. 53-11, Dingfu, Linkou Dist., New Taipei
City 244, Taiwan R.O.C.
Tel: +886-2-26092133 Fax: +886-2-26099303
Email: emc@audixtech.com.tw

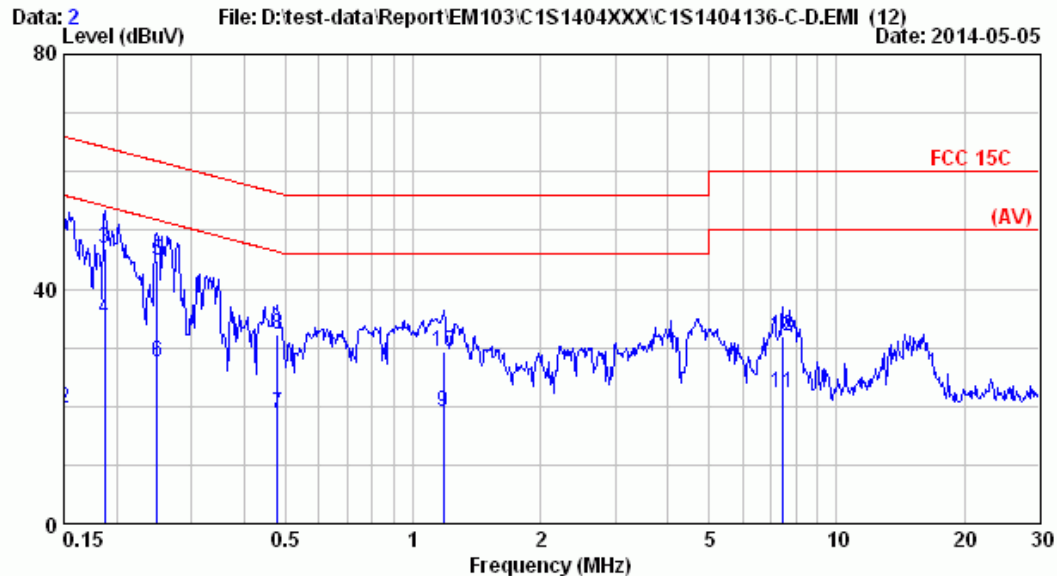


Site : No.5 Shielded Room Data : 2
Condition : ENV 4200 Phase : NEUTRAL
Limit : FCC 15C
Env. / Ins. : 22°C / 52% ESCS 30 (039) Engineer: Gary-Tsai
EUT : TB71A-W
Power Rating : 120Vac / 60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	10.10	0.20	33.47	43.77	66.00	22.23	QP
2	0.150	10.10	0.20	9.39	19.69	56.00	36.31	AVERAGE
3	0.187	10.05	0.20	36.61	46.86	64.15	17.29	QP
4	0.187	10.05	0.20	24.76	35.01	54.15	19.14	AVERAGE
5	0.249	9.98	0.20	34.78	44.96	61.78	16.81	QP
6	0.249	9.98	0.20	17.32	27.51	51.78	24.27	AVERAGE
7	0.479	9.88	0.20	8.53	18.62	46.36	27.75	AVERAGE
8	0.479	9.88	0.20	22.28	32.37	56.36	24.00	QP
9	1.178	9.80	0.40	8.76	18.96	46.00	27.04	AVERAGE
10	1.178	9.80	0.40	19.10	29.30	56.00	26.70	QP
11	7.446	9.91	0.60	11.74	22.25	50.00	27.75	AVERAGE
12	7.446	9.91	0.60	21.30	31.81	60.00	28.19	QP

Remarks: 1. Emission Level = AMN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.



AUDIX Technology Corp. EMC Department
No.53-11, Dingfu, Linkou Dist., New Taipei
City 244, Taiwan R.O.C.
Tel:+886-2-26092133 Fax:+886-2-26099303
Email:emc@audixtech.com.tw

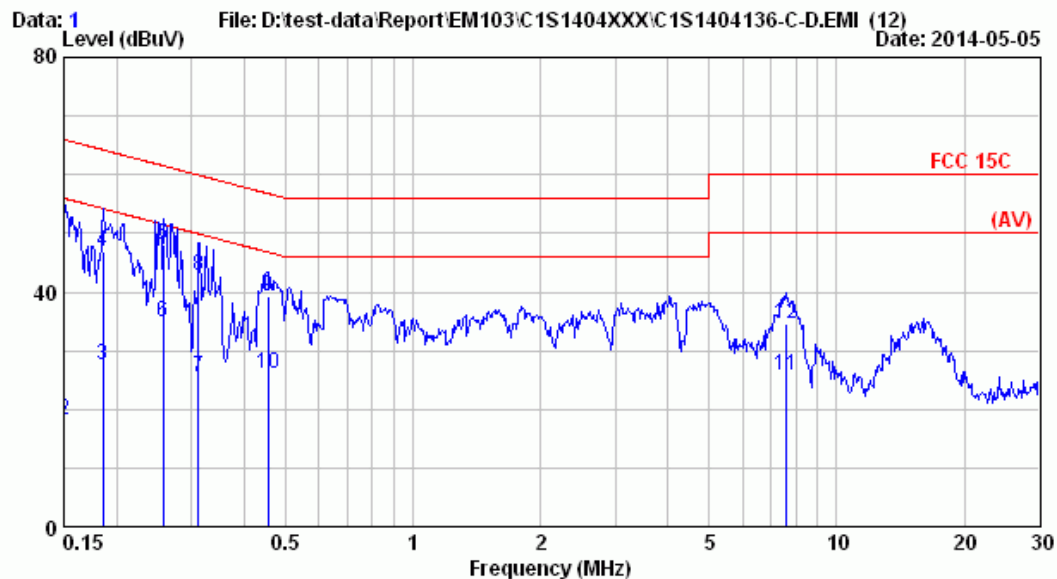

Site : No.5 Shielded Room Data : 1
Condition : ENV 4200 Phase : LINE
Limit : FCC 15C
Env. / Ins. : 22°C / 52% ESCS 30 (039) Engineer: Gary-Tsai
EUT : TB71A-W
Power Rating : 120Vac / 60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	10.10	0.20	34.58	44.88	66.00	21.12	QP
2	0.150	10.10	0.20	7.99	18.29	56.00	37.71	AVERAGE
3	0.185	10.05	0.20	17.32	27.57	54.24	26.67	AVERAGE
4	0.185	10.05	0.20	36.49	46.74	64.24	17.50	QP
5	0.258	9.97	0.20	37.84	48.01	61.51	13.50	QP
6	0.258	9.97	0.20	24.68	34.85	51.51	16.66	AVERAGE
7	0.312	9.95	0.20	15.45	25.60	49.93	24.33	AVERAGE
8	0.312	9.95	0.20	32.77	42.92	59.93	17.01	QP
9	0.454	9.89	0.20	29.09	39.18	56.80	17.62	QP
10	0.454	9.89	0.20	16.11	26.20	46.80	20.60	AVERAGE
11	7.566	9.86	0.60	15.26	25.72	50.00	24.28	AVERAGE
12	7.566	9.86	0.60	24.11	34.57	60.00	25.43	QP

Remarks: 1.Emission Level= AMN Factor + Cable Loss + Reading.
2.If the average limit is met when using a quasi-peak detector ,the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

4.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Due Date
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2014. 09. 18
2.	Test Receiver	R & S	ESCS30	100338	2014. 06. 30
3.	Amplifier	HP	8447D	2944A06305	2015. 02. 17
4.	Bilog Antenna	TESEQ	CBL6112D	33821	2014. 08. 07

4.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Due Date
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2014. 09. 18
2.	Test Receiver	R & S	ESCS30	100338	2014. 06. 30
3.	Pre-Amplifier	HP	8449B	3008A00529	2015. 01. 23
4.	2.4GHz Notch Filter	K&L	7NSL10-2441.5E 130.5-00	1	2014. 06. 12
5.	3G High Pass Filter	Microwave Circuits	H3G018G1	484796	2014. 06. 12
6.	Horn Antenna	EMCO	3115	9609-4927	2014. 06. 16
7.	Horn Antenna	EMCO	3116	2653	2014. 10. 10

4.2. Test Setup


4.2.1. Block Diagram of connection between EUT and simulators

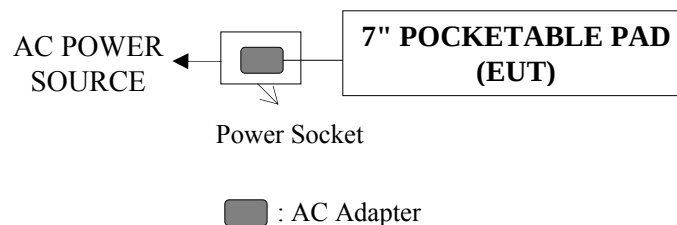

4.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

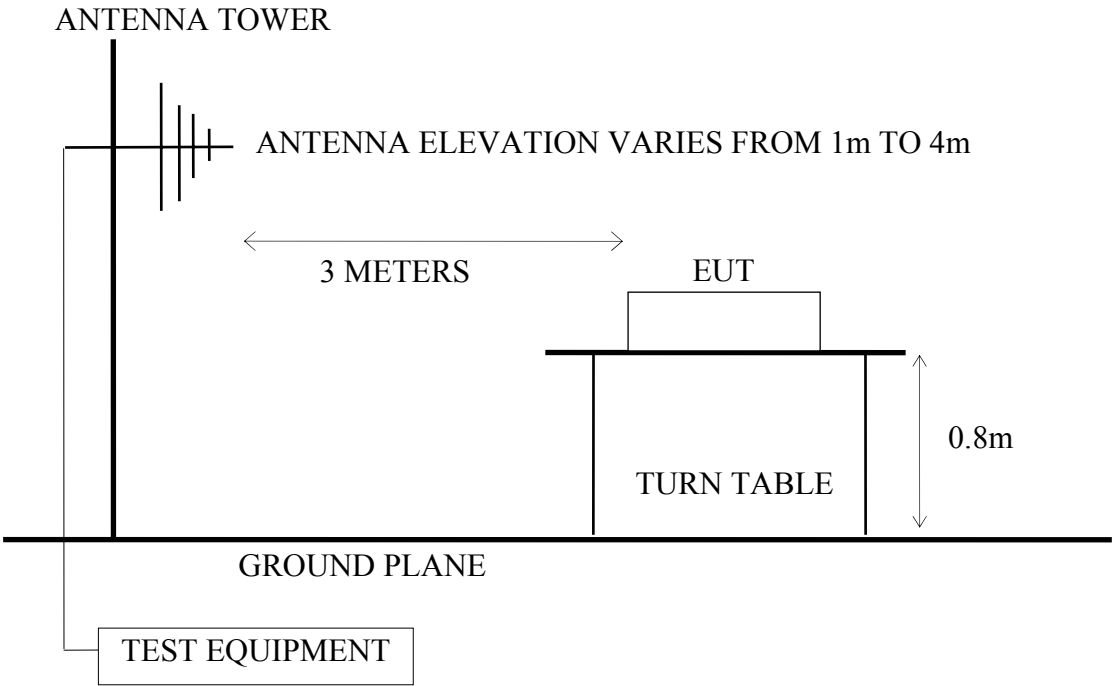

4.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

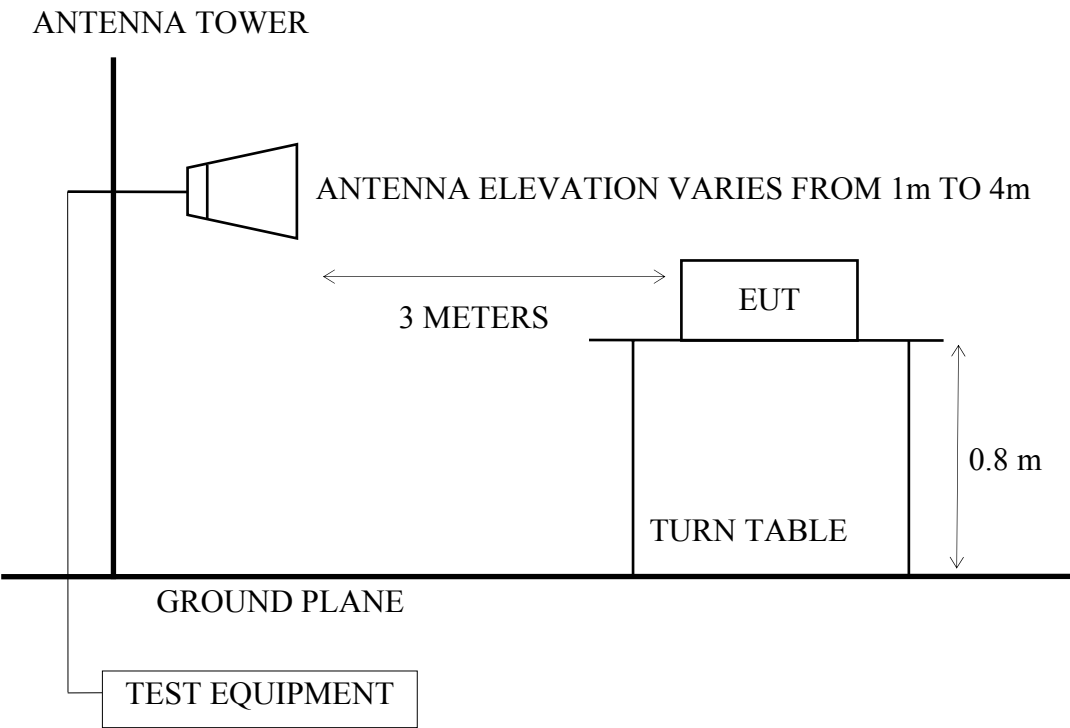

4.3. Radiated Emission Limits (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35(b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT (7" Pocketable Pad) and simulator as shown on 4.2.
- 4.4.2. To turn on the power of all equipments.
- 4.4.3. The EUT was set the Notebook PC using test program "WL Command" for WLAN test and test program "Blue Tool" for BLE test.
- 4.4.4. The EUT supports 802.11a/b/g/n-HT20/n-HT40 and BLE modes, we performed pre-scan high, middle, low channels for each mode for spurious emission and listed the worst channel of each mode in test report.

The worst channel of each mode as following:

Mode	Type of Network	Channel
1.	802.11b	CH 11
2.	802.11g	CH 11
4.	802.11n-HT20	CH 11
3.	BLE	CH 0
4.	BLE	CH 19
5.	BLE	CH 39

4.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-2003 regulation.

The bandwidth of the R&S Test Receiver was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked. 30MHz to 1000MHz was measured with Quasi-Peak detector.

Above 1GHz was measured with peak and average detector. For frequency from 1GHz to 25GHz, we checked it in 1 meter distance and with a shorter cable 2 meter instead of original's. There is no signal exist.

Pursuant to ANSI C63.4 8.3.1.2, when peak value complies with the average limit, we didn't perform measurement in average detector.

4.6. Test Results

PASSED.

(All emissions not reported below are too low against the prescribed limits.)

EUT : 7" Pocketable Pad

M/N : TABLET TB71A-W

Test Date : 2014. 05. 13 Temperature : 26°C Humidity : 43%

4.6.1. For WLAN Function

For Frequency Range 30MHz~1000MHz:

The EUT emitted the fundamental frequency with data code at the stand, side and lying conditions.

The EUT select **worst position "lying"** and link AC adapter and with following test modes was performed during this section testing and all the test results are listed in section 4.6.1.1.

Mode	Type of Network	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1.	802.11b	CH 11	2462MHz	Transmit	# 1	# 2
2.	802.11g	CH 11	2462MHz		# 1	# 2
3.	802.11n-HT20	CH 11	2462MHz		# 1	# 2

* Above all final readings were measured with Quasi-Peak detector.

Frequency above 1GHz:

The emissions (up to 25GHz) not reported are too low to be measured.

For Restricted Bands:

The EUT select **worst position "lying"** and link AC adapter and with following test modes was performed during this section testing and all the test results are listed in section 4.6.1.2. (The restricted bands defined in part 15.205(a))

Mode	Type of Network	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1.	802.11b	CH 6	2412MHz	Transmit	# 11, # 12	# 9, # 10
2.		CH 11	2462MHz		# 15, # 16	# 13, # 14
3.	802.11g	CH 6	2412MHz	Transmit	# 3, # 4	# 1, # 2
4.		CH 11	2462MHz		# 7, # 8	# 5, # 6
5.	802.11n-HT20	CH 6	2412MHz	Transmit	# 9, # 10	# 11, # 12
6.		CH 11	2462MHz		# 15, # 16	# 13, # 14

4.6.1.1. For 30-1000MHz Frequency Range Measurement Results

802.11b, Transmit, Frequency: 2412MHz

Site no.	: Audix NO.1 Chamber	Data no.	: 1
Dis. / Ant.	: 3m CBL6112D 33821	Ant. pol.	: HORIZONTAL
Limit	: 30M-1G		
Env. / Ins.	: 26°C / 43% N9010A	Engineer	: Wenbin_Yang
EUT	: TB71A-W		
Power Rating	: DC5V		
Test Mode	: TX2462		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	248.25	12.84	3.50	23.93	40.27	46.00	5.73	QP
2	481.05	17.53	6.10	8.58	32.21	46.00	13.79	QP
3	828.31	20.94	7.10	7.22	35.26	46.00	10.74	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no.	: Audix NO.1 Chamber	Data no.	: 2
Dis. / Ant.	: 3m CBL6112D 33821	Ant. pol.	: VERTICAL
Limit	: 30M-1G		
Env. / Ins.	: 26°C / 43% N9010A	Engineer	: Wenbin_Yang
EUT	: TB71A-W		
Power Rating	: DC5V		
Test Mode	: TX2462		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	256.98	13.77	3.50	12.14	29.41	46.00	16.59	QP
2	580.96	18.81	6.30	4.03	29.14	46.00	16.86	QP
3	829.28	20.95	7.10	0.95	29.00	46.00	17.00	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

802.11g, Transmit, Frequency: 2462MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : TB71A-W
 Power Rating : DC5V
 Test Mode : TX2462

Data no. : 1
 Ant. pol. : HORIZONTAL
 Engineer : Wenbin_Yang

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	236.61	11.83	3.40	24.78	40.01	46.00	5.99	QP
2	354.95	15.42	4.37	15.80	35.59	46.00	10.41	QP
3	831.22	20.98	7.10	7.88	35.96	46.00	10.04	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : TB71A-W
 Power Rating : DC5V
 Test Mode : TX2462

Data no. : 2
 Ant. pol. : VERTICAL
 Engineer : Wenbin_Yang

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	252.13	13.22	3.59	14.06	30.87	46.00	15.13	QP
2	512.09	17.96	6.80	12.39	37.15	46.00	8.85	QP
3	830.25	20.98	7.10	2.01	30.07	46.00	15.93	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

802.11n-HT20, Transmit, Frequency: 2462MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : TB71A-W
 Power Rating : DC5V
 Test Mode : TX2462

Data no. : 1
 Ant. pol. : HORIZONTAL
 Engineer : Wenbin_Yang

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	241.46	12.26	3.40	24.69	40.35	46.00	5.65	QP
2	482.02	17.54	6.10	7.78	31.42	46.00	14.58	QP
3	828.31	20.94	7.10	7.07	35.11	46.00	10.89	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.


Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : TB71A-W
 Power Rating : DC5V
 Test Mode : TX2462

Data no. : 2
 Ant. pol. : VERTICAL
 Engineer : Wenbin_Yang

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	256.98	13.77	3.50	11.45	28.72	46.00	17.28	QP
2	580.96	18.81	6.30	4.66	29.77	46.00	16.23	QP
3	828.31	20.94	7.10	0.99	29.03	46.00	16.97	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Test Mode : 802.11b, Transmit, Channel: 01, Frequency: 2412MHz

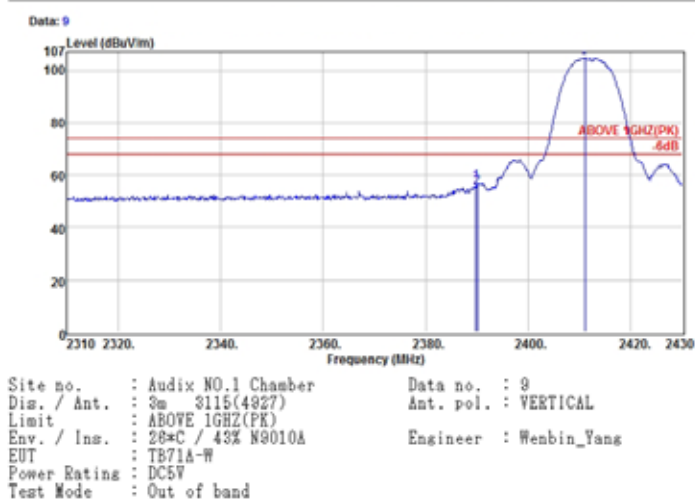

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2388.80	28.47	6.34	22.43	57.24	74.00	18.78	Peak
2	2390.04	28.47	6.34	20.67	55.48	74.00	18.52	Peak
3	2411.04	28.51	6.38	89.99	104.86	74.00	-30.86	Peak

Remarks: 1. Emission Level= Antenna Factor * Cable Loss * Reading
2. The emission levels that are 20dB below the official limit are not reported.

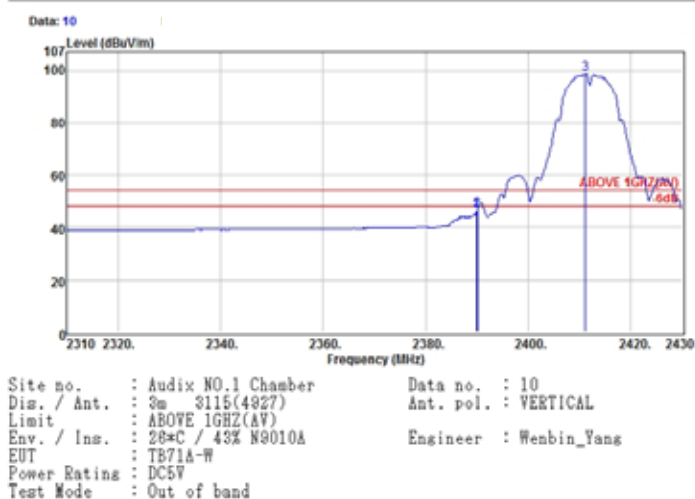


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2389.82	28.47	6.34	11.28	48.09	54.00	7.91	Average
2	2390.04	28.47	6.34	11.85	48.66	54.00	7.34	Average
3	2411.16	28.51	6.36	83.79	98.66	54.00	-44.66	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 05. 13 Temperature : 26°C


EUT : 7" Pocketable Pad Humidity : 43%

Test Mode : 802.11b, Transmit, Channel: 11, Frequency: 2462MHz

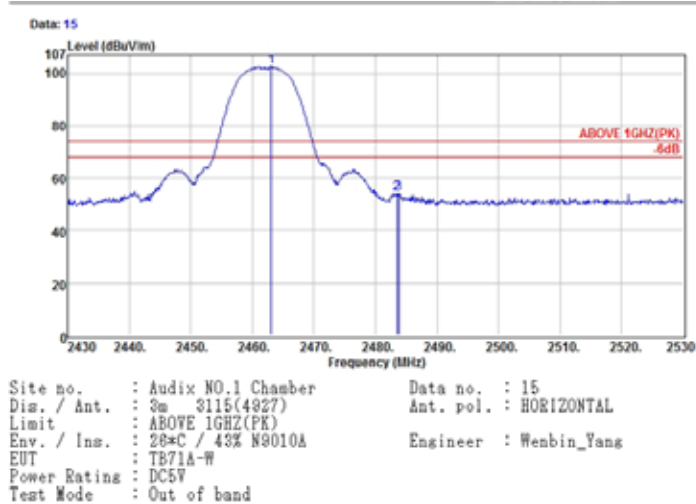

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2463.10	28.82	6.42	67.54	102.58	74.00	-28.58	Peak
2	2483.50	28.86	6.45	18.81	53.92	74.00	20.08	Peak
3	2483.80	28.86	6.45	18.98	54.09	74.00	19.91	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

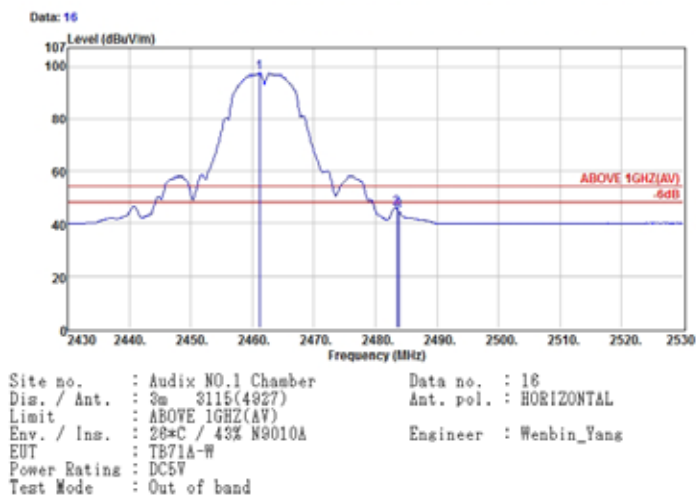


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2461.20	28.82	6.42	62.39	97.43	54.00	-43.43	Average
2	2483.50	28.86	6.45	10.82	45.73	54.00	8.27	Average
3	2483.80	28.86	6.45	9.82	44.73	54.00	9.27	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 05. 13 Temperature : 26°C


EUT : 7" Pocketable Pad Humidity : 43%

Test Mode : 802.11b, Transmit, Channel: 11, Frequency: 2462MHz

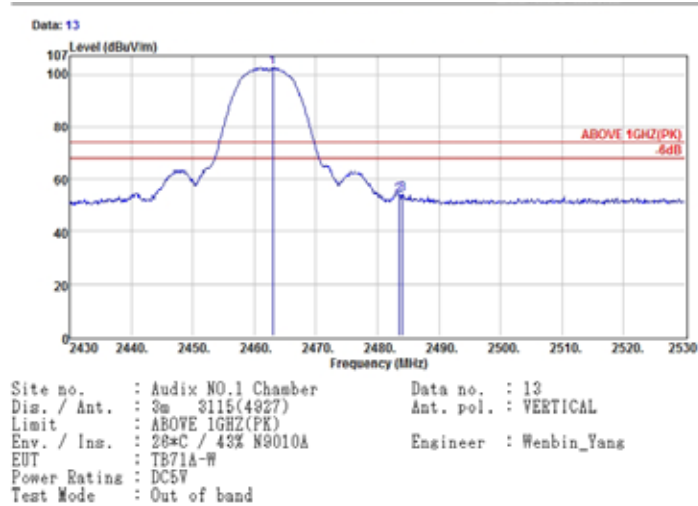

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2463.00	28.82	6.42	67.48	102.52	74.00	-28.52	Peak
2	2483.50	28.86	6.45	18.43	53.54	74.00	20.46	Peak
3	2484.10	28.86	6.45	19.08	54.17	74.00	19.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

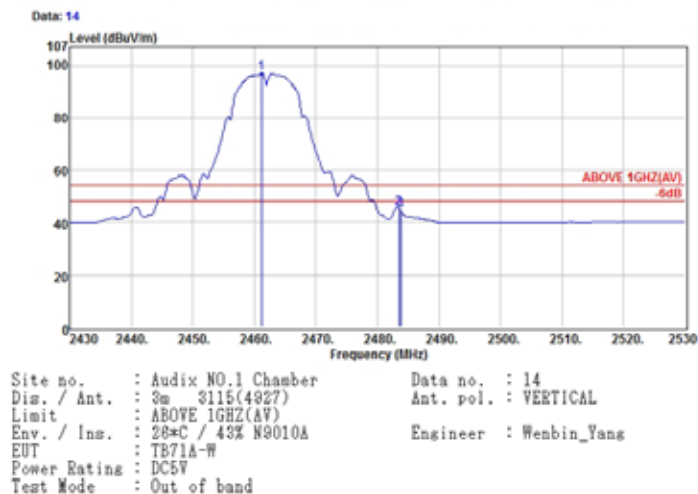

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2461.20	28.82	6.42	61.94	96.98	54.00	-42.98	Average
2	2483.50	28.86	6.45	10.29	45.40	54.00	8.60	Average
3	2483.80	28.86	6.45	9.34	44.45	54.00	9.55	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Test Mode : 802.11g, Transmit, Channel: 01, Frequency: 2412MHz

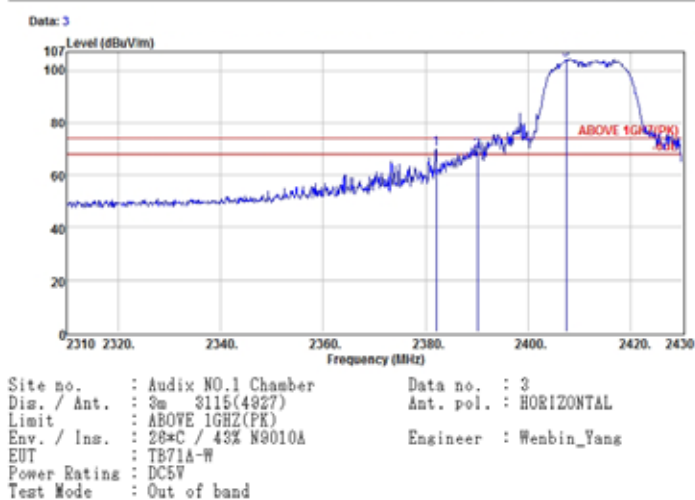

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2382.00	28.43	6.33	35.18	89.34	74.00	4.06	Peak
2	2390.04	28.47	6.34	34.26	89.07	74.00	4.33	Peak
3	2407.44	28.51	6.36	89.31	104.18	74.00	-30.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.

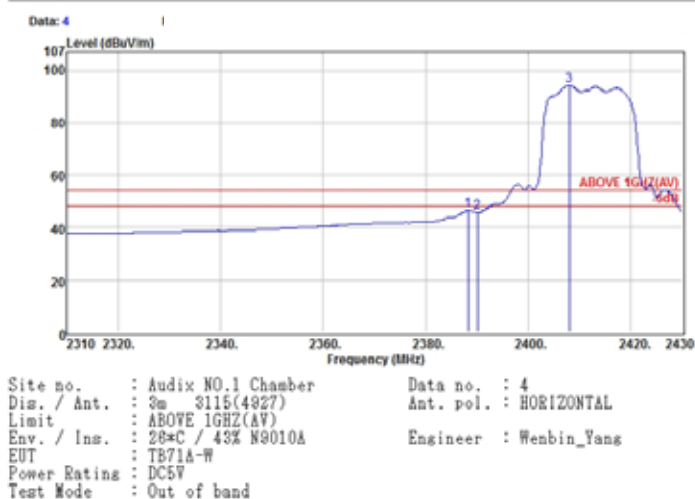

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2388.24	28.47	6.34	11.82	48.43	54.00	7.57	Average
2	2390.04	28.47	6.34	11.00	45.81	54.00	8.19	Average
3	2408.04	28.51	6.36	59.42	34.29	54.00	-40.29	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.

Test Mode : 802.11g, Transmit, Channel: 01, Frequency: 2412MHz

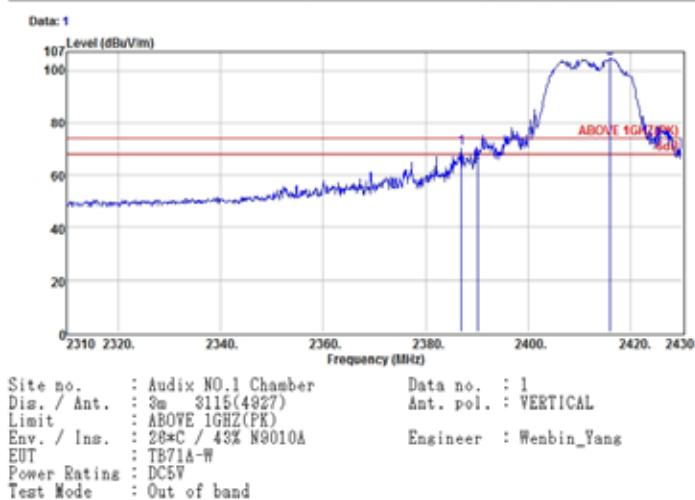

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.82	28.47	6.33	35.89	70.49	74.00	3.51	Peak
2	2390.04	28.47	6.34	23.86	64.67	74.00	9.33	Peak
3	2415.86	28.51	6.36	89.58	104.43	74.00	-30.43	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.

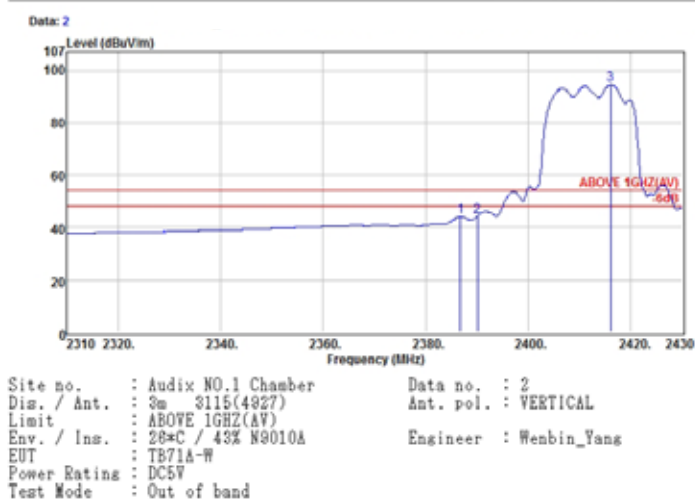


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2388.80	28.47	6.33	9.34	44.14	54.00	9.86	Average
2	2390.04	28.47	6.34	3.48	44.23	54.00	3.71	Average
3	2418.08	28.51	6.36	59.72	94.59	54.00	-40.59	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.

Test Mode : 802.11g, Transmit, Channel: 11, Frequency: 2462MHz

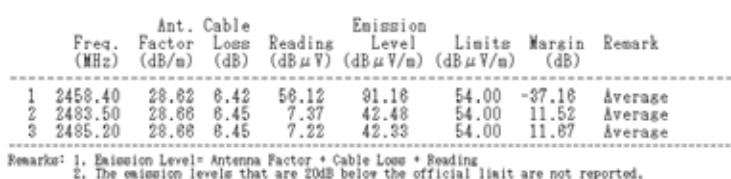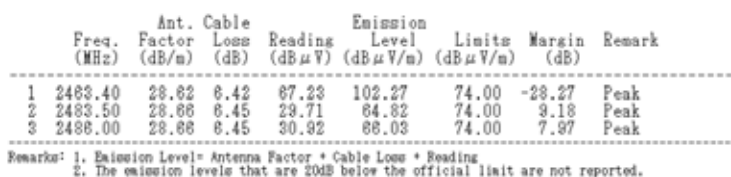


Test Mode : 802.11g, Transmit, Channel: 11, Frequency: 2462MHz

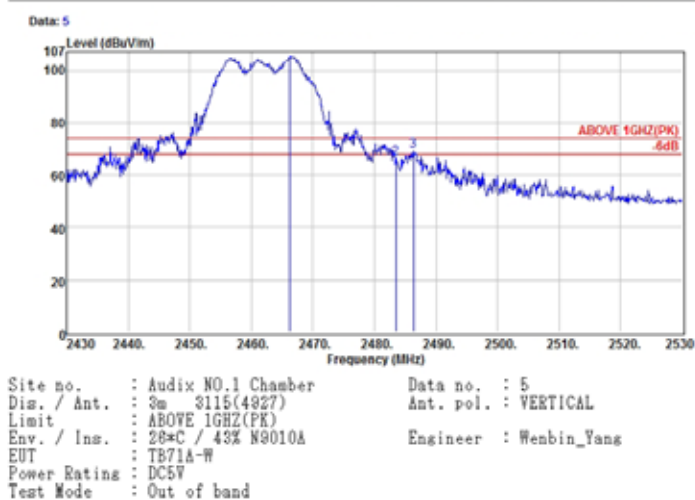

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2488.30	28.82	6.42	70.38	105.40	74.00	-31.40	Peak
2	2483.50	28.86	6.45	31.48	88.57	74.00	7.43	Peak
3	2488.30	28.88	6.45	34.24	89.35	74.00	4.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.

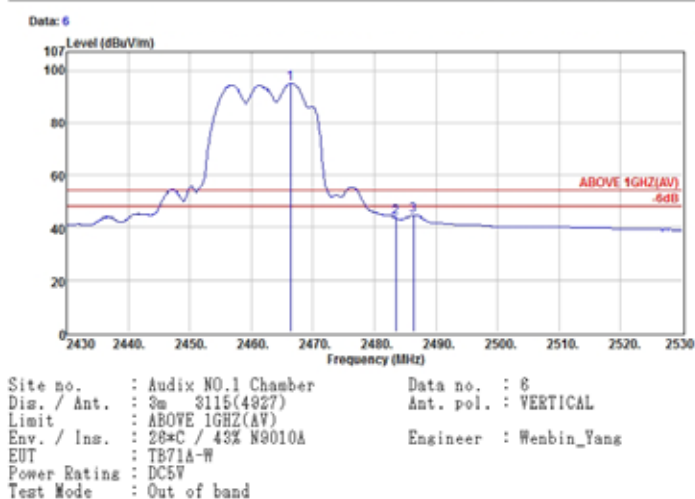


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2488.40	28.82	6.42	80.01	95.05	54.00	-41.05	Average
2	2483.50	28.86	6.45	8.80	43.71	54.00	10.29	Average
3	2488.30	28.88	6.45	9.58	44.89	54.00	9.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 05. 13 Temperature : 26°C


EUT : 7" Pocketable Pad Humidity : 43%

Test Mode : 802.11n-HT20, Transmit, Channel: 01, Frequency: 2412MHz

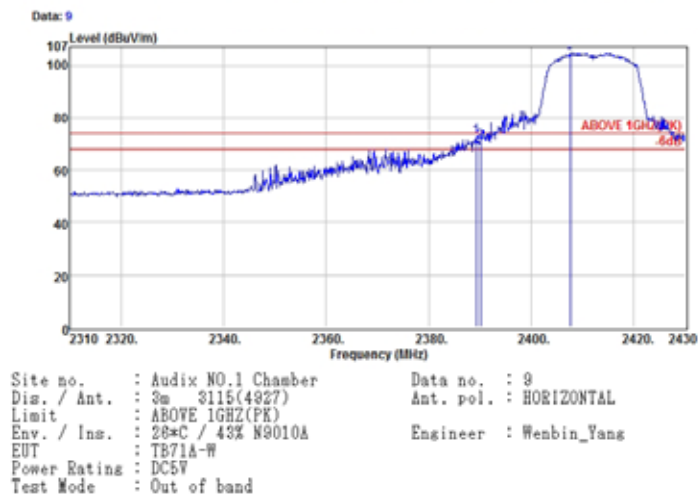

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.32	28.47	6.34	38.00	72.81	74.00	1.19	Peak
2	2390.04	28.47	6.34	38.17	70.98	74.00	3.02	Peak
3	2407.58	28.51	6.38	70.11	104.98	74.00	-30.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

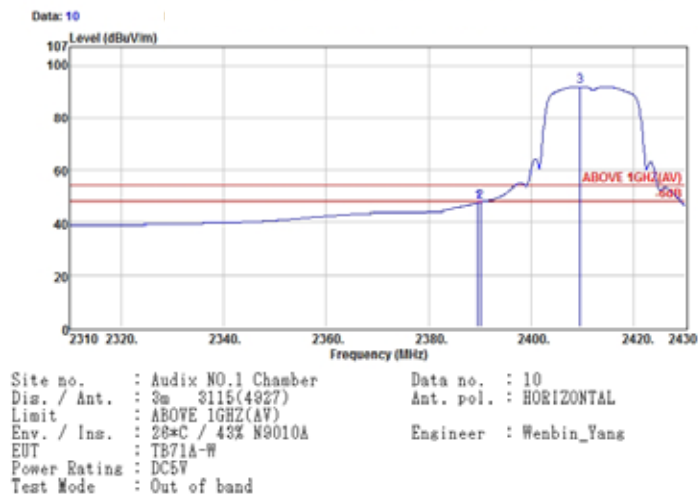


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.58	28.47	6.34	12.77	47.58	54.00	6.42	Average
2	2390.04	28.47	6.34	12.34	47.75	54.00	6.25	Average
3	2409.48	28.51	6.38	57.21	92.08	54.00	-38.08	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 05. 13 Temperature : 26°C


EUT : 7" Pocketable Pad Humidity : 43%

Test Mode : 802.11n-HT20, Transmit, Channel: 01, Frequency: 2412MHz

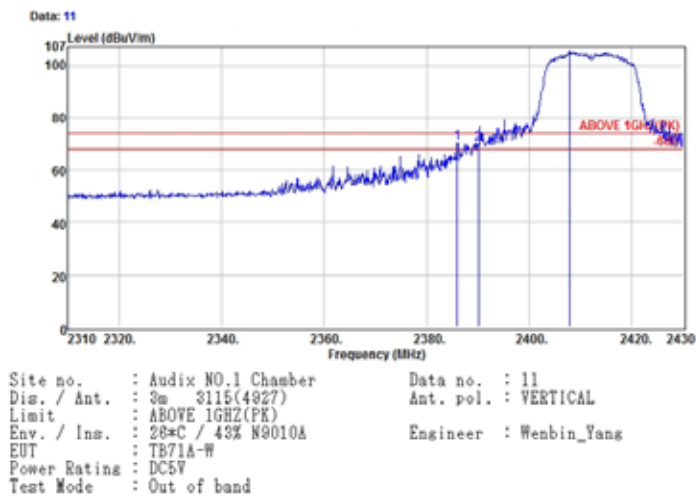

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2385.96	28.47	6.33	35.71	70.51	74.00	3.49	Peak
2	2390.04	28.47	6.34	35.28	70.10	74.00	3.90	Peak
3	2407.80	28.51	6.38	70.94	105.81	74.00	-31.81	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

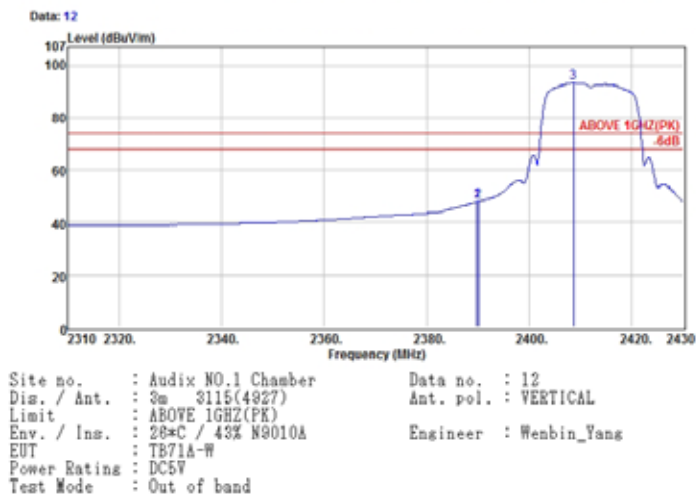



	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.80	28.47	6.34	13.13	47.84	74.00	26.06	Average
2	2390.04	28.47	6.34	13.24	48.05	74.00	25.95	Average
3	2408.84	28.51	6.38	58.44	93.31	74.00	-19.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Test Mode : 802.11n-HT20, Transmit, Channel: 11, Frequency: 2462MHz

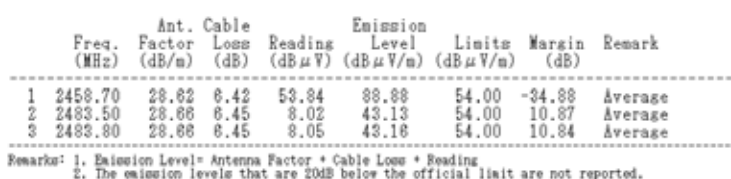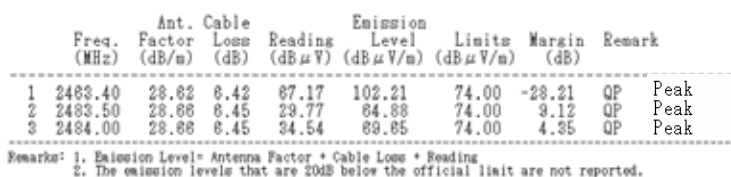

Test Mode : 802.11n-HT20, Transmit, Channel: 11, Frequency: 2462MHz

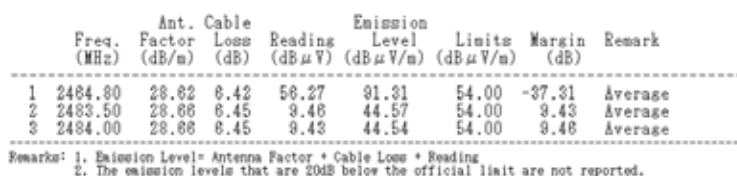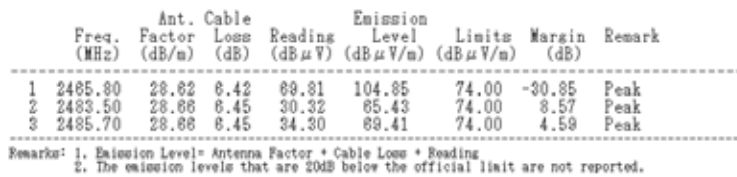

4.6.2. For BLE Function

For Frequency Range 30MHz~1000MHz:

The EUT emitted the fundamental frequency with data code at the stand, side and lying conditions.

The EUT select **worst position “lying”** and link AC adapter and with following test modes was performed during this section testing and all the test results are listed in section 4.6.2.1.

Mode	Type of Network	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1.	BLE	CH 0	2402MHz	Transmit	# 2	# 1
2.	BLE	CH 19	2440MHz		# 2	# 1
3.	BLE	CH 39	2480MHz		# 2	# 1

* Above all final readings were measured with Peak detector.

2.4GHz for Frequency above 1GHz:

The emissions (up to 25GHz) not reported are too low to be measured.

For Restricted Bands:

The EUT select **worst position “lying”** and link AC adapter and with following test modes was performed during this section testing and all the test results are listed in section 4.6.2.2. (The restricted bands defined in part 15.205(a))

Mode	Type of Network	Channel	Frequency	Test Mode	Reference Test Data	
					Horizontal	Vertical
1.	BLE	CH 0	2402MHz	Transmit	# 3, # 4	# 1, # 2
2.		CH 39	2480MHz		# 7, # 8	# 5, # 6

4.6.2.1. For 30-1000MHz Frequency Range Measurement Results

BLE, Transmit, Frequency: 2402MHz

Site no.	: Audix NO.1 Chamber	Data no.	: 2
Dis. / Ant.	: 3m CBL6112D 33821	Ant. pol.	: HORIZONTAL
Limit	: 30M-1G		
Env. / Ins.	: 26°C / 43% N9010A	Engineer	: Wenbin_Yang
EUT	: TB71A-W		
Power Rating	: DC5V		
Test Mode	: TX2402		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	59.10	7.23	1.60	14.20	23.03	40.00	16.97	QP
2	580.96	18.81	6.30	0.95	26.06	46.00	19.94	QP
3	871.96	21.38	7.20	-1.45	27.13	46.00	18.87	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no.	: Audix NO.1 Chamber	Data no.	: 1
Dis. / Ant.	: 3m CBL6112D 33821	Ant. pol.	: VERTICAL
Limit	: 30M-1G		
Env. / Ins.	: 26°C / 43% N9010A	Engineer	: Wenbin_Yang
EUT	: TB71A-W		
Power Rating	: DC5V		
Test Mode	: TX2402		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	98.87	11.11	2.10	8.85	22.06	43.50	21.44	QP
2	493.66	17.71	6.40	-0.48	23.63	46.00	22.37	QP
3	807.94	20.69	7.00	-1.84	25.85	46.00	20.15	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

BLE, Transmit, Frequency: 2440MHz

Site no.	: Audix NO.1 Chamber	Data no.	: 2
Dis. / Ant.	: 3m CBL6112D 33821	Ant. pol.	: HORIZONTAL
Limit	: 30M-1G		
Env. / Ins.	: 26°C / 43% N9010A	Engineer	: Wenbin_Yang
EUT	: TB71A-W		
Power Rating	: DC5V		
Test Mode	: TX2440		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	60.07	7.00	1.60	13.05	21.65	40.00	18.35	QP
2	496.57	17.75	6.40	1.30	25.45	46.00	20.55	QP
3	834.13	21.01	7.10	-1.43	26.68	46.00	19.32	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no.	: Audix NO.1 Chamber	Data no.	: 1
Dis. / Ant.	: 3m CBL6112D 33821	Ant. pol.	: VERTICAL
Limit	: 30M-1G		
Env. / Ins.	: 26°C / 43% N9010A	Engineer	: Wenbin_Yang
EUT	: TB71A-W		
Power Rating	: DC5V		
Test Mode	: TX2440		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	60.07	7.00	1.60	14.63	23.23	40.00	16.77	QP
2	474.26	17.44	5.85	-0.31	22.98	46.00	23.02	QP
3	816.67	20.80	7.00	-1.51	26.29	46.00	19.71	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

BLE, Transmit, Frequency: 2480MHz

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : TB71A-W
 Power Rating : DC5V
 Test Mode : TX2480

Data no. : 2
 Ant. pol. : HORIZONTAL
 Engineer : Wenbin_Yang

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	97.90	10.92	2.10	8.85	21.87	43.50	21.63	QP
2	576.11	18.76	6.40	1.83	26.99	46.00	19.01	QP
3	817.64	20.81	7.00	-2.29	25.52	46.00	20.48	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : Audix NO.1 Chamber
 Dis. / Ant. : 3m CBL6112D 33821
 Limit : 30M-1G
 Env. / Ins. : 26°C / 43% N9010A
 EUT : TB71A-W
 Power Rating : DC5V
 Test Mode : TX2480

Data no. : 1
 Ant. pol. : VERTICAL
 Engineer : Wenbin_Yang

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	60.07	7.00	1.60	13.91	22.51	40.00	17.49	QP
2	394.72	16.38	4.70	1.72	22.80	46.00	23.20	QP
3	580.96	18.81	6.30	0.30	25.41	46.00	20.59	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

4.6.2.2. Restricted Bands Measurement Results

Date of Test : 2014. 05. 13 Temperature : 26°C


EUT : 7" Pocketable Pad Humidity : 43%

Test Mode : BLE, Transmit, Channel: 0, Frequency: 2402MHz

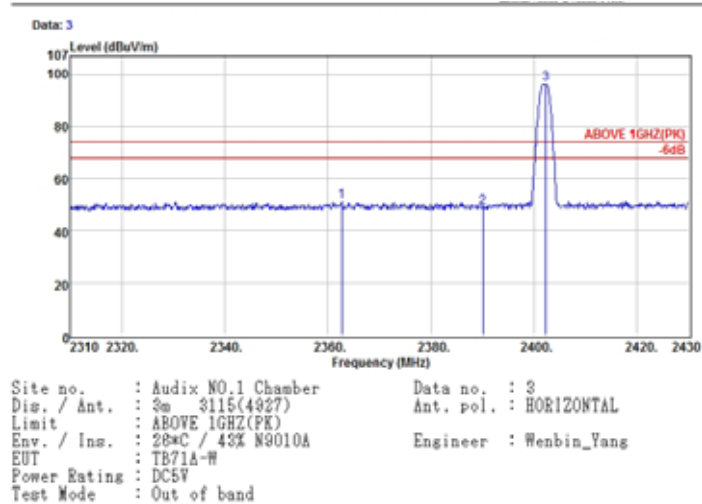

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2382.88	28.40	6.30	16.57	51.27	74.00	22.73	Peak
2	2390.04	28.47	6.34	14.09	48.90	74.00	25.10	Peak
3	2402.28	28.47	6.38	61.83	98.48	74.00	-22.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

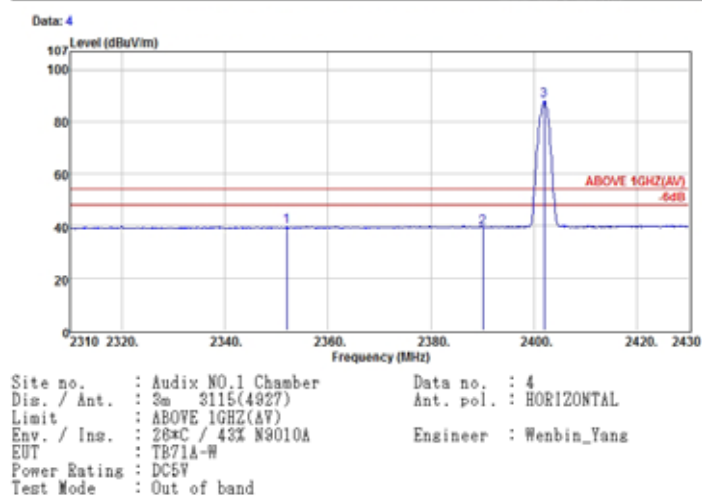


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2352.00	28.40	6.29	5.09	39.78	54.00	14.22	Average
2	2390.04	28.47	6.34	4.85	39.48	54.00	14.54	Average
3	2401.92	28.47	6.38	53.48	88.31	54.00	-34.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : 2014. 05. 13 Temperature : 26°C


EUT : 7" Pocketable Pad Humidity : 43%

Test Mode : BLE, Transmit, Channel: 0, Frequency: 2402MHz

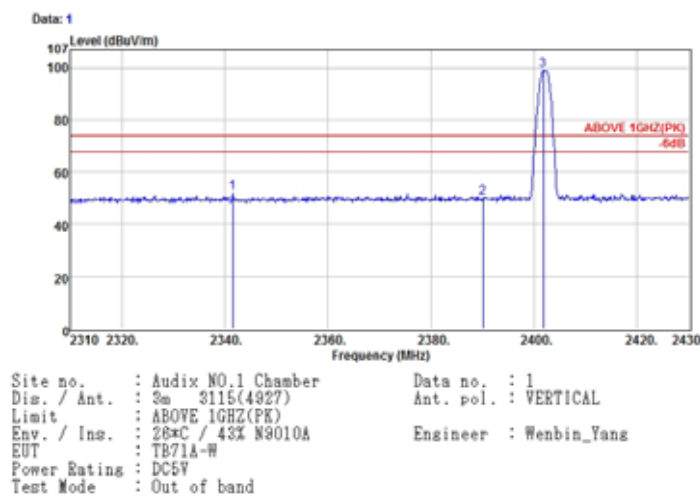

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
1	2341.56	28.36	6.28	17.31	51.95	74.00	22.05	Peak
2	2390.04	28.47	6.34	15.43	50.24	74.00	23.76	Peak
3	2401.80	28.47	6.35	64.11	89.93	74.00	-24.93	Peak

Remarks: 1. Emission Level = Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

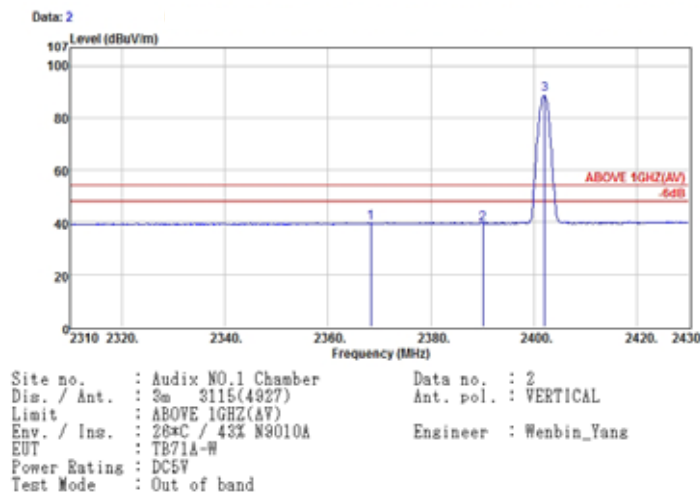

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
1	2368.32	28.40	6.31	5.01	39.72	54.00	14.28	Average
2	2390.04	28.47	6.34	4.51	39.32	54.00	14.68	Average
3	2402.04	28.47	6.36	54.34	89.17	54.00	-35.17	Average

Remarks: 1. Emission Level = Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

Test Mode : BLE, Transmit, Channel: 39, Frequency: 2480MHz



	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	2478.80	28.86	6.44	64.79	38.89	74.00	-25.89	Peak
2	2483.50	28.86	6.45	13.72	48.93	74.00	25.17	Peak
3	2514.80	28.76	6.49	16.09	51.94	74.00	22.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported.




	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
1	2479.90	28.66	6.44	54.33	39.43	54.00	-35.43	Average
2	2493.50	28.68	8.45	4.22	39.33	54.00	14.87	Average
3	2517.00	28.76	6.49	4.88	39.33	54.00	14.07	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
2. The emission levels that are 20dB below the official limit are not reported

Date of Test : 2014. 05. 13 Temperature : 26°C


EUT : 7" Pocketable Pad Humidity : 43%

Test Mode : BLE, Transmit, Channel: 39, Frequency: 2480MHz

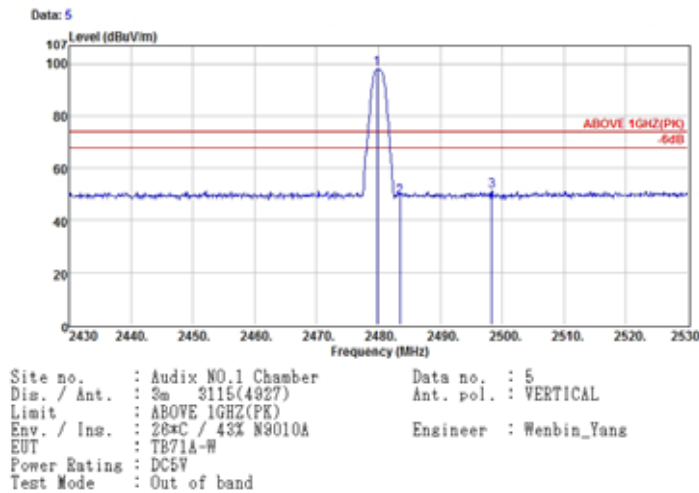

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
1	2479.80	28.86	6.44	63.01	98.11	74.00	-24.11	Peak
2	2483.50	28.88	6.45	13.98	49.07	74.00	24.93	Peak
3	2498.30	28.70	6.47	16.08	51.26	74.00	22.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.

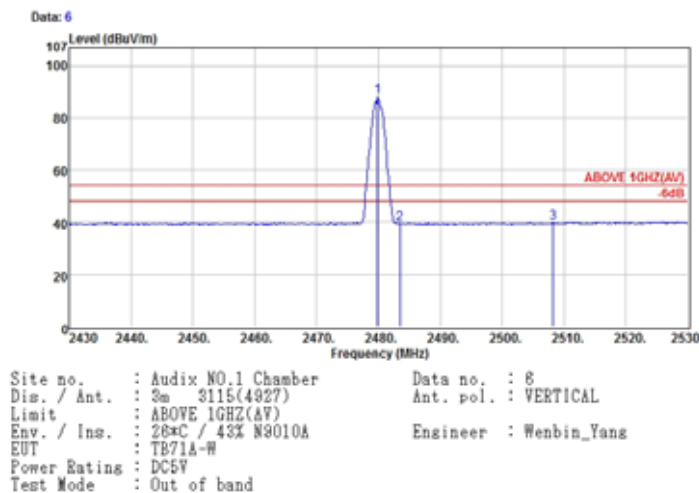

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
1	2479.90	28.86	6.44	53.06	88.16	54.00	-34.16	Average
2	2483.50	28.88	6.45	4.31	39.42	54.00	14.58	Average
3	2508.20	28.76	6.48	4.71	39.95	54.00	14.05	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 2. The emission levels that are 20dB below the official limit are not reported.


5. 6dB BANDWIDTH MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Due Date
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	2014. 07. 30

5.2. Block Diagram of Test Setup

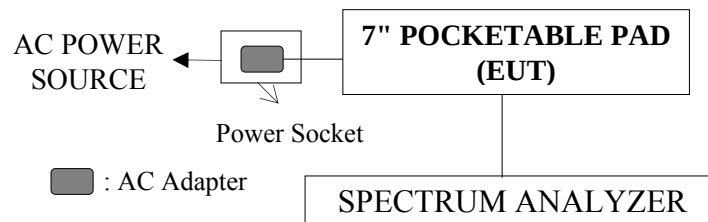

5.3. Specification Limits [§15.247(a)(2)]

The minimum 6dB bandwidth shall be at least 500kHz.

5.4. Operating Condition of EUT

The test program “WL command” for WLAN and test program “Blue tool” for BLE was used to enable the EUT to transmit data at different channel frequency individually.

5.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 1.5% EBW, $VBW \geq 3 \times RBW$. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

The measurement guideline was according to 558074 D01 DTS Meas Guidance v03r01

5.6. Test Results

PASSED. All the test results are attached in next pages.

5.6.1. WLAN Function

Test Date : 2014. 05. 02 Temperature : 26°C Humidity : 50%

Mode	Type of Network	Channel	Frequency	6dB Bandwidth (MHz)
1.	802.11b	CH 1	2412MHz	9.00
2.		CH 6	2437MHz	9.00
3.		CH 11	2462MHz	9.00
4.	802.11g	CH 1	2412MHz	16.00
5.		CH 6	2437MHz	16.00
6.		CH 11	2462MHz	16.00
7.	802.11n-HT20	CH 1	2412MHz	16.00
8.		CH 6	2437MHz	16.00
9.		CH 11	2462MHz	16.00

[Limit: least 500kHz]

802.11b, Frequency: 2412MHz



802.11b, Frequency: 2437MHz



802.11b, Frequency: 2462MHz



802.11g, Frequency: 2412MHz




802.11g, Frequency: 2437MHz




802.11g, Frequency: 2462MHz




802.11n-HT20, Frequency: 2412MHz

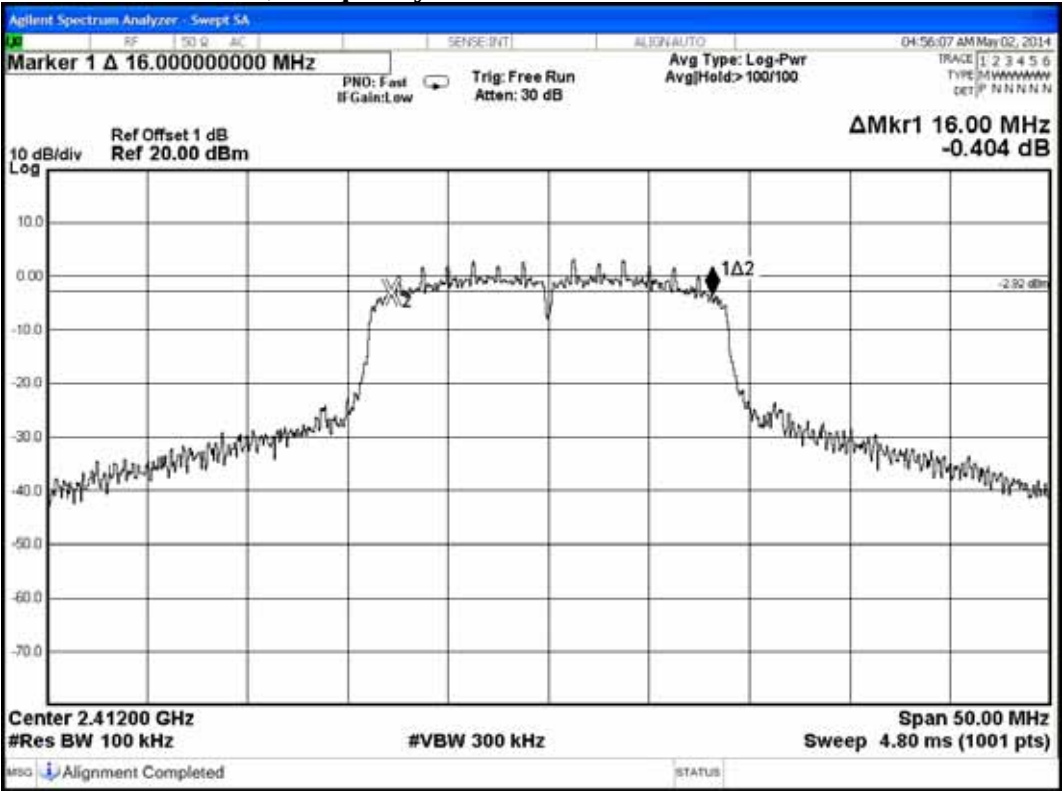

802.11n-HT20, Frequency: 2437MHz

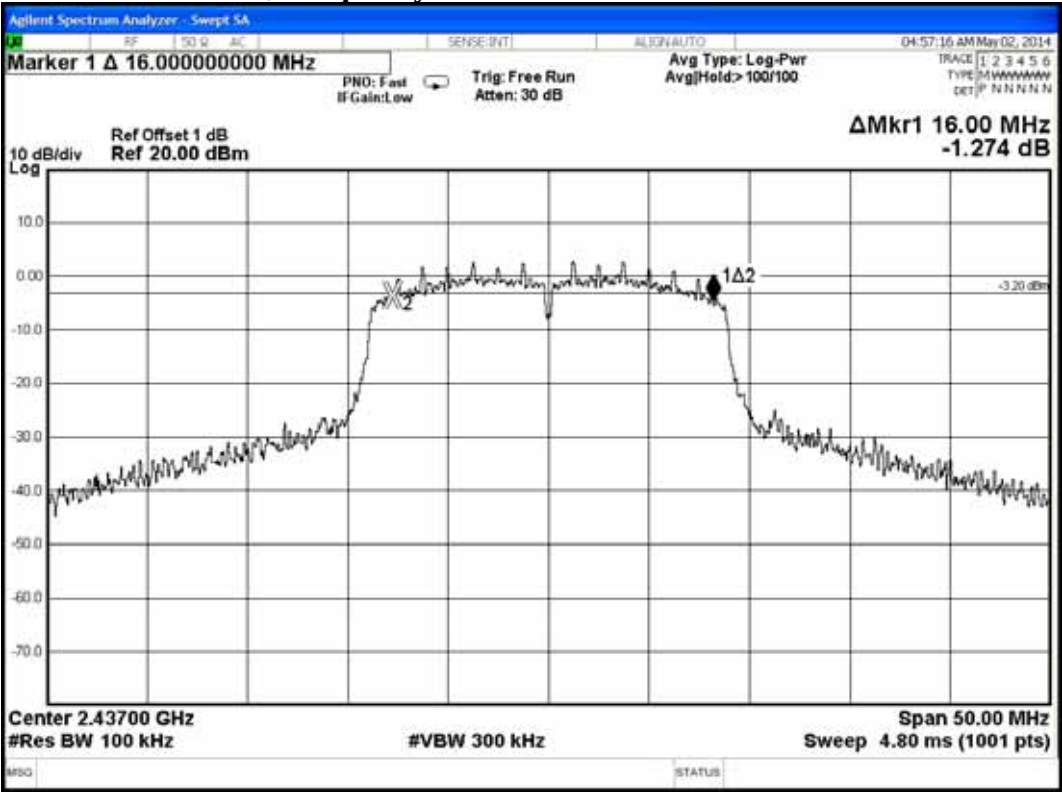

802.11n-HT20, Frequency: 2462MHz

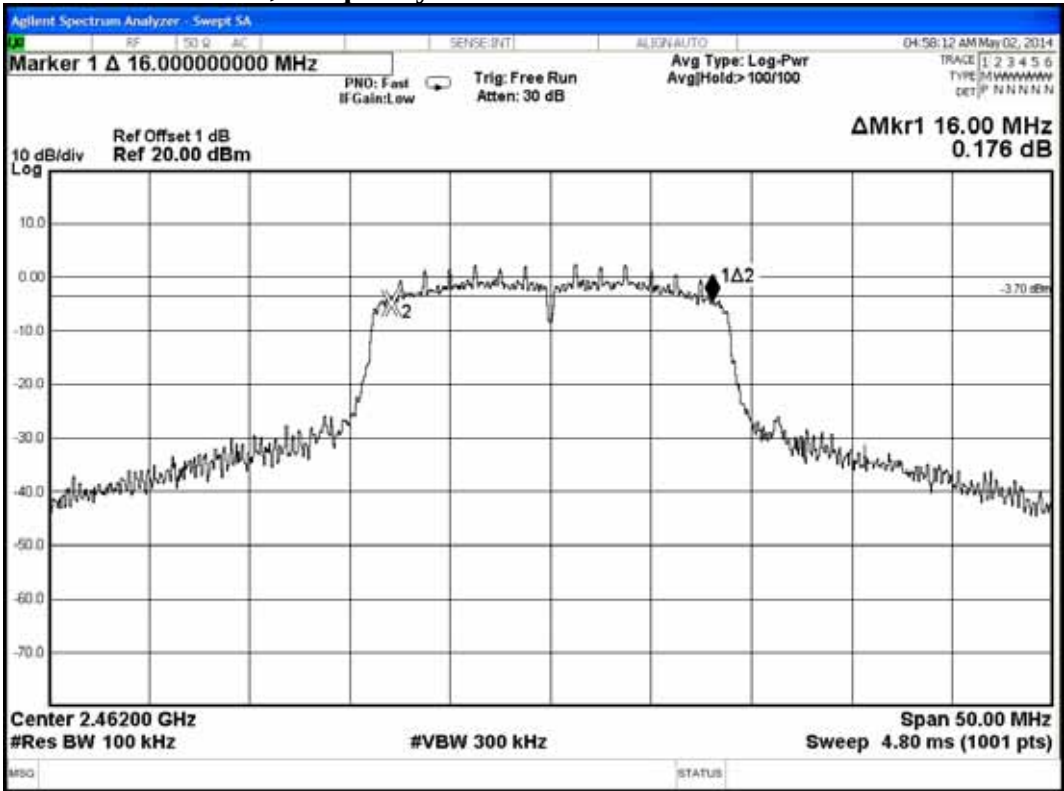

5.6.2. BT Function


Test Date : 2014. 05. 02 Temperature : 26°C Humidity : 50%

Test Date : 2014. 05. 21 Temperature : 25°C Humidity : 48%


Mode	Channel	Frequency	6dB Bandwidth (kHz)
1.	CH 0	2402MHz	523
2.	CH 19	2440MHz	525
3.	CH 39	2480MHz	510

[Limit: least 500kHz]

BLE, Frequency: 2402MHz

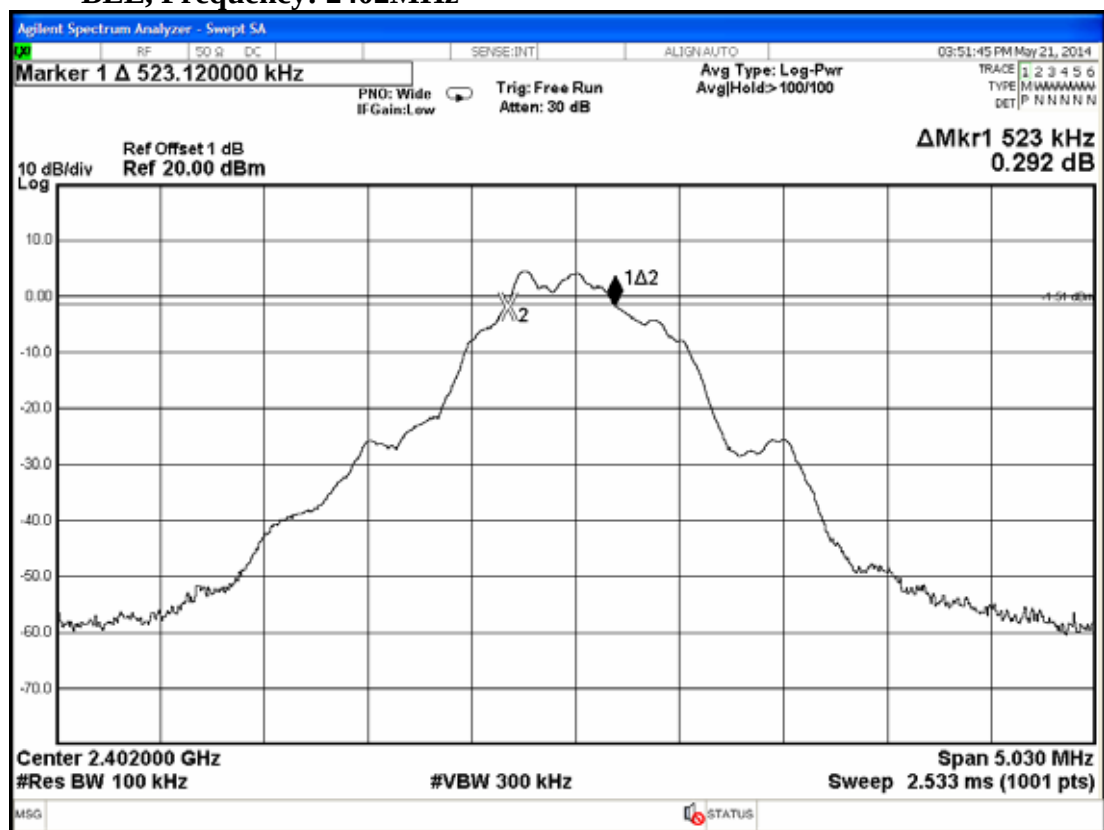

BLE, Frequency: 2440MHz

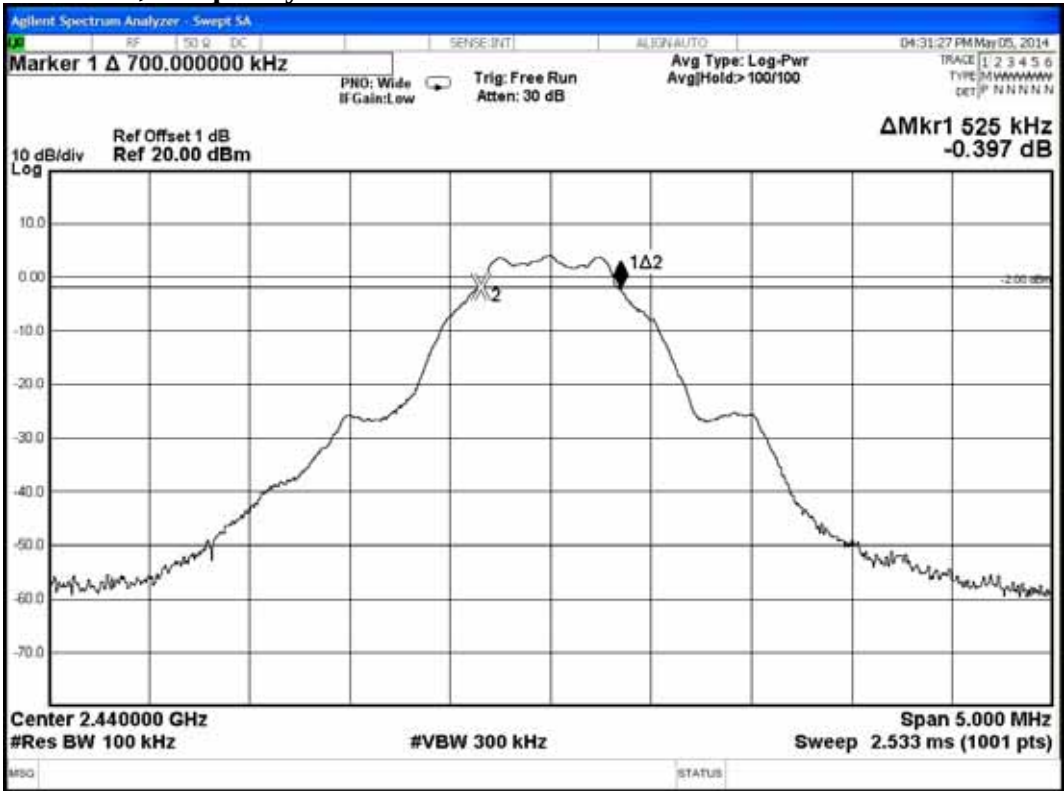

BLE, Frequency: 2480MHz




6. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

6.1. Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Due Date
1.	Power Meter	Anritsu	ML2495A	1145008	2014. 10. 22
2.	Power Sensor	Anritsu	MA2411B	1126096	2014. 10. 22

6.2. Block Diagram of Test Setup

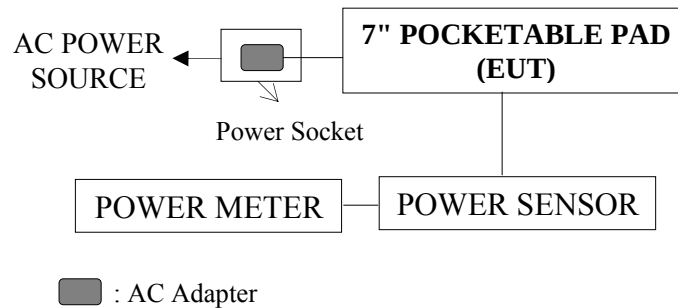

6.3. Specification Limits (§15.247(b)-(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz & 5725-5850MHz is : 1Watt. (30dBm)

6.4. Operating Condition of EUT

The test program “WL command” for WLAN and test program “Blue tool” for BLE was used to enable the EUT to transmit data at different channel frequency individually.

6.5. Test Procedure

The transmitter output was connected to the power sensor and record the reading of power meter.

The measurement guideline was according to 558074 D01 DTS Meas Guidance v03r01.

Pursuant to KDB 662911, we executed conducted test for chain 0 as worse performance, and a factor $10\log(N)$ shall be added, where N is the number of output.

Test Results

PASSED. All the test results are listed below.

6.5.1. WLAN Function

Test Date: 2014. 05. 02 Temperature: 26°C Humidity: 50%

Mode	Type of Network	Channel	Frequency	Peak Output Power (dBm)		Total Peak Output Power (dBm)	Power Setting
				Main (Chain 0)	AUX (Chain 1)		
1.	802.11b	CH 1	2412MHz	15.95	---	15.28	62
2.		CH 6	2437MHz	15.94	---	15.31	62
3.		CH 11	2462MHz	15.98	---	15.71	61
4.	802.11g	CH 1	2412MHz	12.51	12.65	15.59	47
5.		CH 6	2437MHz	14.10	14.33	17.23	52
6.		CH 11	2462MHz	13.90	14.25	17.09	52
7.	802.11n-HT20	CH 1	2412MHz	14.19	13.55	16.89	54
8.		CH 6	2437MHz	14.25	13.57	16.93	52
9.		CH 11	2462MHz	13.40	13.14	16.28	50

[Limit: 1Watt. (30dBm)]

6.5.2. BLE Function

Test Date: 2014. 05. 02 Temperature: 26°C Humidity: 50%

Mode	Channel	Frequency	Peak Output Power (dBm)
1.	CH 0	2402MHz	3.05
2.	CH 19	2440MHz	3.03
3.	CH 39	2480MHz	3.14

[Limit: 1Watt. (30dBm)]

7. EMISSION LIMITATIONS MEASUREMENT

7.1. Test Equipment

The following test equipment was used during the emission limitations test :

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Due Date
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	2014. 07. 30

7.2. Block Diagram of Test Setup

The same as section.5.2

7.3. Specification Limits [§15.247(c)]

7.3.1. In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).(※This test result attaching to §4.6.1.2 and §4.6.2.2)

7.3.2. The reference level for determining limit of emission limitations is according to the value measured indicated in plots at section 9.6.

7.4. Operating Condition of EUT

Test program RF Test is used for enabling the EUT transmitting continuing.

7.5. Test Procedure

The RF output of EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 100kHz RBW and 300kHz VBW.

The measurement guideline was according to 558074 D01 DTS Meas Guidance v03r01.

Pursuant to KDB 662911, we executed conducted test for chain 0 as worse performance, and a factor $10\log(N)$ shall be added, where N is the number of output.



7.6. Test Results




PASSED. The testing data was attached in the next pages.

Test Date : 2014. 05. 16 Temperature : 25°C Humidity : 60%



Test Date : 2014. 05. 21 Temperature : 25°C Humidity : 48%




7.6.1. WLAN Function
802.11b, Frequency: 2412MHz

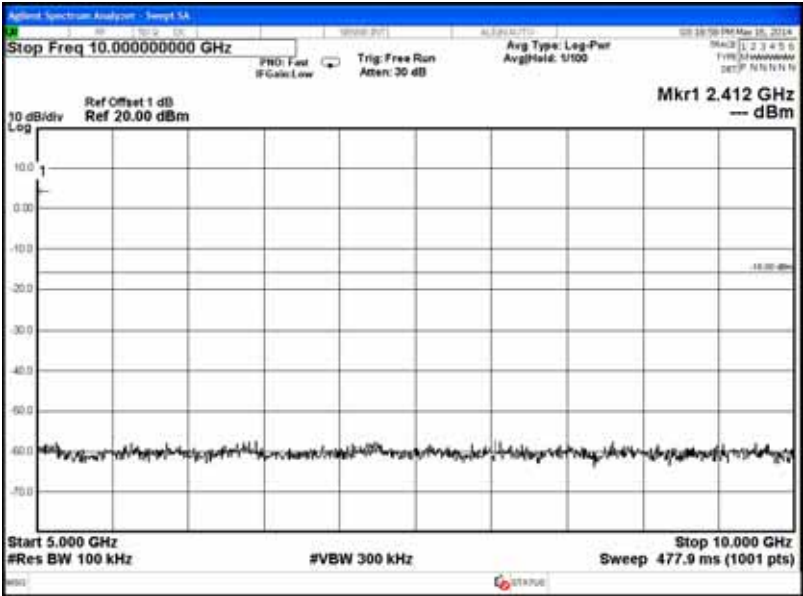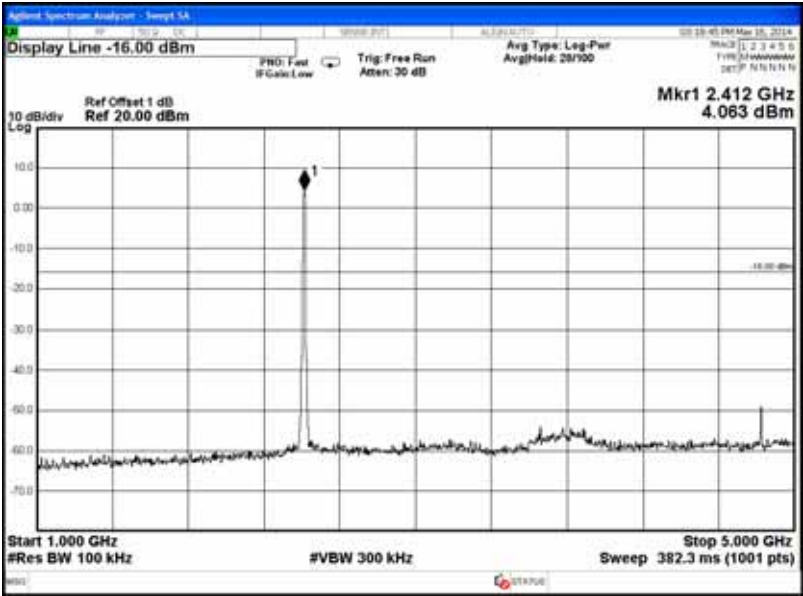

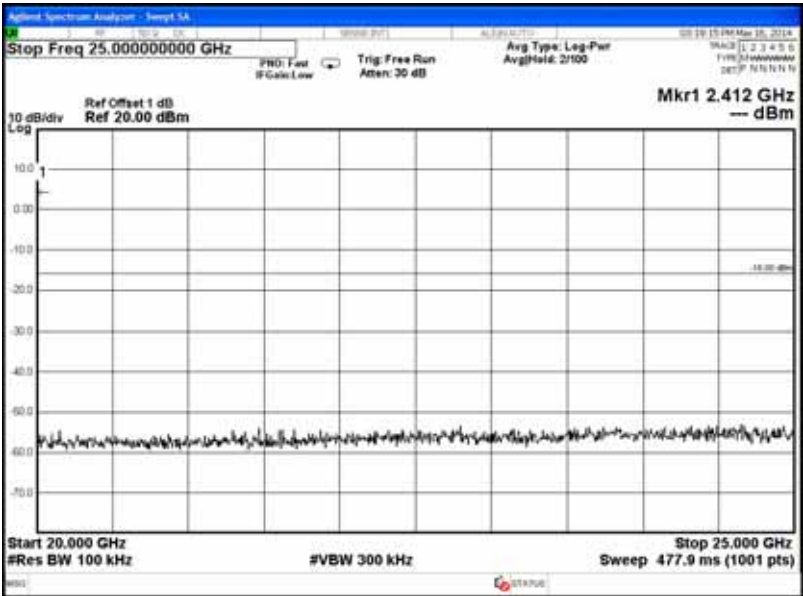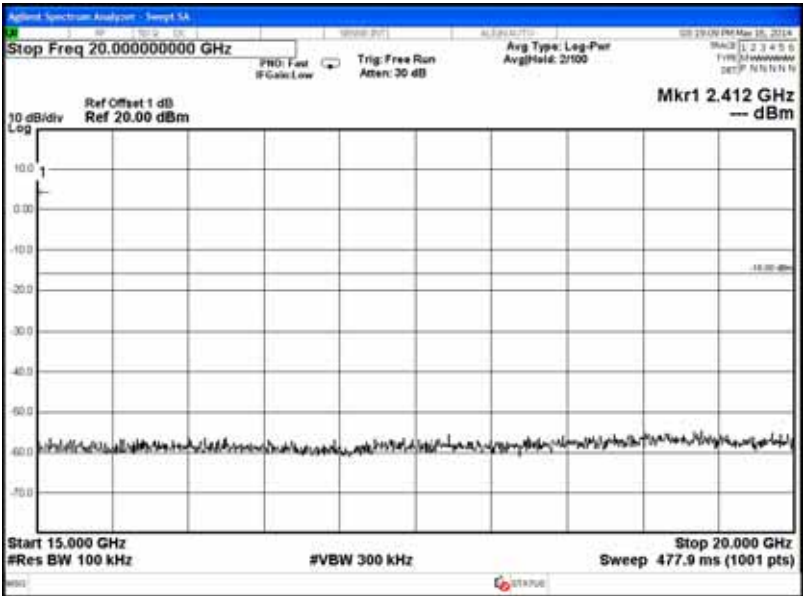
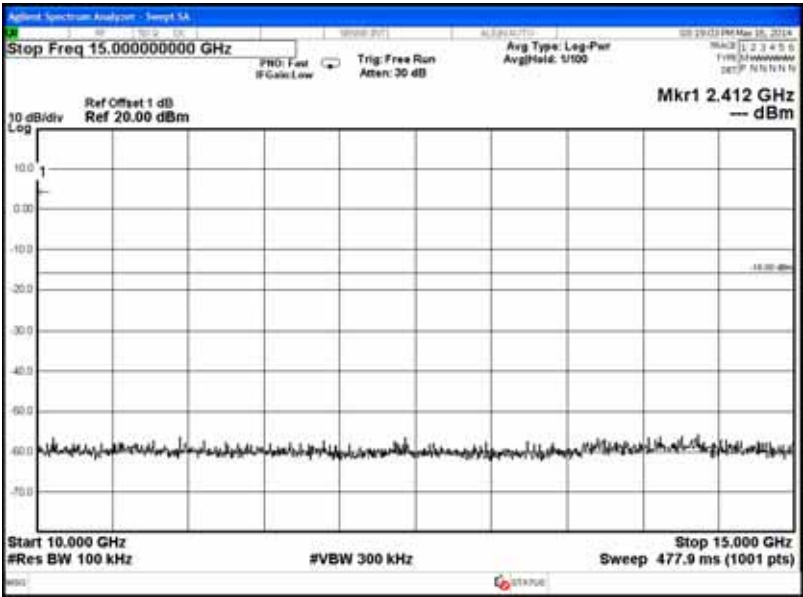





802.11b, Frequency: 2437MHz

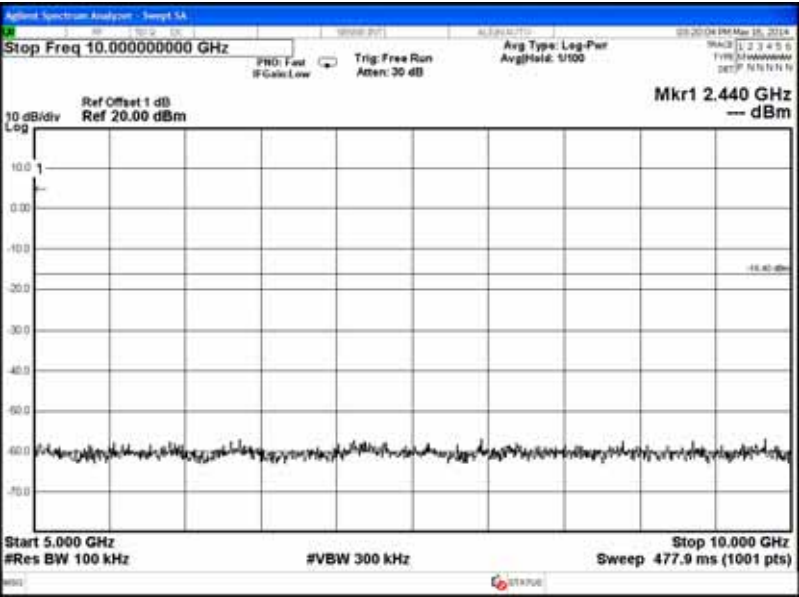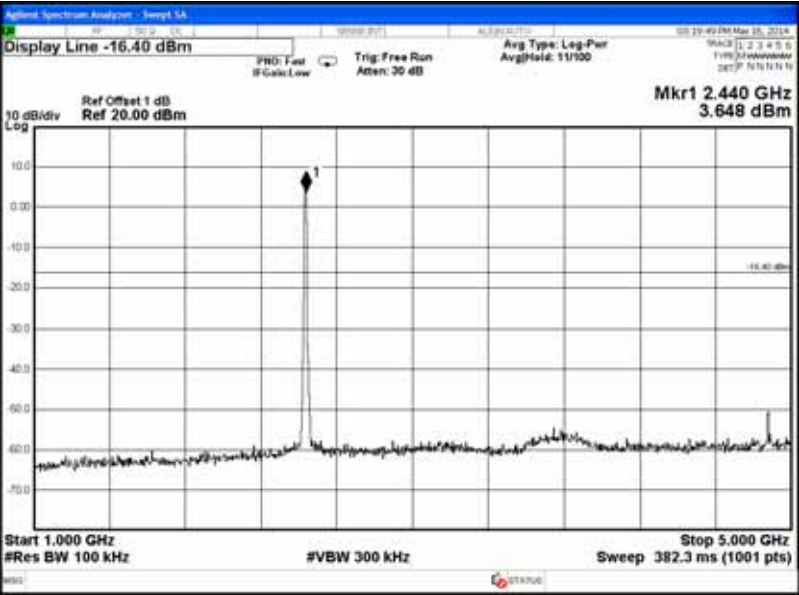

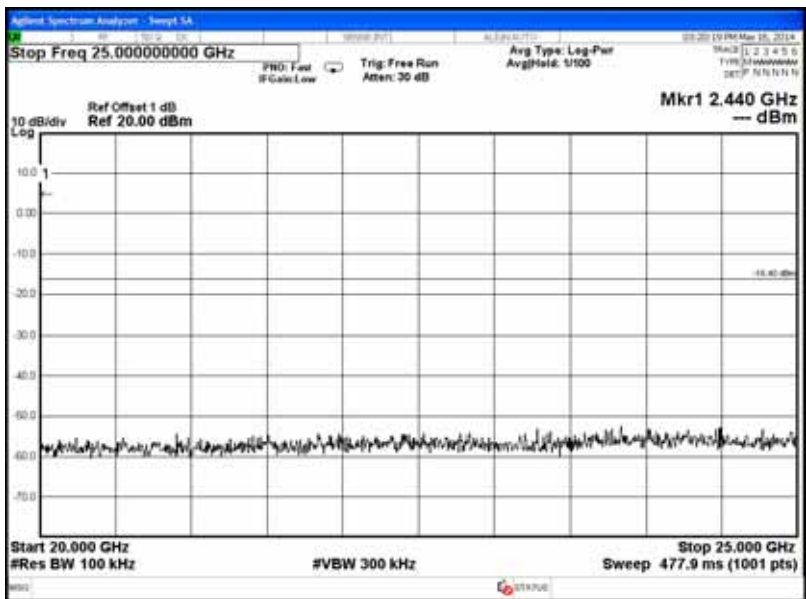
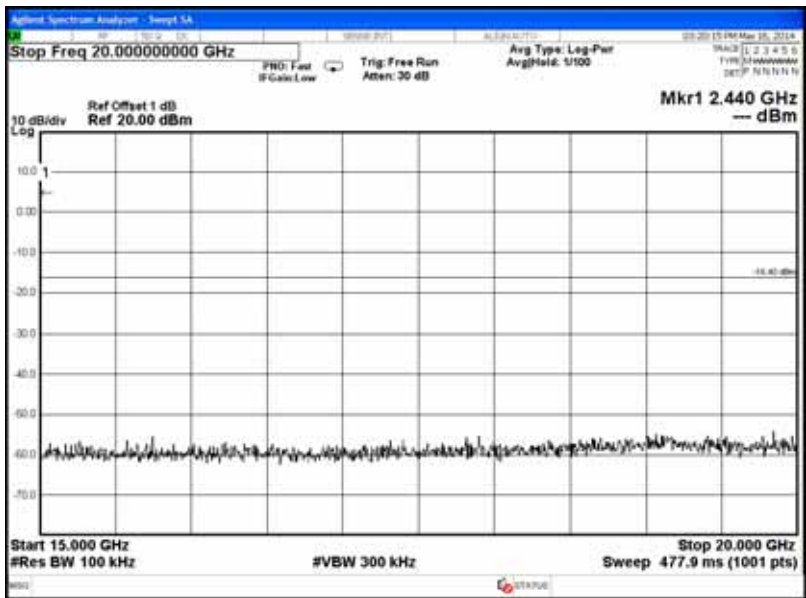
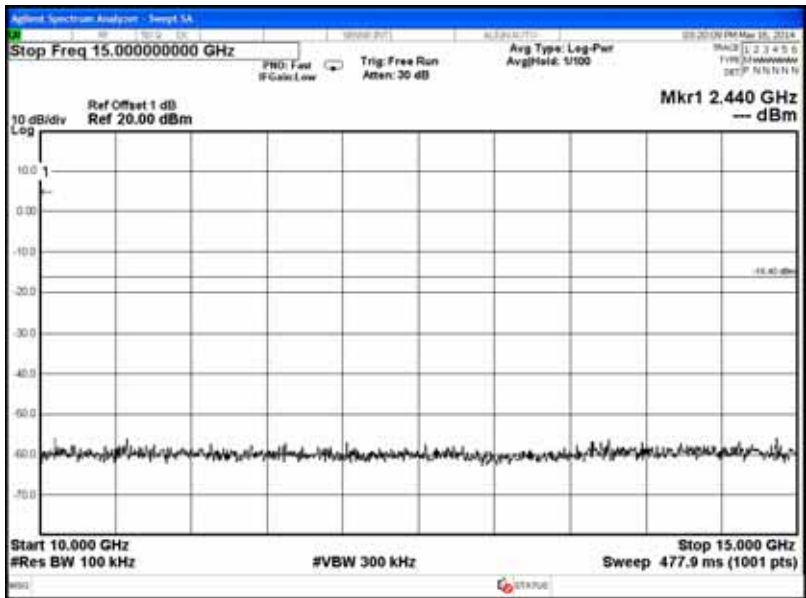





802.11b, Frequency: 2462MHz

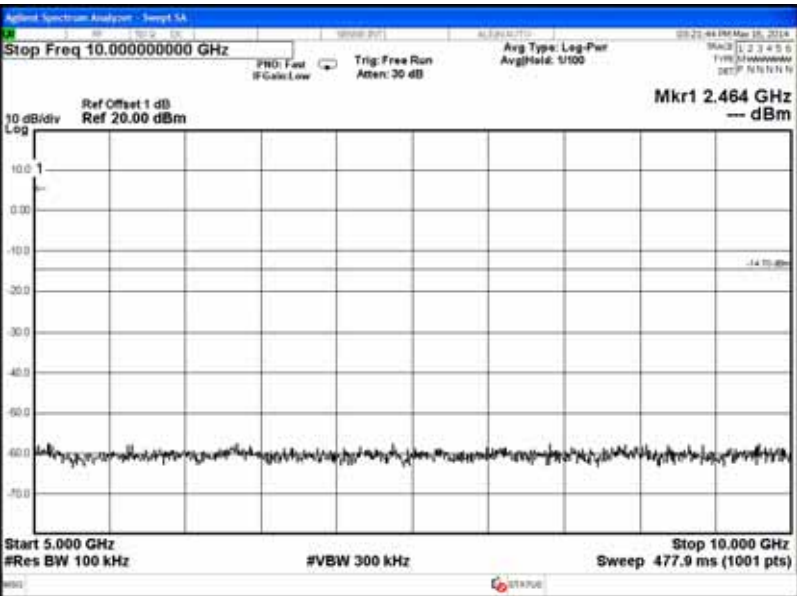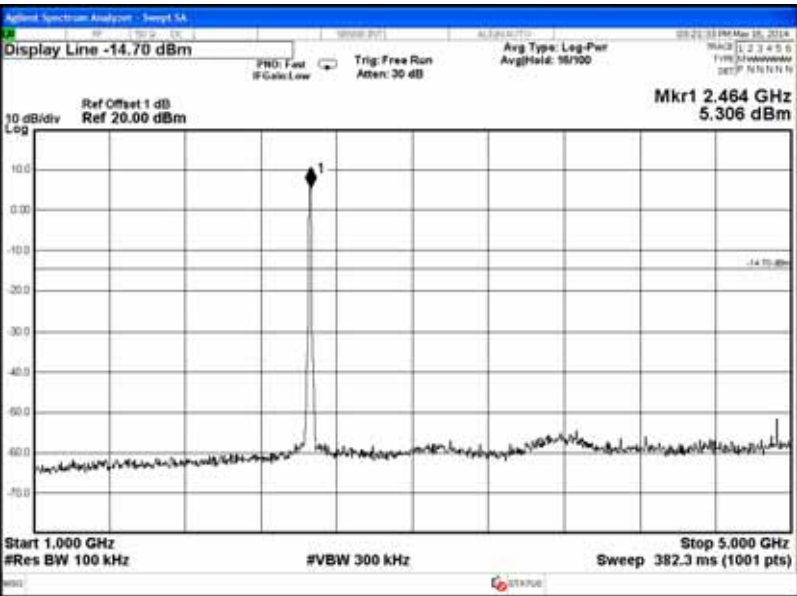

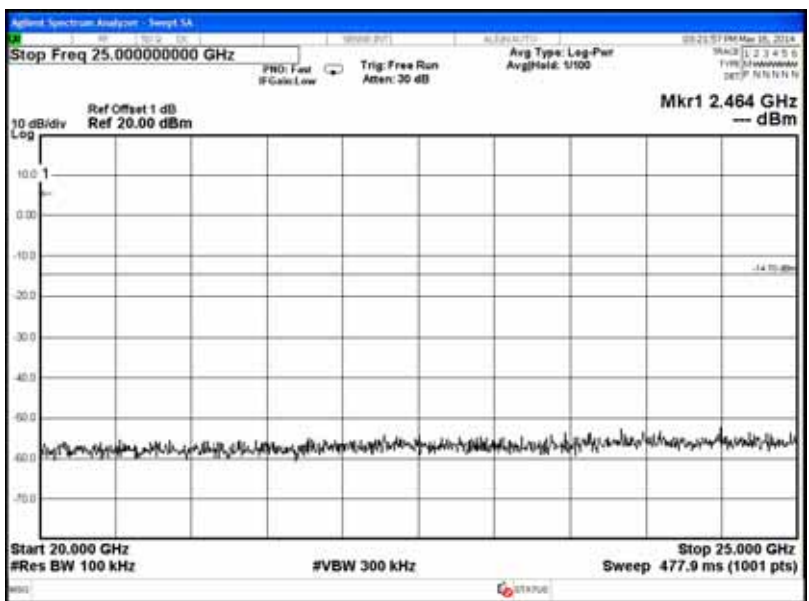
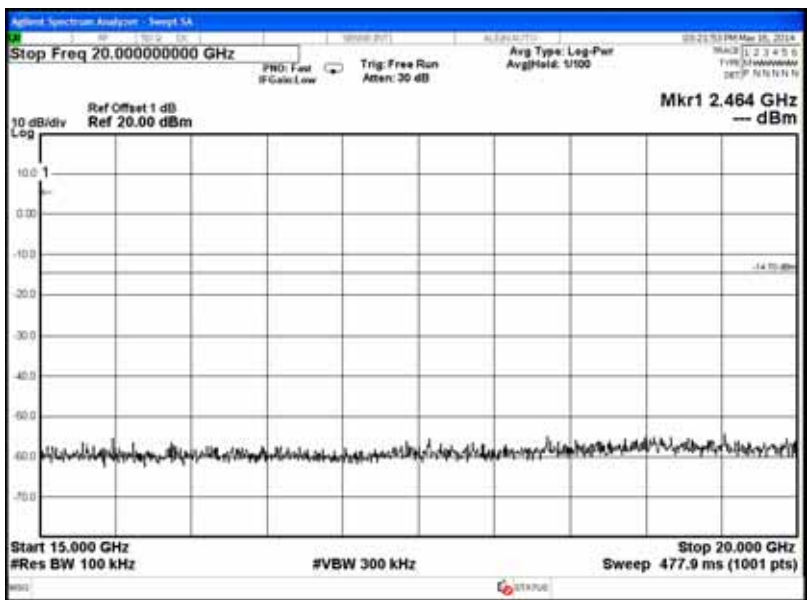
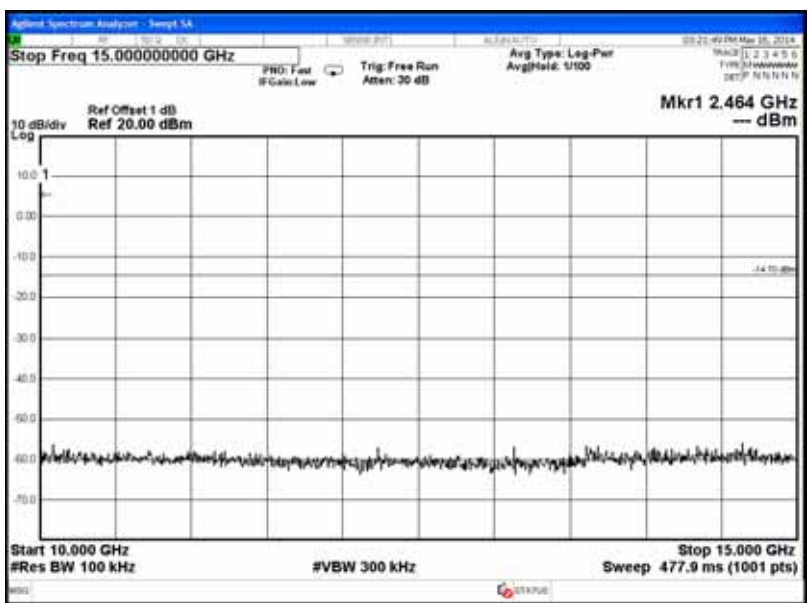





802.11g, Frequency: 2412MHz

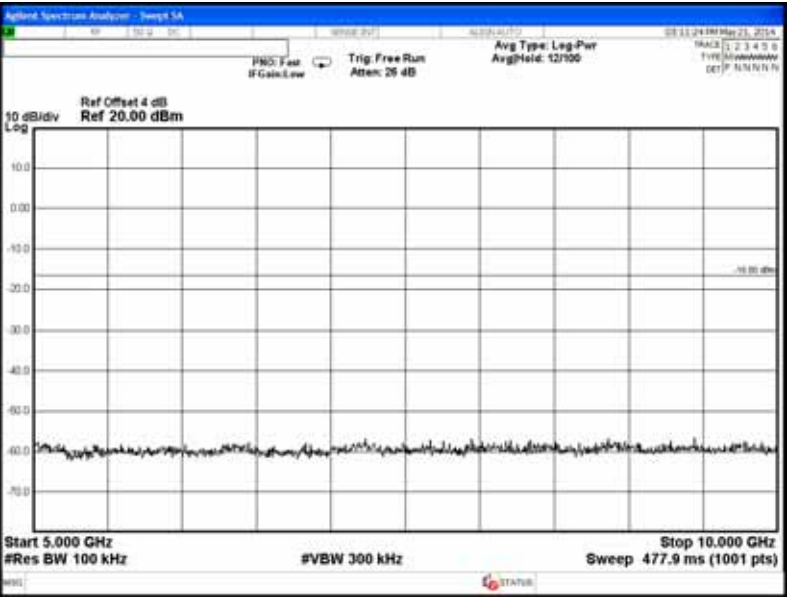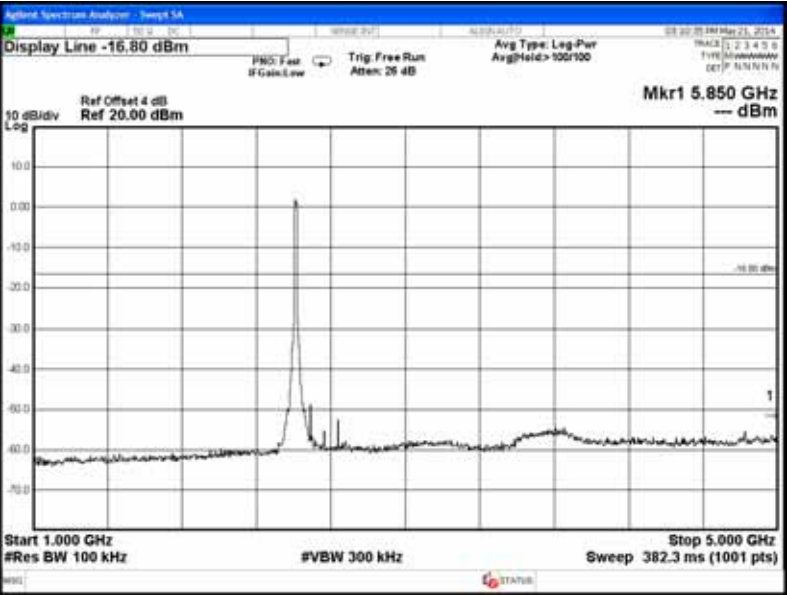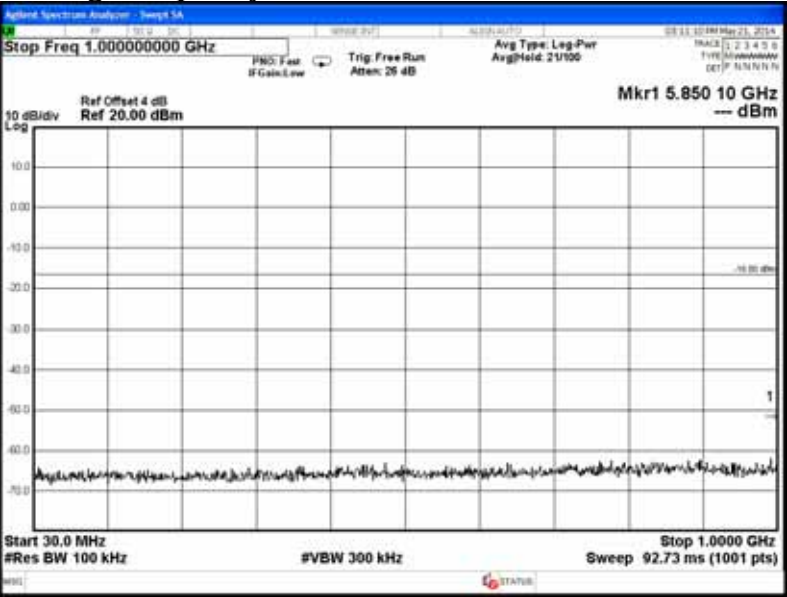

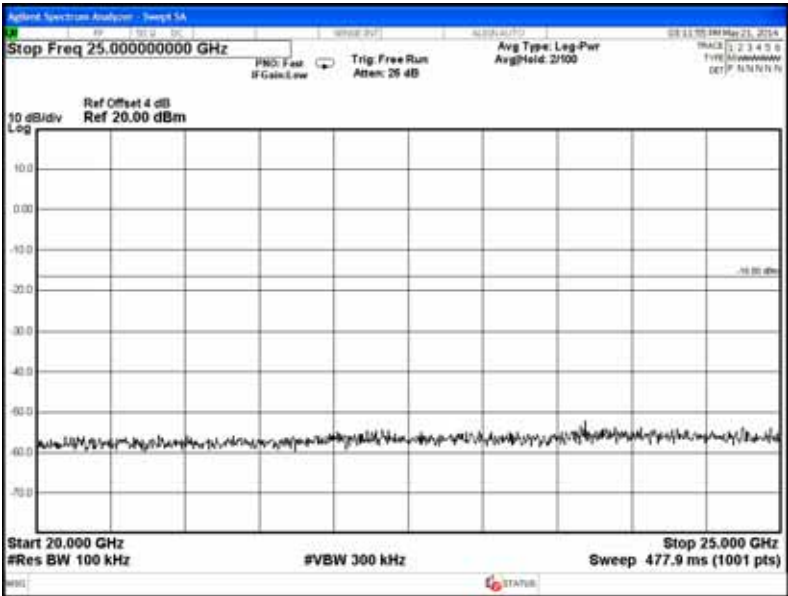
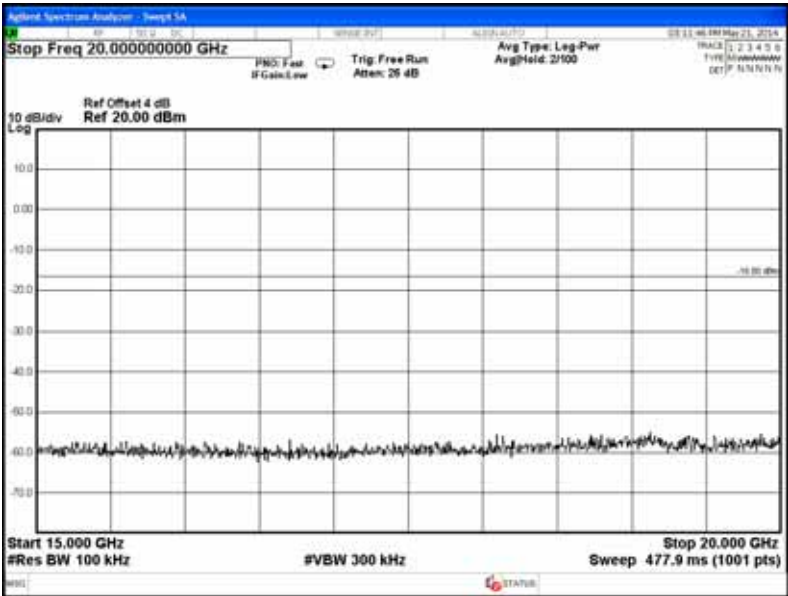
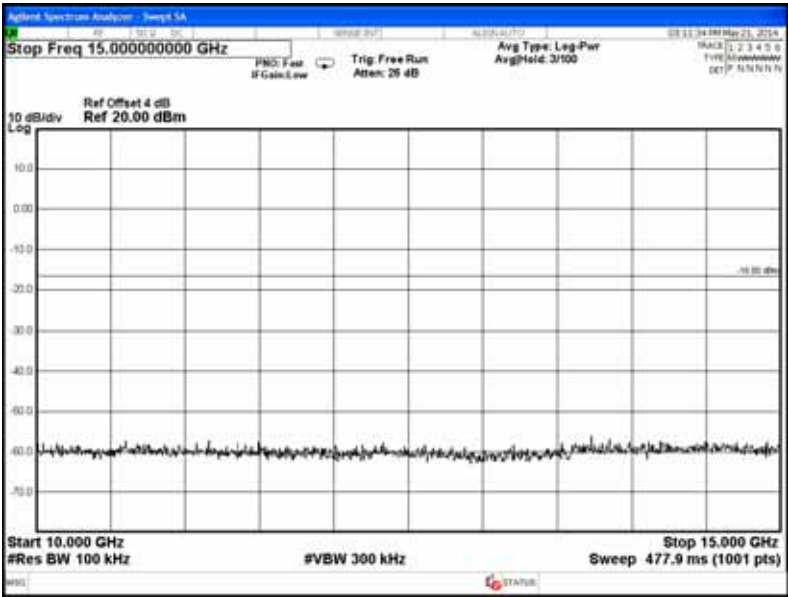





802.11g, Frequency: 2437MHz

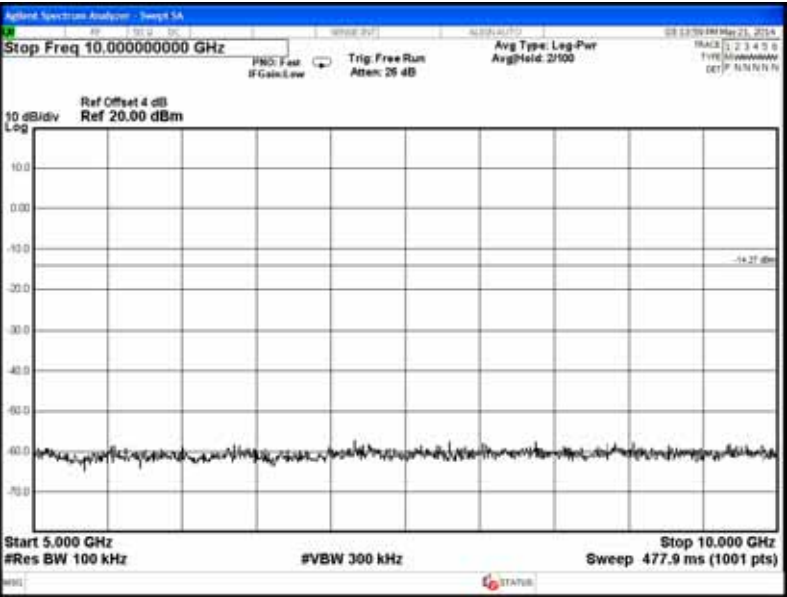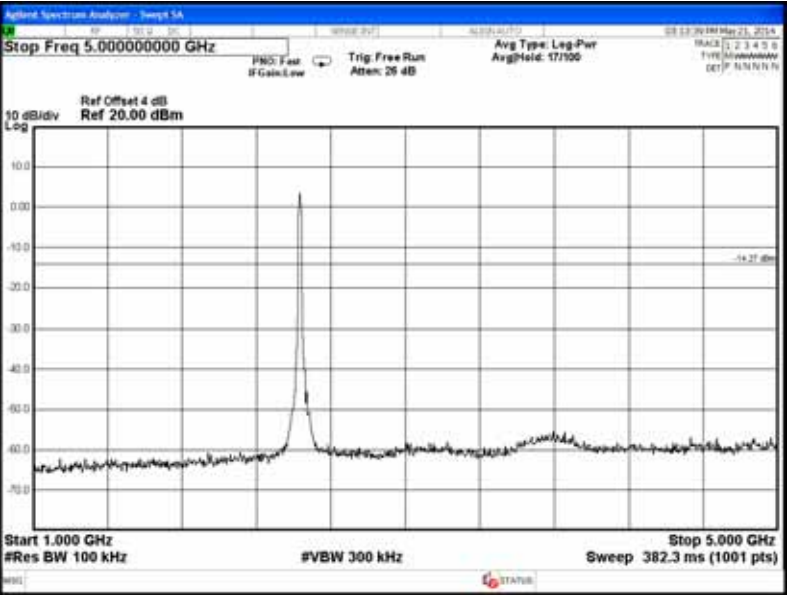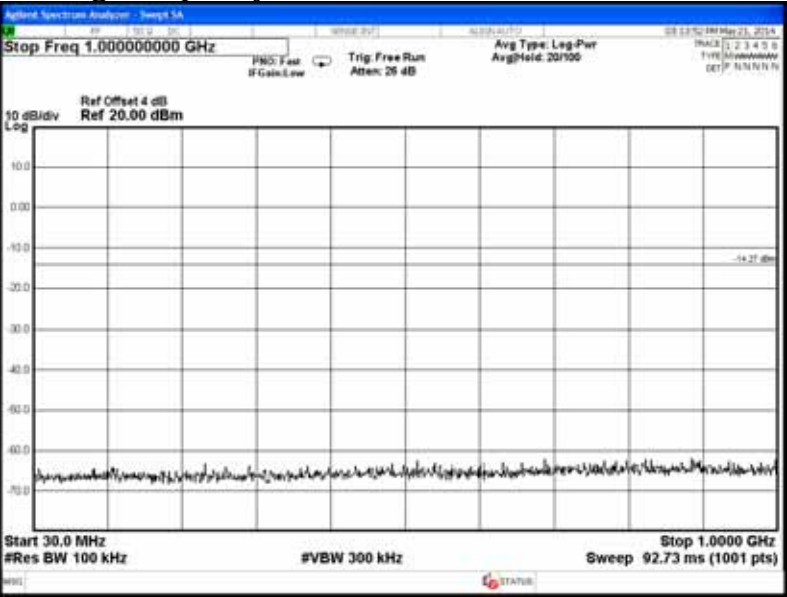

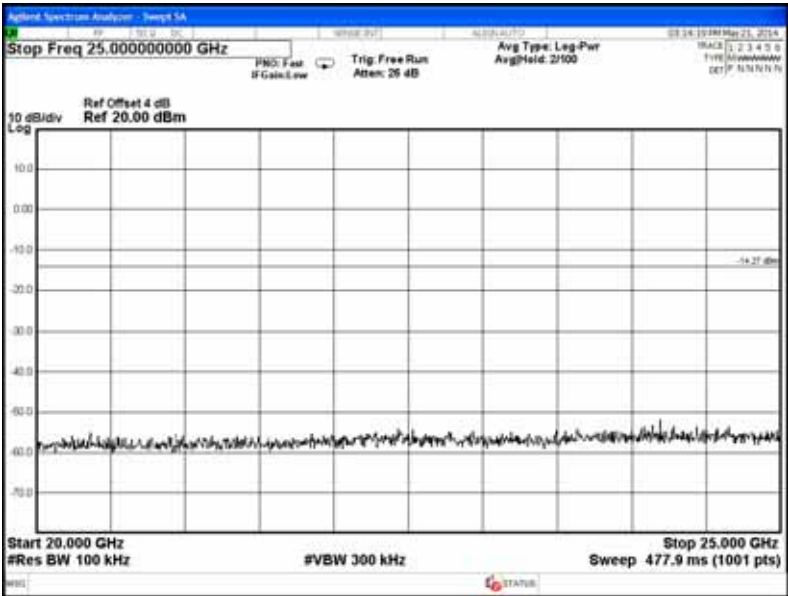
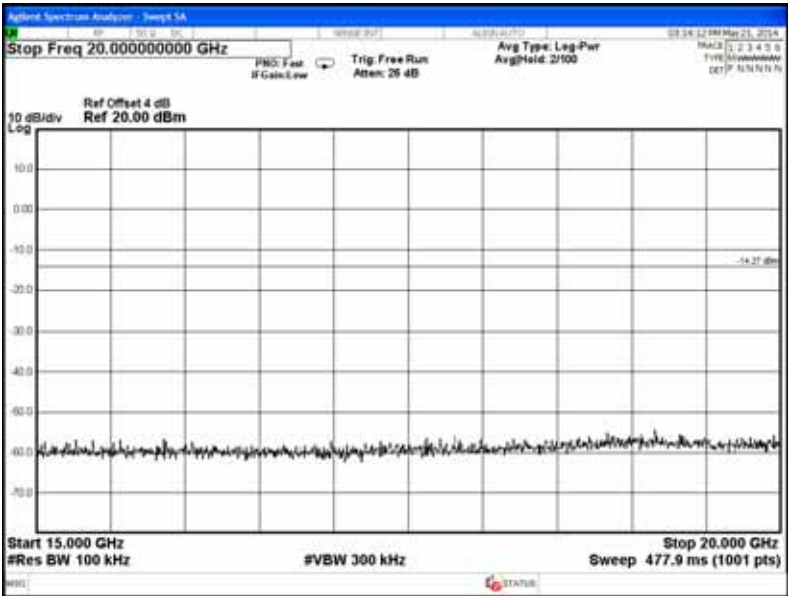
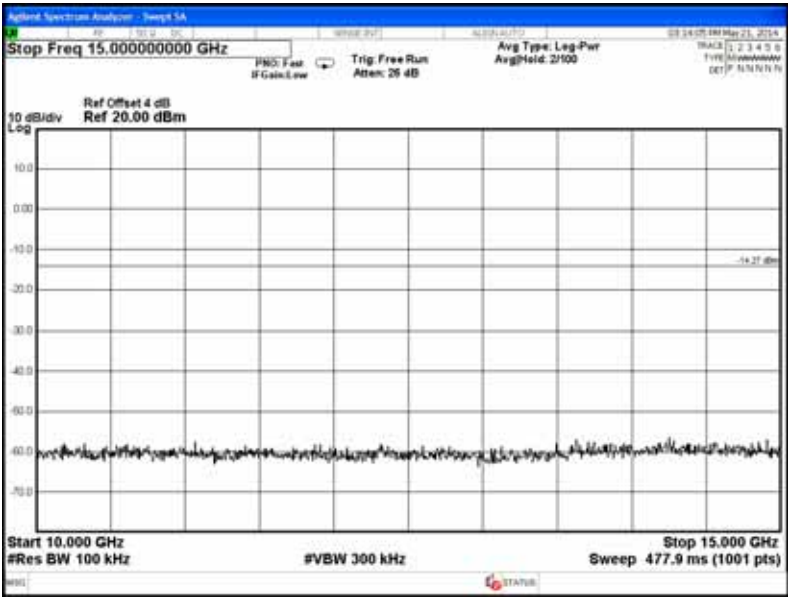





802.11g, Frequency: 2462MHz

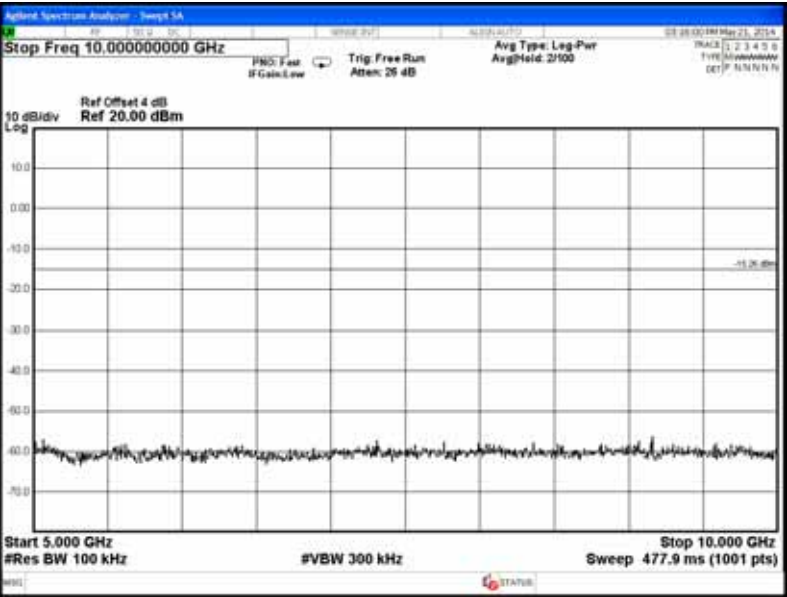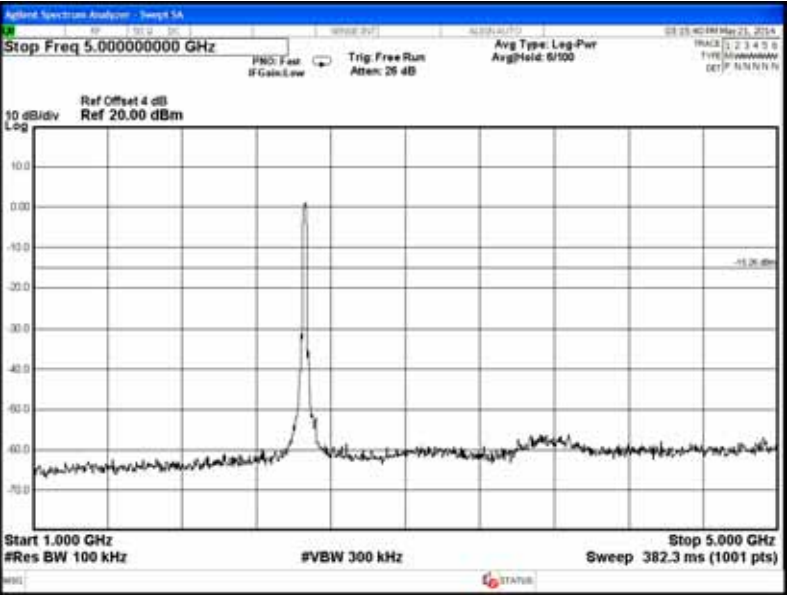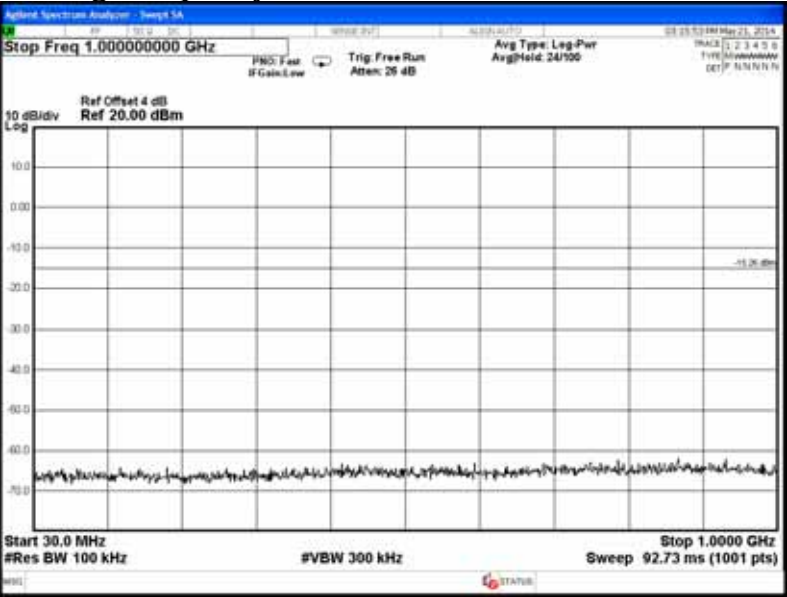

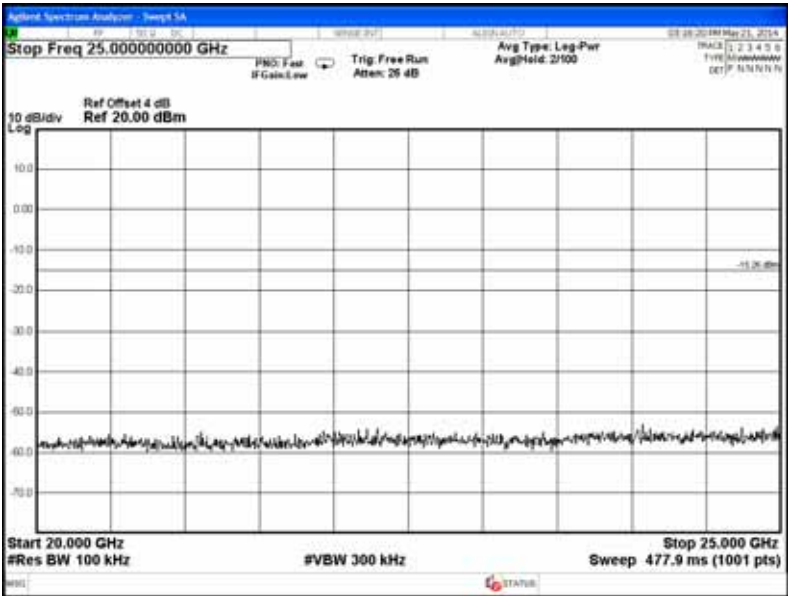
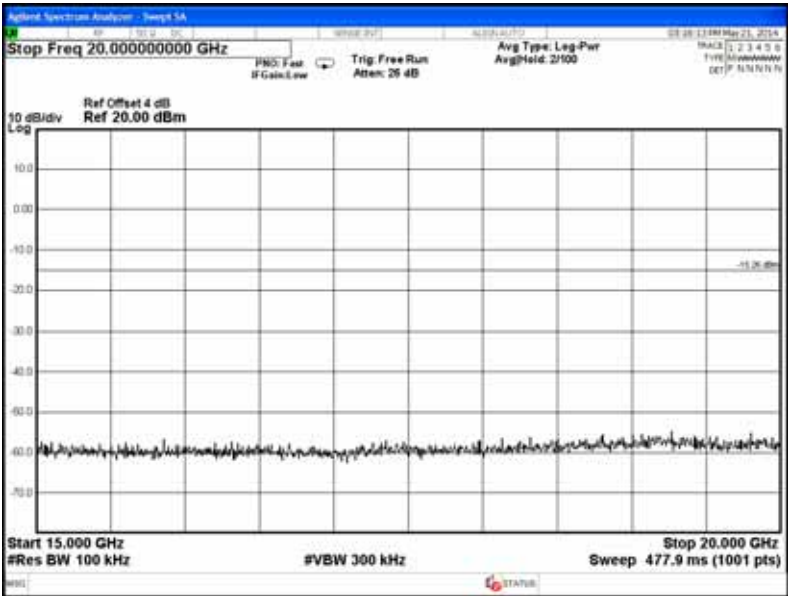
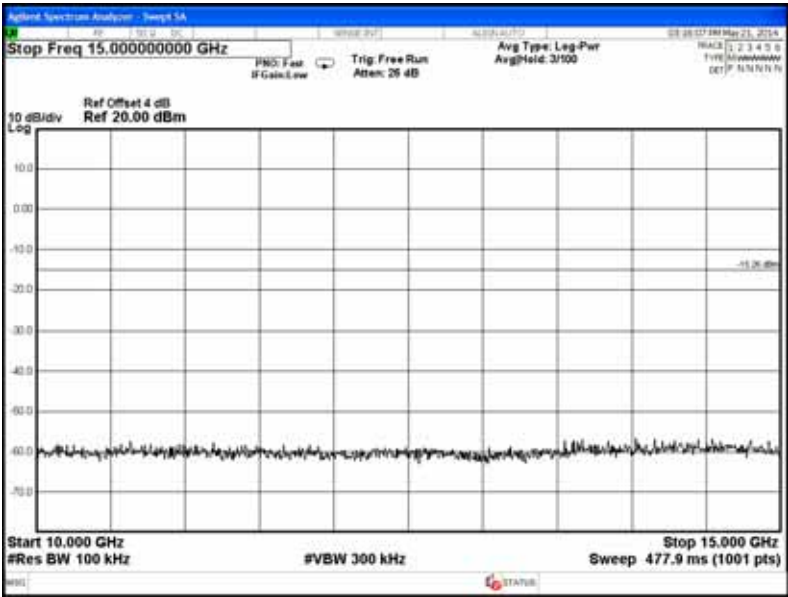





802.11n-HT20, Frequency: 2412MHz

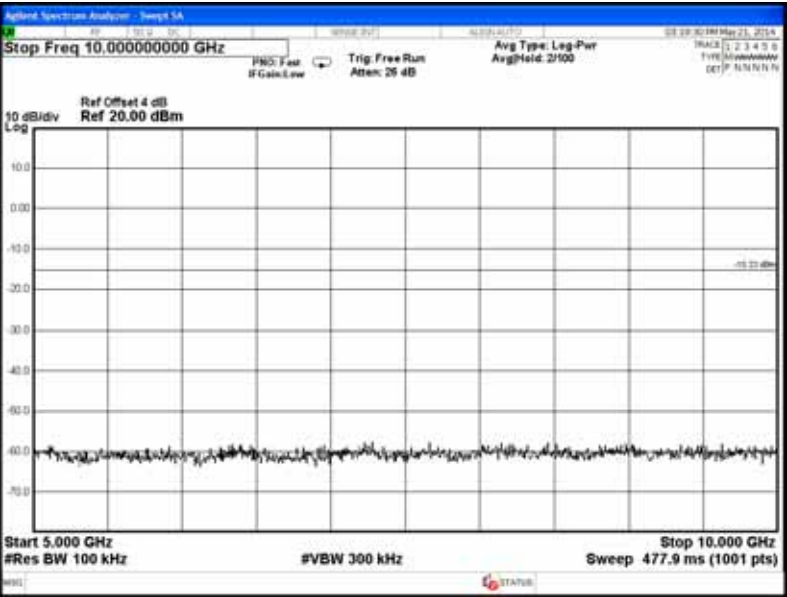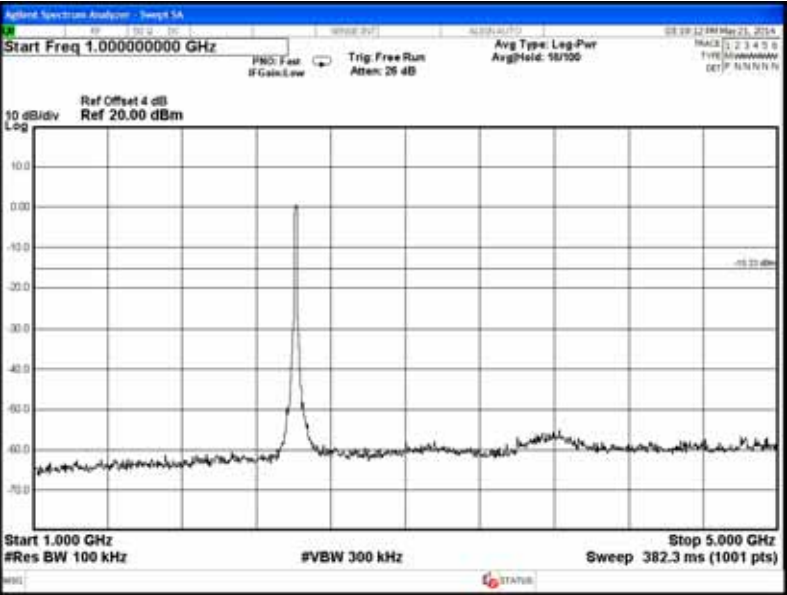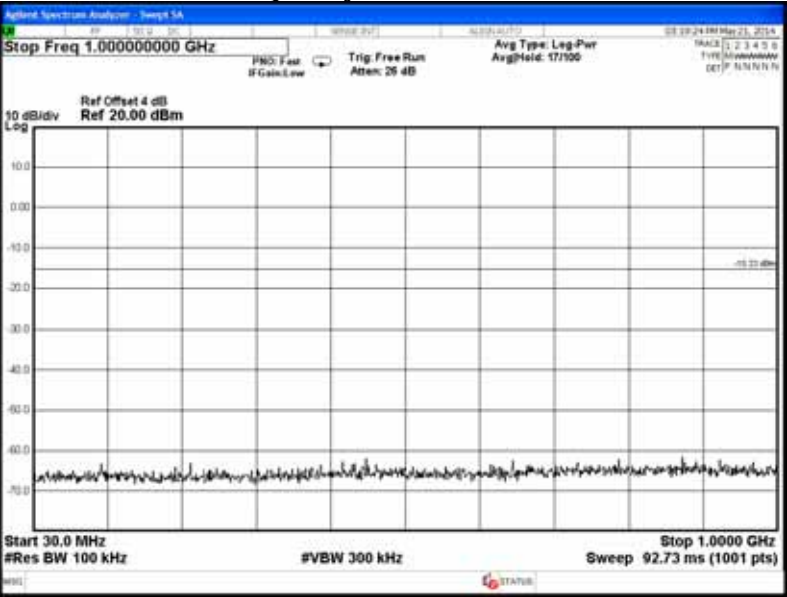

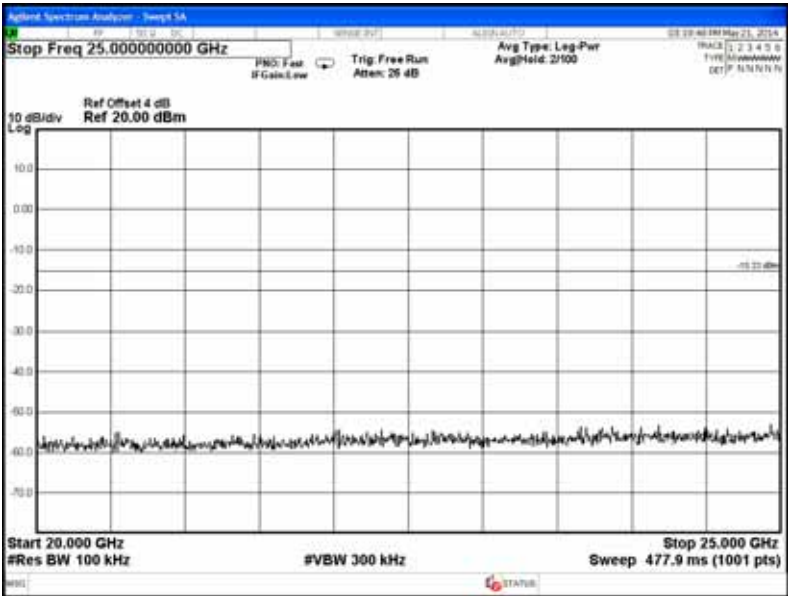
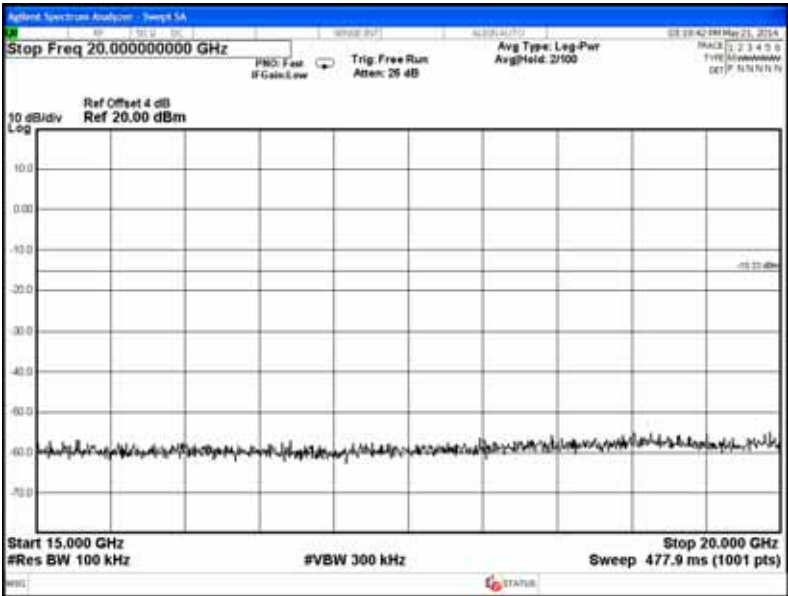
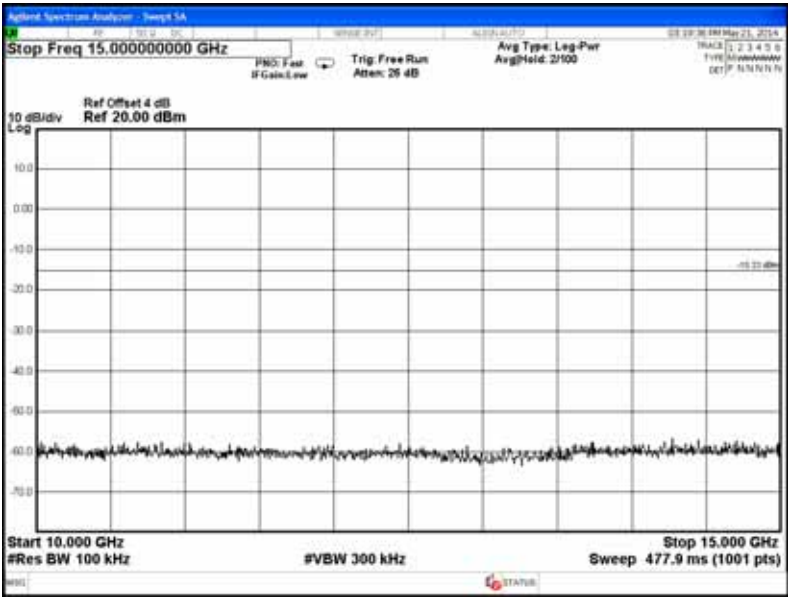





802.11n-HT20, Frequency: 2437MHz

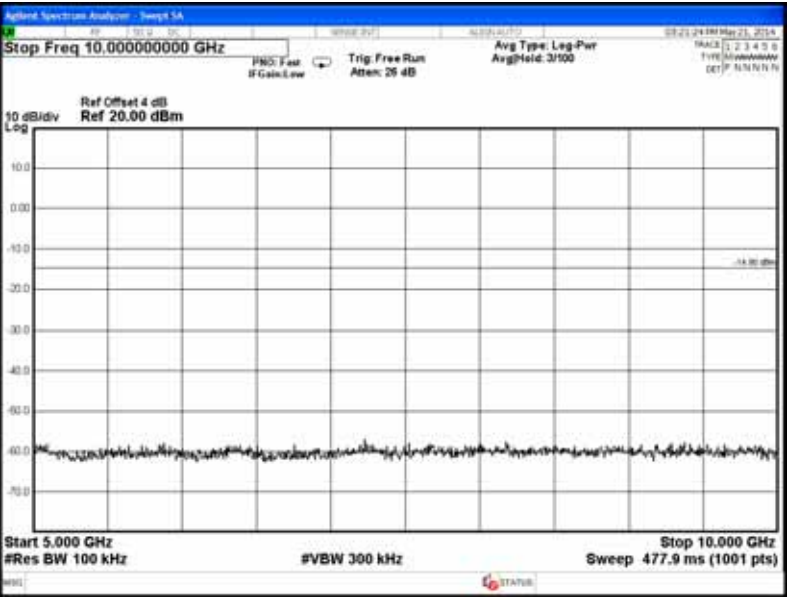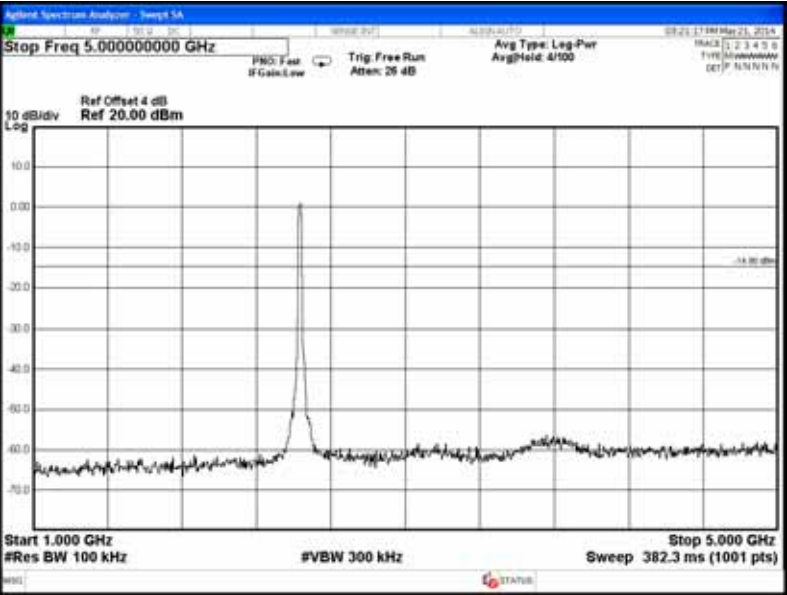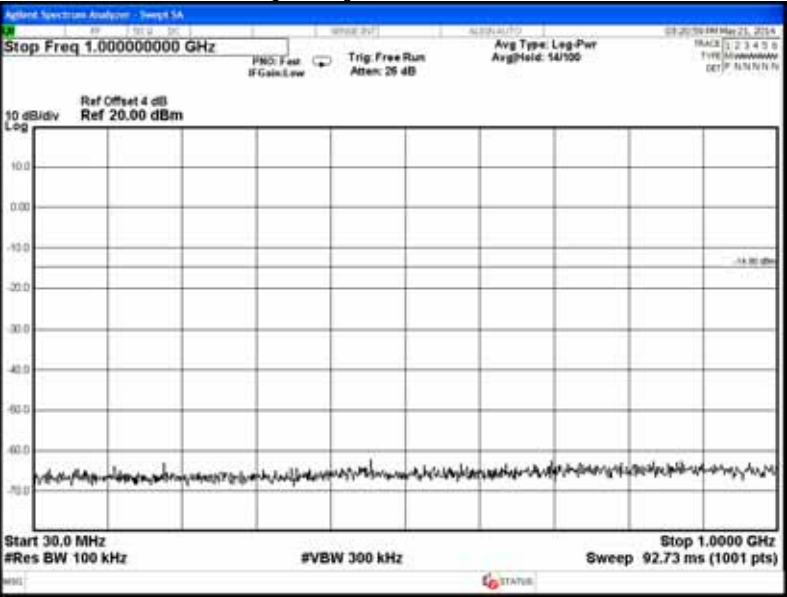

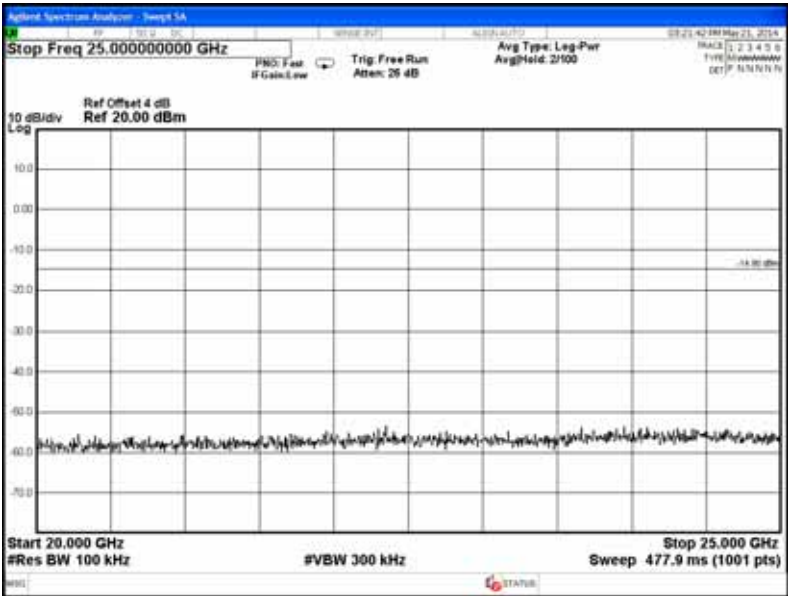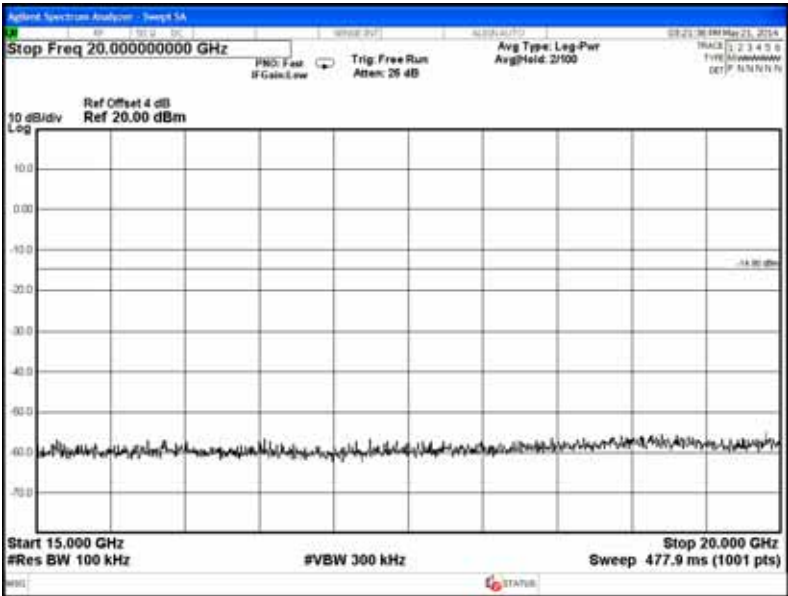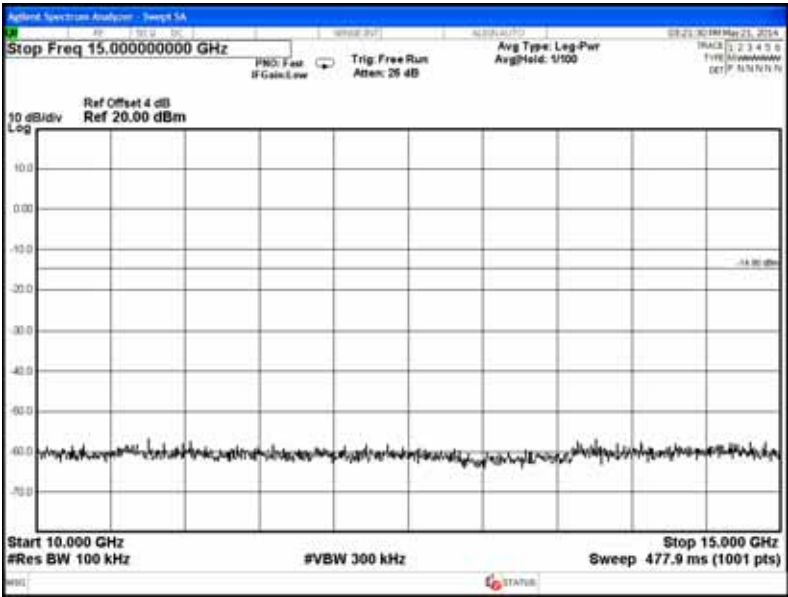




802.11n-HT20, Frequency: 2462MHz

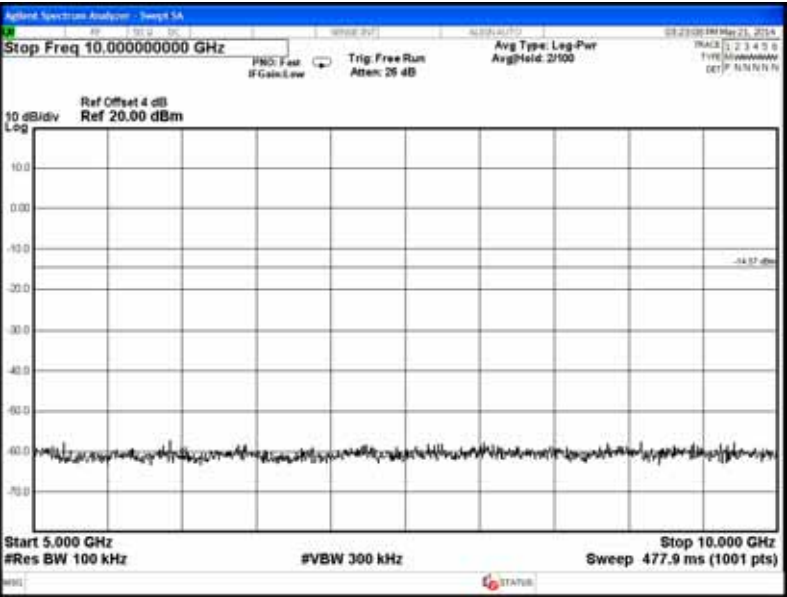
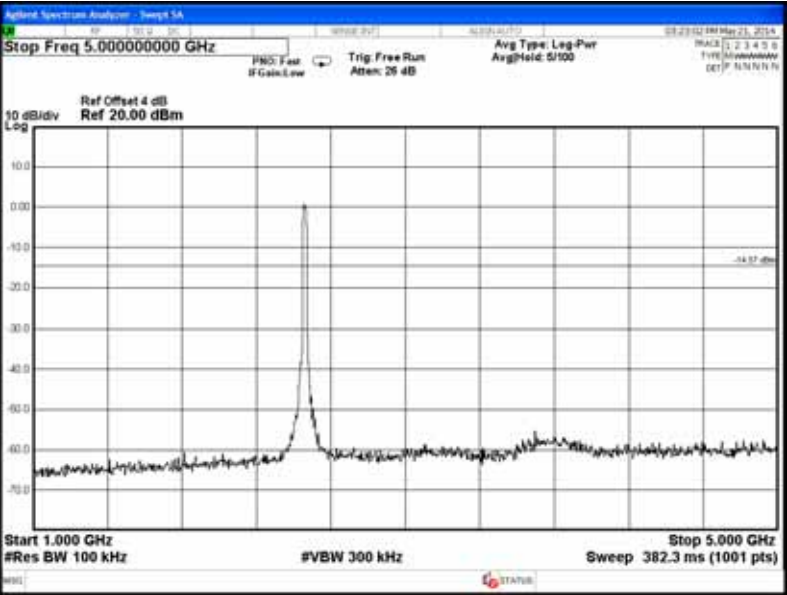
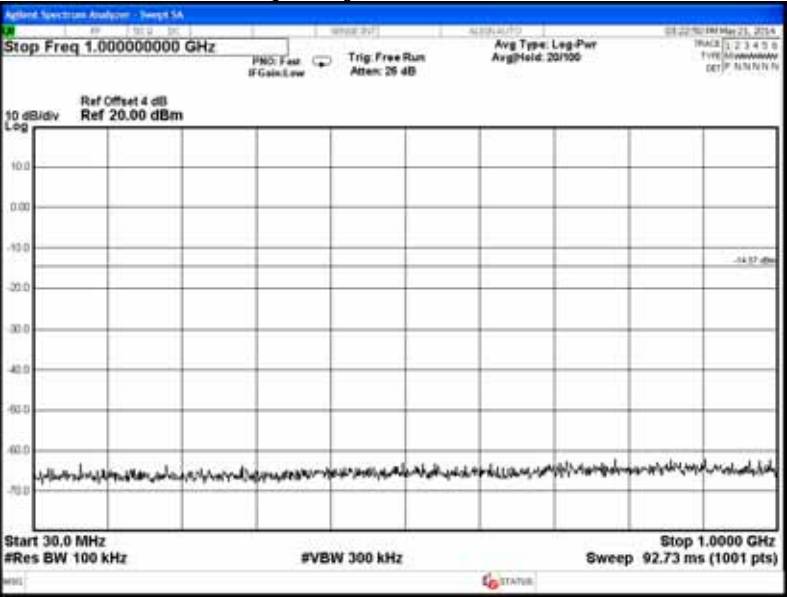


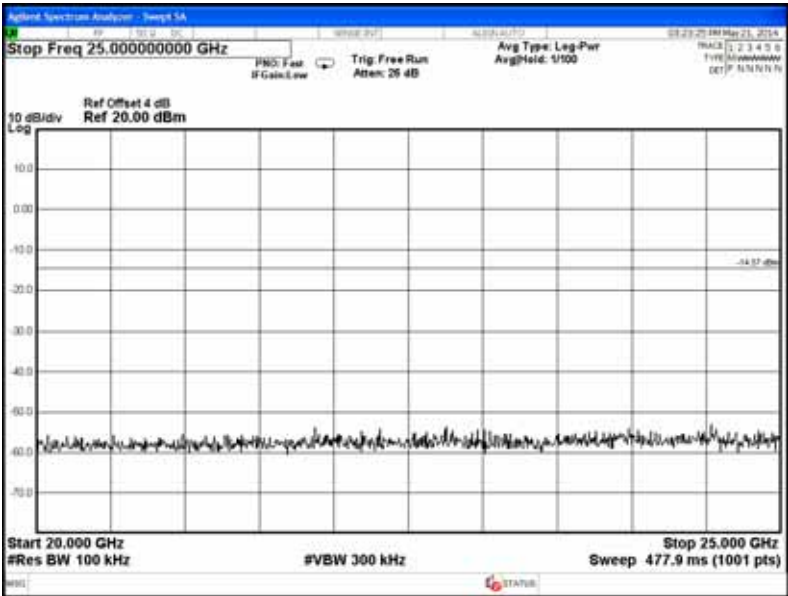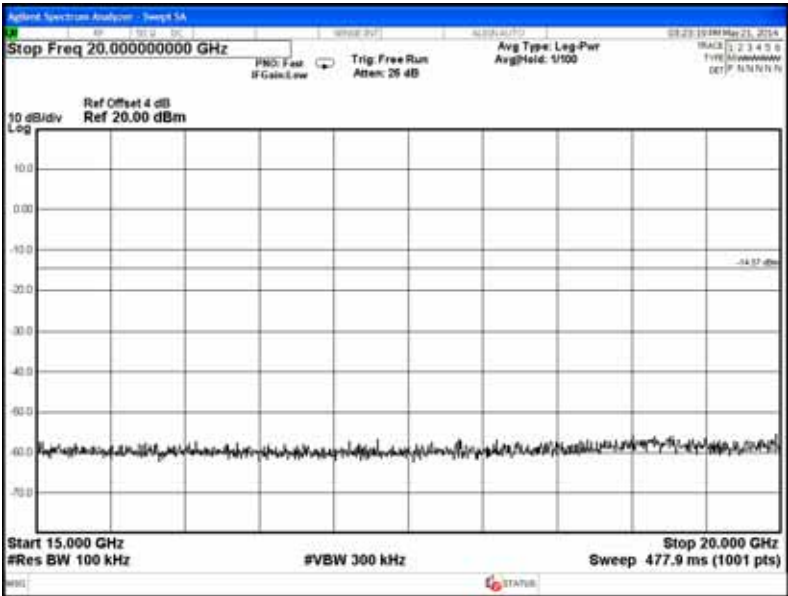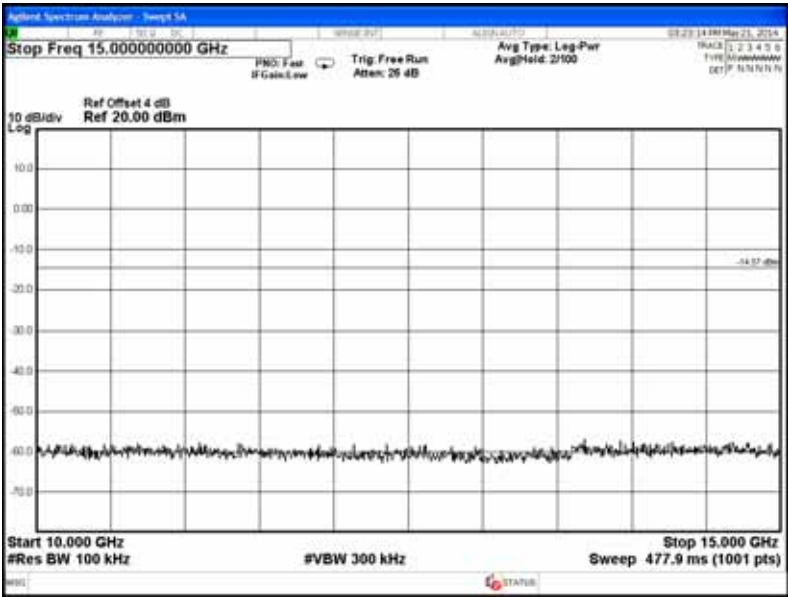




7.6.2. BT Function




Test Date : 2014. 05. 19 Temperature : 24°C Humidity : 46%
BLE, Frequency: 2402MHz

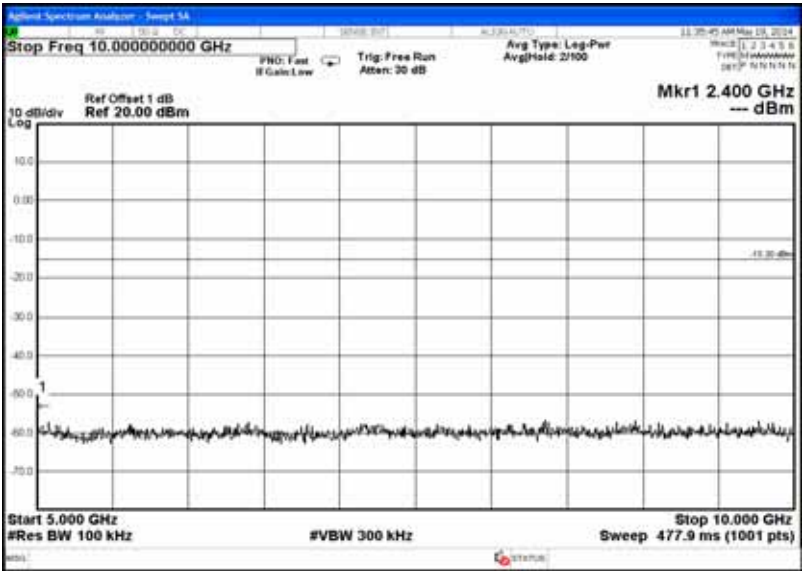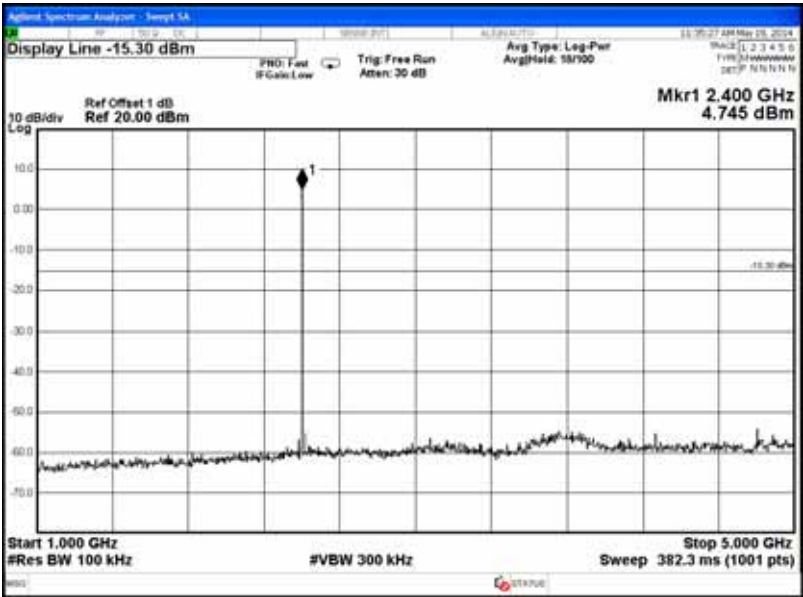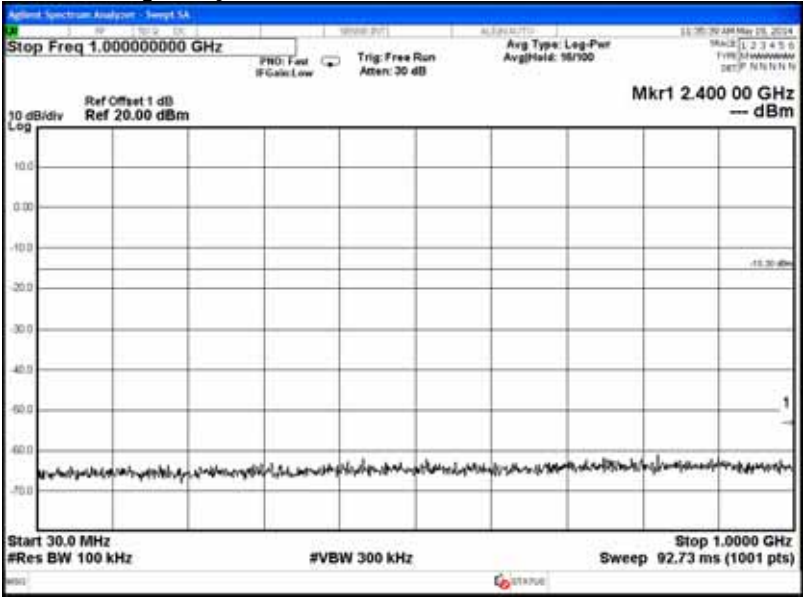

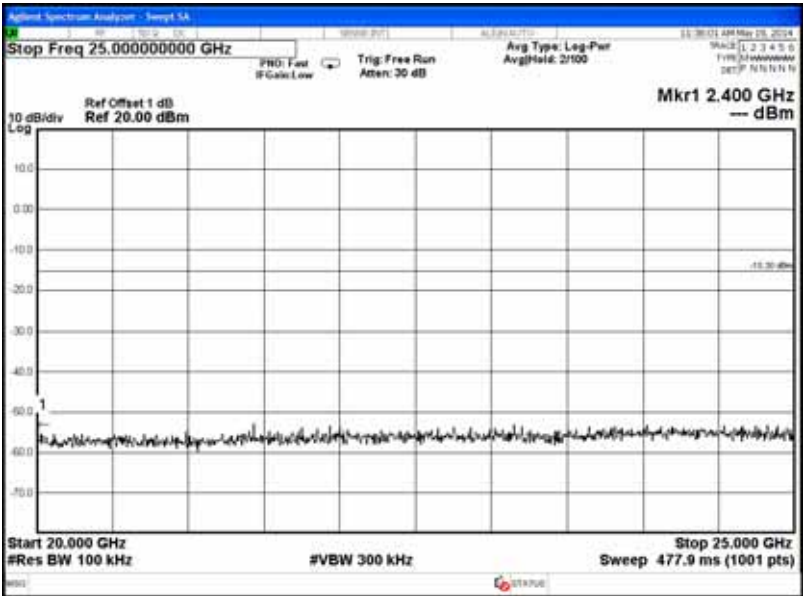
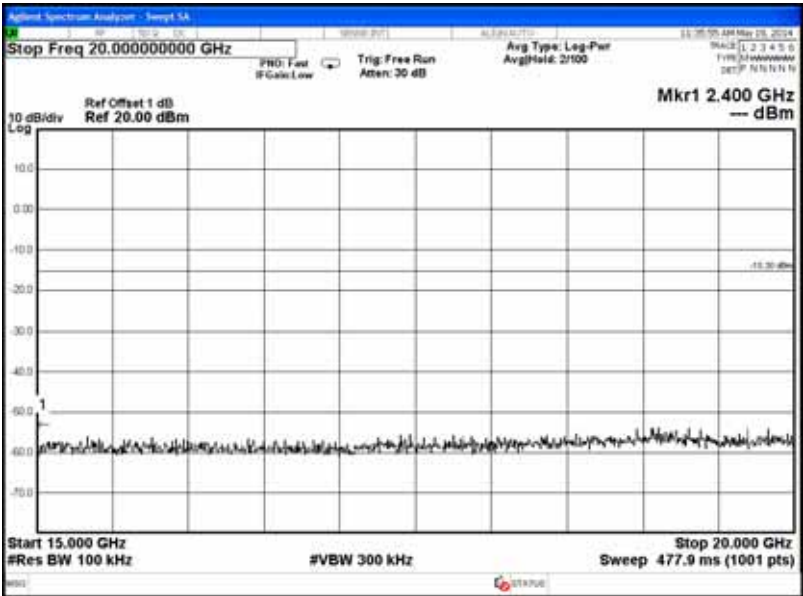
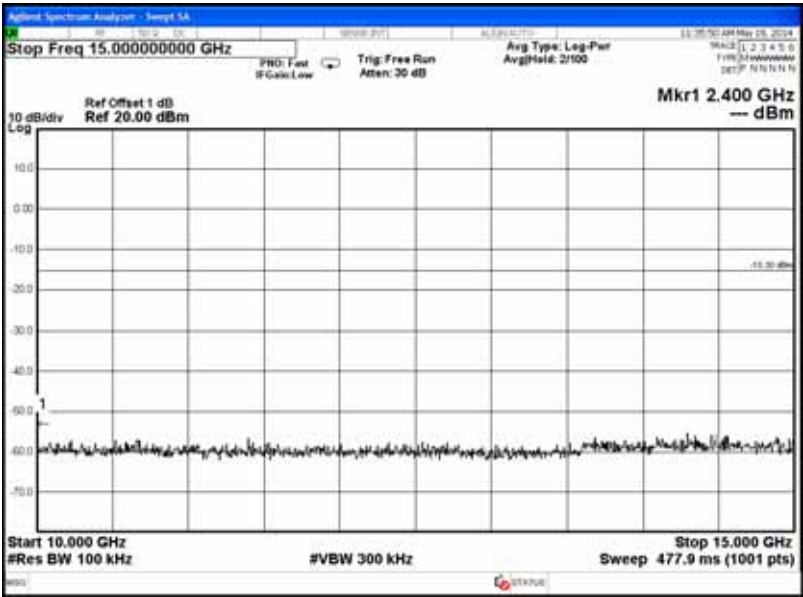





BLE, Frequency: 2440MHz

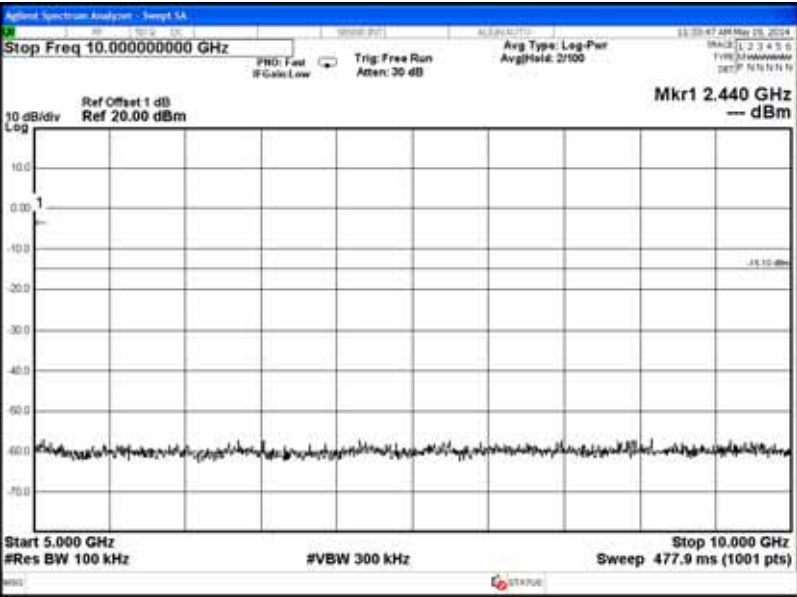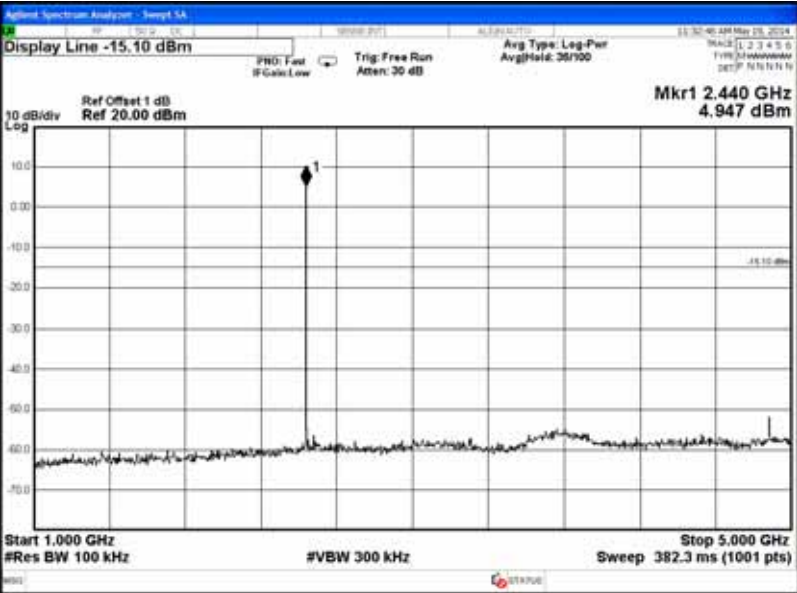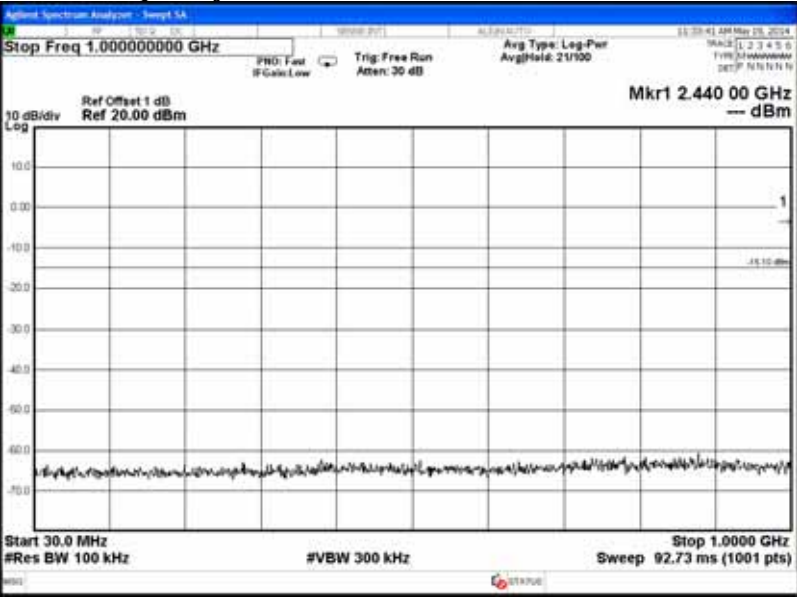

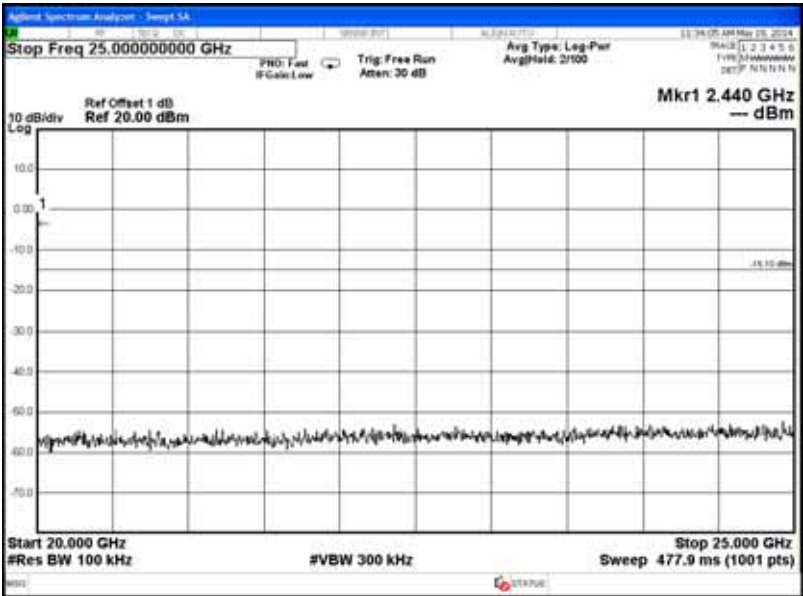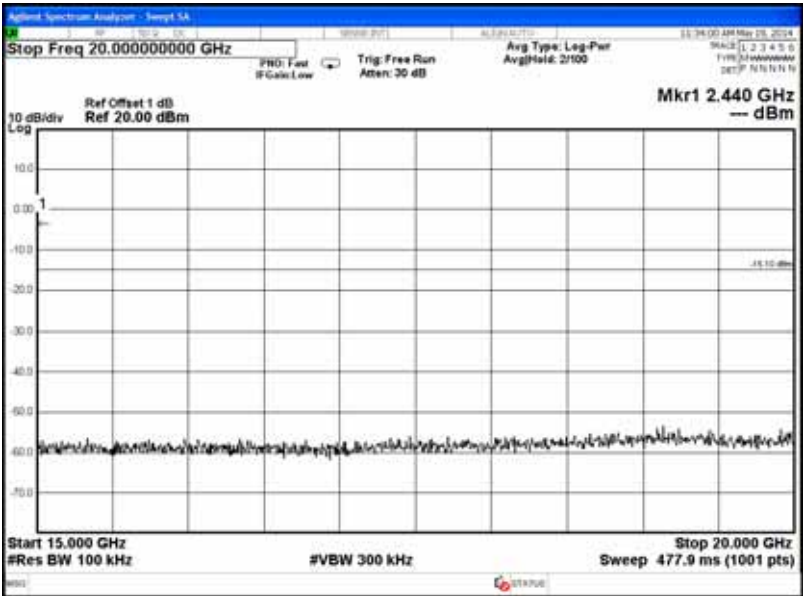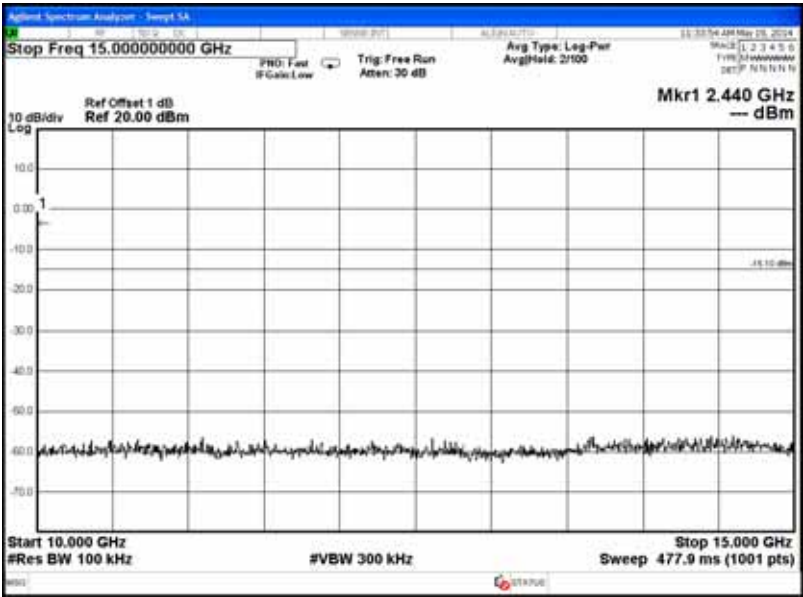

BLE, Frequency: 2480MHz

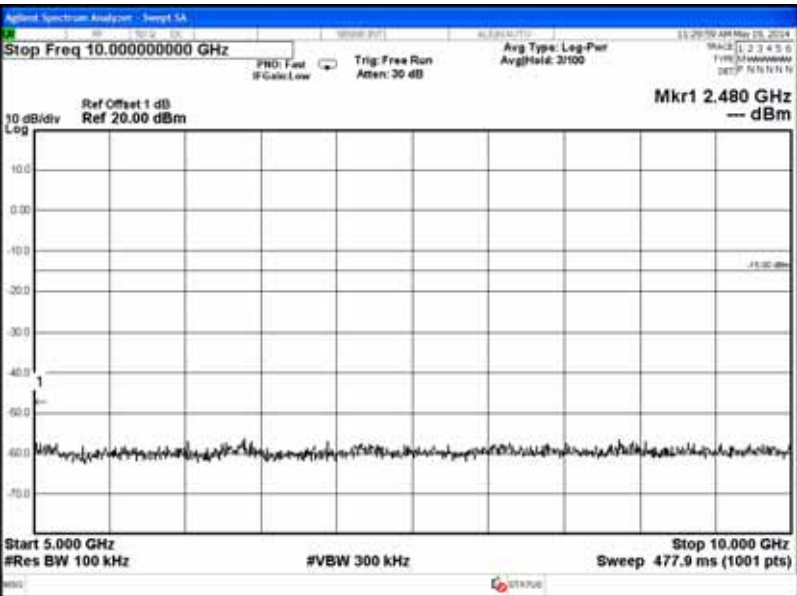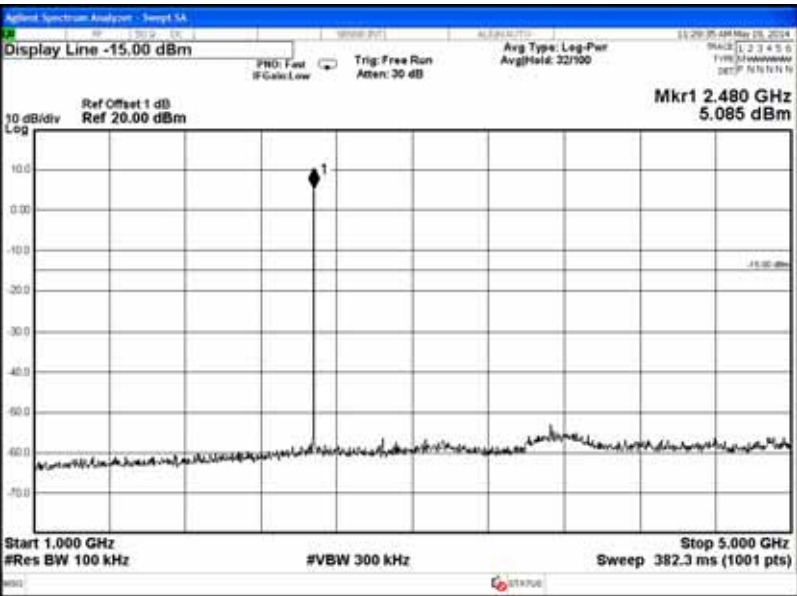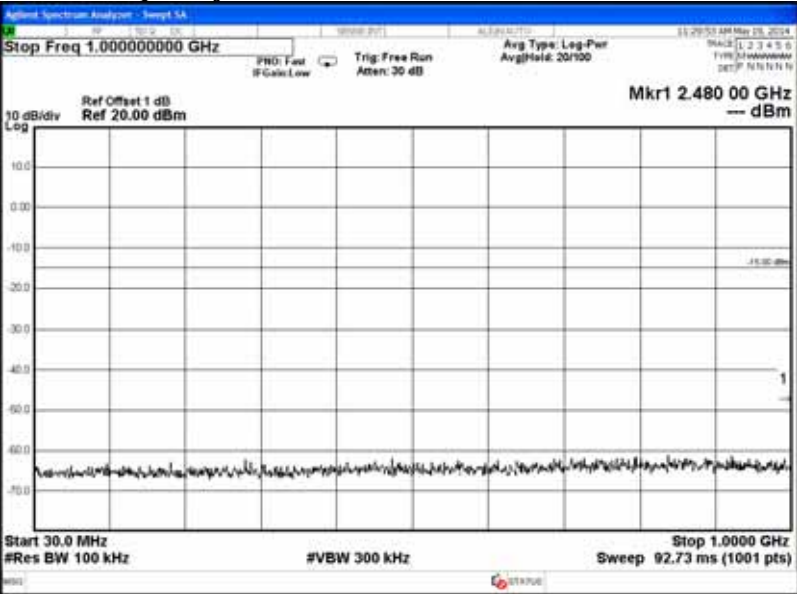

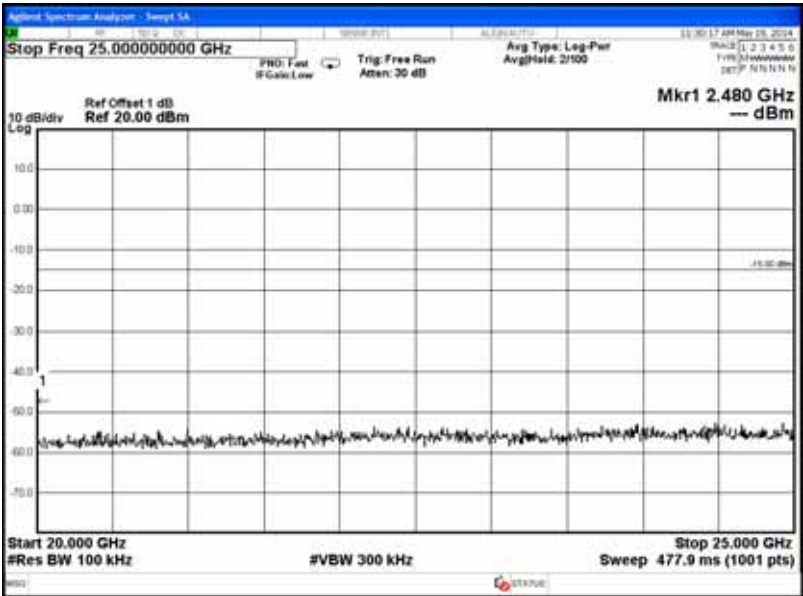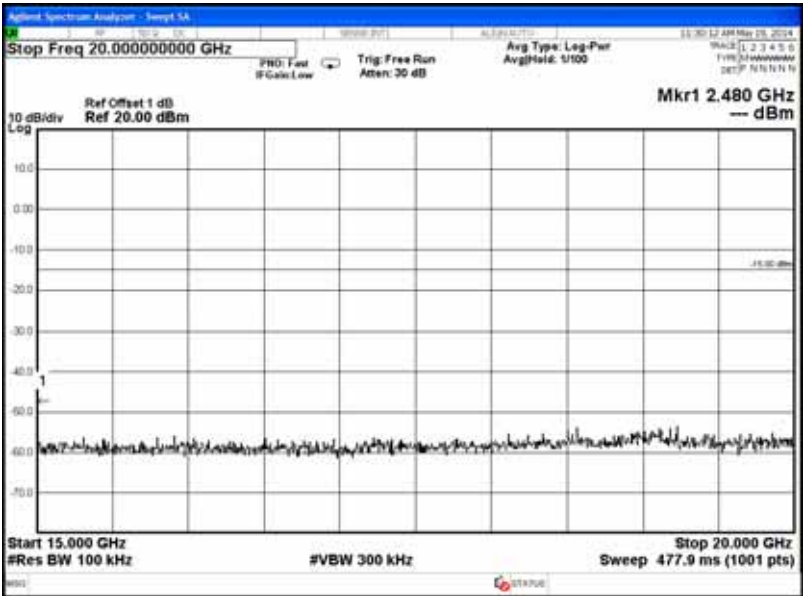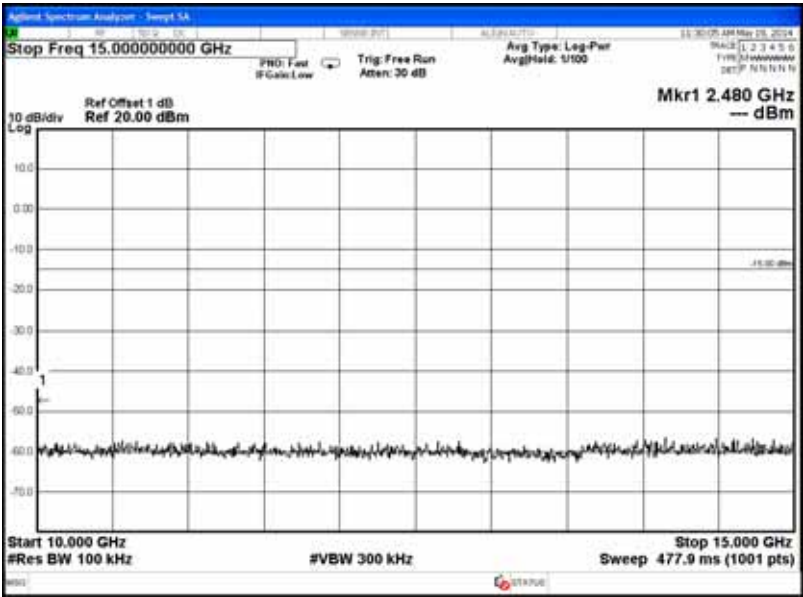

8. BAND EDGES MEASUREMENT

8.1. Test Equipment

The following test equipment was used during the band edges measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Due Date
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	2014. 07. 30

8.2. Block Diagram of Test Setup

The same as section.4.2.

8.3. Specification Limits [§15.247(c)]

The highest level should be at least 20 dB below reference level as measured in section 9.6.

8.4. Operating Condition of EUT

The test program “WL command” for WLAN and test program “Blue tool” for BLE was used to enable the EUT to transmit data at different channel frequency individually.

8.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW=100 kHz and VBW to 300kHz with suitable frequency span including 100kHz bandwidth from band edge.

The measurement guideline was according to 558074 D01 DTS Meas Guidance v03r01.


8.6. Test Results

PASSED. All the test results are attached in next pages.

8.6.1. WLAN Function

Test Date : 2014. 05. 02	Temperature : 26°C	Humidity : 50%
Test Date : 2014. 05. 06	Temperature : 23°C	Humidity : 48%
Test Date : 2014. 05. 21	Temperature : 25°C	Humidity : 48%


802.11b
Below Band edge

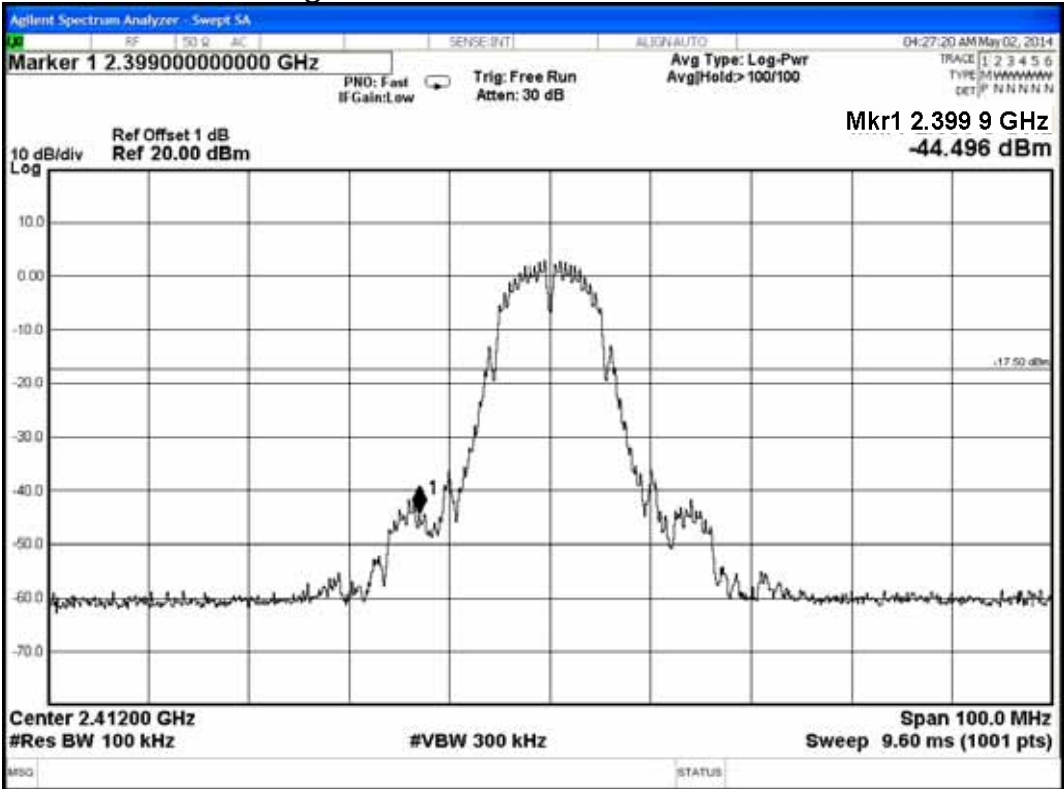


Upper Band edge




802.11g
Below Band edge

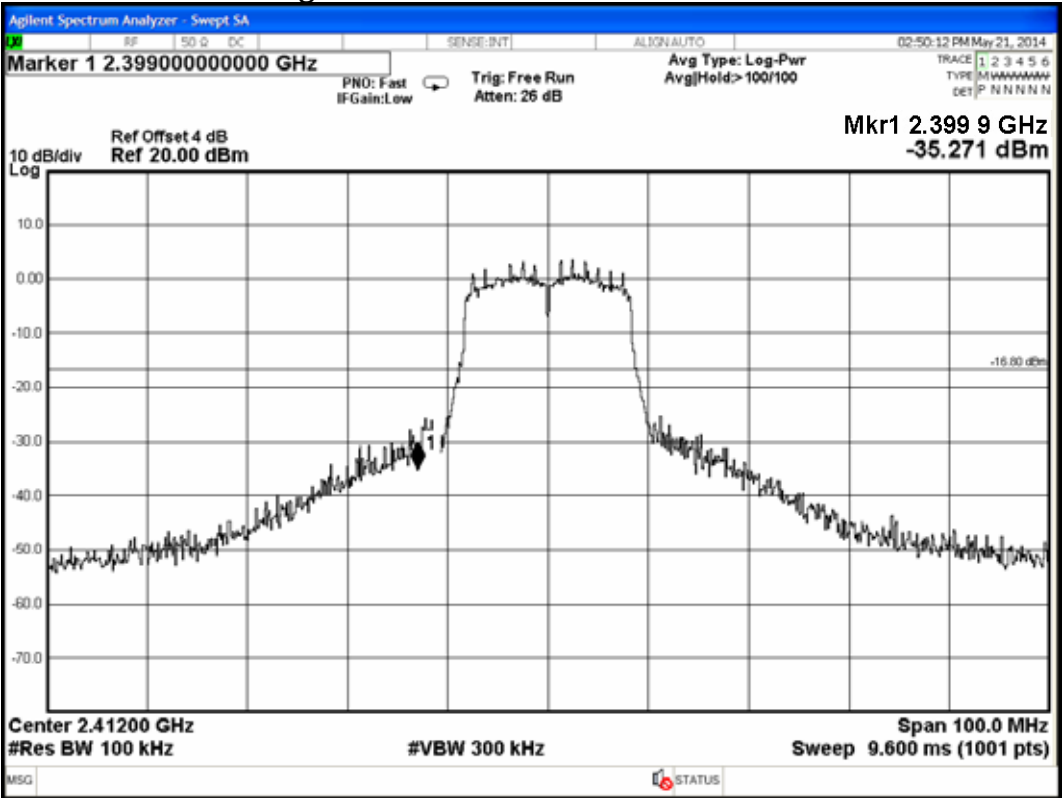


Upper Band edge

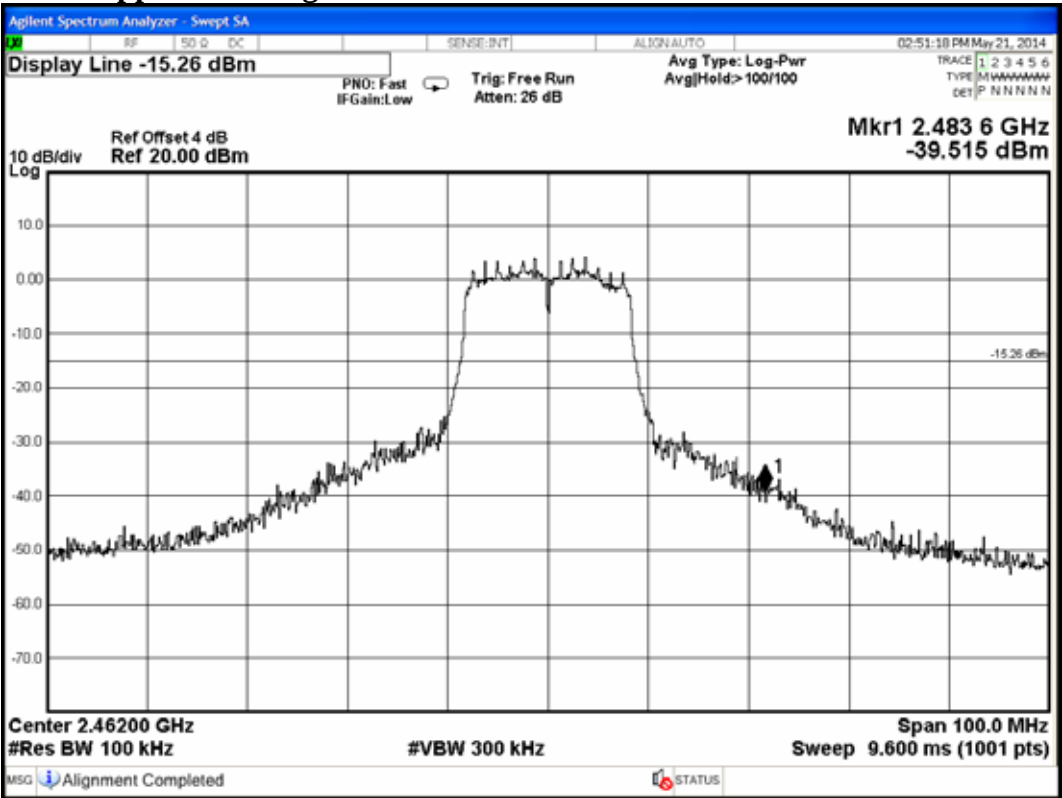

802.11n-HT20
Below Band edge

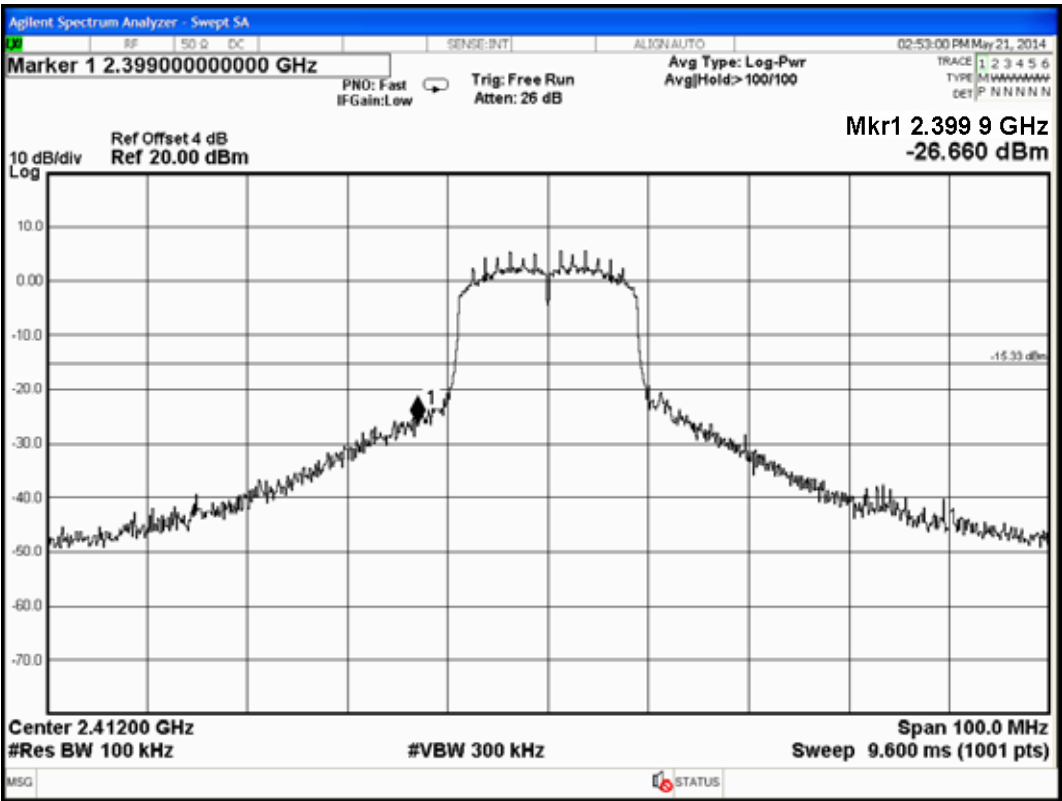


Upper Band edge

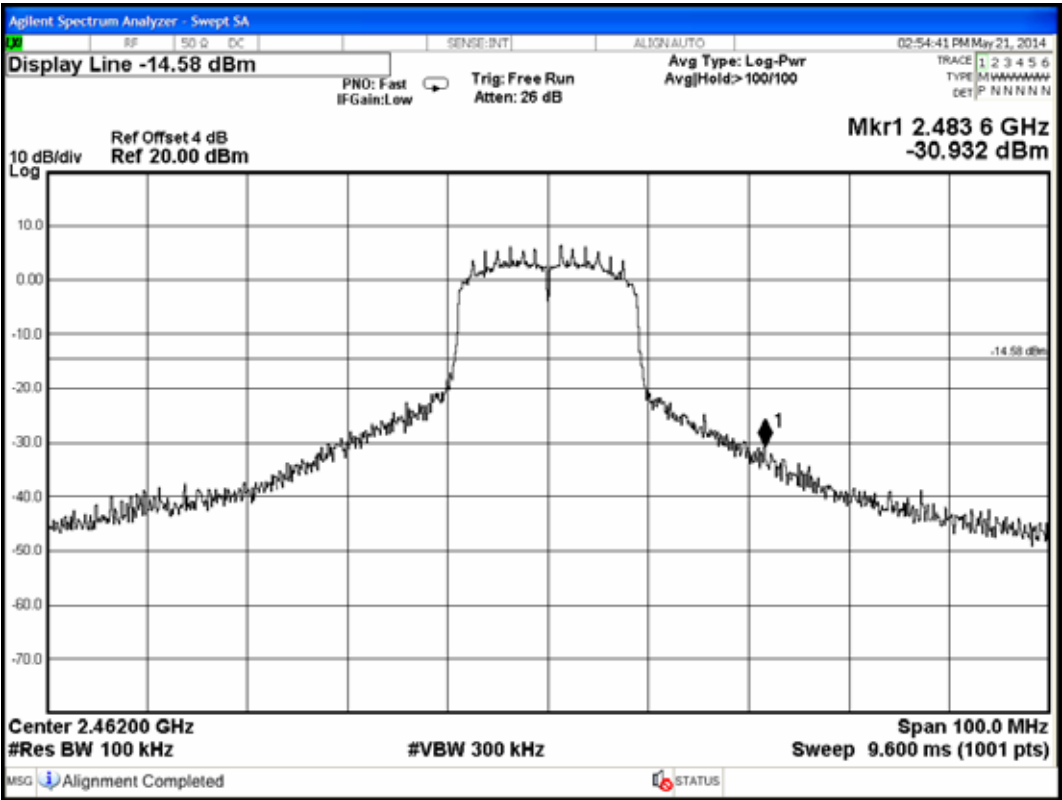


8.6.2. BLE Function

Test Date : 2014. 05. 05 Temperature : 24°C Humidity : 48%

Below Band edge

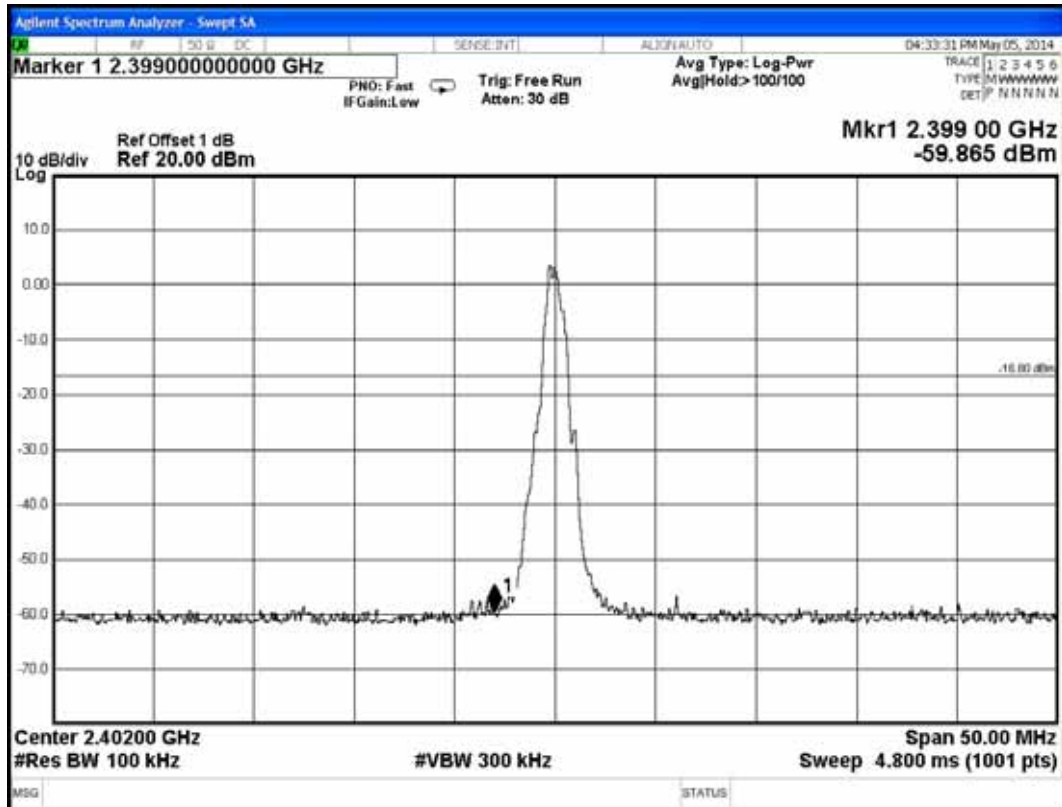

Upper Band edge

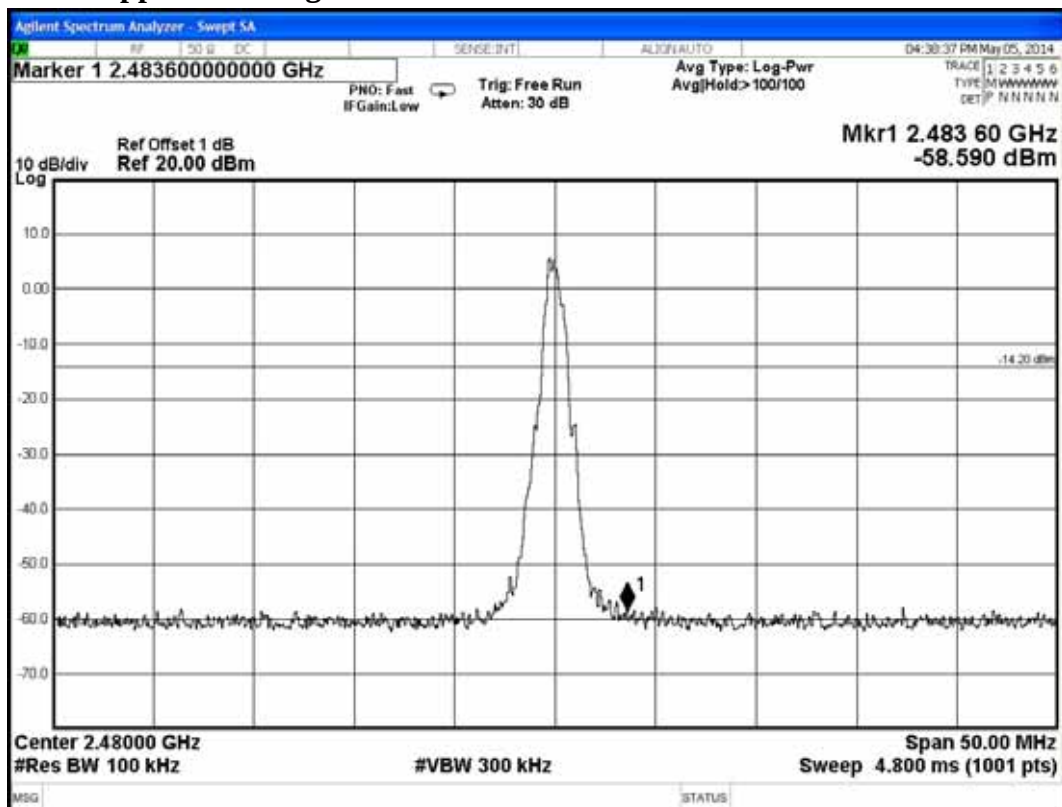

9. POWER SPECTRAL DENSITY MEASUREMENT

9.1. Test Equipment

The following test equipment was used during the power spectral density measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Due Date
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	2014. 07. 30

9.2. Block Diagram of Test Setup

The same as section.4.2.

9.3. Specification Limits [§15.247(d)]

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

9.4. Operating Condition of EUT

The test program “WL command” for WLAN and test program “Blue tool” for BLE was used to enable the EUT to transmit data at different channel frequency individually.

9.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using 100kHz RBW and ≥ 300 kHz VBW, set sweep time = Auto.

The measurement guideline was according to KDB 558074 D01 DTS Meas Guidance is v03r01.

Pursuant to KDB 662911, we executed conducted test for chain 0 as worse performance, and a factor $10\log(N)$ shall be added, where N is the number of output.

9.6. Test Results

PASSED. All the test results are attached in next pages.

9.6.1. WLAN Function

Test Date : 2014. 05. 02 Temperature : 26°C Humidity : 50%

Test Date : 2014. 05. 19 Temperature : 24°C Humidity : 46%


Mode	Type of Network	Channel	Frequency	Power Spectral Density (dBm)	Antenna Factor	Test Result (dBm) _{Note}
1.	802.11b	CH 1	2412MHz	6.986	0	6.986
2.		CH 6	2437MHz	7.343		7.343
3.		CH 11	2462MHz	7.259		7.259
4.	802.11g	CH 1	2412MHz	0.204	3	3.204
5.		CH 6	2437MHz	2.731		6.731
6.		CH 11	2462MHz	1.743		4.743
7.	802.11n-HT20	CH 1	2412MHz	1.670	3	4.670
8.		CH 6	2437MHz	2.099		5.099
9.		CH 11	2462MHz	2.423		5.423

[Limit: 8dBm]

Note: 1. 802.11b antenna factor doesn't support simultaneously transmit, thus MIMO factor is unnecessary.

2. Test Result=Power Spectral Density+Factor (Factor=10log(N), N=MIMO number)

802.11b, Frequency: 2412MHz

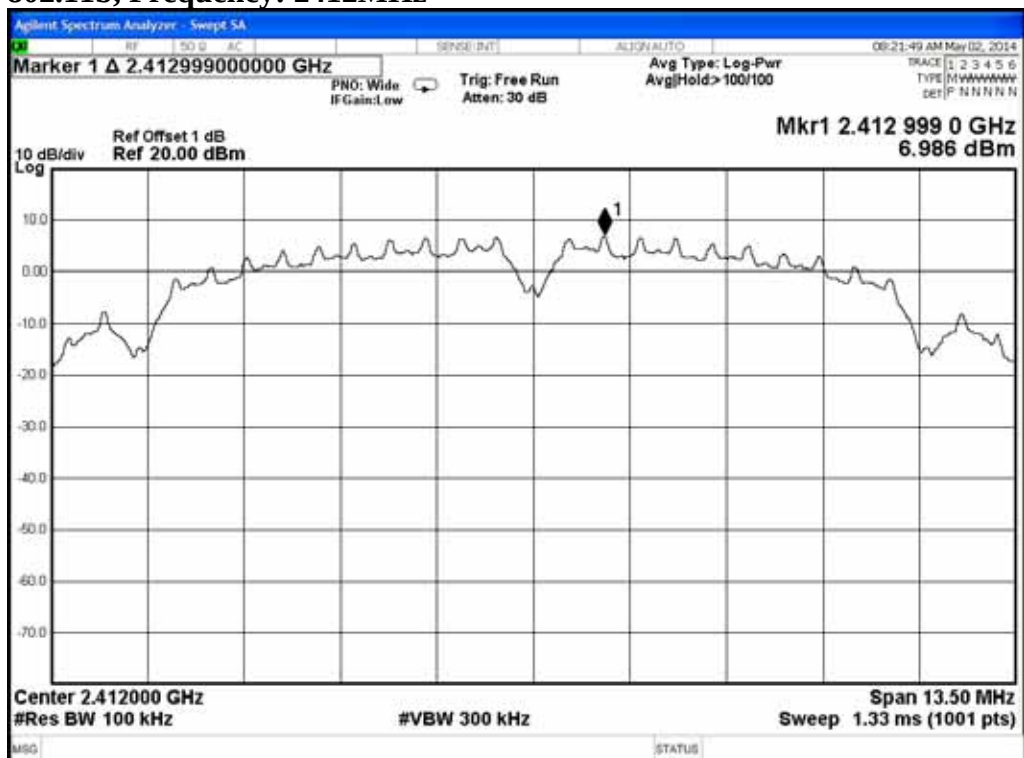

Agilent Spectrum Analyzer - Swept SA

Marker 1 Δ 2.436500500000 GHz

PNO: Wide IF Gain: Low Trig: Free Run Atten: 30 dB

Avg Type: Log-Pwr Avg Hold: 100/100

08:22:45 AM May 02, 2014

TRACE 1 2 3 4 5 6

TYPE [MMMMMM] det [P N N N N N]

10 dB/div Ref Offset 1 dB Ref 20.00 dBm

Mkr1 2.436 500 5 GHz 7.343 dBm

Log

Center 2.437000 GHz #Res BW 100 kHz #VBW 300 kHz Span 13.50 MHz Sweep 1.33 ms (1001 pts)

MSG STATUS

Agilent Spectrum Analyzer - Sweep SA

Marker 1 Δ 2.461487000000 GHz

Ref Offset 1 dB
Ref 20.00 dBm

10 dB/div
Log

Mkr1 2.461 487 0 GHz
7.259 dBm


Center 2.462000 GHz
#Res BW 100 kHz

#VBW 300 kHz


Span 13.50 MHz
Sweep 1.33 ms (1001 pts)

MSG STATUS


802.11g, Frequency: 2412MHz

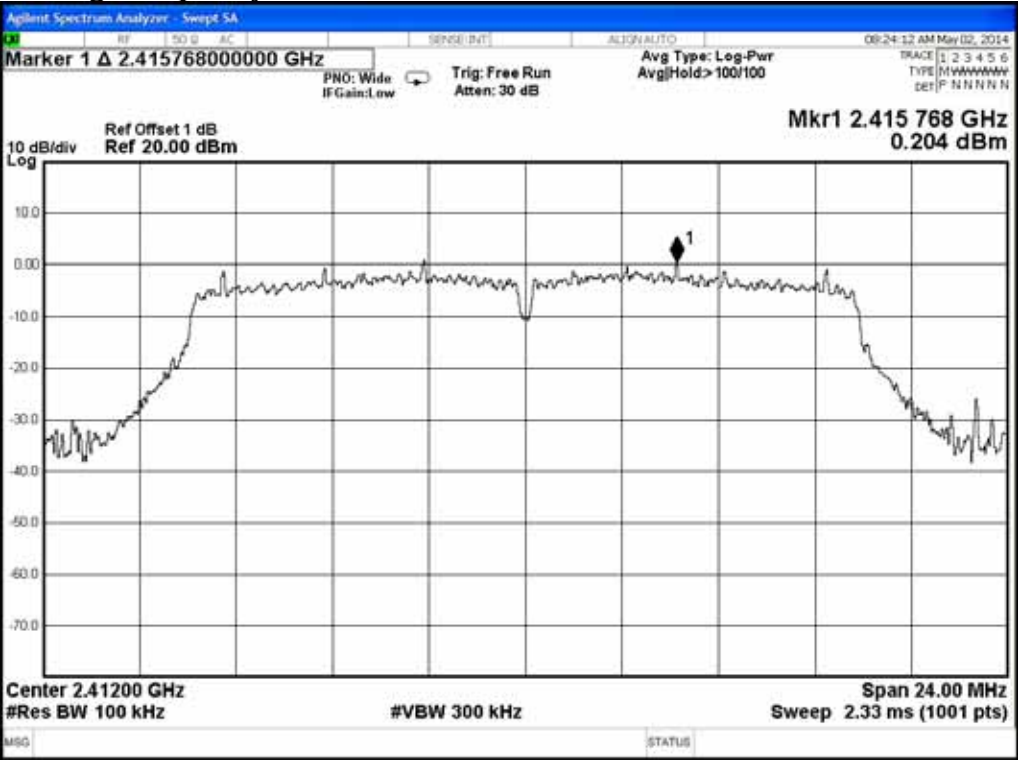


802.11g, Frequency: 2437MHz

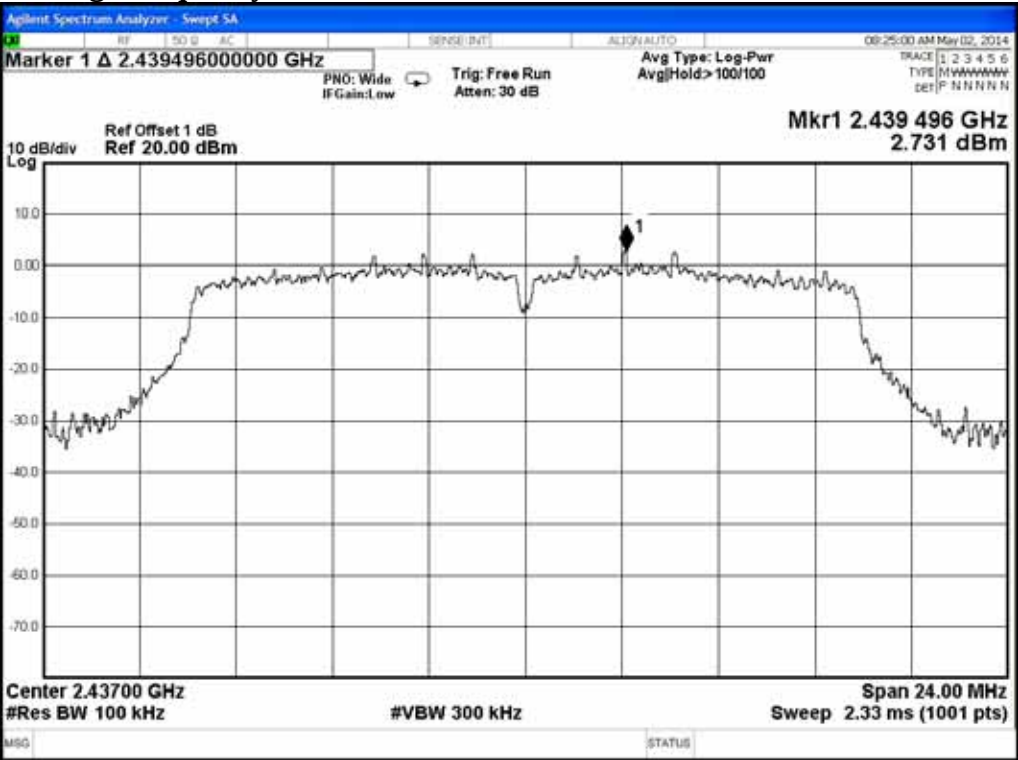

802.11g, Frequency: 2462MHz

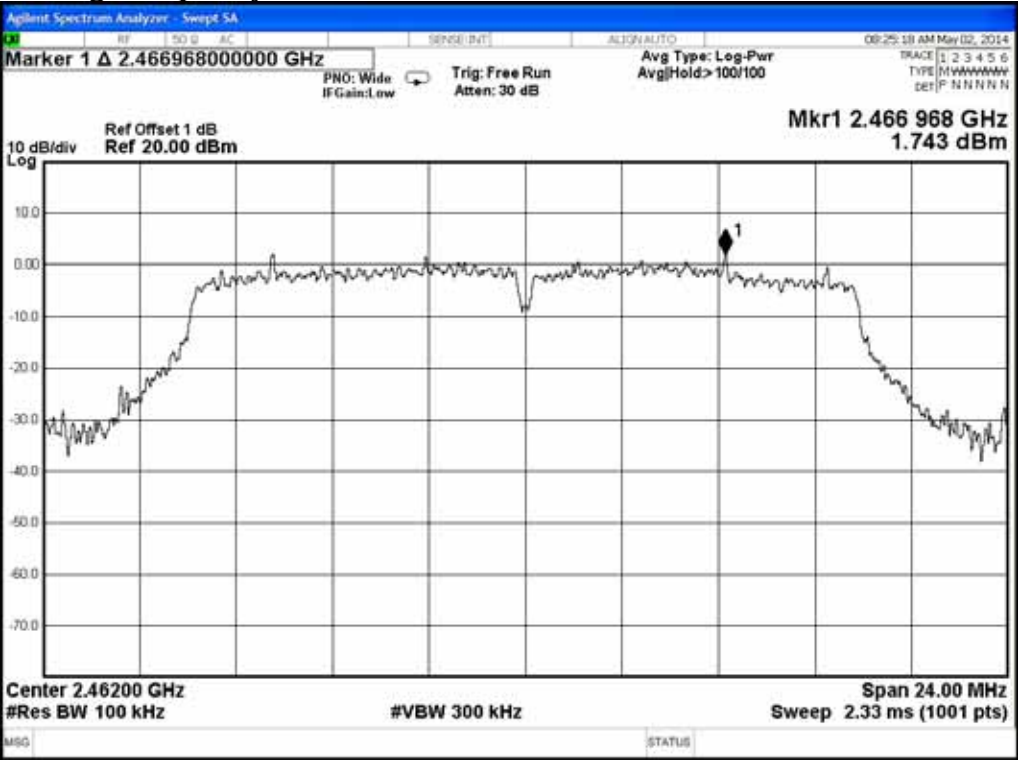


802.11n-HT20, Frequency: 2412MHz

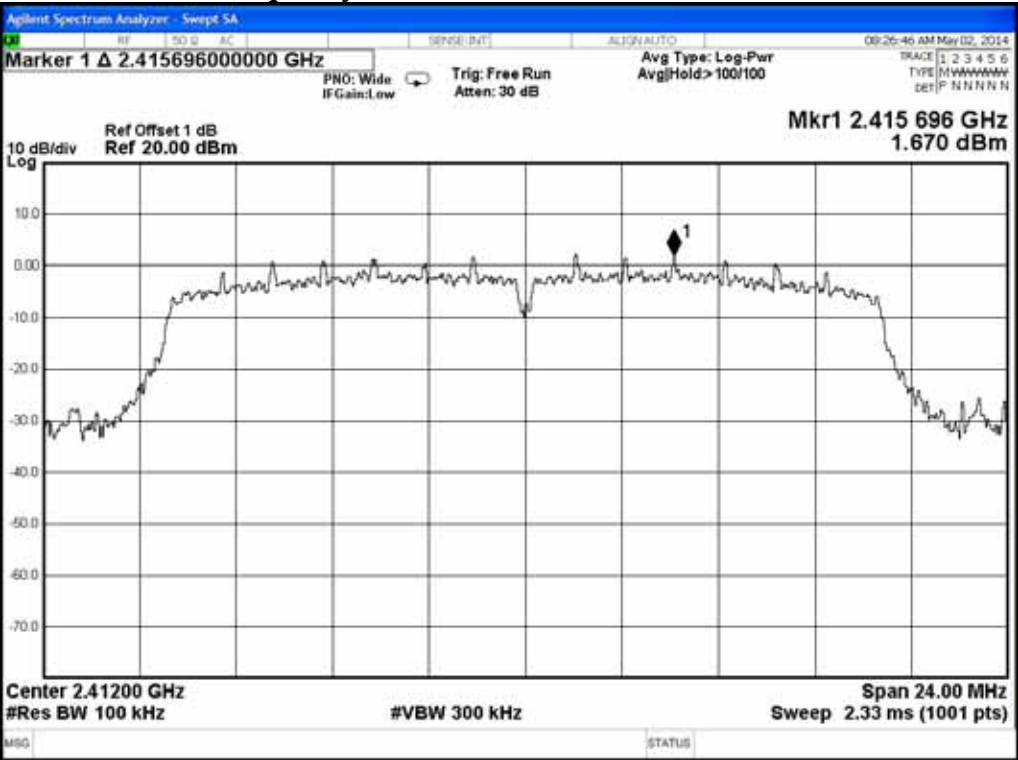

802.11n-HT20, Frequency: 2437MHz



802.11n-HT20, Frequency: 2462MHz

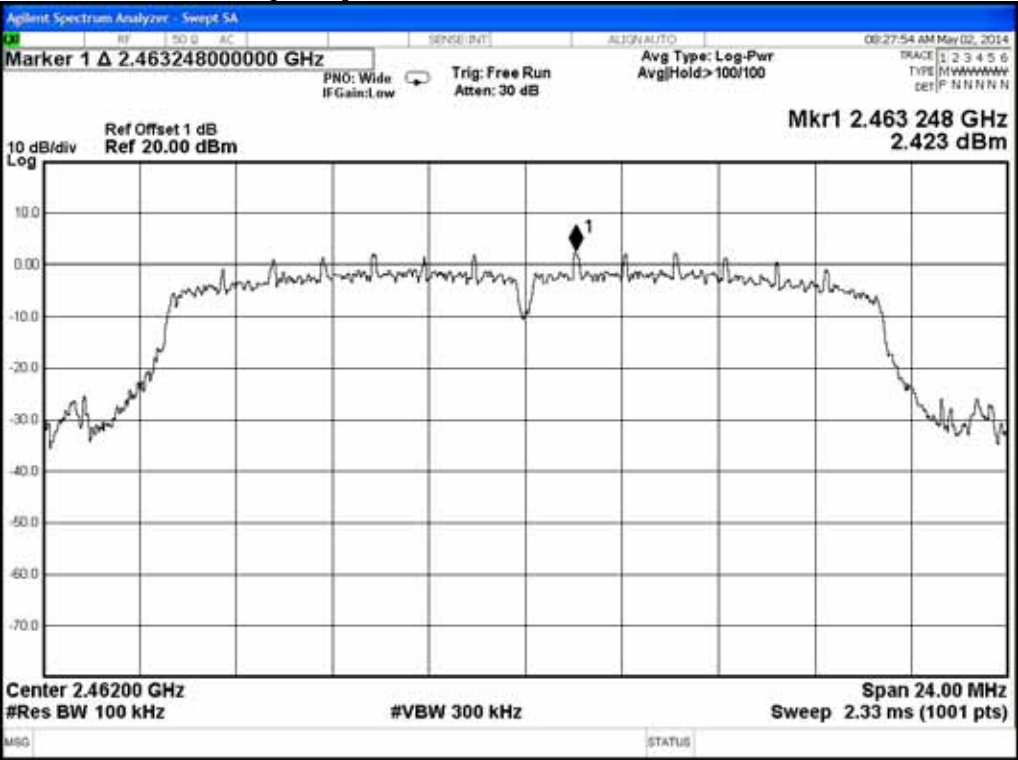


9.6.2. BT Function

Test Date : 2014. 05. 05 Temperature : 24°C Humidity : 48%

Mode	Channel	Frequency	Power Spectral Density (dBm)
1.	CH 0	2402MHz	3.788
2.	CH 19	2440MHz	4.888
3.	CH 39	2480MHz	5.538

[Limit: 8dBm]

BLE, Frequency: 2402MHz

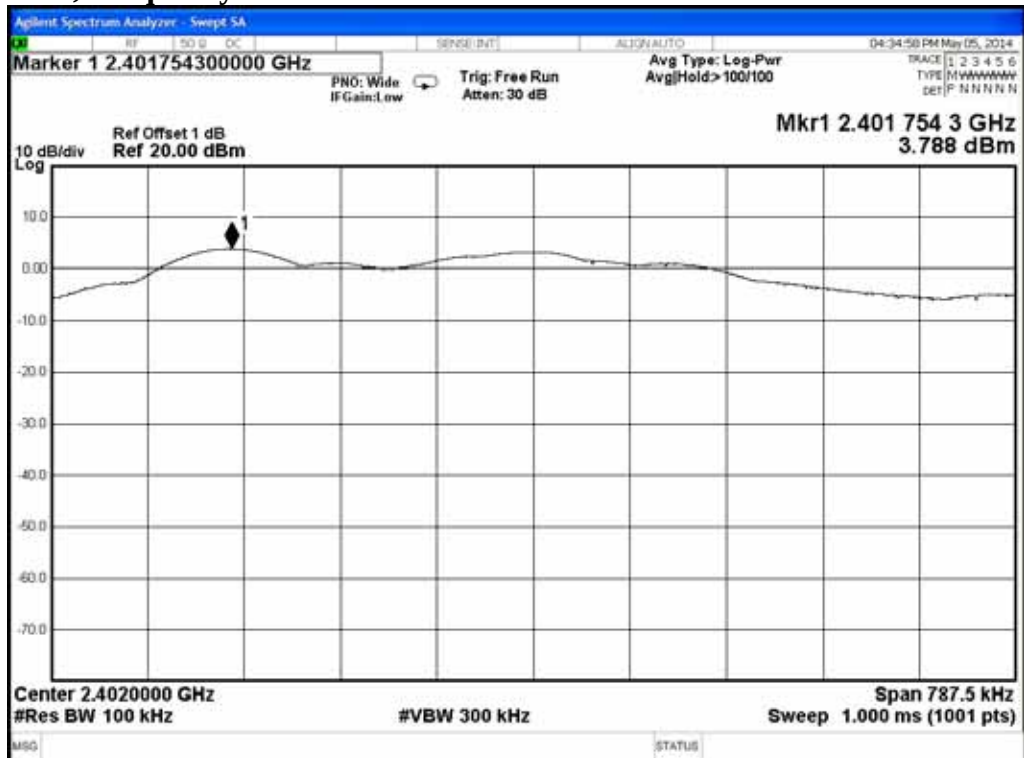

BLE, Frequency: 2440MHz



BLE, Frequency: 2480MHz



10.DEVIATION TO TEST SPECIFICATIONS

【NONE】