

FCC 15.247 2.4 GHz Report

for

Elitegroup Computer Systems Co., Ltd.

No. 239, Sec. 2, TiDing Blvd,
Taipei, Taiwan 11493

Brand : ECS
Product Name : 12" Multi Function Pad
Model Name : mPAD-12.....
(The "." in the model name can be 0 to 9, A to Z, a to z, "-", "_", "\", "/" or blank for marketing use only)
FCC ID : WL6TC12A-W

Prepared by: : AUDIX Technology Corporation,
EMC Department



TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. REPORT HISTORY.....	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of EUT	7
3.2. Description of Key Component Lists	8
3.3. EUT Specifications Assessed in Current Report.....	9
3.4. Antenna Information.....	10
3.5. Data Rate Relative to Output Power.....	12
3.6. Test Configuration.....	13
3.7. Setup Configuration	15
3.8. Operating Condition of EUT	15
3.9. Description of Test Facility	16
3.10. Measurement Uncertainty	17
4. MEASUREMENT EQUIPMENT LIST	18
4.1. Conducted Emission Measurement.....	18
4.2. Radiated Emission Measurement.....	18
4.3. RF Conducted Measurement.....	18
5. CONDUCTED EMISSION MEASUREMENT.....	19
5.1. Block Diagram of Test Setup	19
5.2. Power Line Conducted Emission Limit	19
5.3. Test Procedure	19
5.4. Conducted Emission Measurement Results	20
6. RADIATED EMISSION MEASUREMENT	22
6.1. Block Diagram of Test Setup	22
6.2. Radiated Emission Limits	24
6.3. Test Procedure	25
6.4. Measurement Result Explanation	26
6.5. Test Results.....	26
7. 6dB BANDWIDTH MEASUREMENT	64
7.1. Block Diagram of Test Setup	64
7.2. Specification Limits	64
7.3. Test Procedure	64
7.4. Test Results.....	64
8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	65
8.1. Block Diagram of Test Setup	65
8.2. Specification Limits	65
8.3. Test Procedure	65
8.4. Test Results.....	65
9. EMISSION LIMITATIONS MEASUREMENT	66
9.1. Block Diagram of Test Setup	66
9.2. Specification Limits	66

AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

9.3. Test Procedure	66
9.4. Test Results	67
10. POWER SPECTRAL DENSITY	68
10.1. Block Diagram of Test Setup	68
10.2. Specification Limits	68
10.3. Test Procedure	68
10.4. Test Results	68
11. DEVIATION TO TEST SPECIFICATIONS	69

APPENDIX A TEST PHOTOGRAPHS
APPENDIX B TEST PLOTS

TEST REPORT CERTIFICATION

Applicant : Elitegroup Computer Systems Co., Ltd.
Product Name : 12" Multi Function Pad
Model No. : mPAD-12.....
(The "." in the model name can be 0 to 9, A to Z, a to z, "-", "_", "\",
"/" or blank for marketing use only)
Serial No. : N/A
Brand : ECS

Applicable Standards:

47 CFR FCC Part 15 Subpart C:2015
ANSI C63.10:2013
KDB 558074 D01 DTS Meas Guidance v03r05

AUDIX Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **AUDIX Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Test: 2016. 05. 20 ~ 09. 13

Date of Report: 2016. 09. 14

Producer: Annie Yu
(Annie Yu/Administrator)

Signatory: Jarwei Wang
(Jarwei Wang/Section Manager)

1. REPORT HISTORY

Edition No.	Date of Rev.	Revision Summary	Report No.
0	2016. 09. 14	Original Report.	EM-F160345

2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.247(d)/15.205	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)(3)	Maximum Peak Output	PASS
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	PASS

3. GENERAL INFORMATION

3.1. Description of EUT

Product	12" Multi Function Pad																							
Model Number	mPAD-12..... (The “.” in the model name can be 0 to 9, A to Z, a to z, "-", "_", "\", "/" or blank for marketing use only)																							
Test Model	mPAD-12-CHT4-I																							
Serial Number	N/A																							
Brand Name	ECS																							
Applicant	Elitegroup Computer Systems Co., Ltd. No. 239, Sec. 2., TiDing Blvd., Taipei, Taiwan 11493																							
RF Features	WLAN:802.11a/b/g/n/ac Bluetooth: BT and BLE NFC																							
Transmit Type	<table><tr><th colspan="2">2.4 GHz</th></tr><tr><td>802.11b</td><td>2T2R</td></tr><tr><td>802.11g</td><td>2T2R</td></tr><tr><td>802.11n-HT20</td><td>2T2R</td></tr><tr><td>802.11n-HT40</td><td>2T2R</td></tr><tr><td>BLE</td><td>1T1R</td></tr></table> <table><tr><th colspan="2">UNII Bands</th></tr><tr><td>802.11a</td><td>2T2R</td></tr><tr><td>802.11n-HT20/ 802.11ac-VHT20</td><td>2T2R</td></tr><tr><td>802.11n-HT40/ 802.11ac-VHT40</td><td>2T2R</td></tr><tr><td>802.11ac-VHT80</td><td>2T2R</td></tr></table>		2.4 GHz		802.11b	2T2R	802.11g	2T2R	802.11n-HT20	2T2R	802.11n-HT40	2T2R	BLE	1T1R	UNII Bands		802.11a	2T2R	802.11n-HT20/ 802.11ac-VHT20	2T2R	802.11n-HT40/ 802.11ac-VHT40	2T2R	802.11ac-VHT80	2T2R
2.4 GHz																								
802.11b	2T2R																							
802.11g	2T2R																							
802.11n-HT20	2T2R																							
802.11n-HT40	2T2R																							
BLE	1T1R																							
UNII Bands																								
802.11a	2T2R																							
802.11n-HT20/ 802.11ac-VHT20	2T2R																							
802.11n-HT40/ 802.11ac-VHT40	2T2R																							
802.11ac-VHT80	2T2R																							
Date of Receipt of Sample	2016. 05. 19																							

3.2. Description of Key Component Lists

Item	Supplier	Model / Type	Character
Main Board	ECS	TC71A	---
CPU (Socket: BGA1380)	Intel	Z8550	1.44GHz, up to 2.4GHz
Memory (On Board)	SK hynix	H9CCNNNBPTBL	LPDDR3 1600MHz 4GB
12" LCD Panel	Starry	20811220560001	ZC-122A-0776AT
Touch Module	TOPGROUP EETI	ZC-122A-0776AT EXC3102	Support 10-points multi-touch(Capacitive)
Storage	SandDisk	SDIN9DW4-32G	32GB
Front Camera	KINGCOME	O6P2-TC12A-WFHQ	Front Camera : 2.0M
Rear Camera	KINGCOME	O9B8-TC12A-WBHQ	Rear Camera: 8.0M
Wi-Fi +BT Module	Qualcomm (Azurewave)	QCNFA324 (AW-CM217NF)	Wi-Fi 802.11 a/b/g/n/ac + BT 4.0
GPS	Boradcam	BCM4752	GPS&GLONASS
NFC	NXP	NPC100	---
BATTREY	SUNWODA	TC12A-W	3.7Vdc, 12600mAh / 46.62Wh
AC Adapter (Wall-mount, 2C)	Asian Power Devices Inc.	WA-36A12R	I/P: AC 100-240V, 50-60Hz, 0.9A Max. O/P: DC 12V, 3A
		DC Power Cord: Unshielded, Undetachable, 1.8m With one ferrite core	
mPad Module (Option)	ECS	Barcode Scanner mPAD	Barcode Scanner
	ECS	SCR mPAD	Smart Card Reader (SCR)
	ECS	MSR mPAD	Magnetic Stripe Reader (MSR)
	ECS	USB Ethernet mPAD	Giga LAN Port
12" Pad Docking (Option)	ECS	DOCKING mPAD-12	Docking

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.3. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
802.11b	2412-2462	11	DSSS (DBPSK/DQPSK/CCK)	Up to 11
802.11g		11	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11n-HT20				Up to 300
802.11n-HT40	2422-2452	7		
BLE	2402-2480	40	GFSK	1

Channel List			
802.11 b/g/n-HT20		802.11n-HT40	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	2412		
2	2417		
3	2422		
4	2427	4	2427
5	2432	5	2432
6	2437	6	2437
7	2442	7	2442
8	2447	8	2447
9	2452	9	2452
10	2457		
11	2462		

Channel List			
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
37	2402	18	2442
00	2404	19	2444
01	2406	20	2446
02	2408	21	2448
03	2410	22	2450
04	2412	23	2452
05	2414	24	2454
06	2416	25	2456
07	2418	26	2458
08	2420	27	2460
09	2422	28	2462
10	2424	29	2464
38	2426	30	2466
11	2428	31	2468
12	2430	32	2470
13	2432	33	2472
14	2434	34	2474
15	2436	35	2476
16	2438	36	2478
17	2440	39	2480

RMS Output Power(dBm)				
Channel	802.11b	802.11g	802.11n-HT20	802.11n-HT40
1	21.0	17.0	17.0	
2	21.0	17.0	17.0	
3	21.0	17.0	17.0	15.0
4	21.0	17.0	17.0	15.0
5	21.0	17.0	17.0	15.0
6	21.5	22.0	22.0	18.0
7	21.0	16.5	16.0	12.0
8	21.0	16.5	16.0	12.0
9	21.0	16.5	16.0	12.0
10	21.0	16.5	16.0	
11	21.0	16.5	16.0	

3.4. Antenna Information

GPS Antenna					
No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	TC12	JEM	PCB	1510 to 1602	0.84

2.4G Antenna						
No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)	Directional Gain (dBi)
1	IAH150100 (Tx1 Antenna)	Joinsoon Electronics MFG. CO.,LTD	PIFA	2400 to 2500	0.41	2.82 ^{Note1}
2	IAH150101 (Tx2 Antenna)	Joinsoon Electronics MFG. CO.,LTD	PIFA	2400 to 2500	-0.83	
Note 1. Directional gain = 10 log[(10 ^{0.41/20} + 10 ^{-0.83/20}) ² /2]=2.82dBi						

5G Antenna						
No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)	Directional Gain (dBi)
1	IAH150100 (Tx1 Antenna)	Joinsoon Electronics MFG. CO.,LTD	PIFA	5150 to 5350	-3.18	2.046 ^{Note1}
2				5470 to 5725	1.58	3.91 ^{Note2}
3				5725 to 5850	1.58	3.90 ^{Note2}
4	IAH150101 (Tx2 Antenna)	Joinsoon Electronics MFG. CO.,LTD	PIFA	5150 to 5350	0.84	2.046 ^{Note1}
5				5470 to 5725	0.18	3.91 ^{Note2}
6				5725 to 5850	0.15	3.90 ^{Note2}
Note 1. Directional gain = $10 \log[(10^{-3.18/20} + 10^{0.84/20})^2 / 2]$ =2.046dBi						
Note 2. Directional gain = $10 \log[(10^{1.58/20} + 10^{0.18/20})^2 / 2]$ =3.91dBi						
Note 3. Directional gain = $10 \log[(10^{1.58/20} + 10^{0.15/20})^2 / 2]$ =3.90 dBi						

3.5. Data Rate Relative to Output Power

802.11b							
Channel	Modulation		Date Rate (Mbps)		Power (dBm)		
1	DBPSK		1		19.76		
1	DQPSK		2		19.61		
1	CCK		5.5		19.72		
1	CCK		11		19.55		
802.11g							
Channel	Modulation		Date Rate (Mbps)		Power (dBm)		
1	BPSK		6		20.73		
1	BPSK		9		20.49		
1	QPSK		12		20.68		
1	QPSK		18		20.72		
1	16-QAM		24		20.55		
1	16-QAM		36		20.37		
1	64-QAM		48		20.23		
1	64-QAM		54		20.51		
802.11n-HT20				802.11n-HT40			
Channel	Modulation	Date Rate	Power (dBm)	Channel	Modulation	Date Rate	Power (dBm)
1	BPSK	MCS8	23.27	3	BPSK	MCS8	21.66
1	QPSK	MCS9	23.44	3	QPSK	MCS9	21.32
1	QPSK	MCS10	23.38	3	QPSK	MCS10	21.58
1	16-QAM	MCS11	23.51	3	16-QAM	MCS11	21.76
1	16-QAM	MCS12	23.25	3	16-QAM	MCS12	21.53
1	64-QAM	MCS13	23.16	3	64-QAM	MCS13	21.65
1	64-QAM	MCS14	23.39	3	64-QAM	MCS14	21.35
1	64-QAM	MCS15	23.63	3	64-QAM	MCS15	21.77

BLE			
Channel	Modulation	Date Rate(Mbps)	Power(dBm)
0	DBPSK	1	-1.74
0	DQPSK	2	-1.83
0	CCK	5.5	-1.92
0	CCK	11	-1.80

Note: Above results are assessed in peak power.

3.6. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
802.11b	0.99	12.20	0.04
802.11g	0.95	2.105	0.22
802.11n-HT20	0.90	0.957	0.46
802.11n-HT40	0.83	0.4876	0.81
BLE	0.64	0.4033	1.94

Note: When duty cycle is less than 98% (0.98) that duty cycle factor $10\log(1/x)$ is needed to add in conducted test items measured in average detector.

AC Conduction	
Test Case	Normal operation

Item		Mode	Data Rate	Test Channel
Radiated Test Case	Radiated Band Edge Note1	802.11b	1Mbps	1/11
		802.11g	6Mbps	1/11
		802.11n-HT20	MCS8	1/11
		802.11n-HT40	MCS8	3/9
		BLE	1Mbps	37/39
	Radiated Spurious Emission Note1 & 2	802.11b	1 Mbps	1/6/11
		802.11g	6Mbps	1/6/11
		802.11n-HT20	MCS8	1/6/11
		802.11n-HT40	MCS8	3/6/9
		BLE	1Mbps	37/17/39

Item		Mode	Data Rate	Test Channel
Conducted Test Case Note3	6dB Bandwidth	802.11b	1Mbps	1/6/11
		802.11g	6Mbps	1/6/11
		802.11n-HT20	MCS8	1/6/11
		802.11n-HT40	MCS8	3/6/9
		BLE	1Mbps	37/17/39
	Peak Power Spectral Density	802.11b	1Mbps	1/6/11
		802.11g	6Mbps	1/6/11
		802.11n-HT20	MCS8	1/6/11
		802.11n-HT40	MCS8	3/6/9
		BLE	1Mbps	37/17/39
	Peak Output Power	802.11b	1Mbps	1/6/11
		802.11g	6Mbps	1/6/11
		802.11n-HT20	MCS8	1/6/11
		802.11n-HT40	MCS8	3/6/9
		BLE	1Mbps	37/17/39
	Band Edge	802.11b	1Mbps	1/11
		802.11g	6Mbps	1/11
		802.11n-HT20	MCS8	1/11
		802.11n-HT40	MCS8	3/9
		BLE	1Mbps	37/17/39
	Spurious Emission	802.11b	1Mbps	1/6/11
		802.11g	6Mbps	1/6/11
		802.11n-HT20	MCS8	1/6/11
		802.11n-HT40	MCS8	3/6/9
		BLE	1Mbps	37/17/39

Note 1:

☒ Mobile Device: Device was pre-assessed with docking and portable (3 axis), the worst case is tested with docking.

☐ Portable Device, and 3 axis were assessed.

☐ Lie

☐ Side

☐ Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

3.7. Setup Configuration

3.7.1. EUT Configuration for Power Line & Radiated Emission



3.7.2. EUT Configuration for Conducted Test Items



3.8. Operating Condition of EUT

Test program “QCA Radio Control Toolkit” is used for enabling EUT WLAN function under continues transmitting and choosing data rate/ channel.

3.9. Description of Test Facility

Test Firm Name	:	AUDIX Technology Corporation EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Location & Facility	:	No. 8 Shielded Room No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Semi-Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Fully Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan IC Test Site Registration No.: 5183B-4 Renewal on August 31, 2015
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724
FCC OET Designation	:	TW1004 & TW1090

3.10. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	±3.50dB
Radiation Test (Distance: 3m)	30MHz~1000MHz	± 3.68dB
	Above 1GHz	± 5.82dB

Remark : Uncertainty = $k_{uc}(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Test Receiver	R&S	ESR3	101774	2016. 02. 04	2017. 02. 03
2.	A.M.N.	R&S	ENV4200	100169	2015. 11. 17	2016. 11. 16
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2015. 12. 23	2016. 12. 22
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2016. 01. 17	2017. 01. 16
5.	Test Software	Audix	e3	V.6.120424	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

4.2.1. Frequency Range 9kHz~1000MHz (Semi Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2016. 09. 13	2017. 09. 12
2.	Test Receiver	R & S	ESCS30	100338	2016. 06. 22	2017. 06. 21
3.	Amplifier	HP	8447D	2944A06305	2016. 02. 23	2017. 02. 22
4.	Bilog Antenna	CHASE	CBL6112D	33821	2016. 01. 30	2017. 01. 29
5.	Loop Antenna	R&S	HFH2-Z2	891847/27	2015. 12. 24	2016. 12. 23
6.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

4.2.2. Frequency Range Above 1GHz (Fully Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	2016. 08. 19	2017. 08. 18
2.	Amplifier	Sonoma	310N	187161	2016. 06. 14	2017. 06. 13
3.	2.4GHz Notch Filter	K&L	7NSL10-244 1.5E130.5-00	1	2016. 07. 27	2017. 07. 26
4.	Horn Antenna	ETS-Lindgren	3117	00135902	2016. 03. 05	2017. 03. 04
5.	Loop Antenna	R&S	HFH2-Z2	891847/27	2015. 12. 24	2016. 12. 23
6.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Agilent	N9010A-507	MY52220264	2015. 08. 20	2016. 08. 19
2.	Power Meter	Anritsu	ML2495A	1145008	2015. 10. 23	2016. 10. 22
3.	Power Sensor	Anritsu	MA2411B	1126096	2015. 10. 23	2016. 10. 22

5. CONDUCTED EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

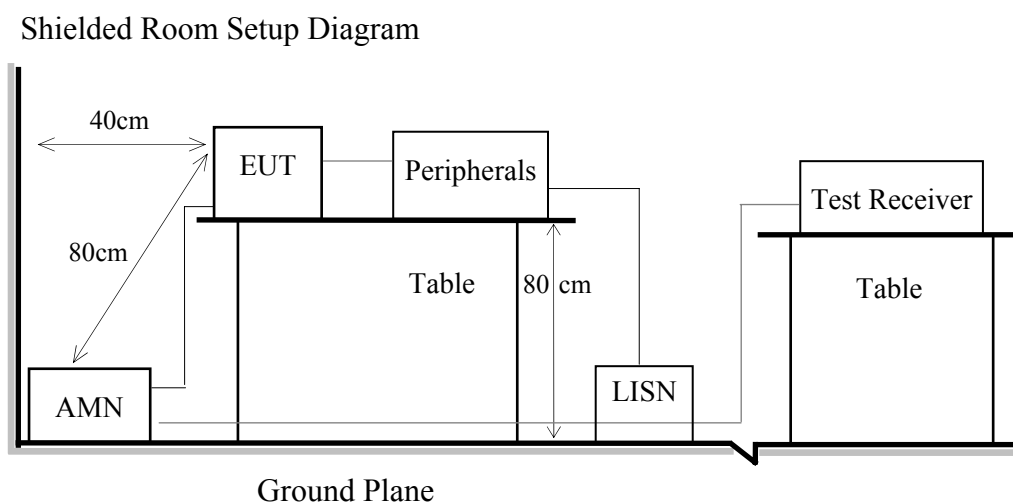

5.2. Power Line Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.


5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Conducted Emission Measurement Results

PASSED.

Test Date	2016/06/01	Temp./Hum.	25°C/60%
Test Voltage	AC 120V, 60Hz		

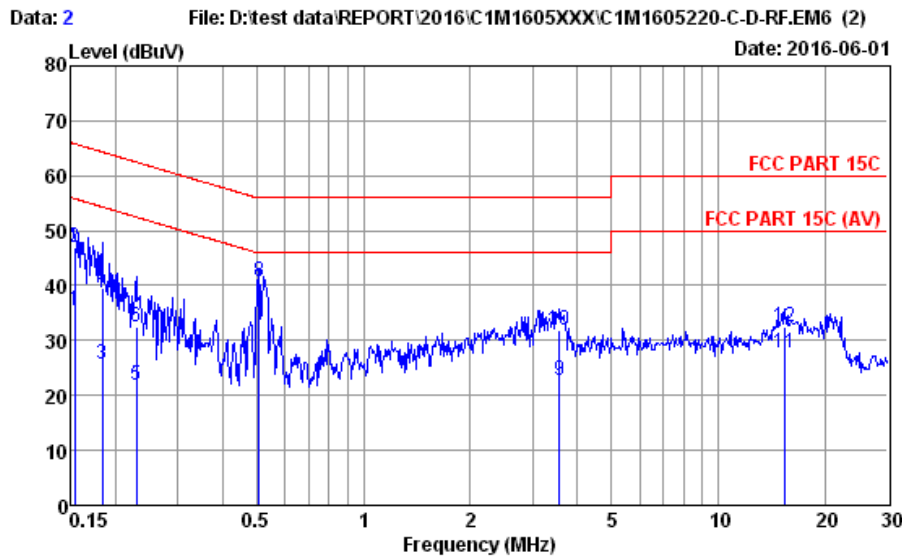

Site no. : No.8 Shielded Room Data no. : 2
Condition : ENV4200 100169 Phase : NEUTRAL
Limit : FCC PART 15C
Env. / Ins. : 25°C / 60% ESR3 (1774) Engineer : Tim
EUT : mPAD-12-CHT4-I
Power Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	11.43	0.03	9.86	13.97	35.29	55.82	20.53	Average
2	0.153	11.43	0.03	9.86	25.63	46.95	65.82	18.87	QP
3	0.183	11.31	0.03	9.86	4.36	25.56	54.33	28.77	Average
4	0.183	11.31	0.03	9.86	18.32	39.52	64.33	24.81	QP
5	0.229	11.20	0.03	9.86	0.89	21.98	52.48	30.50	Average
6	0.229	11.20	0.03	9.86	11.30	32.39	62.48	30.09	QP
7	0.507	10.99	0.04	9.86	18.45	39.34	46.00	6.66	Average
8	0.507	10.99	0.04	9.86	19.95	40.84	56.00	15.16	QP
9	3.565	11.14	0.12	9.87	1.58	22.71	46.00	23.29	Average
10	3.565	11.14	0.12	9.87	10.71	31.84	56.00	24.16	QP
11	15.388	13.41	0.25	9.90	4.15	27.71	50.00	22.29	Average
12	15.388	13.41	0.25	9.90	8.93	32.49	60.00	27.51	QP


Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2016/06/01	Temp./Hum.	25°C/60%
Test Voltage	AC 120V, 60Hz		

Data: 1 File: D:\test data\REPORT\2016\C1M1605XXX\C1M1605220-C-D-RF.EM6 (2) Date: 2016-06-01

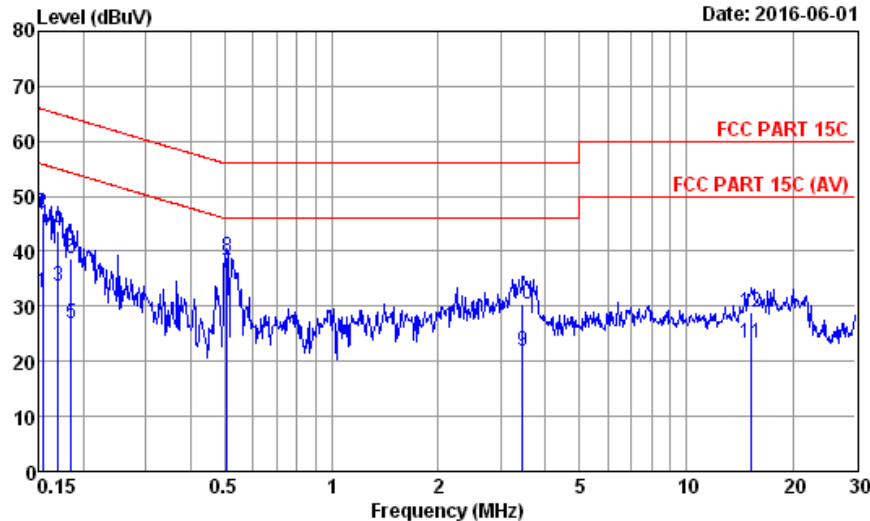

Site no. : No.8 Shielded Room Data no. : 1
Condition : ENV4200 100169 Phase : LINE
Limit : FCC PART 15C
Env. / Ins. : 25°C / 60% ESR3 (1774) Engineer : Tim
EUT : mPAD-12-CHT4-I
Power Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.75	0.03	9.86	11.80	32.44	55.82	23.38	Average
2	0.153	10.75	0.03	9.86	26.19	46.83	65.82	18.99	QP
3	0.169	10.73	0.03	9.86	12.97	33.59	54.99	21.40	Average
4	0.169	10.73	0.03	9.86	23.09	43.71	64.99	21.28	QP
5	0.184	10.70	0.03	9.86	6.35	26.94	54.28	27.34	Average
6	0.184	10.70	0.03	9.86	18.05	38.64	64.28	25.64	QP
7	0.507	10.55	0.04	9.86	15.50	35.95	46.00	10.05	Average
8	0.507	10.55	0.04	9.86	18.42	38.87	56.00	17.13	QP
9	3.454	10.63	0.12	9.87	1.37	21.99	46.00	24.01	Average
10	3.454	10.63	0.12	9.87	9.71	30.33	56.00	25.67	QP
11	15.226	12.36	0.25	9.90	0.94	23.45	50.00	26.55	Average
12	15.226	12.36	0.25	9.90	6.36	28.87	60.00	31.13	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.


6. RADIATED EMISSION MEASUREMENT

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of connection between EUT and simulators

Indicated as section 3.7


6.1.2. Semi Anechoic Chamber (3m) Setup Diagram for 9kHz-30MHz

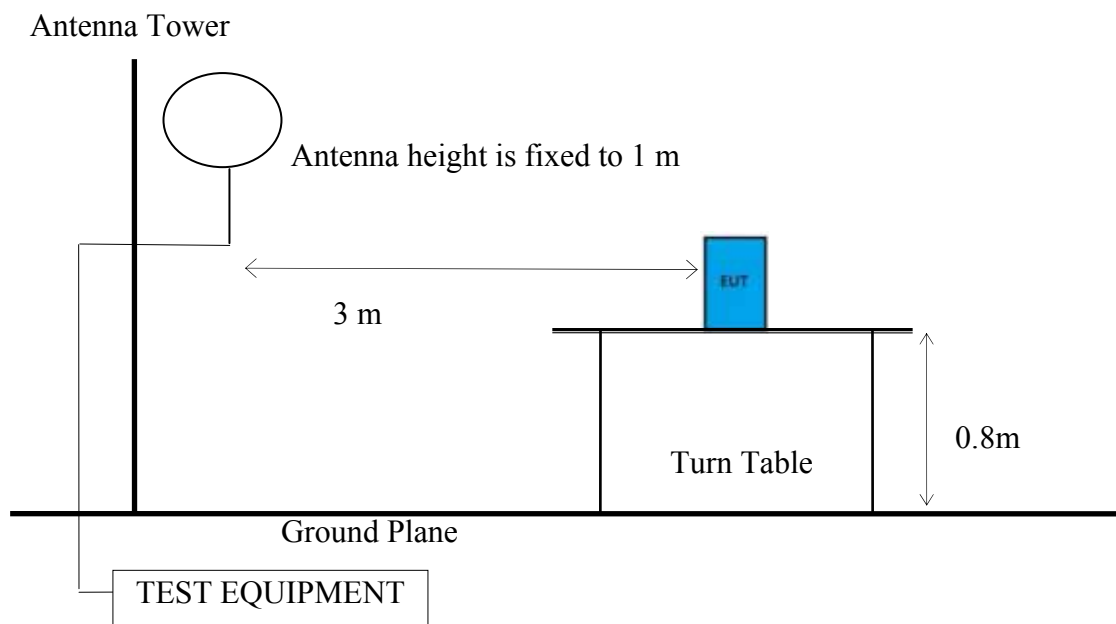

6.1.3. Semi Anechoic Chamber (3m) Setup Diagram for 30-1000 MHz

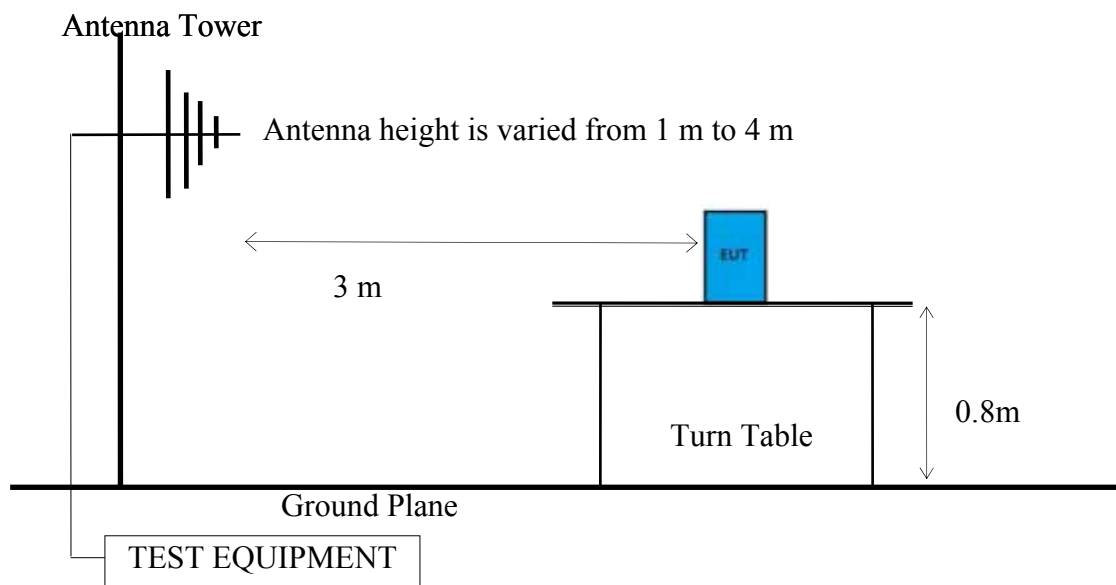

6.1.4. Fully Anechoic Chamber (3m) Setup Diagram for above 1GHz

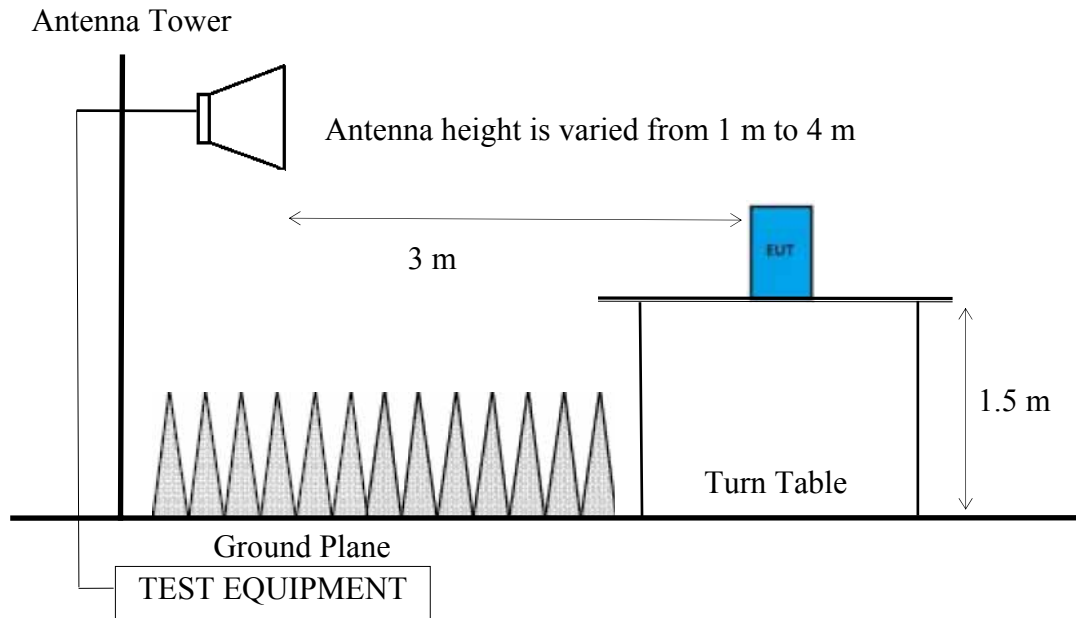

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6	2400/kHz
0.490 - 1.705	30	87.6	24000/kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 40GHz:

The EUT setup on the turn find table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

Frequency above 1GHz to 10th harmonic:

Peak Detector:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average for finally measurement.

Average Detector:**■ Option 1:**

- (1) RBW = 1MHz
- (2) VBW $\geq 1/T$.

Modulation Type	T (ms)	1/ T (kHz)	VBW Setting (kHz)
802.11b	12.20	0.08	0.08
802.11g	2.105	0.48	0.48
802.11n-HT20	0.957	1.04	1.04
802.11n-HT40	0.4876	2.05	2.05
BLE	0.4033	2.48	2.48

N/A: 1/ T is not implemented when duty cycle presented in section 3.5 is $\geq 98\%$.

- (1) Detector = Peak.
- (2) Sweep time = auto.
- (3) Trace mode = max hold.
- (4) Allow sweeps to continue until the trace stabilizes.

□ Option 2:

Average Emission Level= Peak Emission Level+ D.C.C.F.

6.4. Measurement Result Explanation

■ Peak Emission Level=Antenna Factor + Cable Loss + Meter Reading

■ Average Emission Level=Antenna Factor + Cable Loss + Meter Reading

□ Average Emission Level= Peak Emission Level+ DCCF

Duty Cycle Correction Factor (DCCF)= $20\log(TX_{on}/TX_{on+off})$ presented in section 3.5

□ ERP= Peak Emission Level-95.2dB-2.14dB

6.5. Test Results

PASSED.

Test Date	2016/06/03 ~ 09/13	Temp./Hum.	22°C/58%
Test Voltage	AC 120V, 60Hz		

6.5.1. Emissions within Restricted Frequency Bands

6.5.1.1. Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

6.5.1.2. Frequency 30MHz~1000MHz

Mode	802.11g	Frequency	TX 2437MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
308.39	13.37	4.76	19.73	37.86	46.00	8.14	Peak
366.59	14.82	5.36	17.73	37.91	46.00	8.09	Peak
385.02	15.23	5.53	16.71	37.47	46.00	8.53	Peak
924.34	20.72	7.69	9.42	37.83	46.00	8.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
40.67	12.98	2.52	17.34	32.84	40.00	7.16	Peak
385.02	15.23	5.53	19.82	40.58	46.00	5.42	Peak
461.65	16.46	6.17	22.25	44.88	46.00	1.12	Peak
539.25	17.53	6.47	16.38	40.38	46.00	5.62	Peak

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
308.39	13.37	4.76	18.62	36.75	46.00	9.25	Peak
366.59	14.82	5.36	16.75	36.93	46.00	9.07	Peak
385.02	15.23	5.53	16.18	36.94	46.00	9.06	Peak
924.34	20.72	7.69	8.74	37.15	46.00	8.85	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
40.67	12.98	2.52	15.40	30.90	40.00	9.10	Peak
385.02	15.23	5.53	20.50	41.26	46.00	4.74	Peak
461.65	16.46	6.17	22.14	44.77	46.00	1.23	Peak
615.88	18.39	6.54	15.41	40.34	46.00	5.66	Peak


6.5.2. Frequency Above 1 GHz to 10th harmonics

Band Edge:

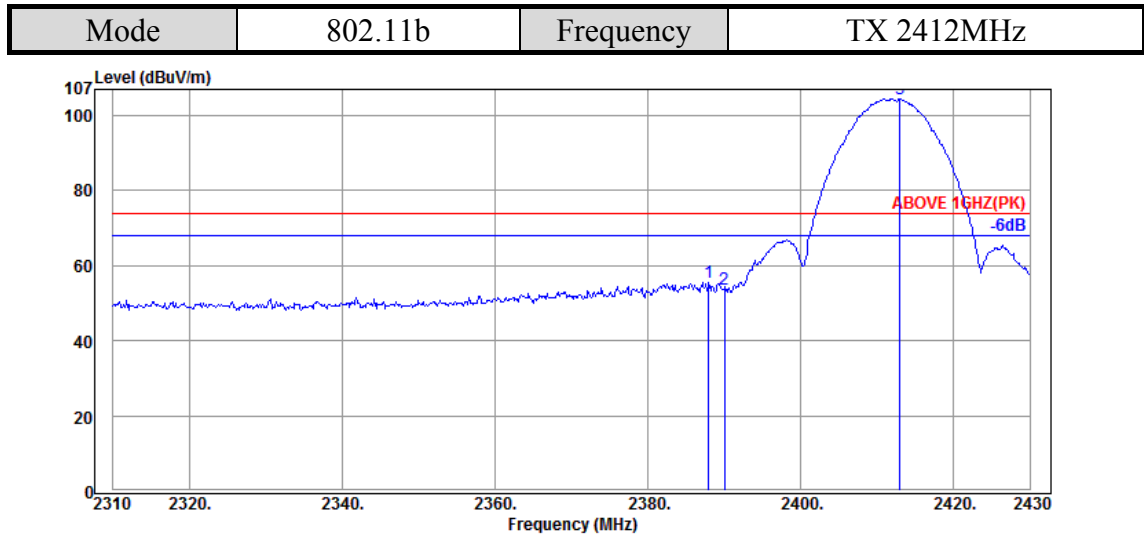

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.00	32.16	5.72	17.64	55.52	74.00	18.48	Peak
2390.04	32.16	5.72	15.67	53.55	74.00	20.45	Peak
2412.96	32.18	5.74	66.53	104.45	---	---	Peak

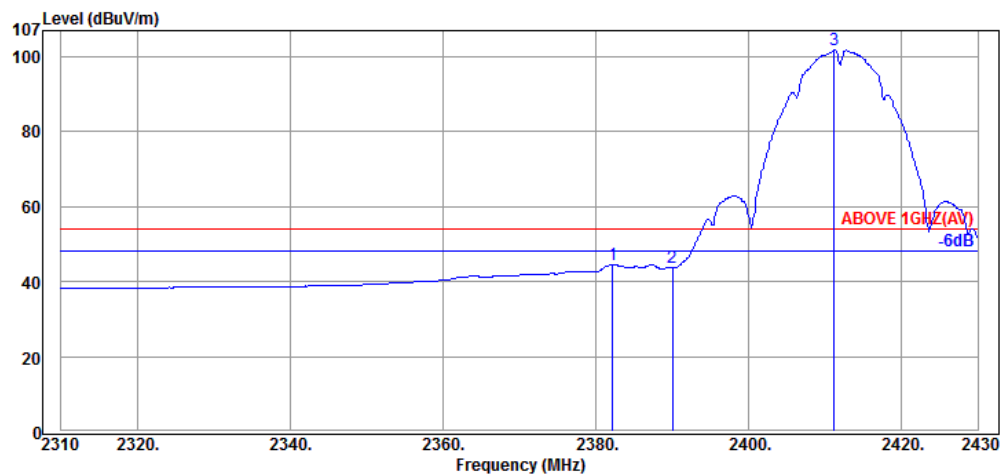

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.24	32.13	5.71	6.67	44.51	54.00	9.49	Average
2390.04	32.16	5.72	5.74	43.62	54.00	10.38	Average
2411.16	32.18	5.74	63.92	101.84	---	---	Average

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

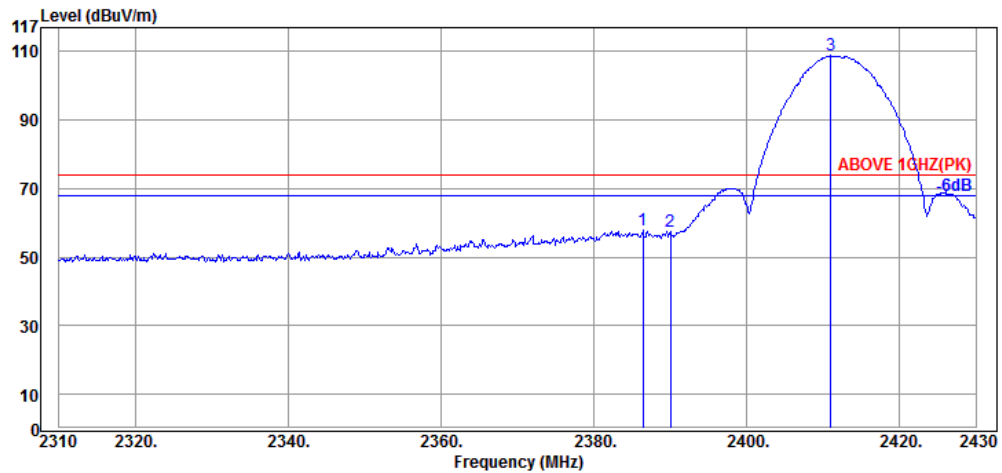

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.44	32.16	5.72	19.89	57.77	74.00	16.23	Peak
2390.04	32.16	5.72	19.44	57.32	74.00	16.68	Peak
2411.04	32.18	5.74	70.92	108.84	---	---	Peak

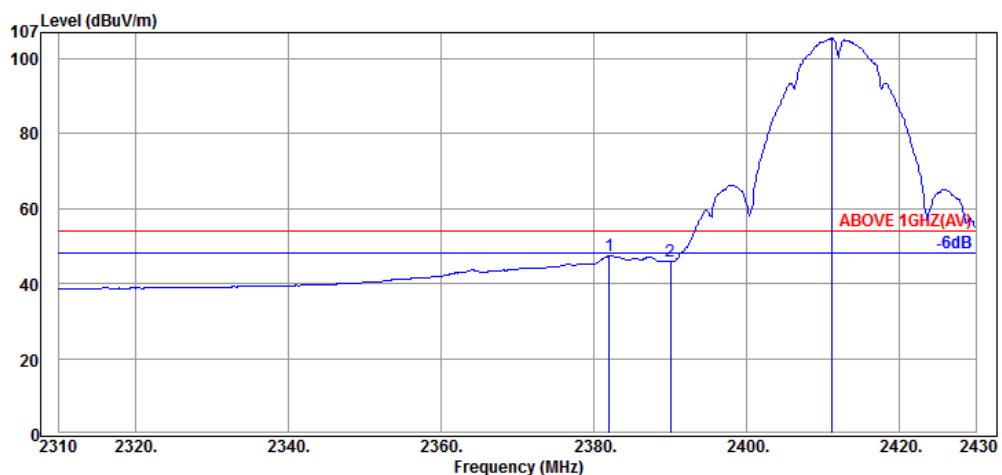

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.00	32.13	5.71	9.51	47.35	54.00	6.65	Average
2390.04	32.16	5.72	8.16	46.04	54.00	7.96	Average
2411.16	32.18	5.74	67.58	105.50	---	---	Average

Mode	802.11b	Frequency	TX 2437MHz
------	---------	-----------	------------

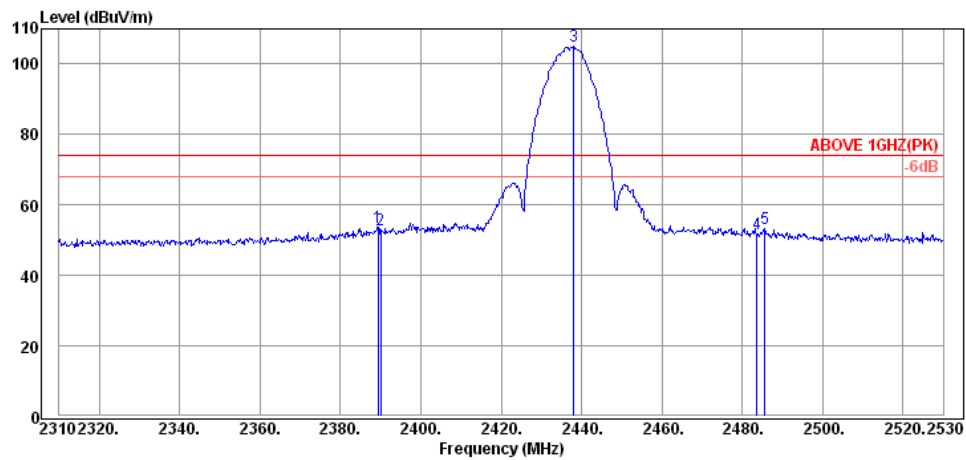

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.42	32.16	6.08	15.35	53.59	74.00	20.41	Peak
2390.08	32.16	6.08	14.76	53.00	74.00	21.00	Peak
2438.04	32.23	6.13	66.64	105.00	---	---	Peak
2483.58	32.28	6.19	13.15	51.62	74.00	22.38	Peak
2485.56	32.28	6.19	14.97	53.44	74.00	20.56	Peak

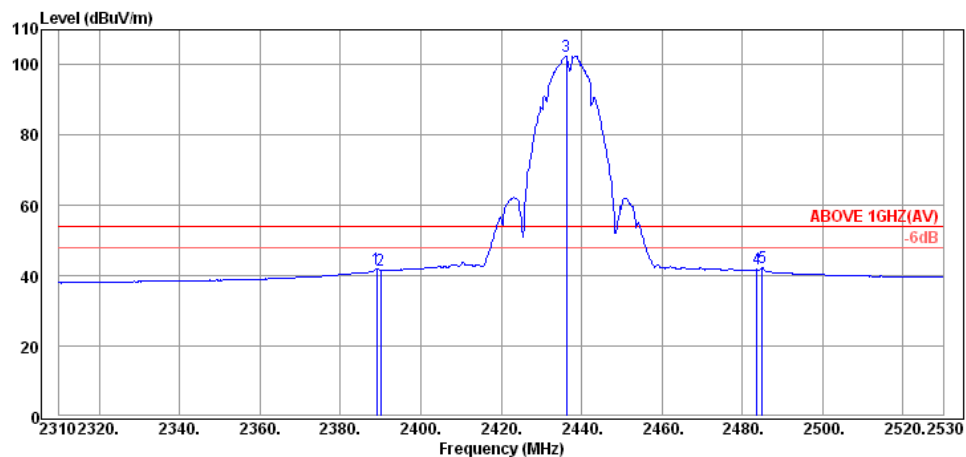

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.98	32.16	6.08	3.74	41.98	54.00	12.02	Average
2390.08	32.16	6.08	3.22	41.46	54.00	12.54	Average
2436.28	32.20	6.13	64.26	102.59	---	---	Average
2483.58	32.28	6.19	3.31	41.78	54.00	12.22	Average
2484.90	32.28	6.19	4.01	42.48	54.00	11.52	Average

Mode	802.11b	Frequency	TX 2437MHz
------	---------	-----------	------------

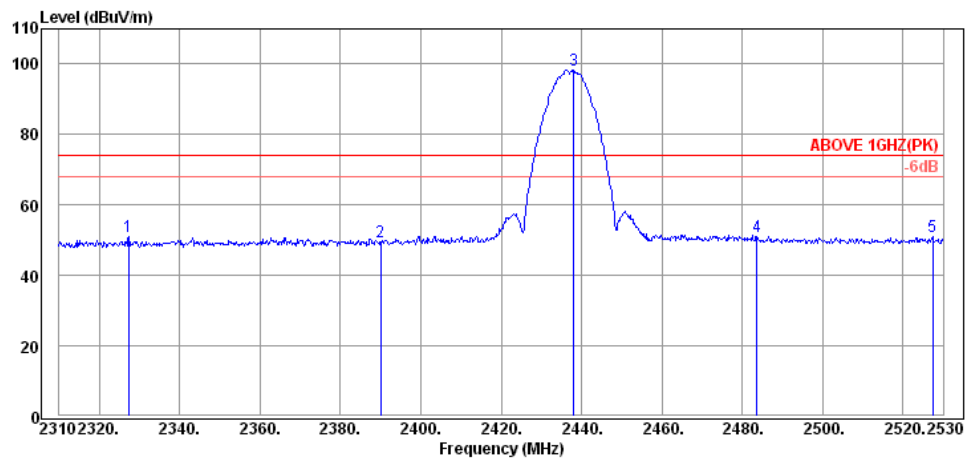

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2327.38	32.06	6.00	12.90	50.96	74.00	23.04	Peak
2390.08	32.16	6.08	11.26	49.50	74.00	24.50	Peak
2438.04	32.23	6.13	60.00	98.36	---	---	Peak
2483.58	32.28	6.19	12.65	51.12	74.00	22.88	Peak
2527.36	32.34	6.25	12.48	51.07	74.00	22.93	Peak

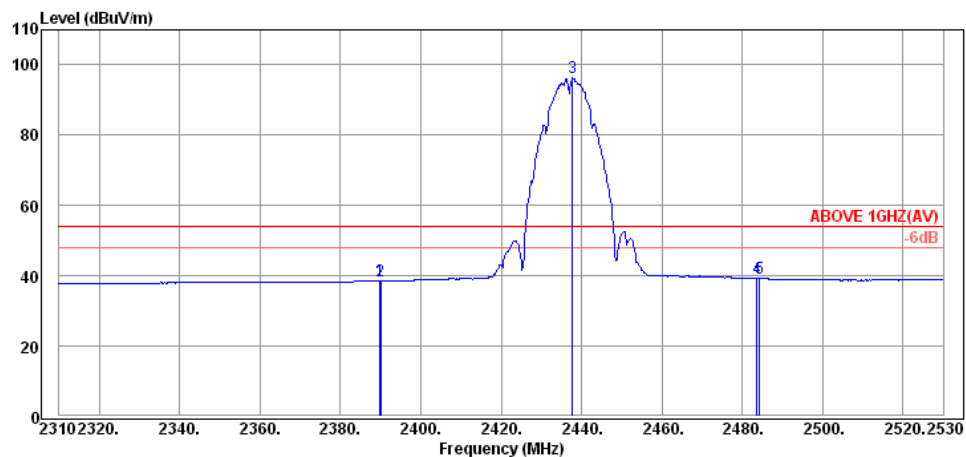

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.86	32.16	6.08	0.28	38.52	54.00	15.48	Average
2390.08	32.16	6.08	0.27	38.51	54.00	15.49	Average
2437.82	32.23	6.13	57.88	96.24	---	---	Average
2483.58	32.28	6.19	0.81	39.28	54.00	14.72	Average
2484.24	32.28	6.19	0.75	39.22	54.00	14.78	Average

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

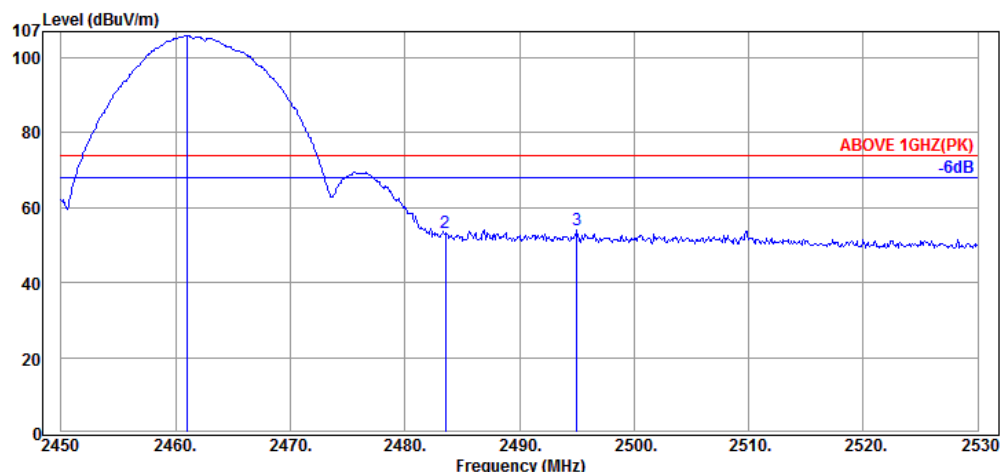

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2460.96	32.25	5.80	67.93	105.98	---	---	Peak
2483.52	32.28	5.82	15.04	53.14	74.00	20.86	Peak
2495.04	32.30	5.84	16.01	54.15	74.00	19.85	Peak

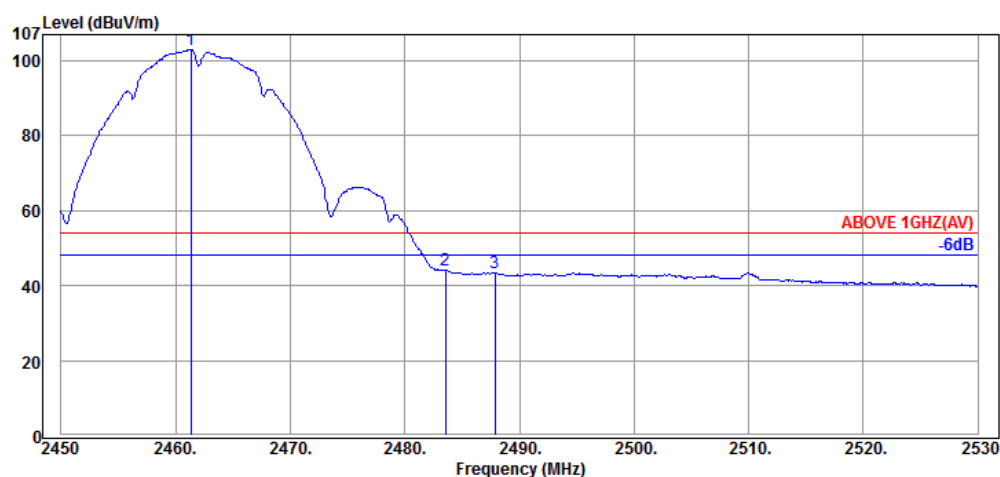

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2461.36	32.25	5.80	64.97	103.02	---	---	Average
2483.52	32.28	5.82	6.03	44.13	54.00	9.87	Average
2487.84	32.30	5.84	5.27	43.41	54.00	10.59	Average

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

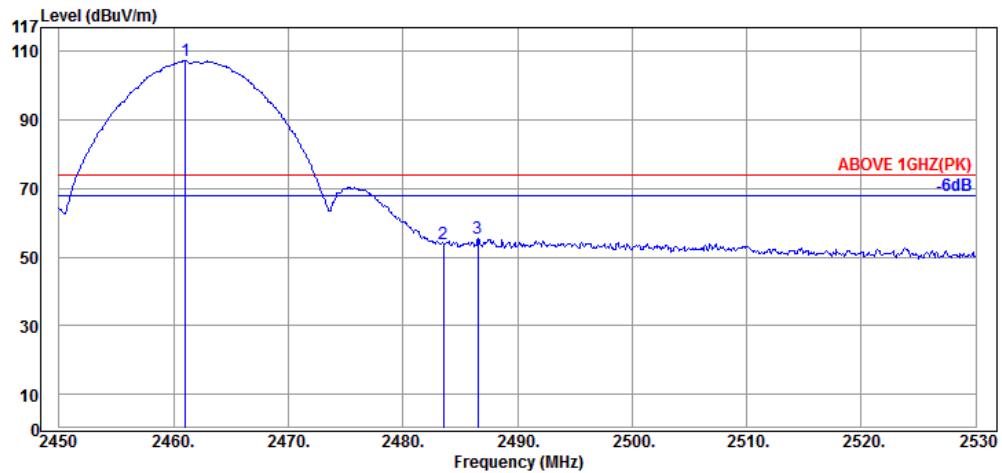

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2461.04	32.25	5.80	69.21	107.26	---	---	Peak
2483.52	32.28	5.82	15.90	54.00	74.00	20.00	Peak
2486.56	32.28	5.82	17.29	55.39	74.00	18.61	Peak

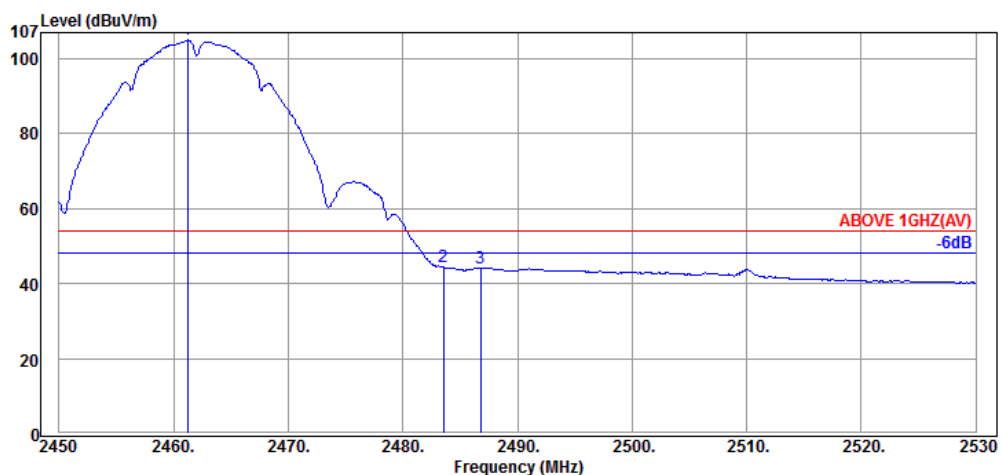

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2461.20	32.25	5.80	66.94	104.99	---	---	Average
2483.52	32.28	5.82	6.29	44.39	54.00	9.61	Average
2486.80	32.28	5.82	6.16	44.26	54.00	9.74	Average

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

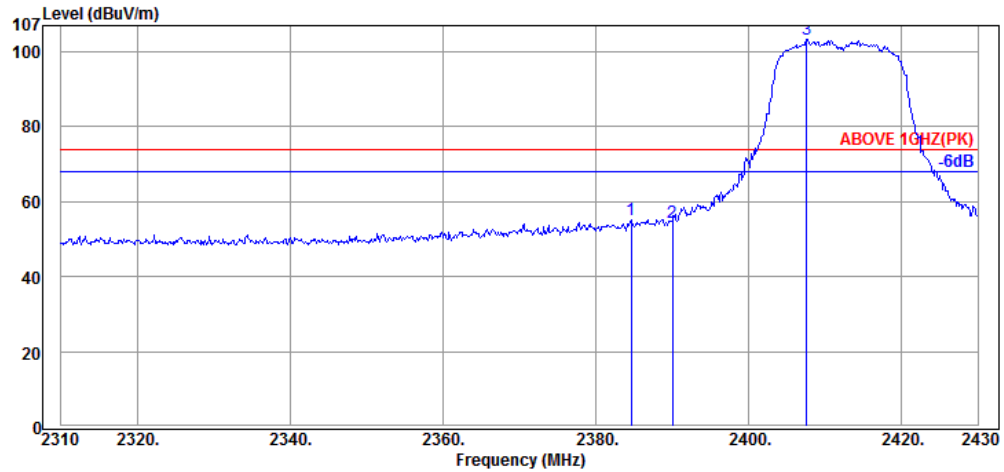

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.64	32.13	5.71	17.37	55.21	74.00	18.79	Peak
2390.04	32.16	5.72	16.69	54.57	74.00	19.43	Peak
2407.56	32.18	5.74	65.49	103.41	---	---	Peak

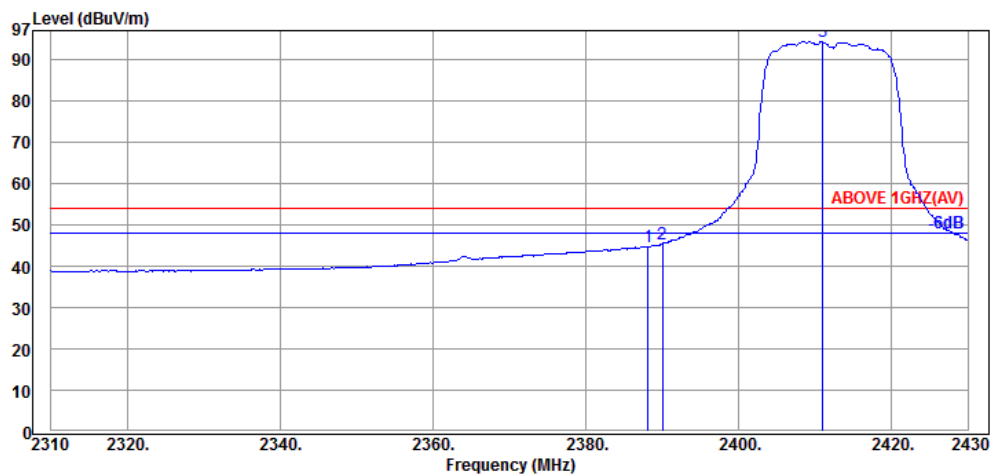

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.12	32.16	5.72	6.88	44.76	54.00	9.24	Average
2390.04	32.16	5.72	7.55	45.43	54.00	8.57	Average
2411.04	32.18	5.74	56.46	94.38	---	---	Average

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

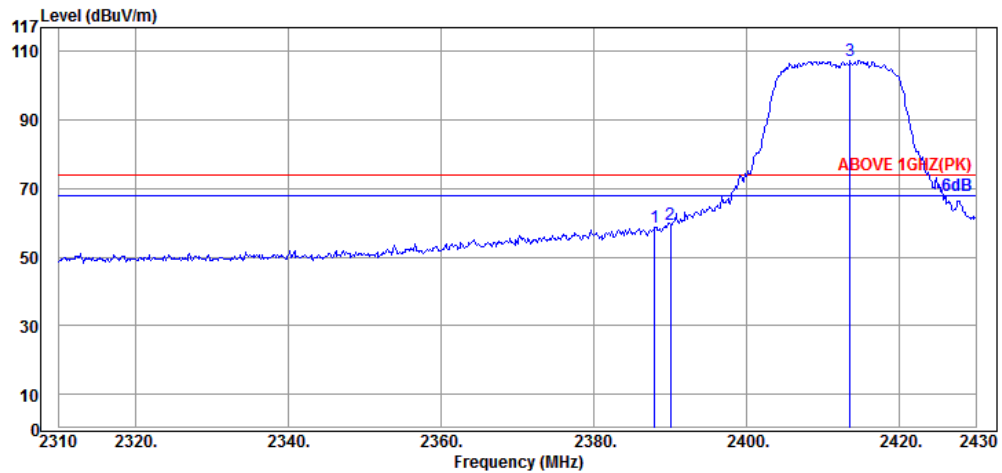

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.00	32.16	5.72	20.93	58.81	74.00	15.19	Peak
2390.04	32.16	5.72	21.63	59.51	74.00	14.49	Peak
2413.56	32.18	5.74	69.44	107.36	---	---	Peak

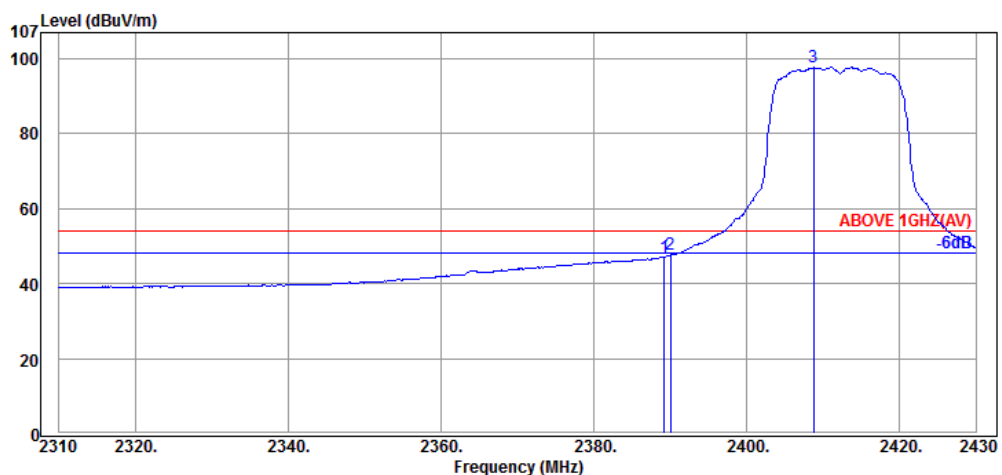

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.20	32.16	5.72	9.26	47.14	54.00	6.86	Average
2390.04	32.16	5.72	9.83	47.71	54.00	6.29	Average
2408.76	32.18	5.74	59.78	97.70	---	---	Average

Mode	802.11g	Frequency	TX 2437MHz
------	---------	-----------	------------

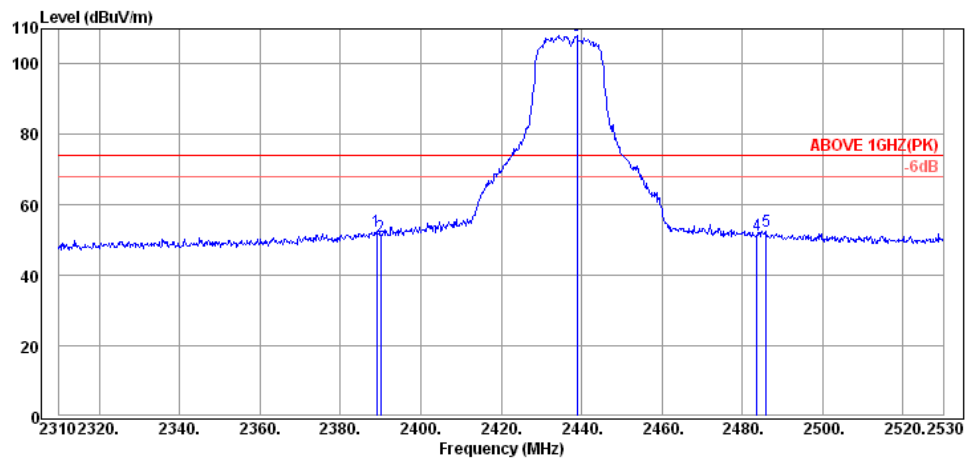

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.98	32.16	6.08	14.14	52.38	74.00	21.62	Peak
2390.08	32.16	6.08	12.89	51.13	74.00	22.87	Peak
2438.92	32.23	6.13	69.87	108.23	---	---	Peak
2483.58	32.28	6.19	13.11	51.58	74.00	22.42	Peak
2486.00	32.28	6.19	14.02	52.49	74.00	21.51	Peak

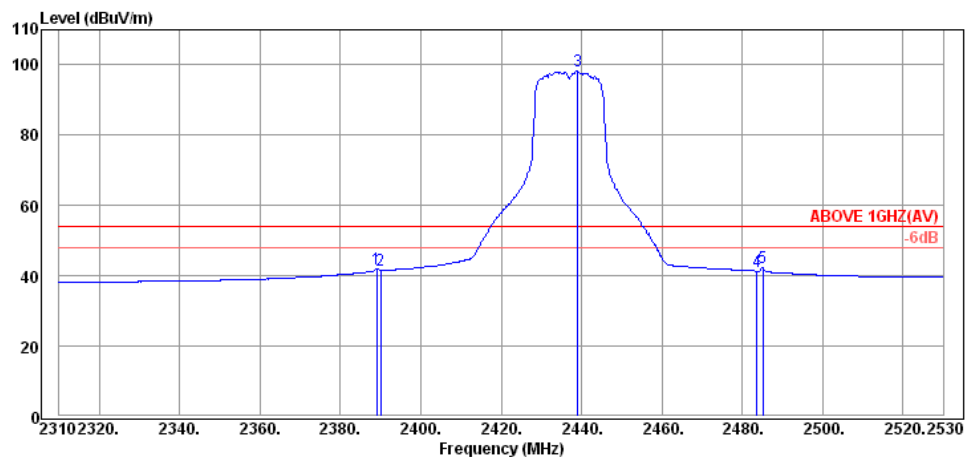

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.98	32.16	6.08	3.79	42.03	54.00	11.97	Average
2390.08	32.16	6.08	3.22	41.46	54.00	12.54	Average
2439.14	32.23	6.13	59.81	98.17	---	---	Average
2483.58	32.28	6.19	2.88	41.35	54.00	12.65	Average
2485.12	32.28	6.19	3.76	42.23	54.00	11.77	Average

Mode	802.11g	Frequency	TX 2437MHz
------	---------	-----------	------------

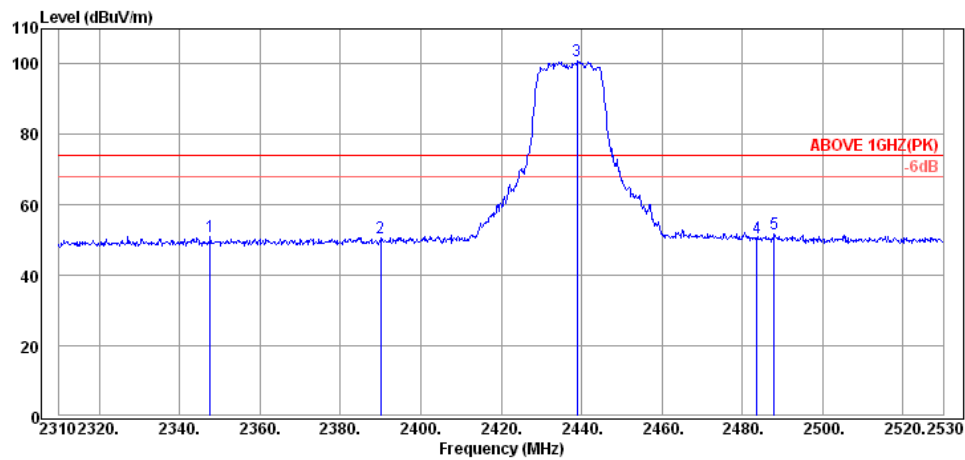

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2347.62	32.08	6.02	13.00	51.10	74.00	22.90	Peak
2390.08	32.16	6.08	12.24	50.48	74.00	23.52	Peak
2438.92	32.23	6.13	62.69	101.05	---	---	Peak
2483.58	32.28	6.19	12.26	50.73	74.00	23.27	Peak
2487.98	32.30	6.19	13.12	51.61	74.00	22.39	Peak

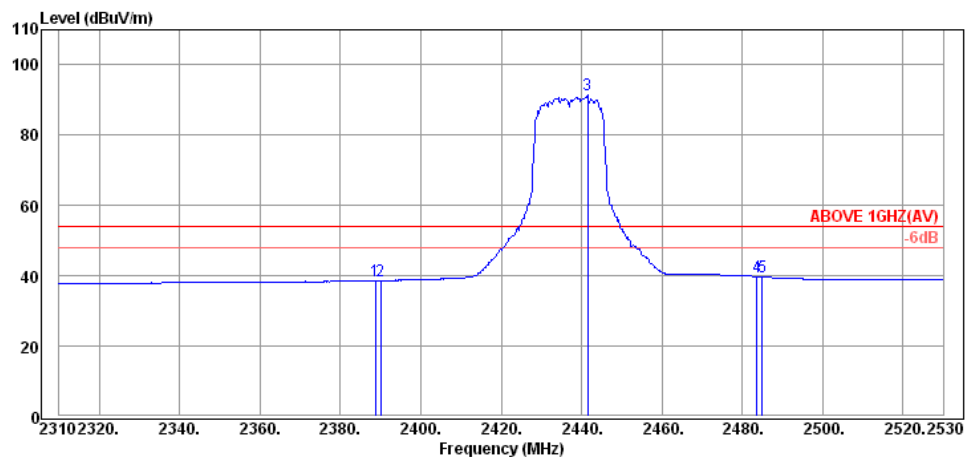

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.76	32.16	6.08	0.45	38.69	54.00	15.31	Average
2390.08	32.16	6.08	0.41	38.65	54.00	15.35	Average
2441.56	32.23	6.13	53.19	91.55	---	---	Average
2483.58	32.28	6.19	1.31	39.78	54.00	14.22	Average
2484.90	32.28	6.19	1.34	39.81	54.00	14.19	Average

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

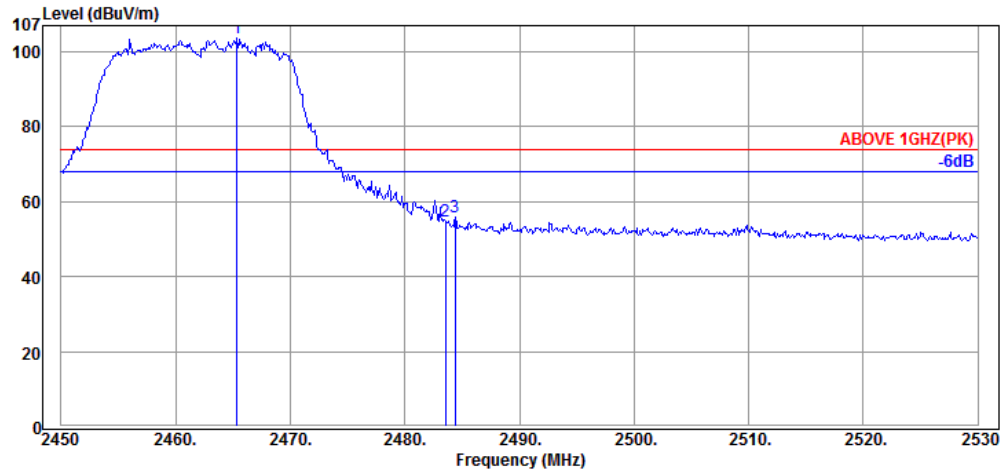

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2465.36	32.25	5.80	65.59	103.64	---	---	Peak
2483.52	32.28	5.82	16.68	54.78	74.00	19.22	Peak
2484.40	32.28	5.82	17.72	55.82	74.00	18.18	Peak

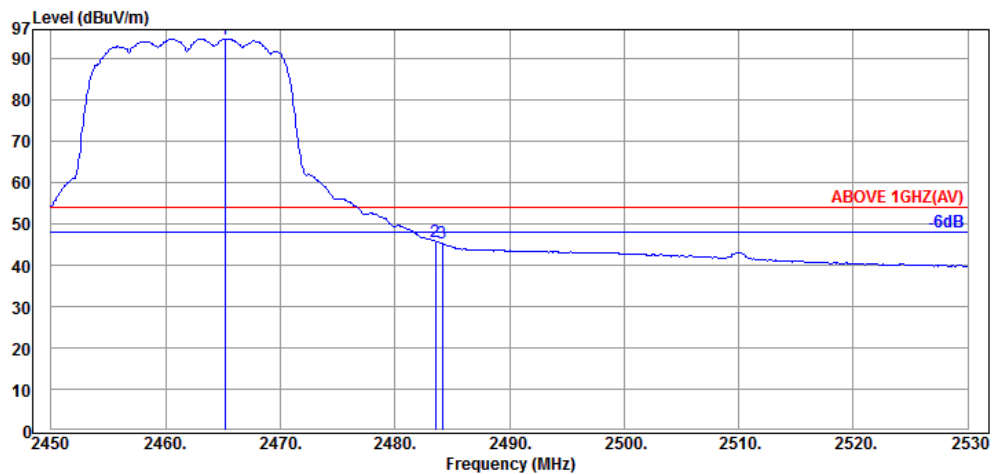

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2465.20	32.25	5.80	56.76	94.81	---	---	Average
2483.52	32.28	5.82	7.73	45.83	54.00	8.17	Average
2484.16	32.28	5.82	7.09	45.19	54.00	8.81	Average

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

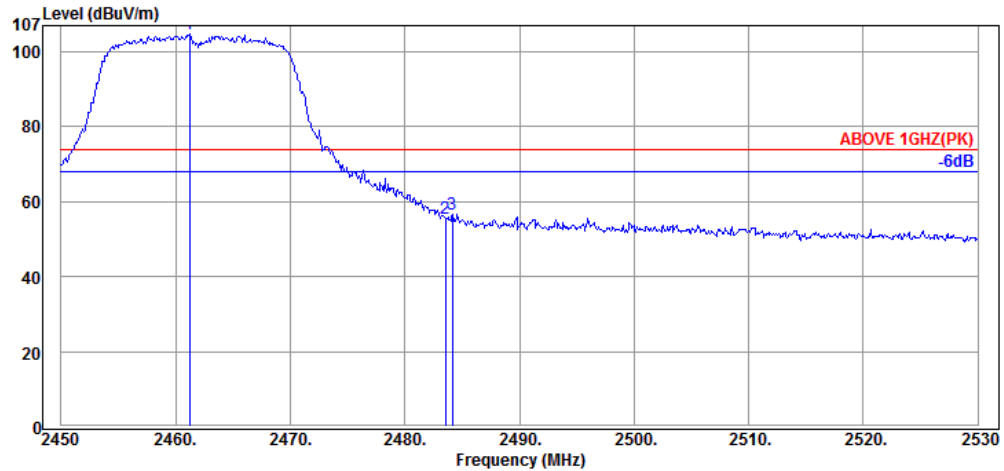

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2461.20	32.25	5.80	66.66	104.71	---	---	Peak
2483.52	32.28	5.82	17.55	55.65	74.00	18.35	Peak
2484.16	32.28	5.82	18.50	56.60	74.00	17.40	Peak

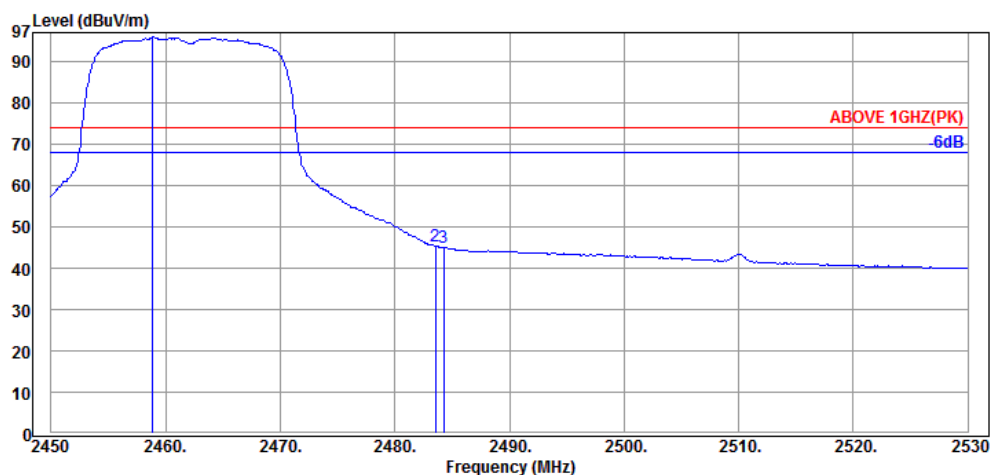

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2458.80	32.25	5.80	57.81	95.86	---	---	Average
2483.52	32.28	5.82	7.26	45.36	54.00	8.64	Average
2484.24	32.28	5.82	6.90	45.00	54.00	9.00	Average

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

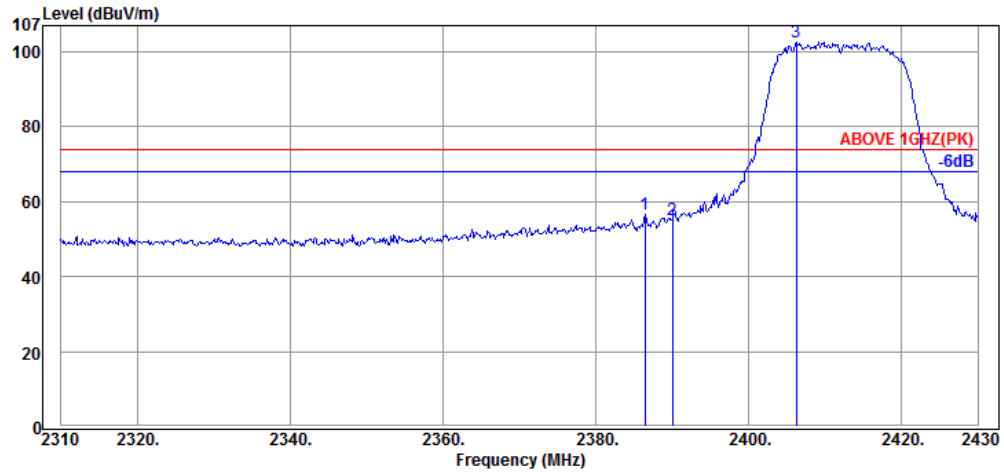

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.44	32.16	5.72	18.84	56.72	74.00	17.28	Peak
2390.04	32.16	5.72	17.20	55.08	74.00	18.92	Peak
2406.24	32.18	5.74	64.83	102.75	---	---	Peak

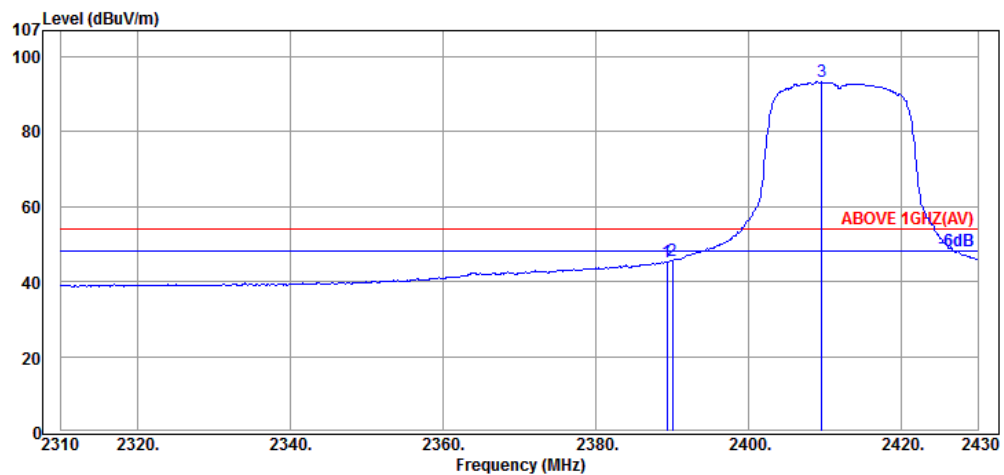

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	32.16	5.72	7.27	45.15	54.00	8.85	Average
2390.04	32.16	5.72	7.74	45.62	54.00	8.38	Average
2409.60	32.18	5.74	55.40	93.32	---	---	Average

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

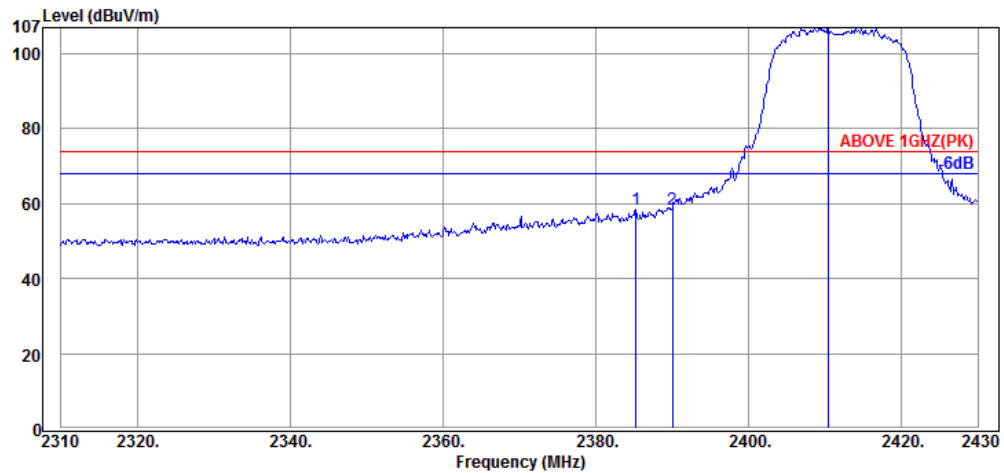

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.24	32.13	5.71	20.79	58.63	74.00	15.37	Peak
2390.04	32.16	5.72	20.68	58.56	74.00	15.44	Peak
2410.44	32.18	5.74	69.23	107.15	---	---	Peak

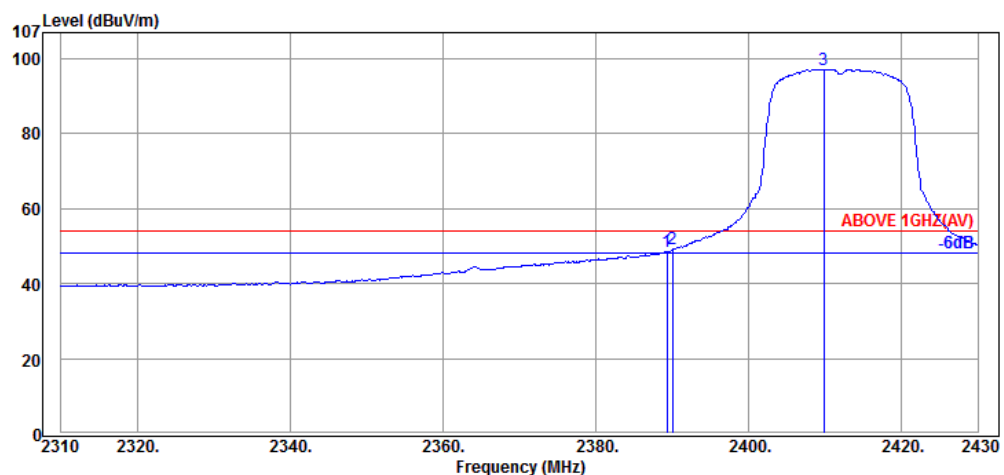

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.32	32.16	5.72	10.73	48.61	54.00	5.39	Average
2390.04	32.16	5.72	11.22	49.10	54.00	4.90	Average
2409.84	32.18	5.74	59.32	97.24	---	---	Average

Mode	802.11n-HT20	Frequency	TX 2437MHz
------	--------------	-----------	------------

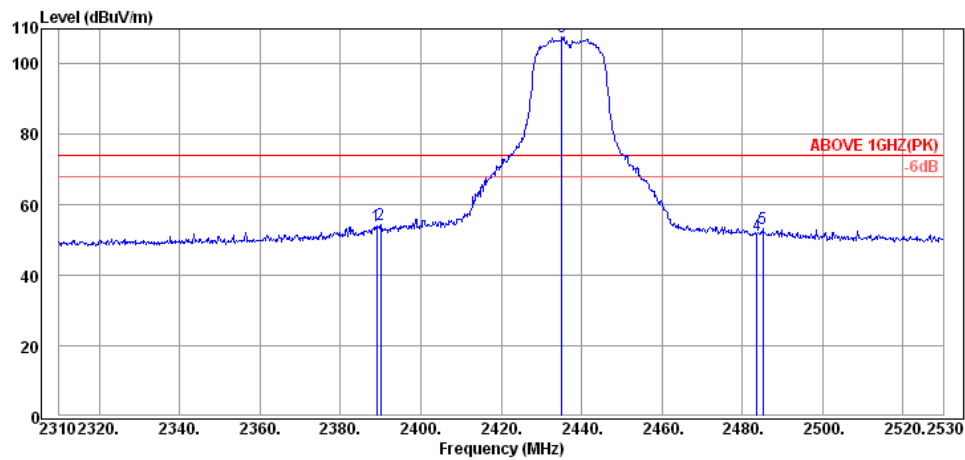

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.98	32.16	6.08	15.85	54.09	74.00	19.91	Peak
2390.08	32.16	6.08	16.35	54.59	74.00	19.41	Peak
2435.18	32.20	6.13	69.28	107.61	---	---	Peak
2483.58	32.28	6.19	13.12	51.59	74.00	22.41	Peak
2485.12	32.28	6.19	14.68	53.15	74.00	20.85	Peak

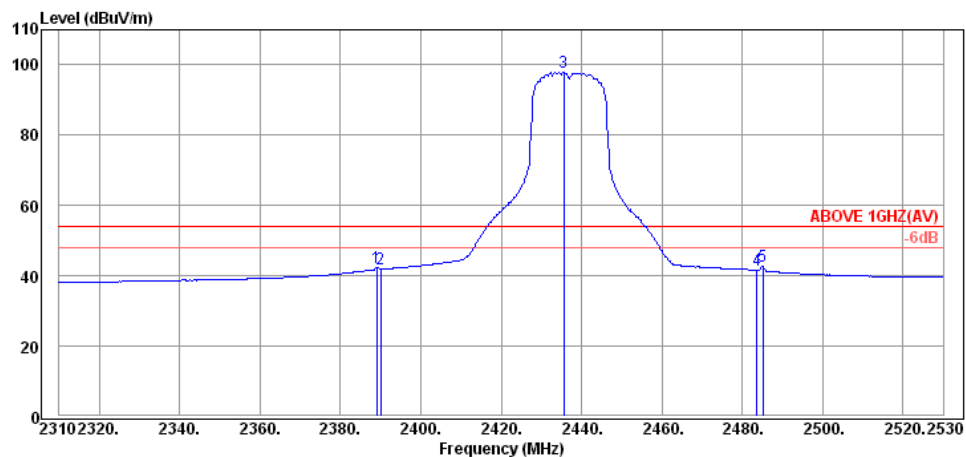

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.98	32.16	6.08	4.27	42.51	54.00	11.49	Average
2390.08	32.16	6.08	3.64	41.88	54.00	12.12	Average
2435.62	32.20	6.13	59.71	98.04	---	---	Average
2483.58	32.28	6.19	3.11	41.58	54.00	12.42	Average
2485.12	32.28	6.19	4.11	42.58	54.00	11.42	Average

Mode	802.11n-HT20	Frequency	TX 2437MHz
------	--------------	-----------	------------

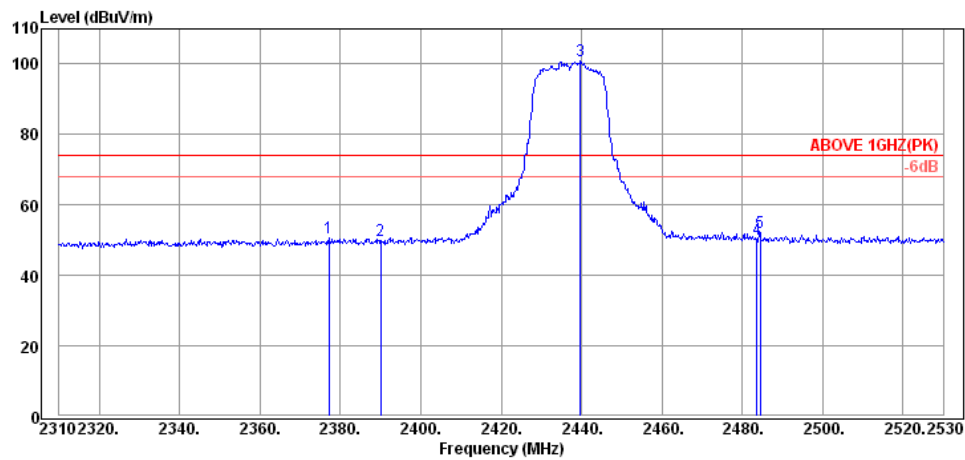

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.10	32.13	6.06	12.39	50.58	74.00	23.42	Peak
2390.08	32.16	6.08	11.67	49.91	74.00	24.09	Peak
2439.80	32.23	6.13	62.64	101.00	---	---	Peak
2483.58	32.28	6.19	11.77	50.24	74.00	23.76	Peak
2484.46	32.28	6.19	13.78	52.25	74.00	21.75	Peak

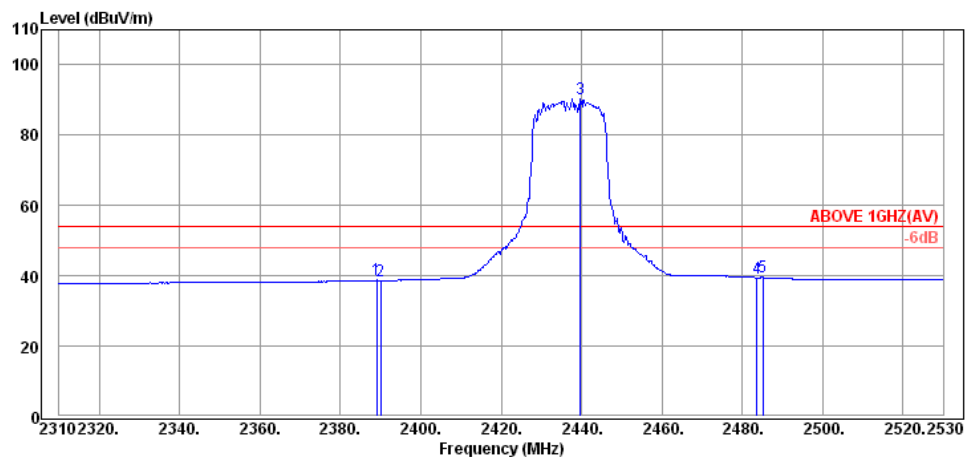

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.98	32.16	6.08	0.53	38.77	54.00	15.23	Average
2390.08	32.16	6.08	0.39	38.63	54.00	15.37	Average
2439.80	32.23	6.13	52.06	90.42	---	---	Average
2483.58	32.28	6.19	1.02	39.49	54.00	14.51	Average
2485.12	32.28	6.19	1.10	39.57	54.00	14.43	Average

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

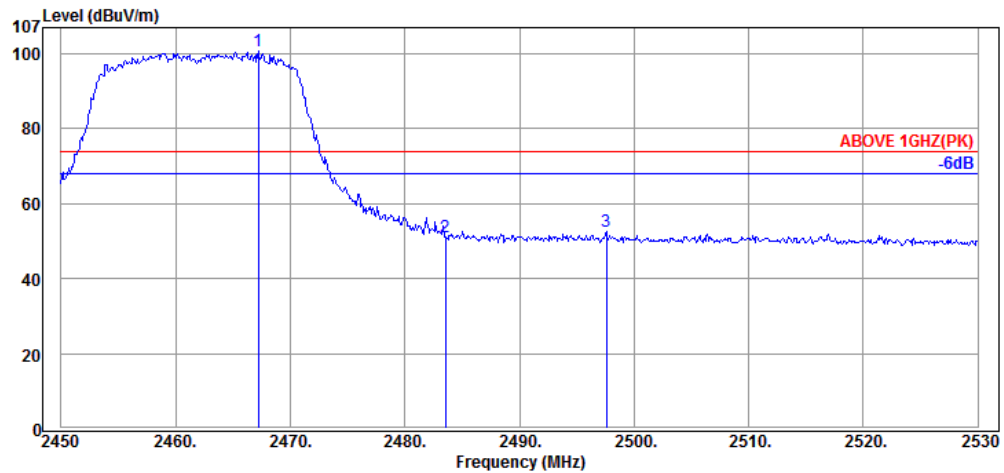

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2467.20	32.25	5.80	62.66	100.71	---	---	Peak
2483.52	32.28	5.82	12.92	51.02	74.00	22.98	Peak
2497.60	32.30	5.84	14.53	52.67	74.00	21.33	Peak

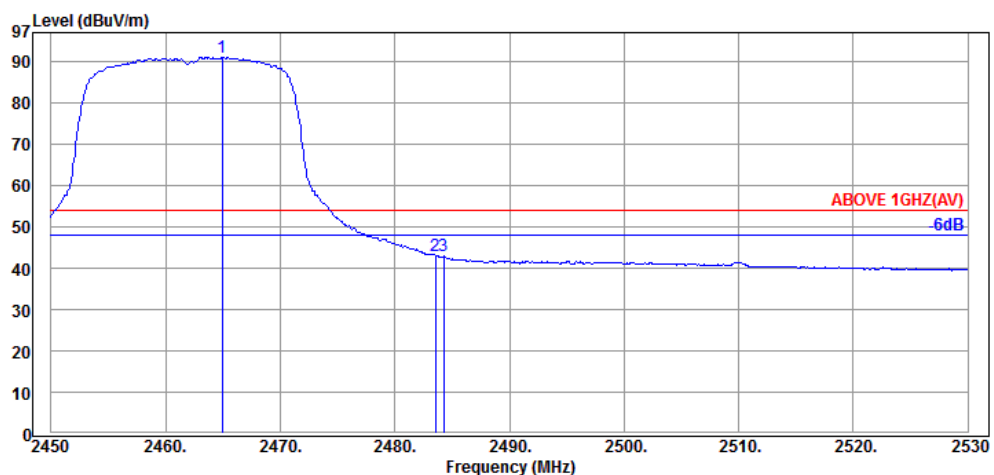

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2464.96	32.25	5.80	53.02	91.07	---	---	Average
2483.52	32.28	5.82	5.03	43.13	54.00	10.87	Average
2484.24	32.28	5.82	4.74	42.84	54.00	11.16	Average

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

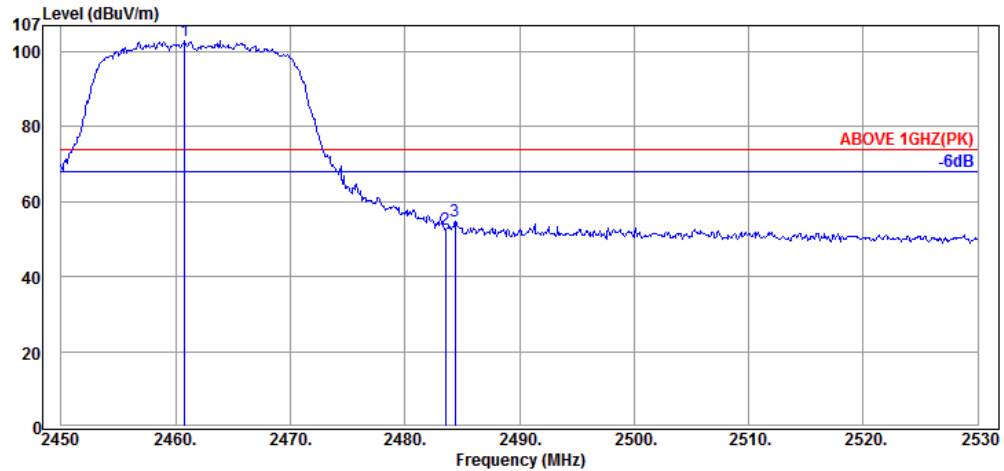

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2460.80	32.25	5.80	64.86	102.91	---	---	Peak
2483.52	32.28	5.82	14.60	52.70	74.00	21.30	Peak
2484.40	32.28	5.82	16.83	54.93	74.00	19.07	Peak

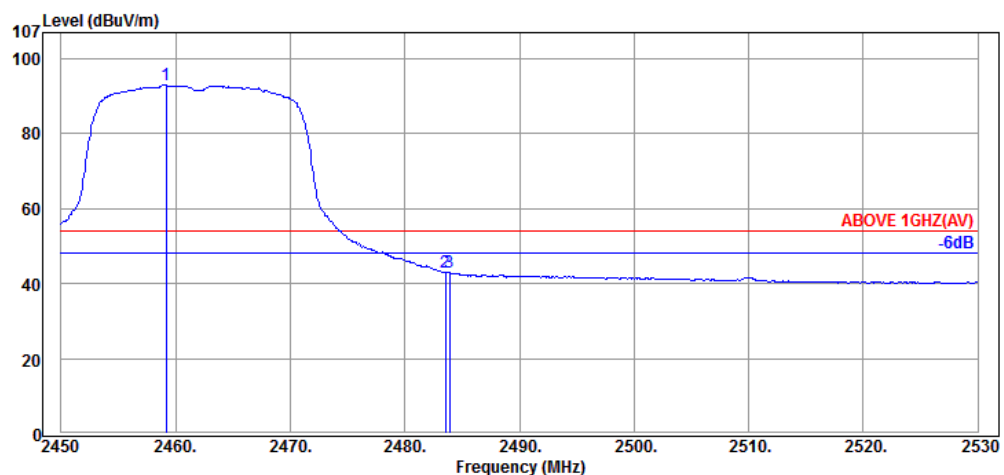

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2459.20	32.25	5.80	54.89	92.94	---	---	Average
2483.52	32.28	5.82	4.83	42.93	54.00	11.07	Average
2483.92	32.28	5.82	4.75	42.85	54.00	11.15	Average

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

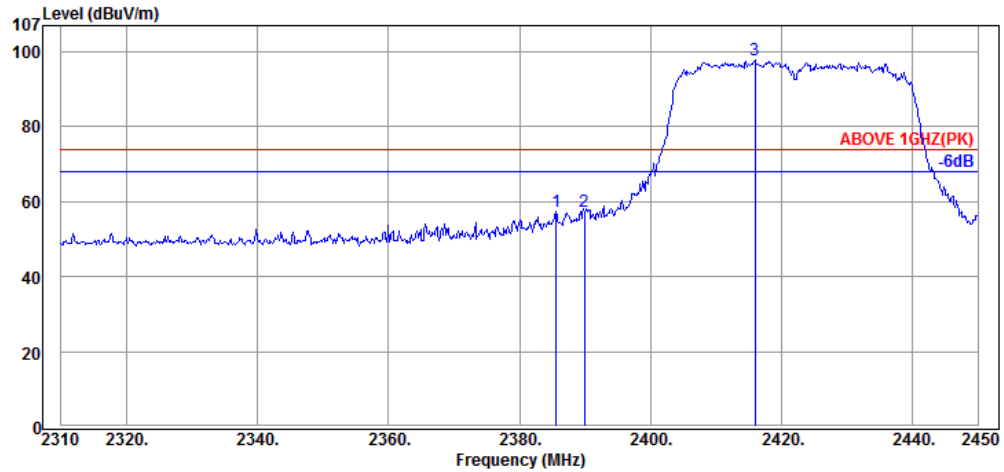

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.60	32.16	5.72	19.59	57.47	74.00	16.53	Peak
2389.94	32.16	5.72	19.34	57.22	74.00	16.78	Peak
2415.98	32.18	5.74	59.92	97.84	---	---	Peak

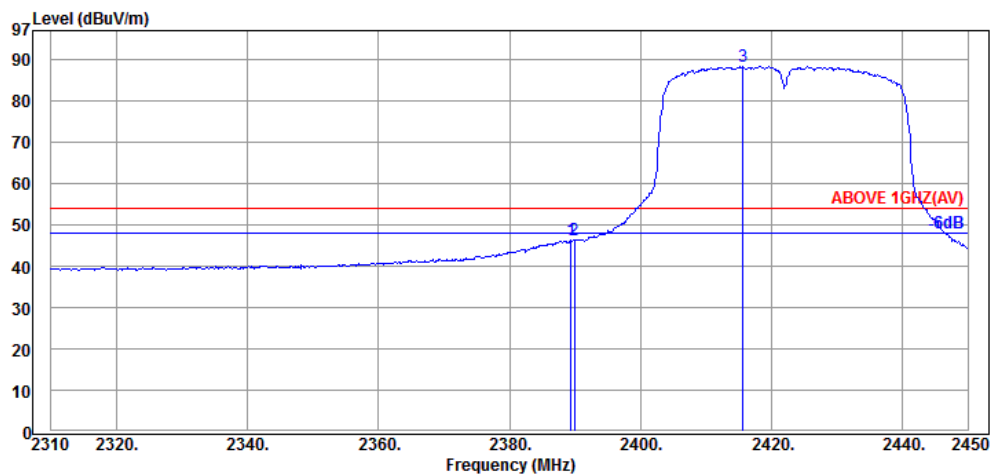

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.38	32.16	5.72	8.37	46.25	54.00	7.75	Average
2389.94	32.16	5.72	8.29	46.17	54.00	7.83	Average
2415.70	32.18	5.74	50.43	88.35	---	---	Average

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

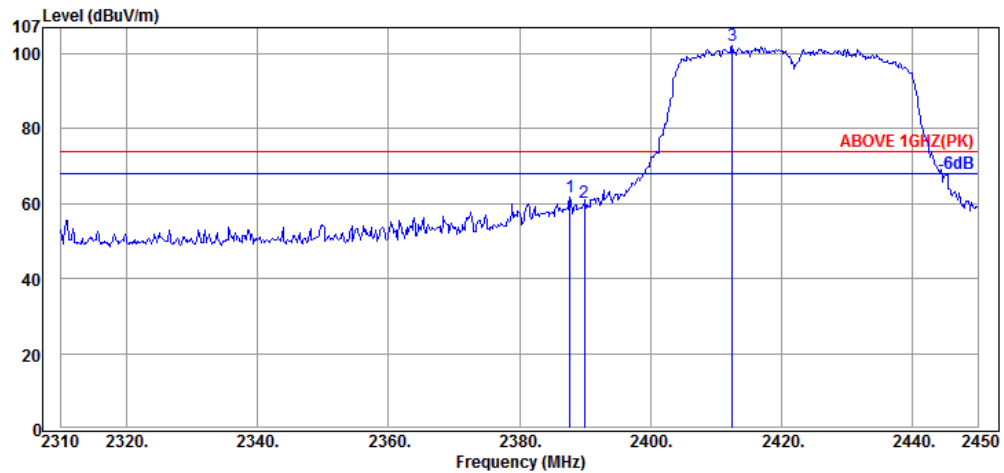


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.70	32.16	5.72	23.80	61.68	74.00	12.32	Peak
2389.94	32.16	5.72	22.41	60.29	74.00	13.71	Peak
2412.48	32.18	5.74	64.28	102.20	---	---	Peak

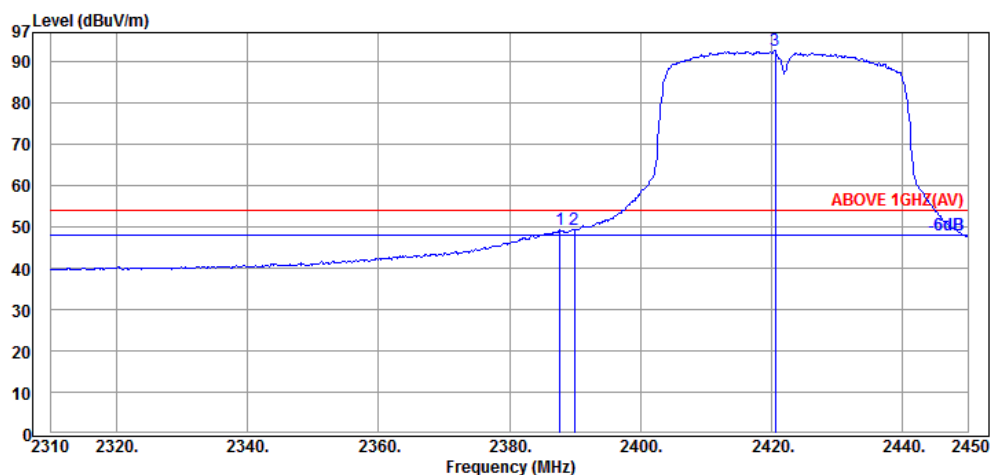


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.70	32.16	5.72	11.38	49.26	54.00	4.74	Average
2389.94	32.16	5.72	11.47	49.35	54.00	4.65	Average
2420.60	32.20	5.76	54.55	92.51	---	---	Average

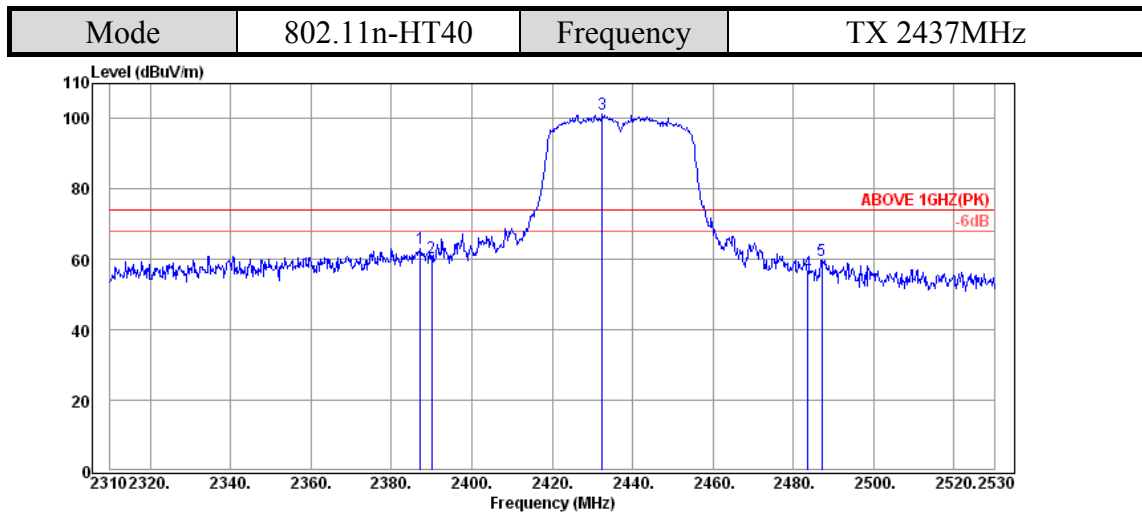

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.22	32.16	6.08	25.04	63.28	74.00	10.72	Peak
2390.08	32.16	6.08	22.21	60.45	74.00	13.55	Peak
2432.54	32.20	6.13	62.99	101.32	---	---	Peak
2483.58	32.28	6.19	17.97	56.44	74.00	17.56	Peak
2487.10	32.28	6.19	21.34	59.81	74.00	14.19	Peak

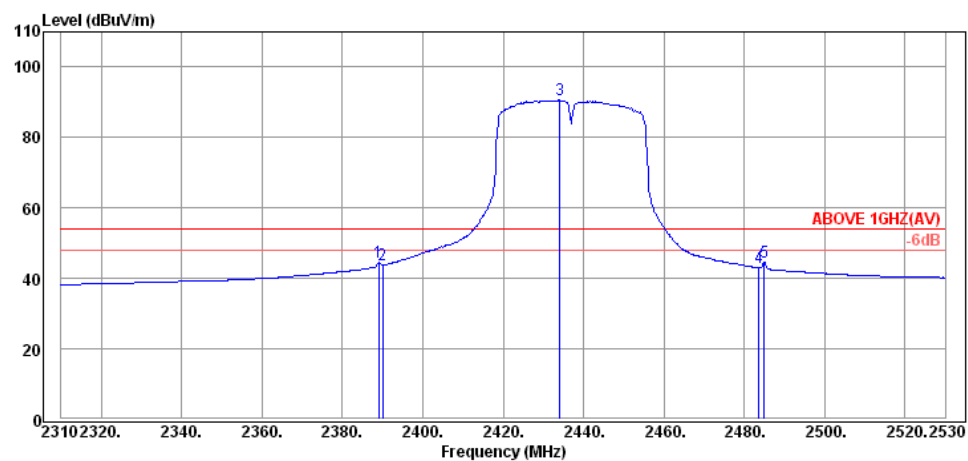

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.98	32.16	6.08	6.22	44.46	54.00	9.54	Average
2390.08	32.16	6.08	5.52	43.76	54.00	10.24	Average
2434.08	32.20	6.13	52.23	90.56	---	---	Average
2483.58	32.28	6.19	4.48	42.95	54.00	11.05	Average
2484.90	32.28	6.19	6.02	44.49	54.00	9.51	Average

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

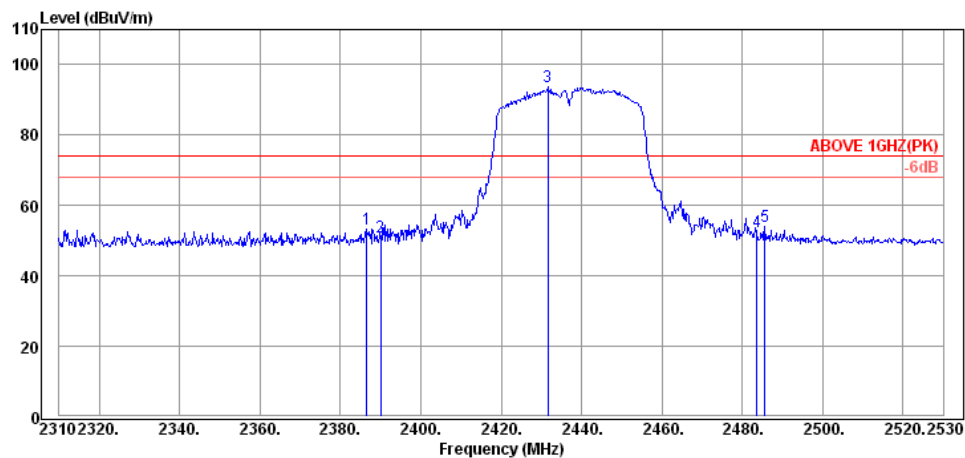

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.56	32.16	6.07	15.14	53.37	74.00	20.63	Peak
2390.08	32.16	6.08	12.77	51.01	74.00	22.99	Peak
2431.66	32.20	6.13	55.34	93.67	---	---	Peak
2483.58	32.28	6.19	14.08	52.55	74.00	21.45	Peak
2485.56	32.28	6.19	15.43	53.90	74.00	20.10	Peak

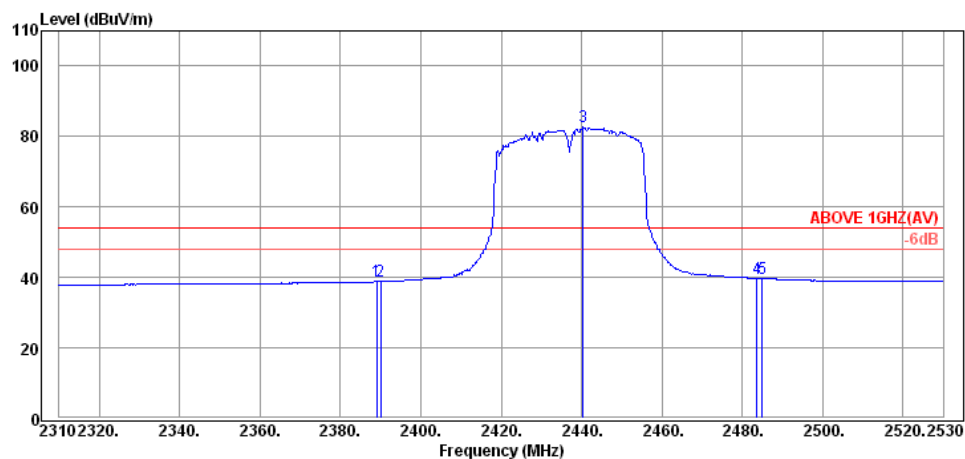

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.98	32.16	6.08	0.67	38.91	54.00	15.09	Average
2390.08	32.16	6.08	0.58	38.82	54.00	15.18	Average
2440.46	32.23	6.13	44.31	82.67	---	---	Average
2483.58	32.28	6.19	1.28	39.75	54.00	14.25	Average
2484.90	32.28	6.19	1.33	39.80	54.00	14.20	Average

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

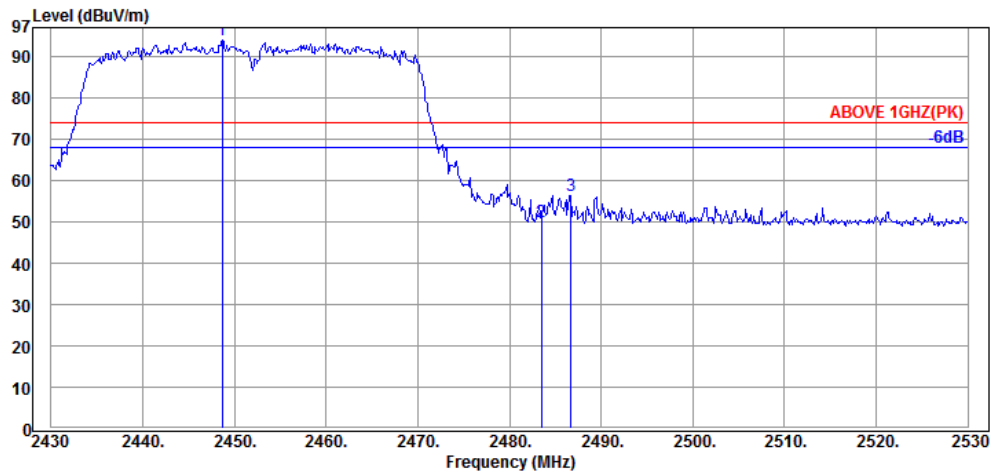

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2448.70	32.23	5.78	55.83	93.84	---	---	Peak
2483.50	32.28	5.82	11.86	49.96	74.00	24.04	Peak
2486.70	32.28	5.82	18.34	56.44	74.00	17.56	Peak

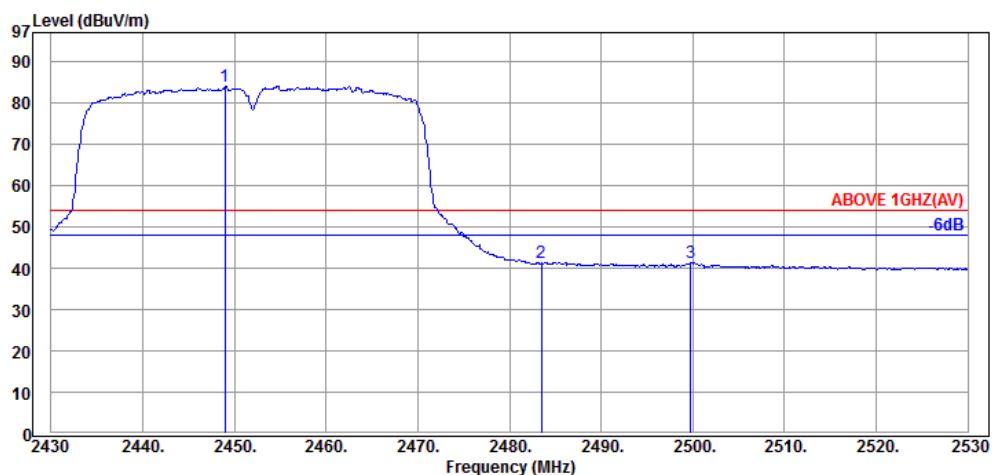

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2449.00	32.23	5.78	46.09	84.10	---	---	Average
2483.50	32.28	5.82	3.11	41.21	54.00	12.79	Average
2499.80	32.30	5.84	3.22	41.36	54.00	12.64	Average

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

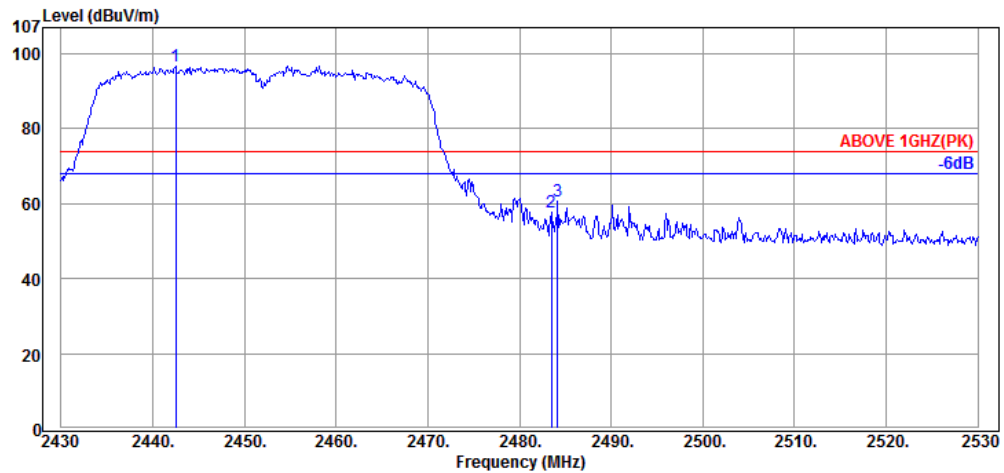

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2442.50	32.23	5.78	58.70	96.71	---	---	Peak
2483.50	32.28	5.82	19.60	57.70	74.00	16.30	Peak
2484.20	32.28	5.82	22.51	60.61	74.00	13.39	Peak

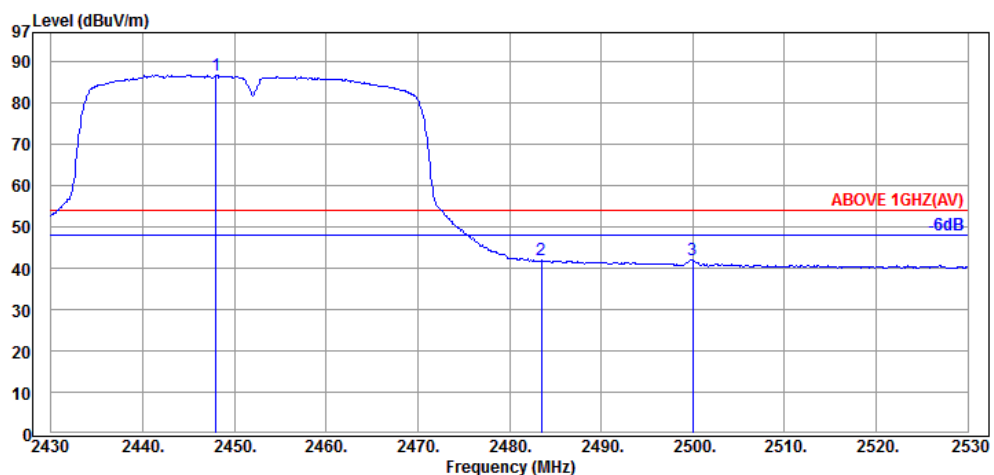

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2448.00	32.23	5.78	48.69	86.70	---	---	Average
2483.50	32.28	5.82	3.79	41.89	54.00	12.11	Average
2500.00	32.30	5.84	3.94	42.08	54.00	11.92	Average

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

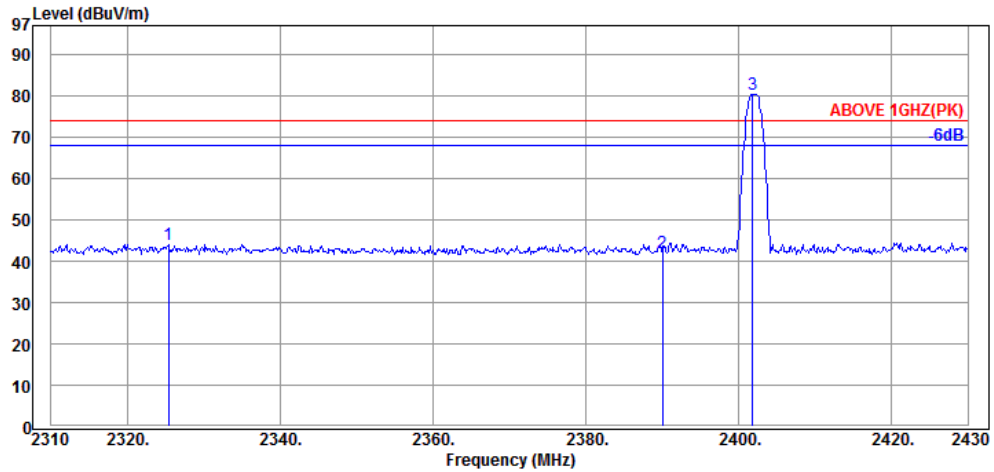

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2325.36	32.06	5.67	6.31	44.04	74.00	29.96	Peak
2390.04	32.16	5.72	4.04	41.92	74.00	32.08	Peak
2401.80	32.16	5.72	42.53	80.41	---	---	Peak

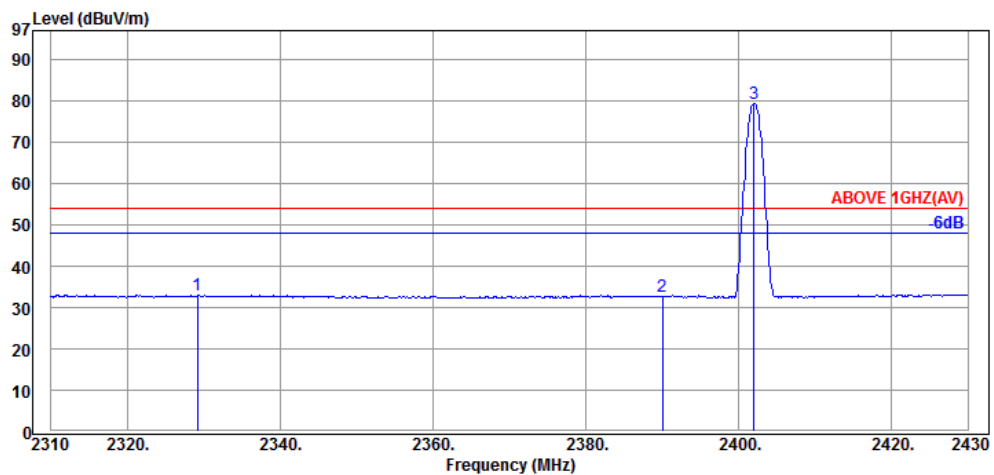

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2329.20	32.06	5.67	-4.68	33.05	54.00	20.95	Average
2390.04	32.16	5.72	-5.25	32.63	54.00	21.37	Average
2402.04	32.16	5.72	41.38	79.26	---	---	Average

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

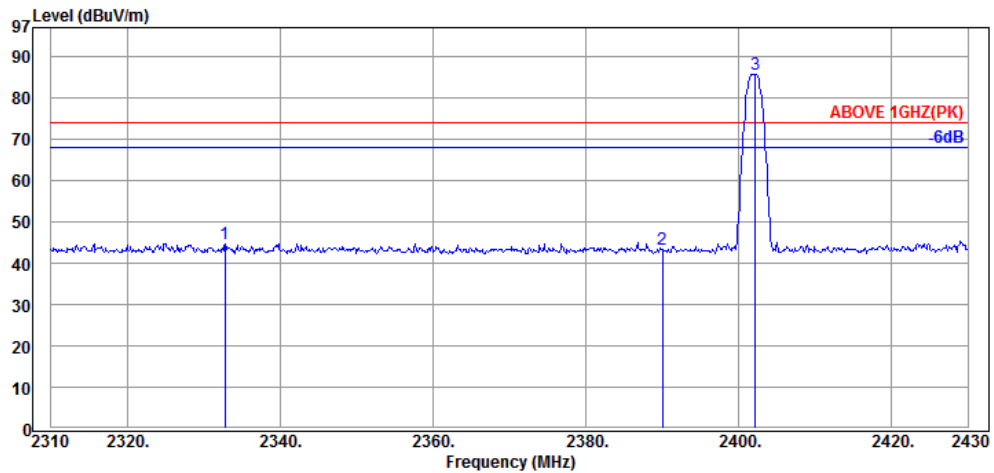

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2332.80	32.06	5.67	7.09	44.82	74.00	29.18	Peak
2390.04	32.16	5.72	5.37	43.25	74.00	30.75	Peak
2402.16	32.16	5.72	47.75	85.63	---	---	Peak

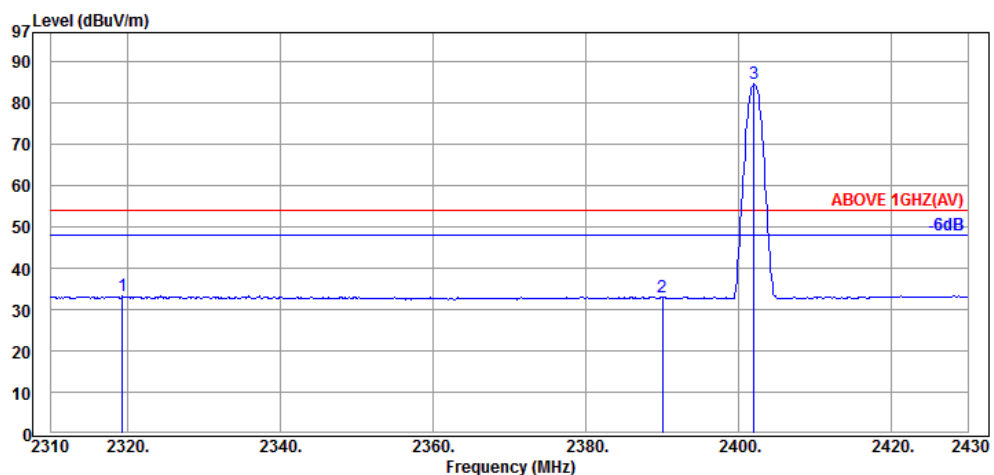

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2319.36	32.06	5.67	-4.42	33.31	54.00	20.69	Average
2390.04	32.16	5.72	-5.00	32.88	54.00	21.12	Average
2402.04	32.16	5.72	46.63	84.51	---	---	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

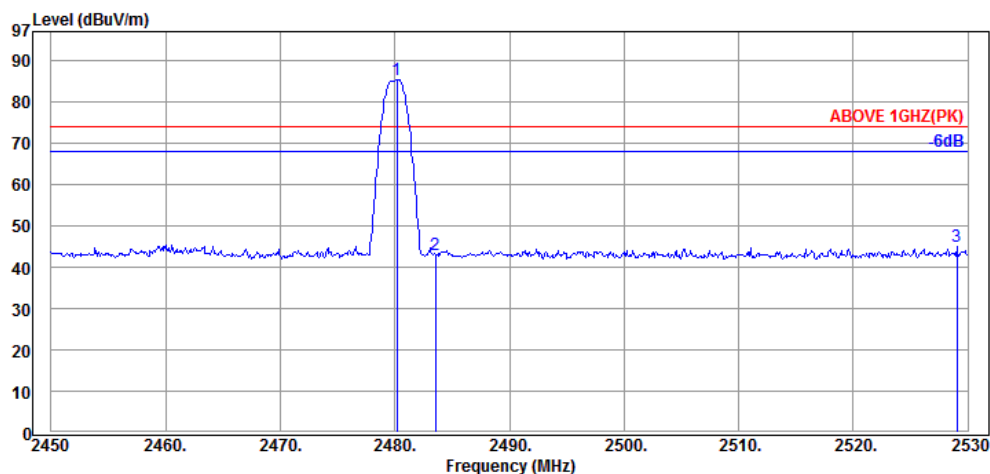

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.16	32.28	5.82	47.27	85.37	---	---	Peak
2483.52	32.28	5.82	5.04	43.14	74.00	30.86	Peak
2529.04	32.34	5.89	6.88	45.11	74.00	28.89	Peak

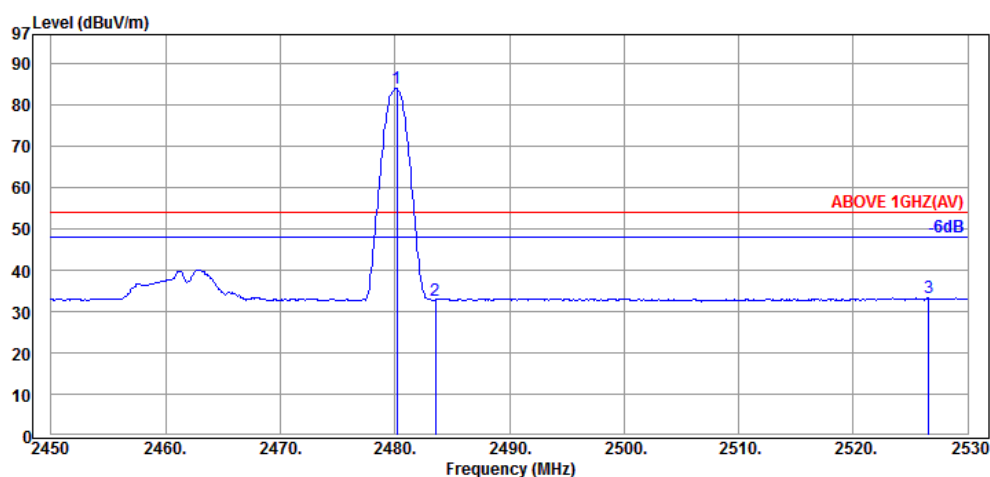

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.16	32.28	5.82	45.83	83.93	---	---	Average
2483.52	32.28	5.82	-5.30	32.80	54.00	21.20	Average
2526.56	32.34	5.89	-4.97	33.26	54.00	20.74	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

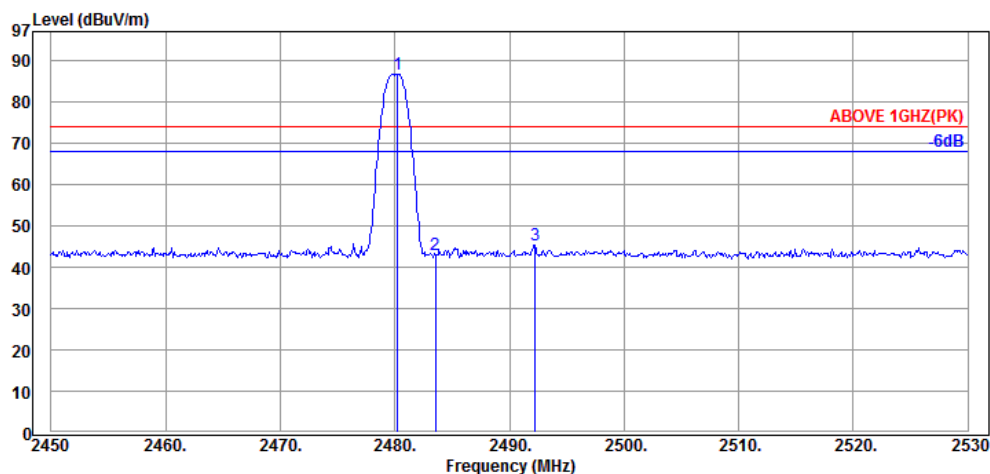

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.24	32.28	5.82	48.64	86.74	---	---	Peak
2483.52	32.28	5.82	5.05	43.15	74.00	30.85	Peak
2492.24	32.30	5.84	7.26	45.40	74.00	28.60	Peak

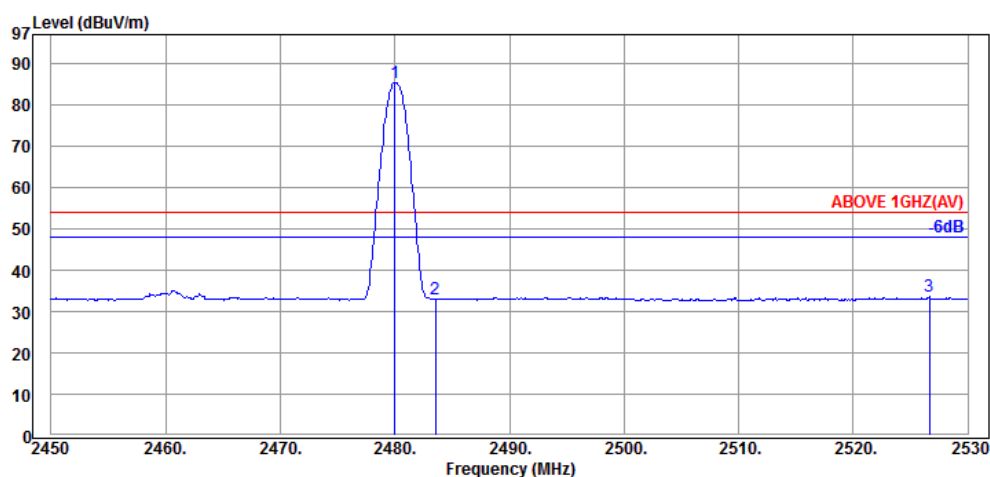

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	5.82	47.32	85.42	---	---	Average
2483.52	32.28	5.82	-5.15	32.95	54.00	21.05	Average
2526.64	32.34	5.89	-4.49	33.74	54.00	20.26	Average

6.5.3. Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2437MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4875.00	34.25	8.35	3.73	46.33	54.00	7.67	Peak
7310.00	35.80	9.82	-2.41	43.21	54.00	10.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4875.00	34.25	8.35	6.33	48.93	54.00	5.07	Peak
7310.00	35.80	9.82	-1.57	44.05	54.00	9.95	Peak

Mode	802.11g	Frequency	TX 2437MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4865.00	34.24	8.23	5.61	48.08	54.00	5.92	Average
4865.00	34.24	8.23	14.50	56.97	74.00	17.03	Peak
7310.00	35.80	9.82	-10.62	35.00	54.00	19.00	Average
7310.00	35.80	9.82	-1.73	43.89	74.00	30.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4875.00	34.25	8.35	5.91	48.51	54.00	5.49	Average
4875.00	34.25	8.35	16.23	58.83	74.00	15.17	Peak
7310.00	35.80	9.82	-12.10	33.52	54.00	20.48	Average
7310.00	35.80	9.82	-1.55	44.07	74.00	29.93	Peak

Mode	802.11n-HT20	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4865.00	34.24	8.23	4.06	46.53	54.00	7.47	Average
4865.00	34.24	8.23	12.92	55.39	74.00	18.61	Peak
7310.00	35.80	9.82	-11.34	34.28	54.00	19.72	Average
7310.00	35.80	9.82	-2.10	43.52	74.00	30.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4875.00	34.25	8.35	5.42	48.02	54.00	5.98	Average
4875.00	34.25	8.35	15.49	58.09	74.00	15.91	Peak
7310.00	35.80	9.82	-10.44	35.18	54.00	18.82	Average
7310.00	35.80	9.82	-0.26	45.36	74.00	28.64	Peak

Mode	802.11n-HT40	Frequency	TX 2437MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4885.00	34.26	8.47	5.52	48.25	54.00	5.75	Peak
7310.00	35.80	9.82	-1.61	44.01	54.00	9.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4865.00	34.24	8.23	8.21	50.68	54.00	3.32	Peak
7310.00	35.80	9.82	-2.50	43.12	54.00	10.88	Peak

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4805.00	34.22	7.86	0.87	42.95	54.00	11.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4805.00	34.22	7.86	0.51	42.59	54.00	11.41	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.00	34.25	8.35	0.91	43.51	54.00	10.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.00	34.25	8.35	1.10	43.70	54.00	10.30	Peak

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.29	8.68	-0.25	42.72	54.00	11.28	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.29	8.68	-1.39	41.58	54.00	12.42	Peak

6.5.4. Emissions in Non-restricted Frequency Bands

Pursuant to KDB 558074 D01 v03r05 that emission levels below the 15.209 Section 8.9 table 4 general radiated emissions limits is not required.

7. 6dB BANDWIDTH MEASUREMENT

7.1. Block Diagram of Test Setup

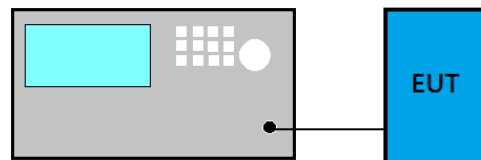

7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

7.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

■ Option 2

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.

7.4. Test Results

Please refer to Appendix A

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

8.1. Block Diagram of Test Setup



8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm), and E.I.R.P.: 4Watt (36dBm)

8.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

■PKPM1 Peak power meter method:

EUT is connected to power sensor and record the maximum output power.

□Method AVGPM (Measurement using an RF average power meter):

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.5 is < 98%.

□Method AVGSA-2 (Spectrum channel power)


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 -5% of OBW
- (3) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.5 is < 98%.

8.4. Test Results

Please refer to Appendix A

9. EMISSION LIMITATIONS MEASUREMENT

9.1. Block Diagram of Test Setup

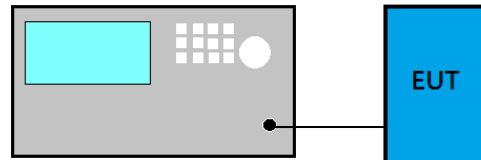

9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4

is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

9.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

■Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

■ Emission Level Measurement


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

9.4. Test Results

Please refer to Appendix A

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

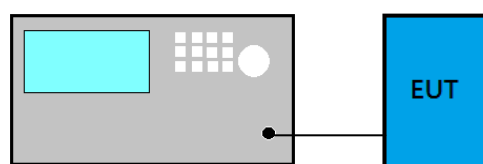

10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

10.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

■ Method PKPSD (peak PSD)

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq 3 \times \text{RBW}$.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

□ Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.5 $< 98\%$.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.4. Test Results

Please refer to Appendix A

11.DEVIATION TO TEST SPECIFICATIONS

【NONE】