

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C
REQUIREMENTS

OF

wireless adapter

MODEL No.: omni P1

FCC ID: WLQOMNIP1ADAPT

Trade Mark: 

REPORT NO.: ES140825341E2

ISSUE DATE: September 25, 2014

Prepared for

Polk Audio

5601 Metro Drive, Baltimore, Maryland, United States

Prepared by

SHENZHEN EMTEK CO., LTD

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

TEL: 86-755-26954280

FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	Polk Audio 5601 Metro Drive, Baltimore, Maryland, United States
Manufacturer:	SHENZHEN FENDA TECHNOLOGY CO., LTD. Fenda Hi-Tech Park, Zhoushi Road, Shiyao Town, Baoan District, Shenzhen City, Guangdong, China
Product Description:	wireless adapter
Model Number:	omni P1
File Number:	ES140825341E2
Date of Test:	August 30, 2014 to September 25, 2014


We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407 Requirements.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : August 30, 2014 to September 25, 2014

Prepared by : 
Joe Xia /Editor

Reviewer : 
Jack Li /Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager

Table of Contents

1. General Information.....	5
1.1 Product Description	5
1.2 Related Submittal(s) / Grant(s).....	6
1.3 Test Methodology	6
1.4 Special Accessories.....	6
1.5 Equipment Modifications	6
1.6 Test Facility	6
2. System Test Configuration	7
2.1 EUT Configuration	7
2.2 EUT Exercise.....	7
2.3 Test Procedure	7
2.4 Configuration of Tested System	7
3. Description of Test Modes	8
4. Summary of Test Results.....	9
5. Conducted Emissions Test.....	10
5.1 Measurement Procedure	10
5.2 Test SET-UP (Block Diagram of Configuration)	10
5.3 Measurement Equipment Used	10
5.4 Conducted Emission Limit.....	10
5.5 Measurement Result	11
6. Radiated Emission Test	13
6.1 Measurement Procedure	13
6.2 Test SET-UP (Block Diagram of Configuration)	14
6.3 Measurement Equipment Used	15
6.4 Radiated Emission Limit.....	15
6.5 Measurement Result	17
7 26dB and 99% Bandwidth Test.....	25
7.1 Measurement Procedure	25
7.2 Test SET-UP (Block Diagram of Configuration)	25
7.3 Measurement Equipment Used	25
7.4 Measurement Results	25
8 Maximum Conducted Output Power Test	46
8.1 Measurement Procedure	46
8.2 Test SET-UP (Block Diagram of Configuration)	46
8.3 Measurement Equipment Used	46
8.4 Conducted output limit.....	46
8.5 Measurement Results	46
9. Peak Power Density.....	49
9.1 Test Procedures	49
9.2 Block Diagram of Test Setup	49
9.3 Test Equipment.....	49
9.4 Limit	49
9.5 Test Result.....	49
10. Transmitter Peak Excursion	60
10.1 Test Procedures	60
10.2 Test Equipment.....	60
10.3 Block Diagram of Test setup.....	60
10.4 Limit	60

10.5	Test Result.....	60
11.	Band Edge Test	77
11.1	Test Procedures	77
11.1.1	Test Equipment.....	77
11.2	Block Diagram of Test setup.....	77
11.3	Limit.....	77
11.4	Test Result.....	77
12.	Antenna Application	84
12.1	Antenna Requirement	84
12.2	Result	84
13.	Uncertainty	85

1. General Information

1.1 Product Description

A major technical descriptions of EUT is described as following:

- A). Operation Frequency:
2.4G 802.11b/g/n(HT20):2412MHz-2462MHz; 802.11n(HT40): 2422MHz-2452MHz
5G 802.11a/n(HT20):5180-5240 MHz; 802.11n(HT40): 5190-5230 MHz;
- B). Modulation: OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/g/n,
DSSS with DBPSK/DQPSK/CCK for 802.11b;
- C). Number of Channel: 2.4G 802.11b/g/n(HT20): 11channels; 802.11n(HT40): 7channels
5G 802.11a/n(HT20): 7channels; 802.11n(HT40): 2 channels;
- D).Max Peak Conducted Power: 2.4G wifi 20.46dBm, 5G wifi 14.80dBm
- E). Antenna Gain: 2.0dBi for 2.4G WIFI; 2.0dBi for 5G WIFI;
- F). Antenna Type: Metal antenna
- G). Power Supply: DC 12V/1A from Adapter
- H). Adapter: Model: YJS010A-1201000U
Input: 100-240V~50/60Hz 350mA
Output: 12.0V/1000mA

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	48	5240
38	5190		
40	5200		
42	5210		
44	5220		
46	5230		

Note:

1. This device is included 802.11b, 802.11g, 802.11n 2.4GHz and 802.11a/n 5GHz transceiver function.
2. Test of channel was included the lowest middle and highest frequency in lowest data rate and to perform the test, then record on this report.

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: WLQOMNIP1ADAPT filing to comply with Section 15.407 of the FCC Part 15, Subpart C Rules.
The composite system is compliance with Subpart B is authorized under a DOC procedure.

1.3 Test Methodology

All the test program has follow FCC new test procedure KDB789033 D01v01r04, Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab.

: Accredited by CNAS, 2013.10.29

The certificate is valid until 2016.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS/CL01: 2006(identical to ISO/IEC17025: 2005)

The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2010.5.25

The Laboratory has been assessed according to the requirements ISO/IEC 17025

Accredited by FCC, April 17, 2013

The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 05, 2010

The Certificate Registration Number is 4480A-2.

Name of Firm

: SHENZHEN EMTEK CO., LTD.

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	wireless adapter	opolk	omni P1	WLQOMNIP1ADAPT	N/A	EUT

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3. Description of Test Modes

These is Digital Transmission system (DTS) and have modulation OFDM, DSSS, DBPSK, DQPSK, CCK, 16QAM, 64QAM. According exploratory test, EUT will have maximum output power in those data rate (802.11a/n: MCS0), so those data rate were used for all test.

The equipment enables high-speed access without wires to network assets. This adapter uses the IEEE 802.11 protocol to enable wireless communications between the host and Wireless router.

For 802.11a/n(HT20):

1. For lowest channel : 5180MHz (Channel 36)
2. For middle channel : 5210MHz (Channel 42)
3. For highest channel : 5240MHz (Channel 48)

For 802.11n(HT40):

4. For lowest channel : 5190MHz (Channel 38)
5. For highest channel : 5230MHz (Channel 46)

4. Summary of Test Results


FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Pass
§15.407(b), §15.209	Radiated Emission	Pass
§15.407 (a)	26dB bandwidth and 99%dB Bandwidth	Pass
§15.407 (a)	Maximum conducted output Power	Pass
§15.407 (a)	Power density	Pass
§15.407 (b)	Band edge test	Pass
§15.407 (a)	Peak Excursion	Pass
§15.407(a)&§15.203	Antenna Application	Pass

5. Conducted Emissions Test

5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

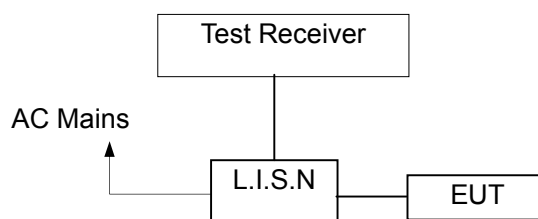

5.3 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/17/2014	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/17/2014	05/16/2015

5.4 Conducted Emission Limit

Conducted Emission

Frequency(MHz)

Quasi-peak

Average

0.15-0.5

66-56

56-46

0.5-5.0

56

46

5.0-30.0


60

50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.5 Measurement Result

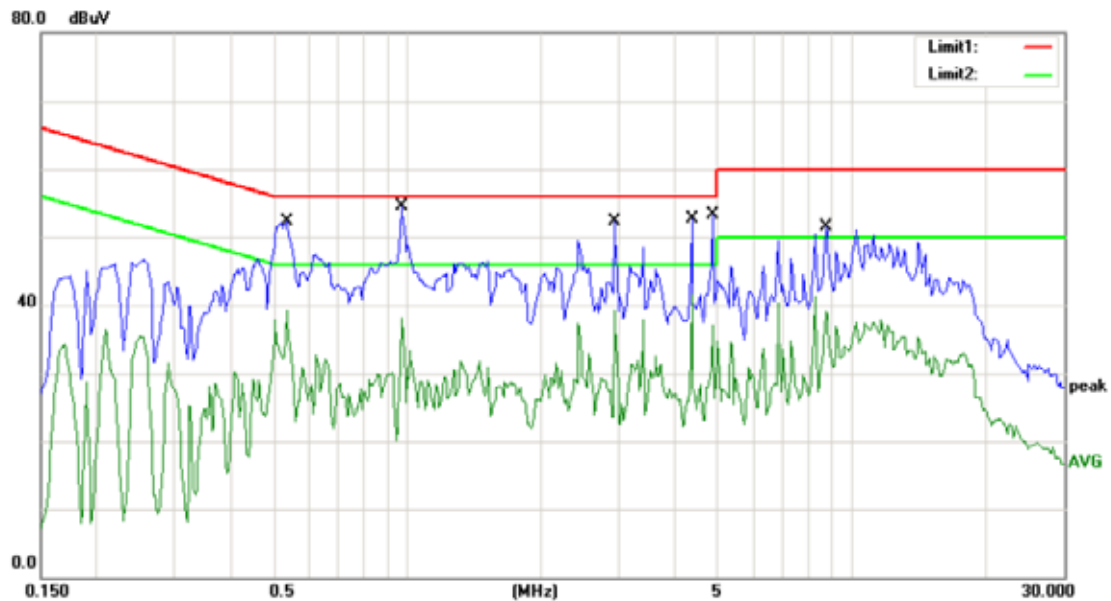

Site Conduction #1

Phase: **L1**

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: wireless adapter


M/N: omni P1

Mode: ON

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.5350	52.39	0.00	52.39	56.00	-3.61	QP	
2		0.5350	39.26	0.00	39.26	46.00	-6.74	AVG	
3	*	0.9700	54.43	0.00	54.43	56.00	-1.57	QP	
4		0.9700	38.09	0.00	38.09	46.00	-7.91	AVG	
5		2.9200	52.35	0.00	52.35	56.00	-3.65	QP	
6		2.9200	39.34	0.00	39.34	46.00	-6.66	AVG	
7		4.3700	51.00	0.00	51.00	56.00	-5.00	QP	
8		4.3700	41.56	0.00	41.56	46.00	-4.44	AVG	
9		4.8700	50.00	0.00	50.00	56.00	-6.00	QP	
10		4.8700	37.06	0.00	37.06	46.00	-8.94	AVG	
11		8.7600	51.48	0.00	51.48	60.00	-8.52	QP	
12		8.7600	41.23	0.00	41.23	50.00	-8.77	AVG	

*:Maximum data x:Over limit l:over margin Comment: Factor build in receiver. Operator: ZHL

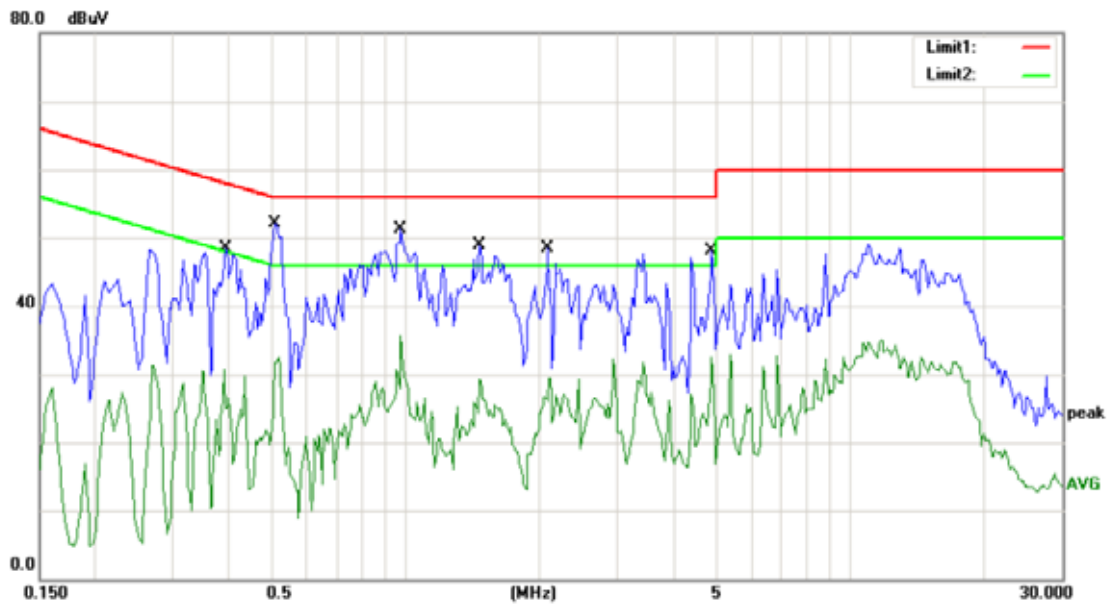

Site Conduction #1

Phase: **N**

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: wireless adapter

M/N: omni P1

Mode: ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.3950	48.53	0.00	48.53	57.96	-9.43	QP	
2		0.3950	30.70	0.00	30.70	47.96	-17.26	AVG	
3	*	0.5100	52.11	0.00	52.11	56.00	-3.89	QP	
4		0.5100	32.59	0.00	32.59	46.00	-13.41	AVG	
5		0.9750	51.29	0.00	51.29	56.00	-4.71	QP	
6		0.9750	35.78	0.00	35.78	46.00	-10.22	AVG	
7		1.4700	48.92	0.00	48.92	56.00	-7.08	QP	
8		1.4700	29.28	0.00	29.28	46.00	-16.72	AVG	
9		2.0900	48.43	0.00	48.43	56.00	-7.57	QP	
10		2.0900	29.56	0.00	29.56	46.00	-16.44	AVG	
11		4.8900	48.06	0.00	48.06	56.00	-7.94	QP	
12		4.8900	32.88	0.00	32.88	46.00	-13.12	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: ZHL

6. Radiated Emission Test

6.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

When spectrum scanned from 30 MHz to 1GHz setting resolution bandwidth 120 kHz and video bandwidth 300kHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	120kHz
VB	300kHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

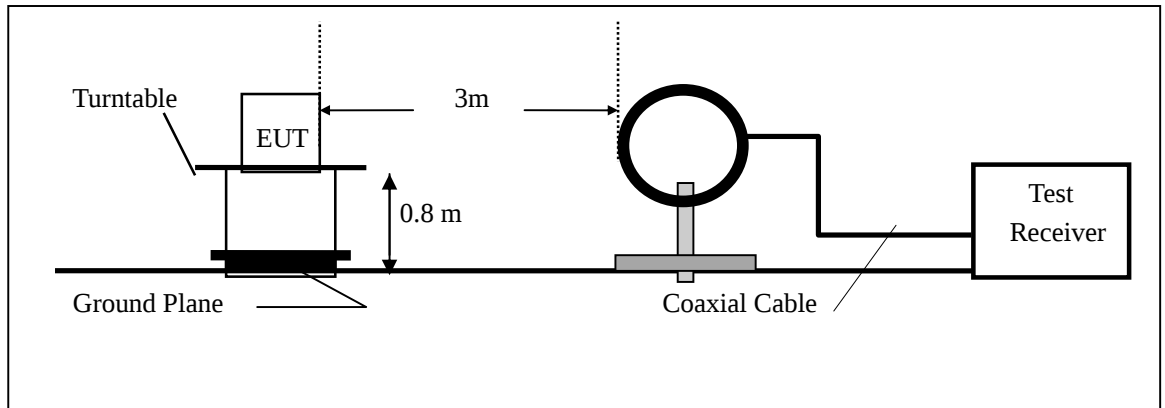

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

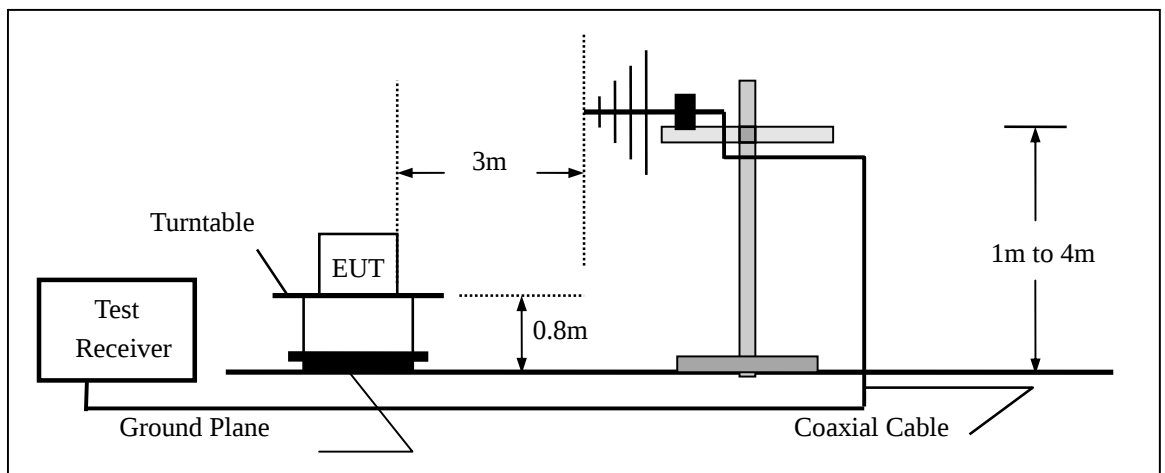

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

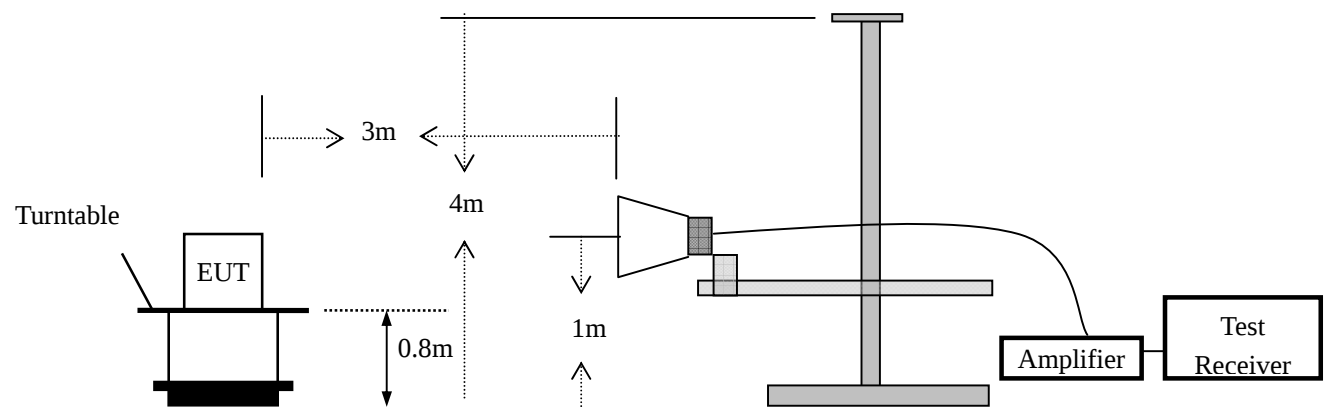

6.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014	05/16/2015
Spectrum Analyzer	Agilent	E4448A	56481557	05/17/2014	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014	05/16/2015
Pre-Amplifier	A.H.	PAM-0126	1415261	05/17/2014	05/16/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/17/2014	05/16/2015
Cable	Rosenberger	N/A	FP2RX2	05/17/2014	05/16/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/17/2014	05/16/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/17/2014	05/16/2015

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.5 Measurement Result

All the modes 802.11a/n has been tested and the worst result 802.11a recorded as below:


Operation Mode: TX Mode Test Date: September 23, 2014
 Frequency Range: 9KHz~30MHz Temperature: 24
 Test Result: PASS Humidity: 63 %
 Measured Distance: 3m Test By: RU
 Note:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);


Limit line = Specific limits(dBuV) + distance extrapolation factor.

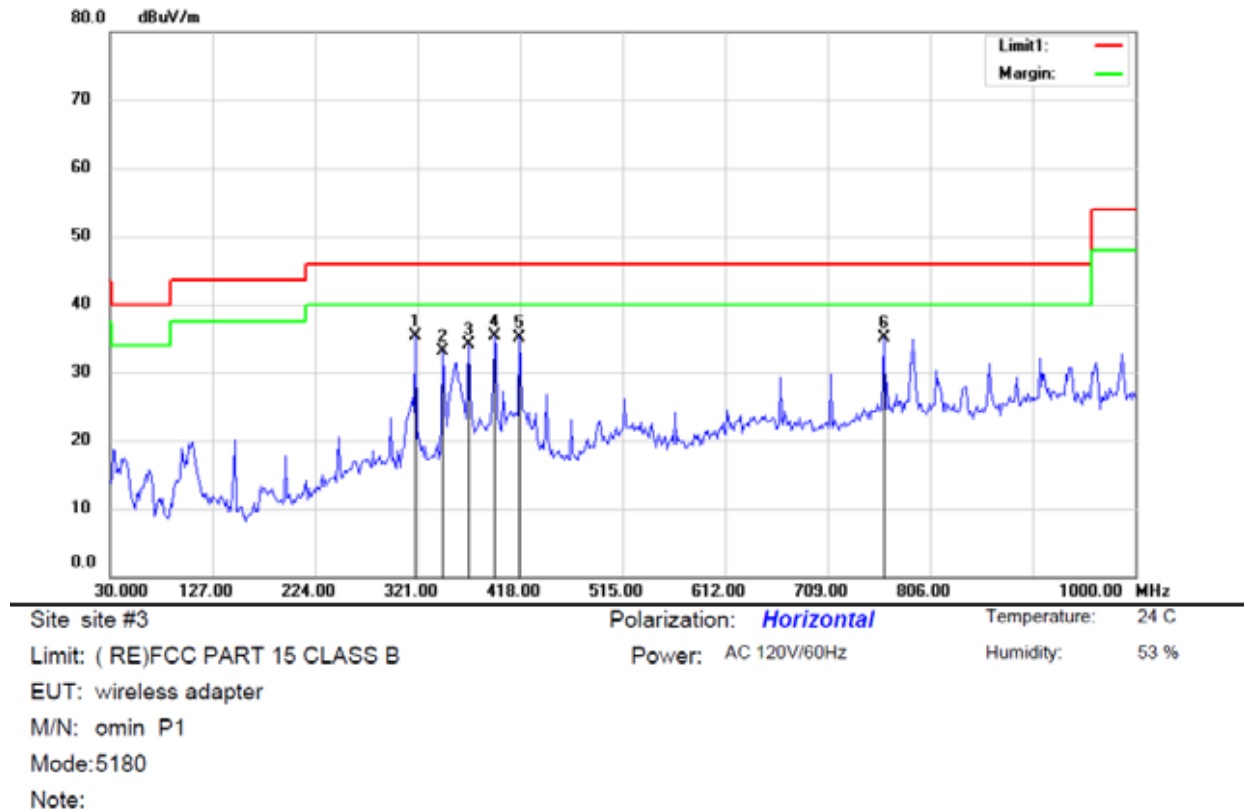

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		319.1346	20.87	14.47	35.34	46.00	-10.66	QP		
2		345.5610	16.98	16.04	33.02	46.00	-12.98	QP		
3		368.8782	17.01	17.07	34.08	46.00	-11.92	QP		
4	*	393.7500	16.92	18.46	35.38	46.00	-10.62	QP		
5		417.0673	16.48	18.72	35.20	46.00	-10.80	QP		
6		762.1635	10.63	24.56	35.19	46.00	-10.81	QP		

*:Maximum data x:Over limit l:over margin

Operator: ZHL

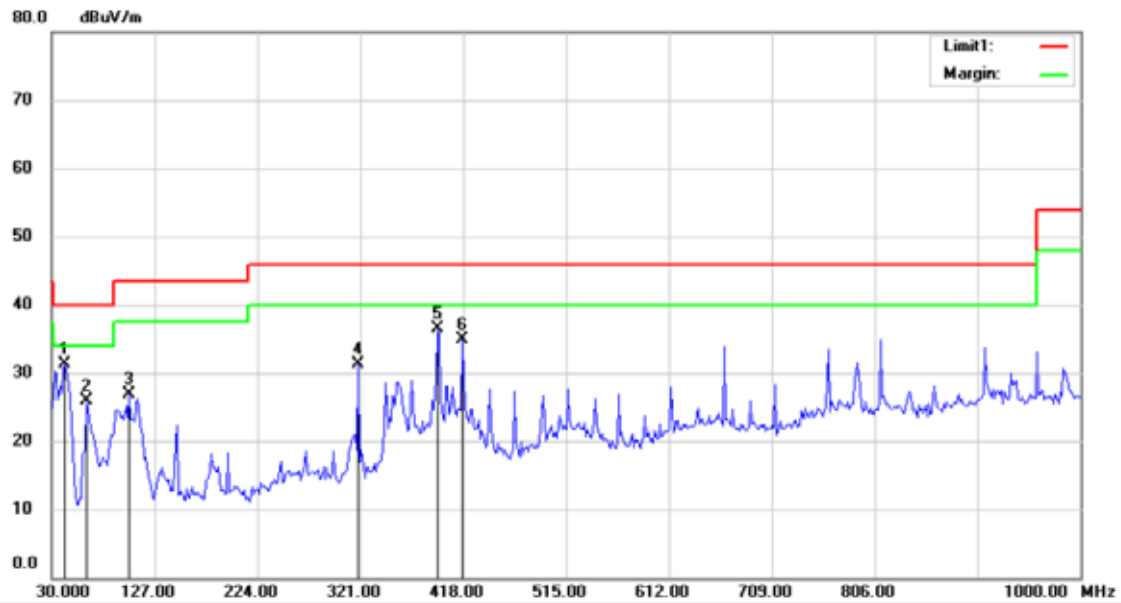


Site site #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: wireless adapter
M/N: omin P1
Mode:5180
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	42.4360	16.42	14.94	31.36	40.00	-8.64	QP		
2		62.6442	14.21	11.64	25.85	40.00	-14.15	QP		
3		103.0610	13.94	12.87	26.81	43.50	-16.69	QP		
4		319.1346	16.86	14.47	31.33	46.00	-14.67	QP		
5		393.7500	18.11	18.46	36.57	46.00	-9.43	QP		
6		417.0673	16.19	18.72	34.91	46.00	-11.09	QP		

*:Maximum data x:Over limit l:over margin

Operator: ZHL

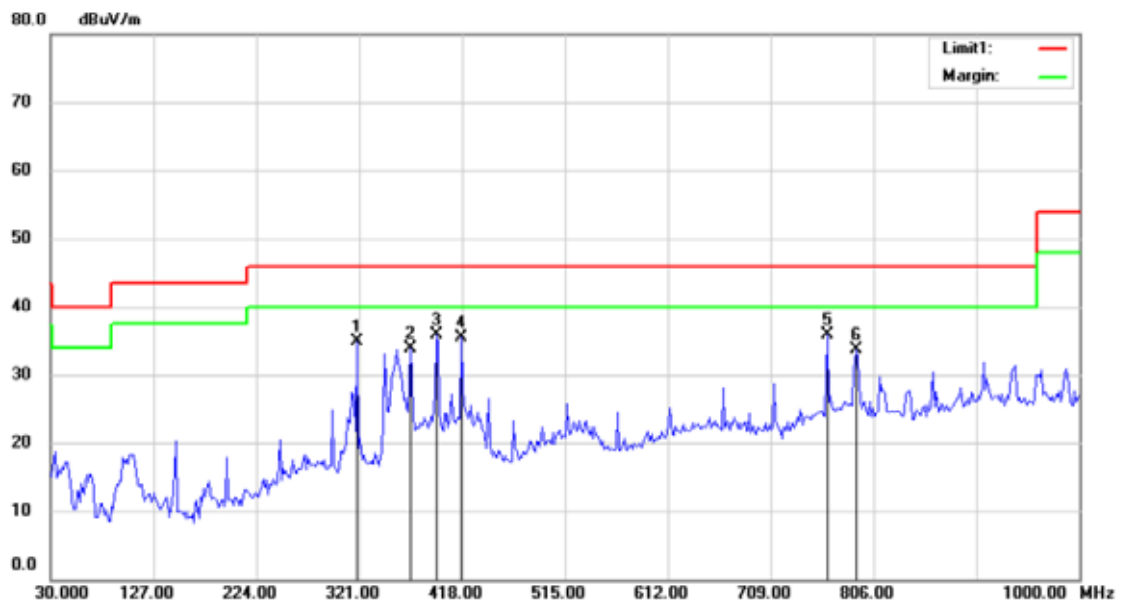


Site: site #3
Limit: (RE)FCC PART 15 CLASS B
EUT: wireless adapter
M/N: omin P1
Mode:5210
Note:

Polarization: **Horizontal**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		319.1346	20.37	14.47	34.84	46.00	-11.16	QP		
2		368.8782	16.87	17.07	33.94	46.00	-12.06	QP		
3		393.7500	17.42	18.46	35.88	46.00	-10.12	QP		
4		417.0673	16.78	18.72	35.50	46.00	-10.50	QP		
5	*	762.1634	11.40	24.56	35.96	46.00	-10.04	QP		
6		790.1442	8.62	25.12	33.74	46.00	-12.26	QP		

*:Maximum data x:Over limit l:over margin


Operator: ZHL

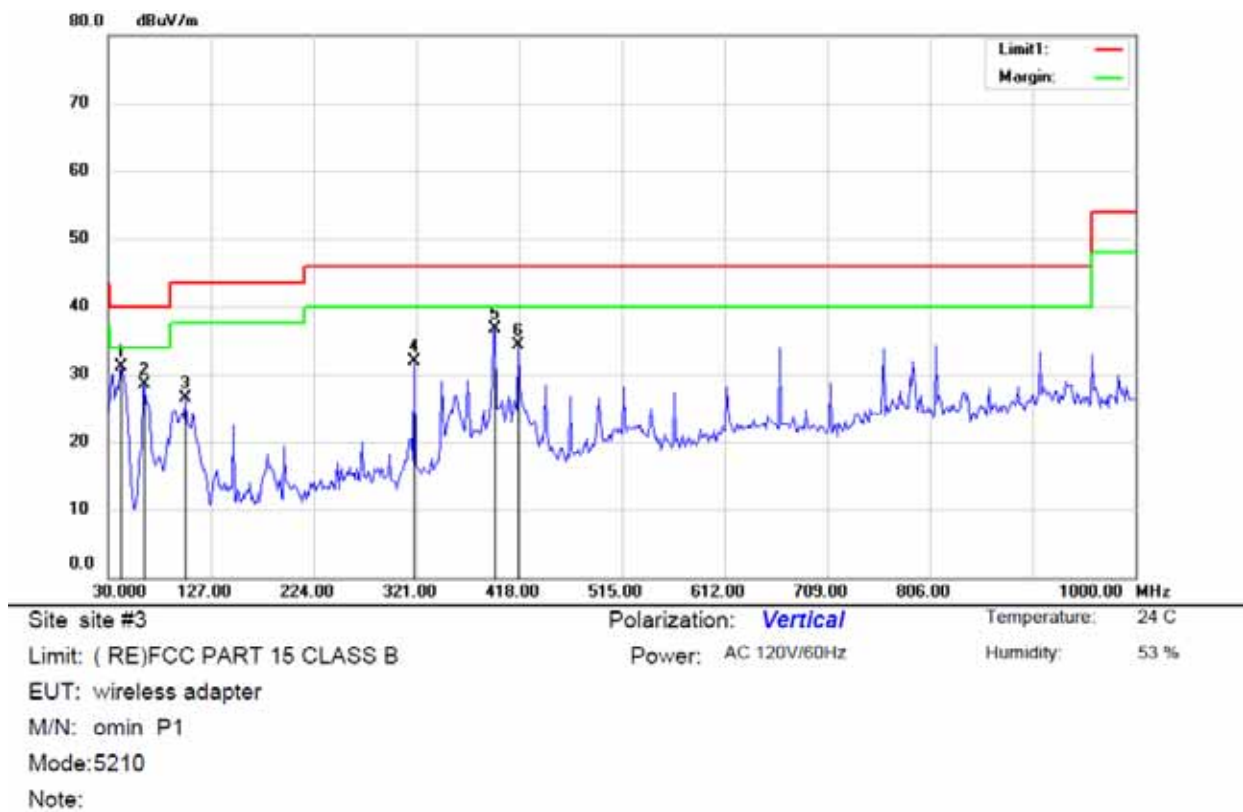

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	42.4360	16.10	14.94	31.04	40.00	-8.96	QP		
2		64.1987	17.73	10.85	28.58	40.00	-11.42	QP		
3		103.0610	13.56	12.87	26.43	43.50	-17.07	QP		
4		319.1346	17.37	14.47	31.84	46.00	-14.16	QP		
5		395.3045	18.27	18.52	36.79	46.00	-9.21	QP		
6		417.0673	15.51	18.72	34.23	46.00	-11.77	QP		

*:Maximum data x:Over limit !:over margin


Operator: ZHL

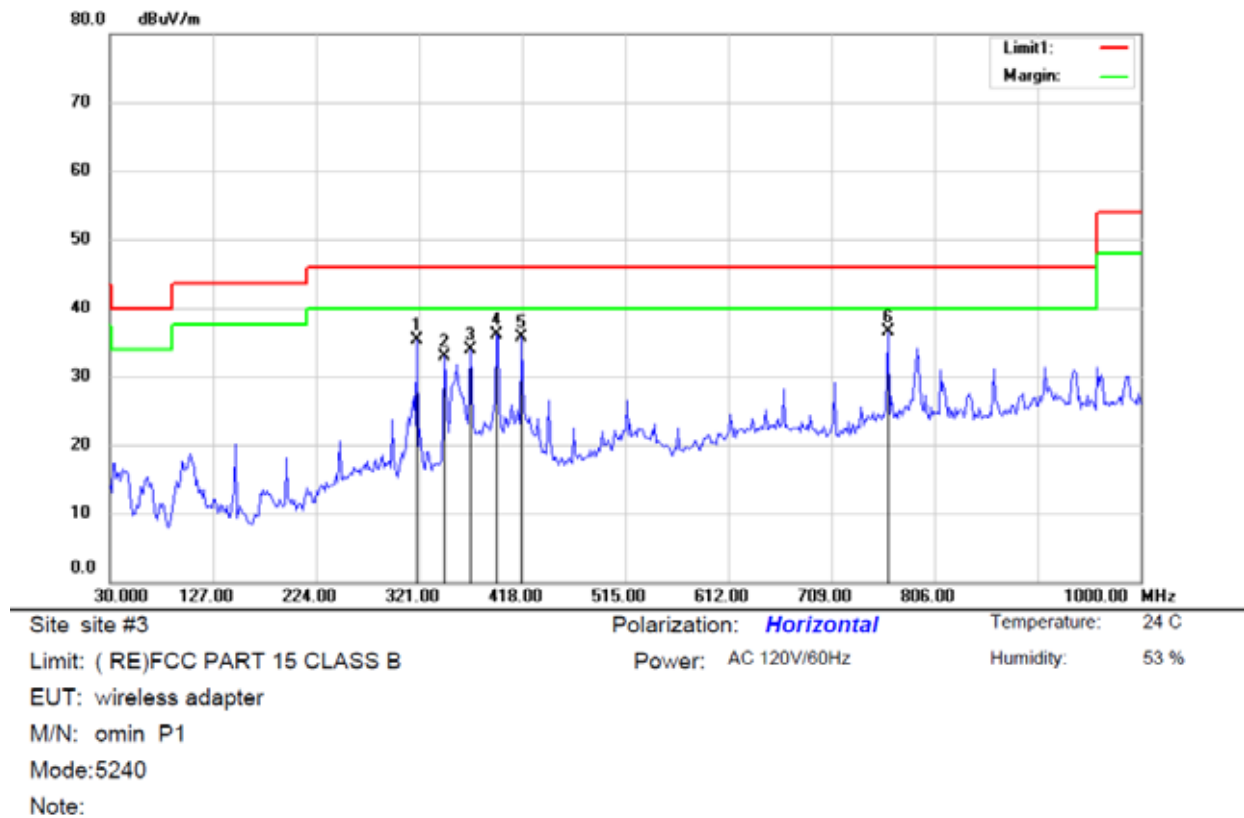

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		319.1346	20.85	14.47	35.32	46.00	-10.68	QP		
2		345.5610	16.92	16.04	32.96	46.00	-13.04	QP		
3		368.8782	16.86	17.07	33.93	46.00	-12.07	QP		
4		393.7500	17.65	18.46	36.11	46.00	-9.89	QP		
5		417.0673	16.97	18.72	35.69	46.00	-10.31	QP		
6	*	762.1635	11.88	24.56	36.44	46.00	-9.56	QP		

*:Maximum data x:Over limit l:over margin

Operator: ZHL

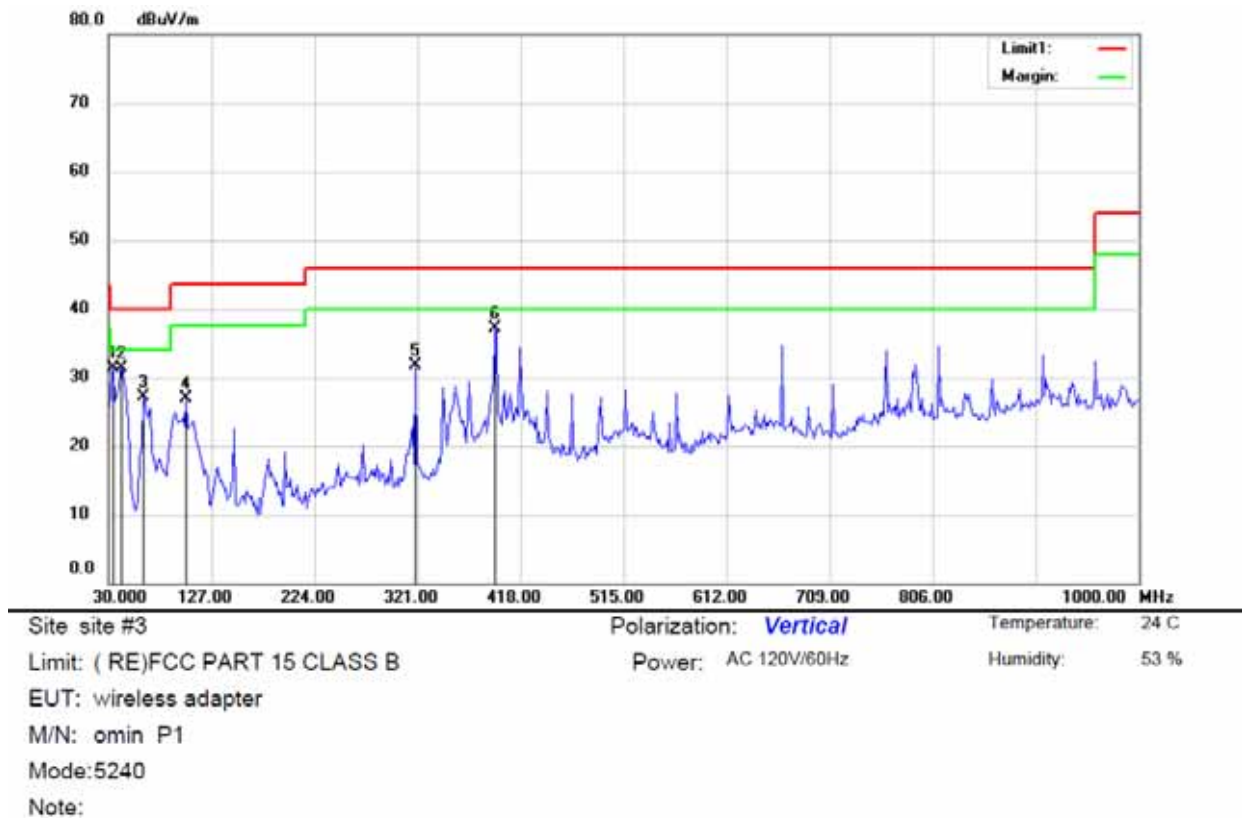

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	34.6635	18.16	13.24	31.40	40.00	-8.60			QP	
2		42.4360	16.35	14.94	31.29	40.00	-8.71			QP	
3		62.6442	15.42	11.64	27.06	40.00	-12.94			QP	
4		103.0610	13.97	12.87	26.84	43.50	-16.66			QP	
5		319.1346	17.30	14.47	31.77	46.00	-14.23			QP	
6		393.7500	18.65	18.46	37.11	46.00	-8.89			QP	

*:Maximum data x:Over limit l:over margin

Operator: ZHL

Operation Mode: 802.11a TX Channel 36 Test Date : September 23, 2014
Frequency Range: 1-40GHz Temperature : 24
Test Result: PASS Humidity : 63 %
Measured Distance: 3m Test By: RU

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
10352.18	V	63.14	46.81	74.00	54.00	-10.86	-7.19
--	--	--	--	--	--	--	--
10329.83	H	63.29	47.31	74.00	54.00	-10.71	-6.69

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: 802.11a TX Channel 42 Test Date : September 23, 2014
Frequency Range: 1-40GHz Temperature : 24
Test Result: PASS Humidity : 63 %
Measured Distance: 3m Test By: RU

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
10454.63	V	62.78	46.19	74.00	54.00	-11.22	-7.81
--	--	--	--	--	--	--	--
10470.23	H	62.14	44.66	74.00	54.00	-11.86	-9.34

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: 802.11a TX Channel 48 Test Date : September 23, 2014
Frequency Range: 1-40GHz Temperature : 24
Test Result: PASS Humidity : 63 %
Measured Distance: 3m Test By: RU

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
10482.59	V	63.46	44.73	74.00	54.00	-10.54	-9.27
--	--	--	--	--	--	--	--
10496.18	H	61.35	43.44	74.00	54.00	-12.65	-10.56

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

7 26dB and 99% Bandwidth Test

7.1 Measurement Procedure


The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth. The 26 dB bandwidth is used to determine the conducted power limits.

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth.

- 1) Set center frequency to the nominal EUT channel center frequency.
- 2) Set span = 1.5 times to 5.0 times the OBW.
- 3) Set RBW = 1 % to 5 % of the OBW
- 4) Set VBW $\geq 3 \cdot$ RBW
- 5) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

7.2 Test SET-UP (Block Diagram of Configuration)




7.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Signal Analyzer	Agilent	N9010A	My53470879	05/17/2014	05/16/2015

7.4 Measurement Results

Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	A


Channel number	Channel frequency (MHz)	26dB Bandwidth (MHz)
36	5180	20.10
42	5210	20.27
48	5240	20.34

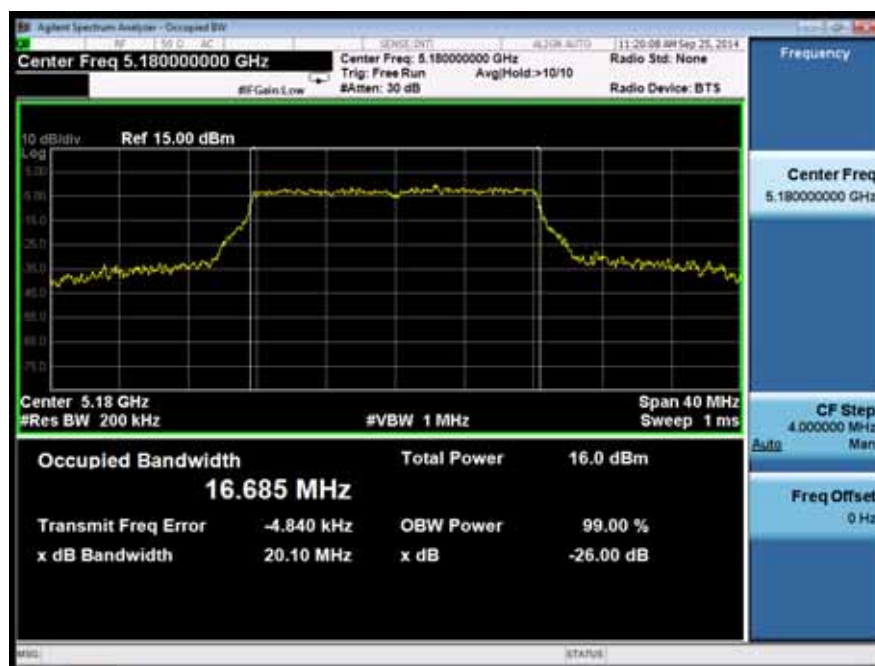



Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	B


Channel number	Channel frequency (MHz)	26dB Bandwidth (MHz)
36	5180	20.23
42	5210	20.32
48	5240	20.36


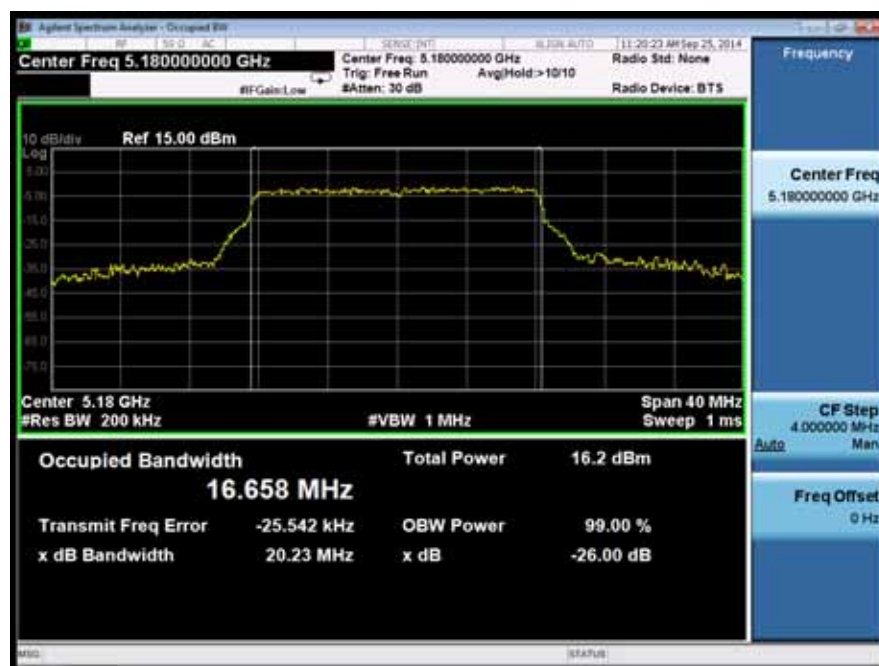




Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11n(HT20)	Antenna:	A


Channel number	Channel frequency (MHz)	26dB Bandwidth (MHz)
36	5180	20.56
42	5210	25.06
48	5240	25.20


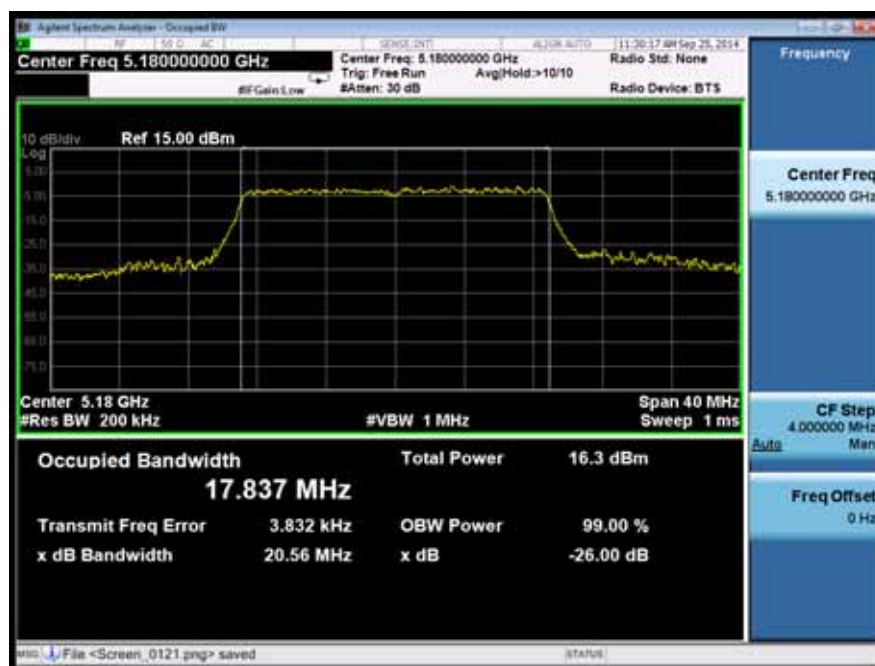


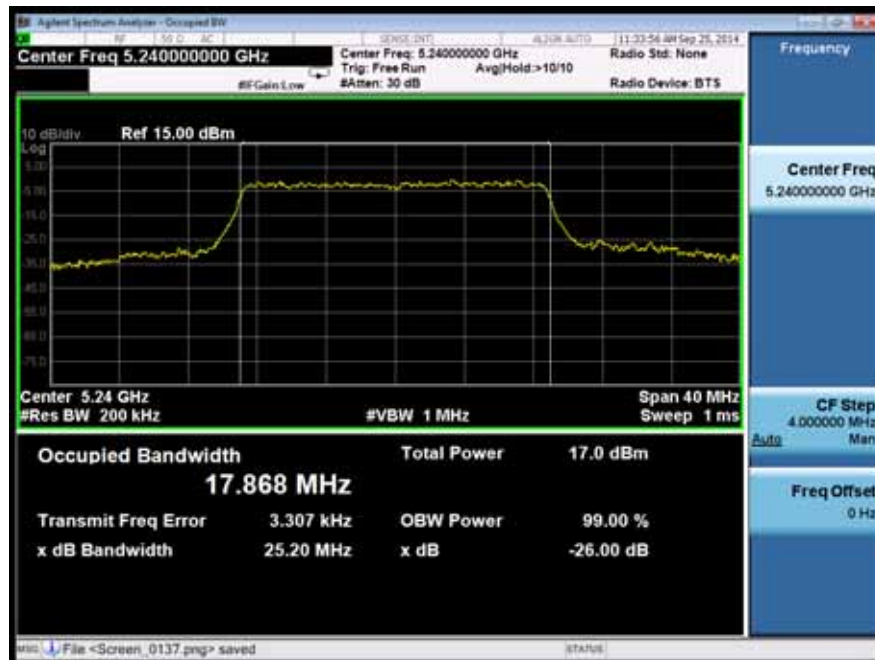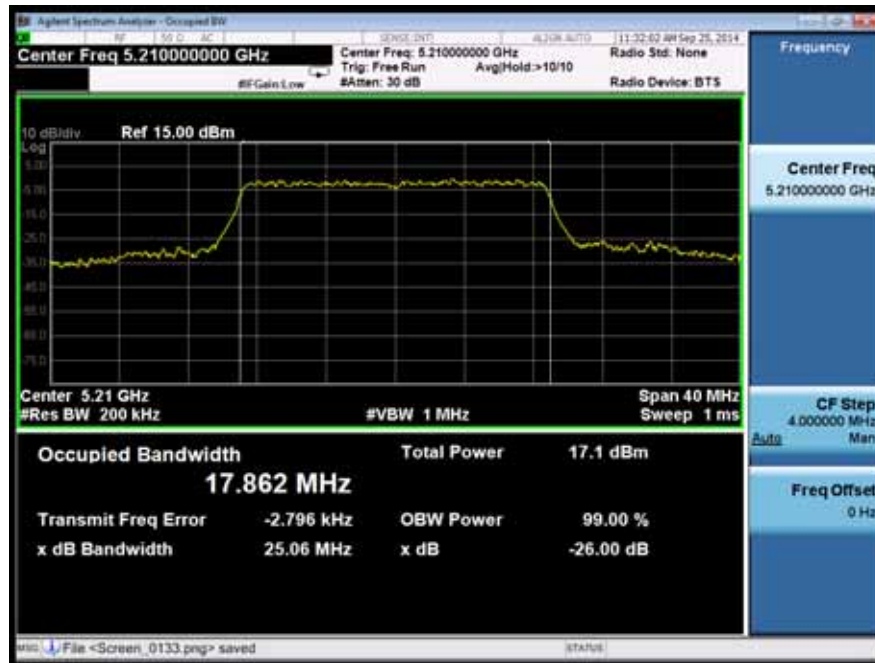

Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11n(HT20)	Antenna:	B



Channel number	Channel frequency (MHz)	26dB Bandwidth (MHz)
36	5180	20.60
42	5210	22.38
48	5240	25.10

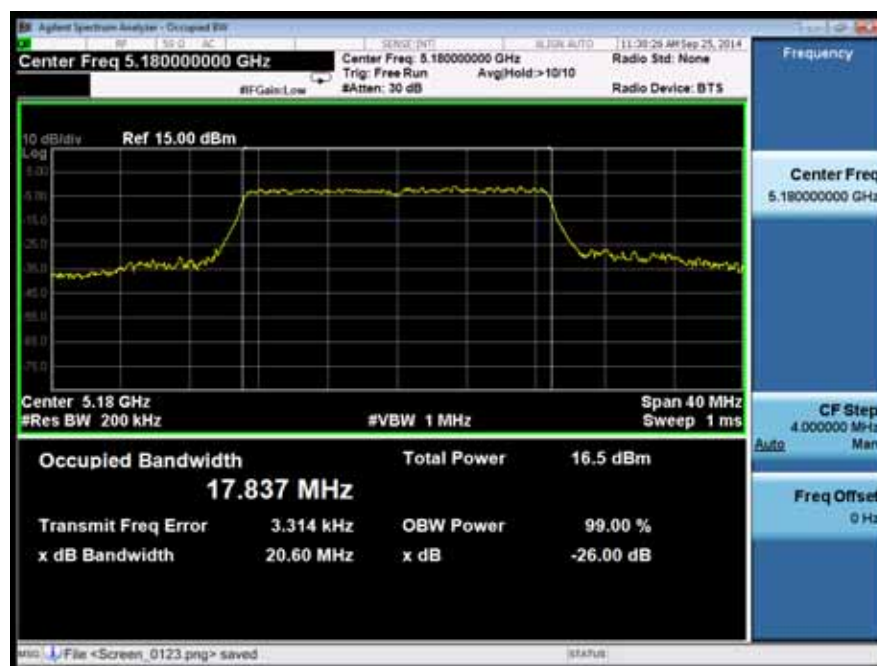

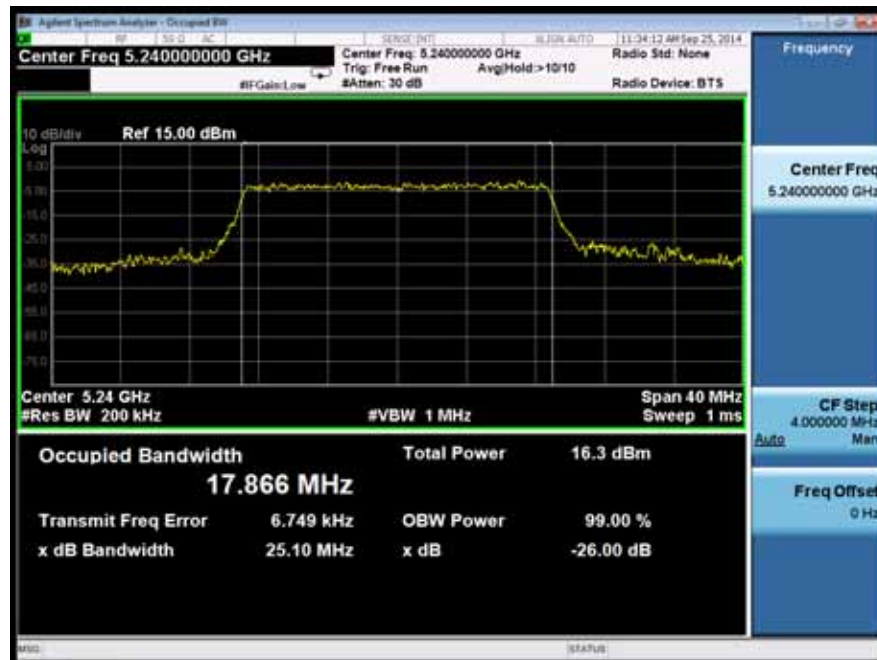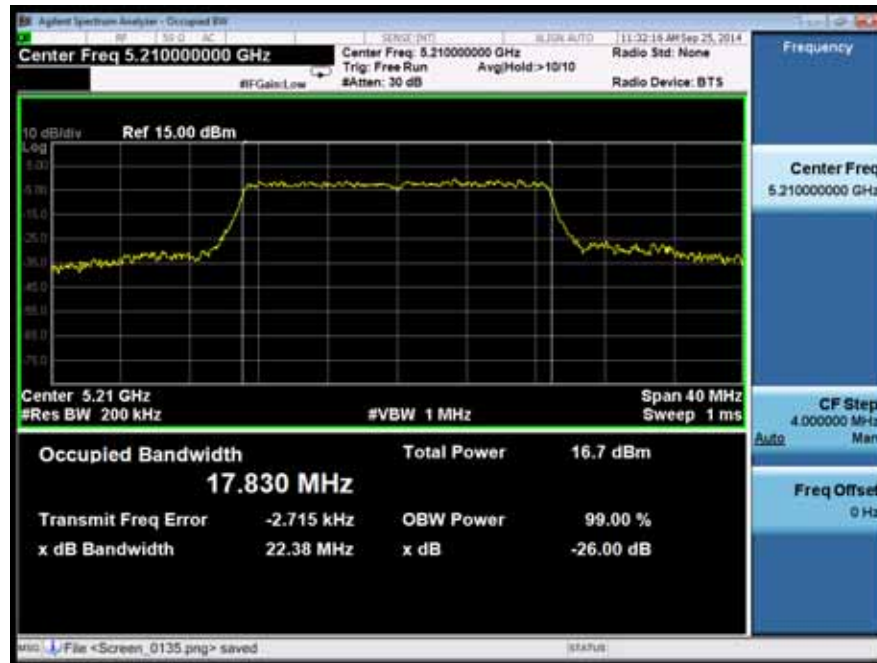



Spectrum Detector: PK Test Date : September 25, 2014
 Test By: KK Temperature : 24
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11n(HT40) Antenna: A

Channel number	Channel frequency (MHz)	26dB Bandwidth (MHz)
38	5190	43.24
46	5230	40.99

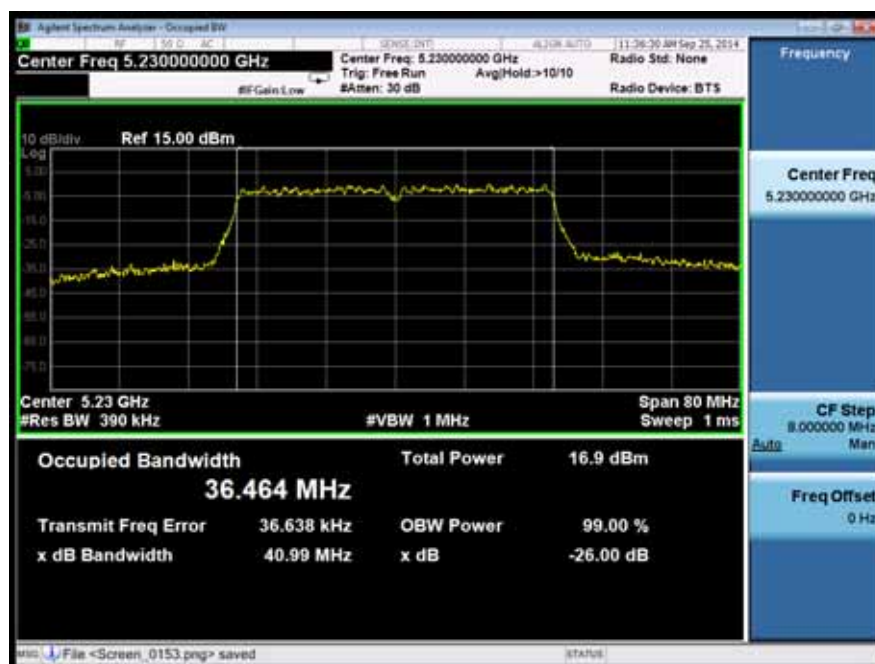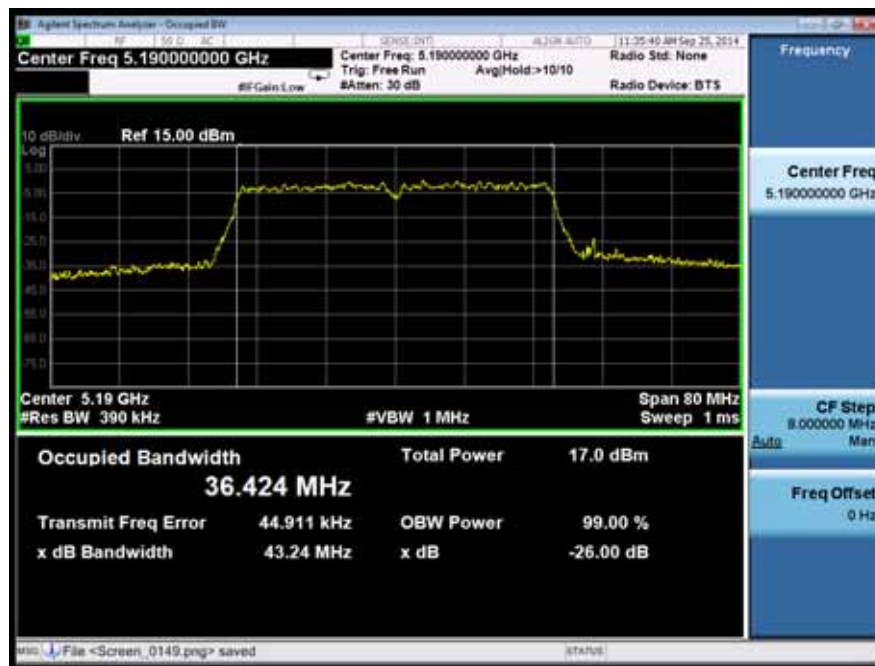

Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n(HT40) Antenna: B

Channel number	Channel frequency (MHz)	26dB Bandwidth (MHz)
38	5190	40.55
46	5230	41.12

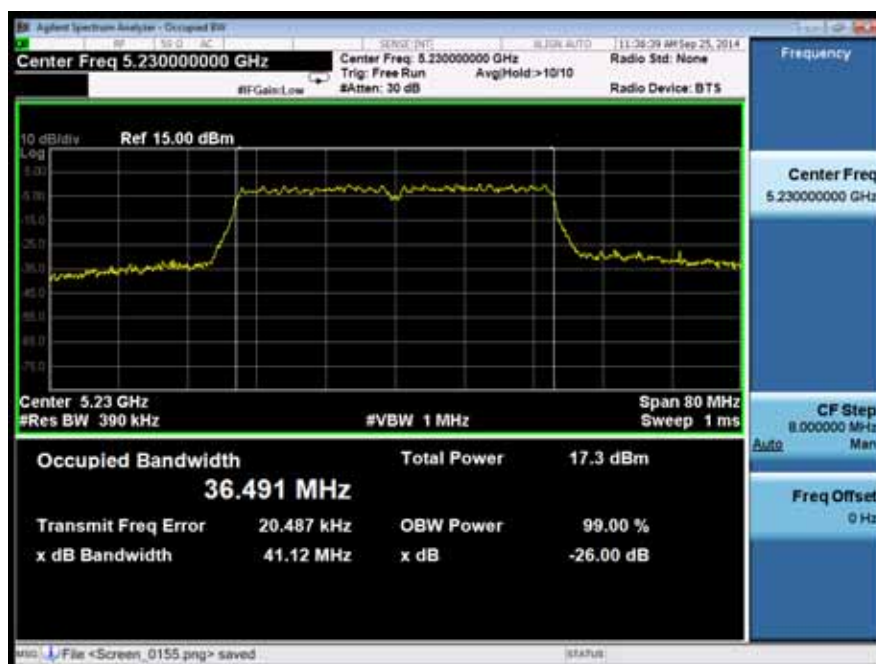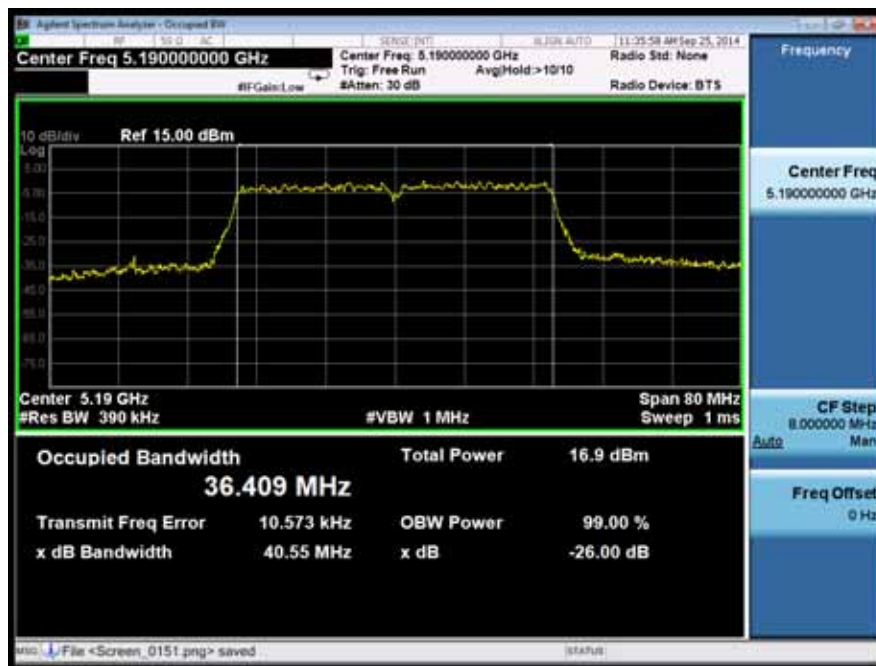

Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	A

Channel number	Channel frequency (MHz)	99%dB Bandwidth (MHz)
36	5180	18.176
42	5210	18.199
48	5240	18.341





Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	B


Channel number	Channel frequency (MHz)	99%dB Bandwidth (MHz)
36	5180	18.179
42	5210	18.242
48	5240	18.254







Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11n(HT20)	Antenna:	A


Channel number	Channel frequency (MHz)	99%dB Bandwidth (MHz)
36	5180	18.478
42	5210	18.537
48	5240	18.545


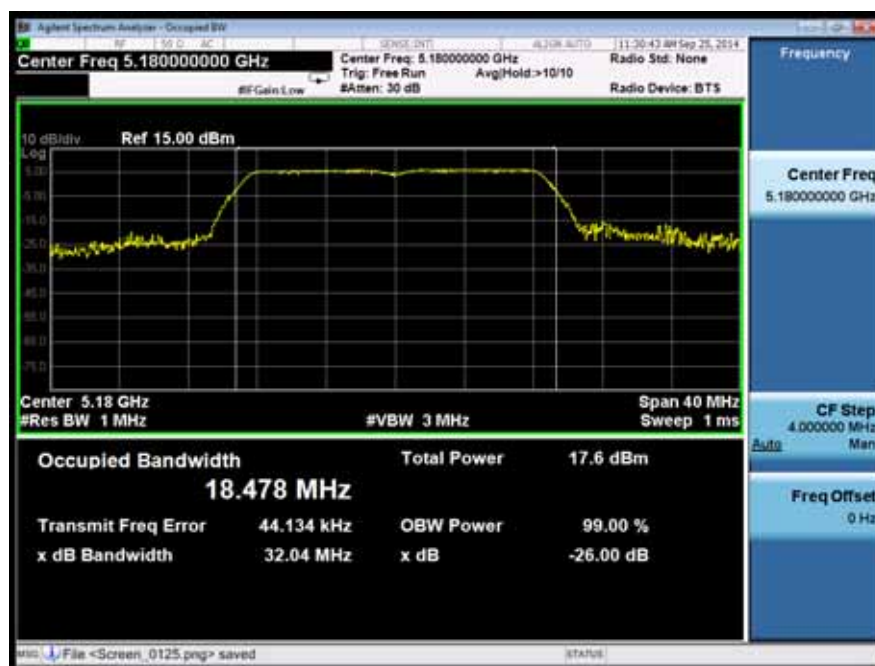


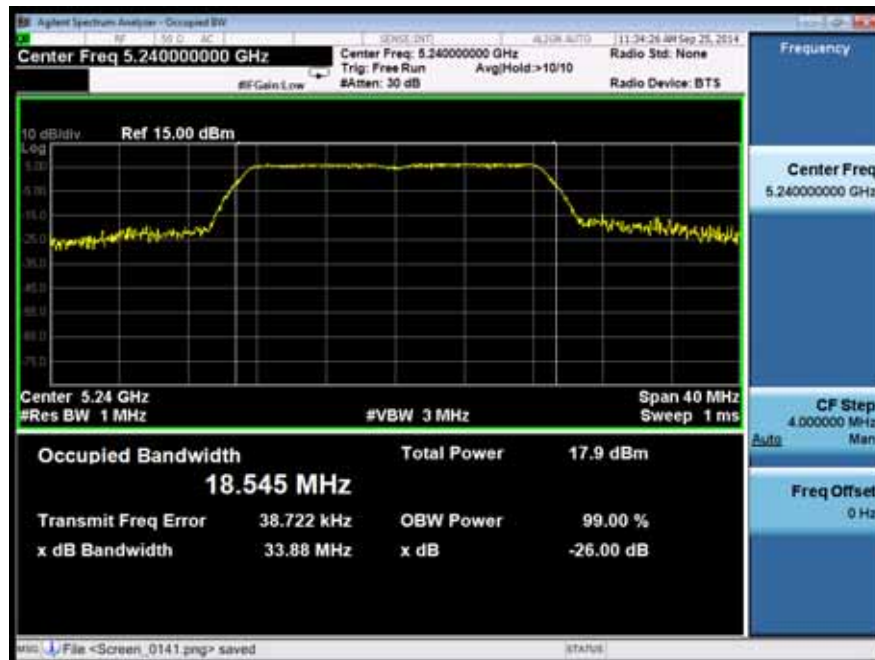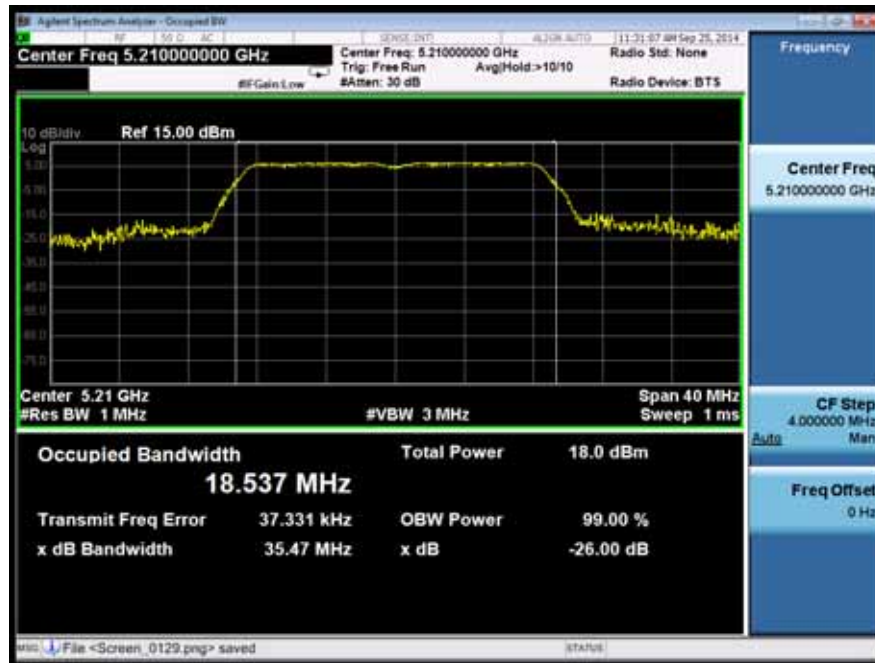

Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11n(HT20)	Antenna:	B



Channel number	Channel frequency (MHz)	99%dB Bandwidth (MHz)
36	5180	18.532
42	5210	18.589
48	5240	18.586

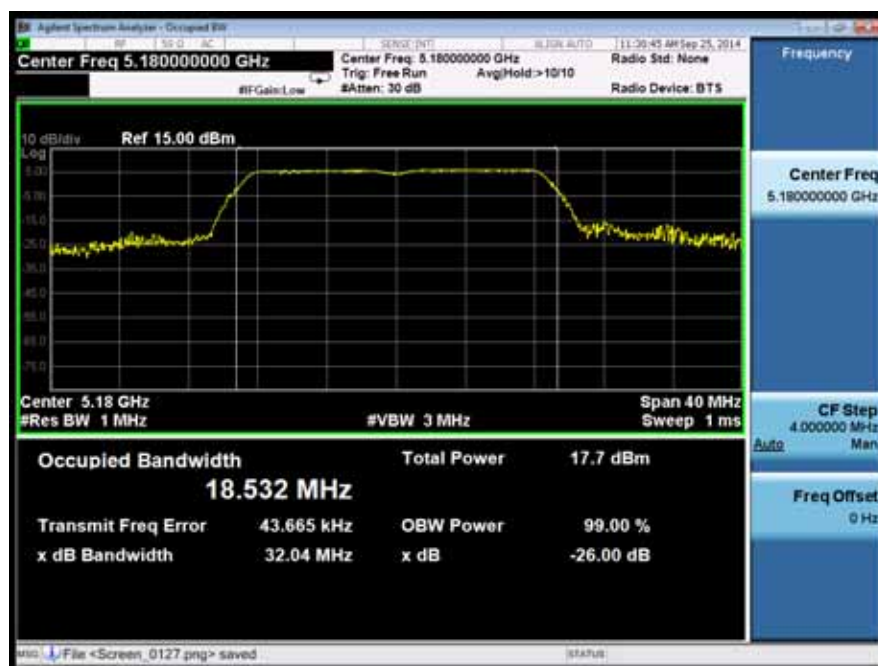

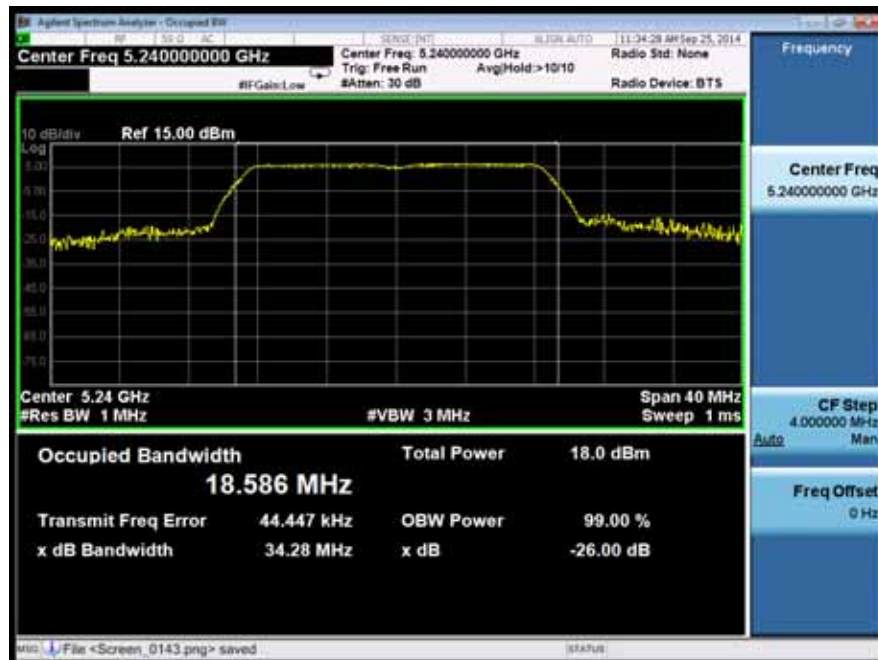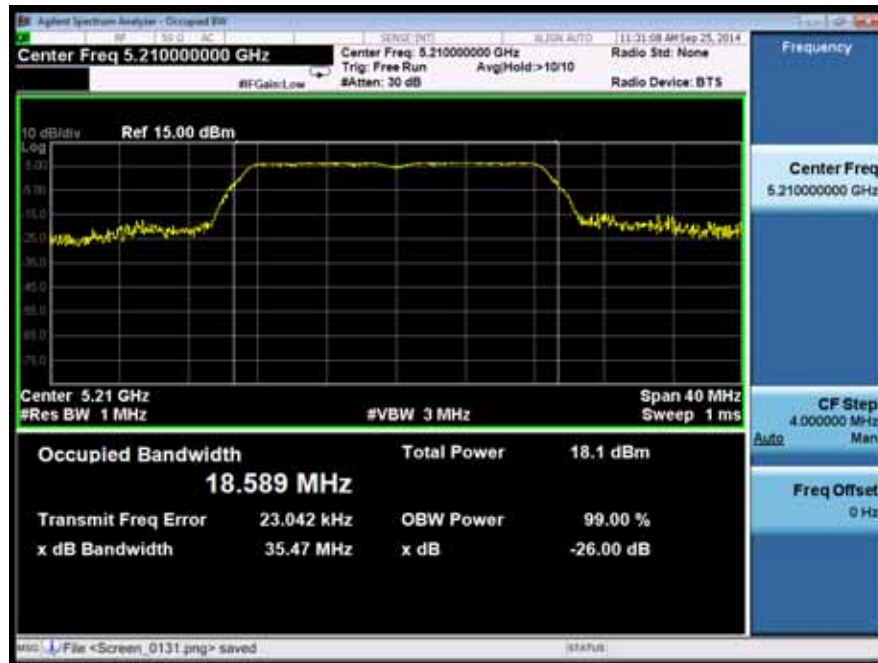



Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11n(HT40)	Antenna:	A

Channel number	Channel frequency (MHz)	99% Bandwidth (MHz)
38	5190	37.039
46	5230	37.132

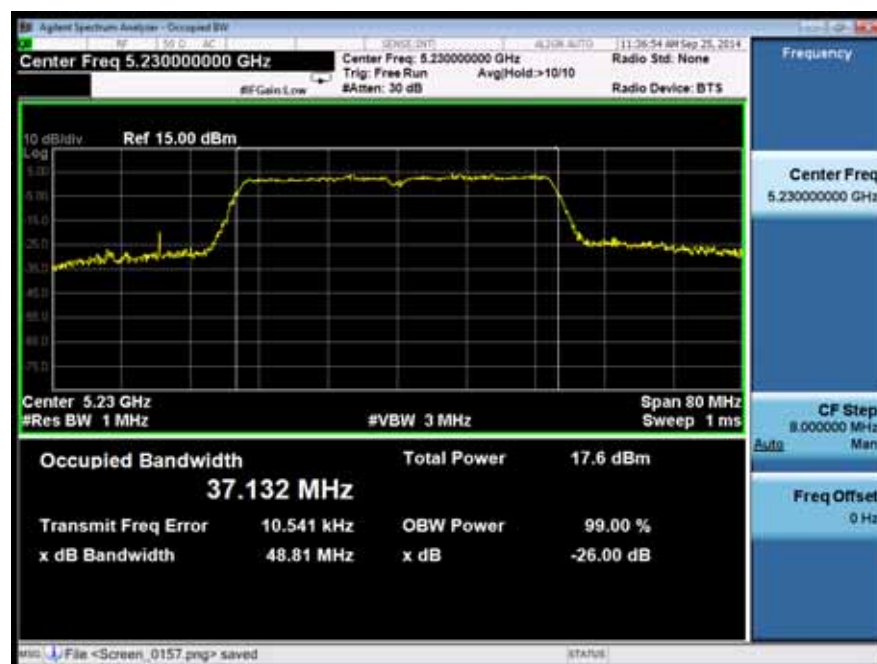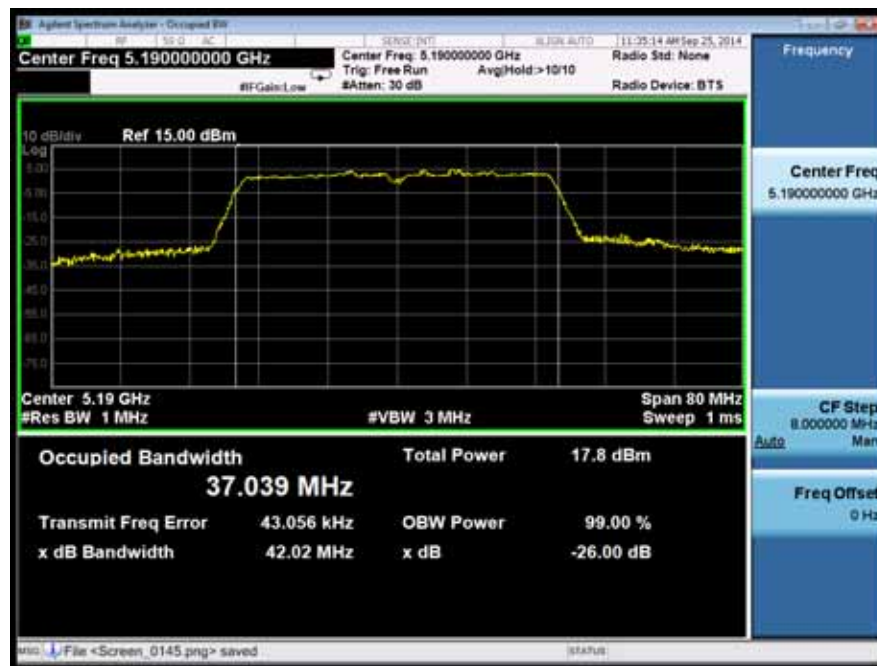

Spectrum Detector: PK Test Date : September 25, 2014
 Test By: KK Temperature : 24
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11n(HT40) Antenna: B

Channel number	Channel frequency (MHz)	99% Bandwidth (MHz)
38	5190	37.072
46	5230	37.157

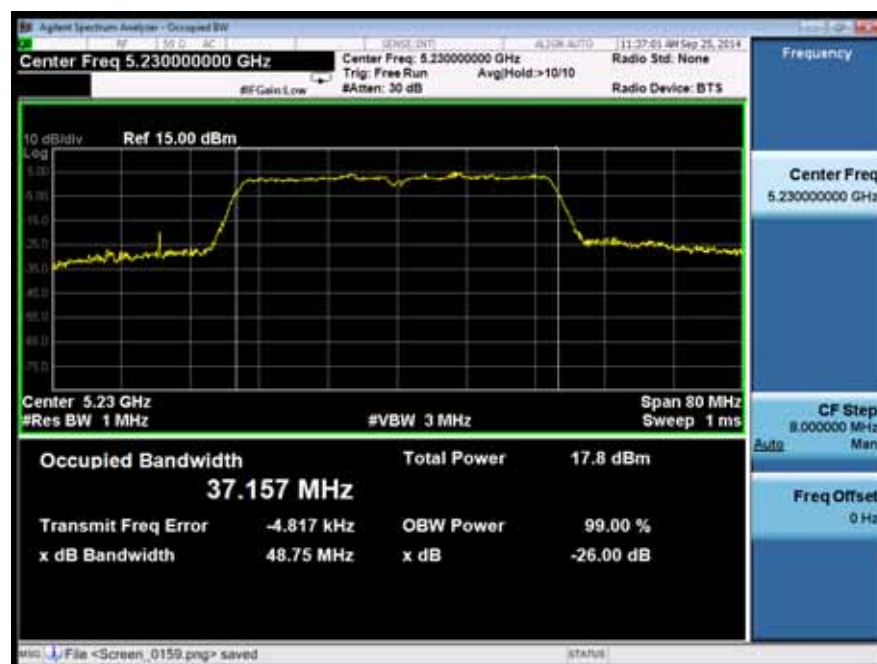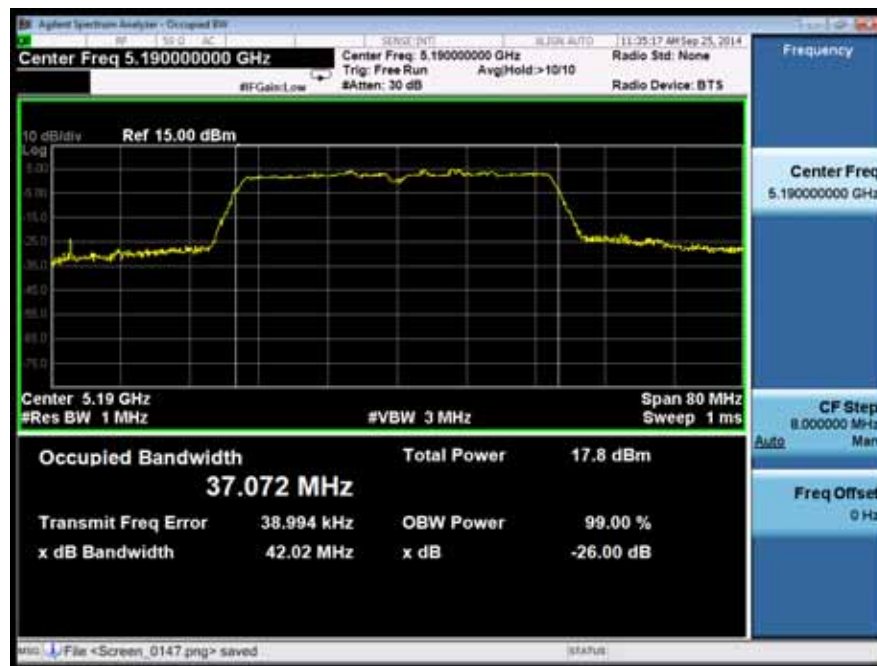

8 Maximum Conducted Output Power Test

8.1 Measurement Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- The Transmitter output (antenna port) was connected to the power meter.
- Turn on the EUT and power meter and then record the power value.
- Repeat above procedures on all channels needed to be tested.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used

EQUIPMENT TYPE	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power meter	ML2495A	0824006	05/17/2014	05/16/2015
Power sensor	MA2411B	0738172	05/17/2014	05/16/2015

8.4 Conducted output limit

Band 5.15-5.25GHz:

The maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the -26dB emission bandwidth in MHz.

8.5 Measurement Results

Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11a Antenna: A

Channel number	Channel Frequency(MHz)	Power output(dBm)	Power Limit(dBm) FCC	Pass/Fail
36	5180	13.63	17.00	PASS
42	5210	13.76	17.00	PASS
48	5240	14.17	17.00	PASS

Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11a Antenna: B

Channel number	Channel Frequency(MHz)	Power output(dBm)	Power Limit(dBm) FCC	Pass/Fail
36	5180	13.71	17.00	PASS
42	5210	13.82	17.00	PASS
48	5240	14.75	17.00	PASS

Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n(HT20) Antenna: A

Channel number	Channel Frequency(MHz)	Power output(dBm)	Power Limit(dBm) FCC	Pass/Fail
36	5180	14.57	17.00	PASS
42	5210	14.78	17.00	PASS
48	5240	14.59	17.00	PASS

Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n(HT20) Antenna: B

Channel number	Channel Frequency(MHz)	Power output(dBm)	Power Limit(dBm) FCC	Pass/Fail
36	5180	14.76	17.00	PASS
42	5210	14.80	17.00	PASS
48	5240	14.26	17.00	PASS

Spectrum Detector: PK Test Date : September 25, 2014
 Test By: KK Temperature : 24
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11n(HT40) Antenna: A

Channel number	Channel Frequency(MHz)	Power output(dBm)	Power Limit(dBm) FCC	Pass/Fail
38	5190	13.33	17.00	PASS
46	5230	13.41	17.00	PASS

Spectrum Detector: PK Test Date : September 25, 2014
 Test By: KK Temperature : 24
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11n(HT40) Antenna: B

Channel number	Channel Frequency(MHz)	Power output(dBm)	Power Limit(dBm) FCC	Pass/Fail
38	5190	13.34	17.00	PASS
46	5230	13.31	17.00	PASS


9. Peak Power Density

9.1 Test Procedures

Methods refer to FCC KDB 789033

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...".
- 2) Use the peak search function on the instrument to find the peak of the spectrum.
- 3) The result is the PPSD.
- 4) The above procedures make use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified in the 15.407(a)(5). That rule section also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth

9.2 Block Diagram of Test Setup



9.3 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Signal Analyzer	Agilent	N9010A	My53470879	05/17/2014	05/16/2015

9.4 Limit

Band 5.15-5.25GHz:

FCC: the peak power spectral density shall not exceed 4 dBm in any 1MHz band.

9.5 Test Result

Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	A


Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(dBm) FCC	Pass/Fail
36	5180	-0.917	4	PASS
42	5210	-0.667	4	PASS
48	5240	-0.929	4	PASS





Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	B

Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(dBm) FCC	Pass/Fail
36	5180	-1.528	4	PASS
42	5210	-0.793	4	PASS
48	5240	-0.570	4	PASS

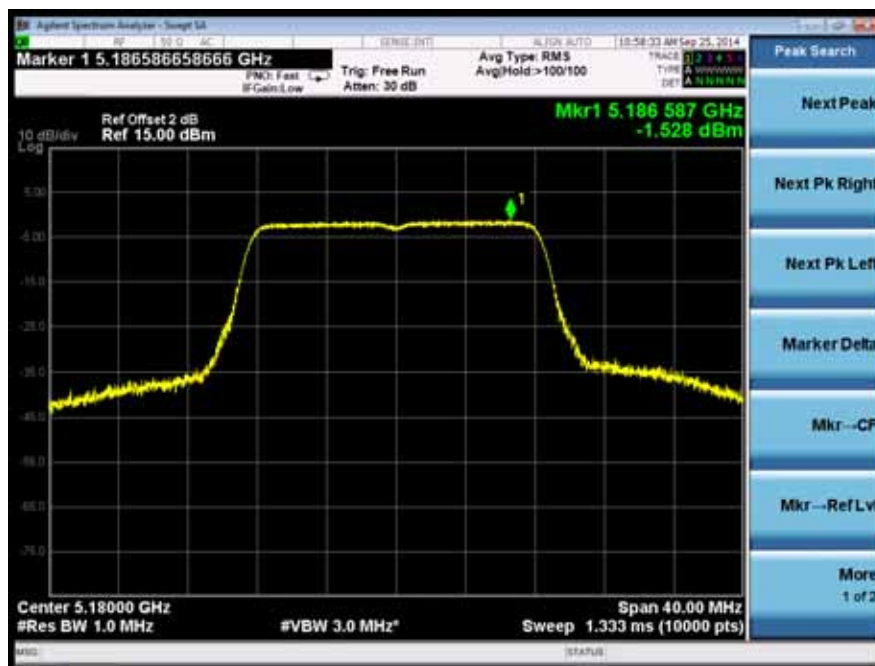




Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11n(HT20)	Antenna:	A


Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(dBm) FCC	Pass/Fail
36	5180	-1.320	4	PASS
42	5210	-0.787	4	PASS
48	5240	-0.895	4	PASS



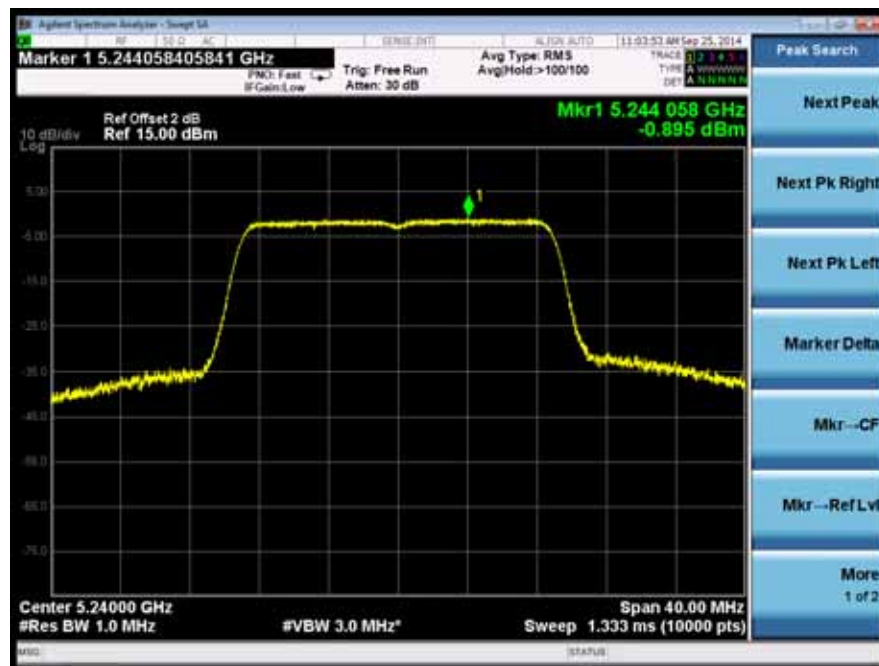

Spectrum Detector: PK Test Date : September 25, 2014
 Test By: KK Temperature : 24
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11n(HT20) Antenna: B


Channel number	Channel Frequency(MHz)	Peak Power output(dBm)	Peak Power Limit(dBm) FCC	Pass/Fail
36	5180	-1.390	4	PASS
42	5210	-1.200	4	PASS
48	5240	-0.958	4	PASS

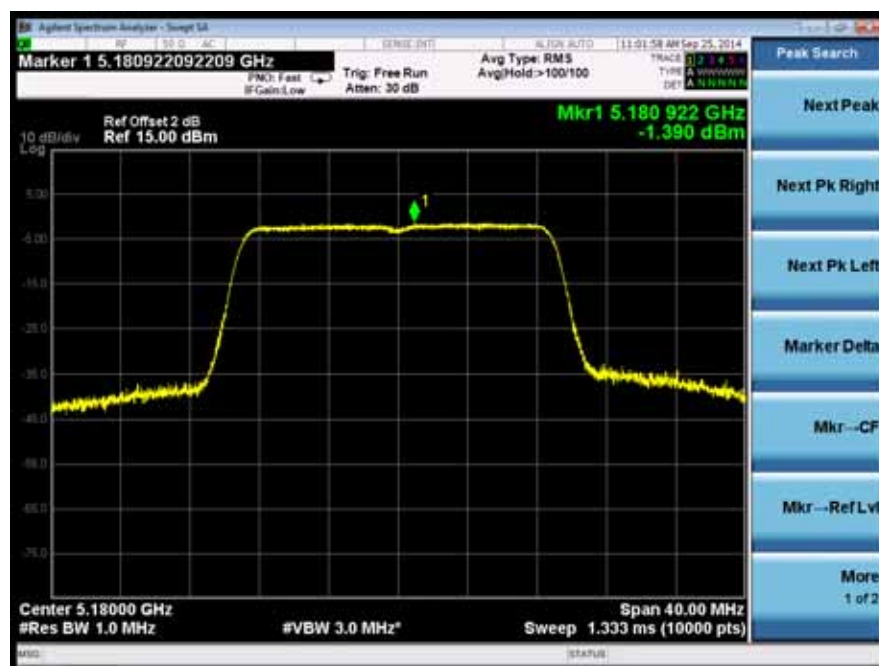





Spectrum Detector: PK Test Date : September 25, 2014
 Test By: KK Temperature : 24
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11n(HT40) Antenna: A

Channel number	Channel Frequency(MHz)	Power output(dBm)	Peak Power Limit(dBm) FCC	Pass/Fail
38	5190	-4.436	4	PASS
46	5230	-4.298	4	PASS

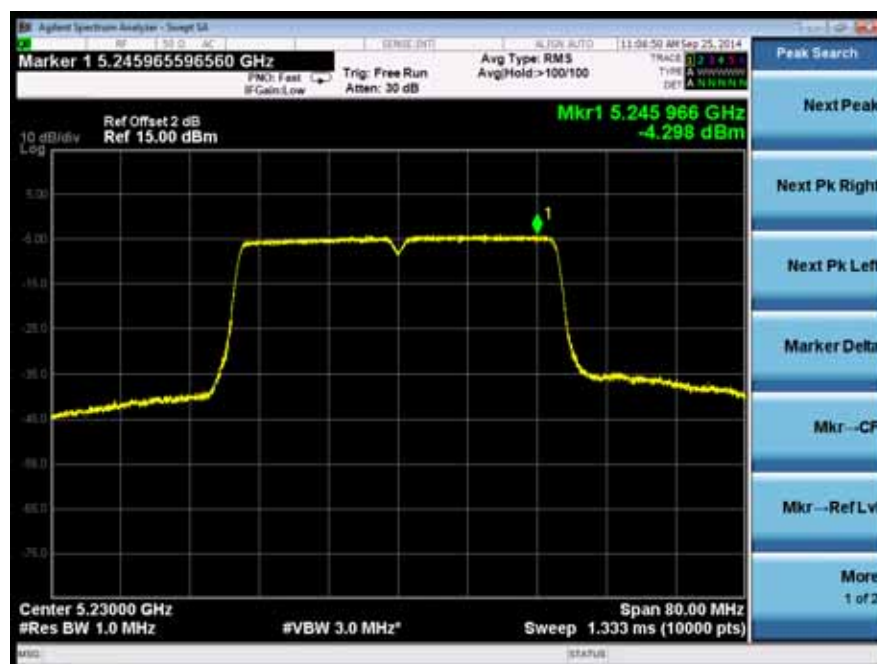

Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n(HT40) Antenna: B

Channel number	Channel Frequency(MHz)	Power output(dBm)	Peak Power Limit(dBm) FCC	Pass/Fail
38	5190	-4.117	4	PASS
46	5230	-3.916	4	PASS

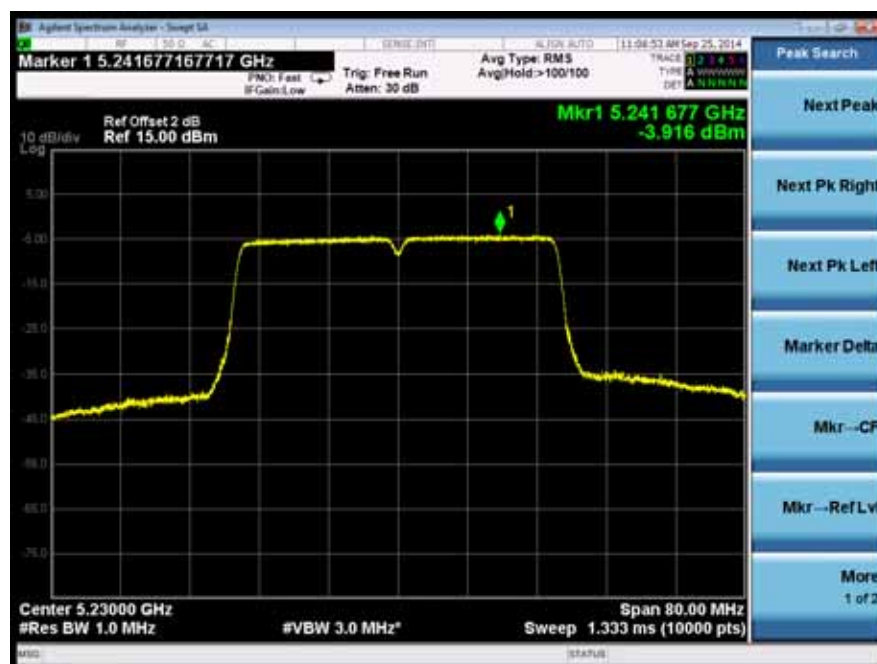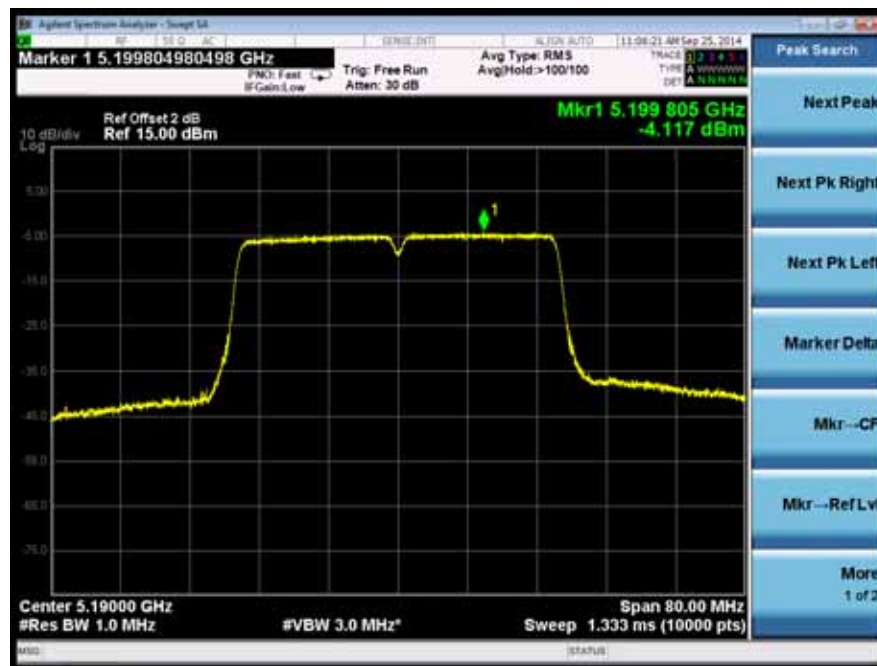

10. Transmitter Peak Excursion

10.1 Test Procedures


Methods refer to FCC KDB 789033

- 1) Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.
- 2) Find the maximum of the peak-max-hold spectrum.
 - a) Set RBW = 1 MHz.
 - b) VBW $\geq$ 3 MHz.
 - c) Detector = peak.
 - d) Trace mode = max-hold.
 - e) Allow the sweeps to continue until the trace stabilizes.
 - f) Use the peak search function to find the peak of the spectrum.
- 3) Use the procedure found under 4. to measure the PPSD.
- 4) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

10.2 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Signal Analyzer	Agilent	N9010A	My53470879	05/17/2014	05/16/2015

10.3 Block Diagram of Test setup



10.4 Limit



The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

10.5 Test Result

PASS.

Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	A

Channel number	Channel Frequency(MHz)	Peak Excursion (dBm)	Peak Excursion Limit(dBm)	Pass/Fail
36	5180	8.122	13	Pass
42	5210	8.227	13	Pass
48	5240	8.445	13	Pass

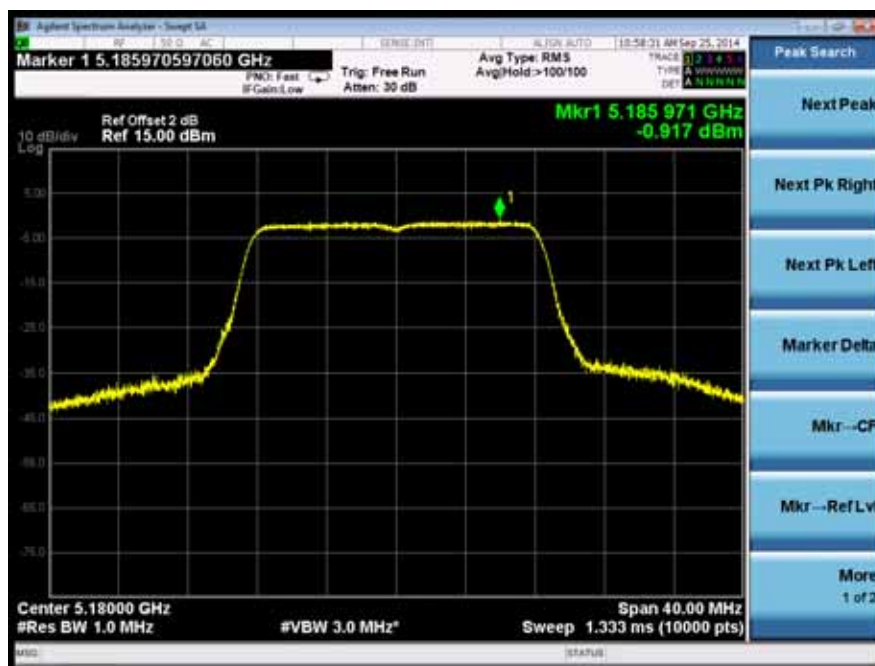
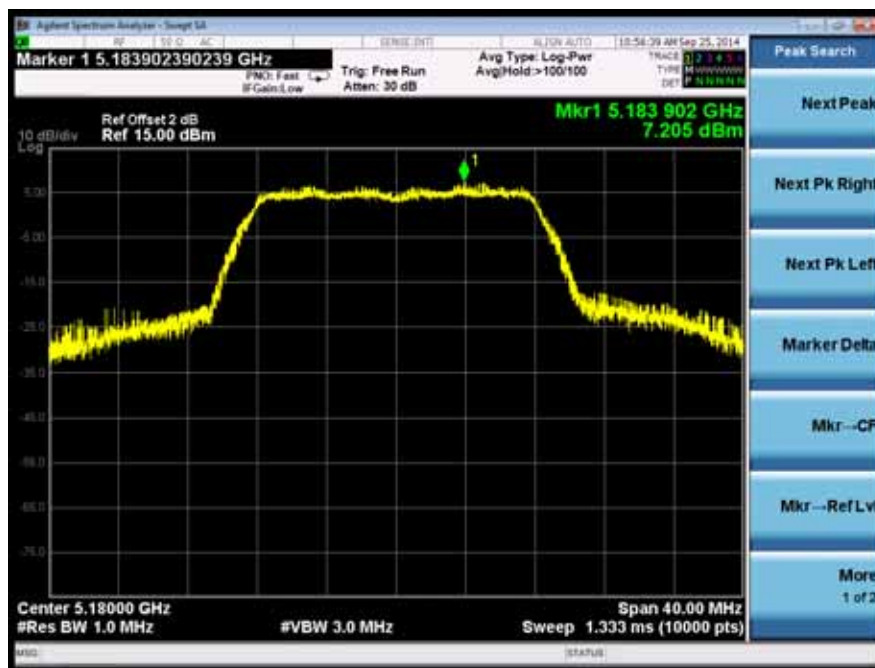






Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	B

Channel number	Channel Frequency(MHz)	Peak Excursion (dBm)	Peak Excursion Limit(dBm)	Pass/Fail
36	5180	8.803	13	Pass
42	5210	8.295	13	Pass
48	5240	8.087	13	Pass

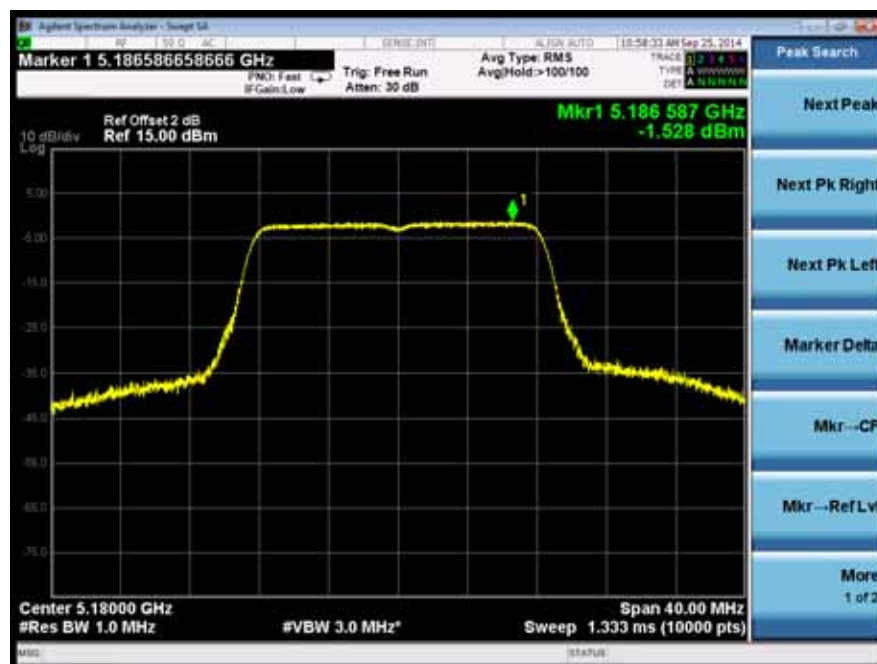
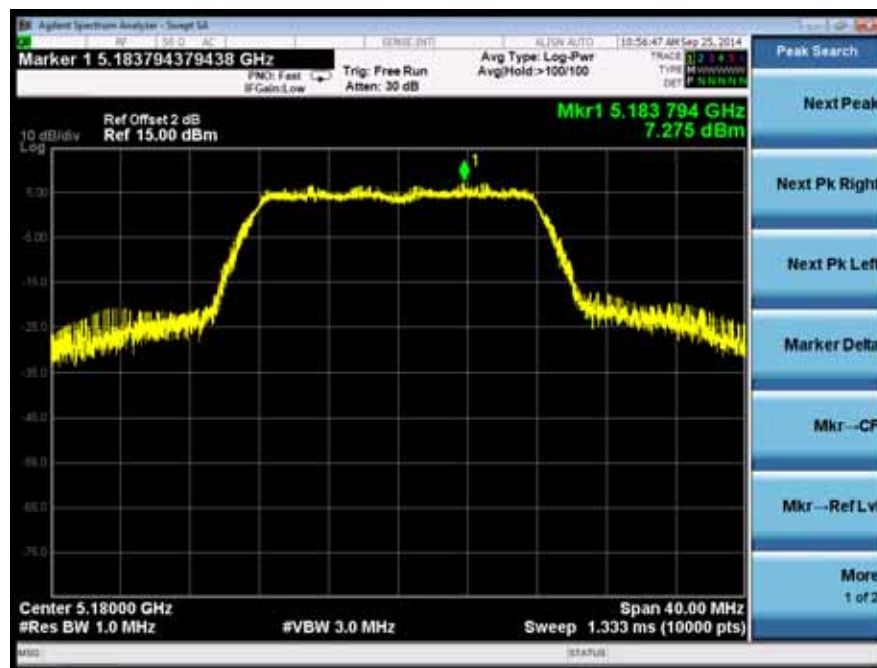









Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11n(HT20)	Antenna:	A

Channel number	Channel Frequency(MHz)	Peak Excursion (dBm)	Peak Excursion Limit(dBm)	Pass/Fail
36	5180	7.370	13	Pass
42	5210	7.224	13	Pass
48	5240	7.213	13	Pass

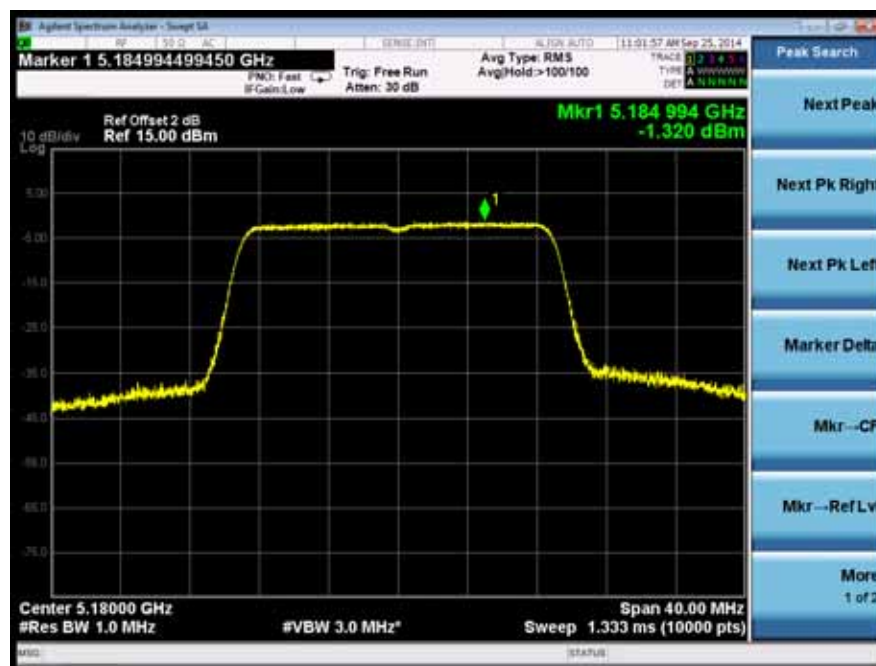
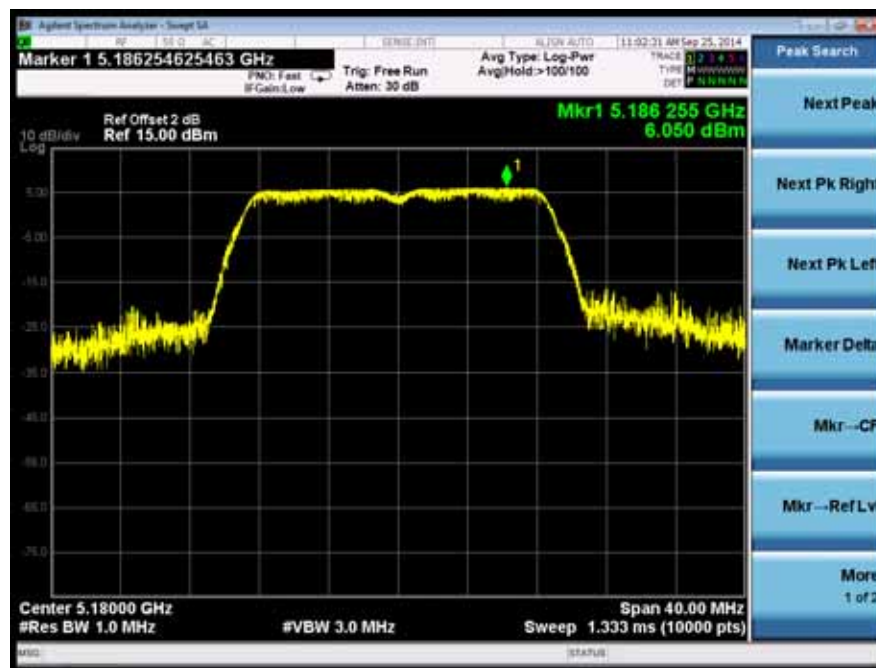


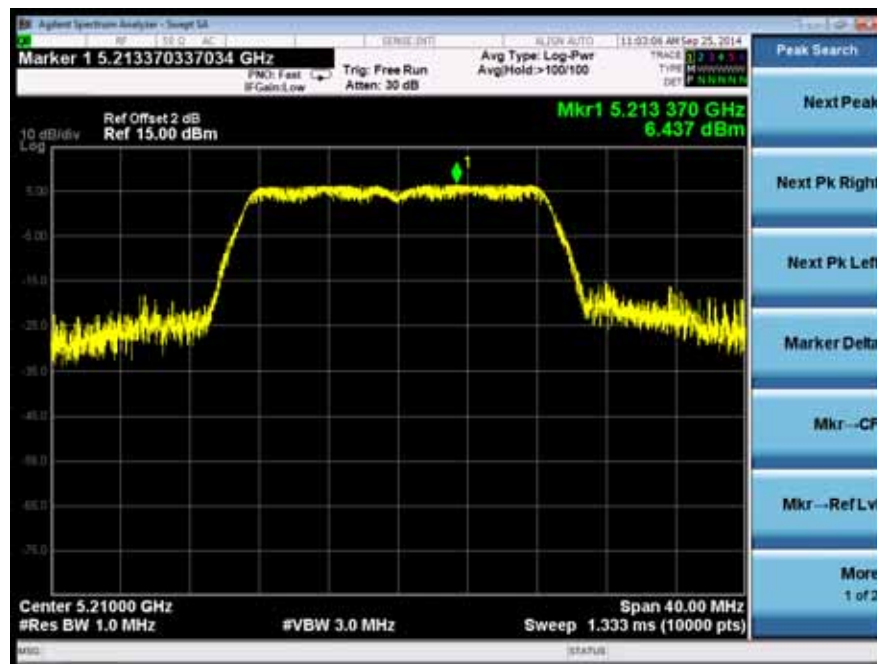


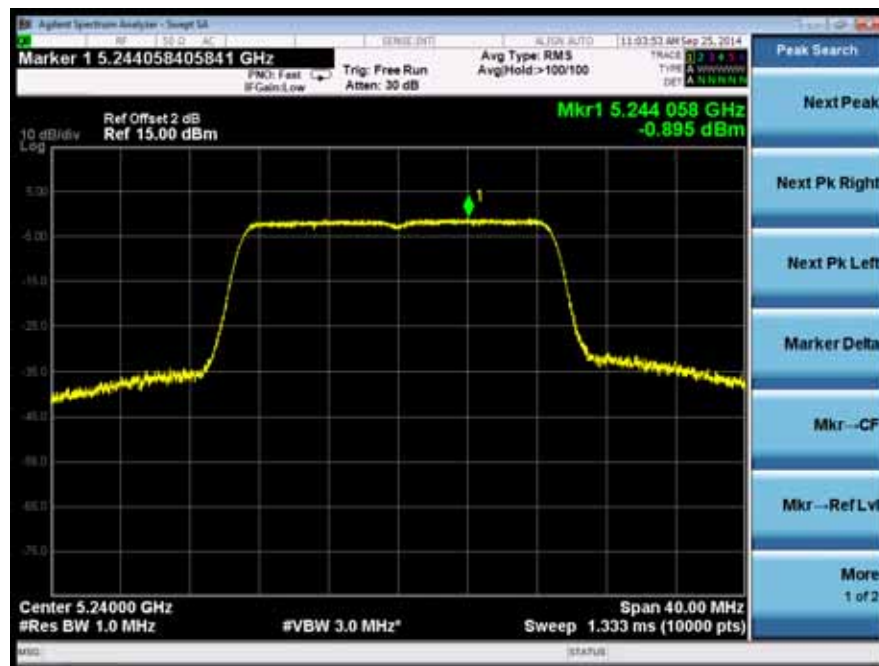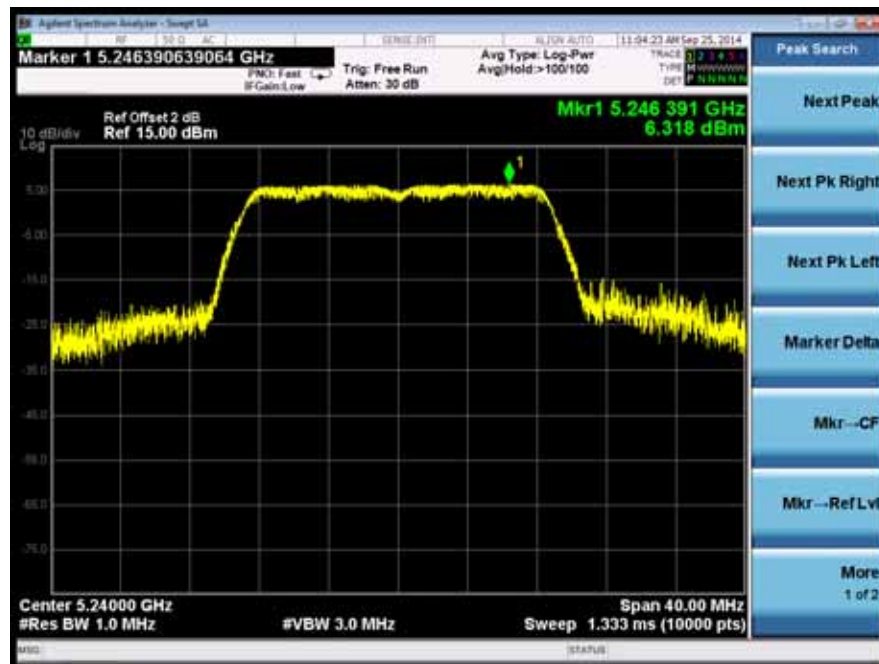


Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11n(HT20)	Antenna:	B

Channel number	Channel Frequency(MHz)	Peak Excursion (dBm)	Peak Excursion Limit(dBm)	Pass/Fail
36	5180	7.431	13	Pass
42	5210	7.640	13	Pass
48	5240	7.329	13	Pass

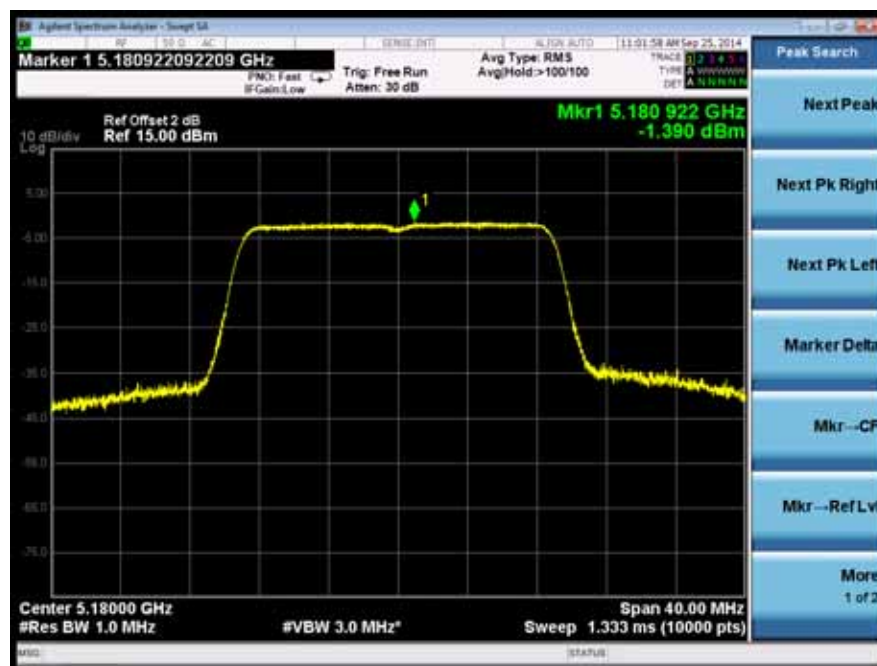
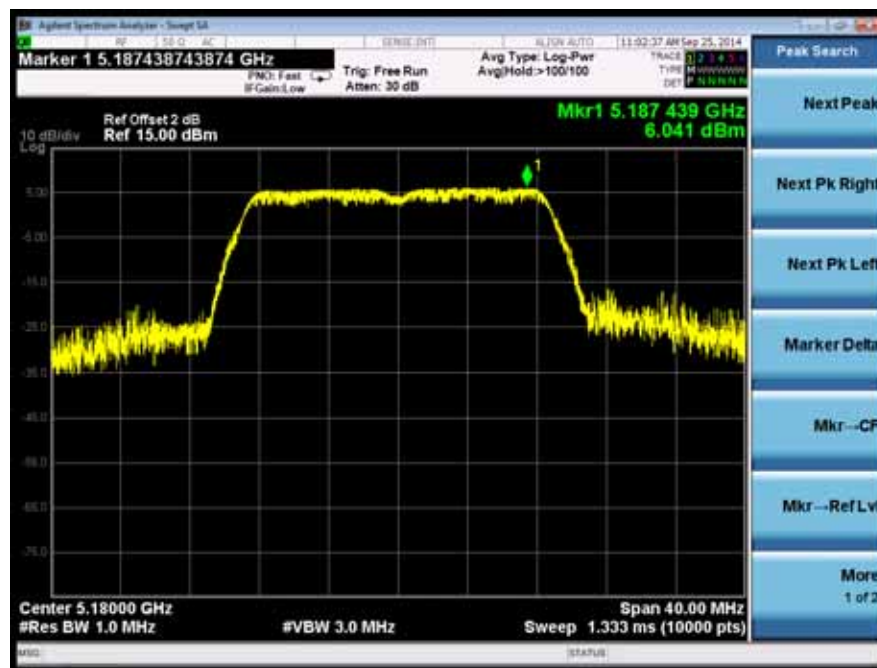


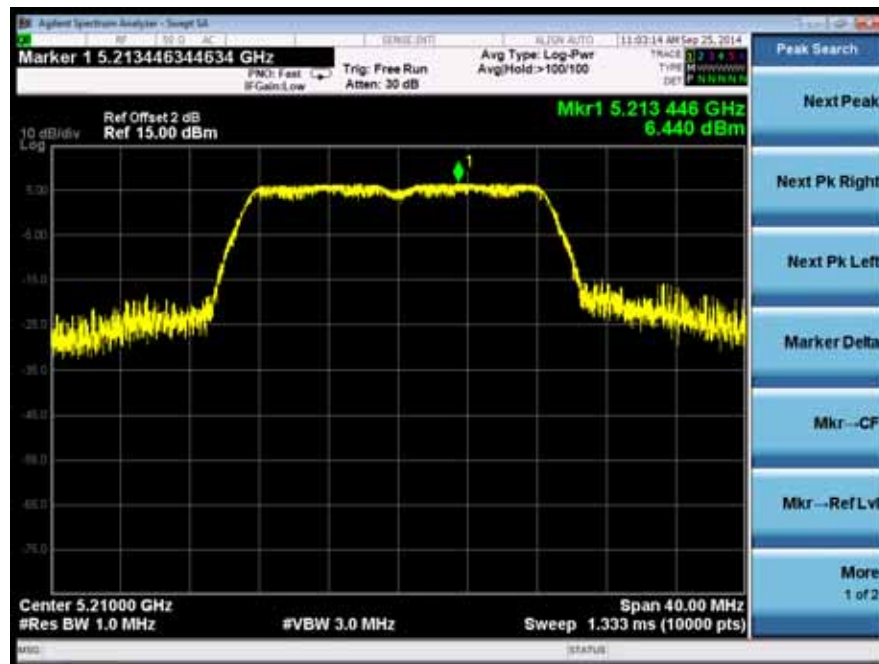


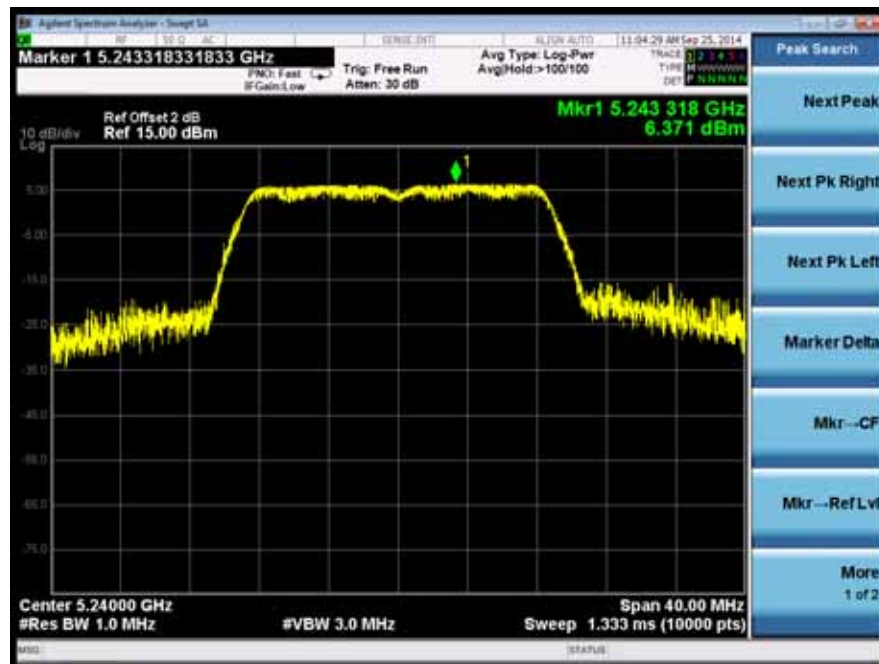

Spectrum Detector: PK Test Date : September 25, 2014
 Test By: KK Temperature : 24
 Test Result: PASS Humidity : 53 %
 Operation Mode: 802.11n(HT40) Antenna: A



Channel number	Channel Frequency(MHz)	Peak Excursion (dBm)	Peak Excursion Limit(dBm)	Pass/Fail
38	5190	9.058	13	Pass
46	5230	8.083	13	Pass

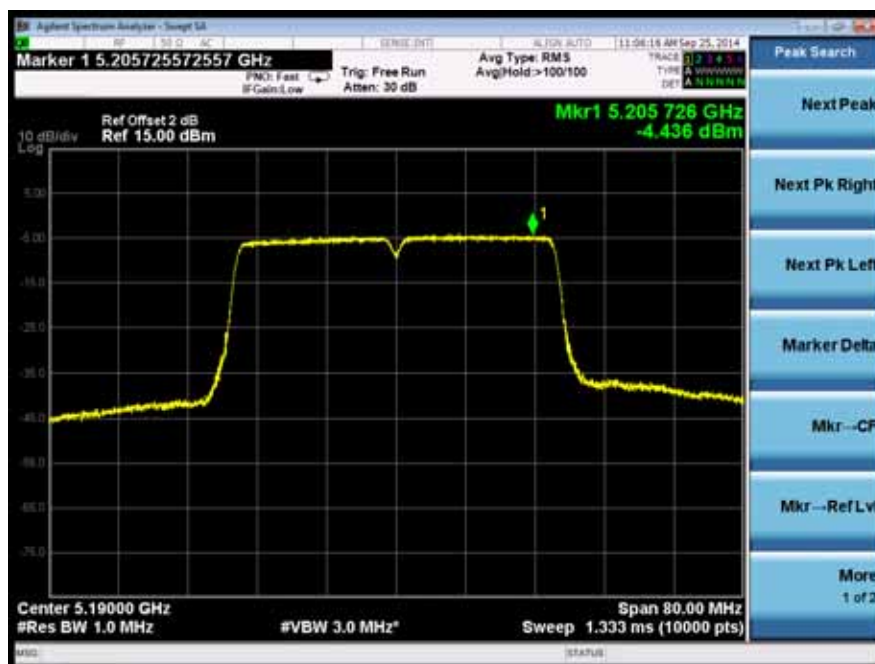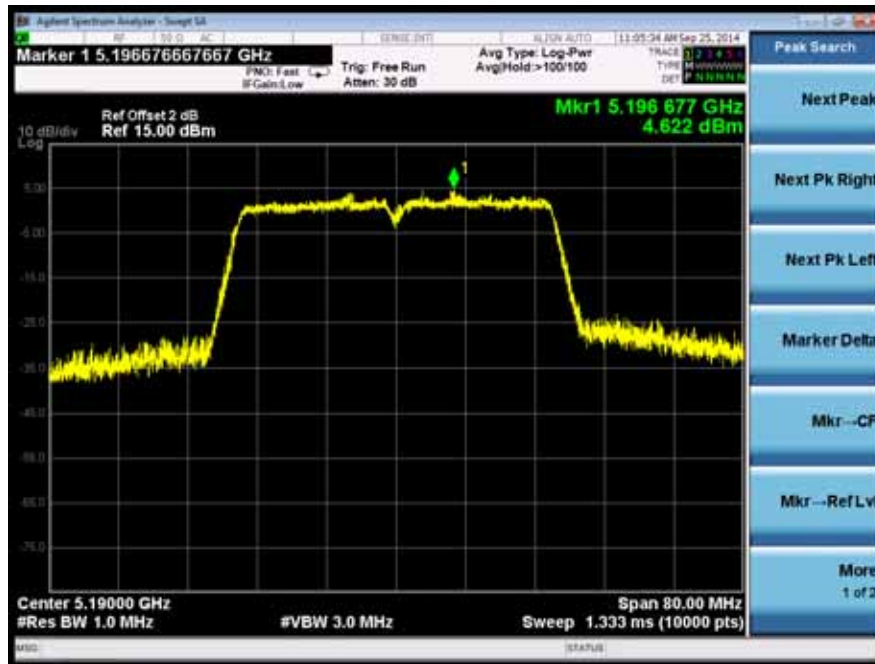


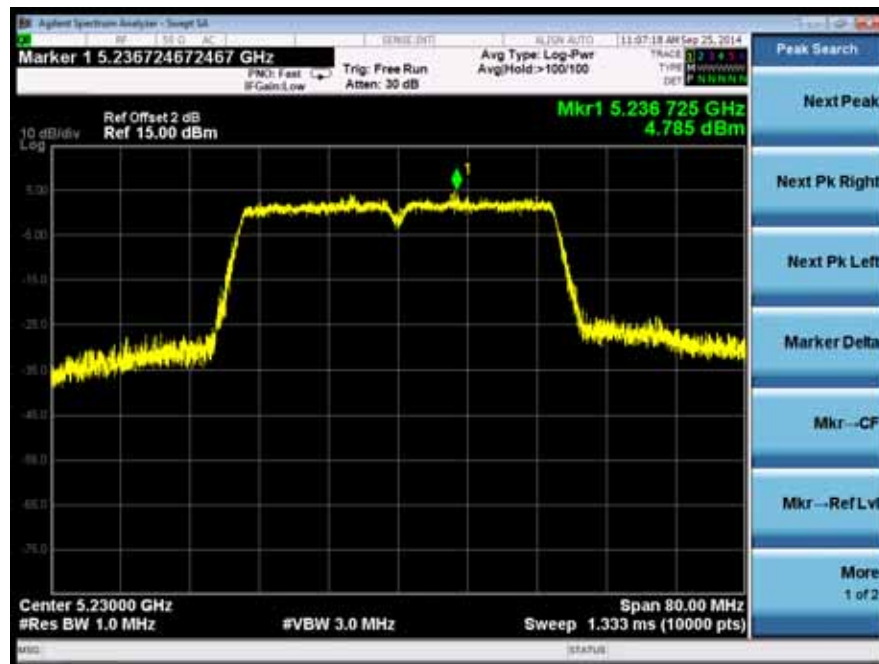

Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n(HT40) Antenna: B

Channel number	Channel Frequency(MHz)	Peak Excursion (dBm)	Peak Excursion Limit(dBm)	Pass/Fail
38	5190	8.679	13	Pass
46	5230	8.519	13	Pass

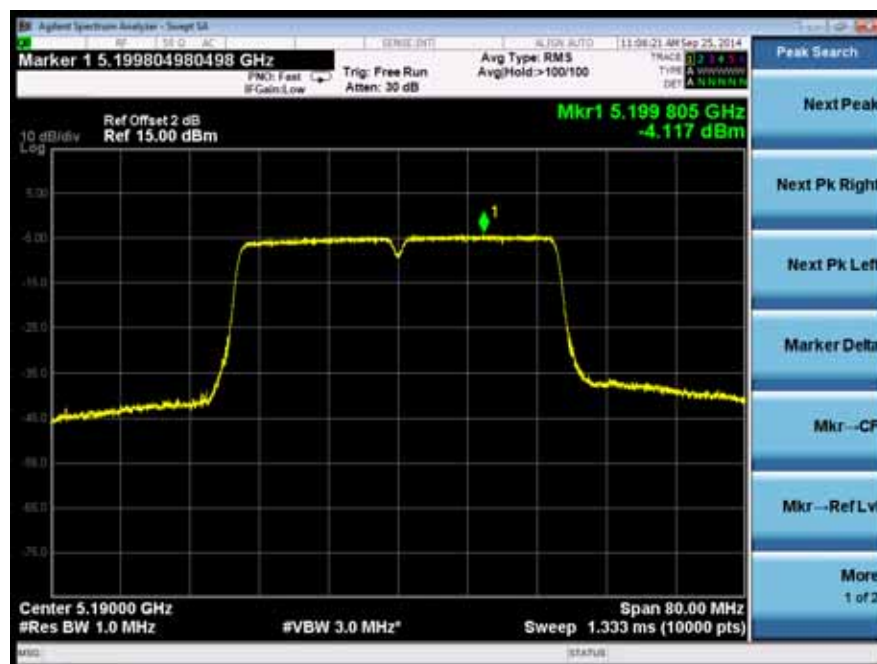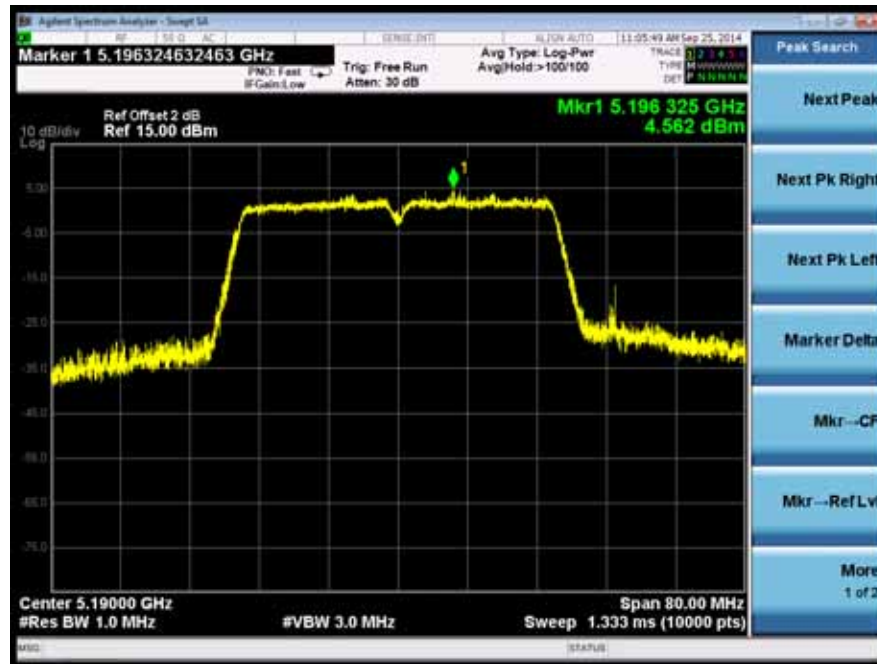

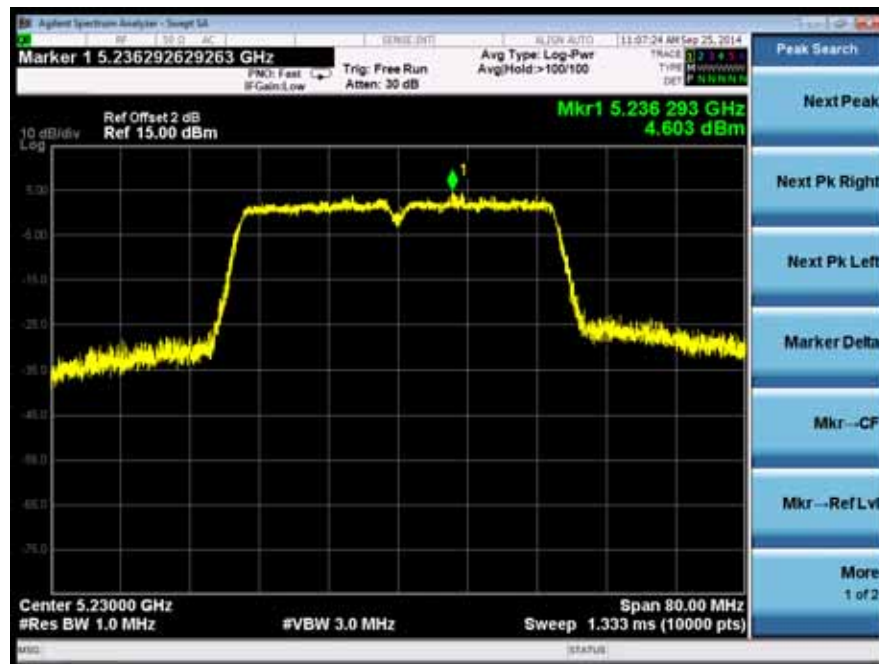

11. Band Edge Test

11.1 Test Procedures

Test method: FCC KDB 789033 G.6


Method AD (Average Detection): Primary method

- 1) Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.
- 2) Find the maximum of the peak-max-hold spectrum.
 - a) RBW = 1 MHz.
 - b) VBW $\geq$ 3 MHz.
 - c) Detector = RMS,
 - d) Averaging type = power
 - e) Sweep time = auto.
 - f) Allow the sweeps to continue until the trace stabilizes.
 - g) Use the peak search function to find the peak of the spectrum.
 - h) e.i.r.p Peak Level(dBm)= continued Peak Level(dBm) + Antenna Gain

11.1.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Signal Analyzer	Agilent	N9010A	My53470879	05/17/2014	05/16/2015

11.2 Block Diagram of Test setup



11.3 Limit

Band 5.15-5.25GHz:



all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

11.4 Test Result

PASS.



Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	A

Band Edge Frequency (MHz)	continued Peak Level (dBm)	e.i.r.p Peak Level (dBm)	Limit(dBm)	Pass/Fail
5150	-51.262	-49.262	-27	PASS
5350	-51.683	-49.683	-27	PASS

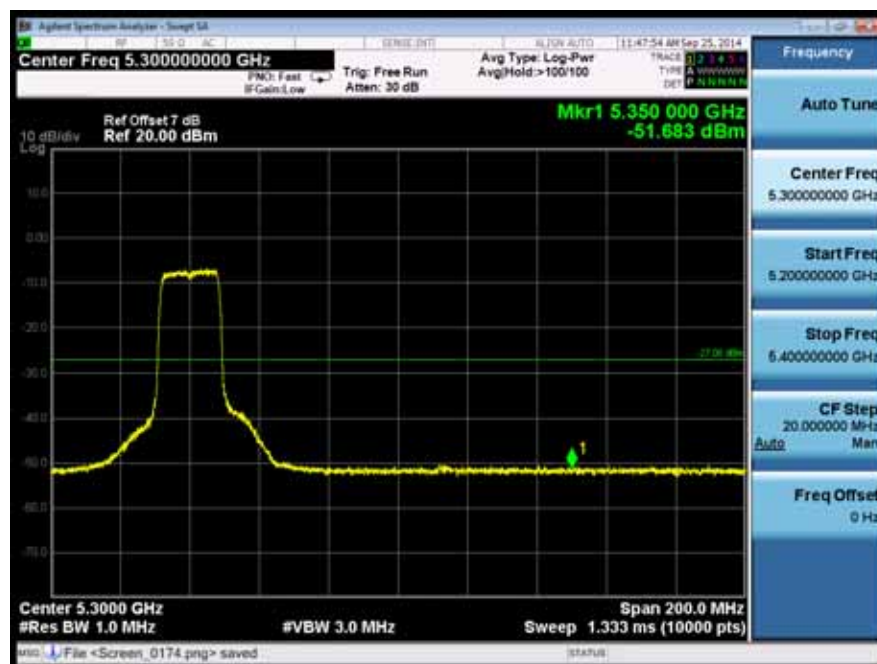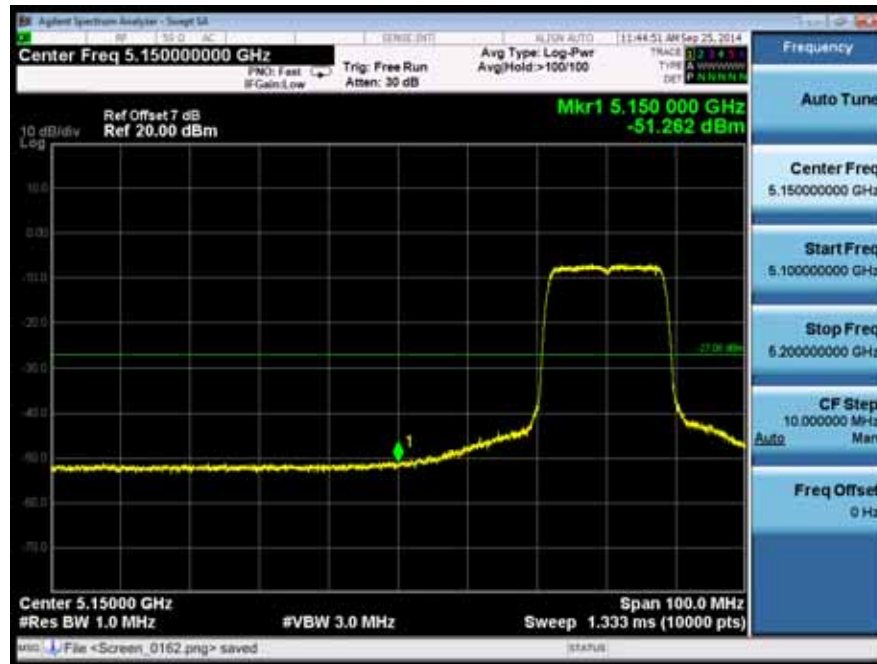



Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11a	Antenna:	B

Band Edge Frequency (MHz)	continued Peak Level (dBm)	e.i.r.p Peak Level (dBm)	Limit(dBm)	Pass/Fail
5150	-51.274	-49.274	-27	PASS
5350	-52.272	-50.272	-27	PASS

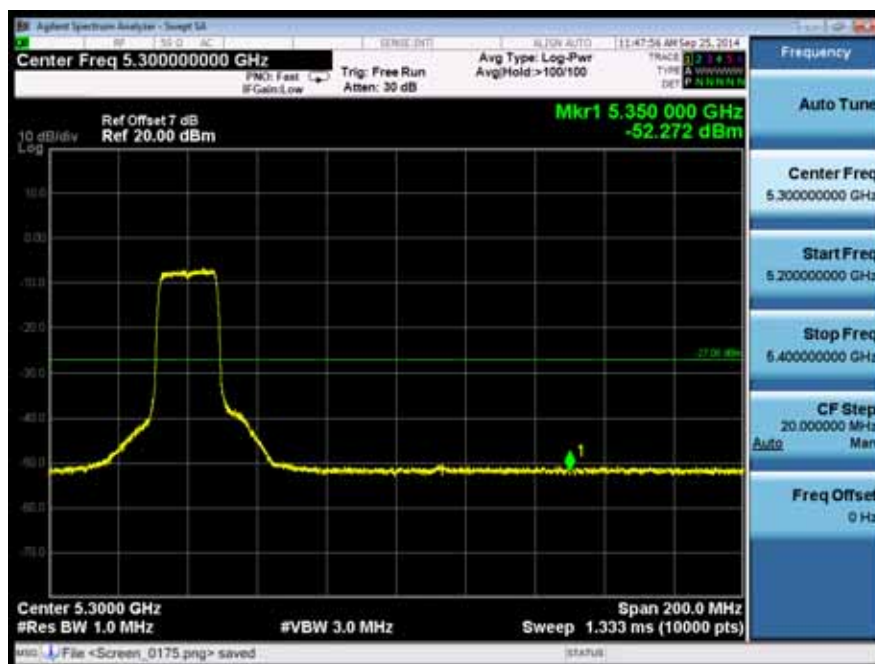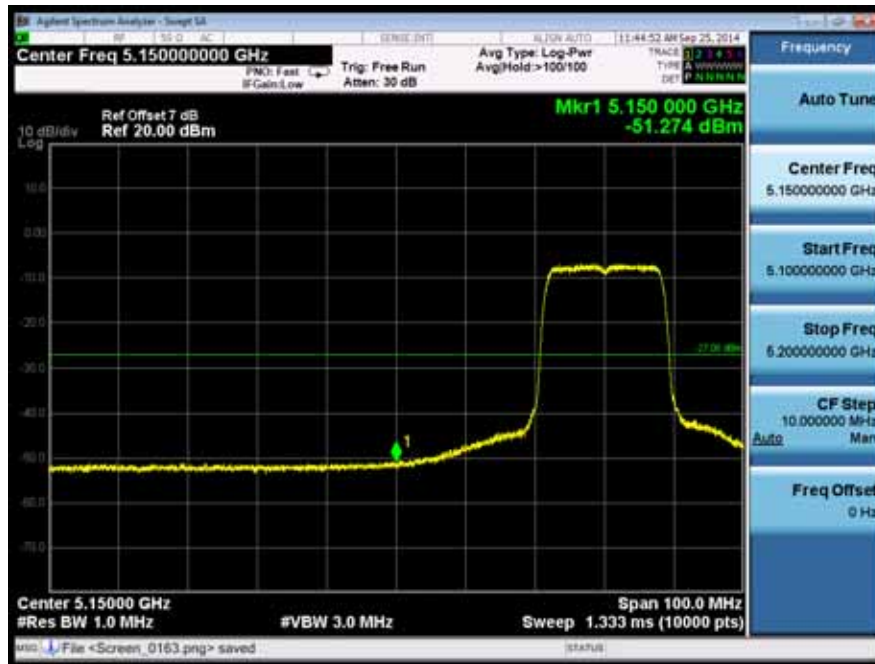



Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	KK	Temperature :	24
Test Result:	PASS	Humidity :	53 %
Operation Mode:	802.11n(HT20)	Antenna:	A

Band Edge Frequency (MHz)	continued Peak Level (dBm)	e.i.r.p Peak Level (dBm)	Limit(dBm)	Pass/Fail
5150	-51.473	-49.473	-27	PASS
5350	-51.566	-49.566	-27	PASS

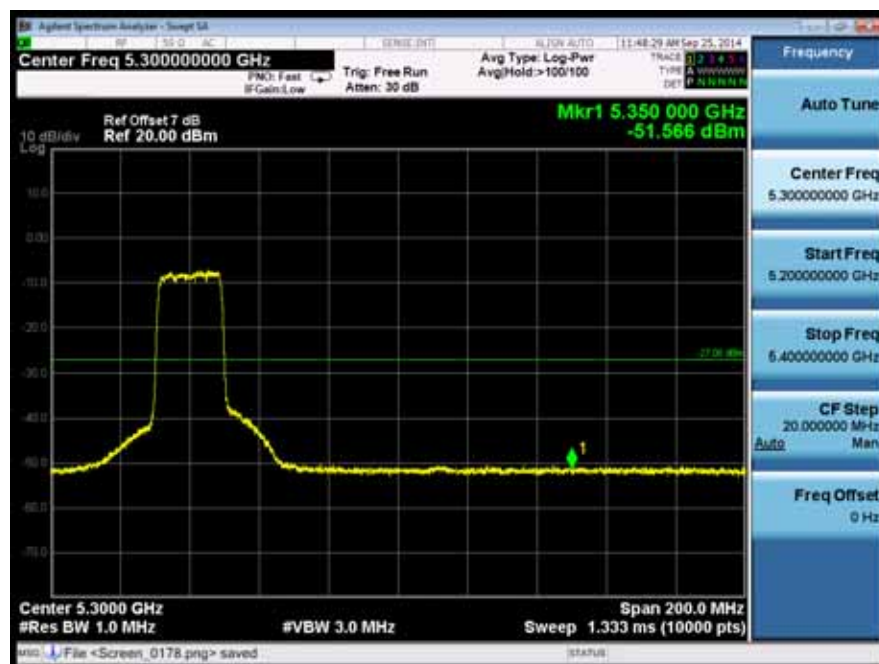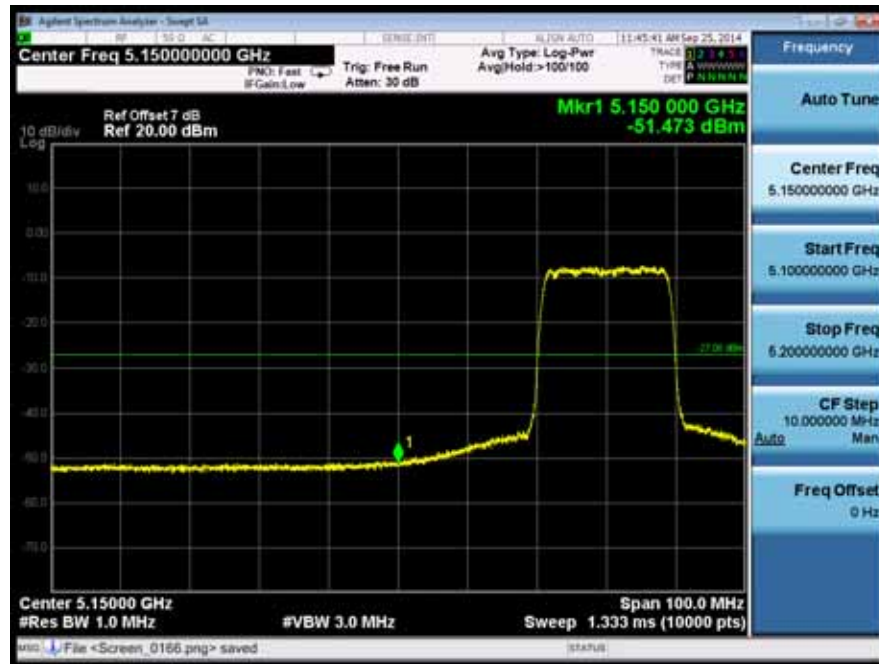


Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n(HT20) Antenna: B

Band Edge Frequency (MHz)	continued Peak Level (dBm)	e.i.r.p Peak Level (dBm)	Limit(dBm)	Pass/Fail
5150	-51.055	-49.055	-27	PASS
5350	-51.665	-49.665	-27	PASS

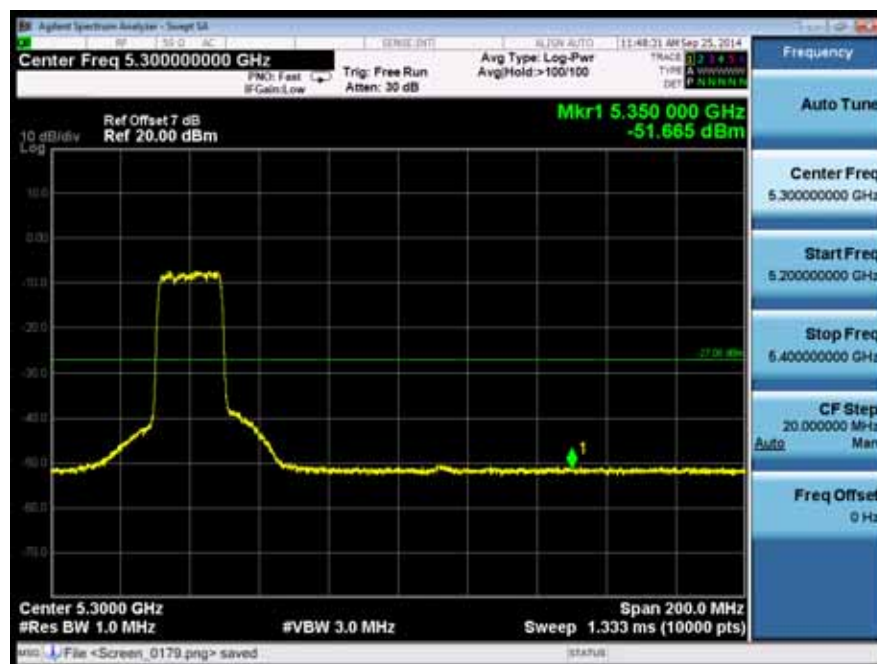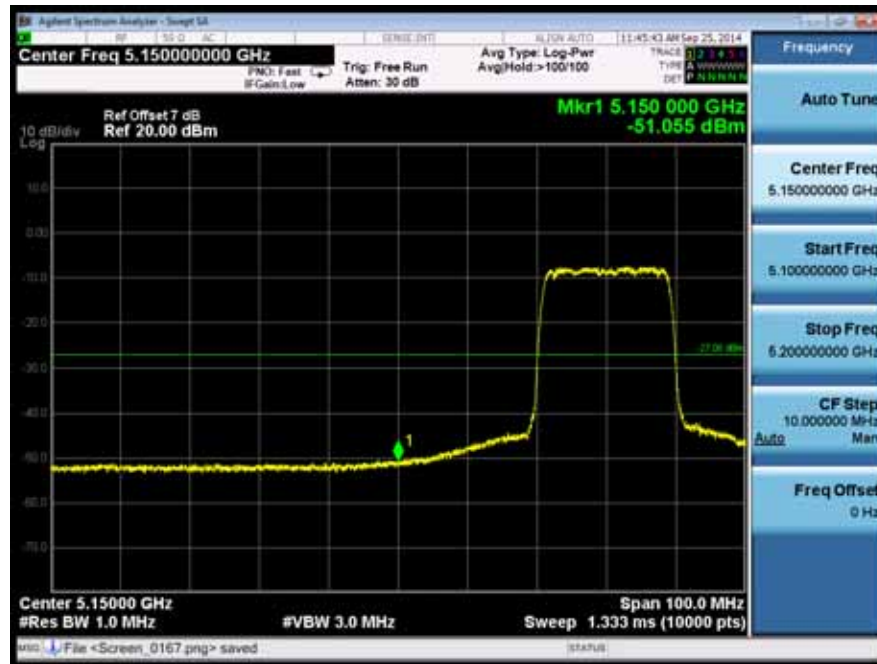


Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n(HT40) Antenna: A

Band Edge Frequency (MHz)	continued Peak Level (dBm)	e.i.r.p Peak Level (dBm)	Limit(dBm)	Pass/Fail
5150	-49.143	-47.143	-27	PASS
5350	-52.366	-50.366	-27	PASS

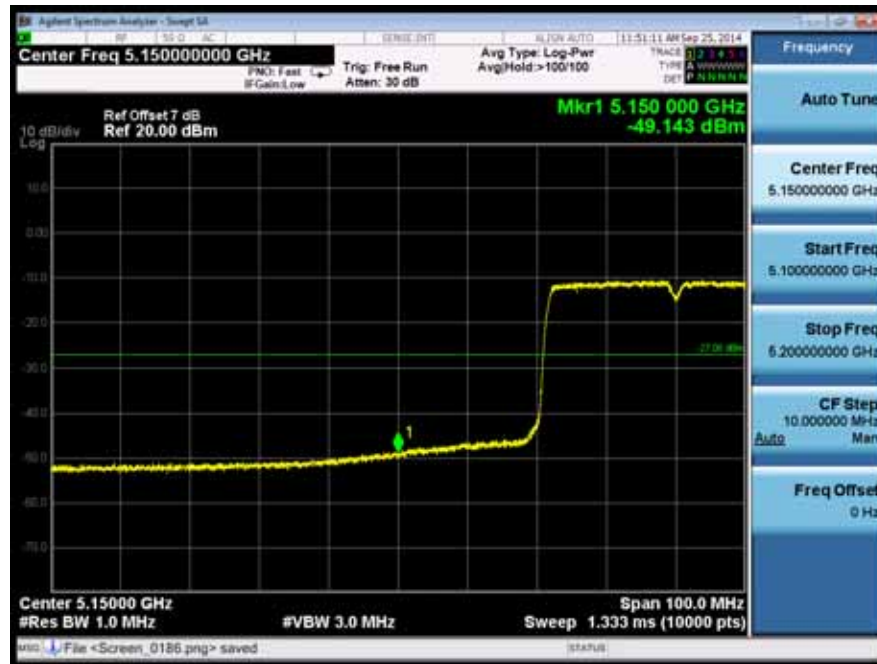

Spectrum Detector: PK Test Date : September 25, 2014
Test By: KK Temperature : 24
Test Result: PASS Humidity : 53 %
Operation Mode: 802.11n(HT40) Antenna: B

Band Edge Frequency (MHz)	continued Peak Level (dBm)	e.i.r.p Peak Level (dBm)	Limit(dBm)	Pass/Fail
5150	-49.251	-47.251	-27	PASS
5350	-52.009	-50.009	-27	PASS

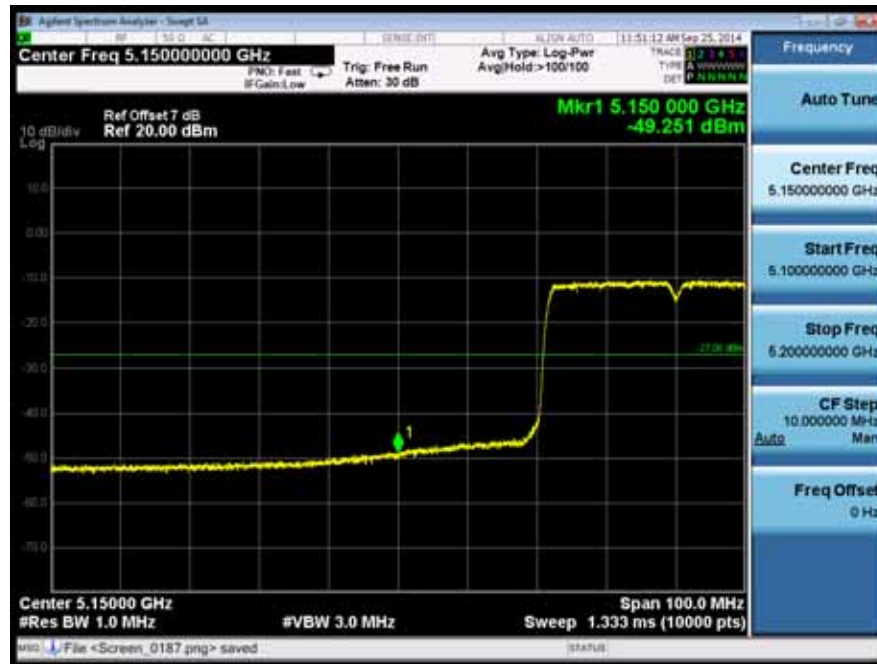

12. Antenna Application

12.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

The EUT has 2 antennas: a Metal antenna for 2.4G WIFI, the gain is 2 dBi;
 a Metal antenna for 5G WIFI, the gain is 2 dBi;

Note:Antenna use a permanently attached antenna which is not replaceable.
 which in accordance to section 15.203, please refer to the internal photos.

12.2 Result

PASS.

13. Uncertainty

Measurement Uncertainty for a level of Confidence of 95%

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Conducted Output Power Test	$\pm 1.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Peak Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	± 0.5
Humidity	$\pm 3\%$