FCC 47 CFR PART 15 SUBPART C

Product Type	:	Wi-Fi Network Speaker
Applicant	:	Polk Audio
Address	:	5601 Metro Drive, Baltimore , Maryland , United States, 21215
Trade Name	:	Polk Audio
Model Numbers	:	Omni S2, Omni S2 Rechargeable
Test Specification	:	FCC 47 CFR PART 15 SUBPART C: Oct., 2013 Canada RSS-210 ISSUE 8: Dec., 2010 Canada RSS-Gen ISSUE 3: Dec., 2010 ANSI C63.4:2009
Receive Date	:	Jun. 16, 2014
Test Period	:	Jun. 16 ~ Jul. 18, 2014
Issue Date	:	Jul. 29, 2014

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel：+886-3-2710188 / Fax：+886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

Note: *This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.*

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jul. 29, 2014	Initial Issue	

Verification of Compliance

Issued Date: 07/29/2014

Product Type	:	Wi-Fi Network Speaker
Applicant	:	Polk Audio
Address	:	5601 Metro Drive, Baltimore , Maryland , United States, 21215
Trade Name	:	Polk Audio
Model Numbers	:	Omni S2, Omni S2 Rechargeable
FCC ID	:	WLQOMNIS2
IC	:	7956A-OMNIS2
EUT Rated Voltage	:	Omni S2 : DC 24V, 1.0A Omni S2 Rechargeable : DC 24V, 1.25A
Test Voltage	:	120 Vac / 60 Hz
Applicable Standard	:	FCC 47 CFR PART 15 SUBPART C: Oct., 2013 Canada RSS-210 ISSUE 8: Dec., 2010 Canada RSS-Gen ISSUE 3: Dec., 2010 ANSI C63.4:2009
Test Result	:	Complied
Performing Lab.	:	A Test Lab Techno Corp. No. 140-1, Changan Street, Bade City, Taoyuan County 334, Taiwan R.O.C. Tel：+886-3-2710188 / Fax：+886-3-2710190 Taiwan Accreditation Foundation accreditation number: 1330 http://www.atl-lab.com.tw/e-index.htm

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By	: Fly Lu	Reviewed By	: Eric Ou Yang
(Manager)	(Fly Lu)	(Testing Engineer)	(Eric Ou Yang)

TABLE OF CONTENTS

1 General Information 6
2 EUT Description 7
3 Test Methodology 8
3.1. Mode of Operation 8
3.2. EUT Exercise Software 8
3.3. Configuration of Test System Details 9
3.4. Test Site Environment 10
4 Conducted Emission Measurement 11
4.1. Limit 11
4.2. Test Instruments 11
4.3. Test Setup 11
4.4. Test Procedure 12
4.5. Test Result 13
5 Radiated Emission Measurement 17
5.1. Limit 17
5.2. Test Instruments 17
5.3. Setup 18
5.4. Test Procedure 19
5.5. Test Result 21
6 Maximum Conducted Output Power Measurement 37
6.1. Limit 37
6.2. Test Setup 37
6.3. Test Instruments 37
6.4. Test Procedure 37
6.5. Test Result 38
7 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement 40
7.1. Limit 40
7.2. Test Setup 40
7.3. Test Instruments 40
7.4. Test Procedure 40
7.5. Test Result 41
7.6. Test Graphs 42
8 Maximum Power Density Measurement 50
8.1. Limit 50
8.2. Test Setup 50
8.3. Test Instruments 50
8.4. Test Procedure 50
8.5. Test Result 51
8.6. Test Graphs 52
9 Out of Band Conducted Emissions Measurement 56
9.1. Limit 56
9.2. Test Setup 56
9.3. Test Instruments 56
9.4. Test Procedure 56
9.5. Test Graphs 57

10 Band Edges Measurement 69
10.1. Limit 69
10.2. Test Setup 69
10.3. Test Instruments 69
10.4. Test Procedure 70
10.5. Test Result 71
11 Antenna Measurement 79
11.1. Limit 79
11.2. Antenna Connector Construction 79

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(d)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product Type	Wi-Fi Network Speaker			
Trade Name	Polk Audio			
Model No.	Omni S2, Omni S2 Rechargeable			
Different Description	Omni S2 : (1)This model has not battery and battery charge function. (2)This model use two TX/RX antenna both are METAL STAMPING ANTENNA. Omni S2 Rechargeable: (1)This model has battery and battery charge function. (2)This model use two TX/RX antenna, one is METAL STAMPING ANTENNA and another is External antenna.			
Applicant	Polk Audio 5601 Metro Drive, Baltimore , Maryland , United States, 21215			
Manufacturer	Zylux Acoustic Corporation 3F, 22, Lane 35, Jihu Road Taipei NeiHu Technology Park, Taipei 11492, Taiwan			
FCC ID	WLQOMNIS2			
IC	7956A-OMNIS2			
Frequency Range	IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz: 2412 ~ 2462 MHz IEEE 802.11n 2.4GHz 40MHz: 2422 ~ 2452 MHz			
Modulation Type	IEEE 802.11b:DSSS IEEE 802.11g:DSSS + OFDM IEEE 802.11n 2.4GHz 20MHz: OFDM IEEE 802.11n 2.4GHz 40MHz: OFDM			
Antenna Used	Trade Name	Model Number	Type	Max. Gain
	LinkTek	1029-000080	EXTERNAL ANTENNA	2.28 dBi
	MAG.LAYERS	MSA-3310-25GC4-A1	METAL STAMPING ANTENNA	2.45 dBi
RF Output Power	IEEE 802.11b: 0.050 W / 16.99 dBm IEEE 802.11g: 0.198 W / 22.97 dBm IEEE 802.11n 2.4GHz 20MHz: 0.140 W / 21.46 dBm IEEE 802.11n 2.4GHz 40MHz: 0.129 W / 21.10 dBm			
99 % Occupied Bandwidth	IEEE 802.11b: 12.67 MHz IEEE 802.11g: 16.62 MHz IEEE 802.11n 2.4GHz 20MHz: 17.70 MHz IEEE 802.11n 2.4GHz 40MHz: 36.21 MHz			
Emission Designator	IEEE 802.11b: 12M6GXW IEEE 802.11g: 16M6GXW IEEE 802.11n 2.4GHz 20MHz: 17M7GXW IEEE 802.11n 2.4GHz 40MHz: 36M2GXW			

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: IEEE 802.11b Link Mode
Mode 3: IEEE 802.11g Link Mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode
Mode 6: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:
Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:
Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n 2.4GHz 20MHz mode:
Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n 2.4GHz 40MHz mode:
Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

3.2. EUT Exercise Software

1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn on Wi-Fi function link to AP.
4. EUT run test program.

3.3. Configuration of Test System Details

Conducted Emission

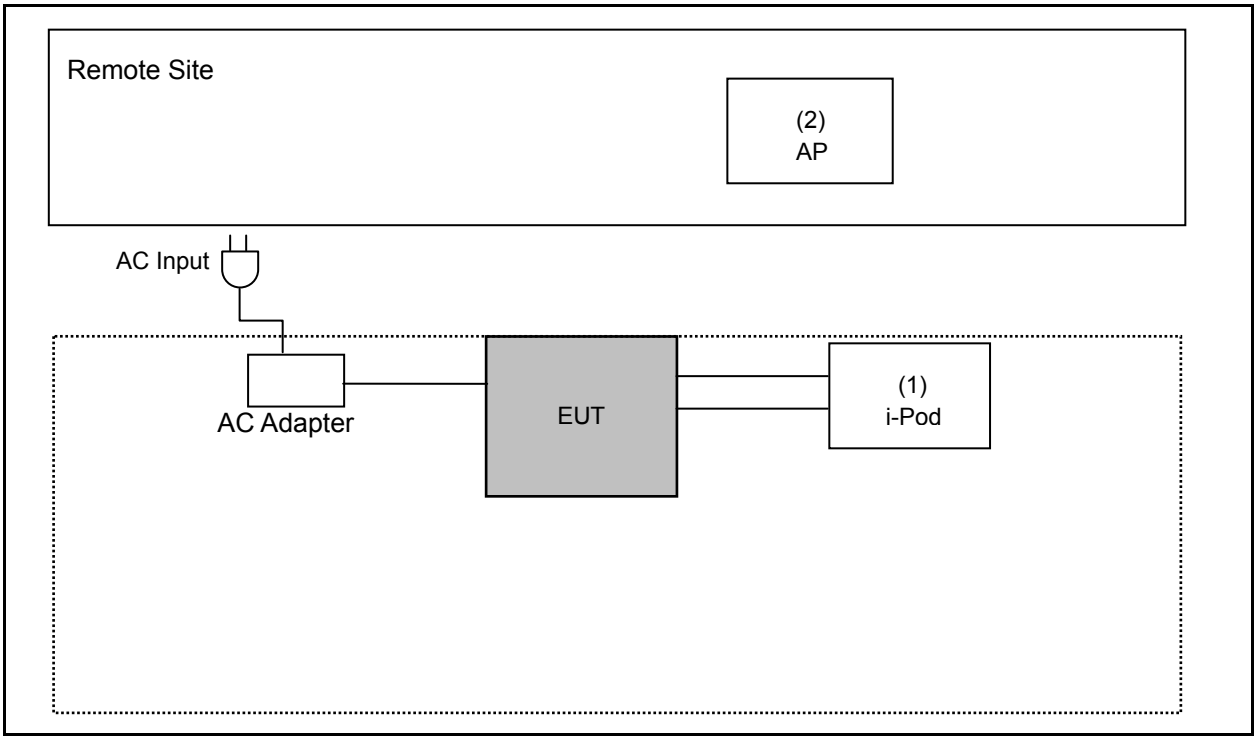

Devices Description					
Product		Manufacturer	Model Number	Serial Number	Power Cord
1.	i-Pod	Apple	A1199	YM734DKEVQ5	Shielded, 1.0m
2	AP	TP-Link	TL-WR1042ND	N/A	Non-Shielded, 1.8m

Radiated Emission

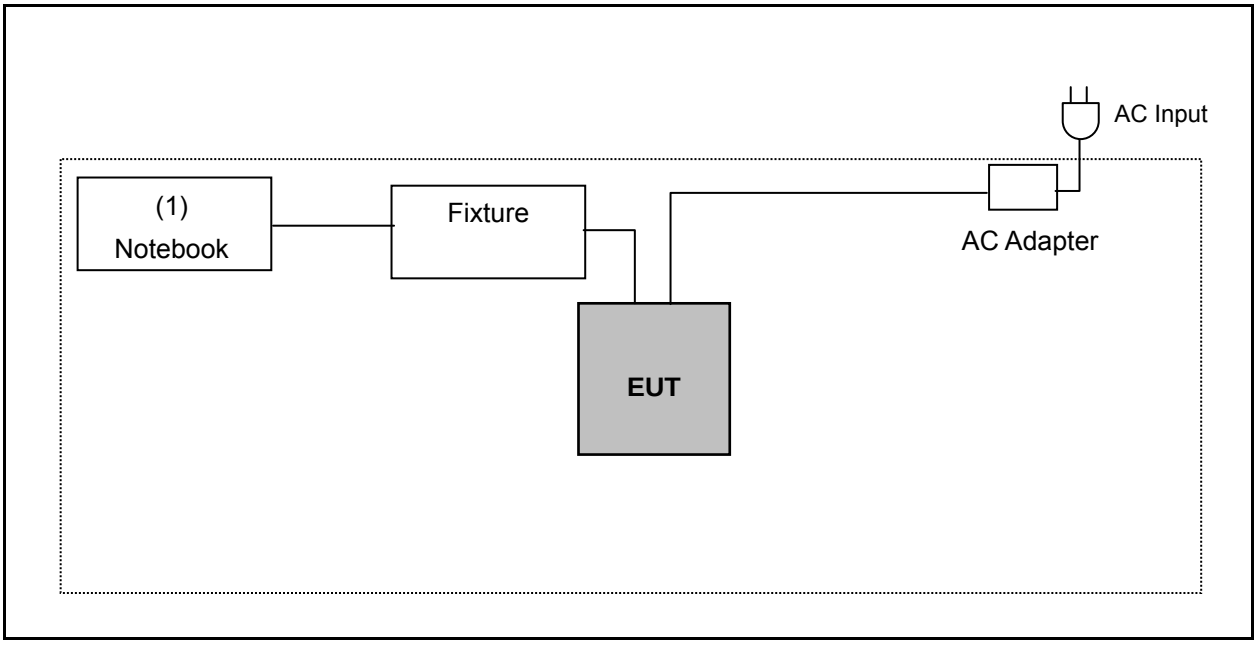

Devices Description					
Product		Manufacturer	Model Number	Serial Number	Power Cord
1.	Notebook	DELL	D531	CN-OXM006-48643-87A-3398	Shielded, 2.0m

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/12/2014	(1)
LISN	R&S	ENV216	101040	03/07/2014	(1)
LISN	R&S	ENV216	101041	03/07/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

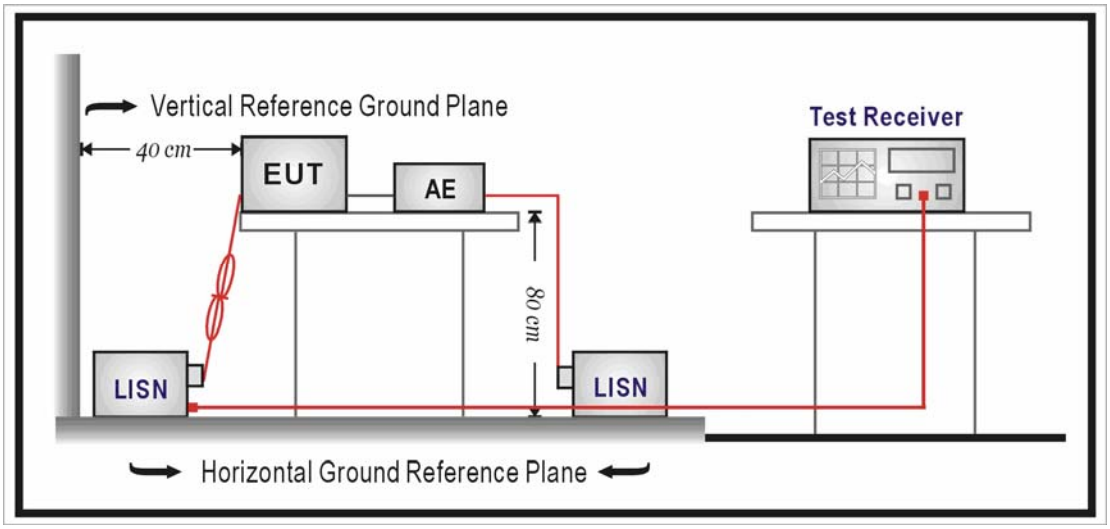

4.4. Test Procedure

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	06/17/2014
		Test By:	Eric Ou Yang
Description:			

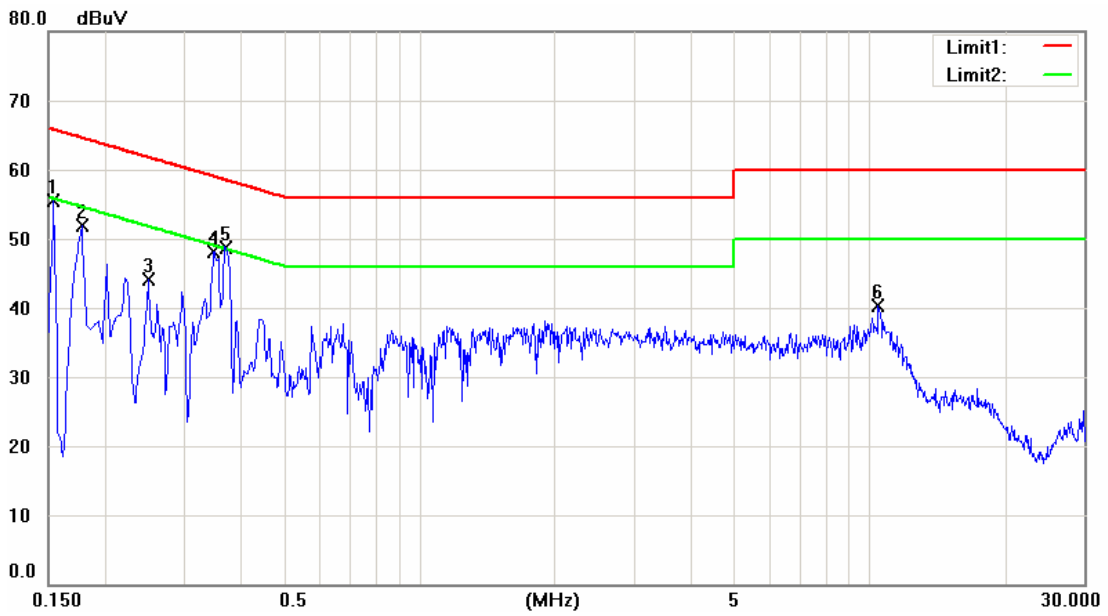

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	43.35	25.33	9.58	52.93	34.91	65.78	55.78	-12.85	-20.87	Pass
2	0.1780	41.16	26.88	9.58	50.74	36.46	64.58	54.58	-13.84	-18.12	Pass
3	0.2500	30.08	19.65	9.58	39.66	29.23	61.76	51.76	-22.10	-22.53	Pass
4	0.3500	37.12	22.94	9.58	46.70	32.52	58.96	48.96	-12.26	-16.44	Pass
5	0.3751	37.20	26.49	9.58	46.78	36.07	58.39	48.39	-11.61	-12.32	Pass
6	10.4660	21.27	16.04	10.01	31.28	26.05	60.00	50.00	-28.72	-23.95	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	06/17/2014
		Test By:	Eric Ou Yang
Description:			

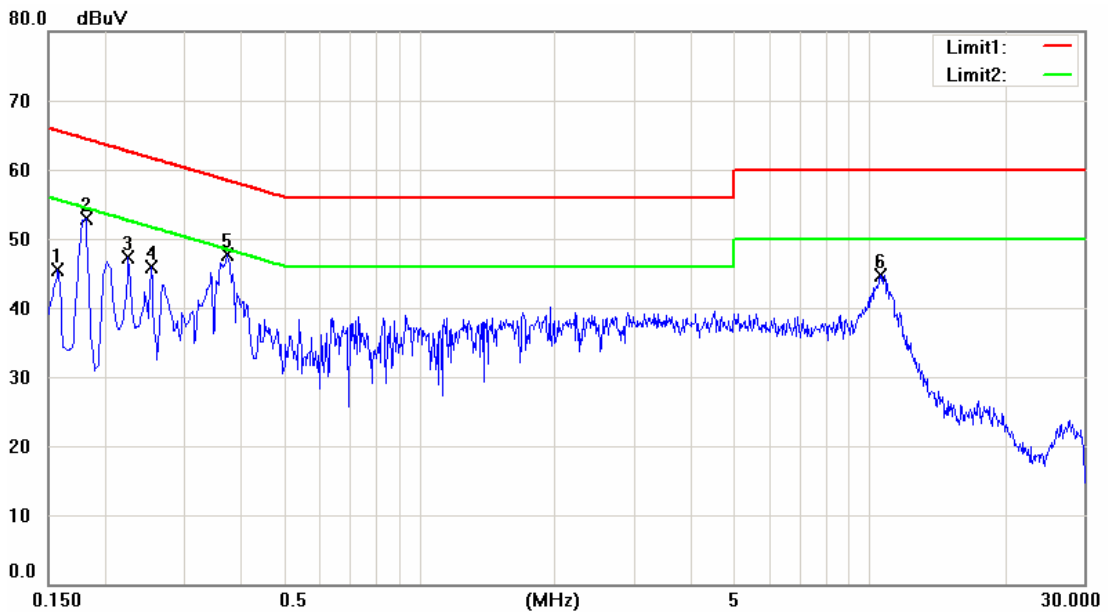

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	37.07	18.27	9.58	46.65	27.85	65.57	55.57	-18.92	-27.72	Pass
2	0.1820	31.15	10.58	9.58	40.73	20.16	64.39	54.39	-23.66	-34.23	Pass
3	0.2260	33.18	19.53	9.58	42.76	29.11	62.60	52.60	-19.84	-23.49	Pass
4	0.2540	25.83	10.87	9.58	35.41	20.45	61.63	51.63	-26.22	-31.18	Pass
5	0.3740	37.44	28.31	9.58	47.02	37.89	58.41	48.41	-11.39	-10.52	Pass
6	10.5820	28.94	22.06	10.02	38.96	32.08	60.00	50.00	-21.04	-17.92	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	06/23/2014
		Test By:	Eric Ou Yang
Description:			

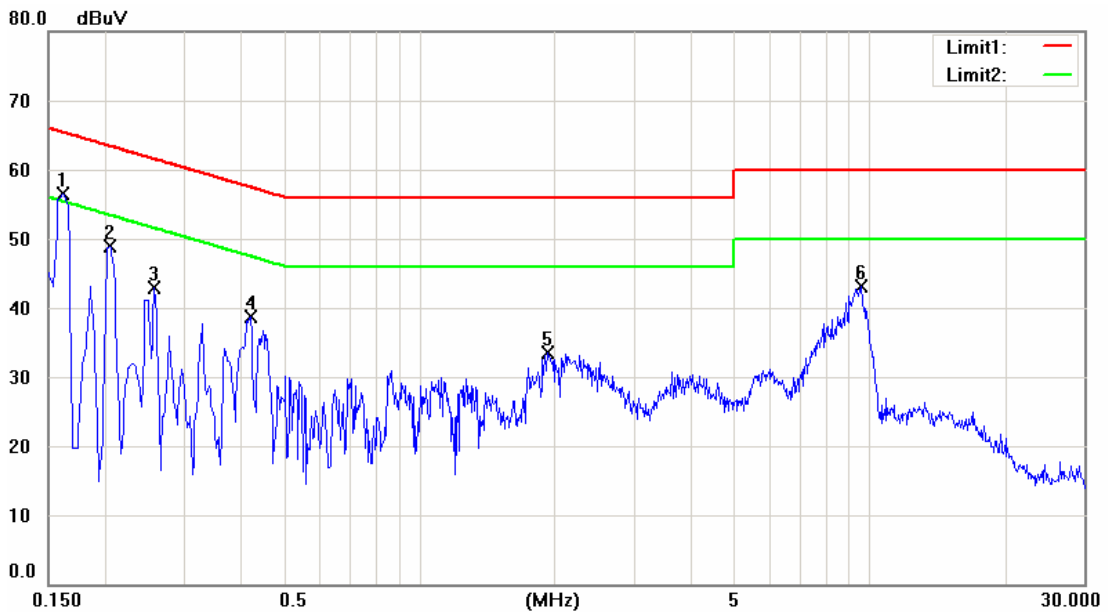

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	45.55	27.89	9.58	55.13	37.47	65.36	55.36	-10.23	-17.89	Pass
2	0.2060	37.51	21.30	9.58	47.09	30.88	63.37	53.37	-16.28	-22.49	Pass
3	0.2580	26.42	7.57	9.58	36.00	17.15	61.50	51.50	-25.50	-34.35	Pass
4	0.4220	24.48	12.81	9.58	34.06	22.39	57.41	47.41	-23.35	-25.02	Pass
5	1.9380	20.40	12.03	9.64	30.04	21.67	56.00	46.00	-25.96	-24.33	Pass
6	9.6420	26.73	19.98	10.05	36.78	30.03	60.00	50.00	-23.22	-19.97	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	06/23/2014
		Test By:	Eric Ou Yang
Description:			

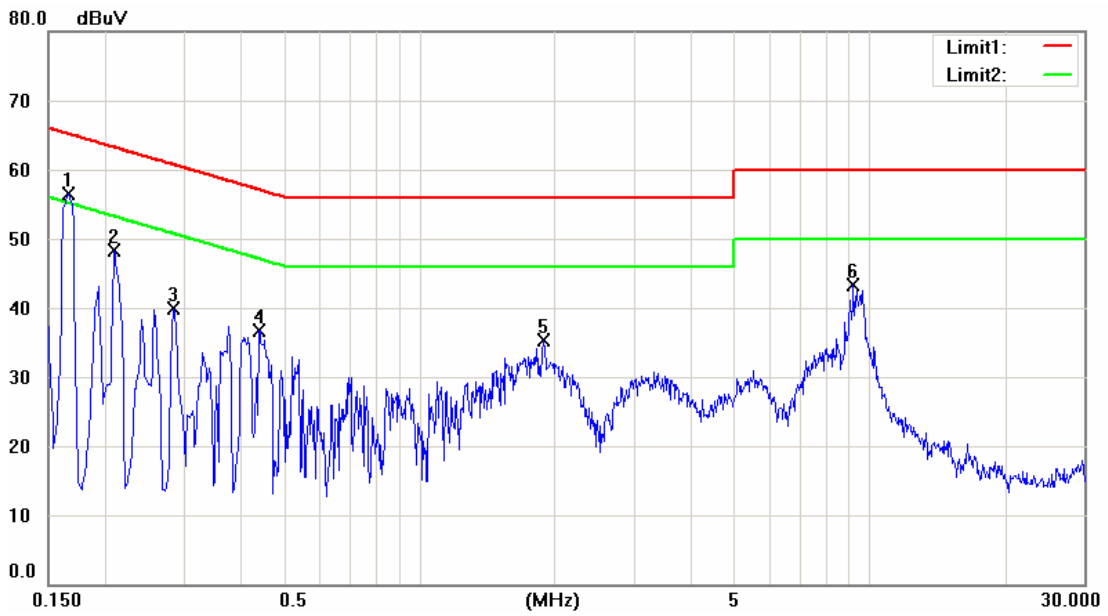

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1660	45.23	29.18	9.58	54.81	38.76	65.16	55.16	-10.35	-16.40	Pass
2	0.2100	36.52	20.70	9.58	46.10	30.28	63.21	53.21	-17.11	-22.93	Pass
3	0.2860	28.64	14.83	9.58	38.22	24.41	60.64	50.64	-22.42	-26.23	Pass
4	0.4420	26.18	15.97	9.58	35.76	25.55	57.02	47.02	-21.26	-21.47	Pass
5	1.8940	21.60	14.25	9.65	31.25	23.90	56.00	46.00	-24.75	-22.10	Pass
6	9.2500	25.00	16.49	10.08	35.08	26.57	60.00	50.00	-24.92	-23.43	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2014	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/18/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/13/2014	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

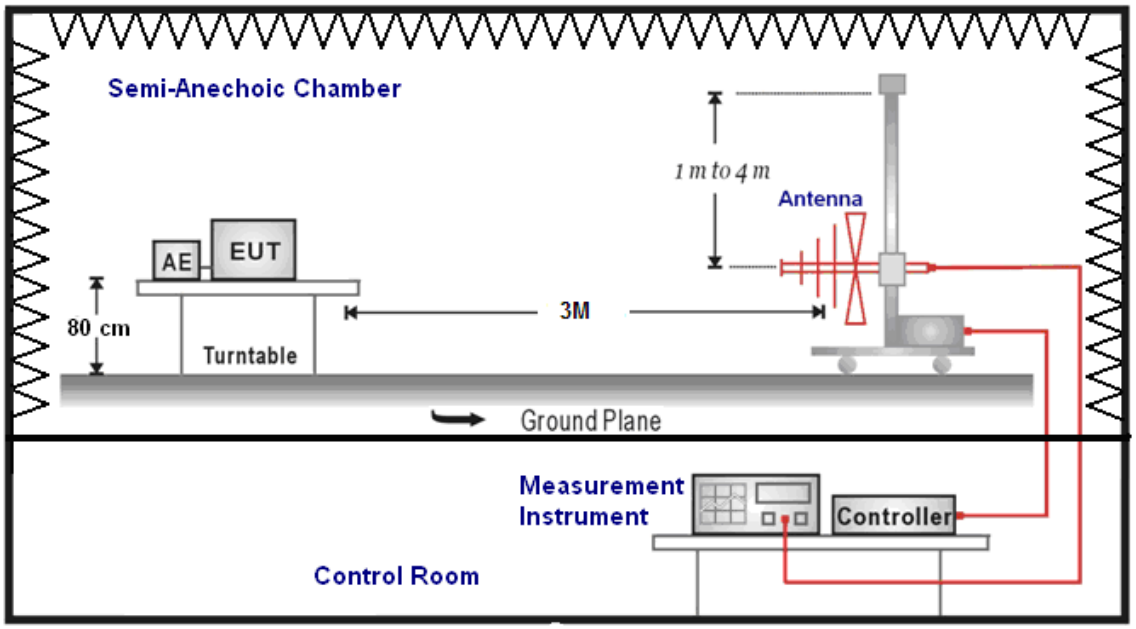

Above 1GHz

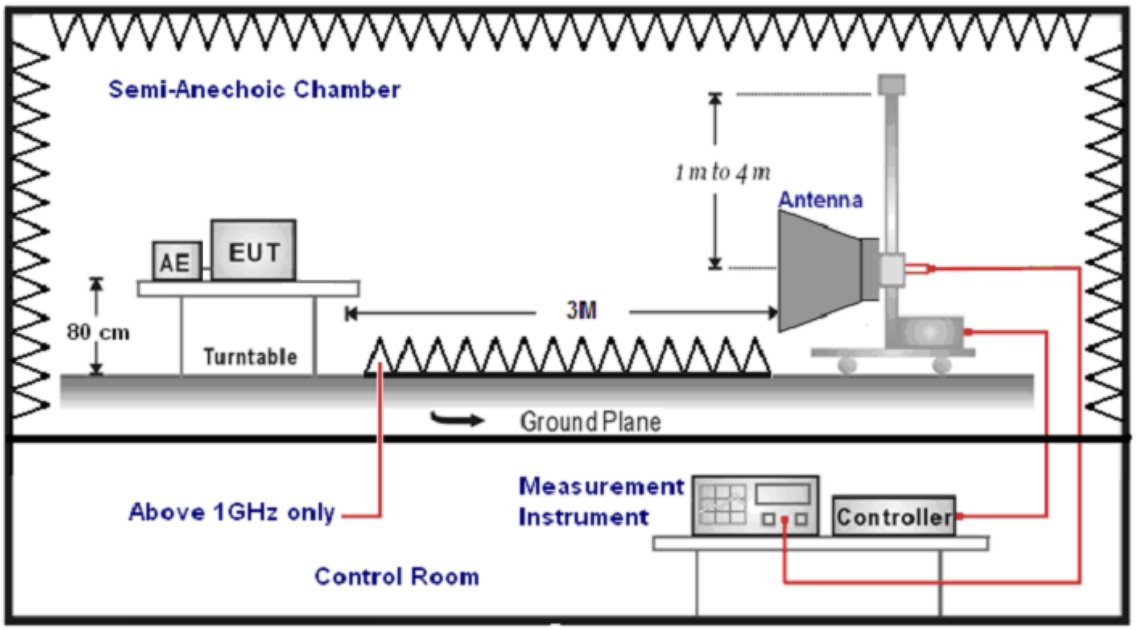

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)
FI= Reading of the field intensity.
AF= Antenna factor.
CL= Cable loss.
P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)
The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:
(a) For fundamental frequency : Transmitter Output < +30dBm
(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	07/17/2014
		Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
69.0000	43.20	-14.69	28.51	40.00	-11.49	QP	H
199.5000	42.31	-14.37	27.94	43.50	-15.56	QP	H
291.0000	42.08	-10.51	31.57	46.00	-14.43	QP	H
368.0000	39.52	-8.94	30.58	46.00	-15.42	QP	H
665.0000	37.07	-3.01	34.06	46.00	-11.94	QP	H
826.5000	27.67	0.21	27.88	46.00	-18.12	QP	H
68.5000	46.54	-14.59	31.95	40.00	-8.05	QP	V
306.0000	42.12	-10.13	31.99	46.00	-14.01	QP	V
362.0000	47.13	-9.08	38.05	46.00	-7.95	QP	V
423.0000	43.26	-7.70	35.56	46.00	-10.44	QP	V
518.0000	40.19	-5.99	34.20	46.00	-11.80	QP	V
664.0000	33.96	-3.03	30.93	46.00	-15.07	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/18/2014
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	36.96	-0.14	36.82	74.00	-37.18	peak	H
4824.000	42.35	5.03	47.38	74.00	-26.62	peak	H
6691.000	33.80	10.01	43.81	74.00	-30.19	peak	H
3030.000	35.30	-0.11	35.19	74.00	-38.81	peak	V
4824.000	44.49	5.03	49.52	74.00	-24.48	peak	V
6663.000	34.25	9.94	44.19	74.00	-29.81	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/18/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	37.53	-0.11	37.42	74.00	-36.58	peak	H
4874.000	39.42	5.18	44.60	74.00	-29.40	peak	H
6663.000	33.41	9.94	43.35	74.00	-30.65	peak	H
3009.000	36.05	-0.17	35.88	74.00	-38.12	peak	V
4874.000	42.08	5.19	47.27	74.00	-26.73	peak	V
6670.000	33.32	9.95	43.27	74.00	-30.73	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/18/2014
Frequency:	2462MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	37.31	-0.06	37.25	74.00	-36.75	peak	H
4924.000	39.70	5.32	45.02	74.00	-28.98	peak	H
6677.000	33.87	9.97	43.84	74.00	-30.16	peak	H
3002.000	36.96	-0.20	36.76	74.00	-37.24	peak	V
4924.000	42.55	5.32	47.87	74.00	-26.13	peak	V
6663.000	34.65	9.94	44.59	74.00	-29.41	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/18/2014
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	38.57	-0.14	38.43	74.00	-35.57	peak	H
4824.000	40.86	5.06	45.92	74.00	-28.08	peak	H
6663.000	34.84	9.94	44.78	74.00	-29.22	peak	H
3009.000	36.83	-0.17	36.66	74.00	-37.34	peak	V
4824.000	42.98	5.04	48.02	74.00	-25.98	peak	V
6726.000	33.52	10.10	43.62	74.00	-30.38	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/18/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2995.000	36.90	-0.22	36.68	74.00	-37.32	peak	H
4591.000	34.50	4.43	38.93	74.00	-35.07	peak	H
6726.000	34.07	10.10	44.17	74.00	-29.83	peak	H
3051.000	38.11	-0.06	38.05	74.00	-35.95	peak	V
4874.000	39.50	5.18	44.68	74.00	-29.32	peak	V
6705.000	33.65	10.05	43.70	74.00	-30.30	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/18/2014
Frequency:	2462MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	36.50	-0.11	36.39	74.00	-37.61	peak	H
4605.000	35.12	4.47	39.59	74.00	-34.41	peak	H
6698.000	33.45	10.03	43.48	74.00	-30.52	peak	H
3037.000	36.39	-0.10	36.29	74.00	-37.71	peak	V
4924.000	41.97	5.32	47.29	74.00	-26.71	peak	V
6705.000	33.15	10.05	43.20	74.00	-30.80	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/18/2014
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	37.38	-0.11	37.27	74.00	-36.73	peak	H
4591.000	34.82	4.43	39.25	74.00	-34.75	peak	H
6761.000	33.19	10.21	43.40	74.00	-30.60	peak	H
3037.000	37.04	-0.10	36.94	74.00	-37.06	peak	V
4824.000	42.47	5.05	47.52	74.00	-26.48	peak	V
6705.000	34.30	10.05	44.35	74.00	-29.65	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/18/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	36.78	-0.11	36.67	74.00	-37.33	peak	H
4591.000	34.21	4.43	38.64	74.00	-35.36	peak	H
6691.000	33.81	10.01	43.82	74.00	-30.18	peak	H
3079.000	37.76	0.02	37.78	74.00	-36.22	peak	V
4542.000	34.80	4.31	39.11	74.00	-34.89	peak	V
6705.000	33.66	10.05	43.71	74.00	-30.29	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/18/2014
Frequency:	2462MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	37.02	-0.10	36.92	74.00	-37.08	peak	H
4598.000	33.58	4.45	38.03	74.00	-35.97	peak	H
6698.000	34.41	10.03	44.44	74.00	-29.56	peak	H
3030.000	36.60	-0.11	36.49	74.00	-37.51	peak	V
4598.000	35.83	4.45	40.28	74.00	-33.72	peak	V
6677.000	33.64	9.97	43.61	74.00	-30.39	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/18/2014
Frequency:	2422MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	36.41	-0.11	36.30	74.00	-37.70	peak	H
4591.000	34.35	4.43	38.78	74.00	-35.22	peak	H
6726.000	33.31	10.10	43.41	74.00	-30.59	peak	H
3023.000	37.33	-0.14	37.19	74.00	-36.81	peak	V
4577.000	34.06	4.39	38.45	74.00	-35.55	peak	V
6670.000	33.42	9.95	43.37	74.00	-30.63	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/18/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	37.88	-0.20	37.68	74.00	-36.32	peak	H
4598.000	34.37	4.45	38.82	74.00	-35.18	peak	H
6677.000	32.94	9.97	42.91	74.00	-31.09	peak	H
3037.000	36.33	-0.10	36.23	74.00	-37.77	peak	V
4577.000	34.09	4.39	38.48	74.00	-35.52	peak	V
6698.000	33.65	10.03	43.68	74.00	-30.32	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/18/2014
Frequency:	2452MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	38.32	-0.06	38.26	74.00	-35.74	peak	H
4619.000	33.79	4.51	38.30	74.00	-35.70	peak	H
6698.000	32.77	10.03	42.80	74.00	-31.20	peak	H
3037.000	37.68	-0.10	37.58	74.00	-36.42	peak	V
4577.000	34.30	4.39	38.69	74.00	-35.31	peak	V
6719.000	33.51	10.09	43.60	74.00	-30.40	peak	V

Standard:	RSS-Gen	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	6	Date:	07/18/2014
Modulation:	IEEE 802.11b	Test By:	Eric Ou Yang
Frequency:	2437MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/	Peak (dBuV/m)	AVG. (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	37.14	-0.14	37.00	74.00	54.00	-37.00	peak	H
4619.000	33.82	4.51	38.33	74.00	54.00	-35.67	peak	H
6705.000	34.01	10.05	44.06	74.00	54.00	-29.94	peak	H
3065.000	36.45	-0.01	36.44	74.00	54.00	-37.56	peak	V
4591.000	34.42	4.43	38.85	74.00	54.00	-35.15	peak	V
6649.000	33.73	9.90	43.63	74.00	54.00	-30.37	peak	V

Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	1	Date:	07/15/2014
		Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
48.0000	47.43	-12.22	35.21	40.00	-4.79	QP	H
240.0000	52.38	-12.35	40.03	46.00	-5.97	QP	H
384.0000	46.89	-8.56	38.33	46.00	-7.67	QP	H
480.0000	45.91	-6.62	39.29	46.00	-6.71	QP	H
576.0000	44.12	-4.73	39.39	46.00	-6.61	QP	H
860.0000	39.54	0.78	40.32	46.00	-5.68	QP	H
144.0000	49.36	-12.01	37.35	43.50	-6.15	QP	V
288.0000	50.98	-10.59	40.39	46.00	-5.61	QP	V
336.0000	49.01	-9.63	39.38	46.00	-6.62	QP	V
480.0000	45.28	-6.62	38.66	46.00	-7.34	QP	V
576.0000	43.88	-4.73	39.15	46.00	-6.85	QP	V
864.0000	39.49	0.85	40.34	46.00	-5.66	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/16/2014
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2974.000	37.31	-0.27	37.04	74.00	-36.96	peak	H
4824.000	40.73	5.03	45.76	74.00	-28.24	peak	H
6670.000	33.87	9.95	43.82	74.00	-30.18	peak	H
3030.000	38.35	-0.11	38.24	74.00	-35.76	peak	V
4824.000	50.41	5.03	55.44	74.00	-18.56	peak	V
4824.000	41.86	5.03	46.89	54.00	-7.11	AVG	V
6691.000	34.36	10.01	44.37	74.00	-29.63	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/16/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	36.78	-0.20	36.58	74.00	-37.42	peak	H
4577.000	34.70	4.39	39.09	74.00	-34.91	peak	H
6705.000	33.42	10.05	43.47	74.00	-30.53	peak	H
3030.000	37.20	-0.11	37.09	74.00	-36.91	peak	V
4874.000	45.42	5.16	50.58	74.00	-23.42	peak	V
6663.000	34.78	9.94	44.72	74.00	-29.28	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/16/2014
Frequency:	2462MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3065.000	37.07	-0.01	37.06	74.00	-36.94	peak	H
4924.000	38.12	5.29	43.41	74.00	-30.59	peak	H
6670.000	33.67	9.95	43.62	74.00	-30.38	peak	H
3030.000	37.52	-0.11	37.41	74.00	-36.59	peak	V
4924.000	48.67	5.29	53.96	74.00	-20.04	peak	V
4924.000	47.29	5.29	52.58	54.00	-1.42	AVG	V
6691.000	33.79	10.01	43.80	74.00	-30.20	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/16/2014
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	37.42	-0.17	37.25	74.00	-36.75	peak	H
4591.000	34.70	4.43	39.13	74.00	-34.87	peak	H
6670.000	33.92	9.95	43.87	74.00	-30.13	peak	H
3051.000	37.91	-0.06	37.85	74.00	-36.15	peak	V
4824.000	43.41	5.03	48.44	74.00	-25.56	peak	V
5991.000	33.43	7.29	40.72	74.00	-33.28	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/16/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	36.63	-0.17	36.46	74.00	-37.54	peak	H
4605.000	35.09	4.47	39.56	74.00	-34.44	peak	H
6705.000	33.71	10.05	43.76	74.00	-30.24	peak	H
3023.000	36.92	-0.14	36.78	74.00	-37.22	peak	V
4874.000	42.12	5.16	47.28	74.00	-26.72	peak	V
6698.000	33.94	10.03	43.97	74.00	-30.03	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/16/2014
Frequency:	2462MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	37.02	-0.17	36.85	74.00	-37.15	peak	H
4598.000	34.39	4.45	38.84	74.00	-35.16	peak	H
6691.000	33.88	10.01	43.89	74.00	-30.11	peak	H
3023.000	37.39	-0.14	37.25	74.00	-36.75	peak	V
4924.000	42.70	5.29	47.99	74.00	-26.01	peak	V
6677.000	35.00	9.97	44.97	74.00	-29.03	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/16/2014
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	36.62	-0.10	36.52	74.00	-37.48	peak	H
4619.000	34.33	4.51	38.84	74.00	-35.16	peak	H
6719.000	33.30	10.09	43.39	74.00	-30.61	peak	H
3009.000	37.29	-0.17	37.12	74.00	-36.88	peak	V
4824.000	45.94	5.03	50.97	74.00	-23.03	peak	V
6663.000	33.64	9.94	43.58	74.00	-30.42	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/16/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	37.85	-0.14	37.71	74.00	-36.29	peak	H
4619.000	35.52	4.51	40.03	74.00	-33.97	peak	H
6698.000	35.03	10.03	45.06	74.00	-28.94	peak	H
2995.000	37.27	-0.22	37.05	74.00	-36.95	peak	V
4874.000	43.07	5.16	48.23	74.00	-25.77	peak	V
6705.000	33.87	10.05	43.92	74.00	-30.08	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/16/2014
Frequency:	2462MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	36.51	-0.17	36.34	74.00	-37.66	peak	H
4598.000	34.39	4.45	38.84	74.00	-35.16	peak	H
6642.000	33.39	9.87	43.26	74.00	-30.74	peak	H
3037.000	36.97	-0.10	36.87	74.00	-37.13	peak	V
4924.000	44.77	5.29	50.06	74.00	-23.94	peak	V
6677.000	33.37	9.97	43.34	74.00	-30.66	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/16/2014
Frequency:	2422MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	36.23	-0.11	36.12	74.00	-37.88	peak	H
4633.000	34.46	4.54	39.00	74.00	-35.00	peak	H
6698.000	34.34	10.03	44.37	74.00	-29.63	peak	H
3030.000	37.85	-0.11	37.74	74.00	-36.26	peak	V
4844.000	42.68	5.08	47.76	74.00	-26.24	peak	V
6698.000	34.43	10.03	44.46	74.00	-29.54	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/16/2014
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	37.17	-0.20	36.97	74.00	-37.03	peak	H
4633.000	34.09	4.54	38.63	74.00	-35.37	peak	H
6719.000	34.50	10.09	44.59	74.00	-29.41	peak	H
3023.000	37.67	-0.14	37.53	74.00	-36.47	peak	V
4542.000	33.49	4.31	37.80	74.00	-36.20	peak	V
6649.000	33.88	9.90	43.78	74.00	-30.22	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/16/2014
Frequency:	2452MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	36.80	-0.14	36.66	74.00	-37.34	peak	H
4626.000	33.18	4.52	37.70	74.00	-36.30	peak	H
6698.000	33.49	10.03	43.52	74.00	-30.48	peak	H
3030.000	36.95	-0.11	36.84	74.00	-37.16	peak	V
4591.000	33.78	4.43	38.21	74.00	-35.79	peak	V
6698.000	33.75	10.03	43.78	74.00	-30.22	peak	V

Standard:	RSS-Gen	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	6	Date:	07/16/2014
Modulation:	IEEE 802.11b	Test By:	Eric Ou Yang
Frequency:	2437MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/	Peak (dBuV/m)	AVG. (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	36.59	-0.11	36.48	74.00	54.00	-37.52	peak	H
4591.000	34.00	4.43	38.43	74.00	54.00	-35.57	peak	H
6705.000	34.17	10.05	44.22	74.00	54.00	-29.78	peak	H
3030.000	38.98	-0.11	38.87	74.00	54.00	-35.13	peak	V
4591.000	35.34	4.43	39.77	74.00	54.00	-34.23	peak	V
6705.000	34.25	10.05	44.30	74.00	54.00	-29.70	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

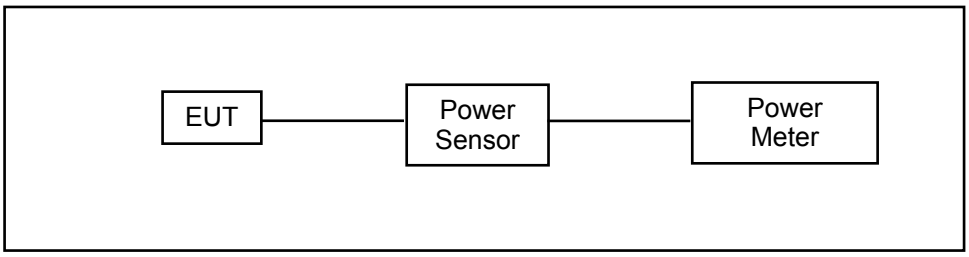

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/21/2013	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/21/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	Omni S2									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 2: IEEE 802.11b Link Mode									
Date of Test	06/17/2014					Test Site		TE05		
Frequency (MHz)	Data Rate	Antenna 0				Antenna 1				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	1M	14.40	0.028	**16.99**	**0.050**	14.30	0.027	16.86	0.049	< 30
2437		13.71	0.023	16.38	0.043	13.61	0.023	16.25	0.042	< 30
2462		13.75	0.024	16.45	0.044	13.65	0.023	16.32	0.043	< 30
2437	2M	13.66	0.023	16.31	0.043	13.57	0.023	16.18	0.041	< 30
2437	5.5M	13.62	0.023	16.27	0.042	13.55	0.023	16.14	0.041	< 30
2437	11M	13.59	0.023	16.22	0.042	13.53	0.023	16.09	0.041	< 30

Model Number	Omni S2									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 3: IEEE 802.11g Link Mode									
Date of Test	06/17/2014					Test Site		TE05		
Frequency (MHz)	Data Rate	Antenna 0				Antenna 1				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	6M	13.06	0.020	22.73	0.187	12.93	0.020	22.59	0.182	< 30
2437		13.73	0.024	**22.97**	**0.198**	13.60	0.023	22.83	0.192	< 30
2462		13.37	0.022	22.81	0.191	13.24	0.021	22.67	0.185	< 30
2437	9M	13.69	0.023	22.87	0.194	13.56	0.023	22.73	0.187	< 30
2437	12M	13.63	0.023	22.72	0.187	13.50	0.022	22.58	0.181	< 30
2437	18M	13.57	0.023	22.57	0.181	13.44	0.022	22.43	0.175	< 30
2437	24M	13.51	0.022	22.42	0.175	13.38	0.022	22.28	0.169	< 30
2437	36M	13.43	0.022	22.22	0.167	13.30	0.021	22.08	0.161	< 30
2437	48M	13.35	0.022	22.02	0.159	13.22	0.021	21.88	0.154	< 30
2437	54M	13.31	0.021	21.92	0.156	13.18	0.021	21.78	0.151	< 30

Model Number	Omni S2									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode									
Date of Test	06/17/2014					Test Site		TE05		
Frequency (MHz)	Data Rate	Antenna 0				Antenna 1				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	MCS0	12.47	0.018	**21.46**	**0.140**	12.33	0.017	21.33	0.136	< 30
2437		12.19	0.017	21.14	0.130	12.05	0.016	21.01	0.126	< 30
2462		12.42	0.017	21.29	0.135	12.28	0.017	21.16	0.131	< 30
2437	13M	12.15	0.016	21.10	0.129	12.01	0.016	20.97	0.125	< 30
2437	19.5M	12.07	0.016	21.02	0.126	11.93	0.016	20.89	0.123	< 30
2437	26M	11.99	0.016	20.94	0.124	11.85	0.015	20.81	0.121	< 30
2437	39M	11.93	0.016	20.88	0.122	11.79	0.015	20.75	0.119	< 30
2437	52M	11.87	0.015	20.82	0.121	11.73	0.015	20.69	0.117	< 30
2437	58.5M	11.81	0.015	20.76	0.119	11.67	0.015	20.63	0.116	< 30
2437	65M	11.77	0.015	20.72	0.118	11.63	0.015	20.59	0.115	< 30

Model Number	Omni S2									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode									
Date of Test	06/17/2014					Test Site		TE05		
Frequency (MHz)	Data Rate	Antenna 0				Antenna 1				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2422	13.5M	11.88	0.015	**21.10**	**0.129**	11.72	0.015	20.92	0.124	< 30
2437		11.68	0.015	20.93	0.124	11.52	0.014	20.75	0.119	< 30
2452		11.20	0.013	20.52	0.113	11.04	0.013	20.34	0.108	< 30
2437	27M	11.64	0.015	20.91	0.123	11.48	0.014	20.73	0.118	< 30
2437	40.5M	11.56	0.014	20.87	0.122	11.40	0.014	20.69	0.117	< 30
2437	54M	11.50	0.014	20.84	0.121	11.34	0.014	20.66	0.116	< 30
2437	81M	11.42	0.014	20.80	0.120	11.26	0.013	20.62	0.115	< 30
2437	108M	11.34	0.014	20.76	0.119	11.18	0.013	20.58	0.114	< 30
2437	121.5M	11.28	0.013	20.73	0.118	11.12	0.013	20.55	0.114	< 30
2437	135M	11.24	0.013	20.71	0.118	11.08	0.013	20.53	0.113	< 30

7 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.
99 % Occupied Bandwidth: N/A

7.2. Test Setup

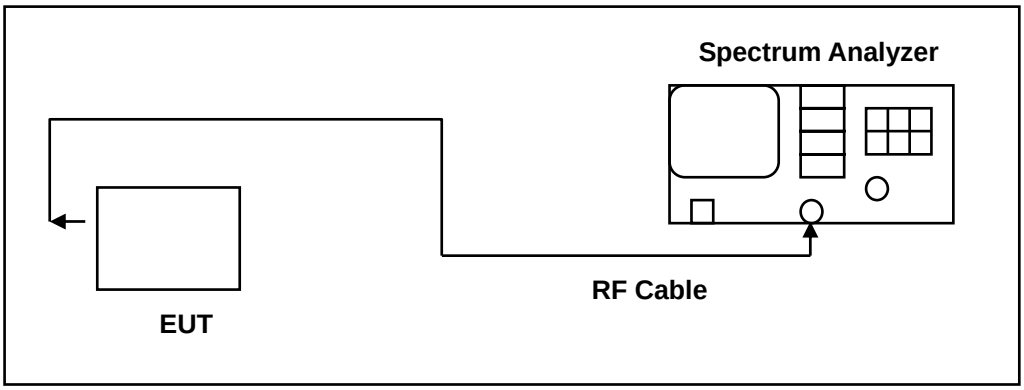

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.
6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.
The test was performed at 3 channels (Channel low, middle, high)
99 % Occupied Bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.
The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.5. Test Result

Model Number	Omni S2			
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth			
Test Mode	Mode 2: IEEE 802.11b Link Mode			
Date of Test	06/16/2014		Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)	
2412	10.051	12.4266	> 0.500	
2437	10.041	12.5084	> 0.500	
2462	10.036	12.6688	> 0.500	

Model Number	Omni S2			
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth			
Test Mode	Mode 3: IEEE 802.11g Link Mode			
Date of Test	06/16/2014		Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)	
2412	16.603	16.5849	> 0.500	
2437	16.448	16.6174	> 0.500	
2462	16.603	16.5830	> 0.500	

Model Number	Omni S2			
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth			
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode			
Date of Test	06/16/2014		Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)	
2412	17.837	17.6898	> 0.500	
2437	17.839	17.7037	> 0.500	
2462	17.858	17.6789	> 0.500	

Model Number	Omni S2			
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth			
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode			
Date of Test	06/16/2014		Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)	
2422	36.660	36.1810	> 0.500	
2437	36.652	36.2086	> 0.500	
2452	36.650	36.2019	> 0.500	

7.6. Test Graphs

6dB RF Bandwidth

Mode 2: IEEE 802.11b Link Mode	
2412	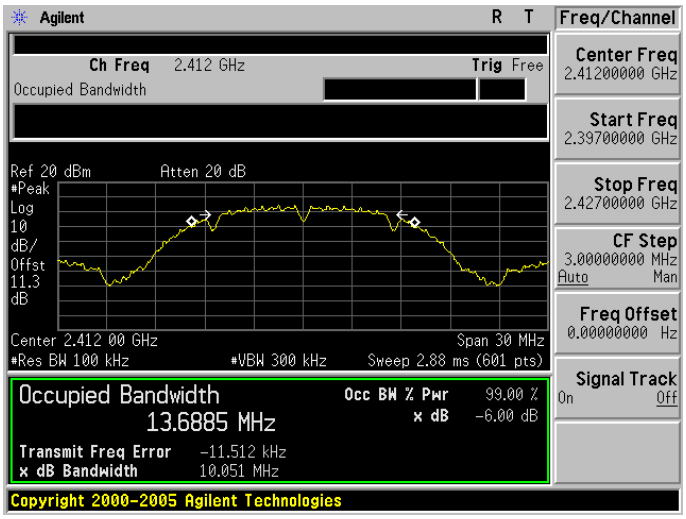
2437	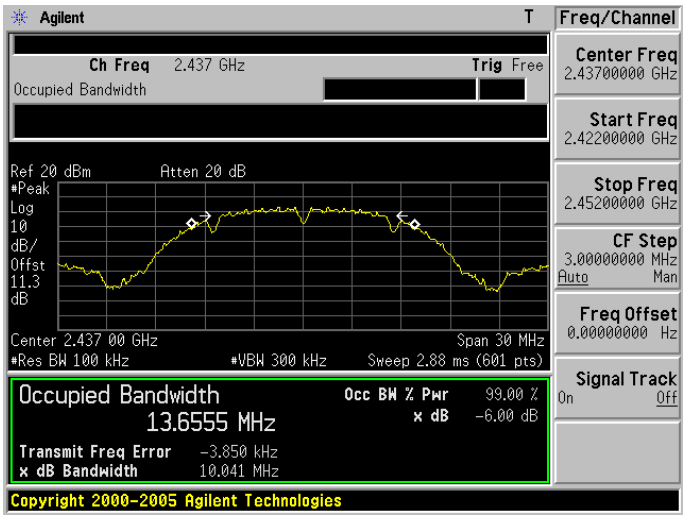
2462	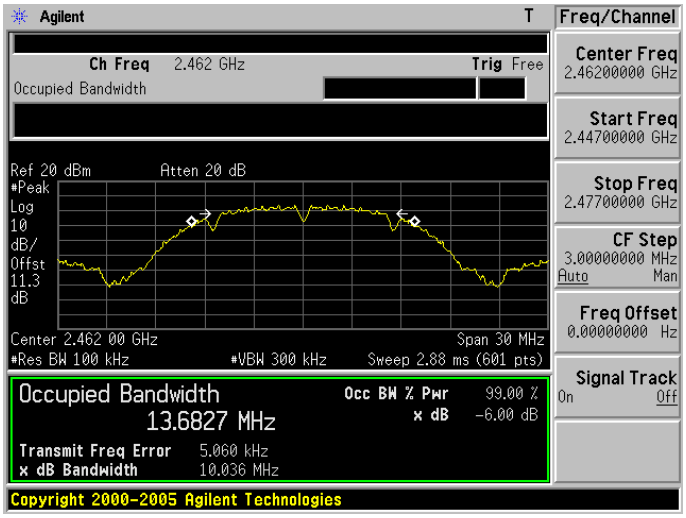

Mode 3: IEEE 802.11g Link Mode	
2412	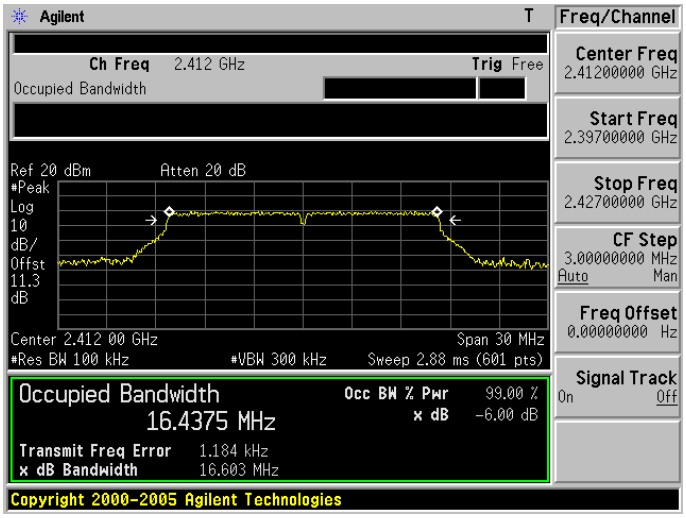
2437	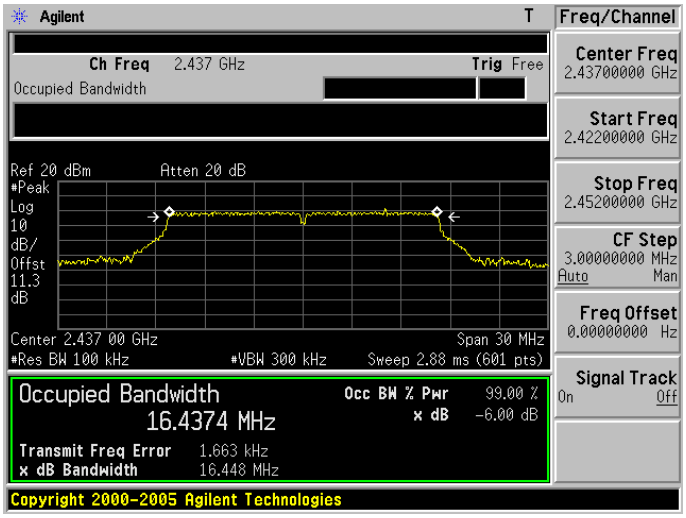
2462	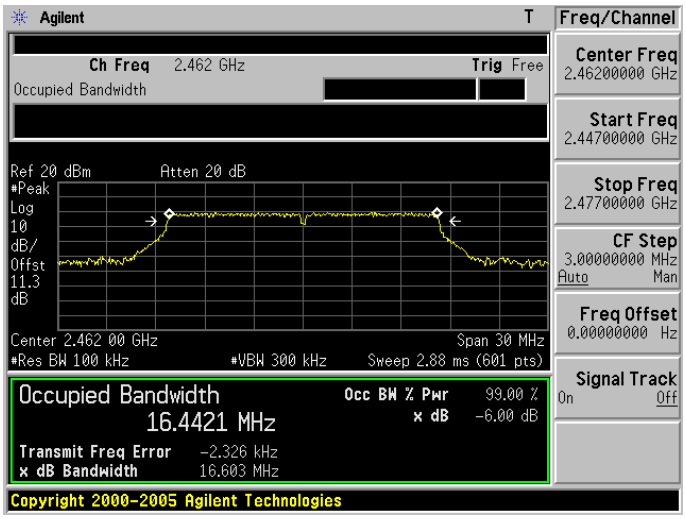

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode	
2412	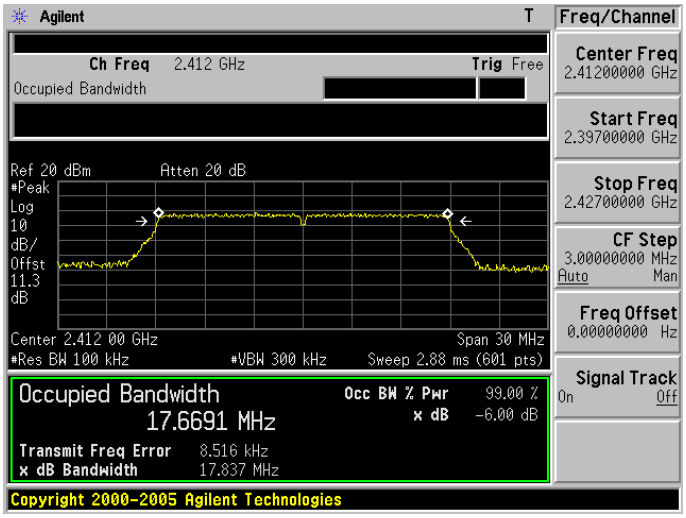
2437	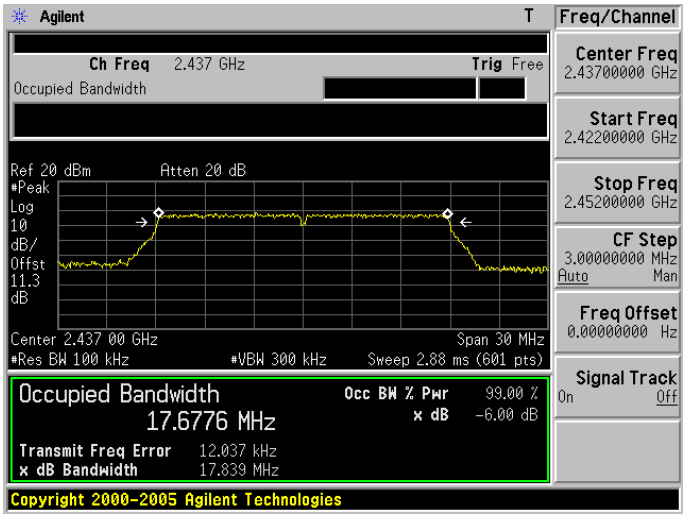
2462	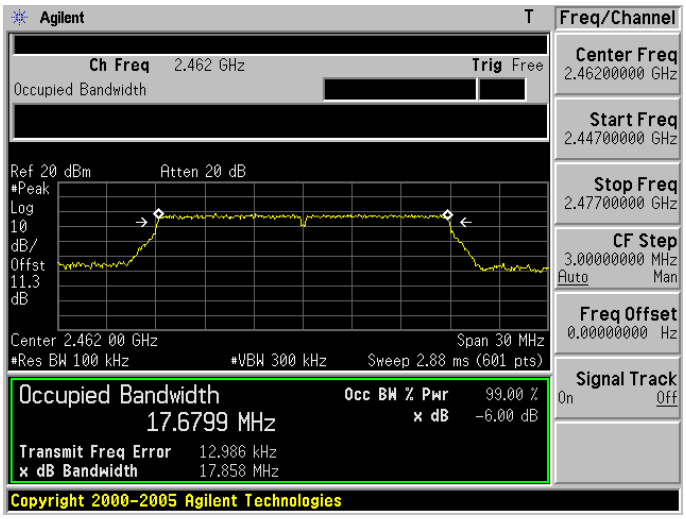

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode	
2422	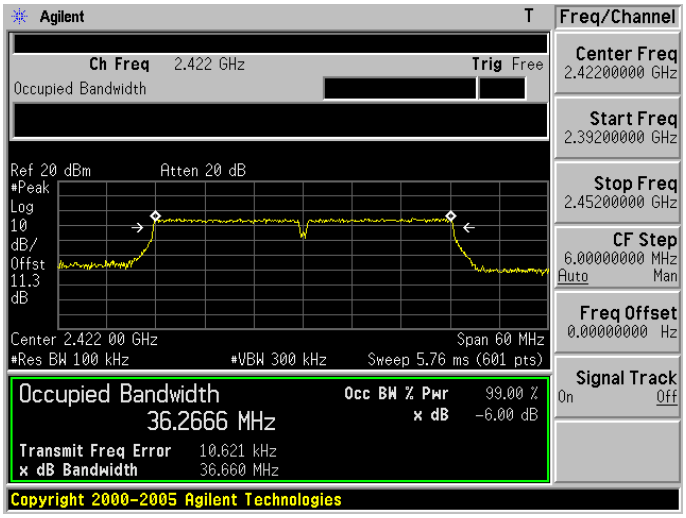
2437	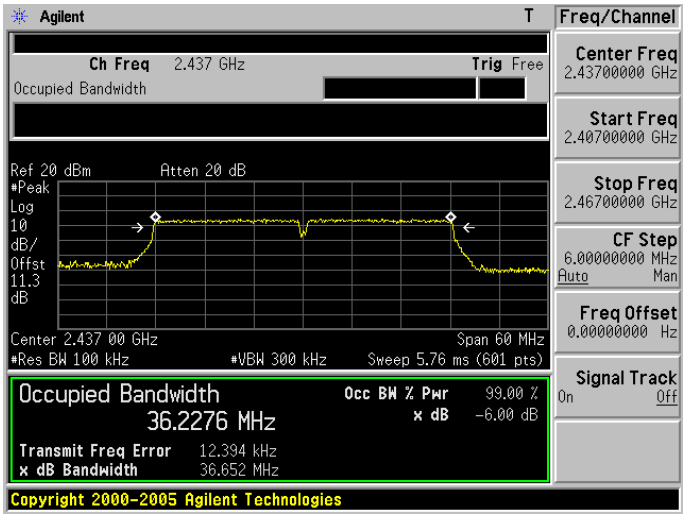
2452	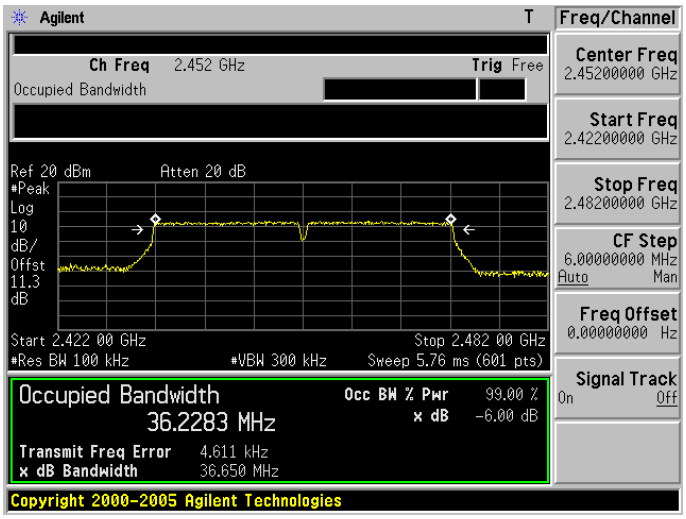

99 % Occupied Bandwidth

Mode 2: IEEE 802.11b Link Mode	
2412	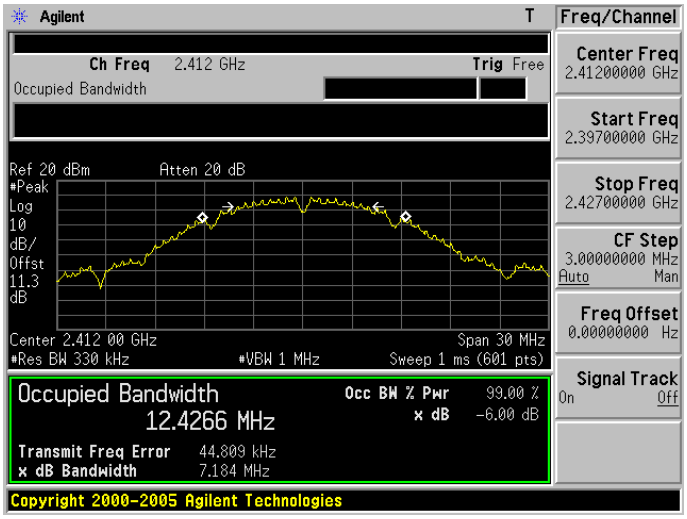
2437	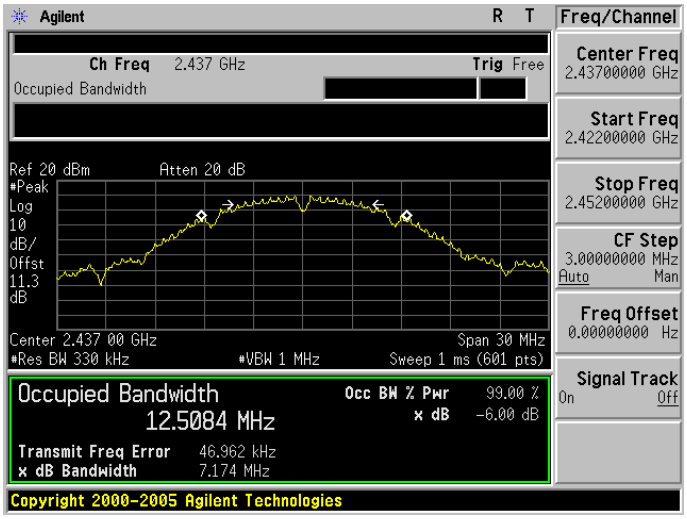
2462	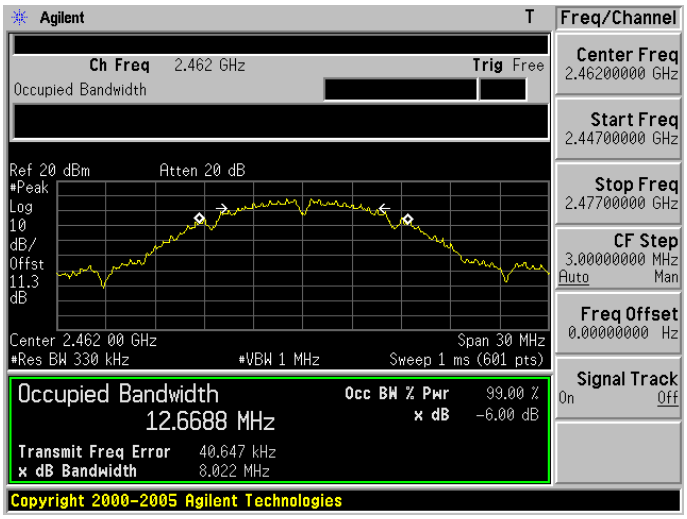

Mode 3: IEEE 802.11g Link Mode	
2412	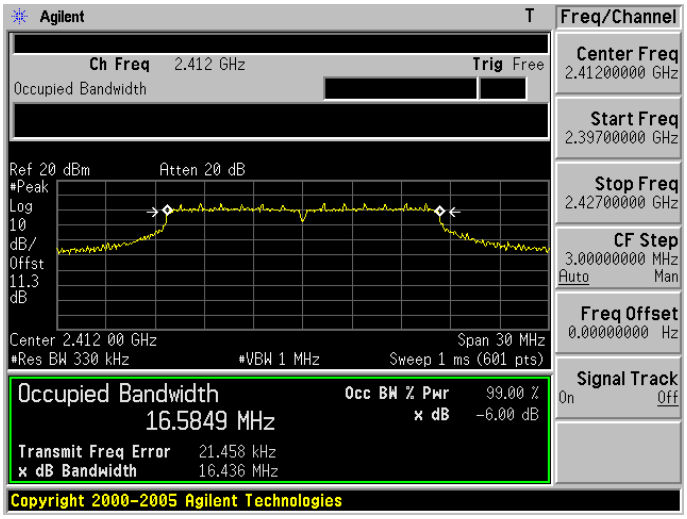
2437	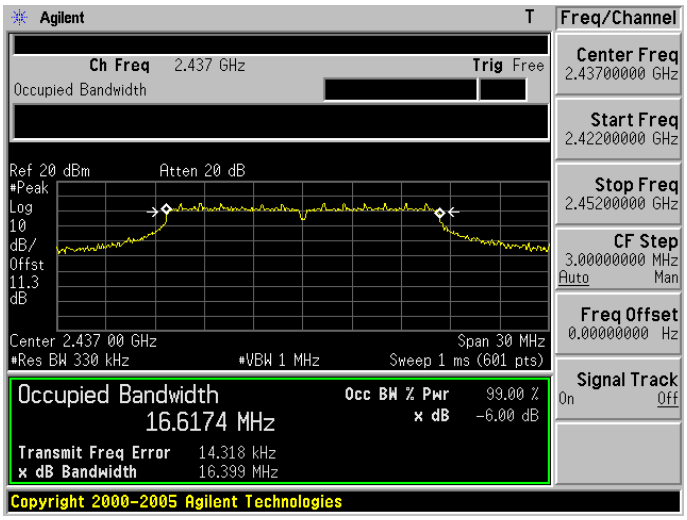
2462	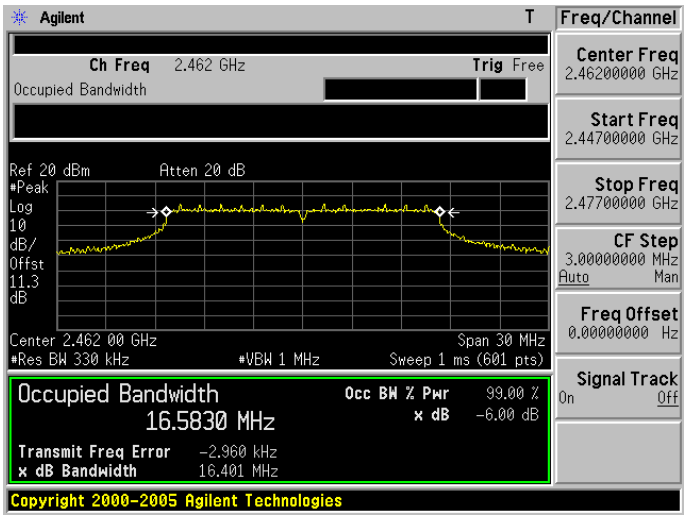

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode	
2412	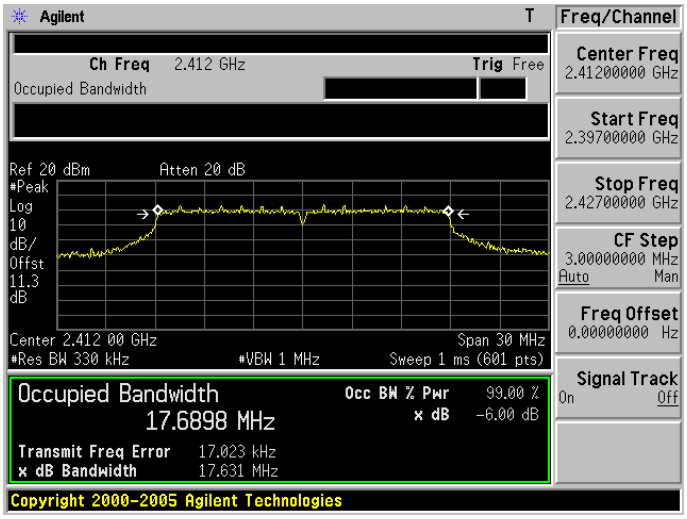
2437	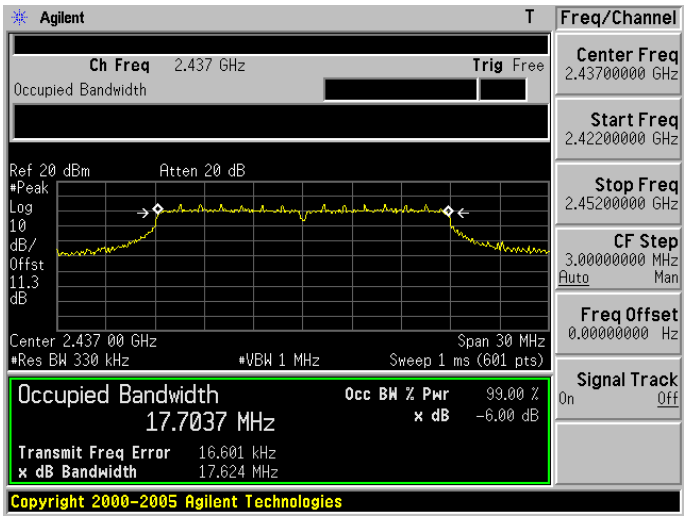
2462	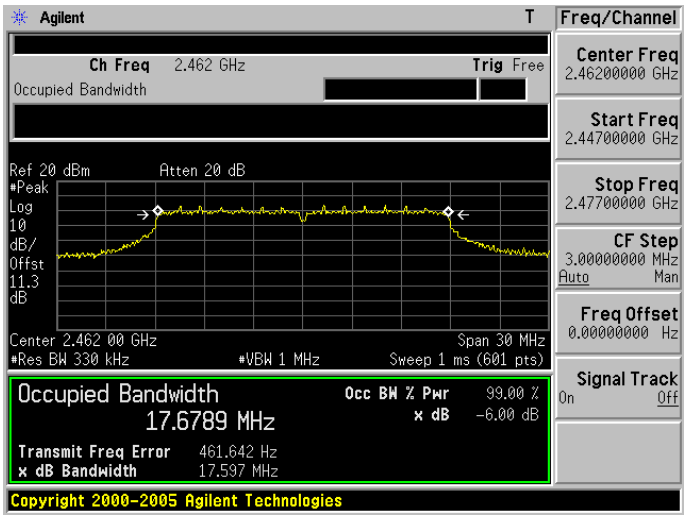

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode	
2422	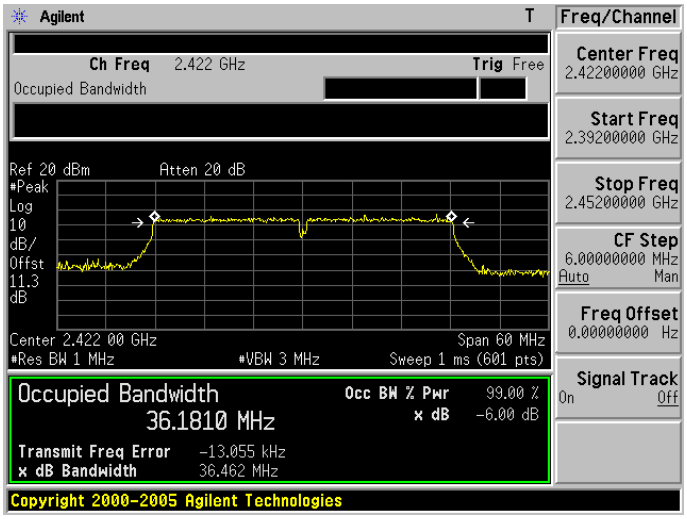
2437	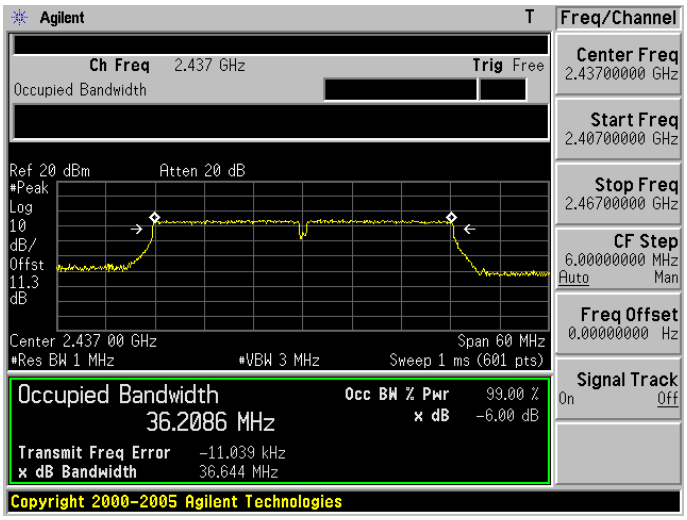
2452	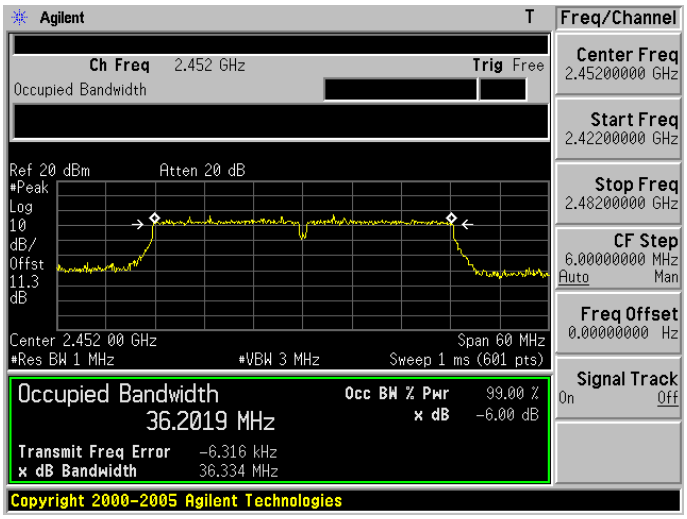

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

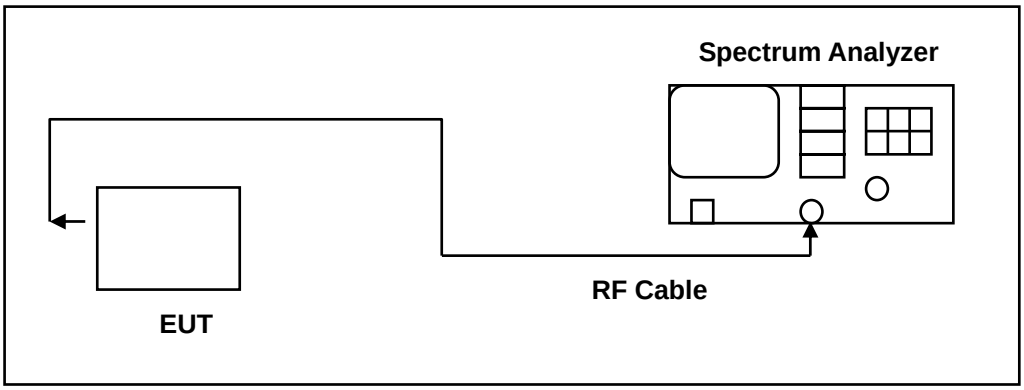

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 × RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result

Model Number	Omni S2		
Test Item	Maximum Power Density		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	06/16/2014	Test Site	TE05
Frequency (MHz)	Measurement (dBm/3KHz)		Limit (dBm)
2412	-9.42		< 8
2437	-12.03		< 8
2462	-10.90		< 8

Model Number	Omni S2		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	06/16/2014	Test Site	TE05
Frequency (MHz)	Measurement (dBm/3KHz)		Limit (dBm)
2412	-12.15		< 8
2437	-14.24		< 8
2462	-13.13		< 8

Model Number	Omni S2		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode		
Date of Test	06/16/2014	Test Site	TE05
Frequency (MHz)	Measurement (dBm/3KHz)		Limit (dBm)
2412	-14.63		< 8
2437	-14.52		< 8
2462	-14.27		< 8

Model Number	Omni S2		
Test Item	Maximum Power Density		
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode		
Date of Test	06/16/2014	Test Site	TE05
Frequency (MHz)	Measurement (dBm/3KHz)		Limit (dBm)
2422	-17.80		< 8
2437	-17.85		< 8
2452	-17.88		< 8

8.6. Test Graphs

Mode 2: IEEE 802.11b Link Mode	
2412	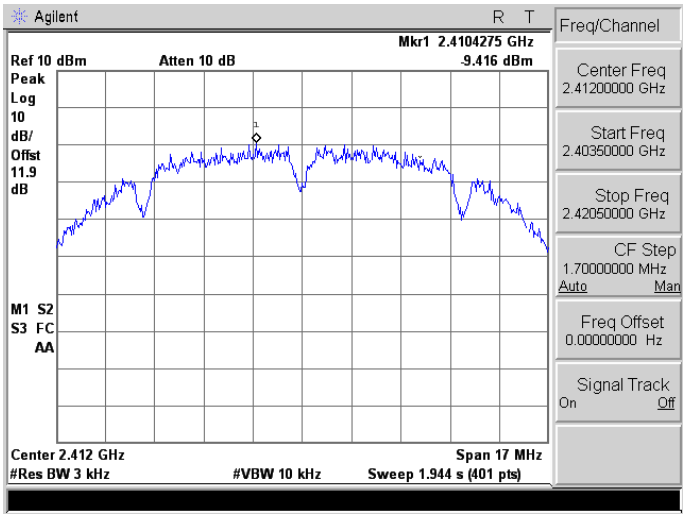
2437	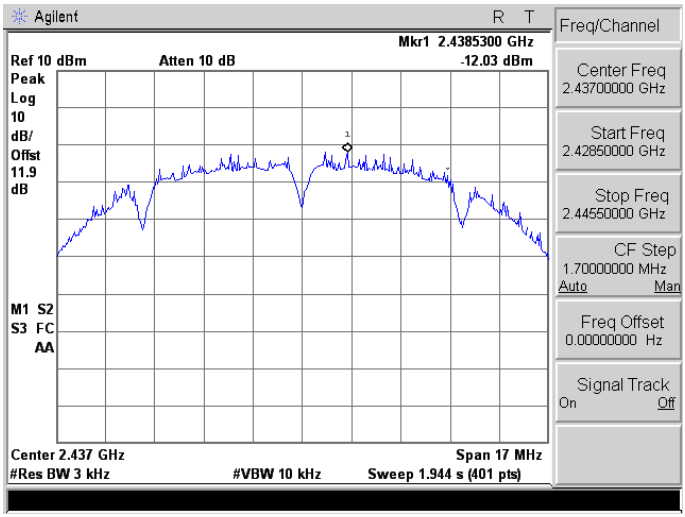
2462	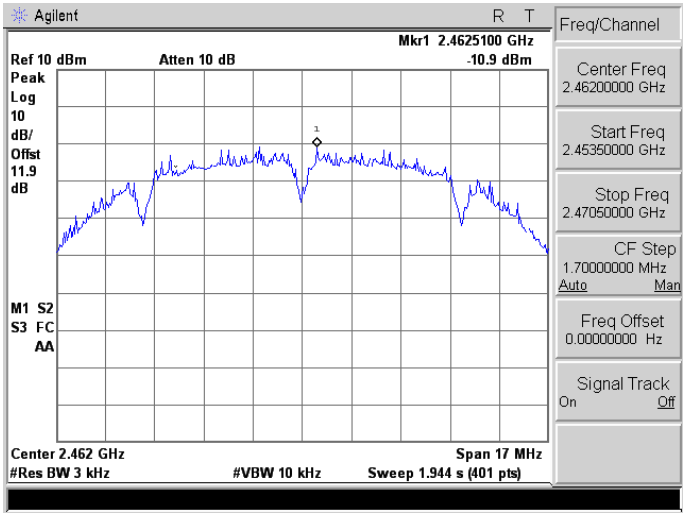

Mode 3: IEEE 802.11g Link Mode	
2412	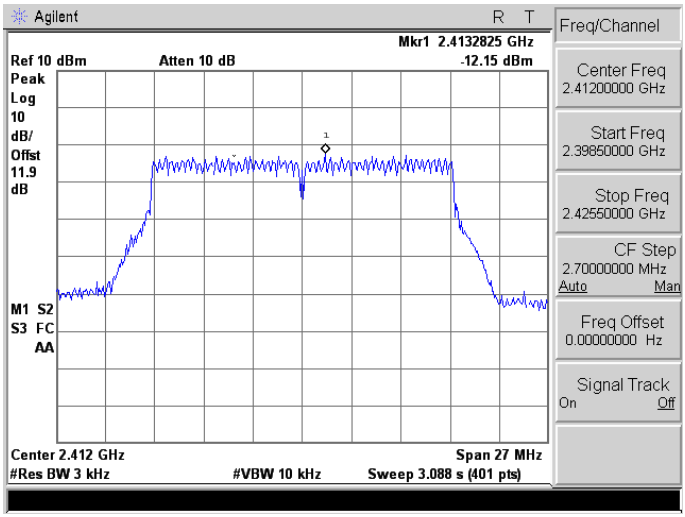
2437	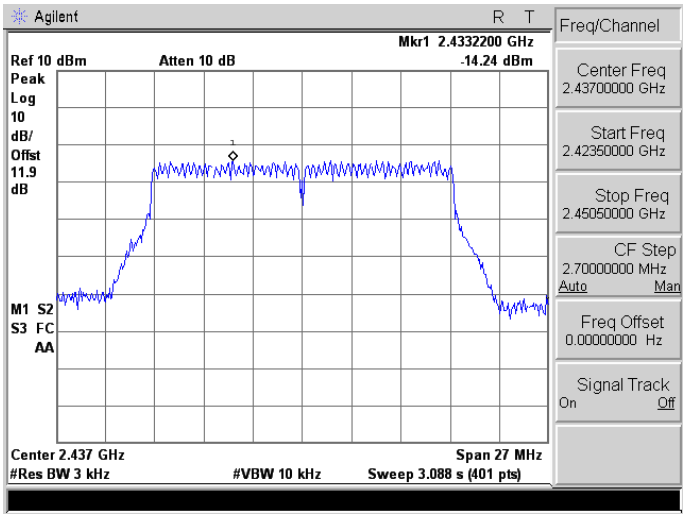
2462	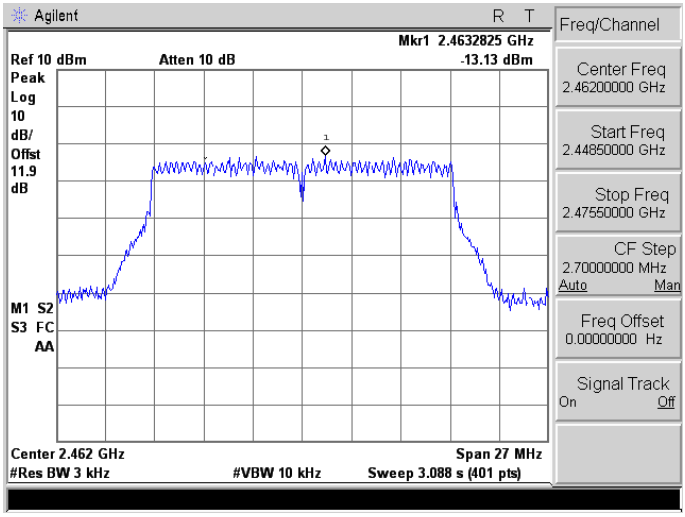

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode	
2412	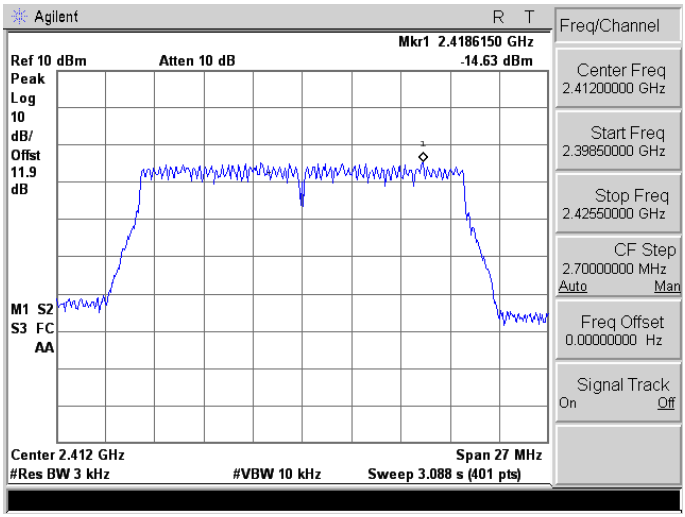
2437	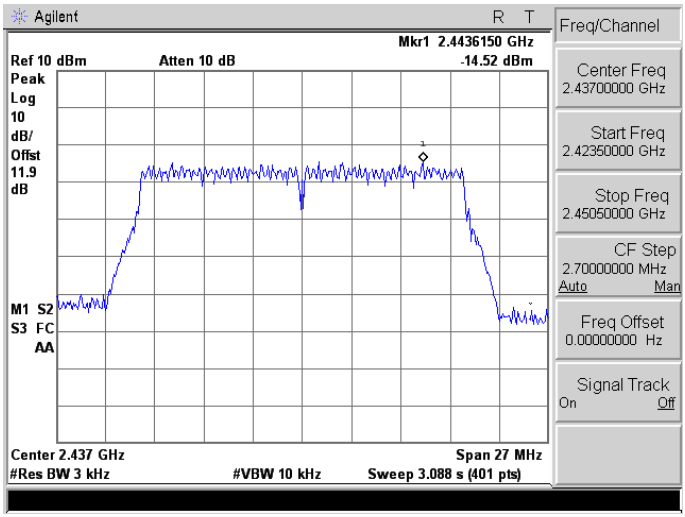
2462	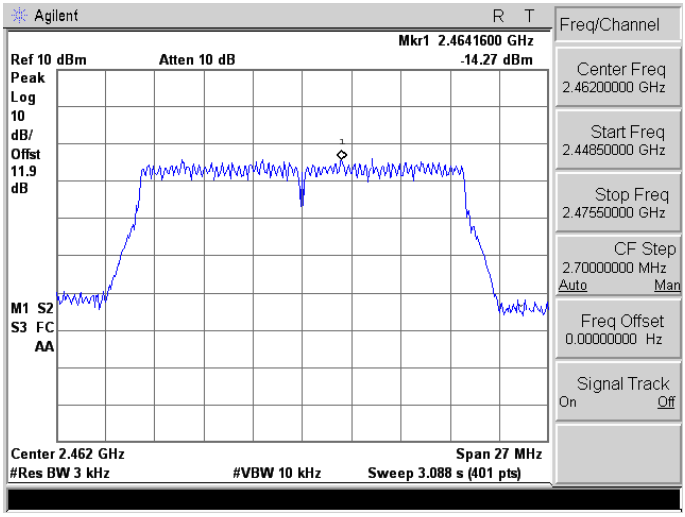

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode	
2422	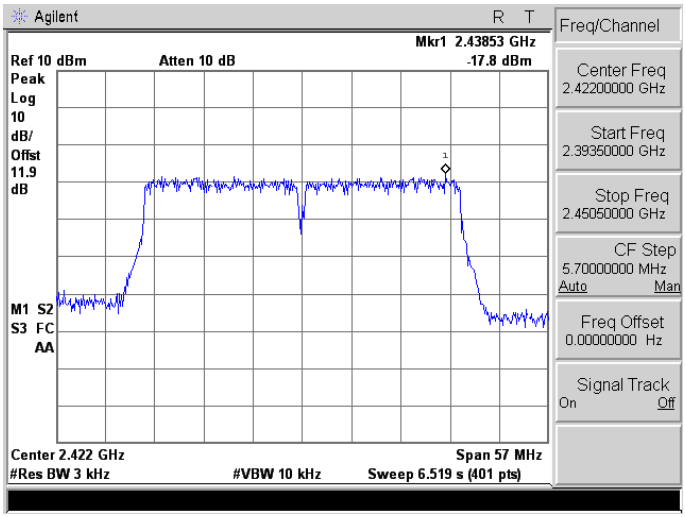
2437	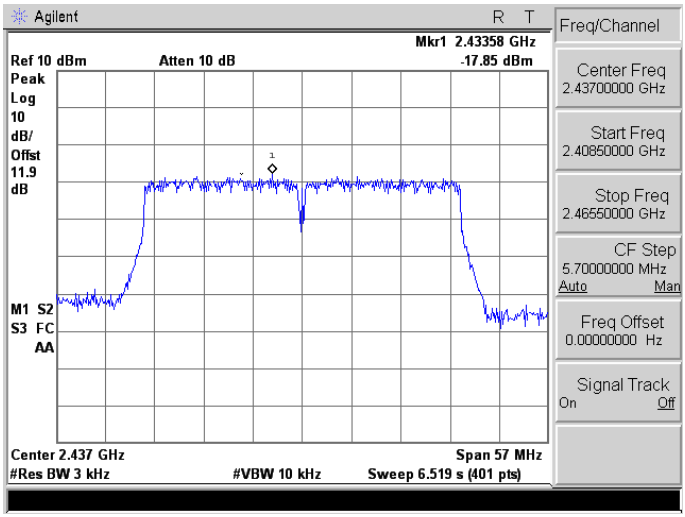
2452	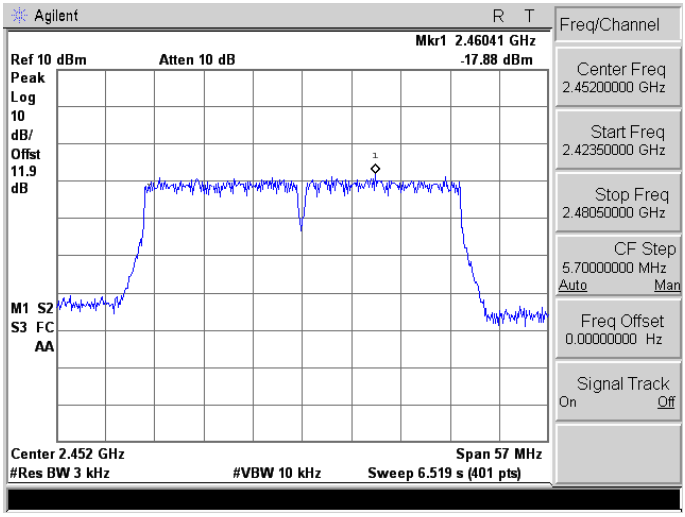

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

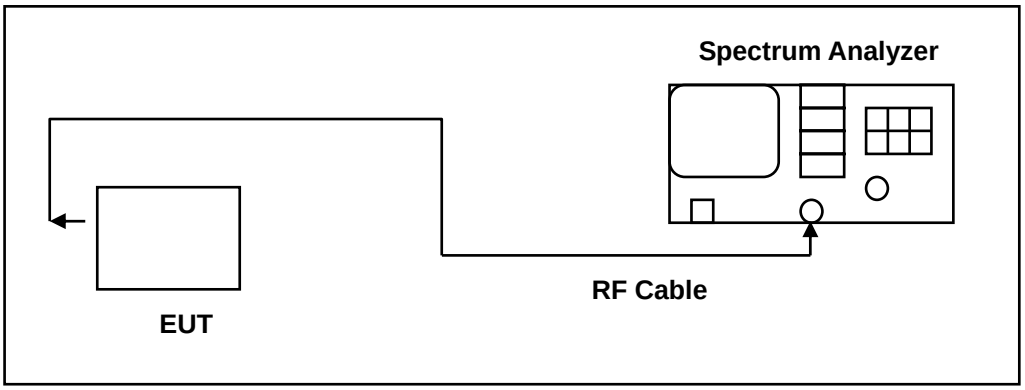

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/24/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.
All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.
The test was performed at 3 channels.

9.5. Test Graphs

Reference level

Mode 2: IEEE 802.11b Link Mode	
2412	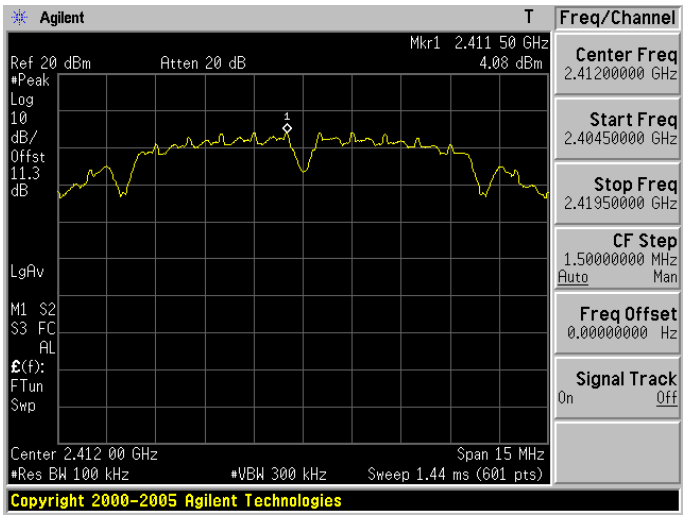
2437	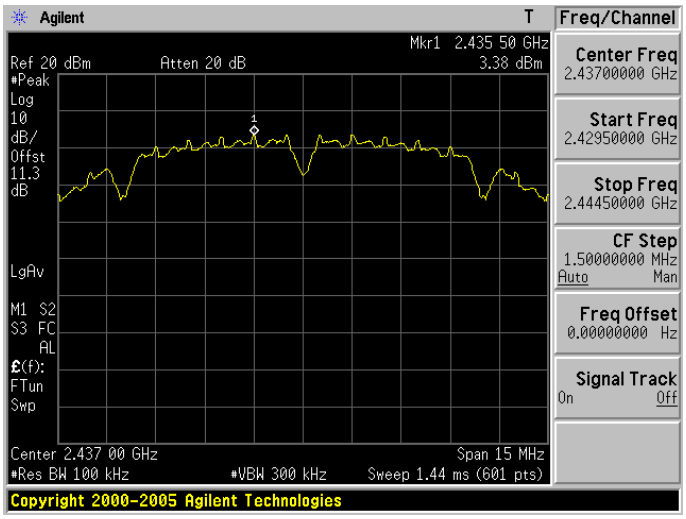
2462	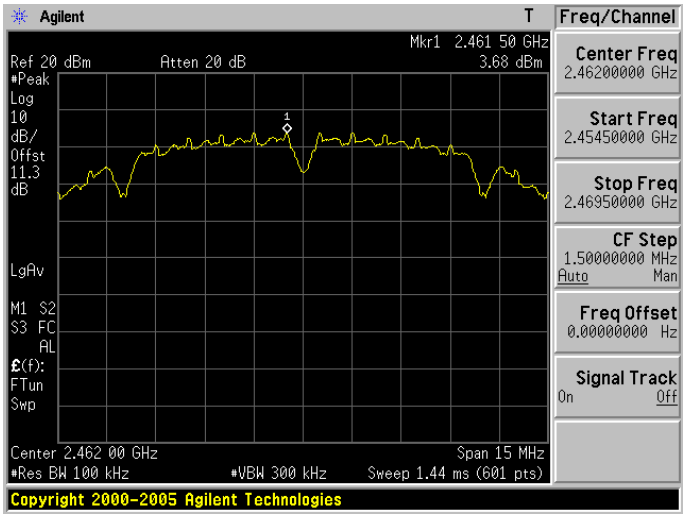

Mode 3: IEEE 802.11g Link Mode	
2412	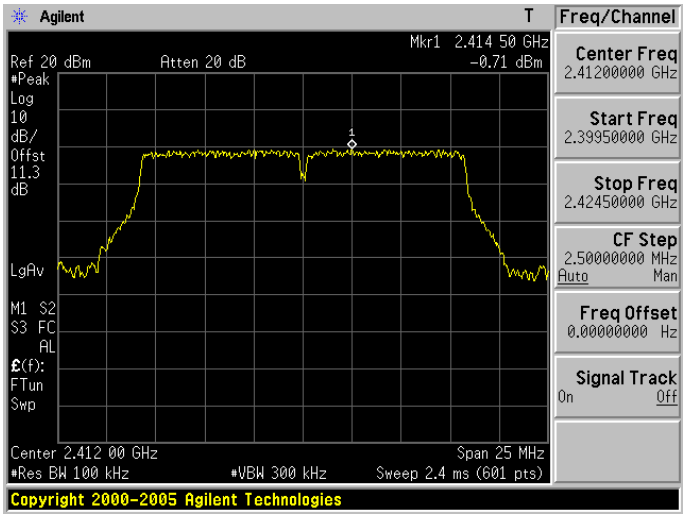
2437	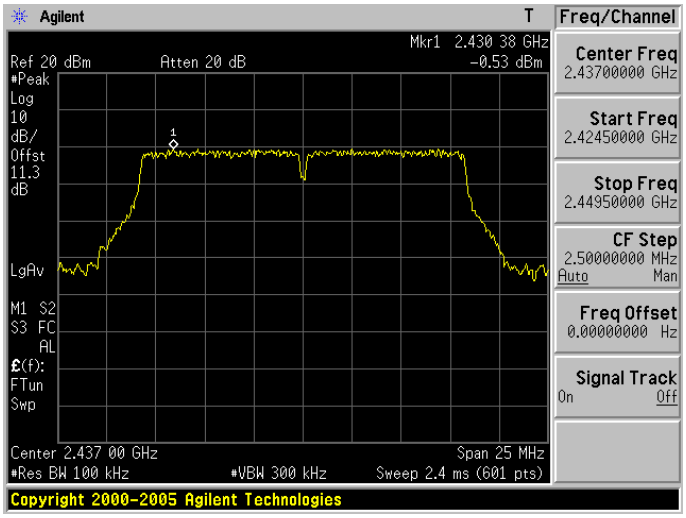
2462	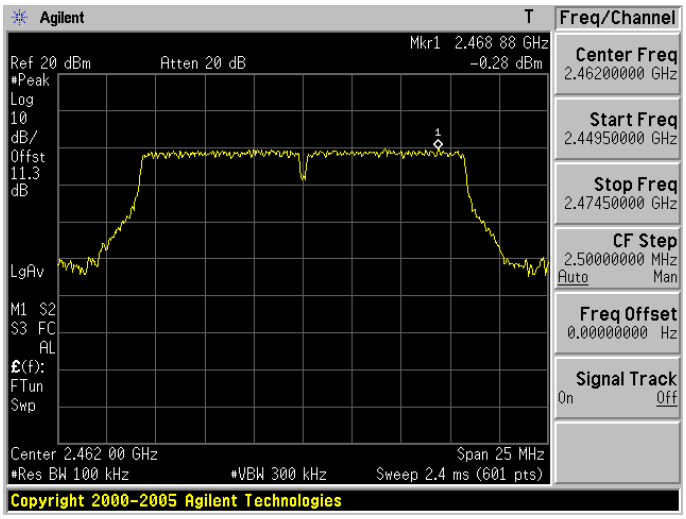

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode	
2412	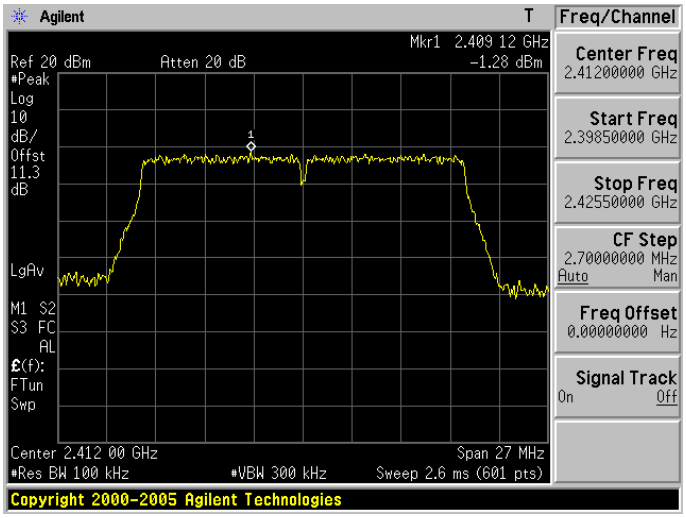
2437	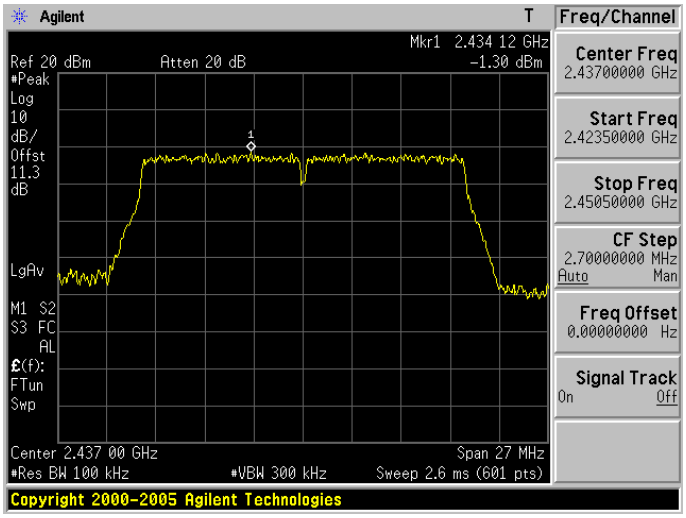
2462	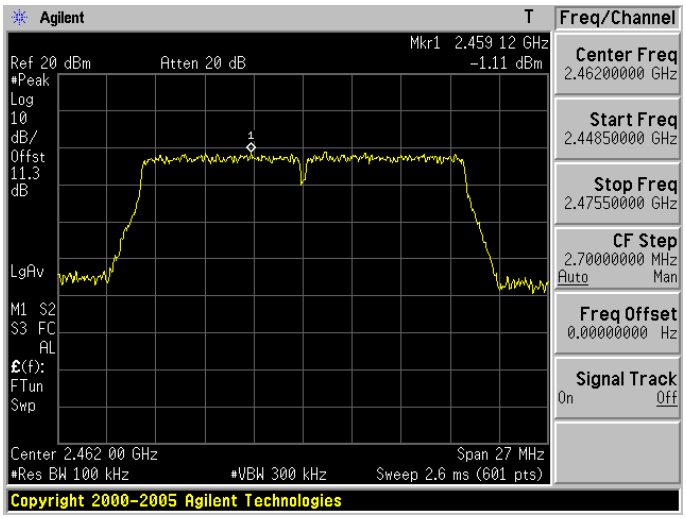

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode	
2422	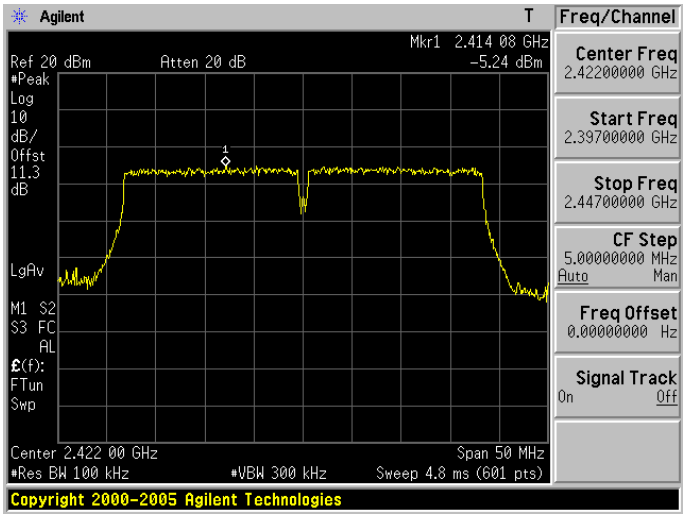
2437	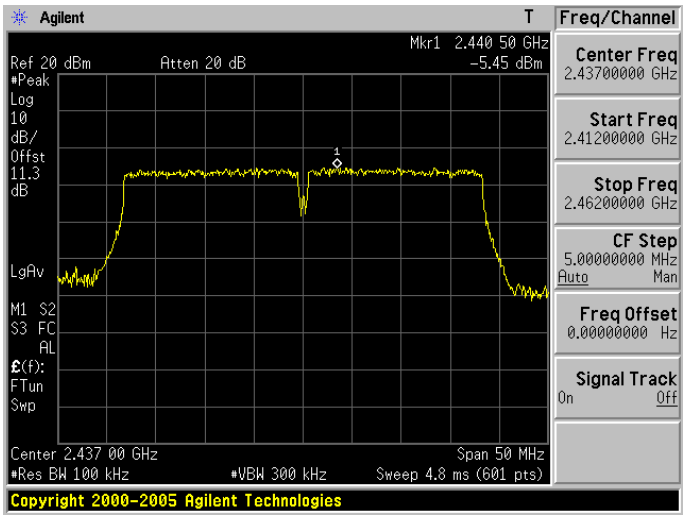
2452	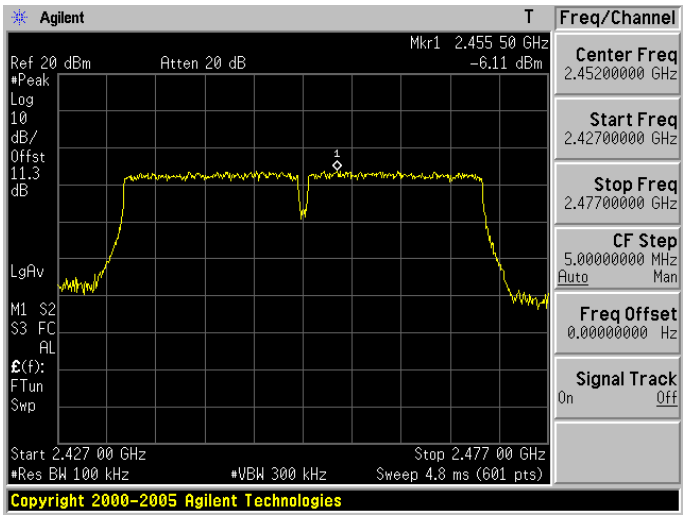

Out of Band Conducted Emissions

Mode 2: IEEE 802.11b Link Mode	
2412	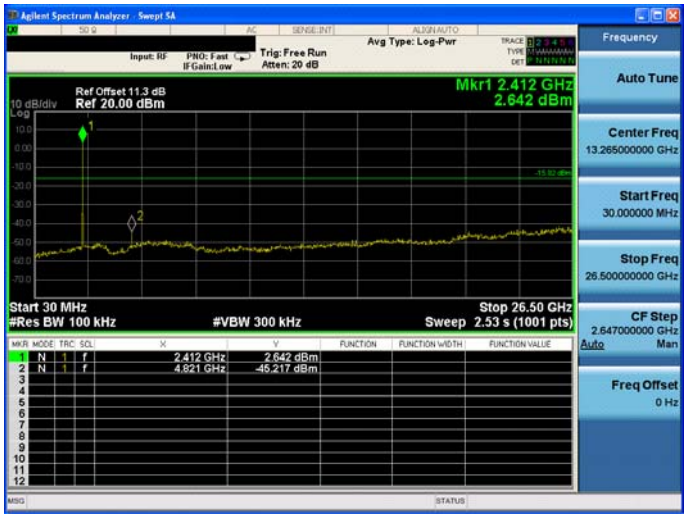
2437	
2462	

Mode 3: IEEE 802.11g Link Mode	
2412	
2437	
2462	

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode	
2412	
2437	
2462	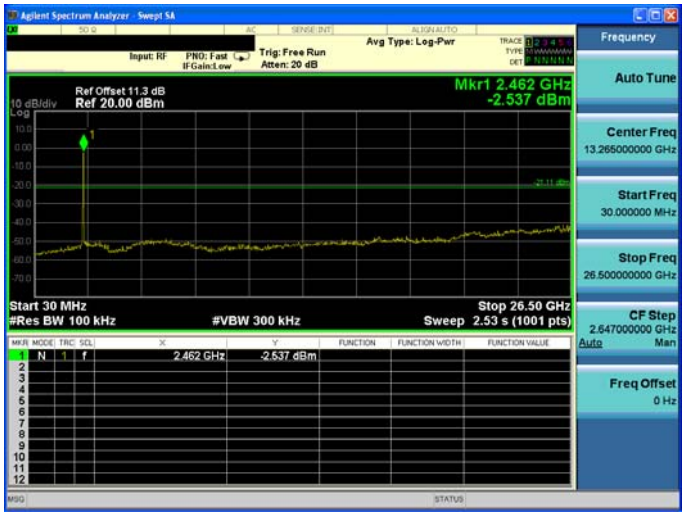

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode	
2422	
2437	
2452	

Conducted Band Edge

Mode 2: IEEE 802.11b Link Mode	
2412	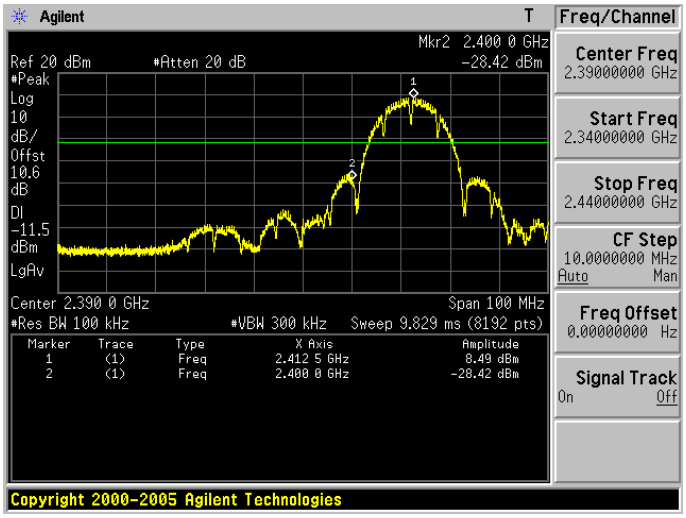
2462	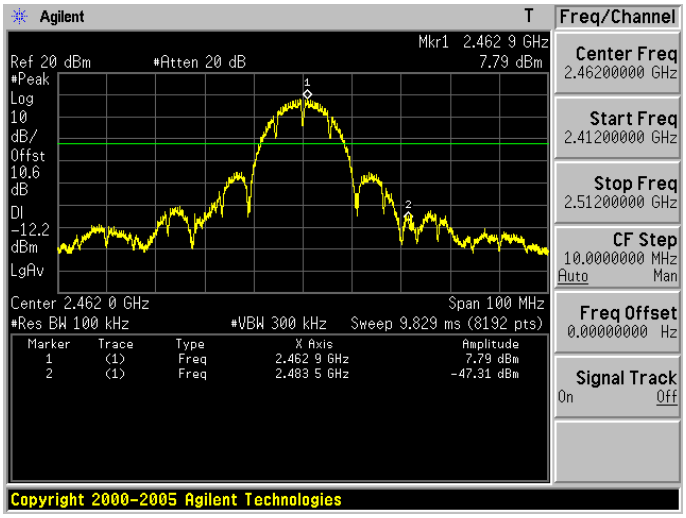

Mode 3: IEEE 802.11g Link Mode	
2412	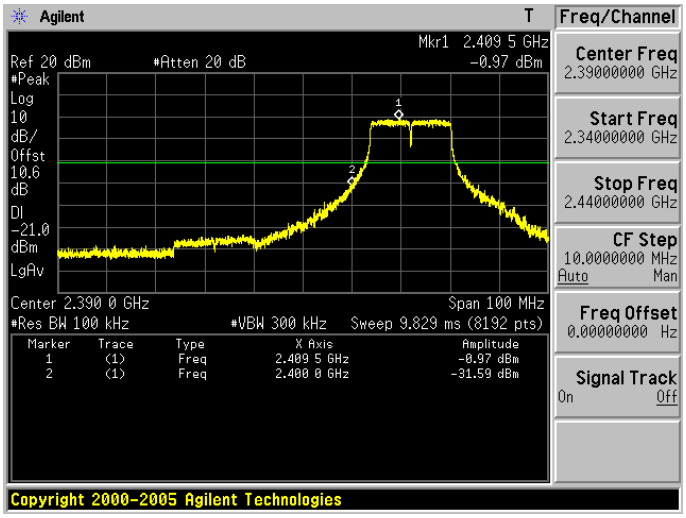
2462	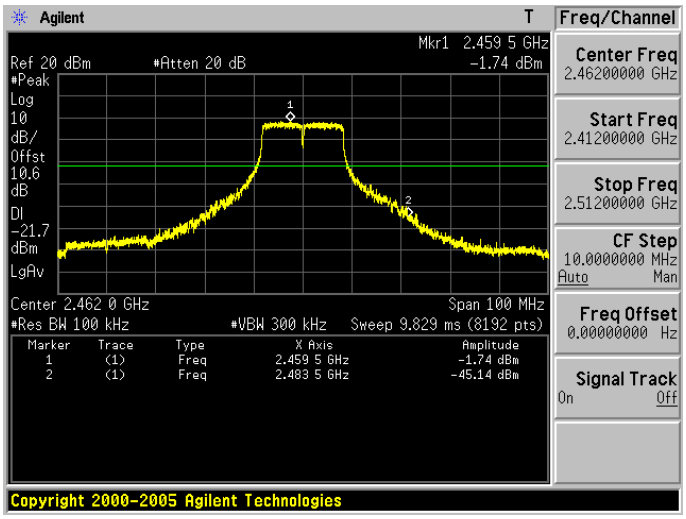

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode	
2412	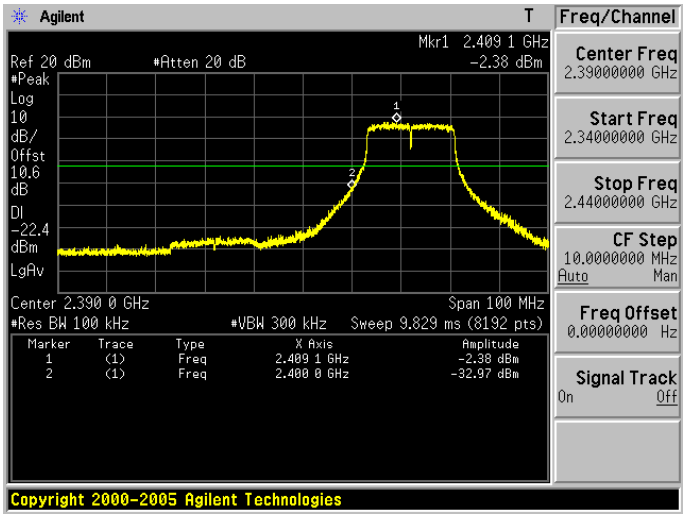
2462	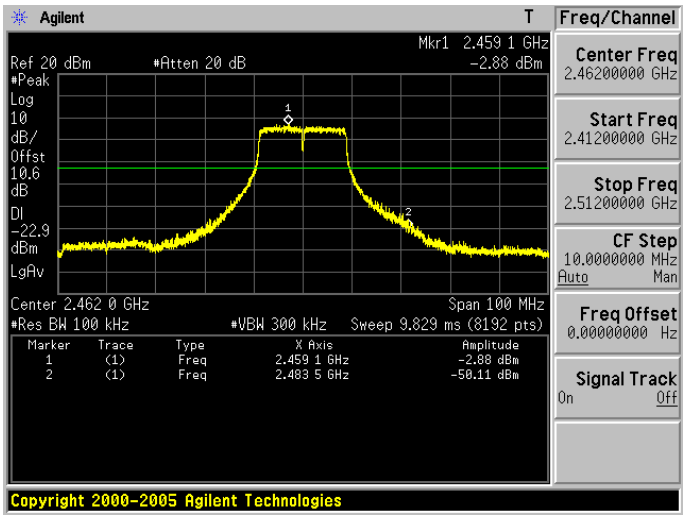

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode	
2422	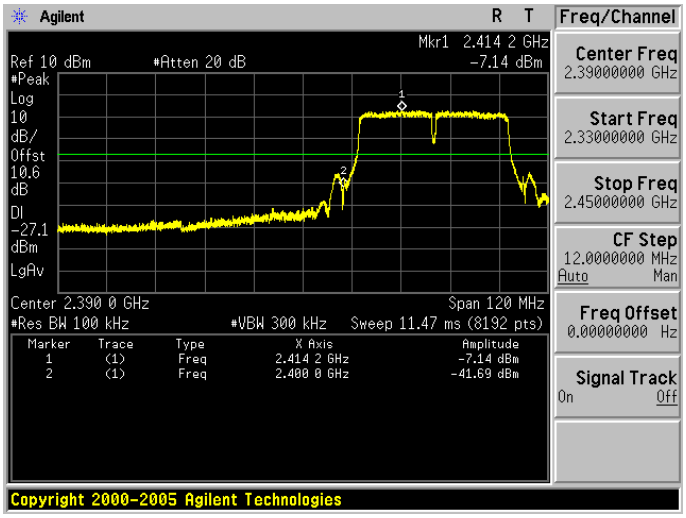
2452	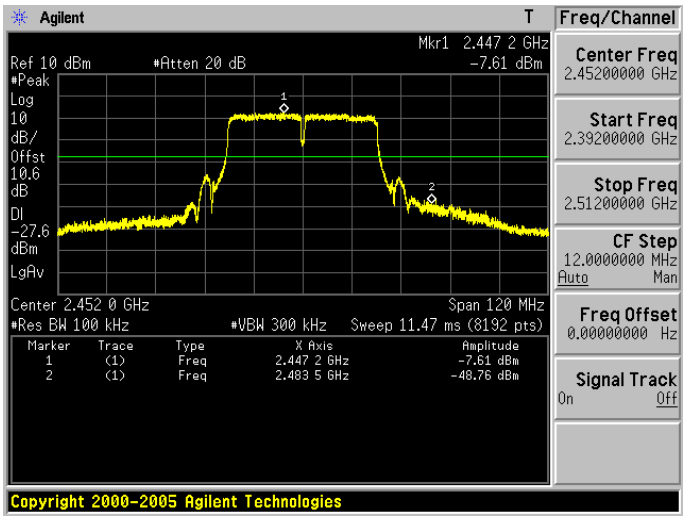

10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

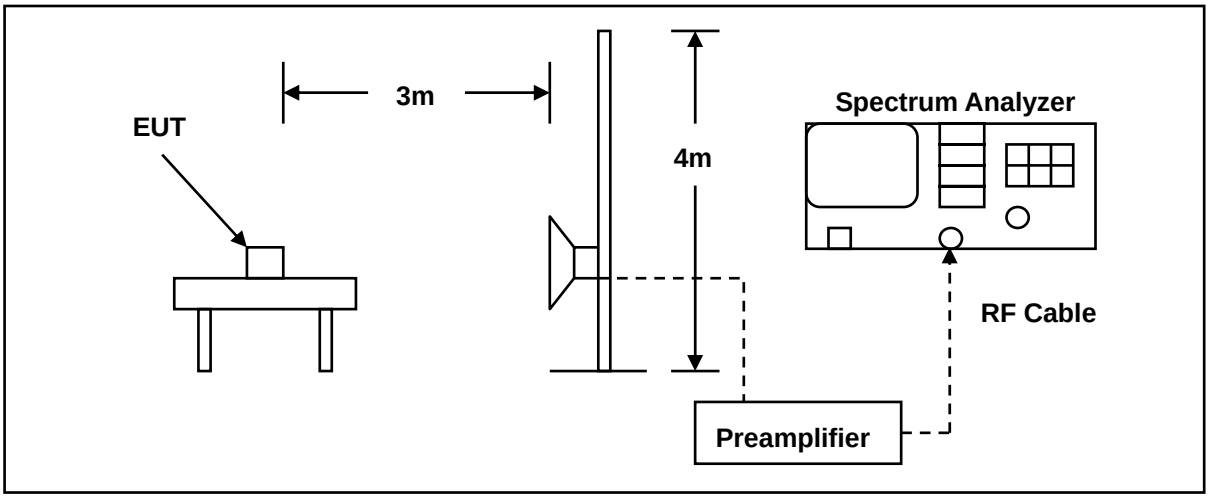

10.3.Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(2)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.
Note: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

10.5.Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/18/2014
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2385.460	60.64	-1.97	58.67	74.00	-15.33	peak	H
2385.460	45.63	-1.97	43.66	54.00	-10.34	AVG	H
2390.000	53.03	-1.94	51.09	74.00	-22.91	peak	H
2386.340	64.16	-1.97	62.19	74.00	-11.81	peak	V
2386.340	52.38	-1.97	50.41	54.00	-3.59	AVG	V
2390.000	59.85	-1.94	57.91	74.00	-16.09	peak	V
2390.000	48.04	-1.94	46.10	54.00	-7.90	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/18/2014
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	50.25	-1.52	48.73	74.00	-25.27	peak	H
2488.280	51.53	-1.49	50.04	74.00	-23.96	peak	H
2483.500	56.80	-1.52	55.28	74.00	-18.72	peak	V
2483.500	46.84	-1.52	45.32	54.00	-8.68	AVG	V
2484.080	57.13	-1.51	55.62	74.00	-18.38	peak	V
2484.080	46.70	-1.51	45.19	54.00	-8.81	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/18/2014
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.420	62.69	-1.95	60.74	74.00	-13.26	peak	H
2389.420	43.88	-1.95	41.93	54.00	-12.07	AVG	H
2390.000	62.31	-1.94	60.37	74.00	-13.63	peak	H
2390.000	43.96	-1.94	42.02	54.00	-11.98	AVG	H
2389.200	70.94	-1.96	68.98	74.00	-5.02	peak	V
2389.200	47.48	-1.96	45.52	54.00	-8.48	AVG	V
2390.000	70.44	-1.94	68.50	74.00	-5.50	peak	V
2390.000	47.60	-1.94	45.66	54.00	-8.34	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/18/2014
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	59.51	-1.52	57.99	74.00	-16.01	peak	H
2483.500	47.79	-1.52	46.27	54.00	-7.73	AVG	H
2483.680	60.48	-1.52	58.96	74.00	-15.04	peak	H
2483.680	47.53	-1.52	46.01	54.00	-7.99	AVG	H
2483.500	66.63	-1.52	65.11	74.00	-8.89	peak	V
2483.500	54.16	-1.52	52.64	54.00	-1.36	AVG	V
2483.720	71.36	-1.52	69.84	74.00	-4.16	peak	V
2483.720	53.84	-1.52	52.32	54.00	-1.68	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/18/2014
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.200	66.81	-1.96	64.85	74.00	-9.15	peak	H
2389.200	44.50	-1.96	42.54	54.00	-11.46	AVG	H
2390.000	63.05	-1.94	61.11	74.00	-12.89	peak	H
2390.000	45.21	-1.94	43.27	54.00	-10.73	AVG	H
2387.220	73.16	-1.96	71.20	74.00	-2.80	peak	V
2387.220	53.12	-1.96	51.16	54.00	-2.84	AVG	V
2390.000	71.44	-1.94	69.50	74.00	-4.50	peak	V
2390.000	54.52	-1.94	52.58	54.00	-1.42	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/18/2014
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	59.09	-1.52	57.57	74.00	-16.43	peak	H
2483.500	46.96	-1.52	45.44	54.00	-8.56	AVG	H
2483.760	59.97	-1.52	58.45	74.00	-15.55	peak	H
2483.760	46.85	-1.52	45.33	54.00	-8.67	AVG	H
2483.500	66.53	-1.52	65.01	74.00	-8.99	peak	V
2483.500	53.67	-1.52	52.15	54.00	-1.85	AVG	V
2484.360	69.50	-1.51	67.99	74.00	-6.01	peak	V
2484.360	53.40	-1.51	51.89	54.00	-2.11	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/18/2014
Frequency:	2422 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.080	68.18	-1.96	66.22	74.00	-7.78	peak	H
2389.080	42.34	-1.96	40.38	54.00	-13.62	AVG	H
2390.000	66.92	-1.94	64.98	74.00	-9.02	peak	H
2390.000	42.65	-1.94	40.71	54.00	-13.29	AVG	H
2388.600	71.81	-1.96	69.85	74.00	-4.15	peak	V
2388.600	53.89	-1.96	51.93	54.00	-2.07	AVG	V
2390.000	70.94	-1.94	69.00	74.00	-5.00	peak	V
2390.000	54.80	-1.94	52.86	54.00	-1.14	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/18/2014
Frequency:	2452 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	58.62	-1.52	57.10	74.00	-16.90	peak	H
2483.500	50.11	-1.52	48.59	54.00	-5.41	AVG	H
2484.600	60.38	-1.51	58.87	74.00	-15.13	peak	H
2484.600	49.28	-1.51	47.77	54.00	-6.23	AVG	H
2483.500	68.51	-1.52	66.99	74.00	-7.01	peak	V
2483.500	53.85	-1.52	52.33	54.00	-1.67	AVG	V
2487.600	70.61	-1.50	69.11	74.00	-4.89	peak	V
2487.600	52.39	-1.50	50.89	54.00	-3.11	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/15/2014
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2381.940	64.28	-1.98	62.30	74.00	-11.70	peak	H
2381.940	43.34	-1.98	41.36	54.00	-12.64	AVG	H
2390.000	66.98	-1.94	65.04	74.00	-8.96	peak	H
2390.000	47.25	-1.94	45.31	54.00	-8.69	AVG	H
2388.980	61.61	-1.96	59.65	74.00	-14.35	peak	V
2388.980	48.36	-1.96	46.40	54.00	-7.60	AVG	V
2390.000	60.79	-1.94	58.85	74.00	-15.15	peak	V
2390.000	48.73	-1.94	46.79	54.00	-7.21	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	2	Date:	07/15/2014
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	55.43	-1.52	53.91	74.00	-20.09	peak	H
2483.500	46.94	-1.52	45.42	54.00	-8.58	AVG	H
2487.840	57.15	-1.49	55.66	74.00	-18.34	peak	H
2487.840	49.77	-1.49	48.28	54.00	-5.72	AVG	H
2483.500	60.10	-1.52	58.58	74.00	-15.42	peak	V
2483.500	52.09	-1.52	50.57	54.00	-3.43	AVG	V
2484.600	69.43	-1.51	67.92	74.00	-6.08	peak	V
2484.600	51.01	-1.51	49.50	54.00	-4.50	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/15/2014
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2386.670	64.04	-1.97	62.07	74.00	-11.93	peak	H
2386.670	42.75	-1.97	40.78	54.00	-13.22	AVG	H
2390.000	64.88	-1.94	62.94	74.00	-11.06	peak	H
2390.000	44.37	-1.94	42.43	54.00	-11.57	AVG	H
2389.750	70.63	-1.94	68.69	74.00	-5.31	peak	V
2389.750	46.03	-1.94	44.09	54.00	-9.91	AVG	V
2390.000	67.38	-1.94	65.44	74.00	-8.56	peak	V
2390.000	46.53	-1.94	44.59	54.00	-9.41	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	3	Date:	07/15/2014
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	58.05	-1.52	56.53	74.00	-17.47	peak	H
2483.500	46.64	-1.52	45.12	54.00	-8.88	AVG	H
2485.080	62.86	-1.51	61.35	74.00	-12.65	peak	H
2485.080	45.56	-1.51	44.05	54.00	-9.95	AVG	H
2483.500	69.47	-1.52	67.95	74.00	-6.05	peak	V
2483.500	53.48	-1.52	51.96	54.00	-2.04	AVG	V
2483.920	71.28	-1.51	69.77	74.00	-4.23	peak	V
2483.920	52.79	-1.51	51.28	54.00	-2.72	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/16/2014
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.200	66.35	-1.96	64.39	74.00	-9.61	peak	H
2389.200	44.29	-1.96	42.33	54.00	-11.67	AVG	H
2390.000	63.32	-1.94	61.38	74.00	-12.62	peak	H
2390.000	44.62	-1.94	42.68	54.00	-11.32	AVG	H
2387.990	70.57	-1.96	68.61	74.00	-5.39	peak	V
2387.990	46.22	-1.96	44.26	54.00	-9.74	AVG	V
2390.000	71.97	-1.94	70.03	74.00	-3.97	peak	V
2390.000	47.72	-1.94	45.78	54.00	-8.22	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	4	Date:	07/16/2014
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	56.98	-1.52	55.46	74.00	-18.54	peak	H
2483.500	46.89	-1.52	45.37	54.00	-8.63	AVG	H
2484.280	59.06	-1.51	57.55	74.00	-16.45	peak	H
2484.280	46.56	-1.51	45.05	54.00	-8.95	AVG	H
2483.500	72.38	-1.52	70.86	74.00	-3.14	peak	V
2483.500	53.34	-1.52	51.82	54.00	-2.18	AVG	V
2483.840	73.19	-1.51	71.68	74.00	-2.32	peak	V
2483.840	53.15	-1.51	51.64	54.00	-2.36	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/16/2014
Frequency:	2422 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2384.280	70.58	-1.97	68.61	74.00	-5.39	peak	H
2384.280	42.70	-1.97	40.73	54.00	-13.27	AVG	H
2390.000	69.97	-1.94	68.03	74.00	-5.97	peak	H
2390.000	43.18	-1.94	41.24	54.00	-12.76	AVG	H
2385.840	74.58	-1.97	72.61	74.00	-1.39	peak	V
2385.840	44.17	-1.97	42.20	54.00	-11.80	AVG	V
2390.000	72.70	-1.94	70.76	74.00	-3.24	peak	V
2390.000	43.99	-1.94	42.05	54.00	-11.95	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Omni S2 Rechargeable	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	5	Date:	07/16/2014
Frequency:	2452 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	61.98	-1.52	60.46	74.00	-13.54	peak	H
2483.500	49.21	-1.52	47.69	54.00	-6.31	AVG	H
2484.600	64.71	-1.51	63.20	74.00	-10.80	peak	H
2484.600	49.06	-1.51	47.55	54.00	-6.45	AVG	H
2483.500	64.77	-1.52	63.25	74.00	-10.75	peak	V
2483.500	52.82	-1.52	51.30	54.00	-2.70	AVG	V
2487.800	68.83	-1.49	67.34	74.00	-6.66	peak	V
2487.800	51.54	-1.49	50.05	54.00	-3.95	AVG	V

11 Antenna Measurement

11.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Antenna Connector Construction

The antenna used in this product is as below:

Trade Name	Model Number	Type	Max. Gain
LinkTek	1029-000080	EXTERNAL ANTENNA	2.28 dBi
MAG.LAYERS	MSA-3310-25GC4-A1	METAL STAMPING ANTENNA	2.45 dBi