

WRW-I1 electronic backpack

Installation and operation instructions



Content

1. Overview	2
2. Metering Module Feature.....	2
2.1. Electrical characteristics.....	2
2.2. Feature Description.....	2
2.3. LED indicator of metering module	3
3. Product Assembly.....	4
4. Operating instructions for metering module	5
5. Precautions and handling of common problems	6
6. Instruction of production configuration tool	6
6.1. Tool list.....	6
6.2. Device connection.....	6
6.4. Supported software	8
6.4.1. Software installation.....	8
6.5. Production Test Flow.....	11
6.6. Precautions for production setup.....	12
7. Infrared upgrade function	13
7.1 Supported software.....	13
7.1.1 Software installation.....	13
7.1.2 Software interface	13
7.2. Upgrading Flow.....	13
Disclaimers.....	15

1. Overview

The Pulse Reader (ID: WRW-I1) integrates hall metering, acquisition, communication and transmission. It can be able to monitor abnormal conditions such as magnetic interference, low voltage of battery and disassembly in real time, and actively report it to the management platform. The pulse reader and the gateway form a star network, which is convenient for network maintenance, with high reliability and strong scalability. It complies with LoRaWAN1.0.2 standard protocol.

2. Metering Module Feature

2.1. Electrical characteristics

No.	Feature	Function Description
1	Working frequency	It's compatible with LoRaWAN®, EU868, AU915 are optional
2	Maximum transmitting power	It's in accordance with the requirements of power limit in different areas of the LoRaWAN protocol
3	Working temperature	-20°C~+55°C
4	Working voltage	+3.2V~+3.8V
5	Transmitting distance	>10km
6	Lifespan	>8 years (use one ER18505 lithium battery)
7	Waterproof degree	IP68

2.2. Feature Description

No.	Feature	Function Description
1	Data reporting	There are two ways to report data Touch to report data: you must touch the touch button twice, long touch (more than 2 seconds)+short touch (less than 2 seconds), and the two actions must be completed within 5 seconds, otherwise the trigger is invalid. Timed active submission of data: the periodic reporting period and the periodic reporting time can be set. The periodic reporting range is 600~86400S, and the periodic reporting time range is 0~23H. After setting, the reporting time is calculated according to the device's DeviceEui, scheduled reporting cycle and scheduled reporting time. The default value of regular reporting period is 28800S, and the default value of regular reporting time is 6H.
2	Measurement	The non-magnetic metering method is supported.
3	Power-down storage	It supports power-off storage, and does not need to reinitialize parameters after power-off (but after power-off, it needs to run 10 pulses to open the alarm function).

4	Disassembly alarm	The anti-disassembly alarm function will be activated when the forward rotation metering is more than 10 pulses. When the equipment is disassembled, the disassembly mark and the historical disassembly mark will display the fault at the same time. After the equipment is installed, the forward rotation metering is more than 10 pulses and the communication with the non-magnetic backplane is normal, the disassembly fault mark will be cleared.
5	Magnetic attack detection	It detects every 2S. When a malicious magnetic attack is detected, an alarm flag of magnetic attack and a historical magnetic attack will be generated immediately. If there is no magnetic attack detected for continuous 10 seconds, the alarm flag will be automatically cleared. The historical magnetic attack alarm flag must be successfully reported to the cloud platform before it can be automatically cleared. Neither the detected nor the cleared magnetic attack alarm will actively report data.
6	Monthly and yearly frozen data storage	It can save 10 years of annual frozen data and monthly frozen data of the last 128 months, and the cloud platform can query historical data.
7	Parameters setting	Support wireless near and remote parameter settings. The remote parameter setting is realized through the cloud platform, and the near parameter setting is realized through the production test tool. There are two ways to set the near field parameters, namely wireless communication and infrared communication.
8	Upgrade application function	Support IR mode to upgrade the application program of metering module

2.3. LED indicator of metering module


No.	Function	LED status description
1	Power-on initialization	The LED of the metering module flashes once when it's powered-on.
2	Networking	When the metering module is connected to the Internet, the LED light will be always on, and the LED light will be off when the connection is successful or the maximum number of connections is reached.
3	Report data regularly	The LED indicator of the metering module will flash for a time when it's reporting the data (it's very short).
4	Report data by touch	The metering module LED light of touching and reporting the data flashes quickly for 2S and then flashes once
5	IR upgrade application program	When the infrared upgrades the application, the LED light of the metering module keeps flashing at a frequency of 1 second, until the LED light turns off after the upgrade is completed.

3. Product Assembly

1. Insert the pulse reader into Elster gas meter, it's shown as below.



2. The effect after inserting is as shown in the following figure.

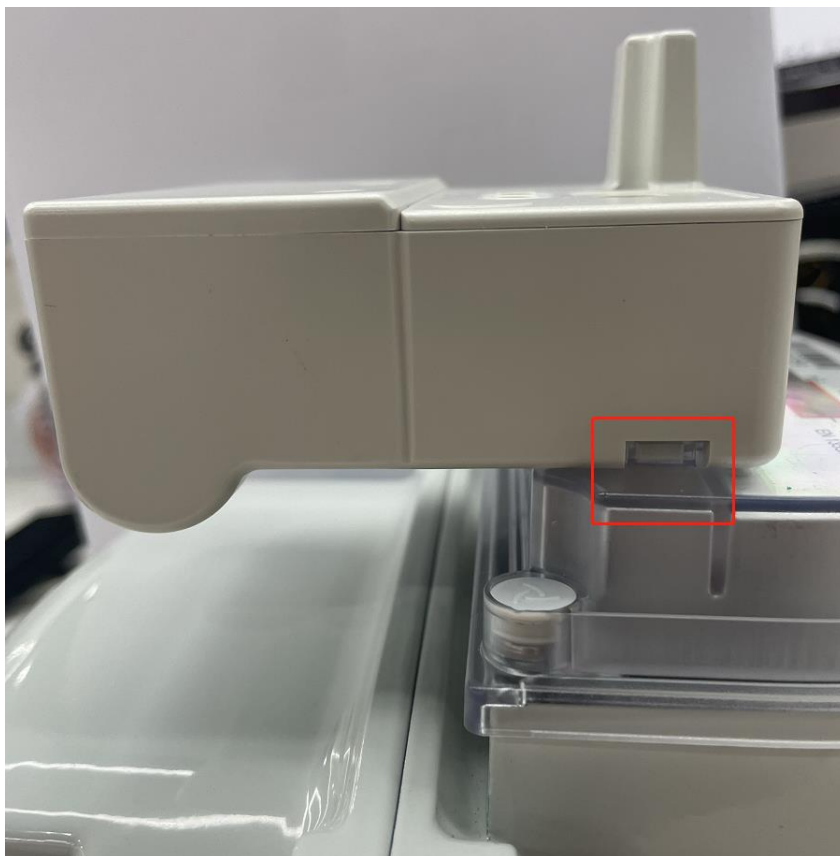

3. Shake the WRW-I1 electronic backpack up and down to align it with the positioning hole on the instrument and fix it with screws.



4. Operating instructions for metering module

Step 1. Information report and installation: report installation of metering module information (APPK, EUI, etc.) on the cloud platform (which is mainly based on the platform actually used by clients). After the installation is completed, check whether the meter module information is consistent with the platform.

Step 2. Join the local LoRaWAN network: touch the metering module to initiate networking, the LED light keeps on during the networking process, and the LED light will turn off when the networking is successful.

Step 3. Report the data: touch the metering module to report data, check whether the reporting parameters and flow data are accurate through the cloud platform. If the data is deviated, it can be modified by setting parameters.

Step 4. Parameter setting: After the metering module is assembled, use the production test tool provided by HAC (if provided) or the cloud platform for parameter setting. To set the parameters using the cloud platform, you must complete the metering module information installation on the cloud platform.

Step 5. The metering module goes offline: the metering module fails to report in two consecutive reporting cycles, and the metering module goes offline. The data is reported regularly next time, the network request will be initiated automatically.

5. Precautions and handling of common problems

1. Touch the button to report the data twice, it must be greater than 2S at the first touch, it must be completed within 5S at the second touch after the first touch and the touch time is less than 2S, otherwise the touch of reporting data is invalid.
2. The touch button reporting function is invalid when the meter module is connected to the Internet (the LED light of module is always on) or when the valve is controlled.
3. The cloud platform cannot check the data reported by touch button. The processing method is as follows:
 - a. Observe whether the LED indicator status of the meter module meets the described in Chapter 4 when the data is reported by touch button.
 - b. Check whether the installation information of the cloud platform is consistent with the information of the metering module.
 - c. Still unable to solve the data reporting problem, please contact our technical staff

6. Instruction of production configuration tool

6.1. Tool list

No.	Tool list	Function description
1	HAC-MLW-F-T1-M2	Parameters setting and test data transfer
2	HAC-MLW-F-T2-M2	Monitor the field strength value of X meters from the LoRaWAN water meter (the distance is based on the production environment, select the returned field strength value -80dBm (the default fluctuation is 10 dBm)) to achieve fixed distance monitor.
3	5V RS232 serial cable 2PCS	Data transmission and HAC-MLW-F-T1/2-M2 power supply
4	10cm 915MHz rubber rod antenna 2PCS	HAC-MLW-F-T1/2-M2 antenna
5	RS232 to USB serial cable	HAC-MLW-F-T1-M2 data transmission adapter cable
6	QR code scanner	Scan the QR code label to get DeviceEui quickly (which is optional)
7	IR communication device	Parameters setting
8	USB extended cable	Extend infrared communication device

6.2. Device connection

6.2.1. Wireless communication device connection

- 1) HAC-MLW-F-T1-M2 device connection, 5V RS232 serial cable DB9 female with power interface connects to HAC-MLW-F-T1-M2, the other end of DB9 female interface transfers RS232 to USB serial cable to connect to the PC. The 5V RS232 serial cable adapter connects to 220V urban electricity.

- 2) HAC-MLW-F-T2-M2 device connection, 5V RS232 serial cable DB9 female with power interface connects to HAC-MLW-T2-M2, 5V RS232 serial cable adapter connects to 220V urban electricity (HAC-MLW-F-T2-M2 Please refer to 5.3 sample meter standard data collection for the placement location).
- 3) The QR code scanner is connected to the device, and the QR code scanner is connected to the PC.


6.2.2. Infrared communication device connection

- 1) use a USB extended cable to connect the infrared communication device to the PC

6.3. Meter data acquisition (wireless parameters configuration)

Place the HAC-MLW-F-T1-M2 and the standard water meter on the workstation, turn on the host computer and switch to the [Run meter Test] interface, use a magnet to trigger the standard water meter to report data, and wait for the remote end of the HAC-MLW-F-T2-M2 to return data. Adjust the distance between HAC-MLW-F-T2-M2 and the standard water meter so that the returned field strength value is around -80dBm. At this time, fix the position of HAC-MLW-F-T2-M2, and use the magnet to trigger the standard water meter to obtain 10 packets of remote data. The average of the field strength value of 10 packets' data is the standard field strength value. The standard field strength value is used in the supported software to judge qualified threshold value of the field strength.

It's shown as below,

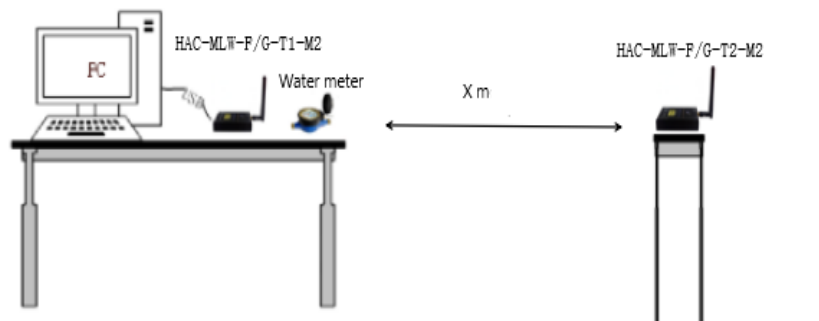

The interface of parameters setting is below:

The screenshot shows the iHAC-Tool-AFP-MLW_V1.0.4_20220104 software interface. The 'Parameter setting' tab is active. The interface is divided into several sections:

- Serial port configuration:** Includes checkboxes for 'Use remote', 'Base watch with control valve', 'Timing reporting parameters', and 'Use infrared communication'.
- Parameter setting:** Includes fields for 'Meter type' (Gas meter), 'Metering mode' (Single Hall), 'Pulse constant' (1 metering pulse is 10 liter), 'Maximum measurement value' (Maximum 9 digits), 'Current cumulative Unit: cubic meter' (0), 'Meter number' (2112000013), and 'Device Eui' (8334792112000012).
- Network access parameter setting:** Includes a checkbox for 'Modify the APPEY' and a field for 'New Device Eui' (8334792112000012).
- Valve and frequency deviation parameters:** Includes a checkbox for 'Valve and frequency deviation parameters', a field for 'Frequency deviation unit: 100Hz' (0), and a dropdown for 'Valve type' (Two-line valve).
- Reporting Parameter Settings:** Includes fields for 'Periodic reporting period(S):' (86400), 'Report the time point periodically(0):' (23), 'System time' (2022-01-19 14:52:40), and a checkbox for 'Synchronizing system time'.
- Timing setting:** Includes a dropdown for 'Timing setting' (30).

On the right side of the interface, there is a large green 'Qualified' label. Below it, a list of settings is shown with corresponding status labels:

- Network access parameter setting: Qualified
- Valve type and frequency deviation parameters: To be checked
- Parameter setting: Qualified
- Valve opening test: To be checked
- Valve closing test: To be checked
- Reporting Parameter Settings: Qualified
- RSST: Qualified

Obtain the value of remote field strength:

	Battery voltage(V)	Valve failure	Magnetic attack	Battery power	DER	Valve status	Metering failure	Historical magnetic attack	Remote flag	Trigger source	RSSI value(dBm)
▶	3.6	Normal	Normal	Normal	Normal	Open	Normal (Not ...	Normal	Remote data	Platform set...	-81
	3.6	Normal	Normal	Normal	Normal	Open	Normal (Not ...	Normal	Module data	Platform set...	-58
	3.6	Normal	Normal	Normal	Normal	Open	Normal (Not ...	Normal	Module data	Magnetic tri...	-59

6.4. Supported software

The software supports two communication methods, namely wireless communication and infrared communication. The software cannot use two communication methods at the same time, only one of them can be Used.

6.4.1. Software installation

Don't need to install the supported software.


Right-click the execute file (iHAC-Tool-AFP-MLW_V1.0.4_20220330.exe) on the desktop and run it with the privilege of administrator. iHAC-Tool-AFP-MLW_V1.0.4_20220330.exe

6.4.2. Interface - 【Serial port setting】

1. Module serial port configuration, the serial port is selected according to the actual situation (please check the serial port in the device manager), the baud rate is 9600 bps, and no check.
2. Scanner serial port configuration, there are two ways of scanner data interface: ①Serial port mode, configure it according to the actual situation of scanner; ②USB mode, do not need to configure the serial port parameters, just connect to the computer and use it.
3. The qualified field strength threshold value of the water meter and HAC-MLW-F-T2-M2 communication, the qualified range of field strength value can be obtained by sampling the standard water meter (the standard value method: trigger the standard water meter by a magnet to obtain 10 packets of remote data, take the average of the field strength values in the 10 packets of data). For more details, please refer to the standard data collection of the sample meter in Figure 7.
4. The voltage qualified value of battery is set to 3.6V.

5. Language setting: choose Chinese or English display interface and report data

It's shown as below:

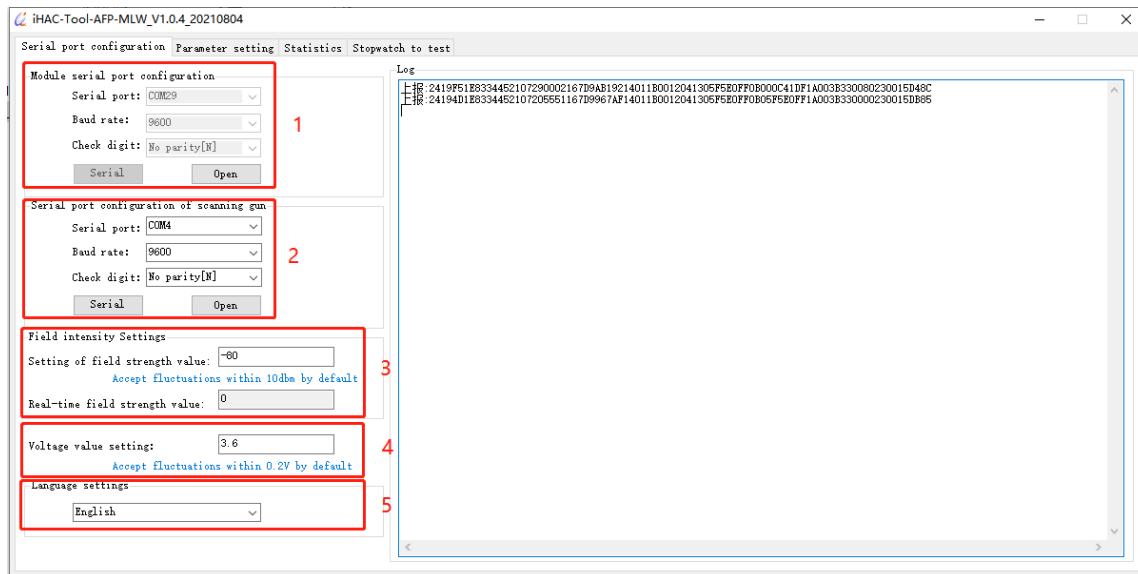

6.4.3 Interface - 【Parameters Setting】

- 1). "Use Remote", check "Use Remote" to enable the field strength value monitoring function of the fixed-distance communication between the water meter and HAC-MLW-T2-M2.
- 2). "The base meter with valve control", when it detects valve control, it will be executed, otherwise, it will not be executed.
- 5). "Parameters setting", preset water meter parameters, including meter type, measurement mode, pulse constant, maximum measurement value, current cumulative flow, meter number etc, among check "meter number automatically +1", the meter number automatically increase by 1 on the basis of the last set successfully, otherwise the meter number will remain unchanged.
- 6). "DeviceEui", the DeviceEui of the water meter to be tested, scan the QR code label of the water meter with the scanner to quickly obtain the DeviceEui of the water meter.
- 7). Network access parameters: preset DeviceEui, APPEUI, APPKEY of sample water meter. Among them, check "AppKEY transmitted or not", you can set DeviceEui, APPEUI, APPKEY, and if you don't transmit AppKEY, you can only set DeviceEui.
- 8). Valve and frequency deviation parameters: preset the valve type and frequency deviation of the sample meter. Check the "valve and frequency deviation parameters" to set the sample meter frequency deviation and valve type, and if you don't select valve and frequency deviation parameters", the valve type and frequency deviation parameters have been set at the factory, so there is no need to set under the normal condition.
- 9) Reporting parameter setting: preset the periodic reporting period of the sample meter, the time point of scheduled reporting, and the time of the sample meter. If "Synchronize the system time" is checked, the setting time is the current system time. Otherwise, the time of the sample meter can be customized.
- 10). Timing time setting: the time of the entire setting process after clicking the "Set" button.
- 11). After setting and presetting the parameters, click the "Setting" button to start the countdown. If the setting is not completed, the prompt "Failure, detection timeout" will be output on the right.
- 12). Real-time display of setting parameters and test results.

It's shown as below.

The screenshot shows the iHAC-Tool-AFP-MLW_V1.0.4_20220104 software interface. The 'Parameter setting' tab is active, displaying various configuration options. Red boxes and numbers highlight specific areas:

- 1**: Use remote (checked)
- 2**: Base watch with control valve (unchecked)
- 3**: Timing reporting parameters (checked)
- 4**: Use infrared communication (unchecked)
- 5**: Parameter setting section including Meter type (Gas meter), Metering mode (Single Hall), Pulse constant (1 metering pulse is 10 liter), Maximum measurement value (Maximum 9 digits), Current cumulative flow (0), Meter number (2201120001), and Device Eui (8334792201000001).
- 6**: Device Eui (8334792201000001)
- 7**: Network access parameter setting section including Modify the APPKEY (checked), New Device Eui (8123450000000001), APPKEY (4841432B4D4C57202003180000033479), and APPKEY (4841432B4D4C57202003180000033479).
- 8**: Valve and frequency deviation parameters section including Valve and frequency deviation parameters (unchecked), Frequency deviation unit (100Hz), Valve type (Two-line valve), and Reporting Parameter Settings (Periodic reporting period (S): 86400, Report the time point periodically (H): 0, System time (2022-01-19 14:59:33), and Synchronizing system time (checked)).
- 9**: Reporting Parameter Settings section including Periodic reporting period (S): 86400, Report the time point periodically (H): 0, System time (2022-01-19 14:59:33), and Synchronizing system time (checked).
- 10**: Timing setting (30)
- 11**: Setting button
- 12**: Network access parameter setting: To be checked, Valve type and frequency deviation parameters: To be checked, Parameter setting: To be checked, Valve opening test: To be checked, Valve closing test: To be checked, Reporting Parameter Settings: To be checked, RSSI: To be checked.

6.4.4. Interface - 【Data Statistics】

After the test is passed, the last reported data will be recorded (the data will not be recorded when the test is unqualified), and the recorded data will be generated into an Excel and stored in the "ExcelFile" file in the installation directory.

It's shown as below:

The screenshot shows the iHAC-Tool-AFP-MLW_V1.0.4_20210804 software interface. The 'Statistics' tab is active, displaying a table of recorded data. The table has the following columns: No. (Serial module data), Time, DeviceEui, Meter no., Pulse constant, Table type, Metering mode, Maximum measurement value (m³), Current cumulative flow (m³), and Battery voltage (V). The table contains 9 rows of data, with the first row highlighted in blue.

No. (Serial module data)	Time	DeviceEui	Meter no.	Pulse constant	Table type	Metering mode	Maximum measurement value (m³)	Current cumulative flow (m³)	Battery voltage (V)
9	2021-08-05 09:39:59	8333692105000003	2105000003	1 metering pulse is 1...	Water meter	Single Hall	99999.99	0	3.66
8	2021-08-05 09:25:35	8333692105000003	2105000003	1 metering pulse is 1...	Water meter	Single Hall	99999.99	0	3.6
7	2021-08-05 09:25:00	8333692105000003	2105000003	1 metering pulse is 1...	Water meter	Single Hall	99999.99	0	3.6
6	2021-08-05 09:24:15	8333692105000003	2105000008	1 metering pulse is 1...	Water meter	Single Hall	99999.99	0	3.6
5	2021-08-05 09:23:52	8333692105000003	2105000007	1 metering pulse is 1...	Water meter	Single Hall	99999.99	0	3.6
4	2021-08-05 09:22:12	8333692105000003	2105000006	1 metering pulse is 1...	Water meter	Single Hall	99999.99	0	3.6
3	2021-08-05 09:20:33	8333692105000003	2105000005	1 metering pulse is 1...	Water meter	Single Hall	99999.99	0	3.6
2	2021-08-05 09:15:14	8333692105000003	2105000004	1 metering pulse is 1...	Water meter	Single Hall	99999.99	0	3.6
1	2021-08-05 09:05:28	8333692105000003	2105000003	1 metering pulse is 1...	Water meter	Single Hall	99999.99	0	3.66

iHAC-Tool-AFP-MLW_V1.0.4_20210804 > ExcelFile

名称	修改日期	类型	大小
2020-06-30.xls	2020/6/30 14:27	XLS 工作表	10 KB
2020-08-27.xls	2020/8/27 9:00	XLS 工作表	6 KB
2020-11-17.xls	2020/11/17 17:30	XLS 工作表	7 KB
2021-01-09.xls	2021/1/9 16:14	XLS 工作表	9 KB
2021-05-17.xls	2021/5/17 10:25	XLS 工作表	6 KB
2021-05-20.xls	2021/5/20 17:11	XLS 工作表	6 KB
2021-08-03.xls	2021/8/3 20:44	XLS 工作表	43 KB
2021-08-04.xls	2021/8/4 10:11	XLS 工作表	12 KB


6.4.5 Interface- 【Running Meter Test】

Real-time display of data in the process of setting parameters, and supports valve control.

1). Valve control: fill in the DeviceEui number, click the button “valve open” or “valve close”, and then use a magnet to trigger the water meter to report data to achieve valve control.

2). Clear the data: click the button "Clear the Data" to clear the data displayed in the list.

It's shown as below:

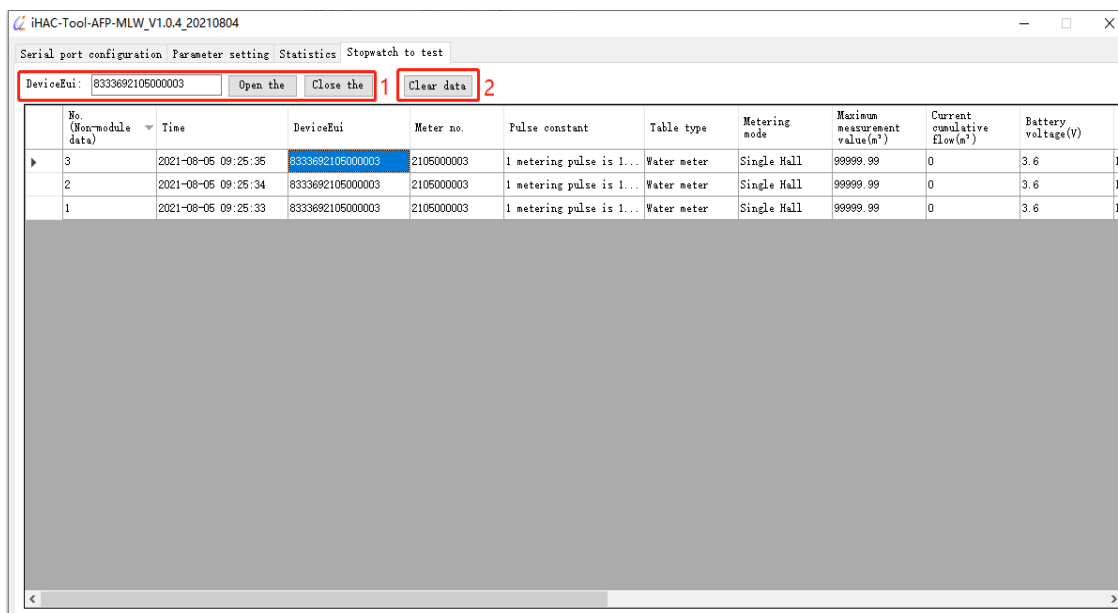

6.5.Production Test Flow

The production setting steps can be referred as below:

- 1). Check "Use remote" and "Use IR communication".
- 2). Preset the parameters of sample meter.
- 3). Use the scanner to scan the QR code label of meter to obtain DeviceEui, or manually enter it.
- 4). Align the IR device vertically with the IR transceiver diode of the sample meter, and the distance between them is less than 8CM (if it's wireless communication mode, it can skip this step).
- 5). Touch the button of water meter 2 times immediately after clicking "Settings" (it must be longer than 2S, and the second touch must be completed within 5S after the touch time is less than 2S at the first time).Trigger the water meter to report data and set the parameters. After the setting is completed, the corresponding prompt message will be output on the upper right.

It's shown as below:

Serial port configuration | **Parameter setting** | Statistics | Stopwatch to test

☒ Use remote
☐ Base watch with control valve
☒ Timing reporting parameters
☐ Use infrared communication

Parameter setting
Meter type Unit: no
Gas meter
Metering mode
Single Hall
Pulse constant
1 metering pulse is 10 liter:
Maximum measurement value
Maximum 9 digits
Current cumulative EUnit: cubic meter
0
Meter number ☒ Automatically add 1
2112000013
Device Eui (Get scan code by the scanning Gun)
8334792112000012

Network access parameter setting
☒ Modify the APPKEY
New Device Eui
8334792112000012
APPKEY
4841434D4C570001
APPKEY
4841432D4D4C57202003180000033479

Valve and frequency deviation parameters
☐ Valve and frequency deviation parameters
Frequency deviation unit :100Hz
0
Valve type
Two-line valve

Reporting Parameter Settings
Periodic reporting period(S):
86400
Report the time point periodically(H):
23
System time ☒ Synchronizing system time
2022-01-19 14:54:47
Timing setting
30
Setting

Qualified

Network access parameter setting: Qualified
Valve type and frequency deviation parameters: To be checked
Parameter setting: Qualified
Valve opening test: To be checked
Valve closing test: To be checked
Reporting Parameter Settings: Qualified
RSSI: Qualified

IR communication mode:

Serial port configuration | **Parameter setting** | Statistics | Stopwatch to test

☐ Use remote
☐ Base watch with control valve
☒ Timing reporting parameters
☒ Use infrared communication

Parameter setting
Meter type Unit: no
Gas meter
Metering mode
Single Hall
Pulse constant
1 metering pulse is 10 liter:
Maximum measurement value
Maximum 9 digits
Current cumulative EUnit: cubic meter
0
Meter number ☒ Automatically add 1
2112000013
Device Eui (Get scan code by the scanning Gun)
8334792112000012

Network access parameter setting
☒ Modify the APPKEY
New Device Eui
8334792112000012
APPKEY
4841434D4C570001
APPKEY
4841432D4D4C57202003180000033479

Valve and frequency deviation parameters
☐ Valve and frequency deviation parameters
Frequency deviation unit :100Hz
0
Valve type
Two-line valve

Reporting Parameter Settings
Periodic reporting period(S):
86400
Report the time point periodically(H):
23
System time ☒ Synchronizing system time
2022-01-19 14:55:28
Timing setting
30
Setting

Qualified

Network access parameter setting: Qualified
Valve type and frequency deviation parameters: To be checked
Parameter setting: Qualified
Valve opening test: To be checked
Valve closing test: To be checked
Reporting Parameter Settings: Qualified
RSSI: To be checked

6.6. Precautions for production setup

1) Touch the button to report data twice. It must be greater than 2S at the first touch, and it must be completed within 5S at the second touch after the first touch and the touch time is less than 2S, otherwise the data reported by the touch is invalid

2). DeviceEui is the only address for communication between meter and the supported software. The DeviceEui entered by the supported software must be consistent with the DeviceEui of meter.

3). When the meter is connected to the Internet (the red light is always on) or when re-transmitting, the function of triggering “data report” is invalid.

4). There is a fault flag in the data reported by the meter, and the parameters can be set only after the fault flag is cleared.

5). Infrared communication will affect the communication between the product and infrared tools under strong light. It is necessary to avoid performing infrared communication under strong light.

6). Use wireless communication to set the parameters, try to avoid multi-station simultaneous production

settings, and the production settings will interfere with each other. The more stations, the greater the interference, and the greater the probability of parameter failure.

7). When modifying APPKEY, the default value of APPEUI must be modified. The default value of APPEUI is 4841434D4C570001.


7. Infrared upgrade function

7.1 Supported software

7.1.1 Software installation


Don't need to install the supported software.

Right-click the executable file (iHAC-TOOL-UP-MLW.exe) on the desktop and run it with administrator privileges.



7.1.2 Software interface

- 1). Serial port configuration: select the corresponding tool port according to the actual situation.
- 2). Program loading: click "Read" to load the upgrade file (.mup).
- 3). Program upgrade: After clicking "Upgrade", the software starts to perform the upgrade function. If it fails to communicate with module within 10 seconds, it will exit the state of upgrade waiting .
- 4). Information display column: it shows upgrade status and information prompts in real time.
- 5). Version display column: it shows the current version information of module.

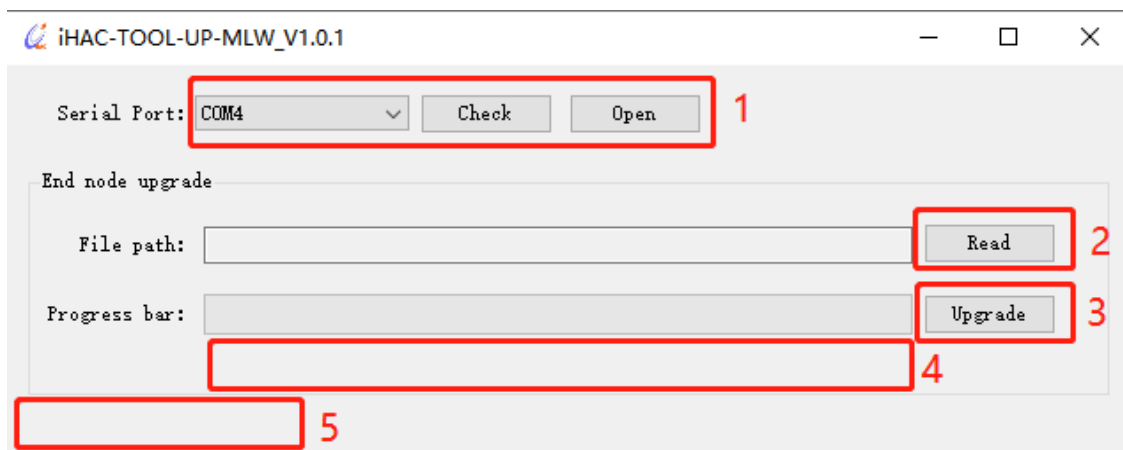

7.2. Upgrading Flow

The upgrading steps are as follows:


- 1). Select the corresponding tool port according to the actual situation.
- 2). Click "Read" to load the upgrade file (.mup).
- 3). Align the IR communication device vertically with the IR transceiver diode of the sample meter, and the distance between them is less than 8CM.
- 4). After clicking "Upgrade", immediately touch the button of meter twice (it must be longer than 2S at the first touch, and it must be completed within 5S at the second touch after the first touch and it's less than 2S) to

WRW-I1 pulse reader

make the meter enter IR communication mode.

5). Wait for the upgrade procedure to be completed. After the upgrade is completed, the corresponding prompt information will be output in the information display column.

It's shown as below:

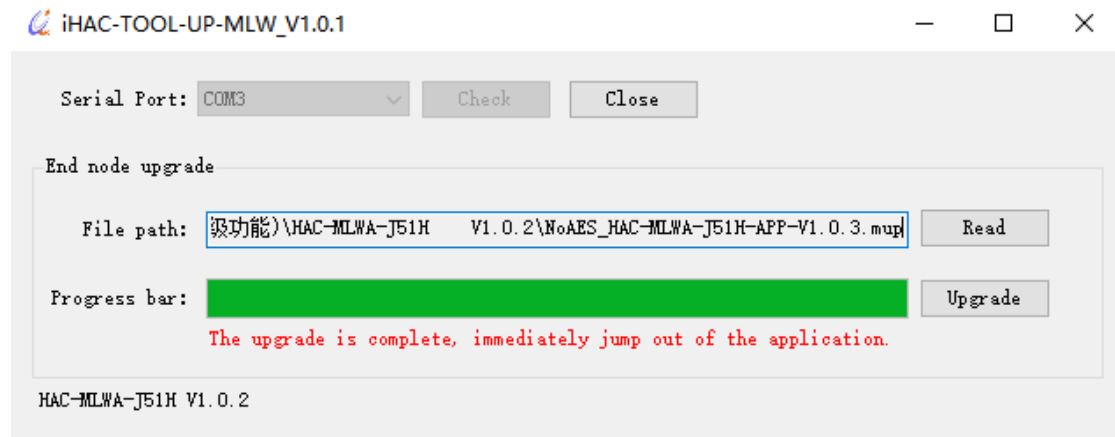

Disclaimers

The copyright of the product text and related software stated in this manual belongs to Shenzhen HAC Telecom Technology Co., Ltd., and its property rights are absolutely protected by national laws. Without the authorization of the company, other companies, units, agents and individuals are not allowed to illegally use and copy. Shenzhen HAC Telecom Technology Co., Ltd. reserves the right to revise this user manual at any time without notice.

Sales and service

You can contact the sales staff of Shenzhen HAC Telecom Technology Co., Ltd. to purchase modules and development kits.



Address: 9th Floor, Block A, Building 1, International Innovation Valley, Xingke 1st street, Nanshan district, Shenzhen, Guangdong

Telephone: 0755-23981076/1077/1078/1079

Service hotline: 18565749800

Sales Manager: liyy@rf-module-china.com

Website: www.haccomm.cn



FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.