



TEST REPORT

Report No.: **CTC2025499904**

FCC ID.....: **WNA-HPR502**

Applicant: **Shenzhen Skyworth Digital Technology Co.,LTD.**

Address.....: 14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China

Manufacturer.....: Shenzhen Skyworth Digital Technology Co.,LTD.

Address.....: 14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China

Product Name: **TV STICK, Streaming Stick, FHD Streaming Stick**

Trade Mark: SKYWORTH, STRONG, QVWI, MECOOL, BLAUPUNKT

Model/Type reference.....: HPR502

Listed Model(s).....: HPR5G, HPR504, MEgo1 2K, MEgo1, MEgo1 MINI, BPTV10G, HPR500, HPR503, LEAP-UNA+, LEAP-UNA+ UK, HPR501, HPR505, HPR506

Standard: **FCC CFR Title 47 Part 15 Subpart E Section 15.407**

Test Report Form No: CTC-TR-062_A2

Master TRF: Dated 2025-05-12

Date of receipt of test sample.....: Aug. 08, 2025

Date of testing.....: Aug. 15, 2025 ~ Aug. 31, 2025

Date of issue.....: Sep. 22, 2025

Result.....: **PASS**

Compiled by:

(Printed name+signature)

Lucy Lan

Supervised by:

(Printed name+signature)

Eric Zhang

Approved by:

(Printed name+signature)

Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents****Page**

1. TEST SUMMARY	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY.....	6
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION.....	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. ACCESSORY EQUIPMENT INFORMATION.....	8
2.4. OPERATION STATE	9
2.5. MEASUREMENT INSTRUMENTS LIST	12
3. TEST ITEM AND RESULTS	14
3.1. CONDUCTED EMISSION	14
3.2. RADIATED EMISSION	17
3.3. BAND EDGE EMISSIONS	60
3.4. BANDWIDTH	108
3.5. PEAK OUTPUT POWER.....	171
3.6. POWER SPECTRAL DENSITY	175
3.7. FREQUENCY STABILITY	204
3.8. ANTENNA REQUIREMENT	213
3.9. DYNAMIC FREQUENCY SELECTION.....	214

CTC Laboratories, Inc.Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict,
Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of China Inspection And Testing
Society : yz.cncaq.com



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): for 802.11a/n/ac/ax, the test procedure follows the FCC KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

[ANSI C63.10-2020](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2025499904	Sep. 22, 2025	Original



1.3. Test Description

FCC Part 15 Subpart E (15.407)			
Test Item	Standard Section	Result	Test Engineer
Antenna Requirement	15.203	Pass	Ewen
Conducted Emission	15.207	Pass	Ewen
Band Edge Emissions	15.407(b)	Pass	Ewen
26dB Bandwidth & 99% Bandwidth	15.407(a)	Pass	Ewen
6dB Bandwidth (only for UNII-3)	15.407(e)	Pass	Ewen
Peak Output Power	15.407(a)	Pass	Ewen
Power Spectral Density	15.407(a)	Pass	Ewen
Transmitter Radiated Spurious Emission	15.407(b) & 15.209	Pass	Ewen
Frequency Stability	15.407(g)	Pass	Ewen
Dynamic Frequency Selection (DFS)	15.407(h)	Pass	Ewen
Automatically Discontinue Transmission	15.407(c)	Pass	Note 3

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.
3. During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
Emission Bandwidth	$\pm 0.0196\%$	(1)
Maximum Conduct Output Power	$\pm 0.766\text{dB}$	(1)
Power Spectral Density	$\pm 1.22\text{dB}$	(1)
Band Edge Measurements	$\pm 1.328\text{dB}$	(1)
Unwanted Emissions Measurement	9kHz-1GHz: $\pm 0.746\text{dB}$ 1GHz-26GHz: $\pm 1.328\text{dB}$	(1)
Frequency Stability	$\pm 2.76\%$	(1)
Conducted Emissions 9kHz~30MHz	$\pm 3.08\text{ dB}$	(1)
Radiated Emissions 30~1000MHz	$\pm 4.51\text{ dB}$	(1)
Radiated Emissions 1~18GHz	$\pm 5.84\text{ dB}$	(1)
Radiated Emissions 18~40GHz	$\pm 6.12\text{ dB}$	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.6. Environmental Conditions

Normal Condition	Temperature	15 °C to 35 °C
	Relative Humidity	20 % to 75 %
	Air Pressure	101 kPa
	Voltage	The normal test voltage for the equipment shall be the nominal voltage for which the equipment was designed.
Extreme Condition	Temperature	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.
	Voltage	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.

Normal Condition	T_N =Normal Temperature	25 °C
Extreme Condition	T_L =Lower Temperature	0 °C
	T_H =Higher Temperature	45 °C

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Shenzhen Skyworth Digital Technology Co.,LTD.
Address:	14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China
Manufacturer:	Shenzhen Skyworth Digital Technology Co.,LTD.
Address:	14/F Unit A. Skyworth Building, Gaoxin Ave.1s., Nanshan District, Shenzhen, China
Factory:	Shenzhen Skyworth Digital Technology Co.,LTD. Baoan Factory
Address:	2-5F,Integration Multi-Storied Building, Skyworth Science and Technology Industrial Park, Tangtou Industrial Zone, Shiyan Street, Baoan District, Shenzhen city, China.

2.2. General Description of EUT

Product Name:	TV STICK, Streaming Stick, FHD Streaming Stick				
Trade Mark:	SKYWORTH, STRONG, QVWI, MECOOL, BLAUPUNKT				
Model/Type reference:	HPR502				
Listed Model(s):	HPR5G, HPR504, MEgo1 2K, MEgo1, MEgo1 MINI, BPTV10G, HPR500, HPR503, LEAP-UNA+, LEAP-UNA+ UK, HPR501, HPR505, HPR506				
Model Difference:	All models are same with electrical parameters and internal circuit structure, but only differ in model name and product appearance.				
Sample ID:	CTC250806-003-S004				
Power Supply:	DC 5V 1A from AC/DC Adapter				
Adapter Model 1	AD-D0930500100US01 Input: 100-240V~ 50/60Hz 0.2A Output: 5Vdc/1A				
Adapter Model 2	UT-236A-5100 Input: 100-240V~ 50/60Hz 0.2A Output: 5Vdc/1A				
Hardware Version:	5800-2AHPR5G-1202				
Software Version:	Android 12				
5G Wi-Fi					
Operation Band:	☒ U-NII-1	☒ U-NII-2A	☒ U-NII-2C	☒ U-NII-3	
Operation Frequency:	U-NII-1	5150MHz~5250MHz			
	U-NII-2A	5250MHz~5350MHz			
	U-NII-2C	5470MHz~5725MHz			
	U-NII-3	5725MHz~5850MHz			
Support Bandwidth:	802.11a	☒ 20MHz			

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



	802.11n	☒ 20MHz	☒ 40MHz		
	802.11ac	☒ 20MHz	☒ 40MHz	☒ 80MHz	
Modulation:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)				
Antenna Type:	PCB Antenna				
Antenna Gain:	Ant1: 5.80dBi; Ant2: 4.38dBi				

2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	150cm
Test Software Information			
Name	Version	/	/
SecureCRT	/	/	/



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting.

Operation Frequency List:

Operating Band	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	36	5180	38	5190	42	5210
	40	5200				
	44	5220	46	5230		
	48	5240				
U-NII-2A	52	5260	54	5270	58	5290
	56	5280				
	60	5300	62	5310		
	64	5320				
U-NII-2C	100	5500	102	5510	106	5530
	104	5520				
	108	5540	110	5550		
	112	5560				
	116	5580	118	5590	122	5610
	120	5600				
	124	5620	126	5630		
	128	5640				
	132	5660	134	5670		
	136	5680				
	140	5700				
U-NII-3	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825				



Test channel is below:

Operating Band	Test Channel	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	CH _L	36	5180	38	5190	/	/
	CH _M	40	5200	/	/	42	5210
	CH _H	48	5240	46	5230	/	/
U-NII-2A	CH _L	52	5260	54	5270	/	/
	CH _M	56	5280	/	/	58	5290
	CH _H	64	5320	62	5310	/	/
U-NII-2C	CH _L	100	5500	102	5510	106	5530
	CH _M	116	5580	110	5550	/	/
	CH _H	140	5700	134	5670	122	5610
U-NII-3	CH _L	149	5745	151	5755	/	/
	CH _M	157	5785	/	/	155	5775
	CH _H	165	5825	159	5795	/	/

Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)
1	NA	NA	PCB Antenna	IPEX	5.80
2	NA	NA	PCB Antenna	IPEX	4.38

This EUT supports MIMO 2X2 with the unequal antenna gain, and any transmit signals are correlated with each other.

According to KDB 662911 D01, Directional Gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N]$ dBi, that is Directional Gain = $10 \log[((10^{(5.80/20)} + 10^{(4.38/20)})^2) / 2] = 8.13$ dBi. So, output power limit of UNII-3 is $30 - 8.13 + 6 = 27.87$ dBm, and output power limit of UNII-1 and UNII-2A and UNII-2C is $23.98 - 8.13 + 6 = 21.85$ dBm. The power spectral density limit of UNII-1 and UNII-2A and UNII-2C is $11 - 8.13 + 6 = 8.74$ dBm/MHz, and power spectral density limit of UNII-3 is $30 - 8.26 + 6 = 27.74$ dBm/500kHz.

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Test Mode	Data Rate (worst mode)
802.11a	6Mbps
802.11n(HT20)/ 802.11n(HT40)	HT-MCS0
802.11ac(VHT20)/ 802.11ac(VHT40)/ 802.11ac(VHT80)	VHT-MCS0

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
The measurements for Output Power are tested, the worst case is IEEE 802.11a mode, IEEE 802.11n(HT20) mode, IEEE 802.11n(HT40) mode, IEEE 802.11ac(VHT80) mode, only the worst cases are documented for other test items.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.
For DFS test items:
The EUT has been tested under test mode condition. The Applicant provides software to control the EUT for staying in DFS mode for testing.



2.5. Measurement Instruments List

Radiated emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 25, 2024	Dec. 24, 2025
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 26, 2024	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 13, 2024	Dec. 12, 2025
4	Broadband Amplifier	Schwarzbeck	BBV9743B	259	Dec. 13, 2024	Dec. 12, 2025
5	Mirowave Broadband Amplifier	Schwarzbeck	BBV9718C	111	Dec. 13, 2024	Dec. 12, 2025
6	RE33L-001	COMM	/	014 (9kHz-1GHz)	Feb. 09, 2025	Feb. 08, 2026
7	RE33L-002	COMM	/	015 (9kHz-1GHz)	Feb. 09, 2025	Feb. 08, 2026
8	RE33H-001	SUHB SUCOFLEX	/	016 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
9	RE33H-002	HUBENR	/	017 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
10	RE33H-003	HUBENR	/	018 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
11	RE33H-003	HUBENR	/	019 (18GHz-40GHz)	Feb. 09, 2025	Feb. 08, 2026
12	3m chamber 3	YIHENG	EE106	/	Aug. 29, 2023	Aug. 28, 2026
13	SHF-EHF Horn Antenna	Schwarzbeck	BBHA 9170	013551	Dec. 13, 2024	Dec. 12, 2025
14	Low noise Amplifier	Tonscend	TAP180040048	AP24C8060348	Dec. 13, 2024	Dec. 12, 2025
Test Software						
Name		Manufacturer		Software Version		
EZ-EMC		FARA		FA-03A2		

Conducted emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	LISN	R&S	ENV216	101112	Dec. 13, 2024	Dec. 12, 2025
2	LISN	R&S	ENV216	101113	Dec. 13, 2024	Dec. 12, 2025
3	EMI Test Receiver	R&S	ESCI	100524	Dec. 13, 2024	Dec. 12, 2025
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 13, 2024	Dec. 12, 2025
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 13, 2024	Dec. 12, 2025
6	CE-001	COMM	/	001	Feb. 09, 2025	Feb. 08, 2026
Test Software						
Name		Manufacturer		Software Version		
EMC32		R&S		6.10.10		

RF Test System – SRD						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101654	Dec. 13, 2024	Dec. 12, 2025
2	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 13, 2024	Dec. 12, 2025
3	PSG Analog Signal	Agilent	E8257D	MY46521908	Dec. 13, 2024	Dec. 12, 2025

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



	Generator					
4	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 25, 2025	Mar. 24, 2026
5	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 25, 2025	Mar. 24, 2026
6	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 13, 2024	Dec. 12, 2025
7	RF Control Unit	Tonscend	JS0806-2	/	Mar. 25, 2025	Mar. 24, 2026
8	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 25, 2025	Mar. 24, 2026
9	RF Cable	HUBER+SUHNER	SUCOFLEX101 PE	RF-08	Apr. 16, 2025	Apr. 15, 2026
Test Software						
Name		Manufacturer		Software Version		
JS1120-3		Tonscend		V2.6.88.0346		

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

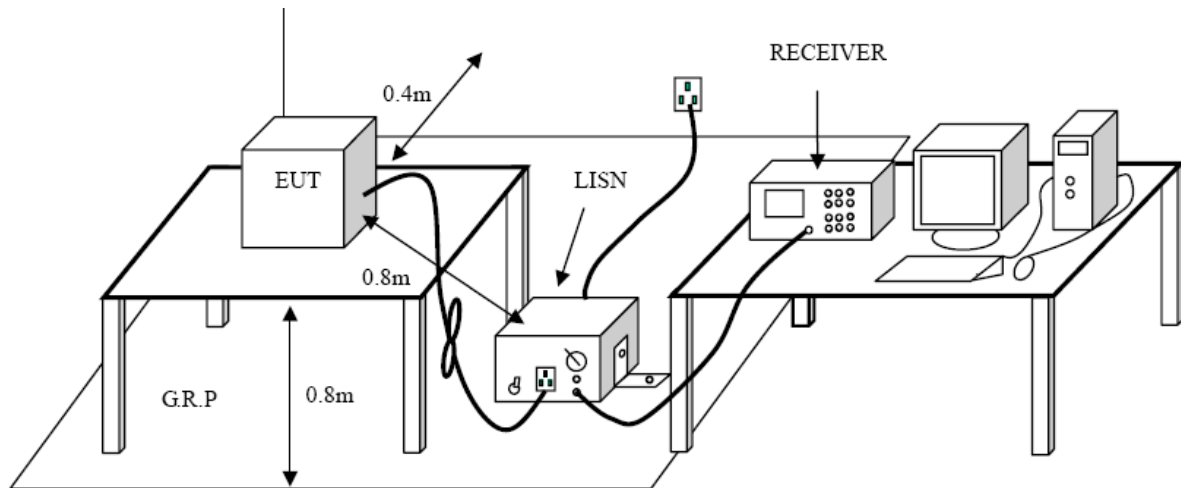

Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

**Test Result**

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported

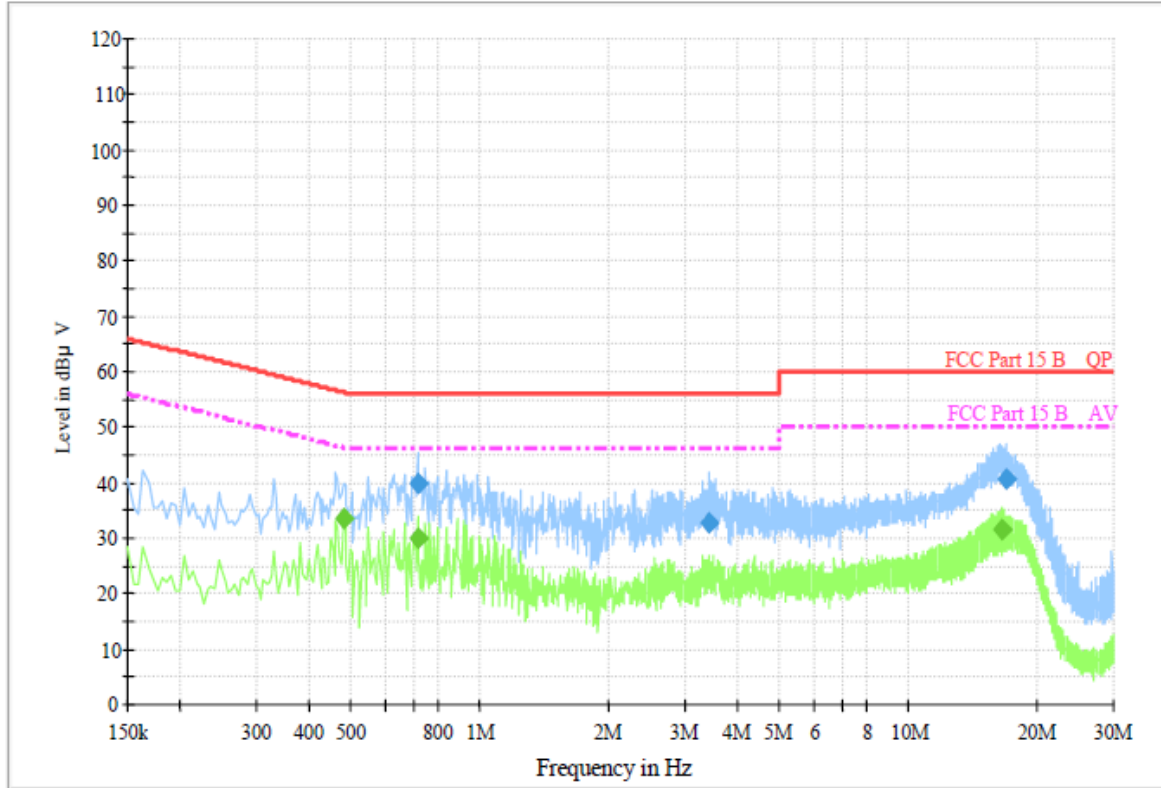**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.712500	39.9	1000.00	9.000	On	L1	9.6	16.1	56.0	
3.421500	32.6	1000.00	9.000	On	L1	9.4	23.4	56.0	
16.782000	40.7	1000.00	9.000	On	L1	9.8	19.3	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.478500	33.5	1000.00	9.000	On	L1	9.4	12.9	46.4	
0.712500	30.1	1000.00	9.000	On	L1	9.6	15.9	46.0	
16.395000	31.5	1000.00	9.000	On	L1	9.8	18.5	50.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported

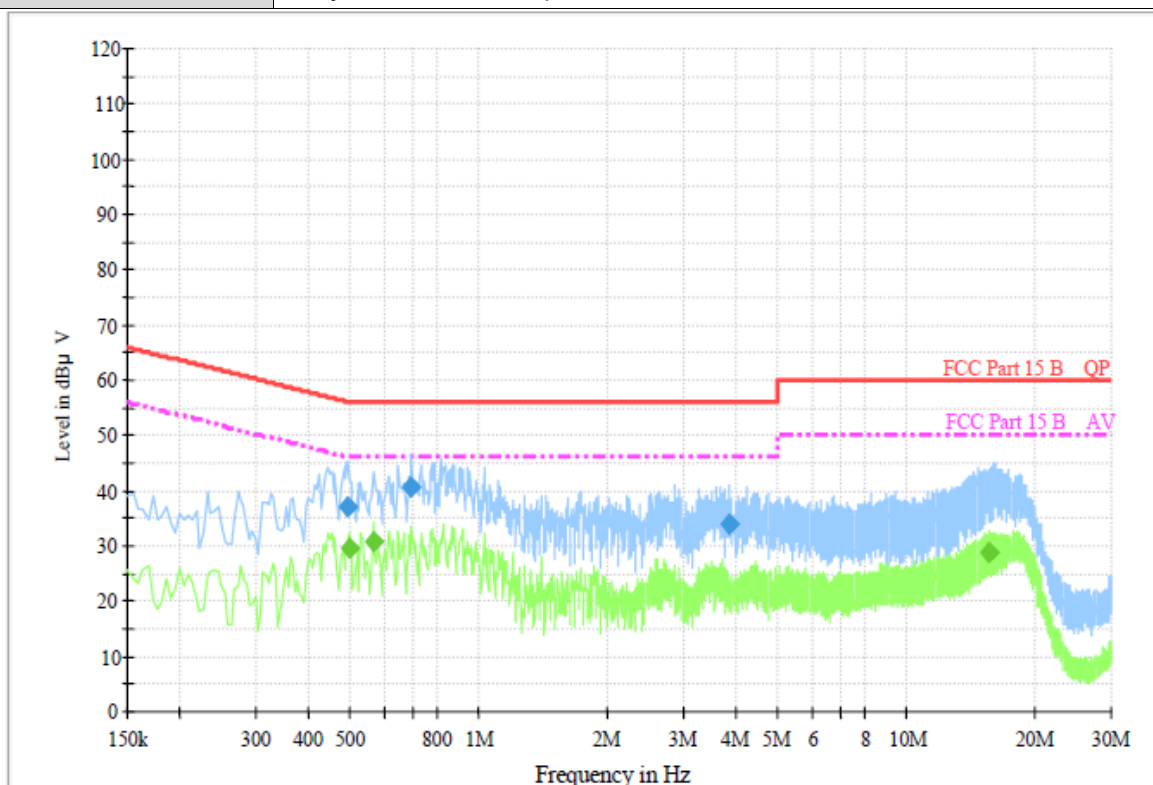

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.492000	37.1	1000.00	9.000	On	N	9.6	19.0	56.1	
0.694500	40.8	1000.00	9.000	On	N	9.3	15.2	56.0	
3.844500	33.9	1000.00	9.000	On	N	9.5	22.1	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.496500	29.4	1000.00	9.000	On	N	9.6	16.7	46.1	
0.564000	30.9	1000.00	9.000	On	N	9.5	15.1	46.0	
15.594000	28.8	1000.00	9.000	On	N	9.6	21.2	50.0	

Emission Level = Read Level + Correct Factor



3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBμV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBμV/m)=20log Emission Level (μV/m).

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart E Section 15. 407(b)

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27 (Note 2)	68.2
	10 (Note 2)	105.2
	15.6 (Note 2)	110.8
	27 (Note 2)	122.2

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts).

2. According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com


Test Configuration

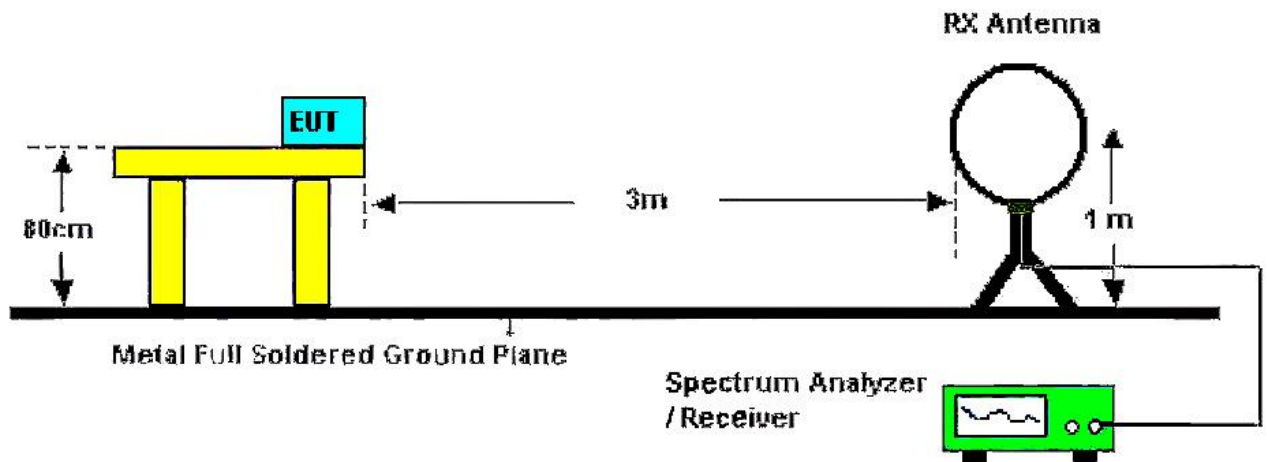

Below 30MHz Test Setup

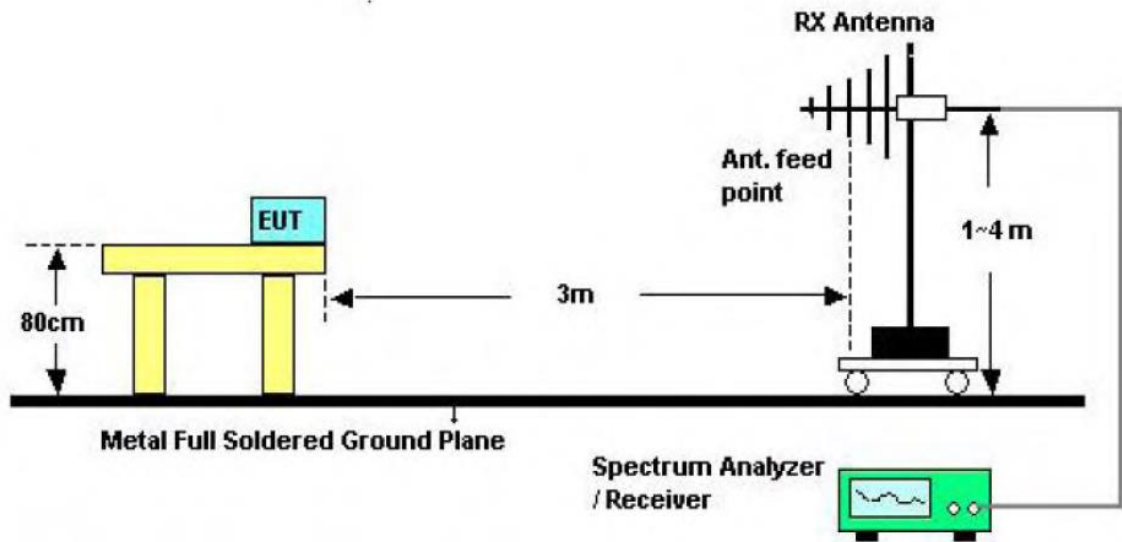

30-1000MHz Test Setup

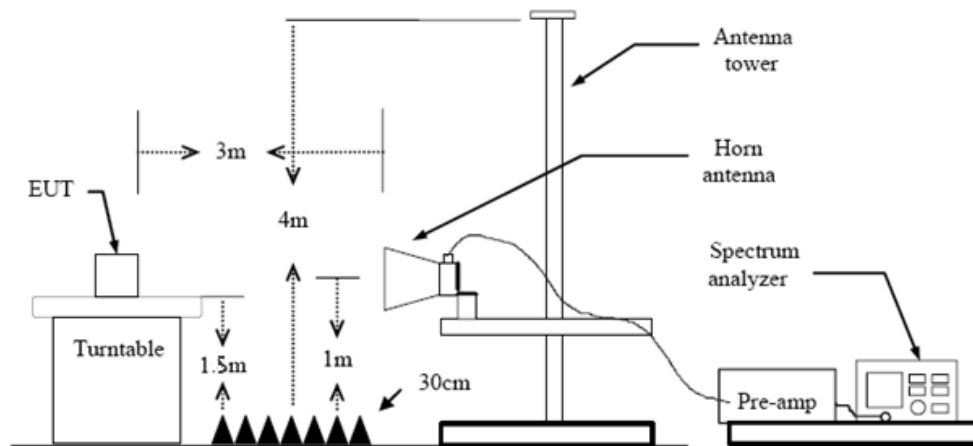

Above 1GHz Test Setup



Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz:
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz:
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max holdIf the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- (5) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.
Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 kHz~30 MHz


From 9 kHz to 30 MHz: The conclusion is PASS.

- Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Pre-scan all antenna, only show the test data for worse case antenna on the test report.



30MHz-1GHz

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	Only worse case is reported.

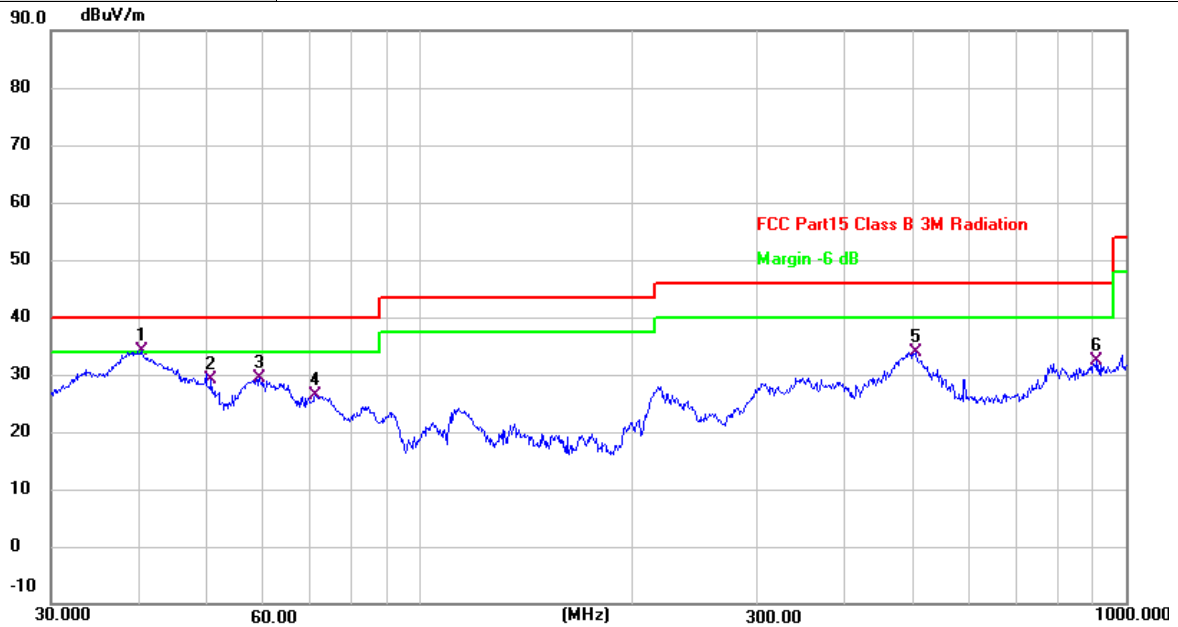


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	40.2756	52.36	-18.28	34.08	40.00	-5.92	QP
2	50.5859	47.34	-18.20	29.14	40.00	-10.86	QP
3	59.2324	48.56	-19.24	29.32	40.00	-10.68	QP
4	71.0803	47.03	-20.76	26.27	40.00	-13.73	QP
5	502.9395	45.50	-11.60	33.90	46.00	-12.10	QP
6	909.6666	37.20	-4.82	32.38	46.00	-13.62	QP

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	Only worse case is reported.

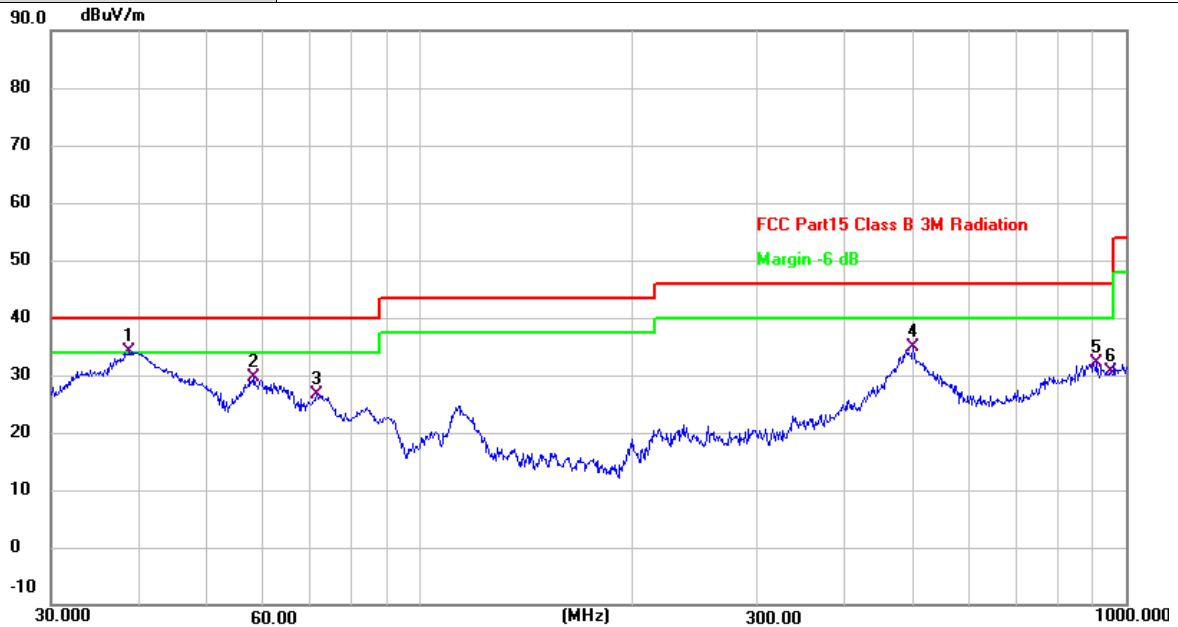

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	38.7518	52.54	-18.31	34.23	40.00	-5.77	QP
2	58.2030	48.75	-19.07	29.68	40.00	-10.32	QP
3	71.3300	47.41	-20.77	26.64	40.00	-13.36	QP
4	499.4247	46.45	-11.68	34.77	46.00	-11.23	QP
5	909.6667	37.06	-4.82	32.24	46.00	-13.76	QP
6	952.0937	34.26	-3.68	30.58	46.00	-15.42	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Above 1GHz

Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10359.528	46.68	6.69	53.37	74.00	-20.63	peak
2 *	10359.755	33.08	6.69	39.77	54.00	-14.23	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10359.999	47.49	6.69	54.18	74.00	-19.82	peak
2 *	10359.999	33.51	6.69	40.20	54.00	-13.80	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10400.416	33.36	6.79	40.15	54.00	-13.85	AVG
2	10400.540	47.36	6.79	54.15	74.00	-19.85	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10400.590	32.39	6.79	39.18	54.00	-14.82	AVG
2	10400.610	46.06	6.79	52.85	74.00	-21.15	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10480.680	34.27	6.97	41.24	54.00	-12.76	AVG
2	10481.200	46.48	6.98	53.46	74.00	-20.54	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10480.262	46.26	6.97	53.23	74.00	-20.77	peak
2 *	10480.306	32.68	6.97	39.65	54.00	-14.35	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10359.168	47.29	6.69	53.98	74.00	-20.02	peak
2 *	10359.874	33.52	6.69	40.21	54.00	-13.79	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10359.904	47.34	6.69	54.03	74.00	-19.97	peak
2 *	10360.238	33.26	6.69	39.95	54.00	-14.05	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10399.346	32.66	6.78	39.44	54.00	-14.56	AVG
2	10399.451	46.33	6.78	53.11	74.00	-20.89	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10399.078	32.52	6.78	39.30	54.00	-14.70	AVG
2	10400.606	45.89	6.79	52.68	74.00	-21.32	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10479.427	33.12	6.97	40.09	54.00	-13.91	AVG
2	10480.011	46.91	6.97	53.88	74.00	-20.12	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10479.819	32.60	6.97	39.57	54.00	-14.43	AVG
2	10480.650	46.19	6.97	53.16	74.00	-20.84	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10379.296	32.68	6.74	39.42	54.00	-14.58	AVG
2	10379.590	46.22	6.74	52.96	74.00	-21.04	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10379.402	32.99	6.74	39.73	54.00	-14.27	AVG
2	10379.506	46.83	6.74	53.57	74.00	-20.43	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10460.259	32.81	6.93	39.74	54.00	-14.26	AVG
2	10460.872	46.54	6.93	53.47	74.00	-20.53	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10459.384	33.03	6.93	39.96	54.00	-14.04	AVG
2	10459.546	46.59	6.93	53.52	74.00	-20.48	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10420.270	33.12	6.83	39.95	54.00	-14.05	AVG
2	10420.277	46.49	6.83	53.32	74.00	-20.68	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10419.795	46.58	6.83	53.41	74.00	-20.59	peak
2 *	10420.146	33.72	6.83	40.55	54.00	-13.45	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10519.460	33.89	7.05	40.94	54.00	-13.06	AVG
2	10520.567	48.10	7.05	55.15	74.00	-18.85	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10520.013	45.43	7.05	52.48	74.00	-21.52	peak
2 *	10520.032	31.88	7.05	38.93	54.00	-15.07	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10559.560	47.84	7.10	54.94	74.00	-19.06	peak
2 *	10560.460	36.31	7.10	43.41	54.00	-10.59	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10560.117	32.22	7.10	39.32	54.00	-14.68	AVG
2	10560.270	45.85	7.10	52.95	74.00	-21.05	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10640.650	48.63	7.22	55.85	74.00	-18.15	peak
2 *	10640.890	37.47	7.22	44.69	54.00	-9.31	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10640.344	31.81	7.22	39.03	54.00	-14.97	AVG
2	10640.382	46.31	7.22	53.53	74.00	-20.47	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10519.850	46.09	7.05	53.14	74.00	-20.86	peak
2 *	10519.883	32.30	7.05	39.35	54.00	-14.65	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10519.331	45.62	7.05	52.67	74.00	-21.33	peak
2 *	10519.794	31.79	7.05	38.84	54.00	-15.16	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10559.002	32.48	7.10	39.58	54.00	-14.42	AVG
2	10560.451	45.88	7.10	52.98	74.00	-21.02	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10559.269	45.55	7.10	52.65	74.00	-21.35	peak
2 *	10559.778	32.21	7.10	39.31	54.00	-14.69	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.390	45.57	7.22	52.79	74.00	-21.21	peak
2 *	10639.461	32.00	7.22	39.22	54.00	-14.78	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10639.045	45.05	7.22	52.27	74.00	-21.73	peak
2 *	10640.360	31.82	7.22	39.04	54.00	-14.96	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10539.139	45.83	7.08	52.91	74.00	-21.09	peak
2 *	10540.227	32.63	7.08	39.71	54.00	-14.29	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10539.139	45.83	7.08	52.91	74.00	-21.09	peak
2 *	10540.227	32.63	7.08	39.71	54.00	-14.29	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10619.320	46.08	7.19	53.27	74.00	-20.73	peak
2 *	10619.866	32.18	7.19	39.37	54.00	-14.63	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10619.320	46.08	7.19	53.27	74.00	-20.73	peak
2 *	10619.866	32.18	7.19	39.37	54.00	-14.63	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10580.320	45.76	7.13	52.89	74.00	-21.11	peak
2 *	10580.632	32.01	7.13	39.14	54.00	-14.86	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10579.728	32.69	7.13	39.82	54.00	-14.18	AVG
2	10580.014	45.81	7.13	52.94	74.00	-21.06	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10996.232	48.16	7.72	55.88	74.00	-18.12	peak
2 *	10996.248	34.73	7.72	42.45	54.00	-11.55	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11000.227	45.27	7.72	52.99	74.00	-21.01	peak
2 *	11000.227	34.33	7.72	42.05	54.00	-11.95	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11160.480	33.30	7.50	40.80	54.00	-13.20	AVG
2	11160.590	46.83	7.50	54.33	74.00	-19.67	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11160.091	46.69	7.50	54.19	74.00	-19.81	peak
2 *	11160.245	33.00	7.50	40.50	54.00	-13.50	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11399.460	32.15	7.42	39.57	54.00	-14.43	AVG
2	11399.640	46.07	7.42	53.49	74.00	-20.51	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11399.232	32.00	7.42	39.42	54.00	-14.58	AVG
2	11400.946	45.74	7.42	53.16	74.00	-20.84	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10999.776	47.84	7.72	55.56	74.00	-18.44	peak
2 *	11000.674	34.49	7.72	42.21	54.00	-11.79	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10999.752	34.52	7.72	42.24	54.00	-11.76	AVG
2	11000.206	48.03	7.72	55.75	74.00	-18.25	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11159.227	33.21	7.50	40.71	54.00	-13.29	AVG
2	11160.534	47.12	7.50	54.62	74.00	-19.38	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11159.157	46.59	7.50	54.09	74.00	-19.91	peak
2 *	11159.746	33.04	7.50	40.54	54.00	-13.46	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11399.346	31.93	7.42	39.35	54.00	-14.65	AVG
2	11399.701	45.72	7.42	53.14	74.00	-20.86	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11399.154	45.62	7.42	53.04	74.00	-20.96	peak
2 *	11399.397	31.84	7.42	39.26	54.00	-14.74	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11019.349	47.69	7.70	55.39	74.00	-18.61	peak
2 *	11020.648	33.73	7.70	41.43	54.00	-12.57	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11019.118	34.15	7.70	41.85	54.00	-12.15	AVG
2	11020.862	47.48	7.70	55.18	74.00	-18.82	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11099.086	47.85	7.62	55.47	74.00	-18.53	peak
2 *	11099.573	33.47	7.62	41.09	54.00	-12.91	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11099.122	46.84	7.62	54.46	74.00	-19.54	peak
2 *	11099.843	33.76	7.62	41.38	54.00	-12.62	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11339.235	32.42	7.42	39.84	54.00	-14.16	AVG
2	11340.704	45.94	7.42	53.36	74.00	-20.64	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11339.554	32.70	7.42	40.12	54.00	-13.88	AVG
2	11340.394	45.74	7.42	53.16	74.00	-20.84	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11059.018	47.37	7.66	55.03	74.00	-18.97	peak
2 *	11060.365	33.53	7.66	41.19	54.00	-12.81	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11059.469	34.44	7.66	42.10	54.00	-11.90	AVG
2	11060.699	47.23	7.66	54.89	74.00	-19.11	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11219.999	46.02	7.42	53.44	74.00	-20.56	peak
2 *	11220.000	32.99	7.42	40.41	54.00	-13.59	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11219.589	46.59	7.42	54.01	74.00	-19.99	peak
2 *	11219.949	33.18	7.42	40.60	54.00	-13.40	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11490.489	45.96	7.42	53.38	74.00	-20.62	peak
2 *	11490.640	31.87	7.42	39.29	54.00	-14.71	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11489.683	31.52	7.42	38.94	54.00	-15.06	AVG
2	11490.019	44.88	7.42	52.30	74.00	-21.70	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11569.216	44.70	7.40	52.10	74.00	-21.90	peak
2 *	11570.150	31.21	7.40	38.61	54.00	-15.39	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11569.562	30.82	7.40	38.22	54.00	-15.78	AVG
2	11570.506	44.54	7.40	51.94	74.00	-22.06	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11650.940	44.93	7.37	52.30	74.00	-21.70	peak
2 *	11651.624	30.73	7.37	38.10	54.00	-15.90	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11650.474	44.14	7.37	51.51	74.00	-22.49	peak
2 *	11650.712	30.42	7.37	37.79	54.00	-16.21	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11490.205	45.65	7.42	53.07	74.00	-20.93	peak
2 *	11490.805	31.52	7.42	38.94	54.00	-15.06	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11489.291	45.85	7.42	53.27	74.00	-20.73	peak
2 *	11490.757	31.45	7.42	38.87	54.00	-15.13	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11569.877	44.16	7.40	51.56	74.00	-22.44	peak
2 *	11570.342	31.05	7.40	38.45	54.00	-15.55	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11569.086	44.45	7.40	51.85	74.00	-22.15	peak
2 *	11570.962	30.91	7.40	38.31	54.00	-15.69	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11650.466	30.53	7.37	37.90	54.00	-16.10	AVG
2	11650.882	44.44	7.37	51.81	74.00	-22.19	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11650.571	43.76	7.37	51.13	74.00	-22.87	peak
2 *	11650.690	30.52	7.37	37.89	54.00	-16.11	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11510.024	31.53	7.42	38.95	54.00	-15.05	AVG
2	11510.155	45.04	7.42	52.46	74.00	-21.54	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11509.173	45.18	7.41	52.59	74.00	-21.41	peak
2 *	11510.925	31.95	7.42	39.37	54.00	-14.63	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11590.248	44.87	7.39	52.26	74.00	-21.74	peak
2 *	11590.261	30.93	7.39	38.32	54.00	-15.68	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11589.590	45.04	7.39	52.43	74.00	-21.57	peak
2 *	11589.669	31.32	7.39	38.71	54.00	-15.29	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11550.000	45.02	7.41	52.43	74.00	-21.57	peak
2 *	11550.000	32.10	7.41	39.51	54.00	-14.49	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1 + Ant 2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11549.714	44.35	7.41	51.76	74.00	-22.24	peak
2 *	11550.003	32.05	7.41	39.46	54.00	-14.54	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

3.3. Band Edge Emissions

Limit

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart E Section 15. 407(b)

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27 (Note 2)	68.2
	10 (Note 2)	105.2
	15.6 (Note 2)	110.8
	27 (Note 2)	122.2


Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts).

2. According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Test Configuration

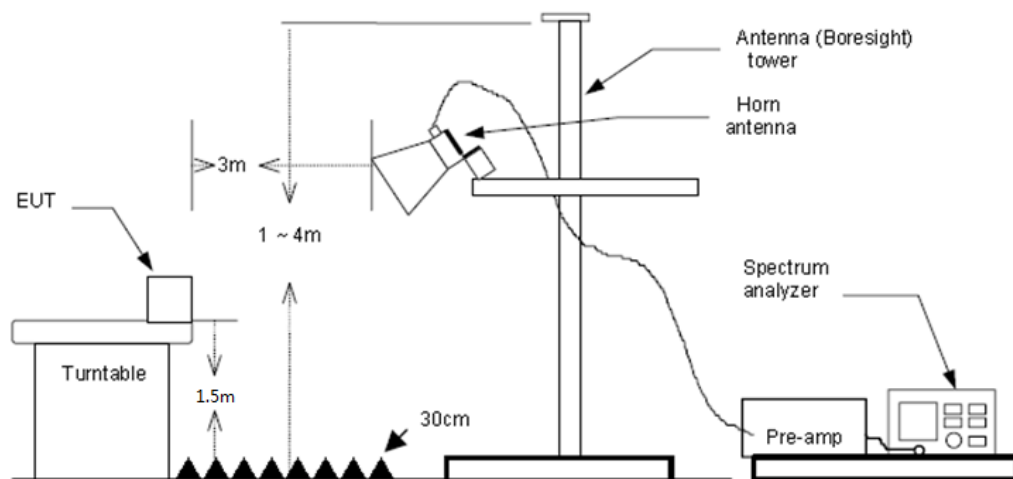



Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Duty Cycle.

Test Mode


Please refer to the clause 2.4.





Test Result


Note: 1. Pre-scan both 4500-5150MHz, 5350-5460MHz were investigated, report only shows the test data for worst case.


2. Pre-scan all antenna, only show the test data for worse case antenna on the test report.

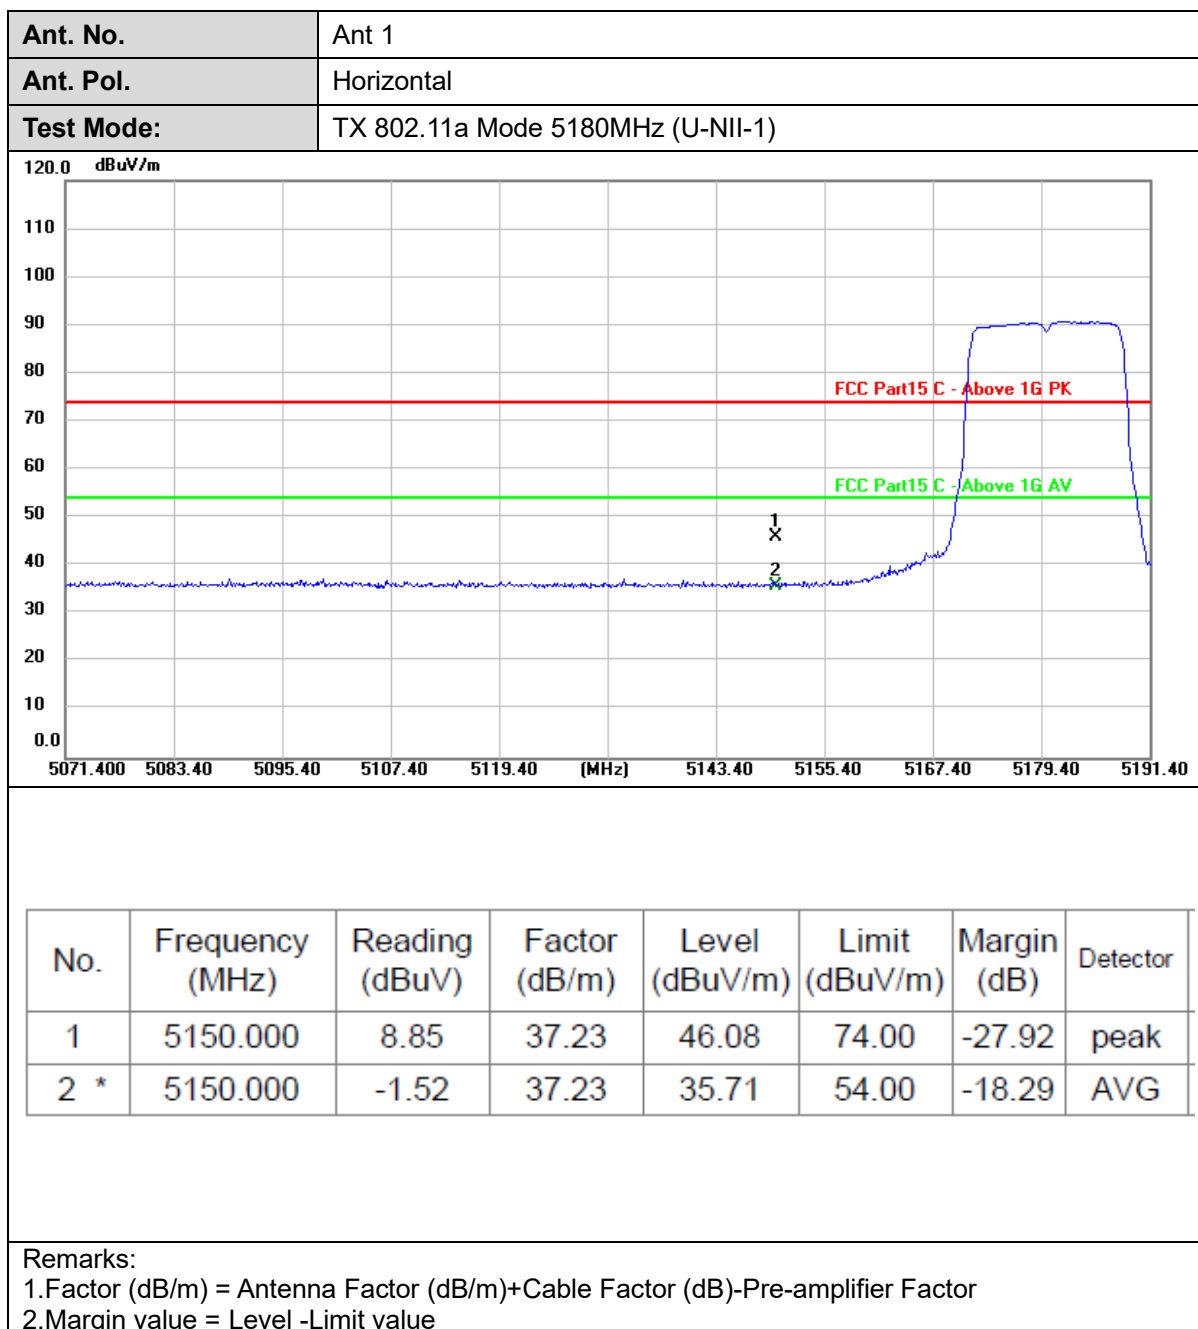


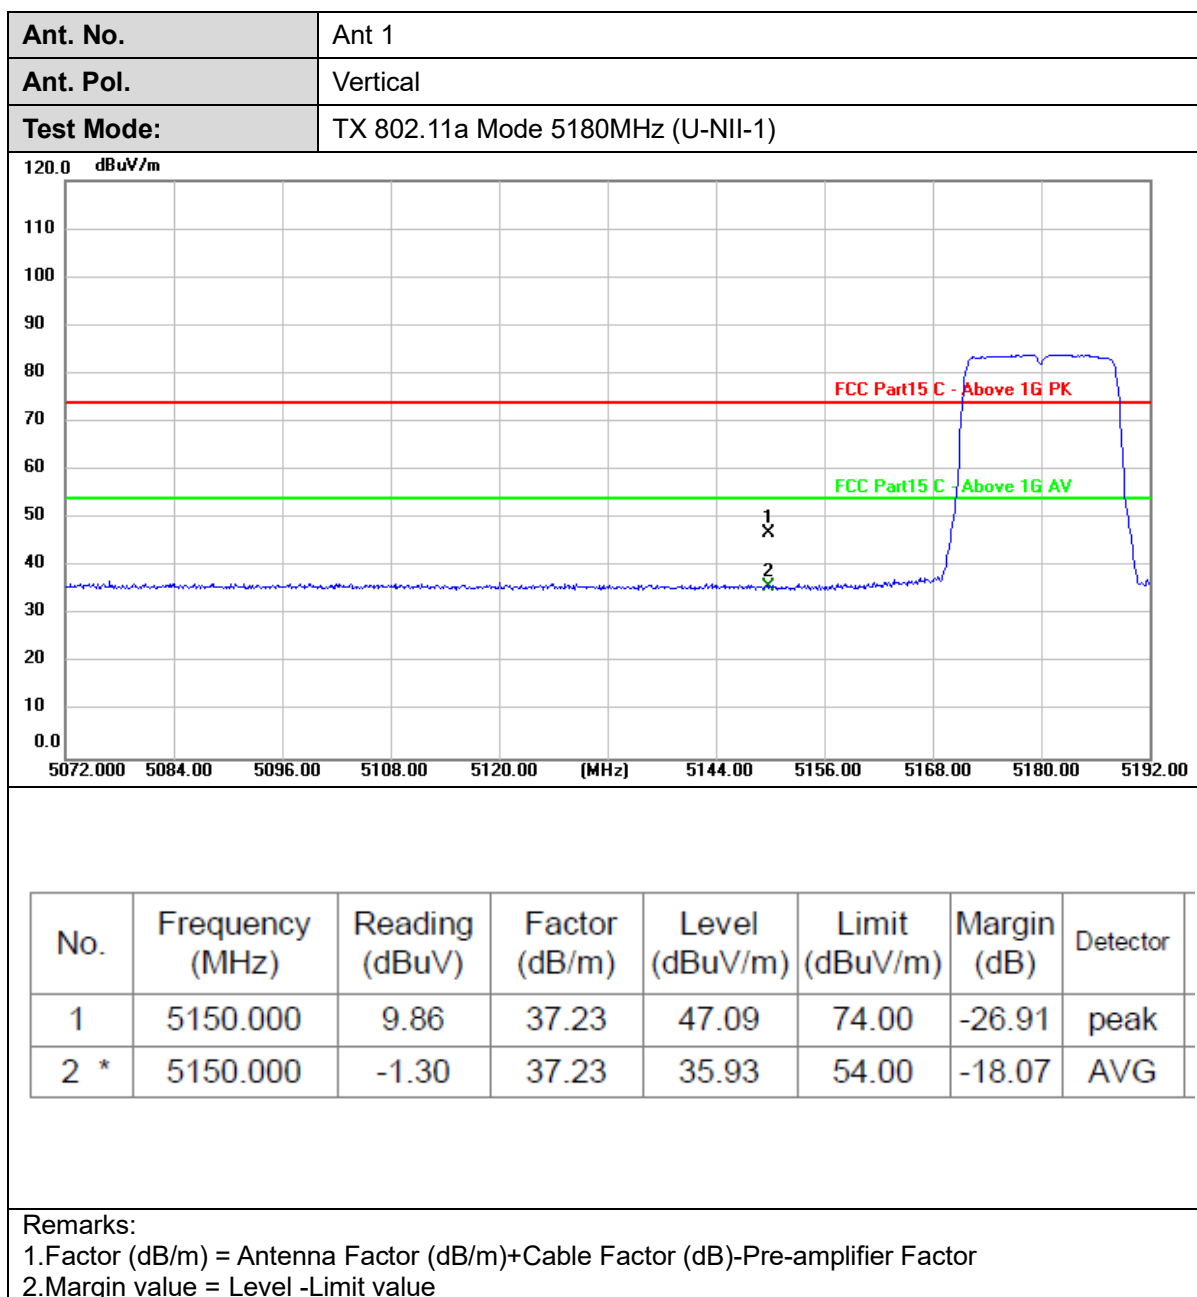


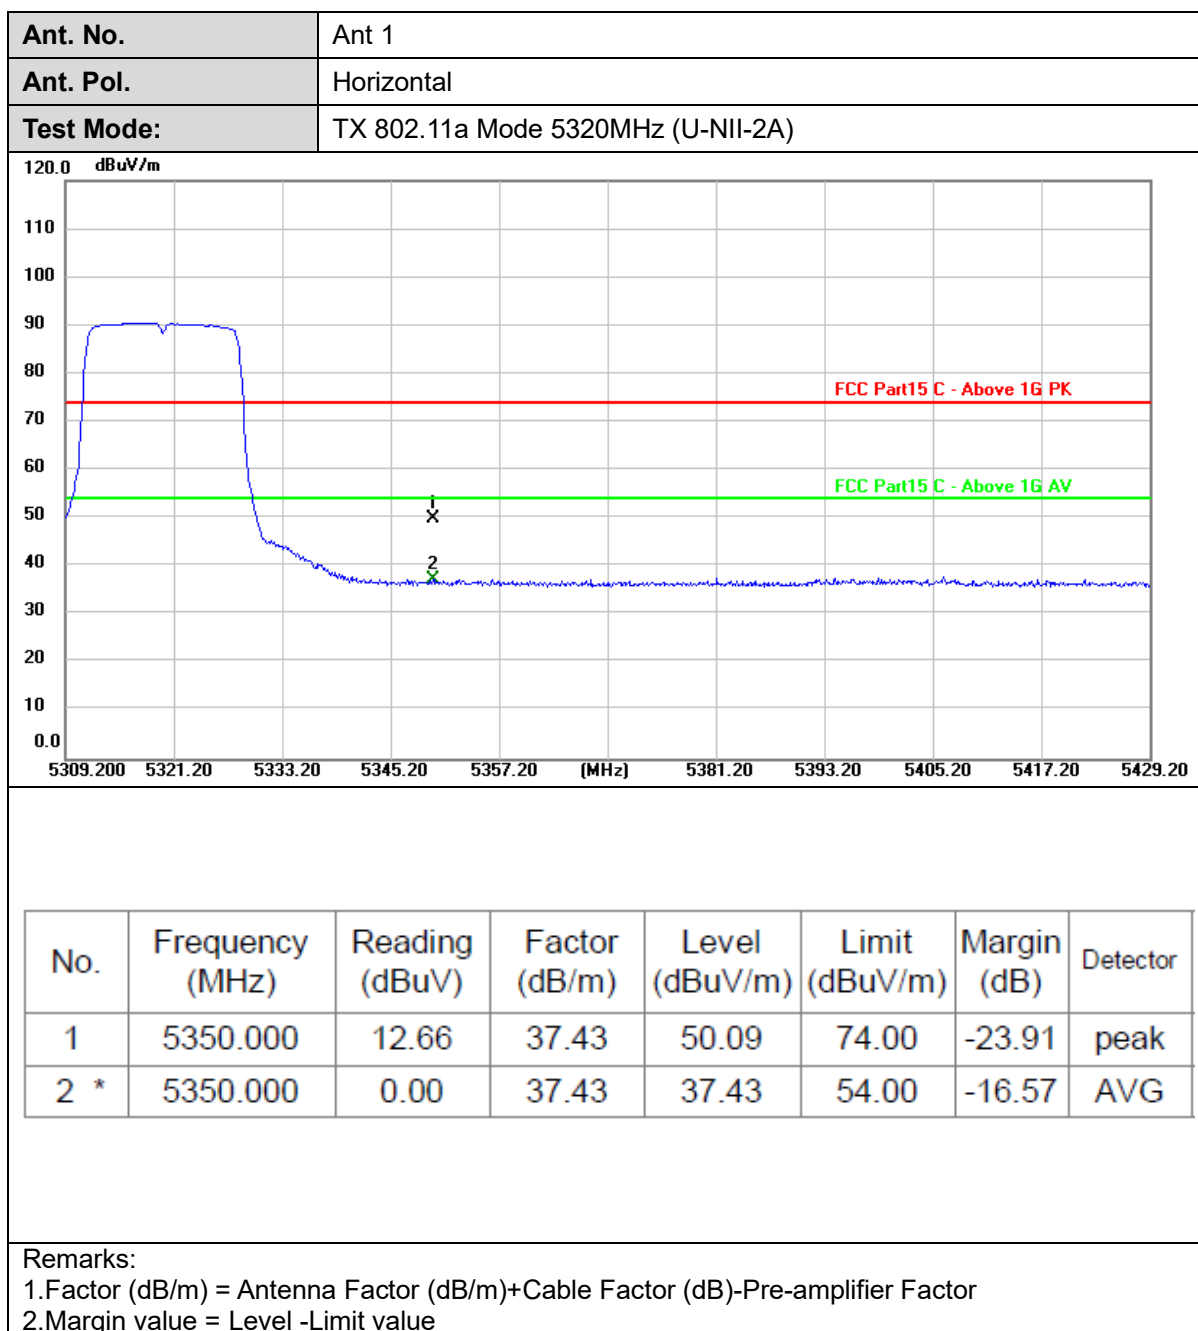


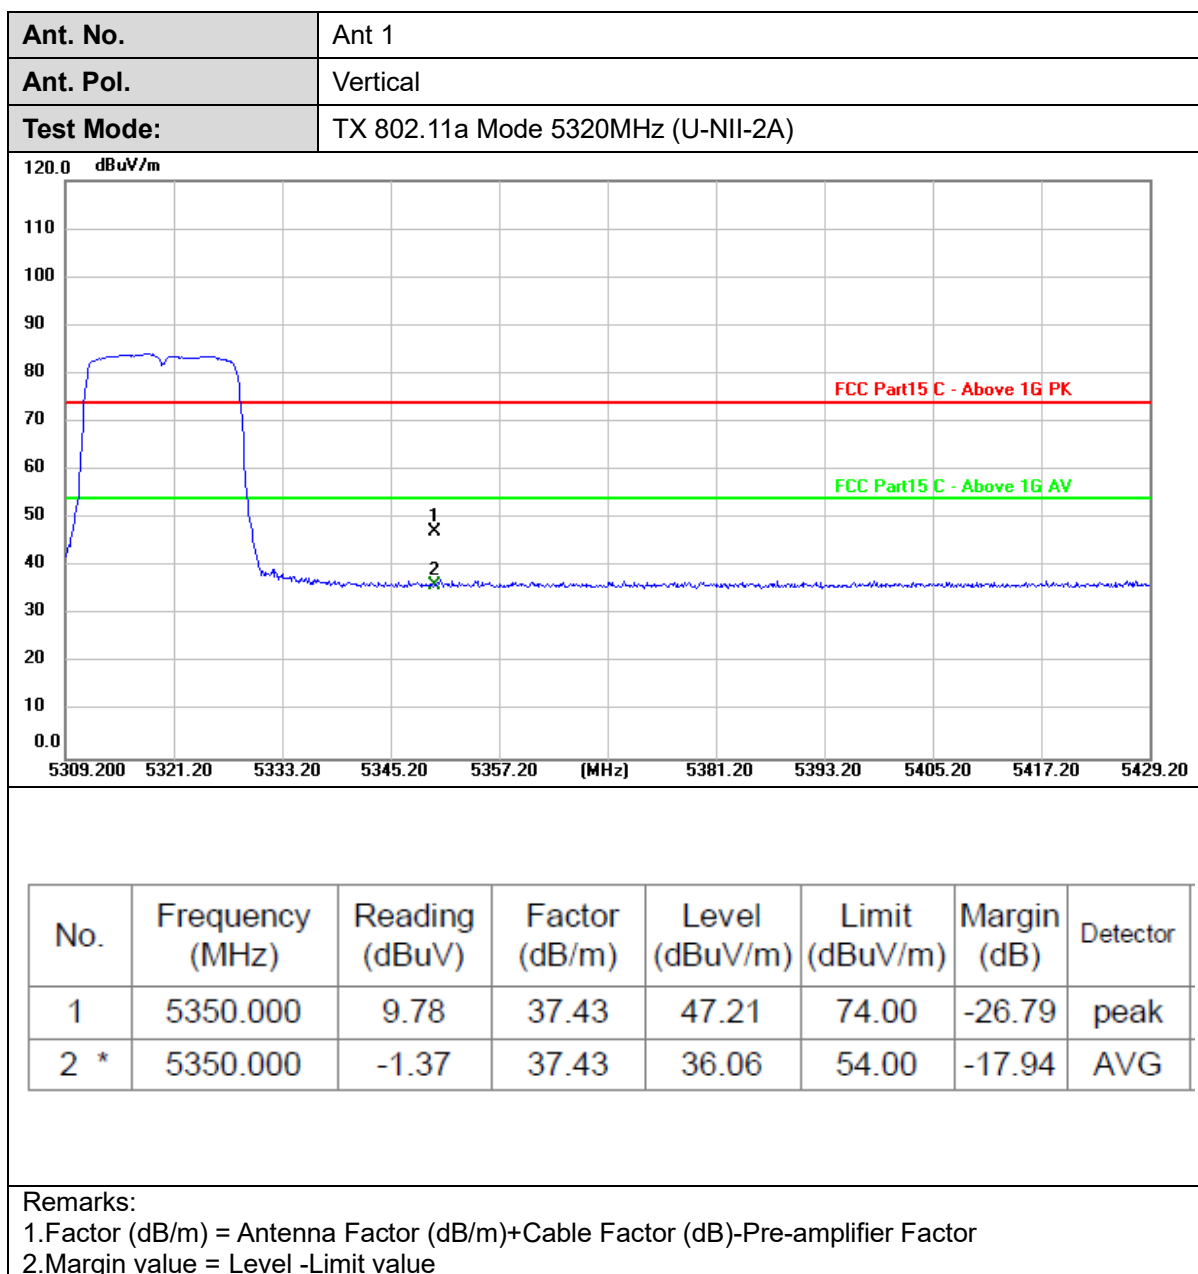


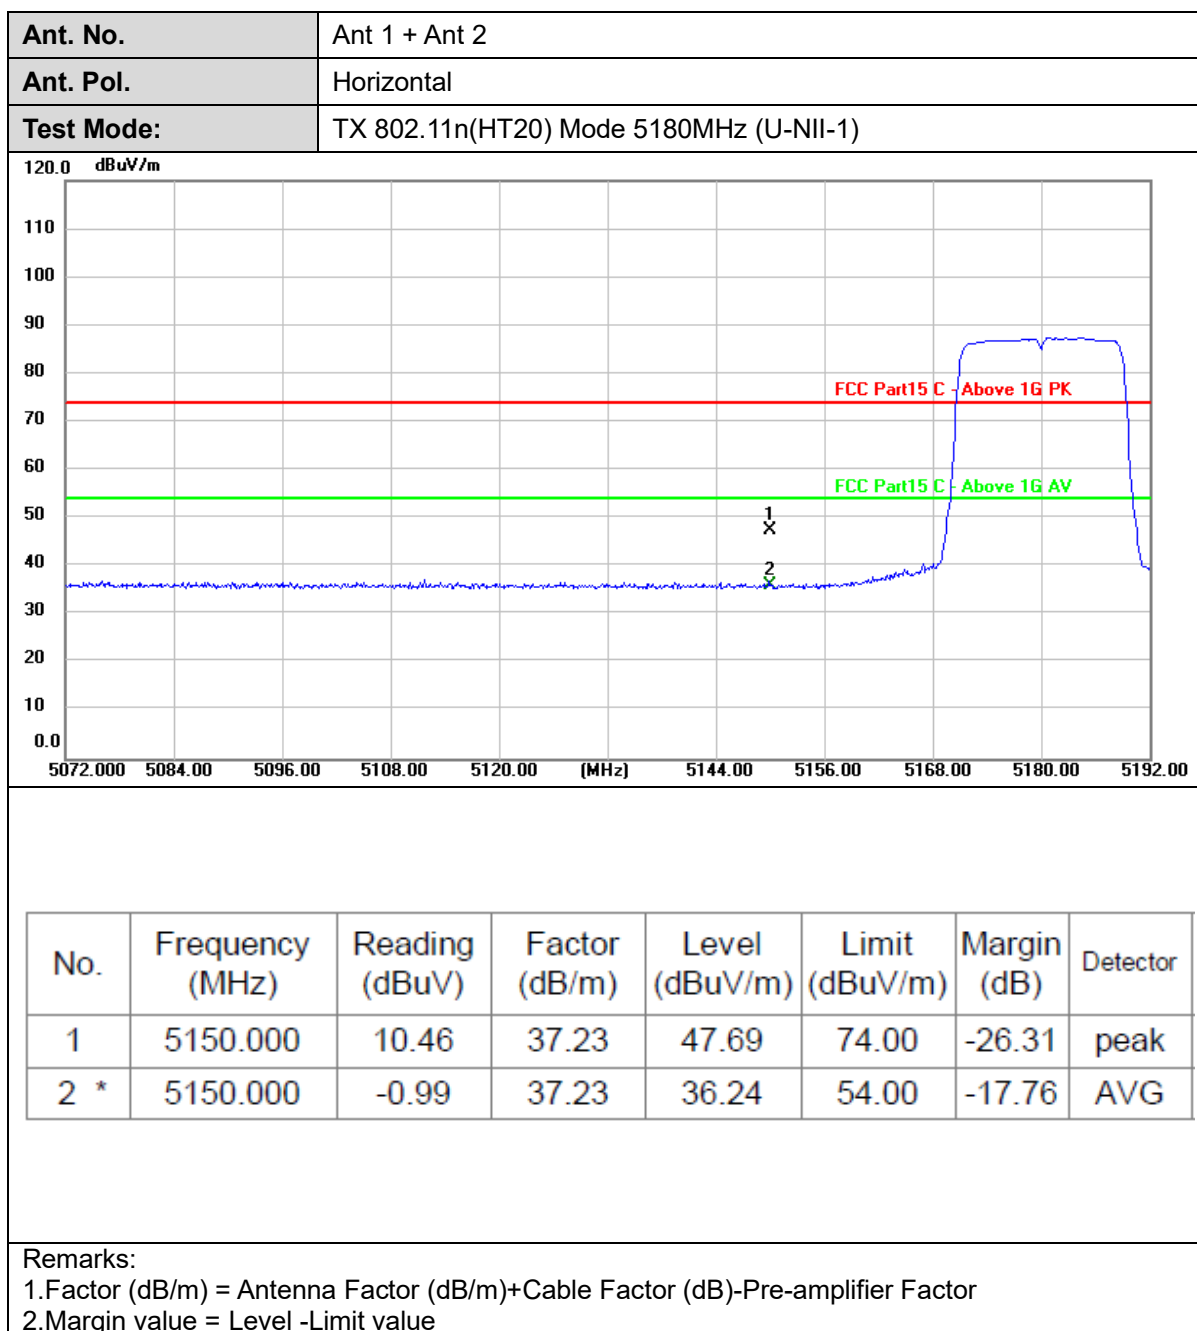


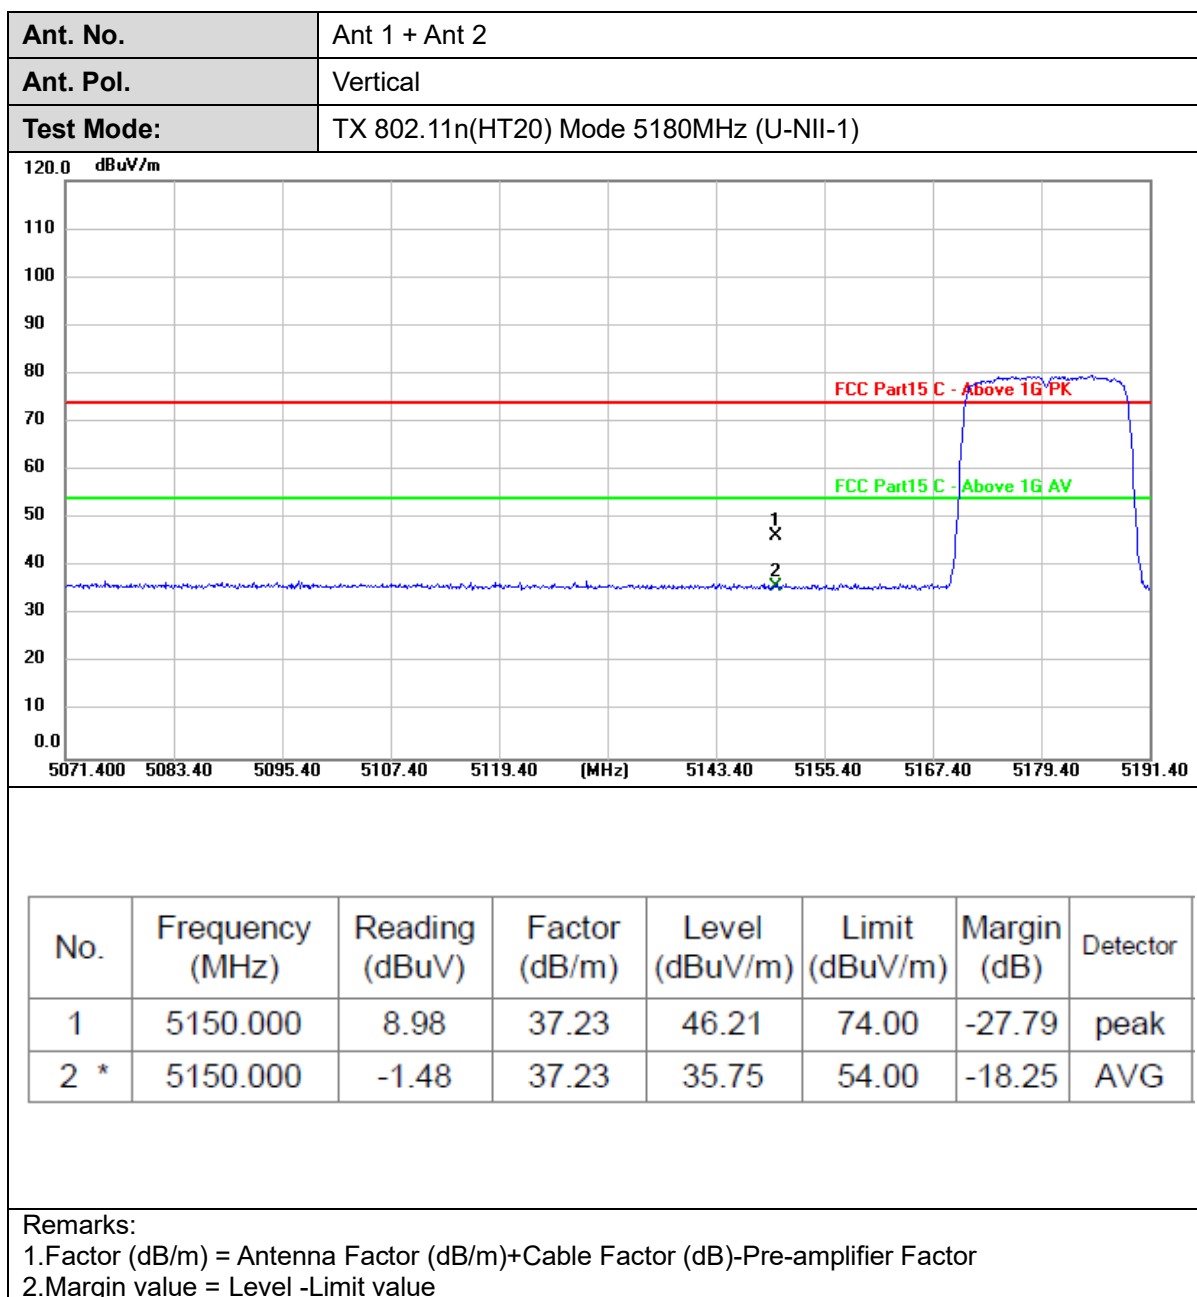


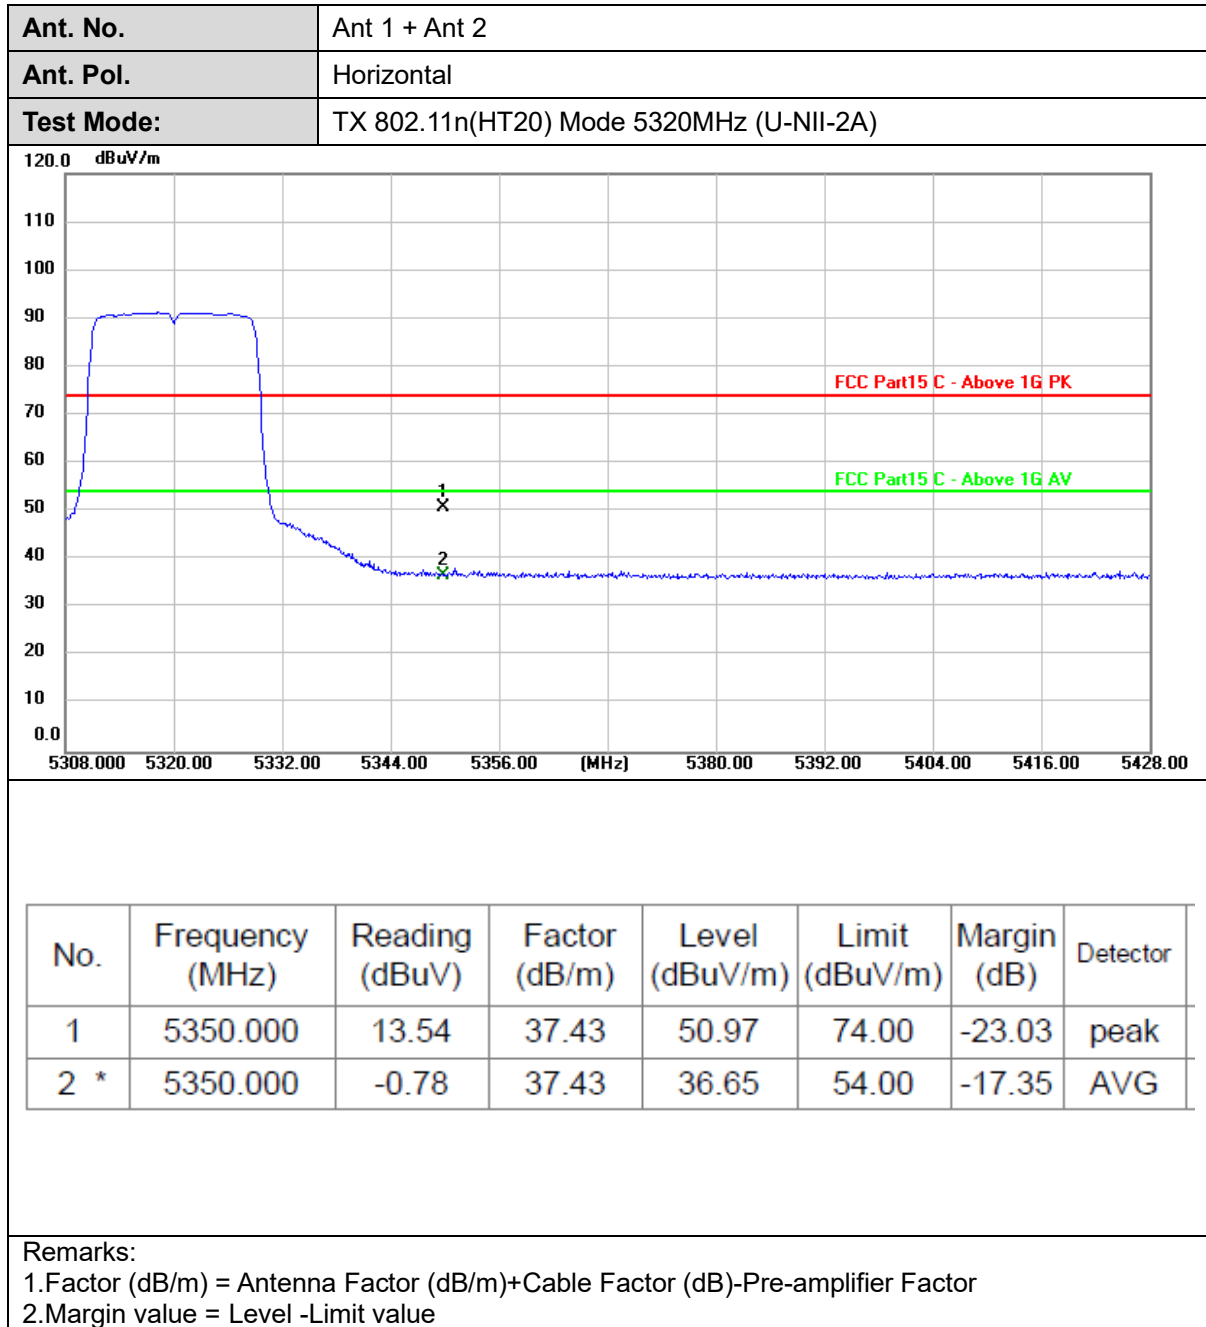


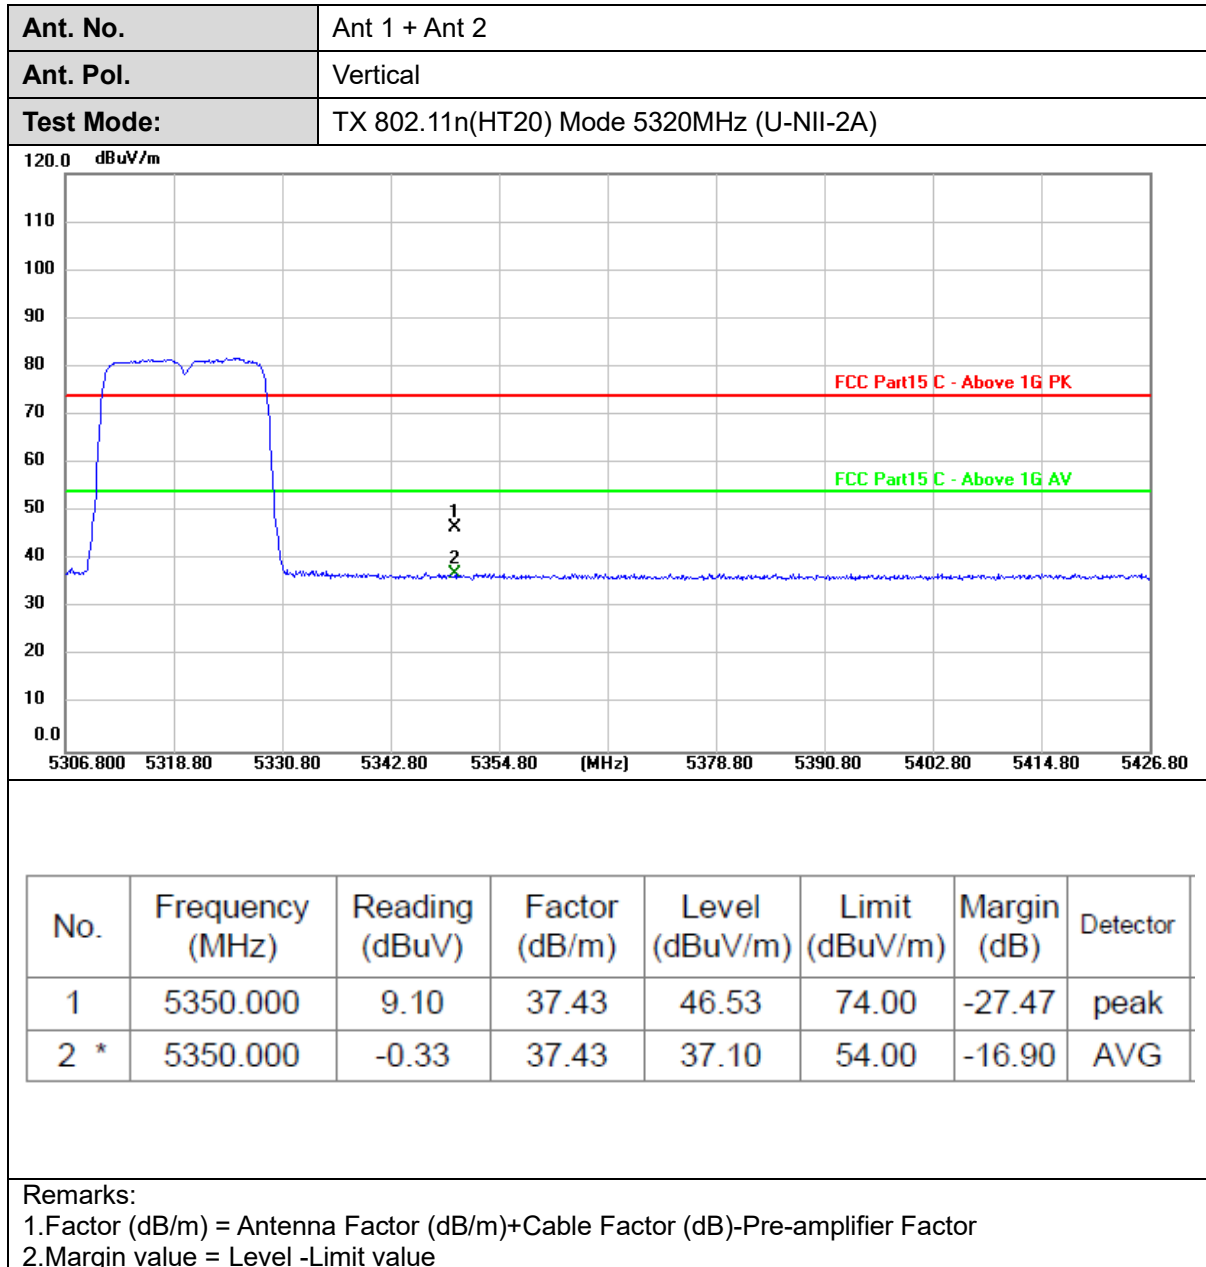


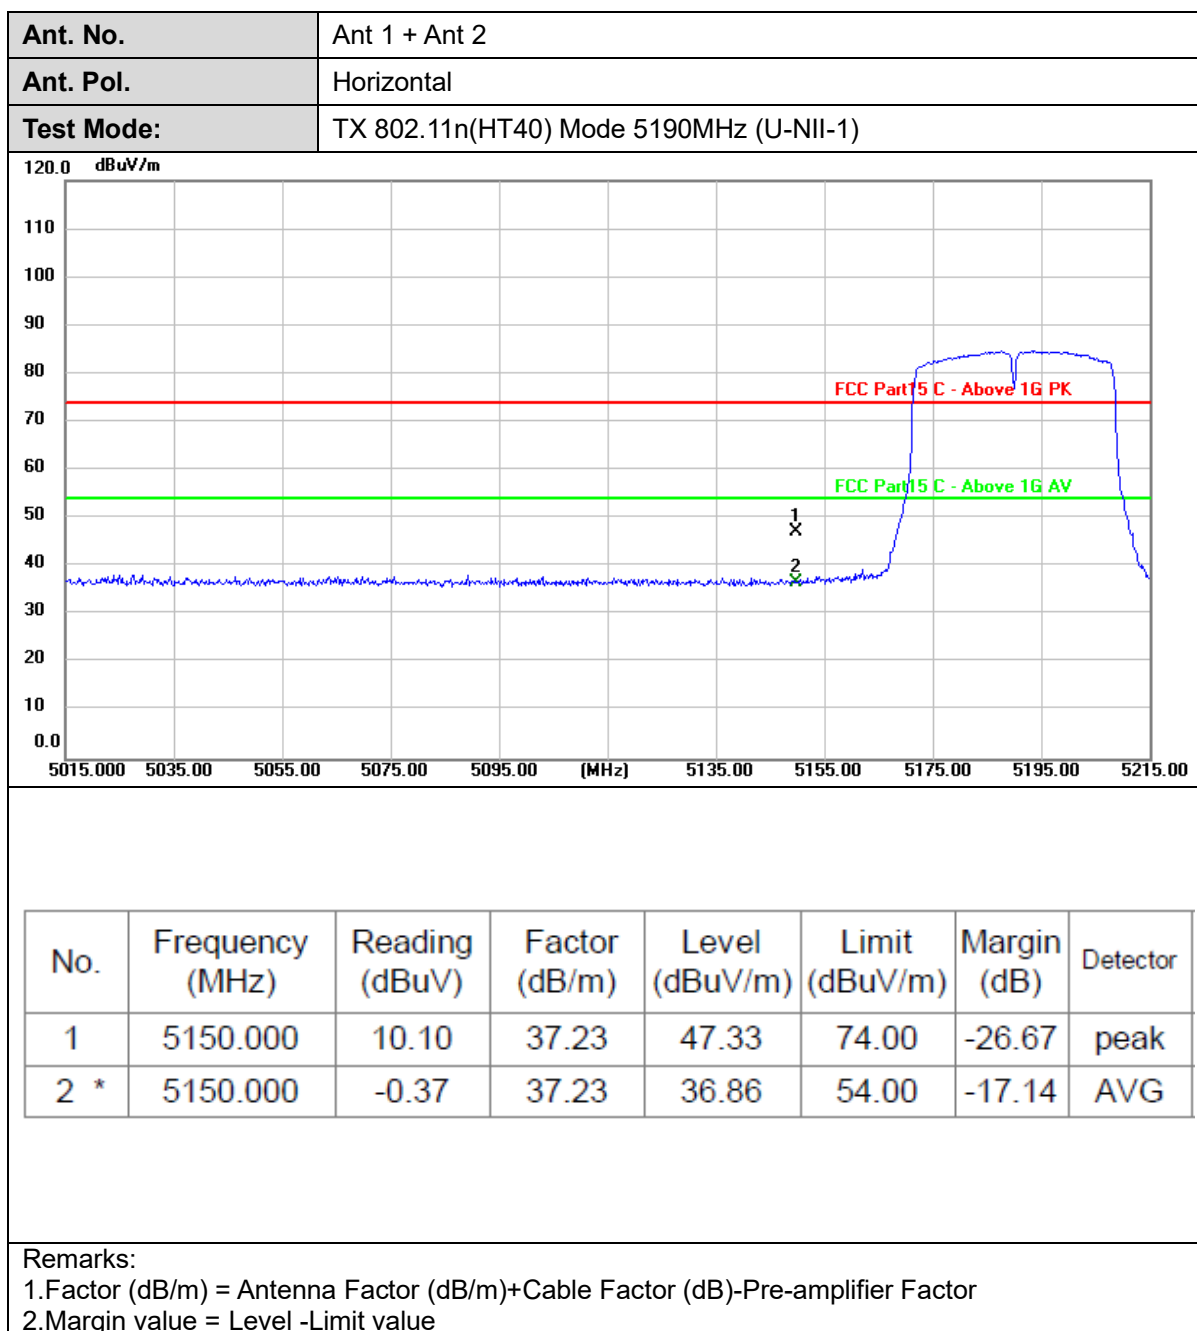


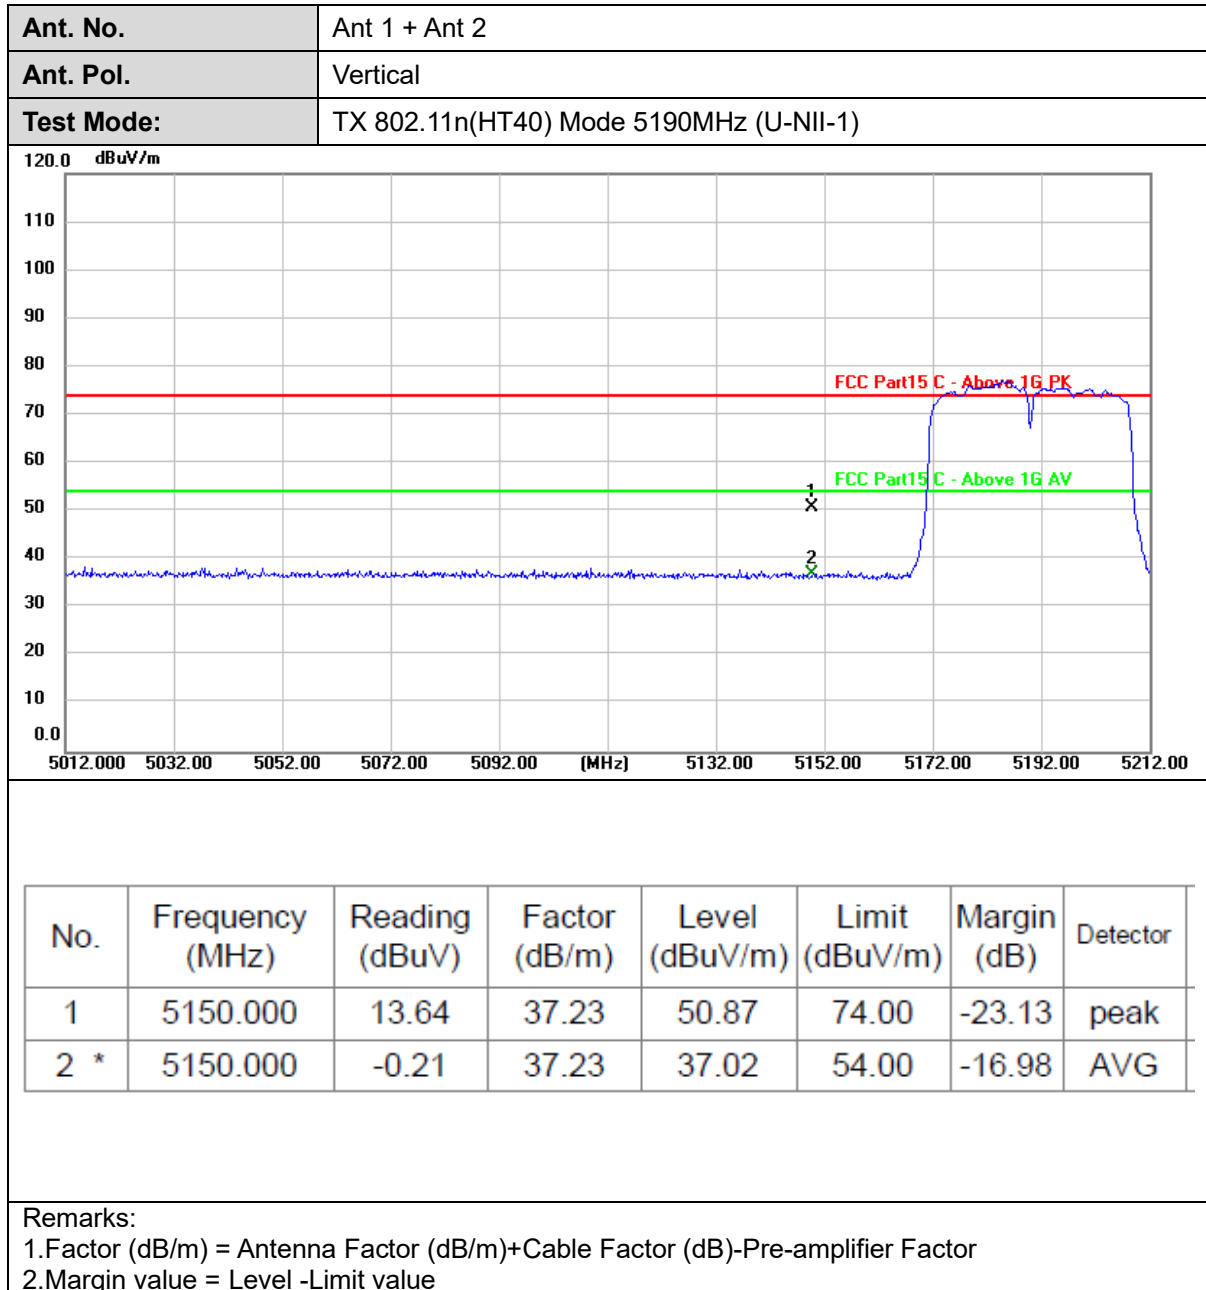


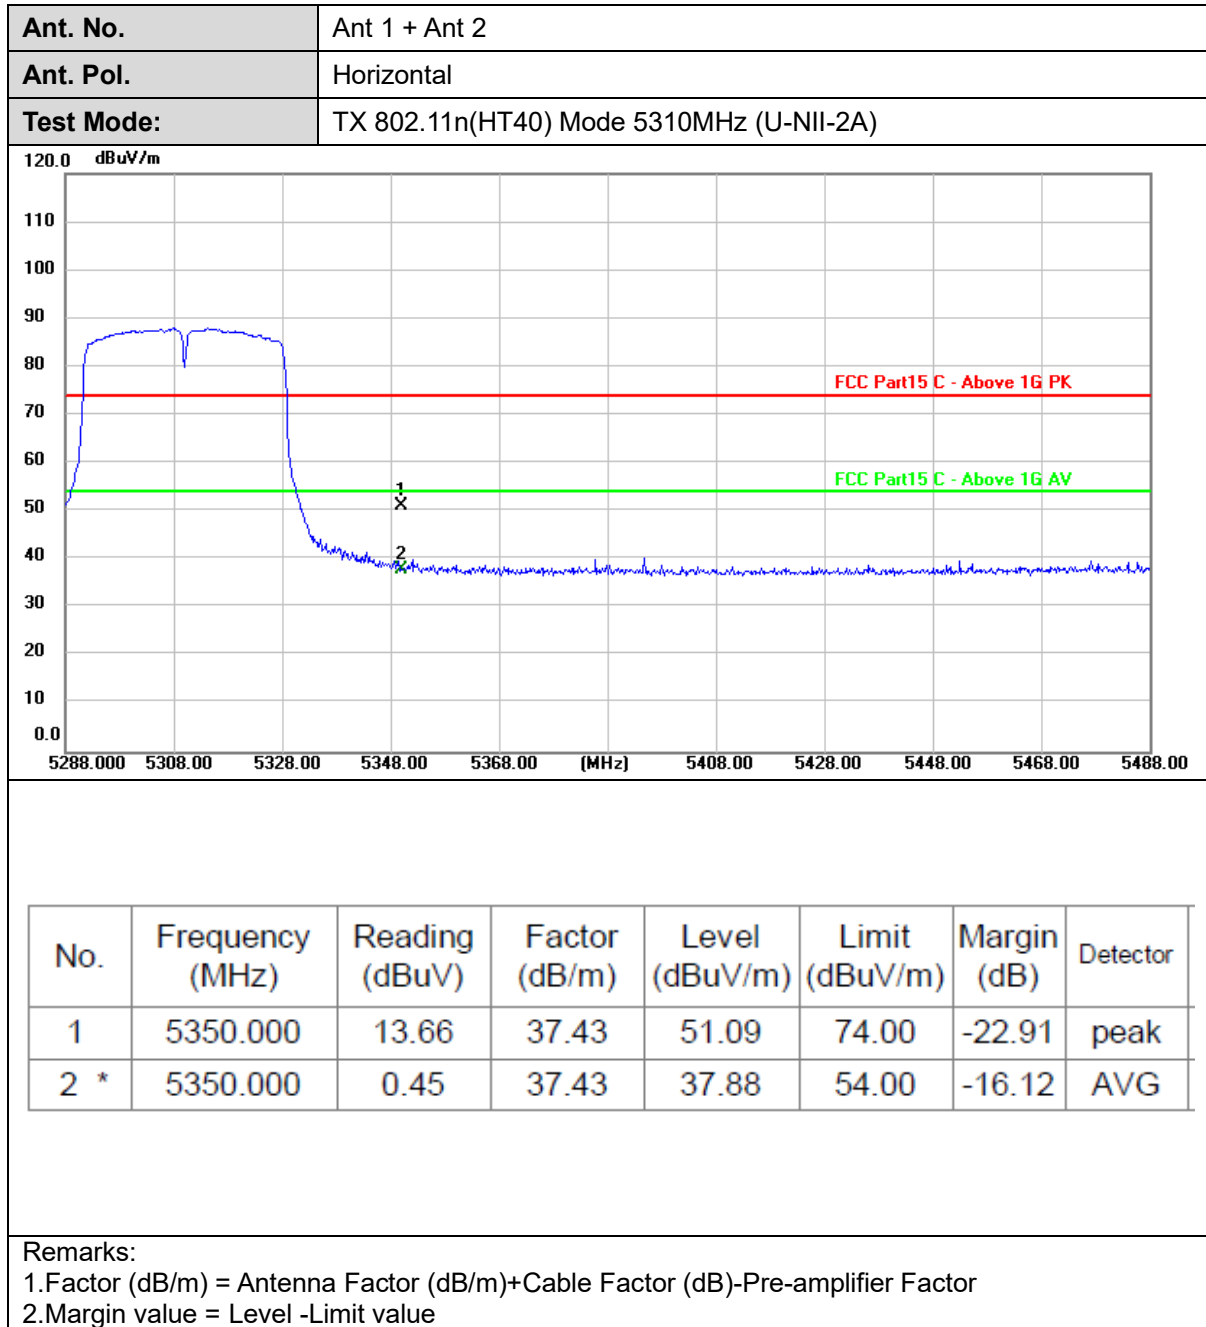


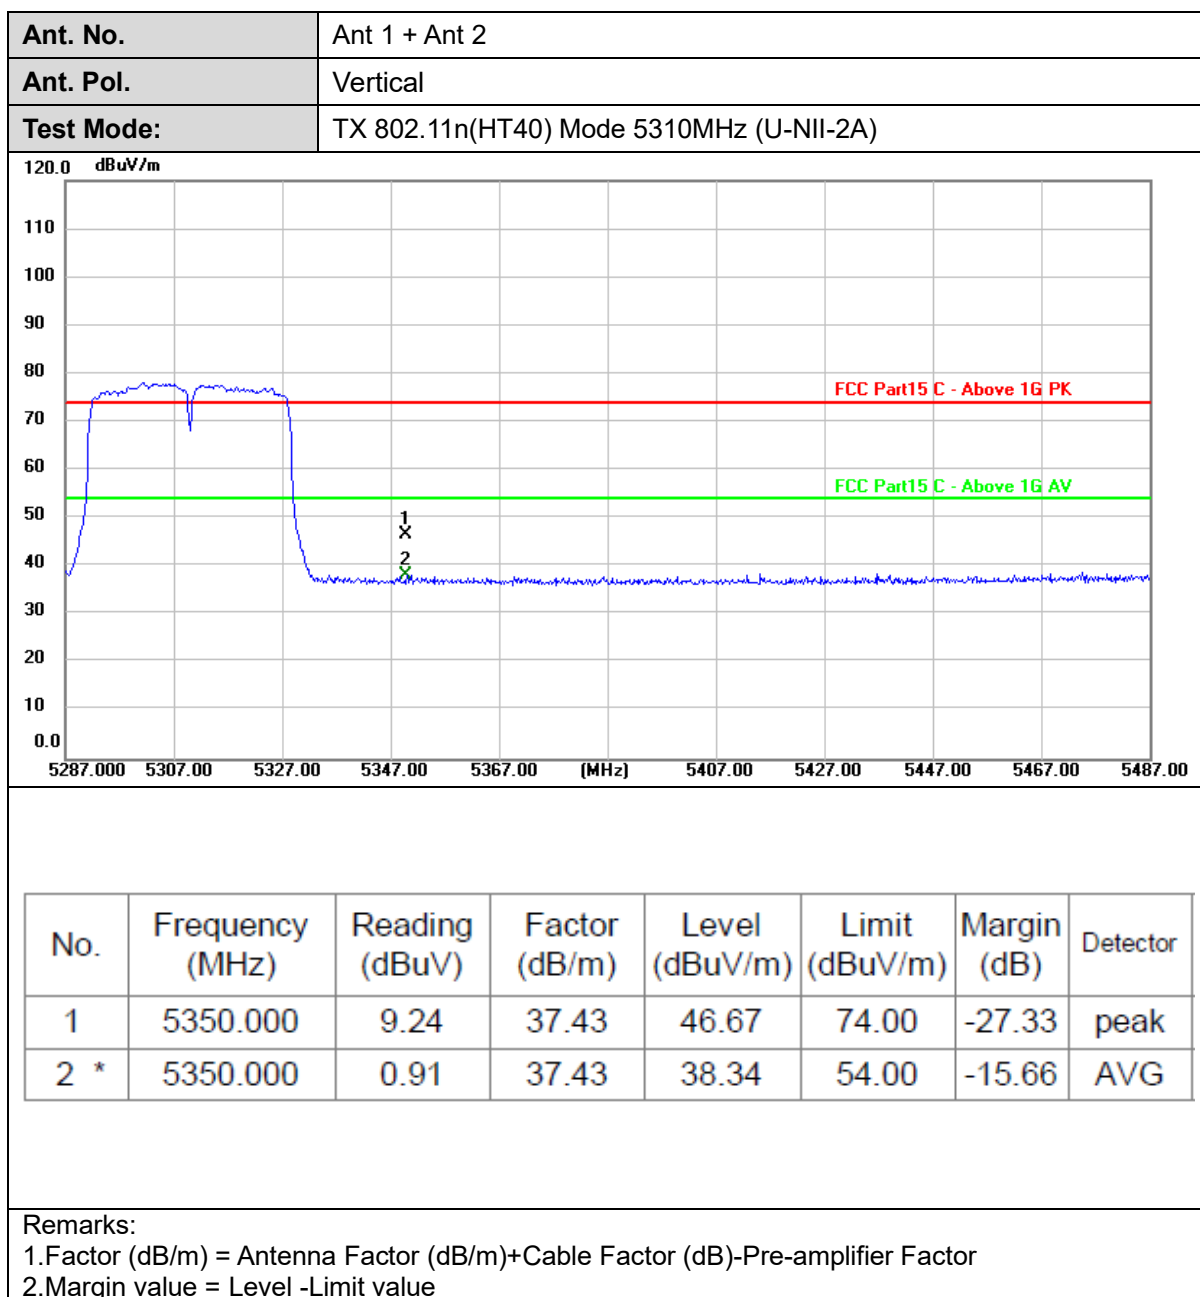


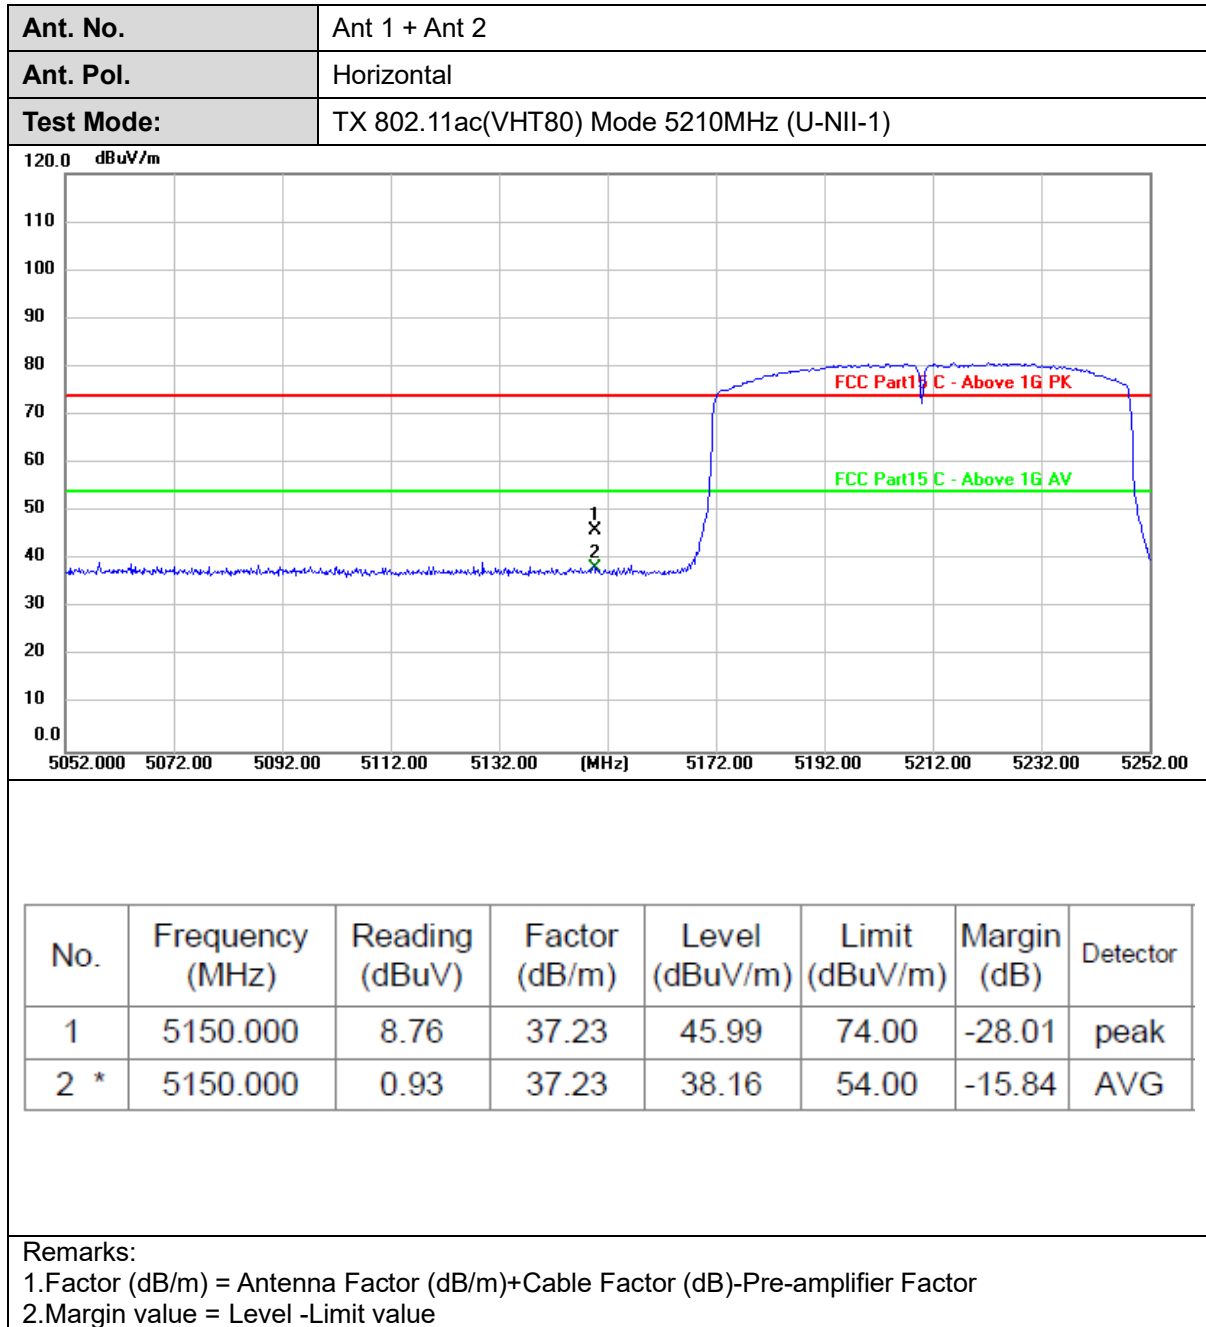


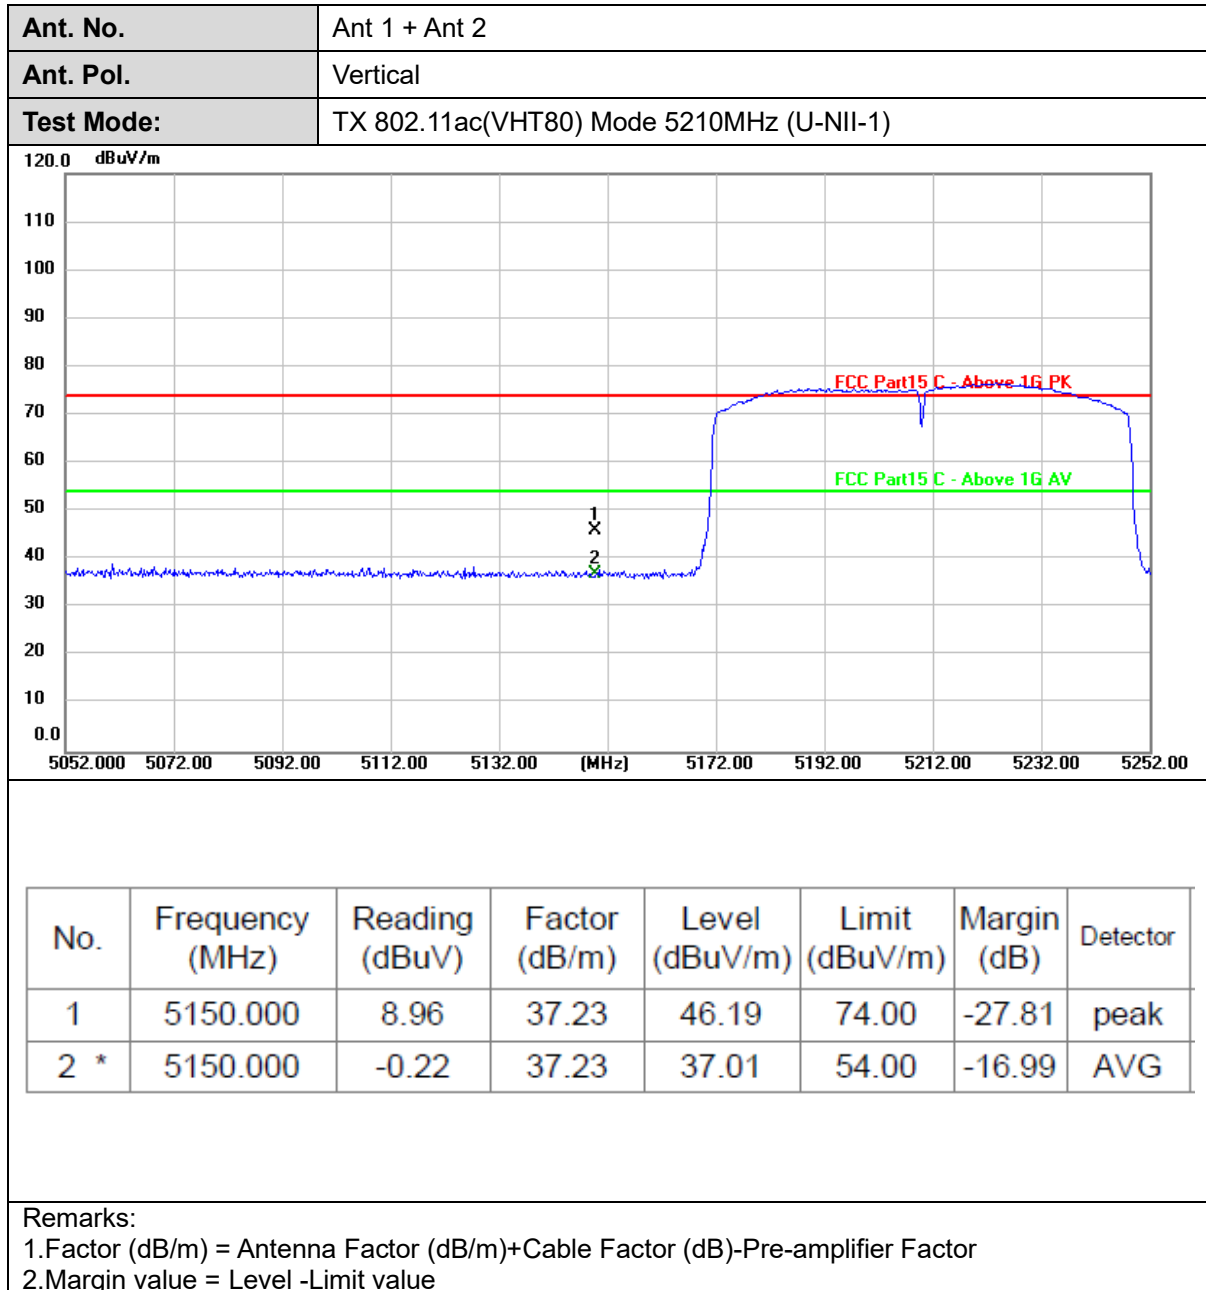


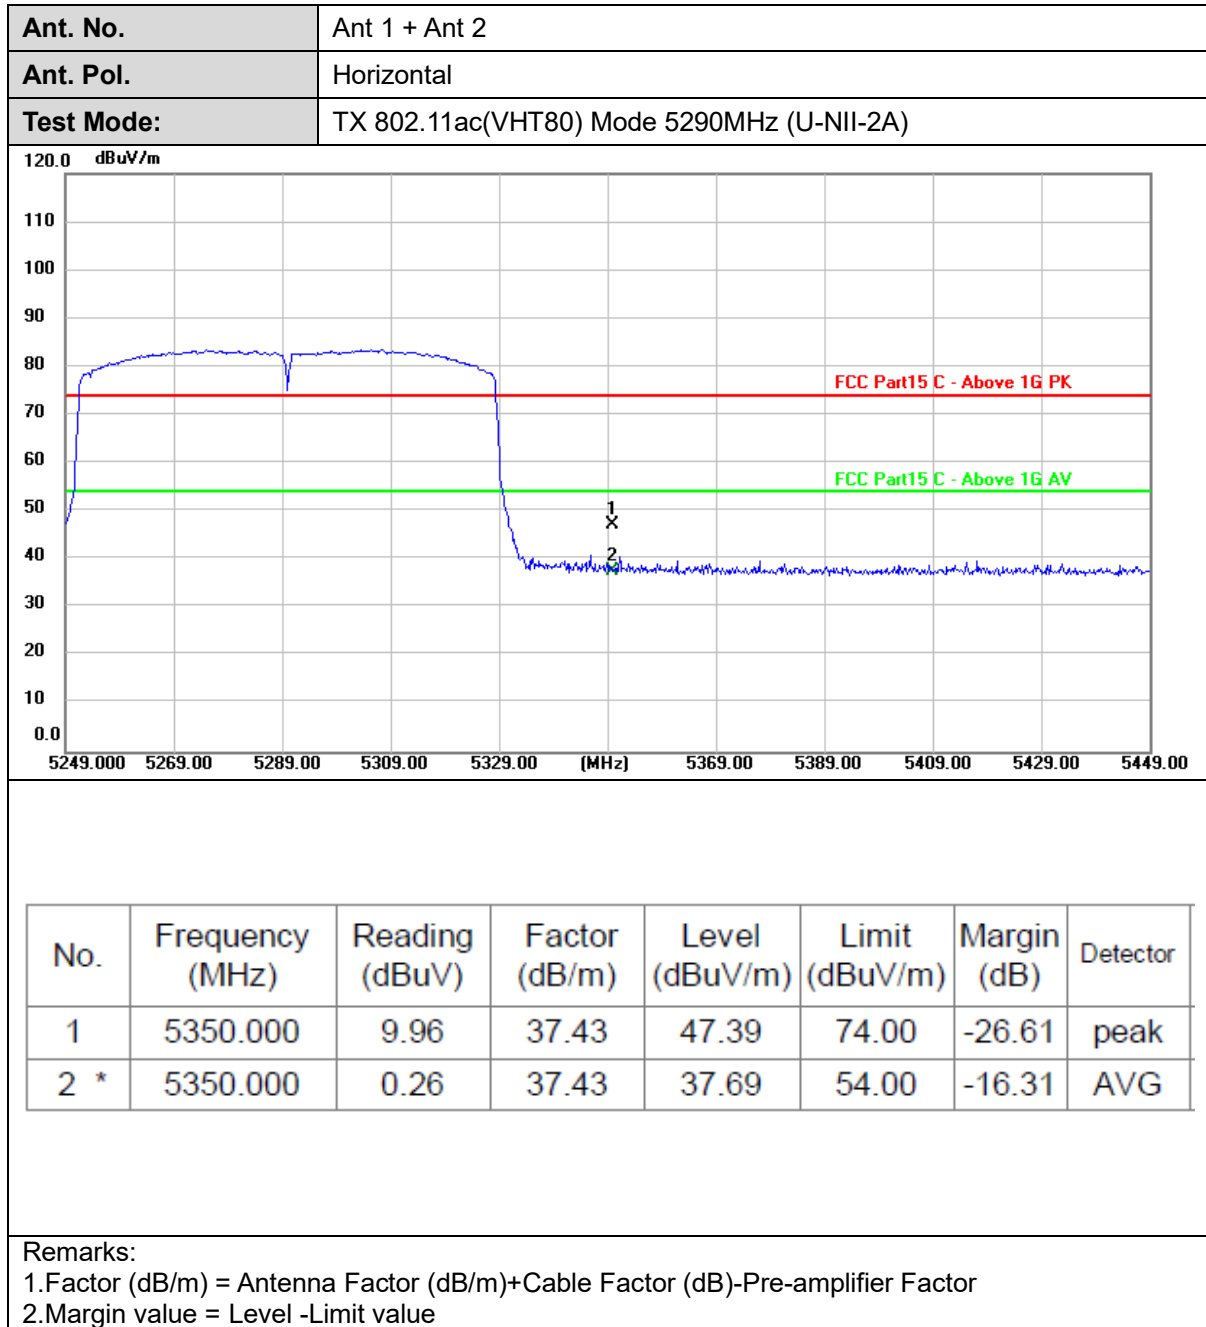


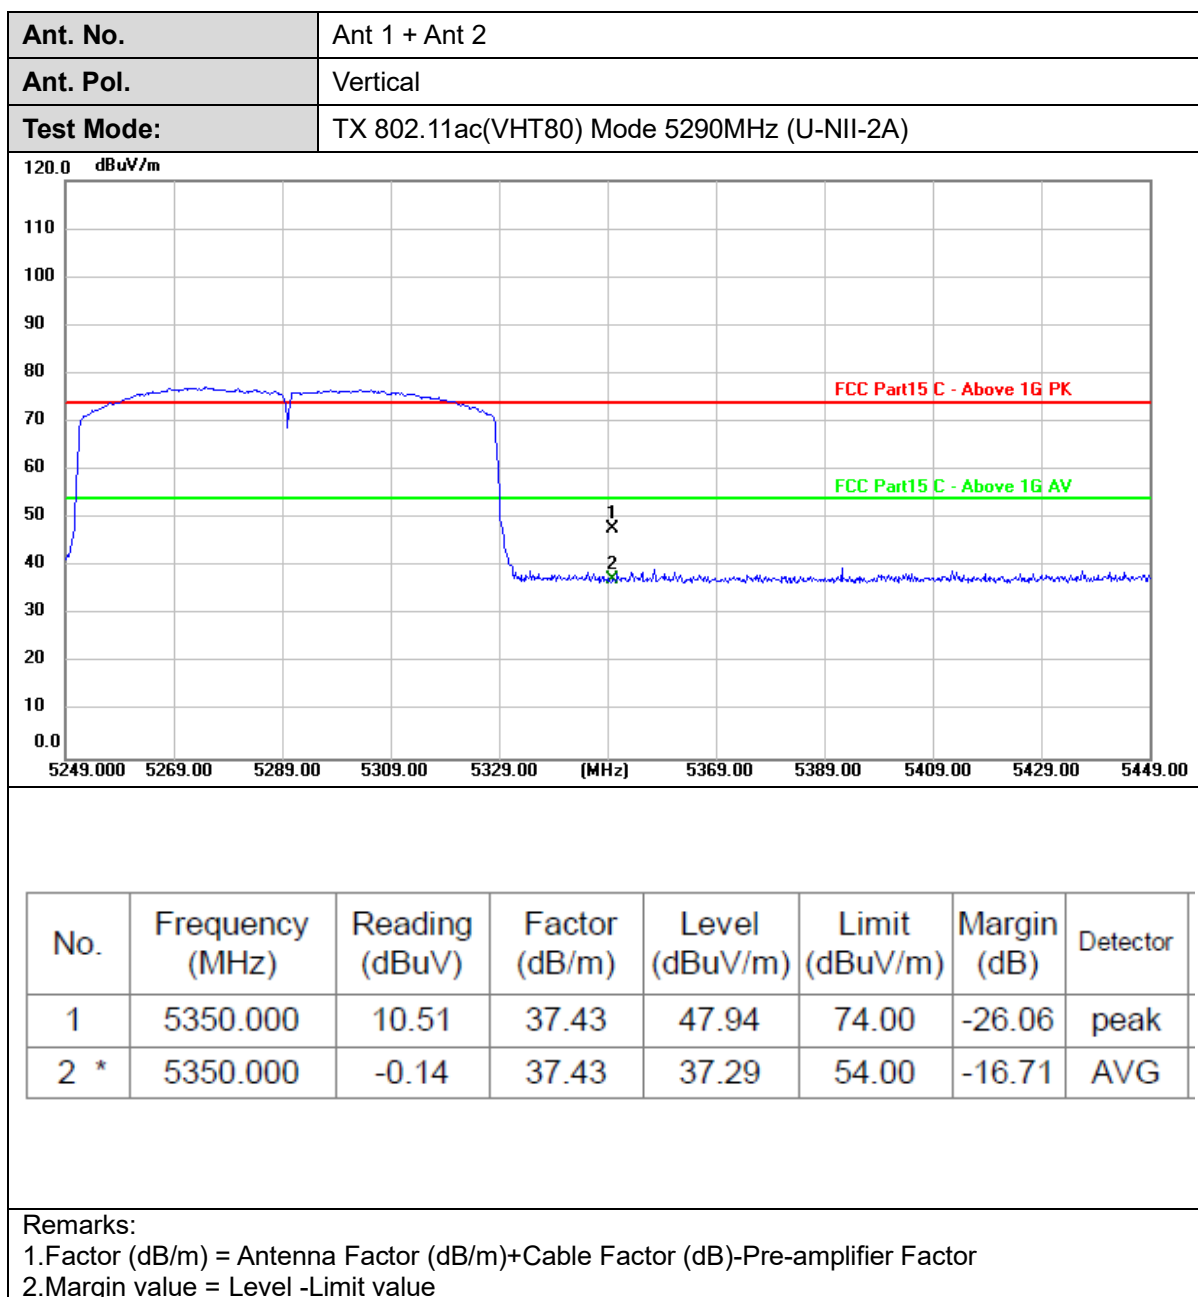


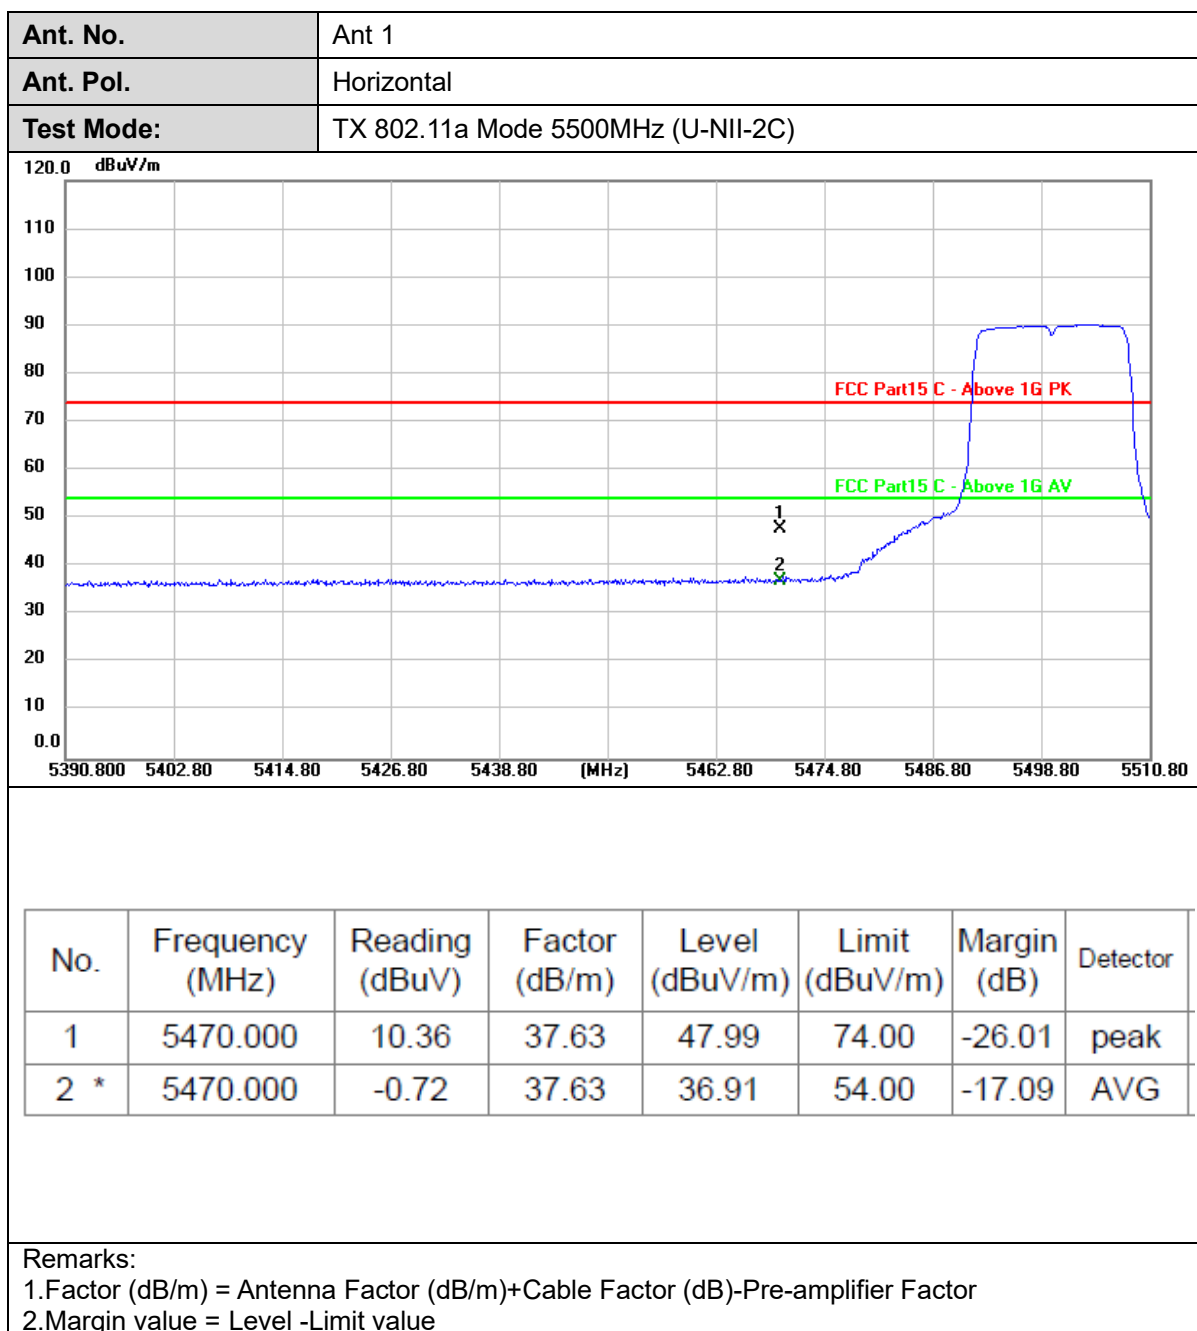


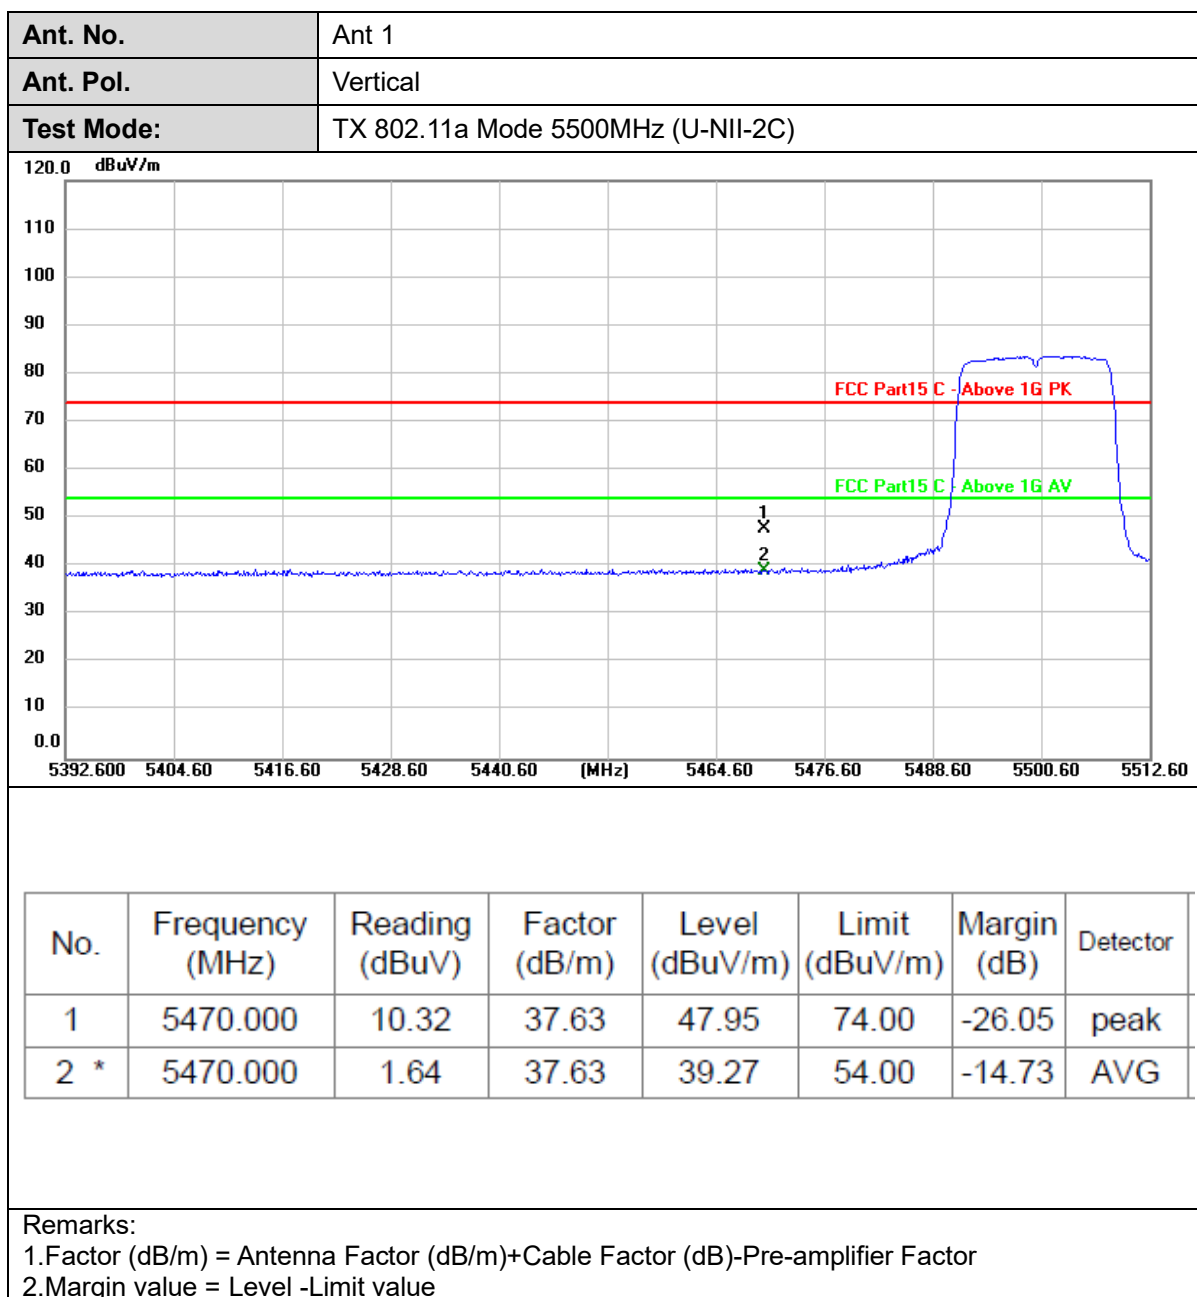


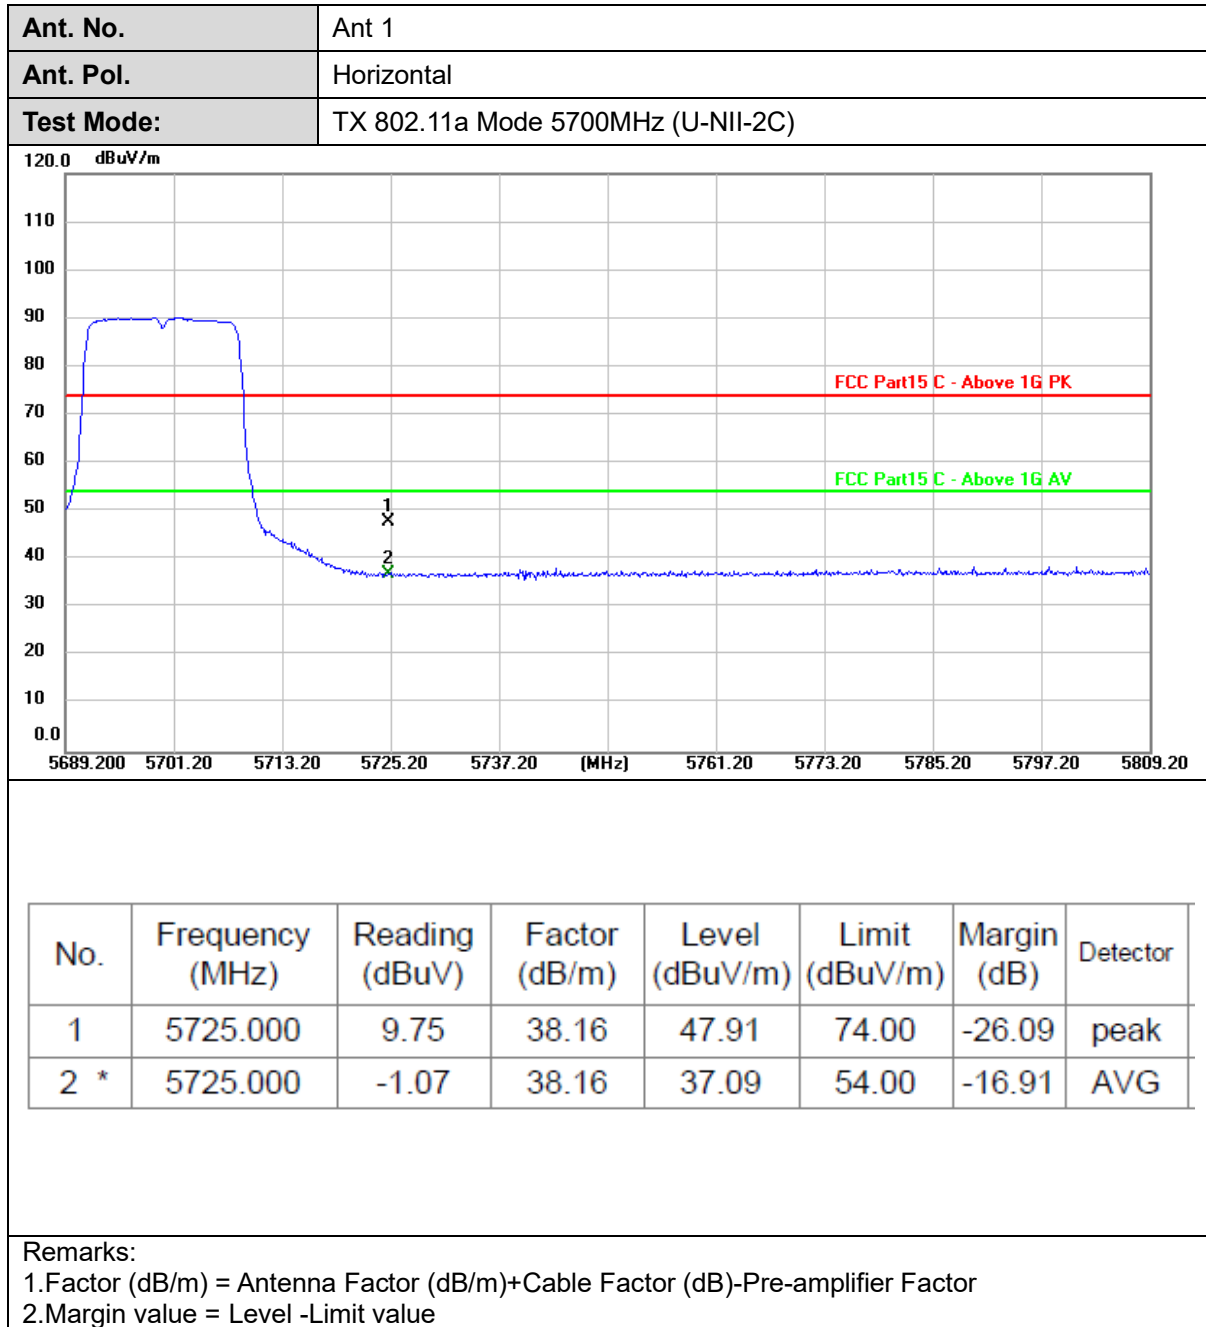


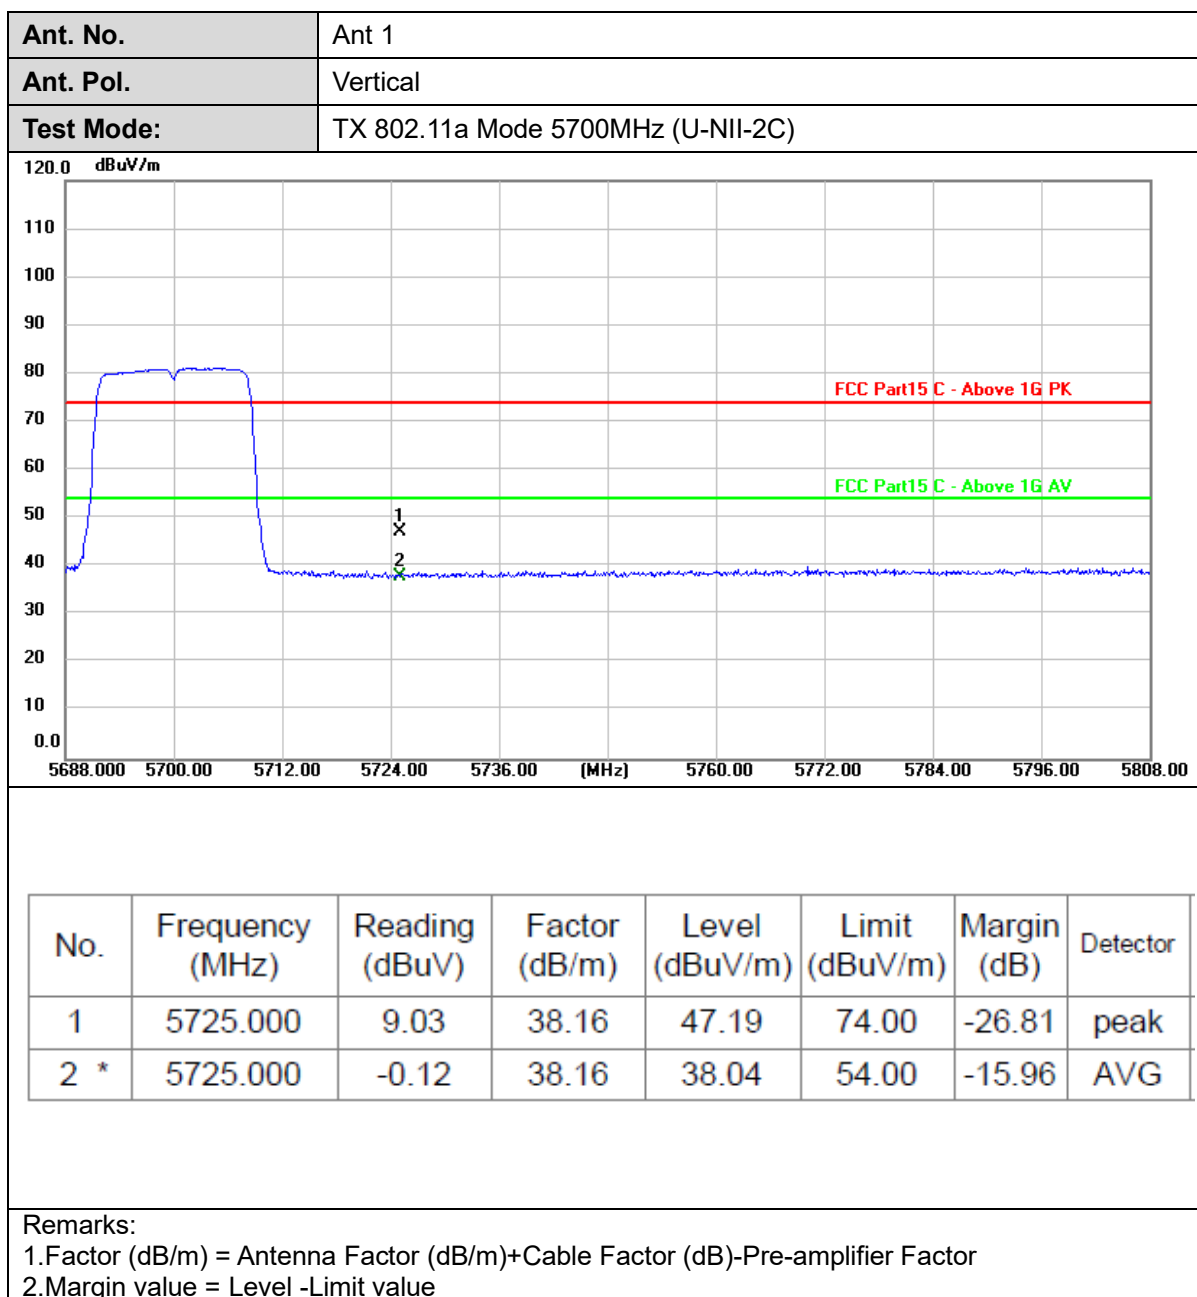


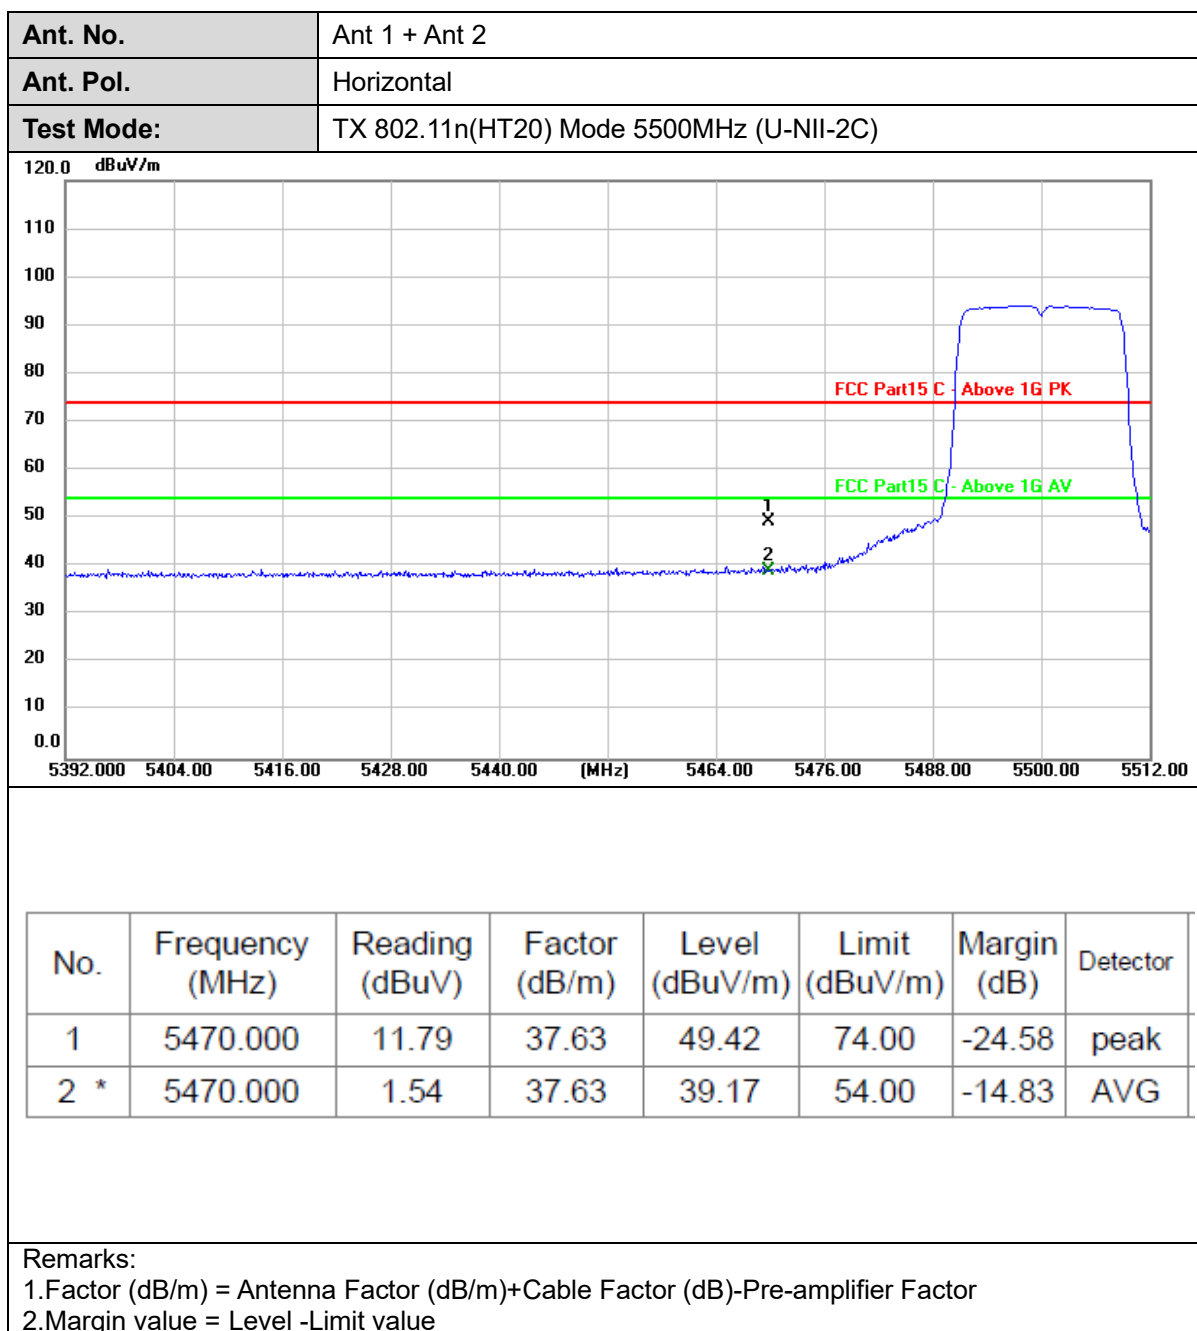


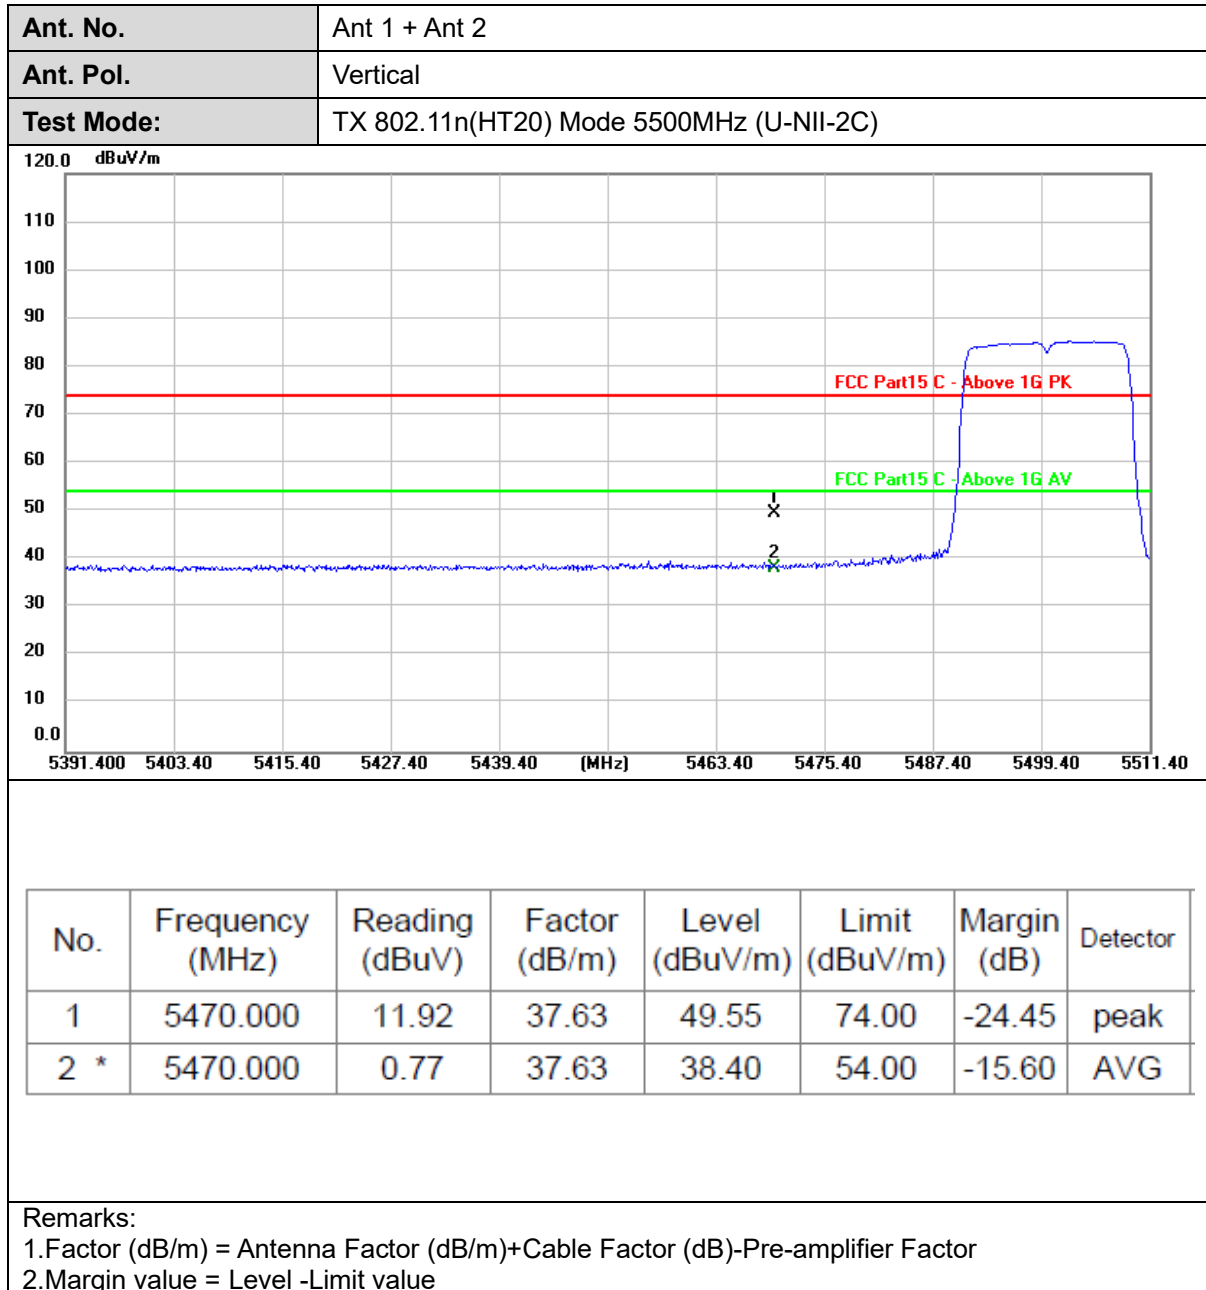


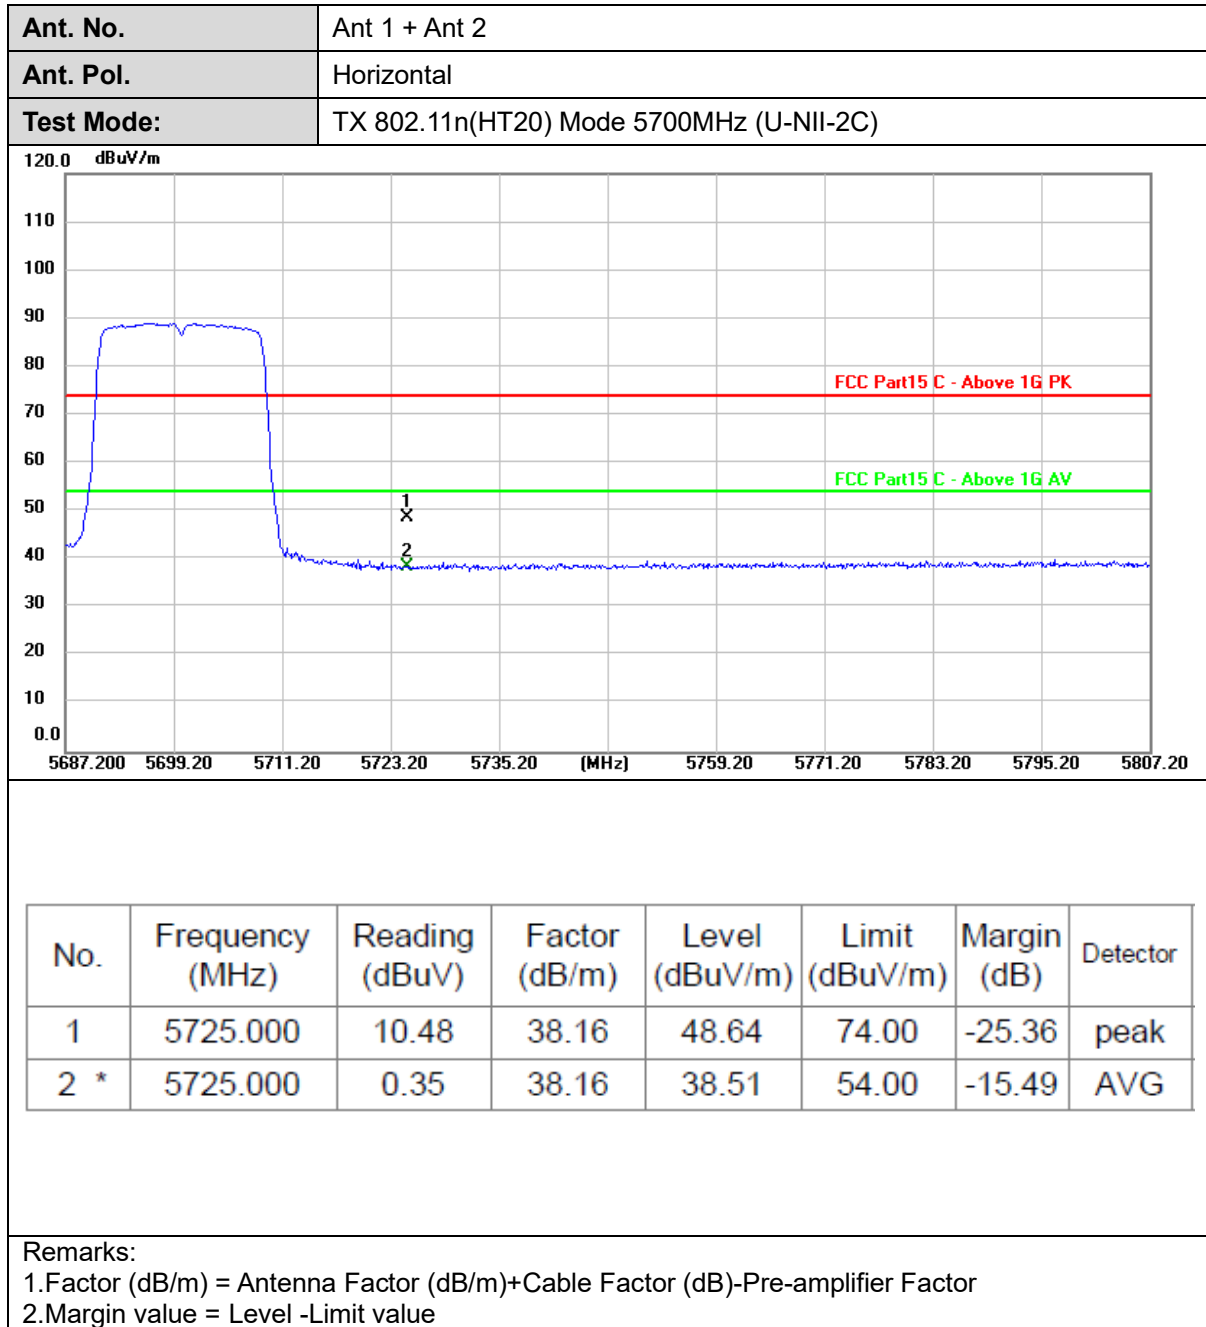


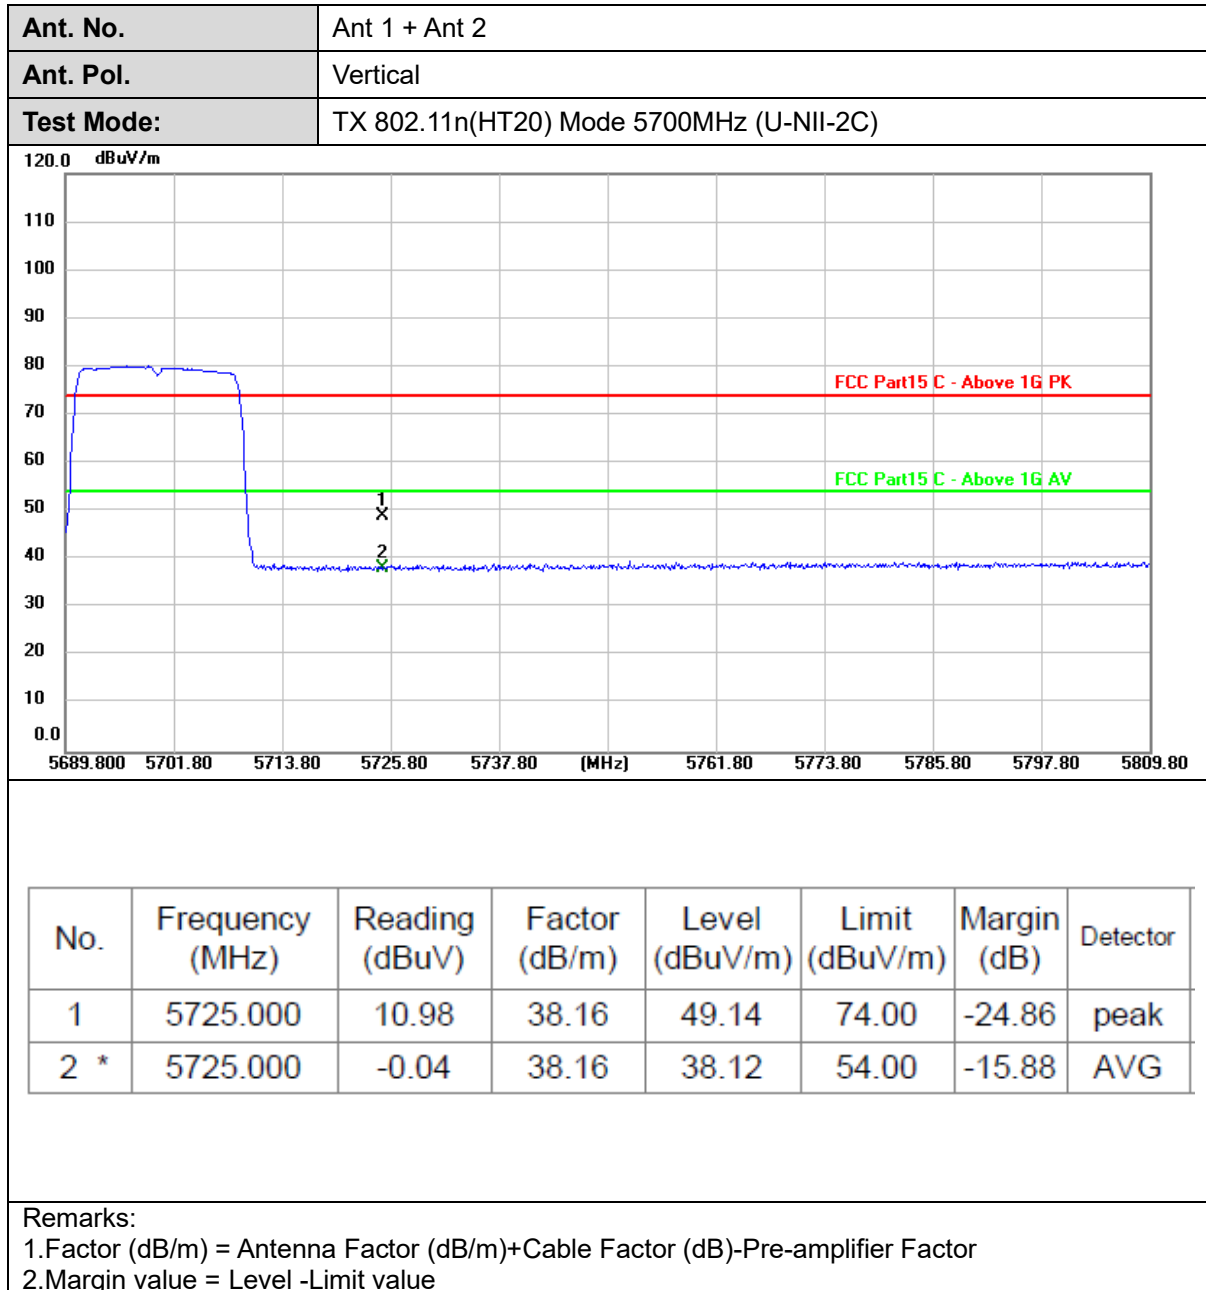


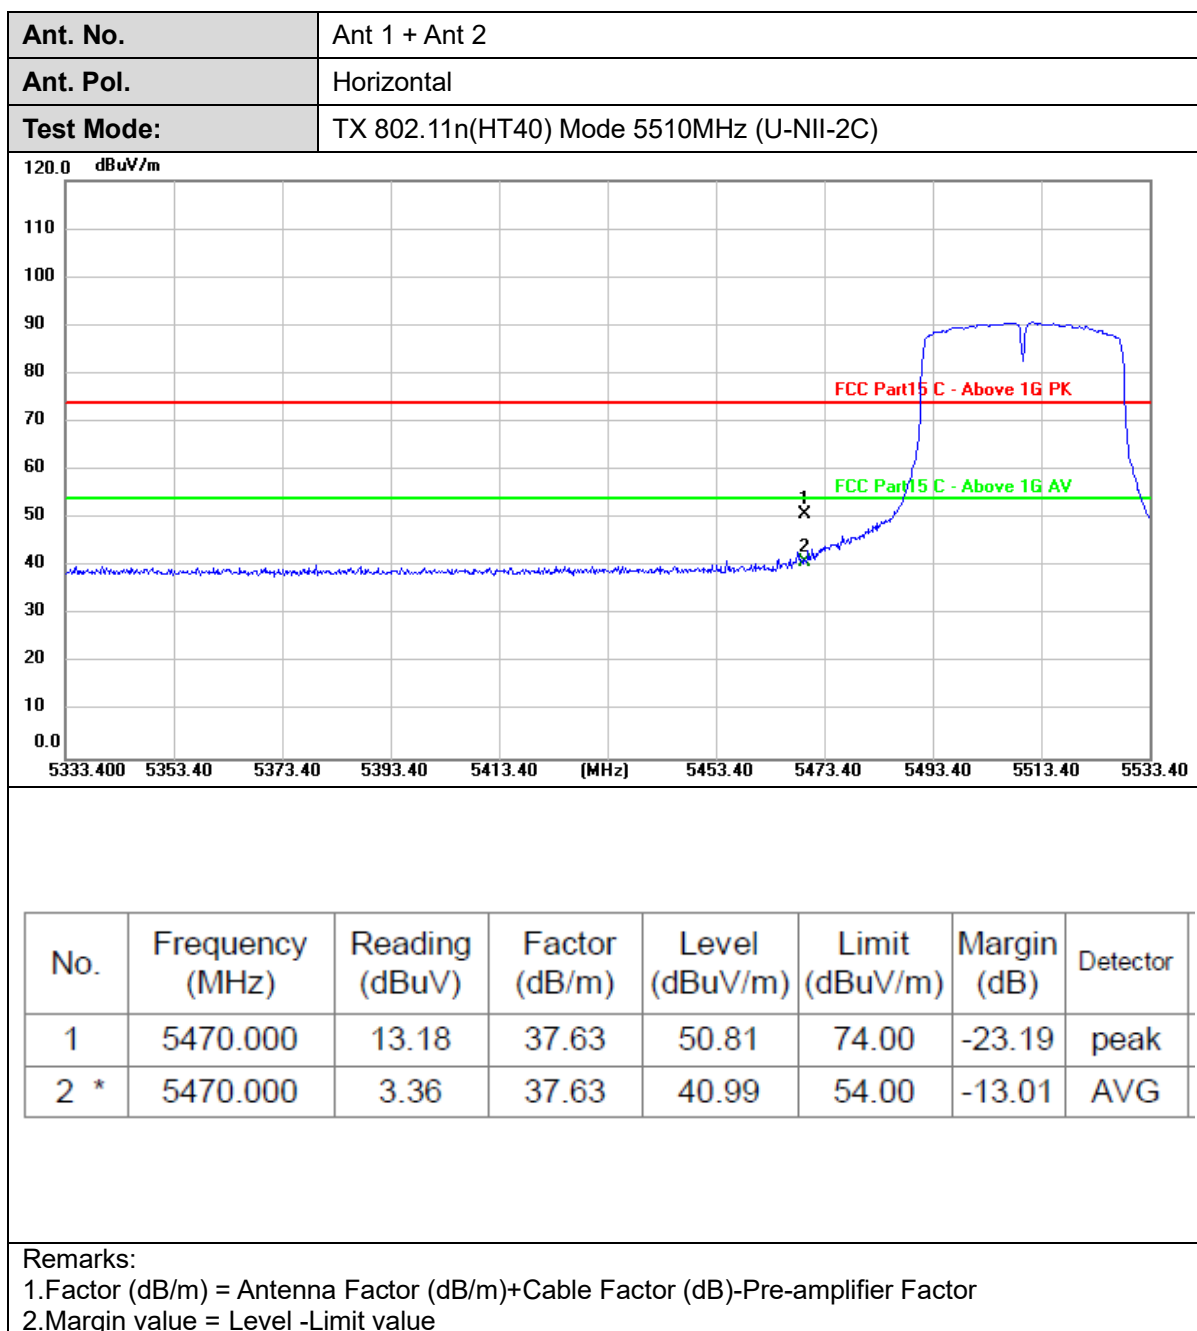


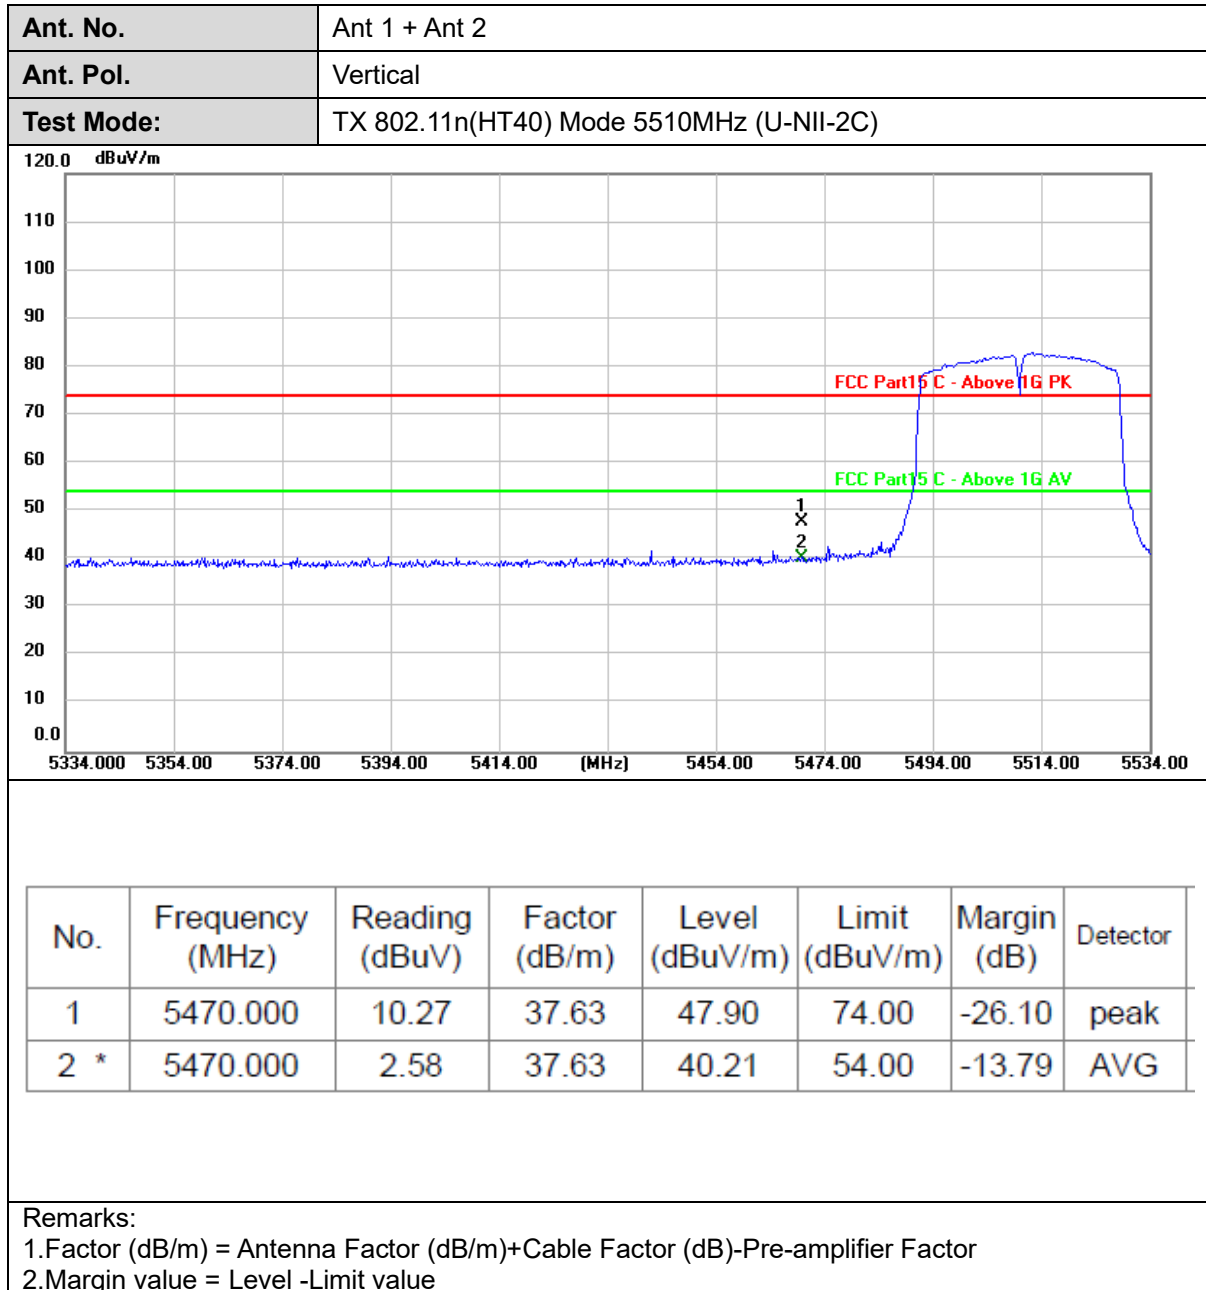


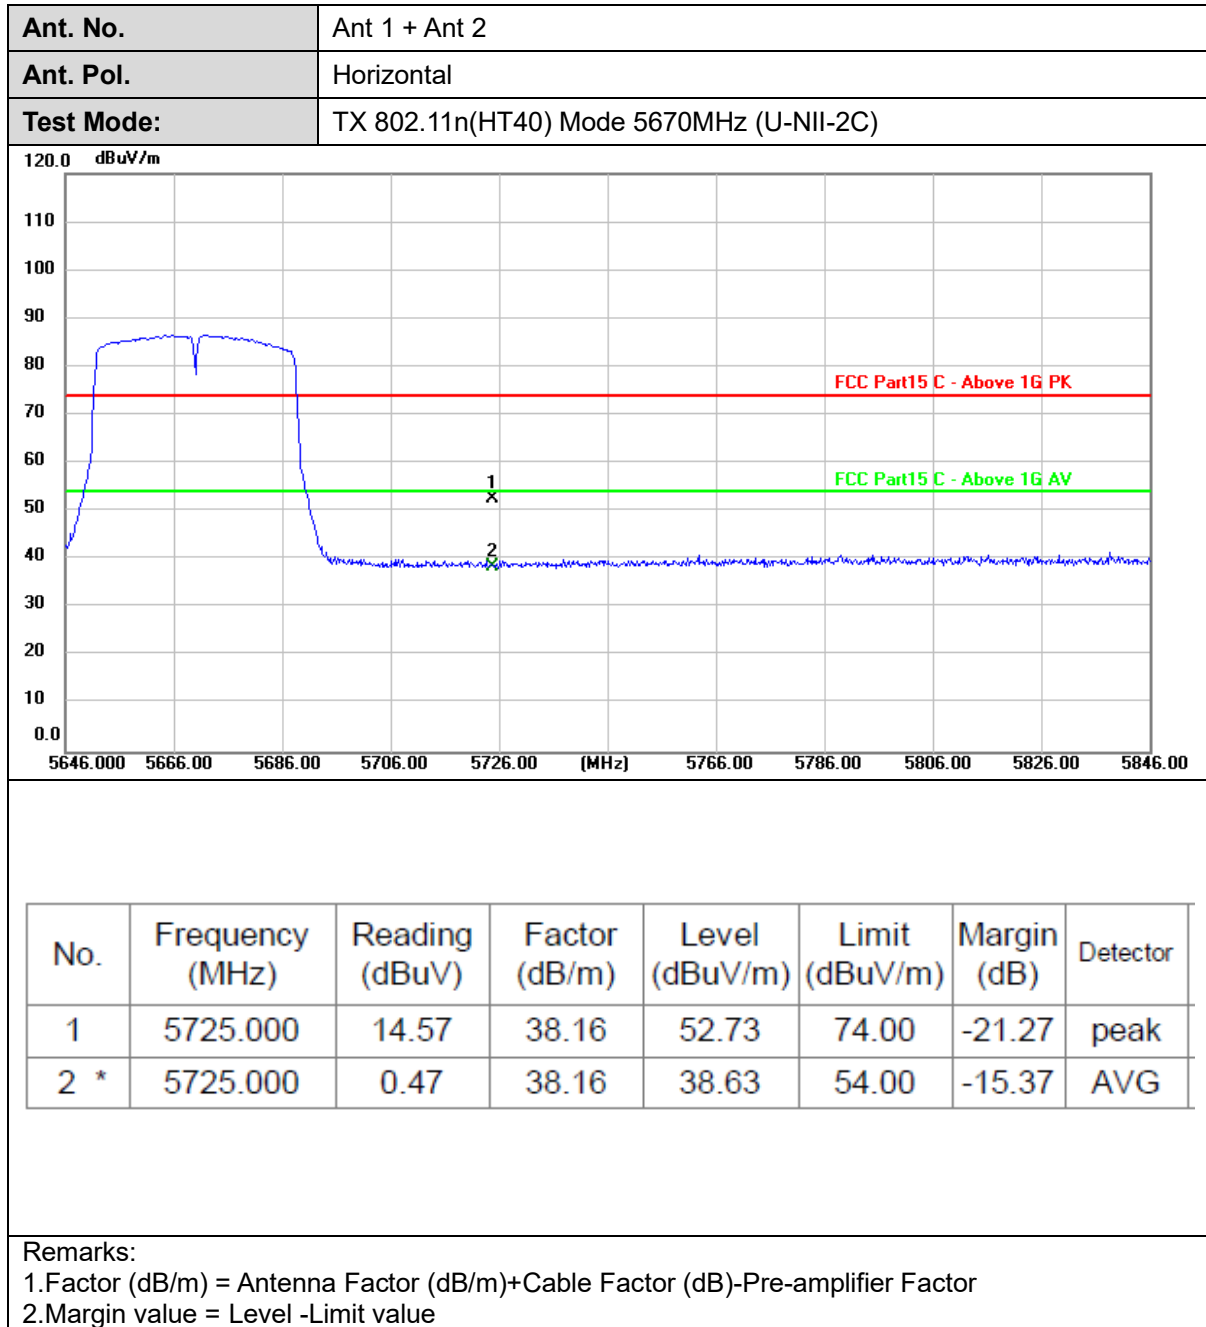


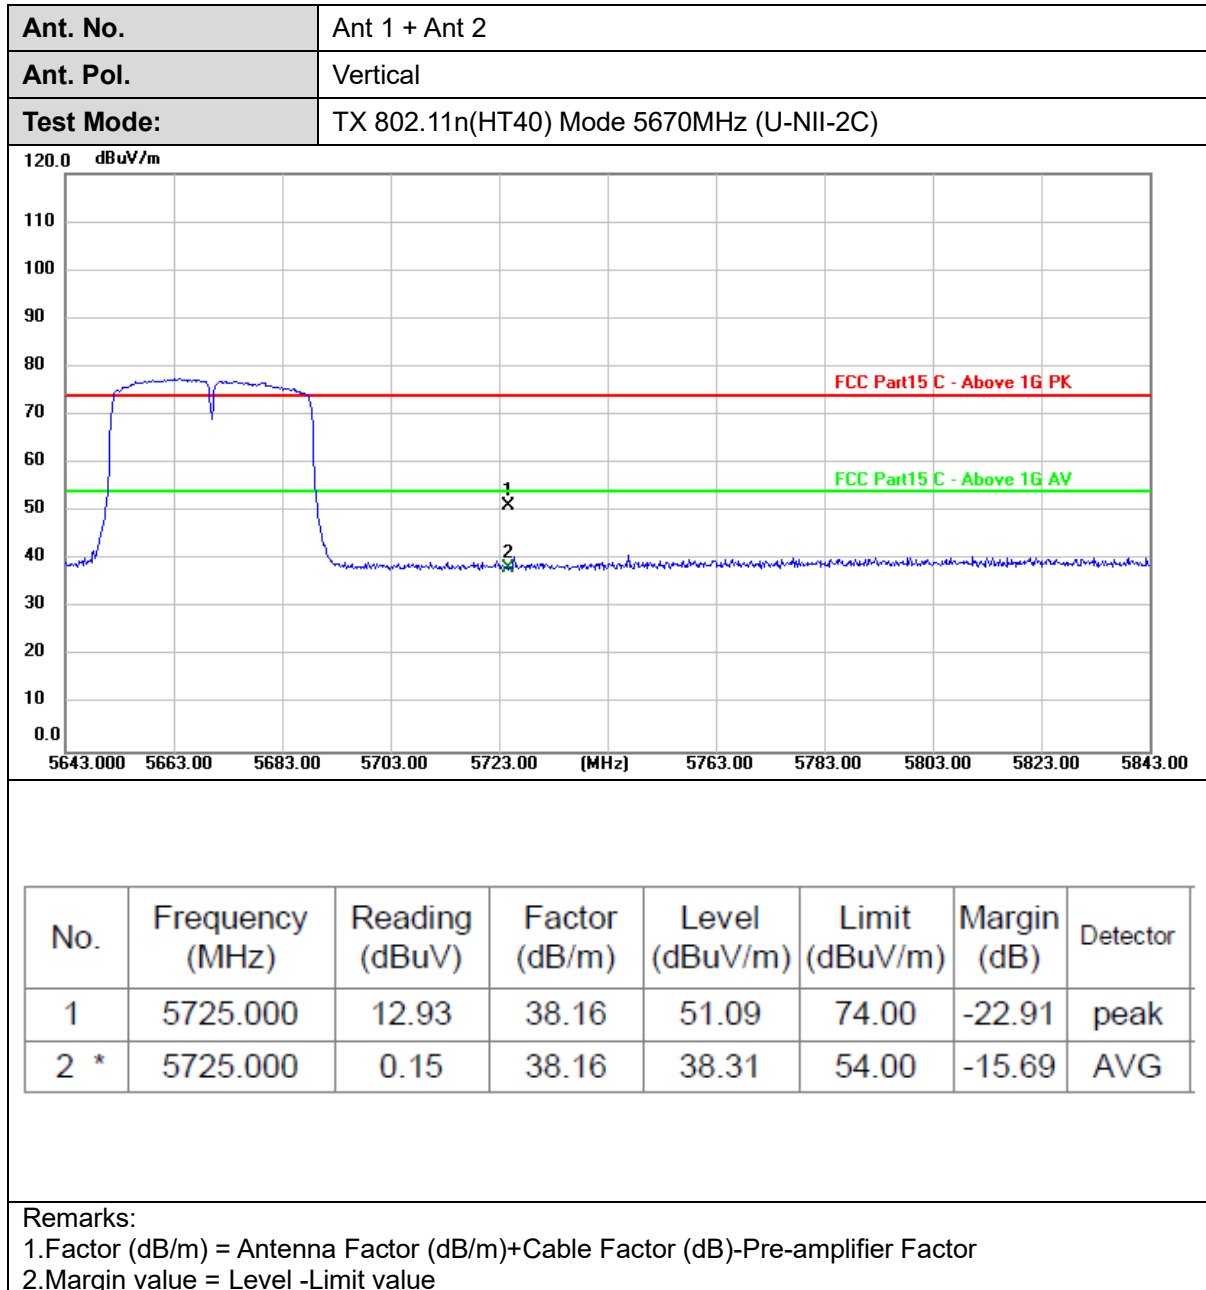


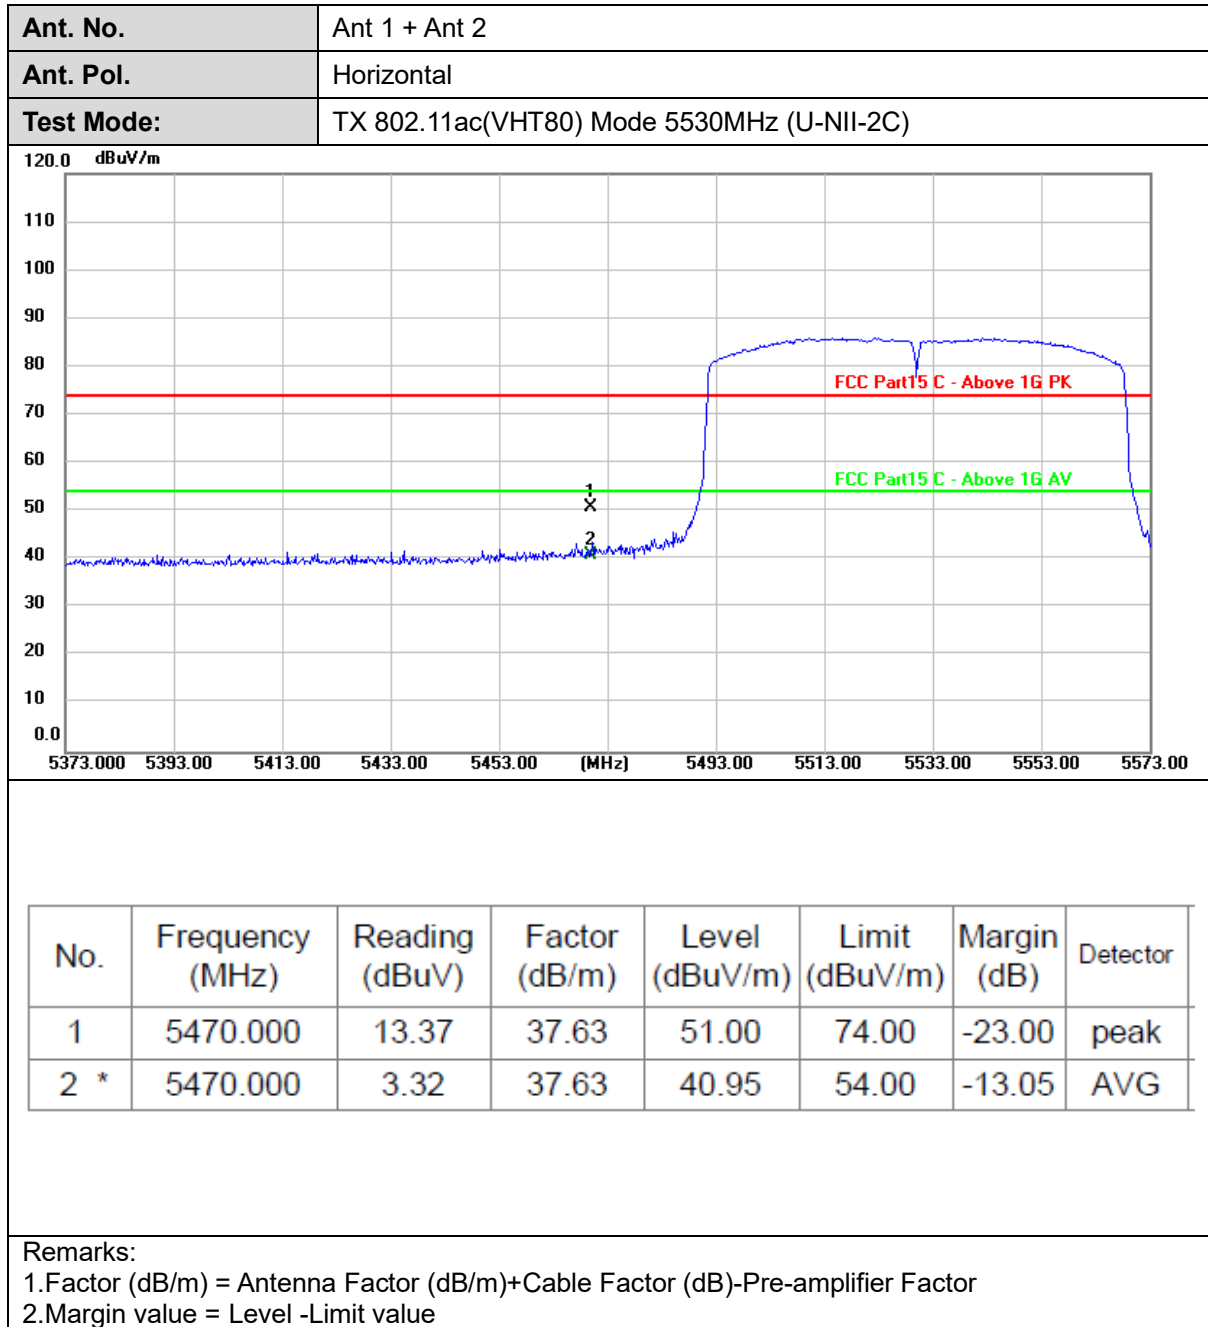


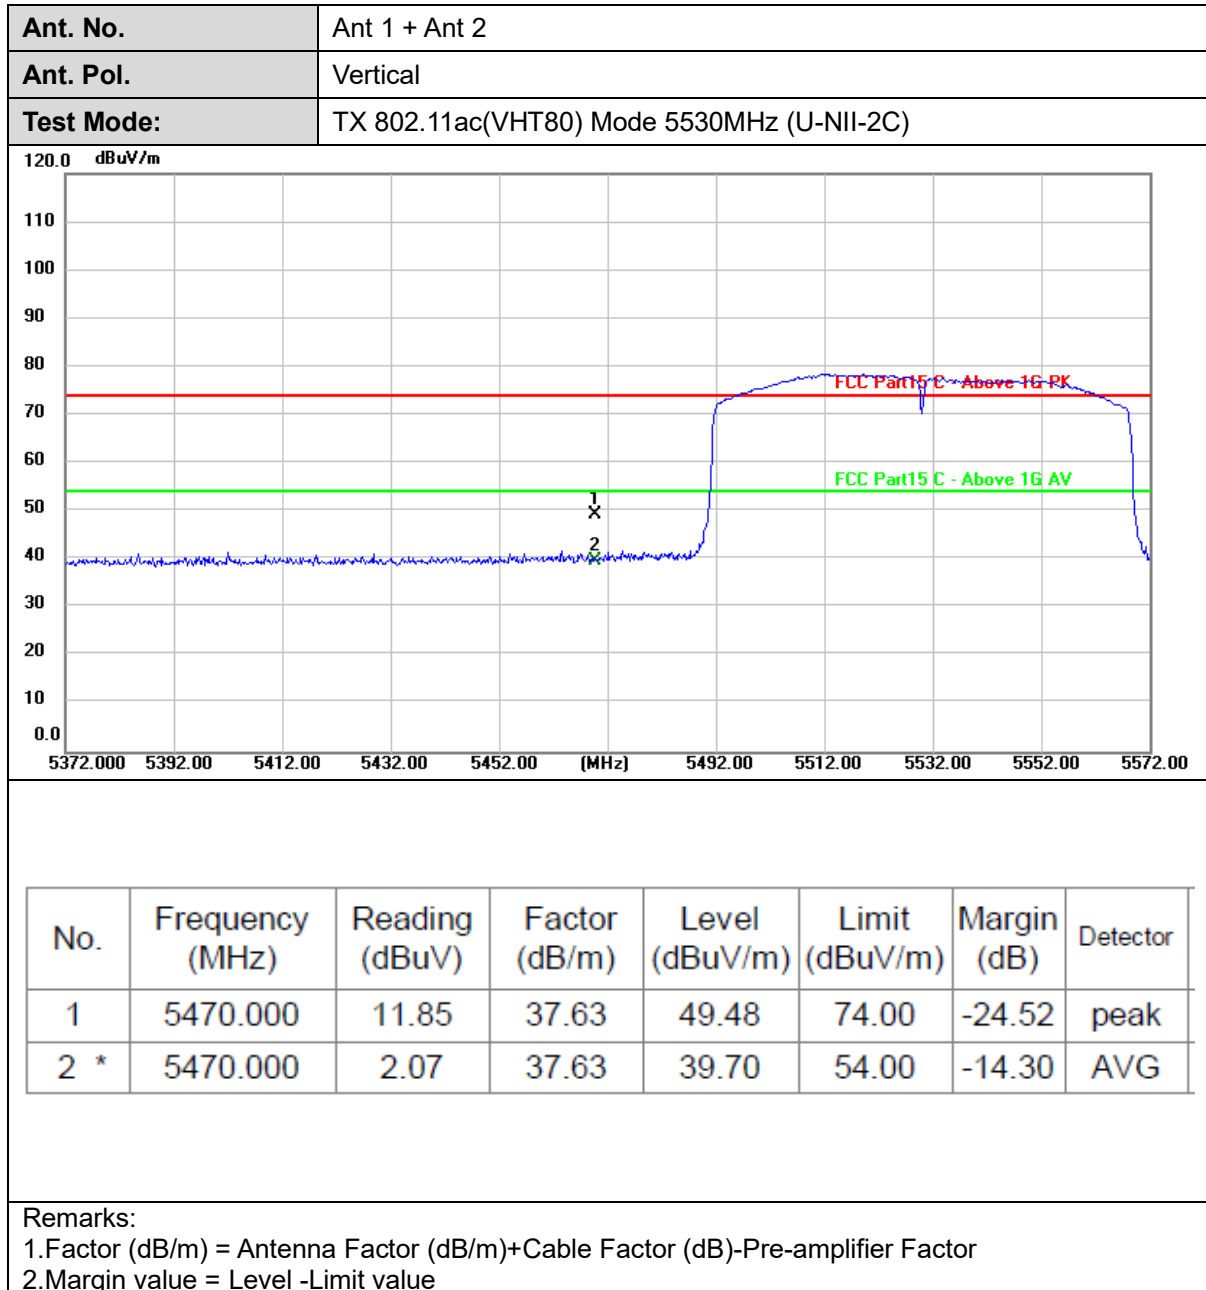


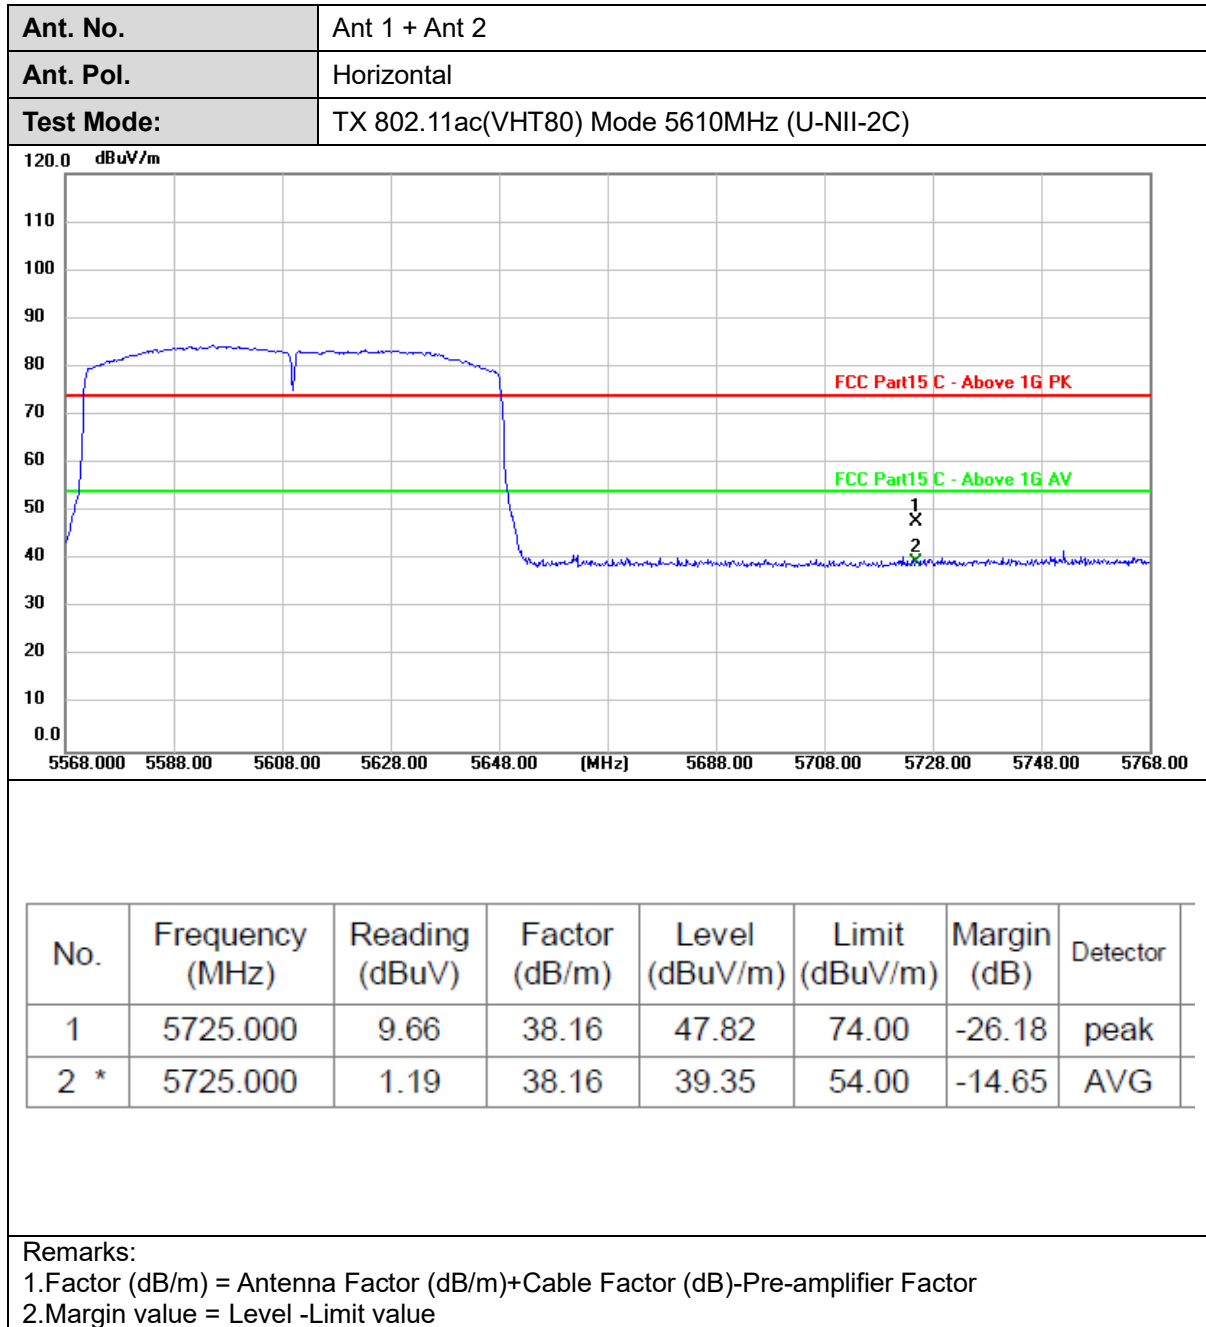


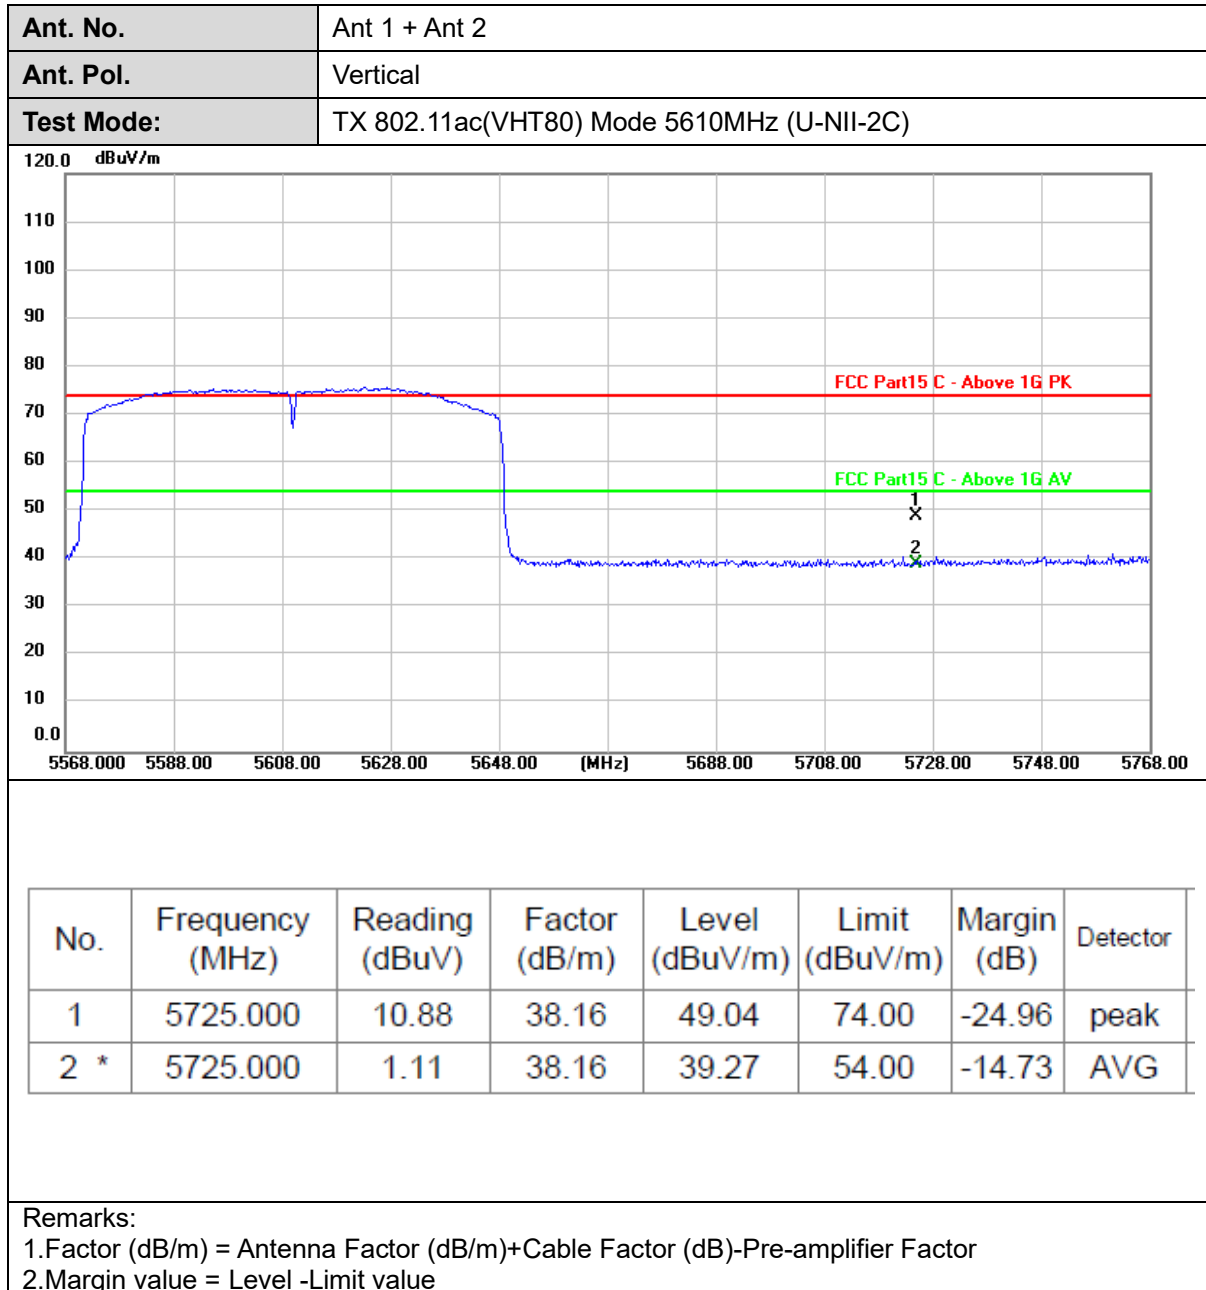


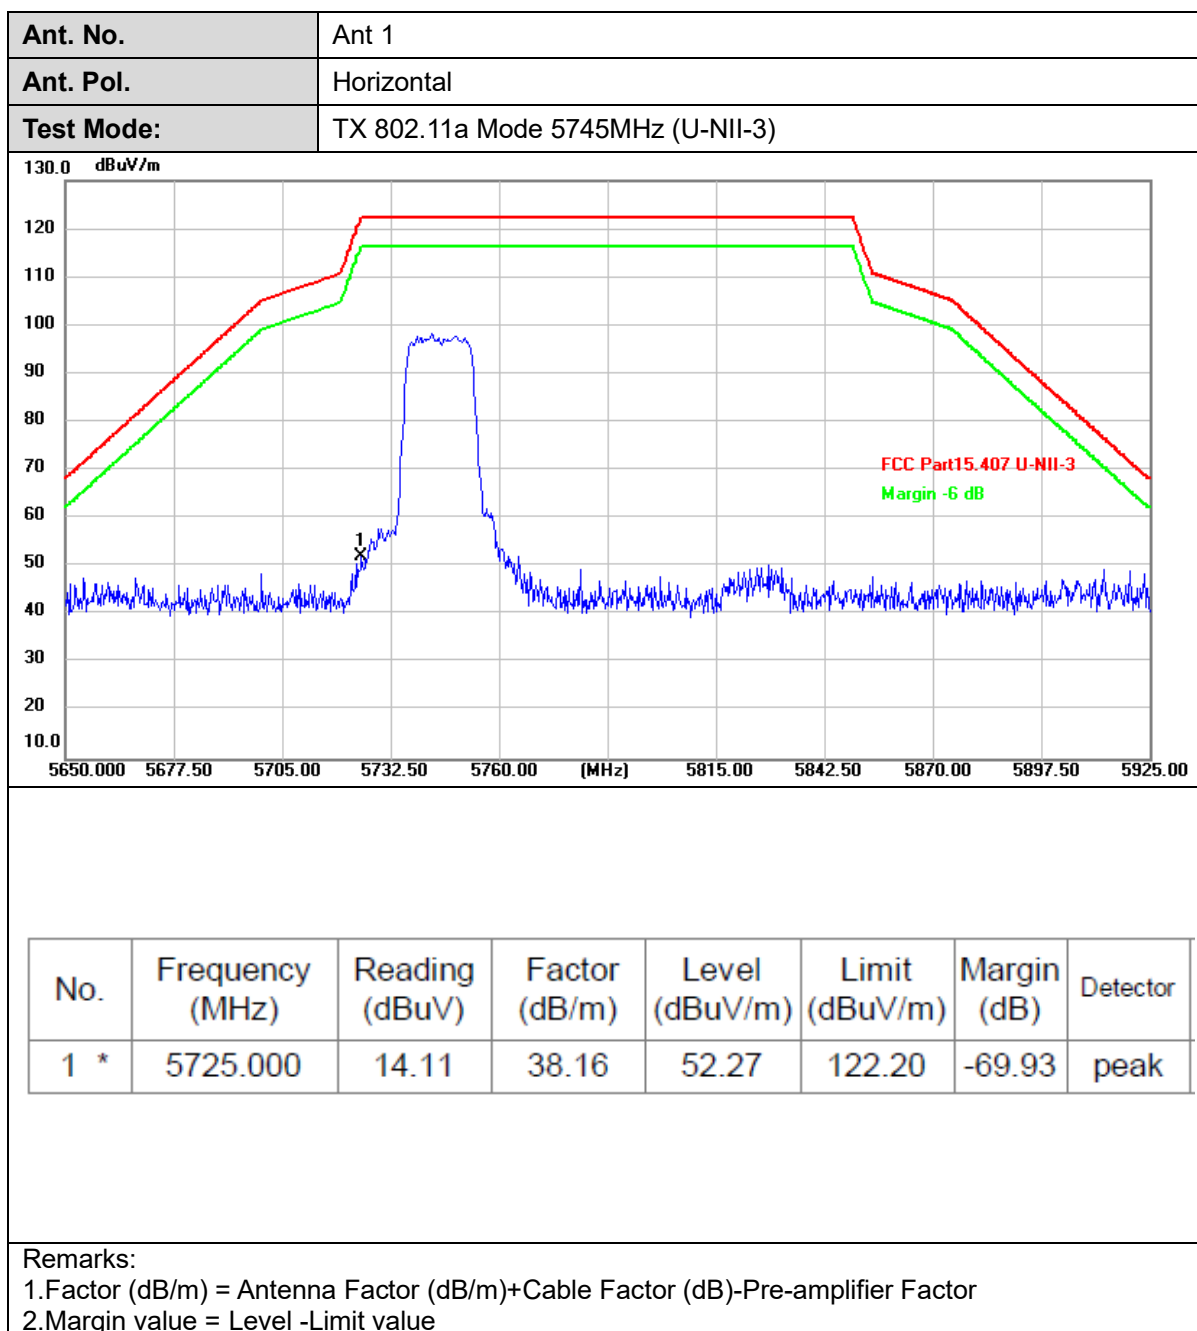


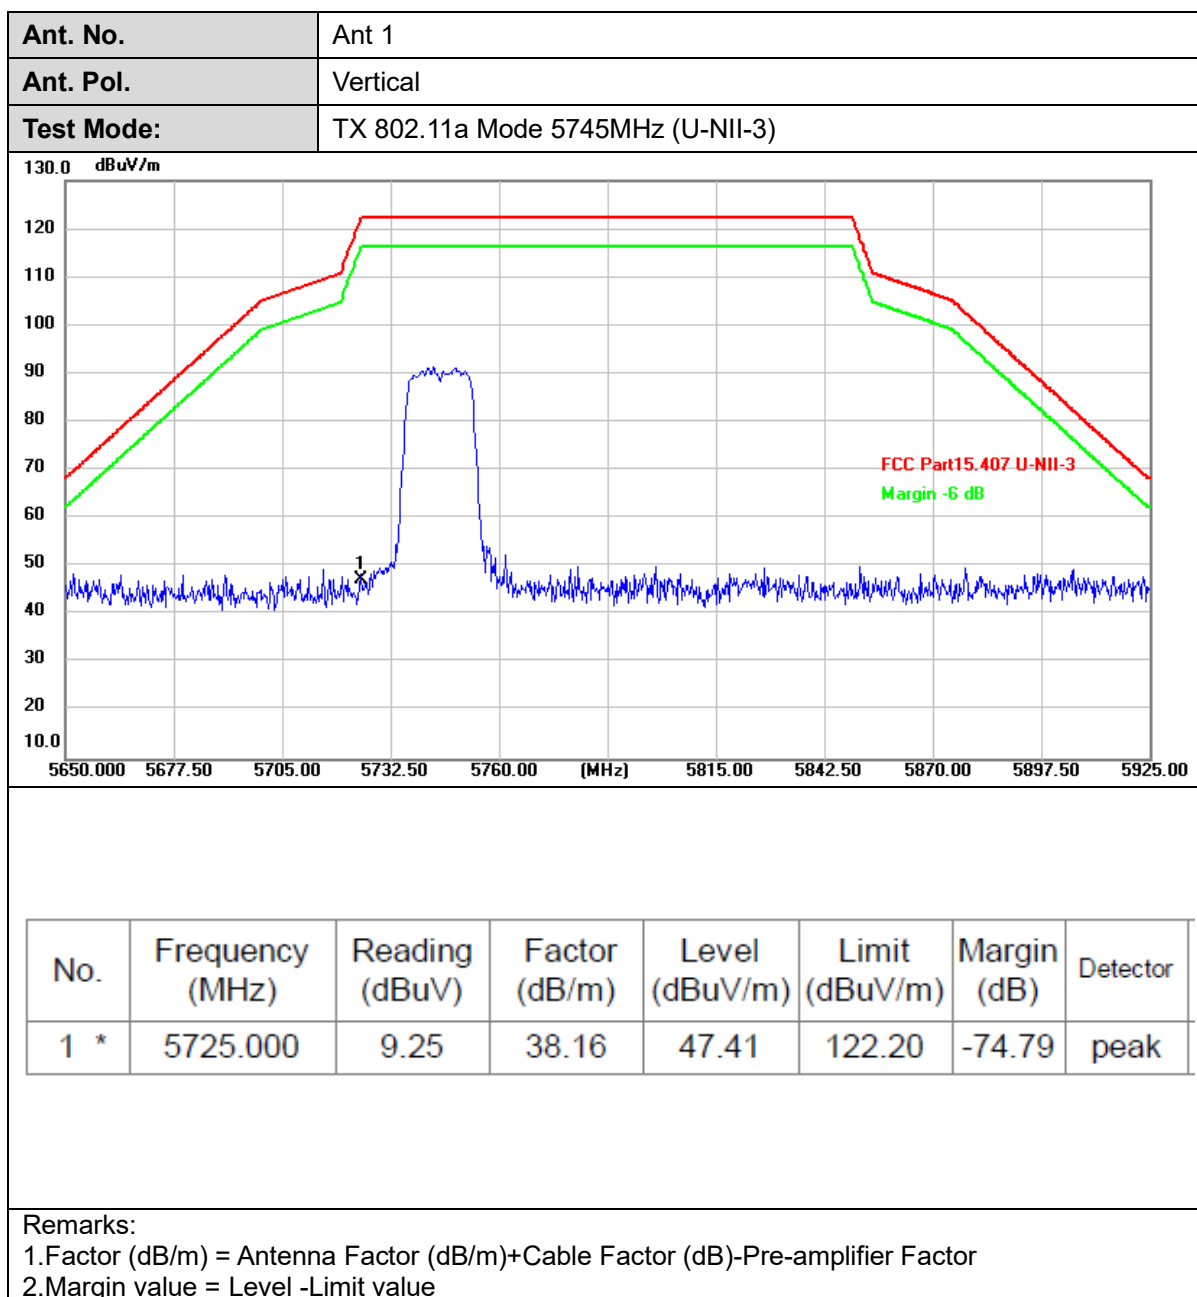


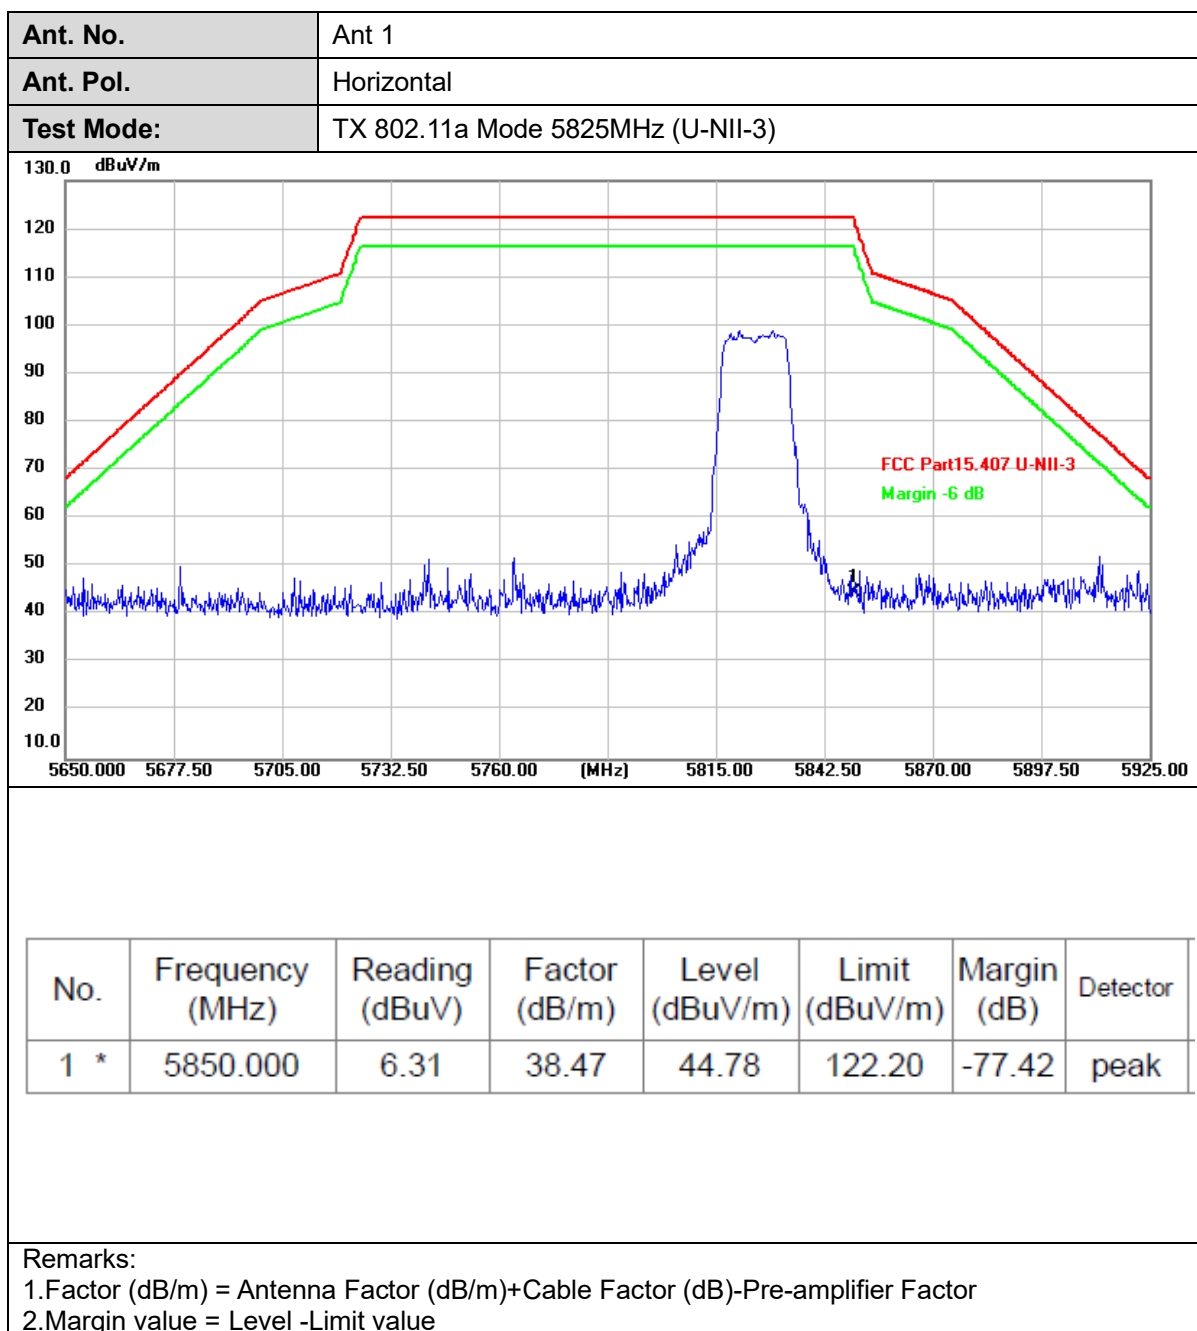


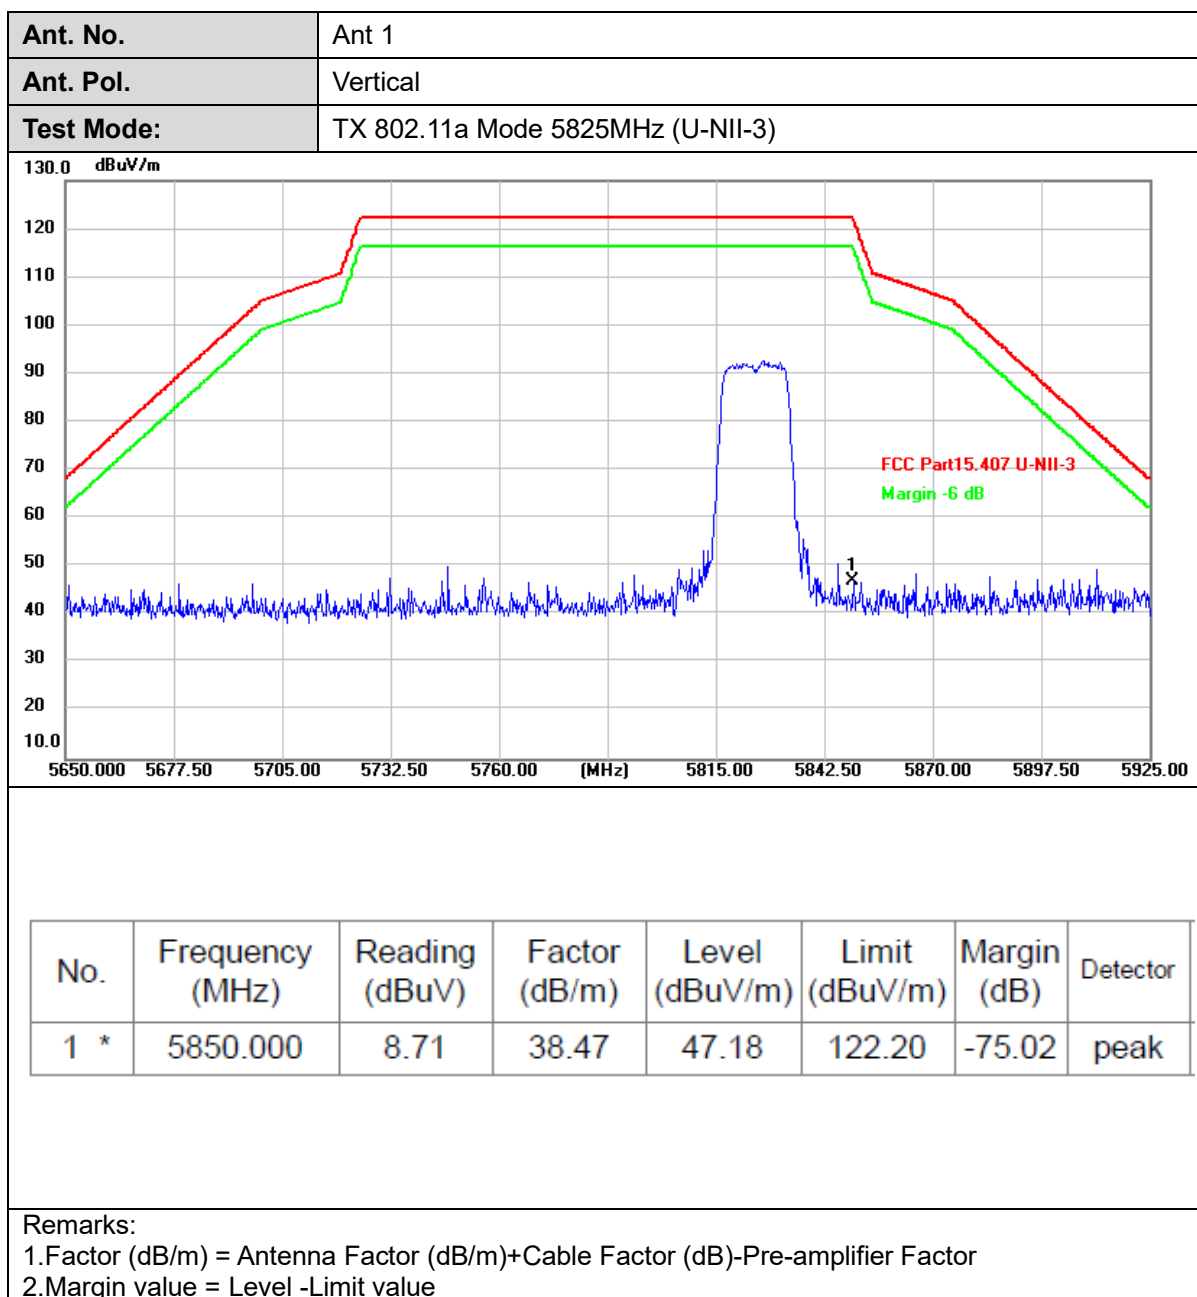


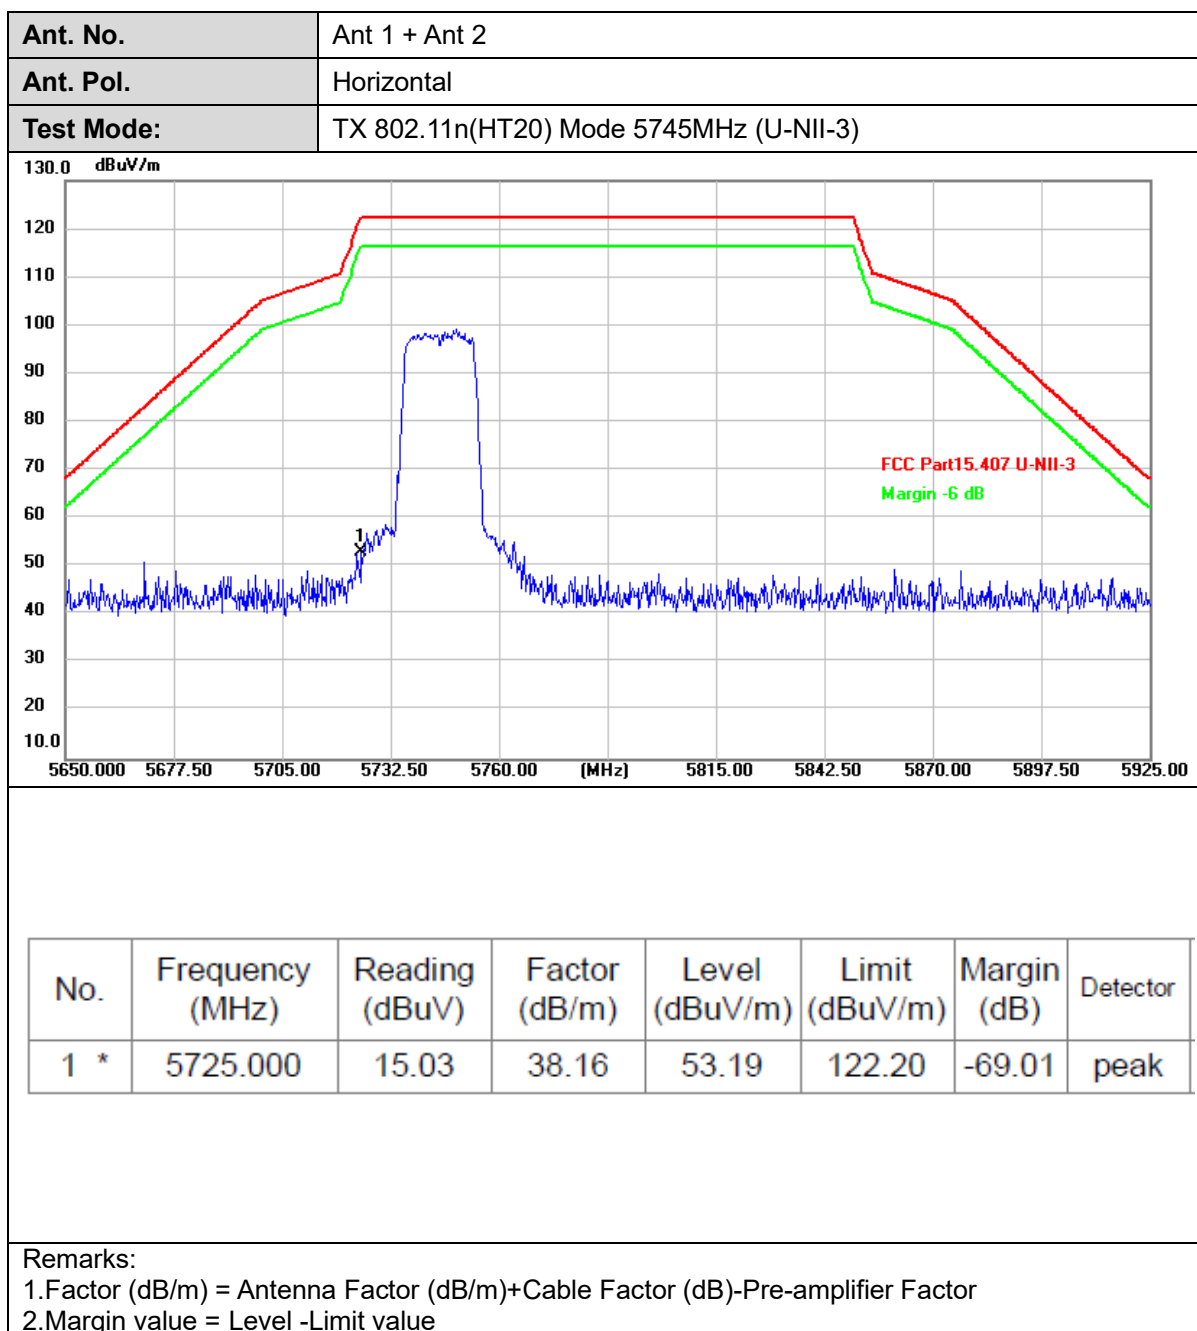


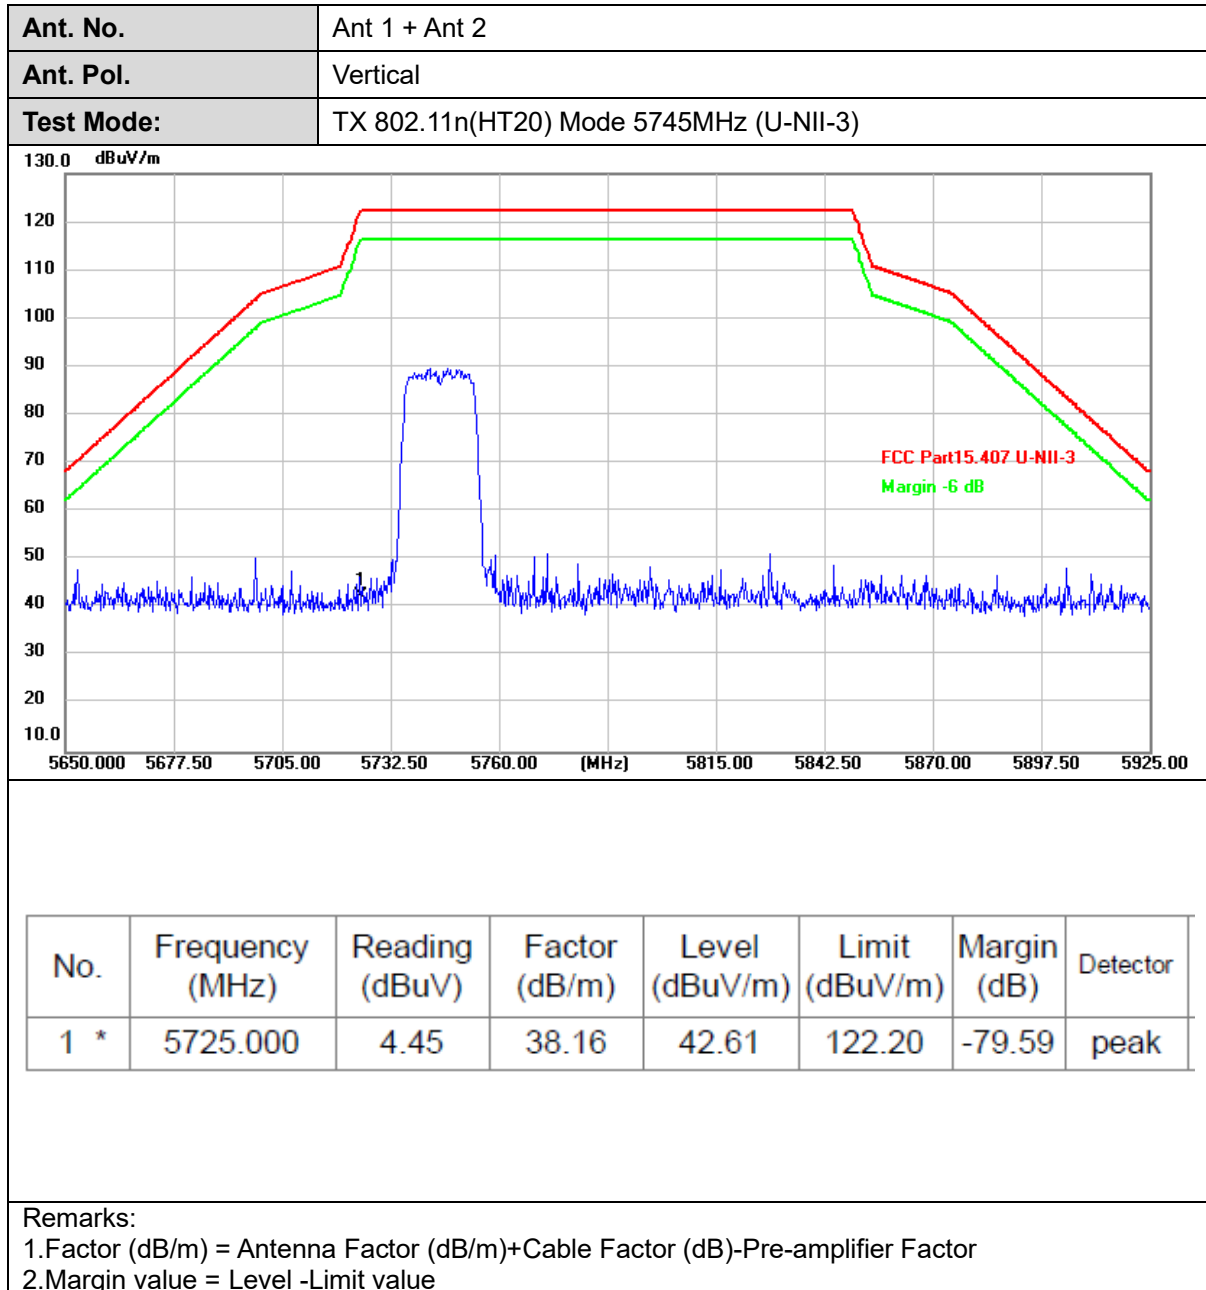


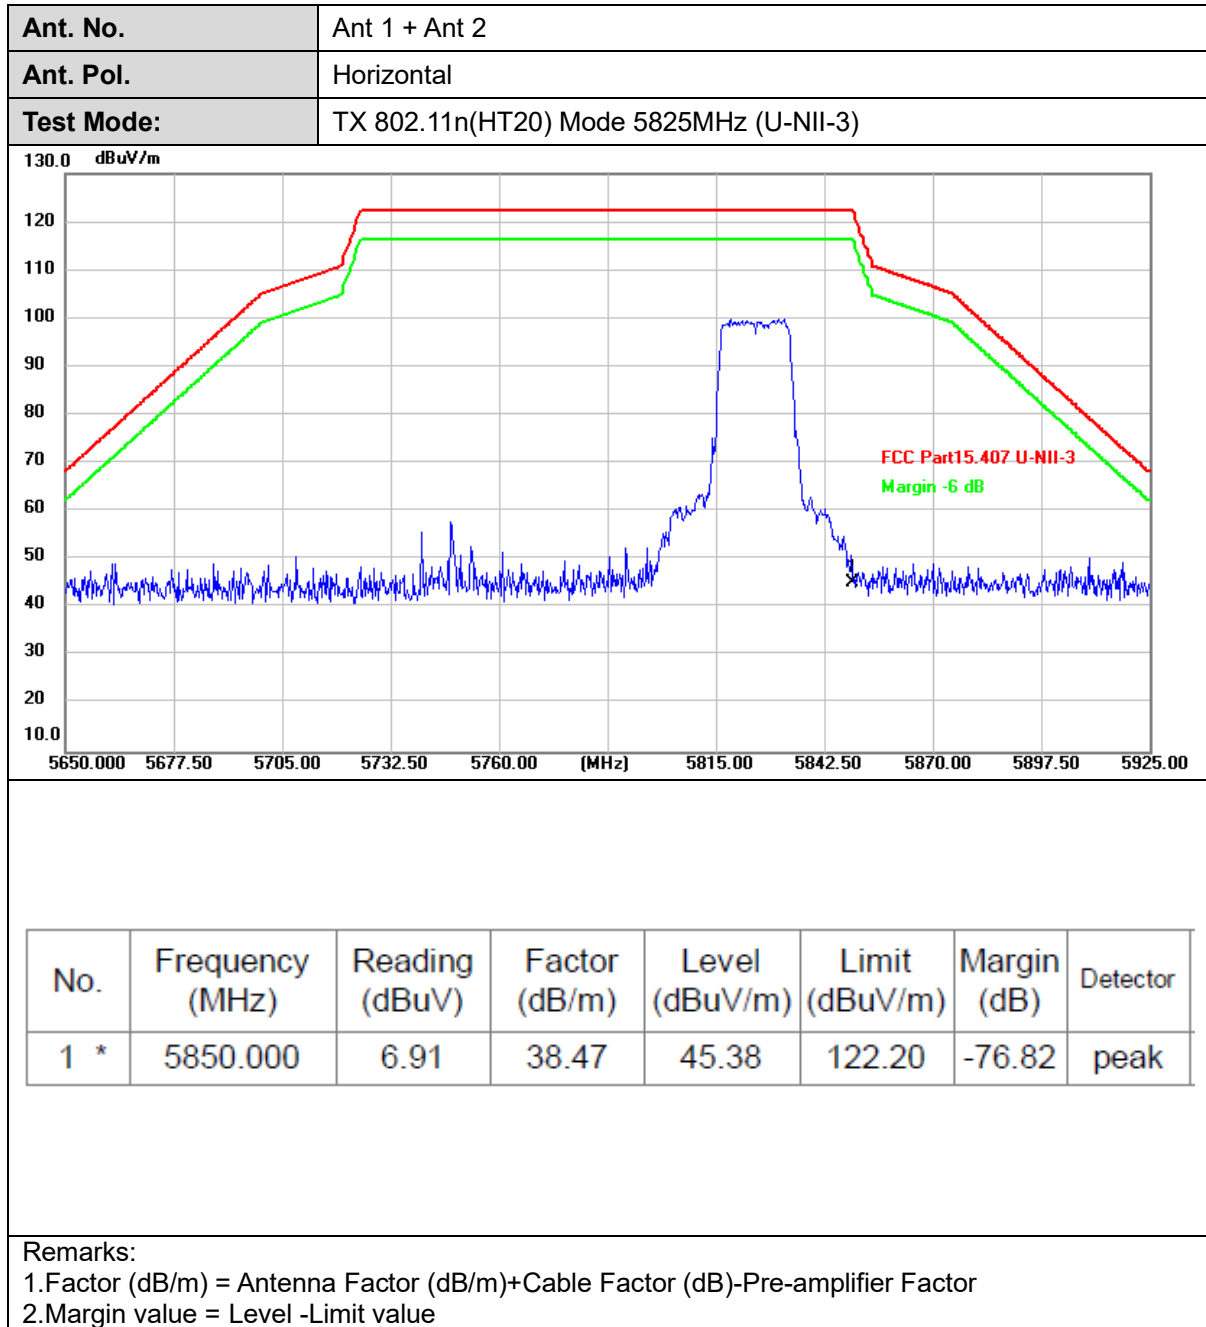


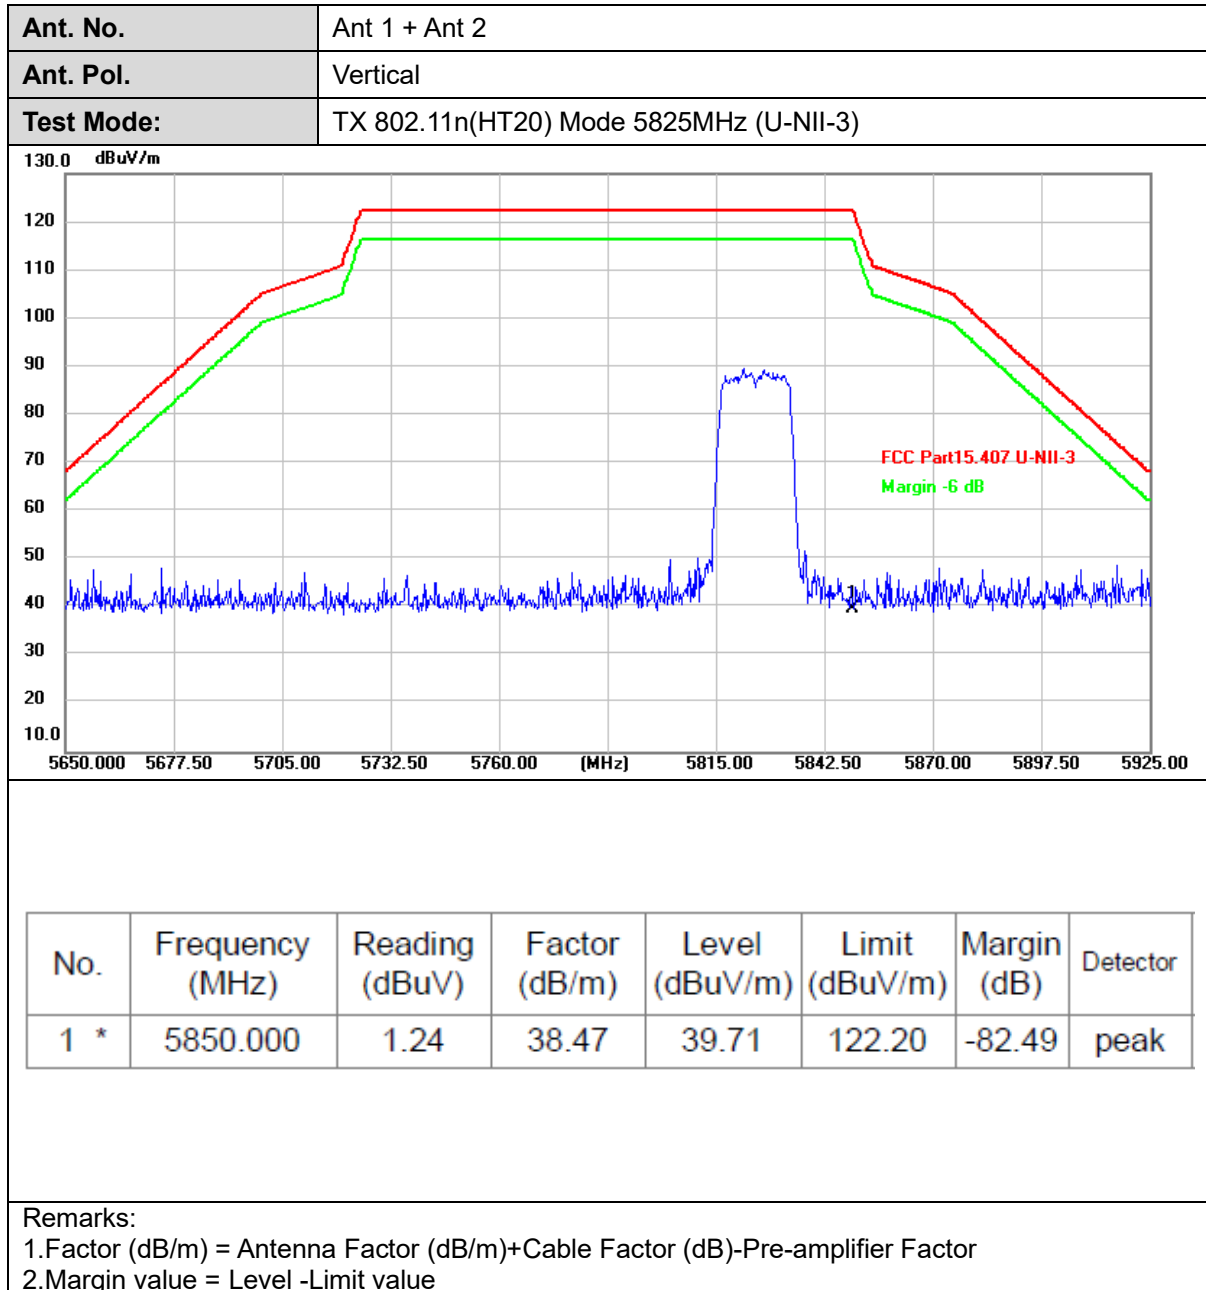


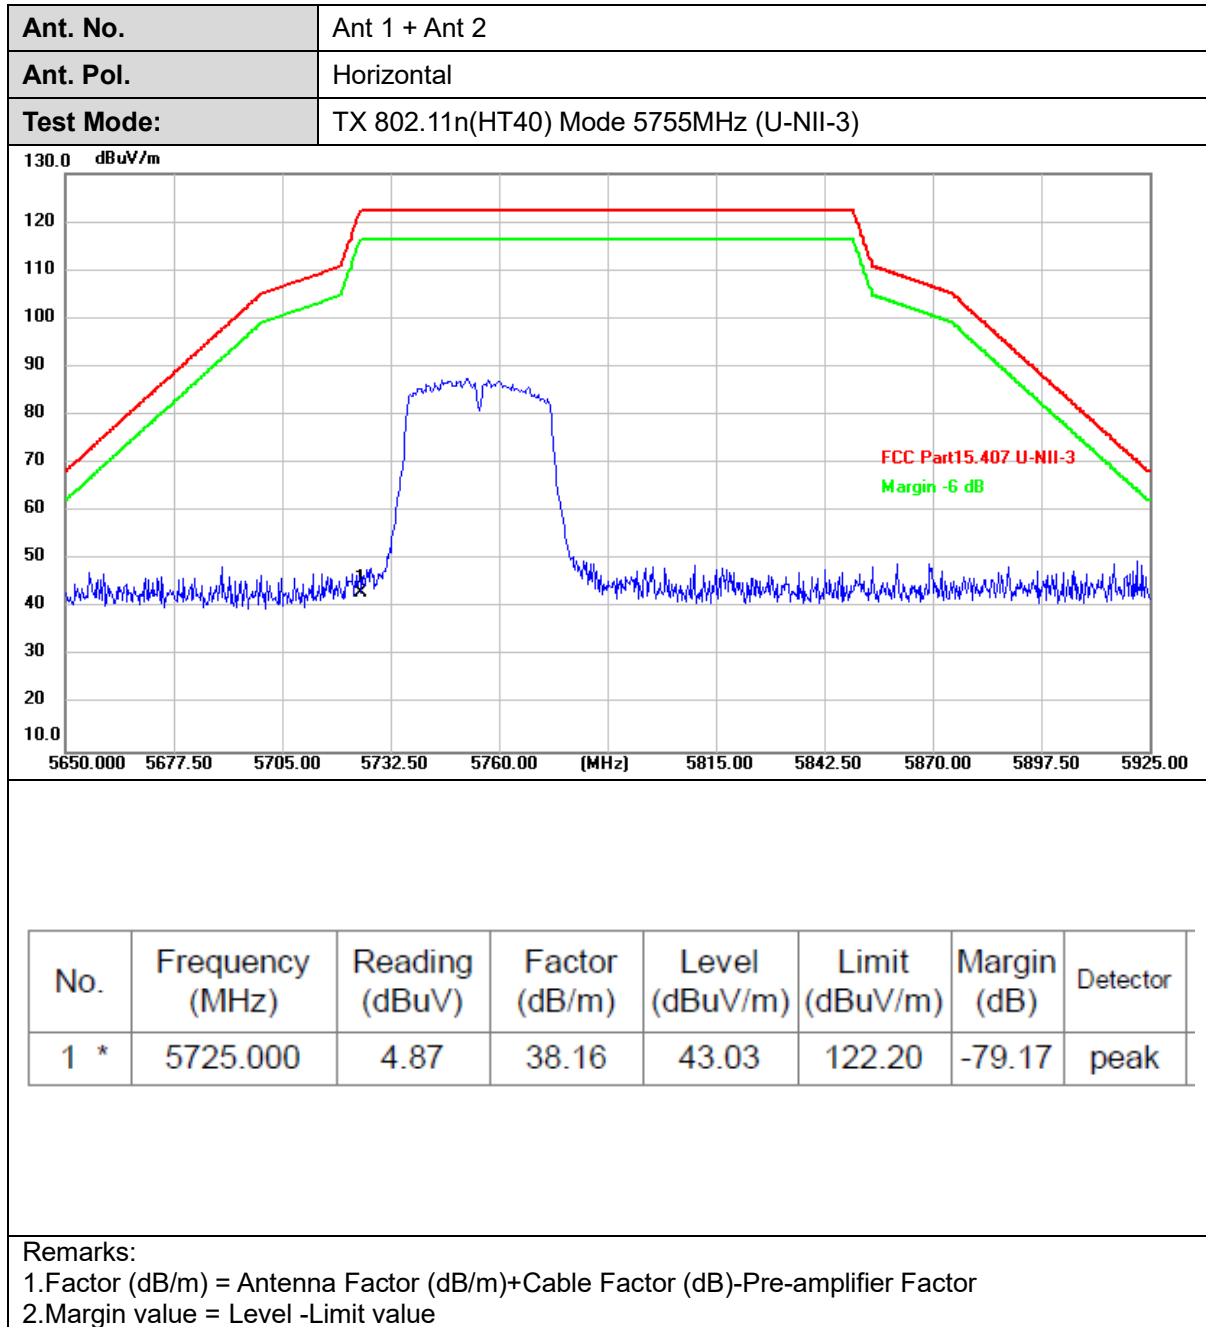


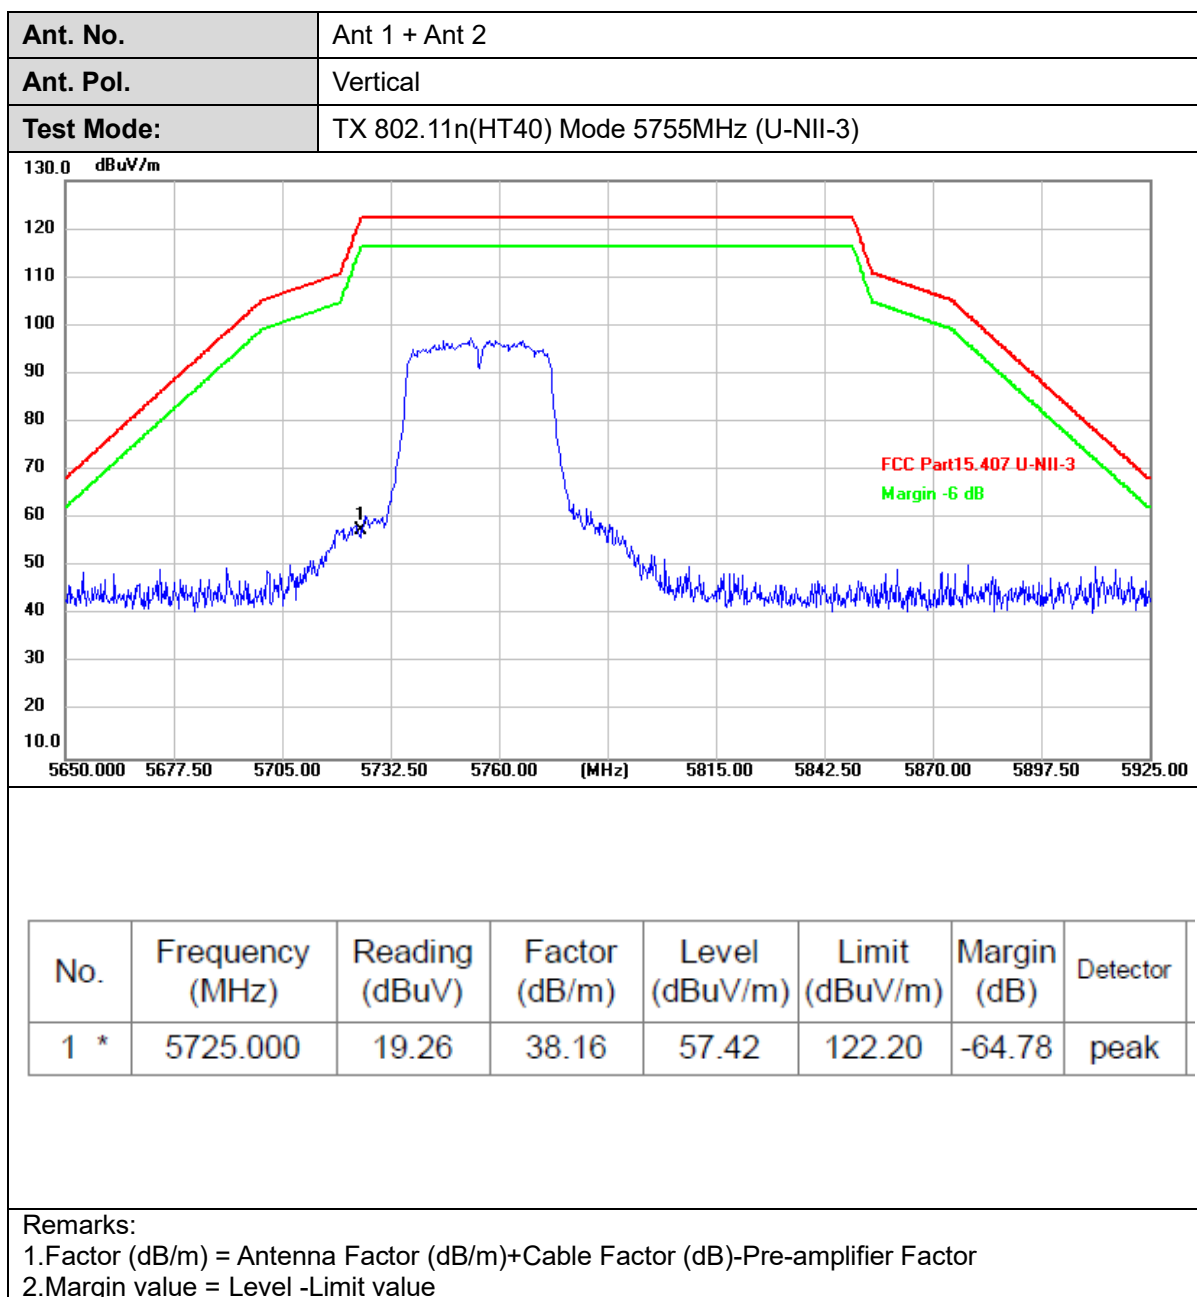

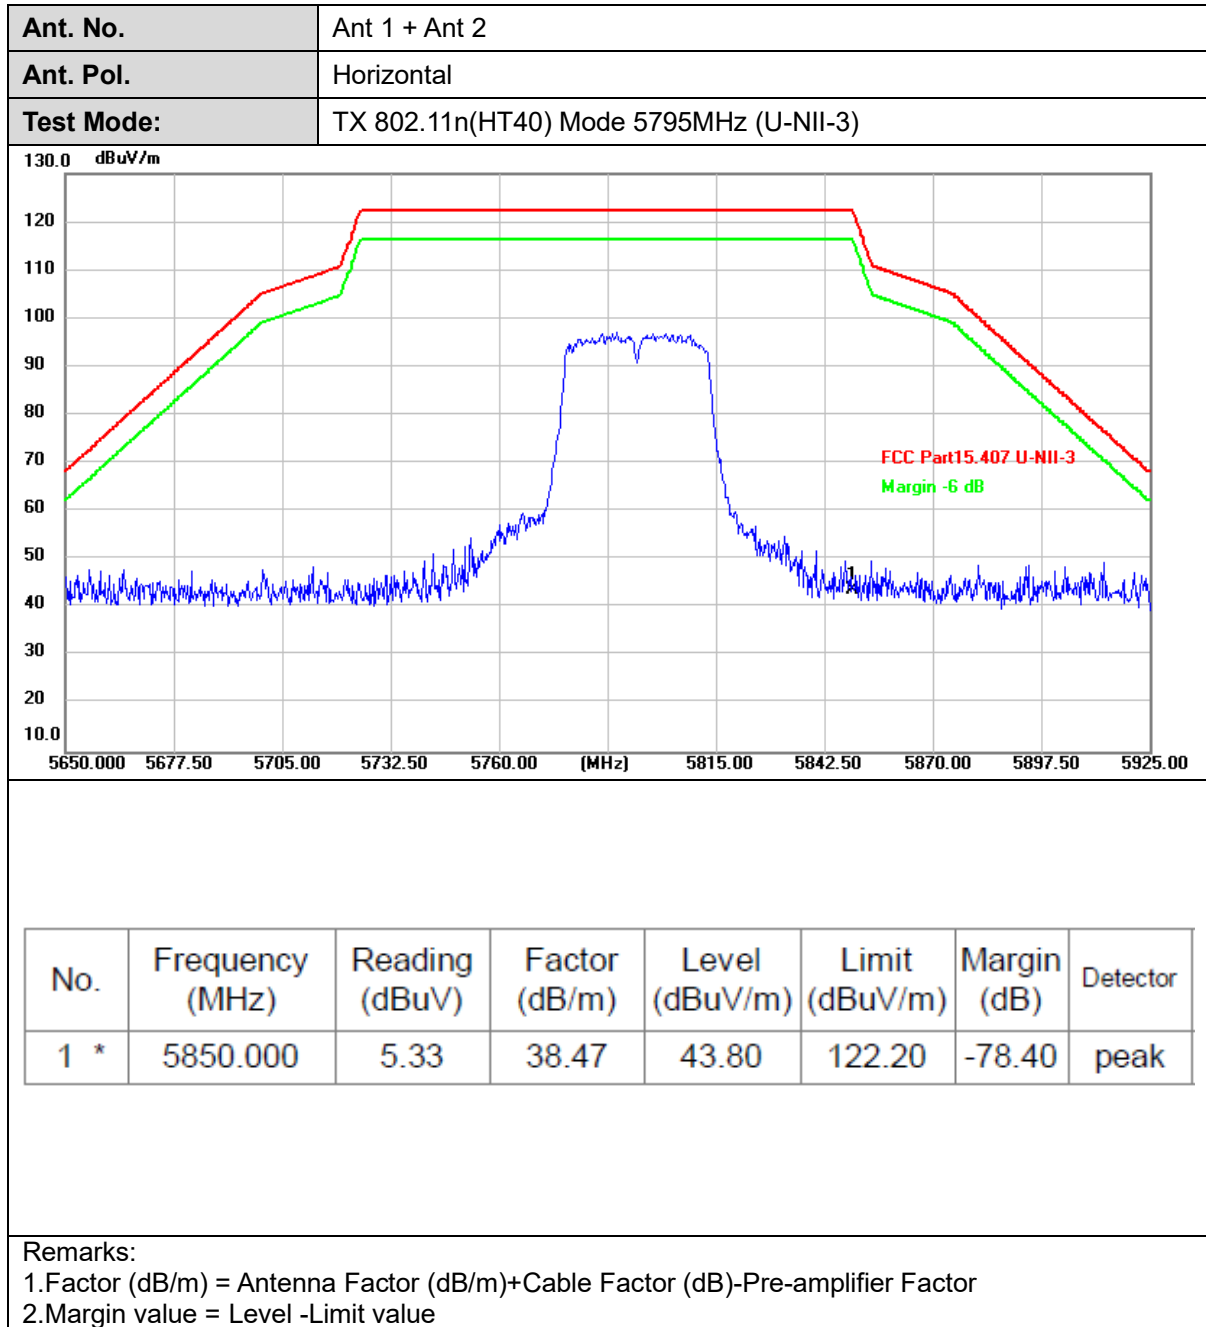

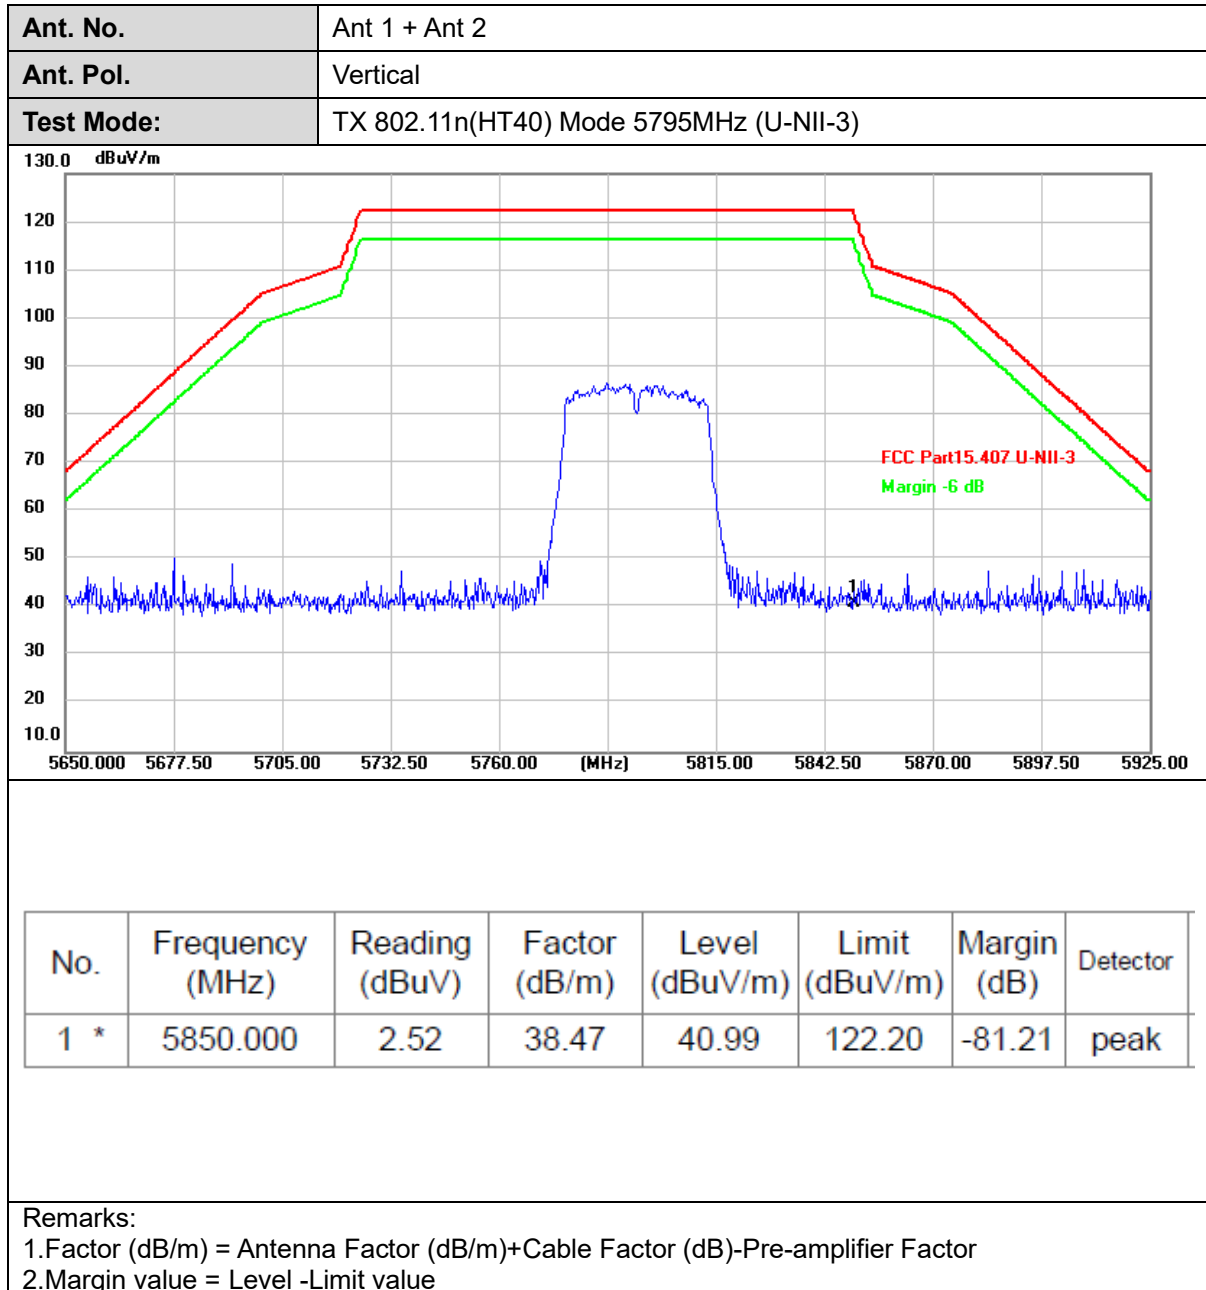

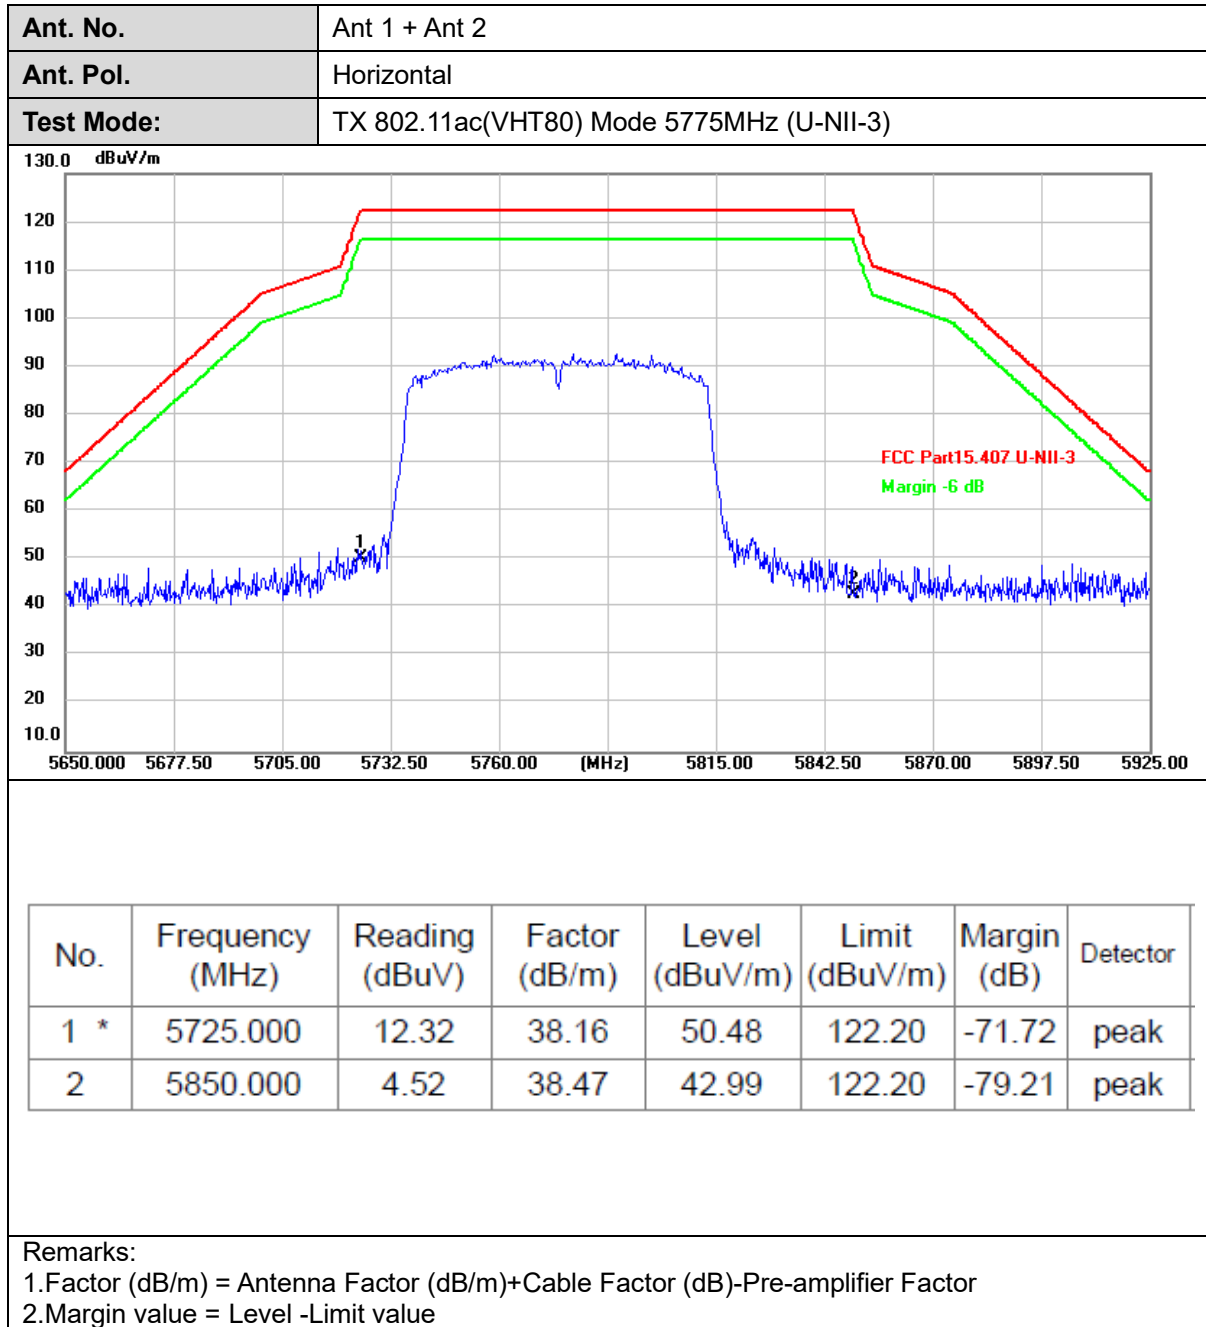

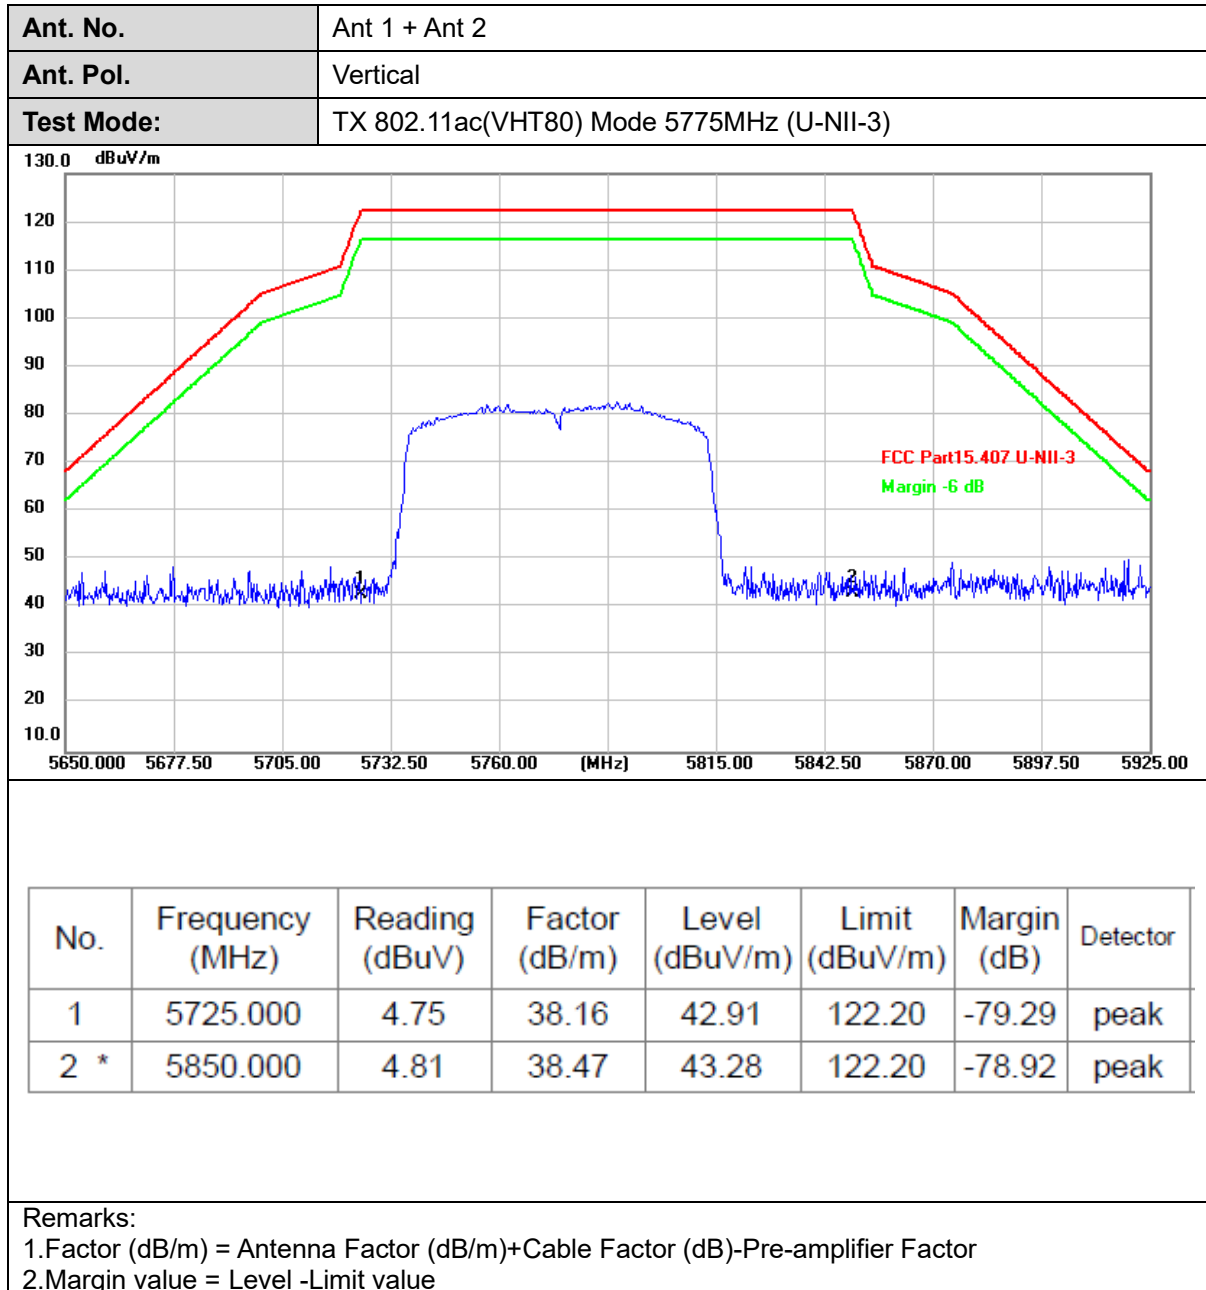




3.4. Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a) & (e)

Test Item	Limit	Frequency Range (MHz)
26dB Bandwidth& 99% Bandwidth	N/A	5150~5250
		5250~5350
		5500~5700
6 dB Bandwidth	≥500 kHz	5725~5850

Test Configuration



Test Procedure

Please refer to KDB789033 D02 for the measurement methods.

The setting of the spectrum analyzer as below:

26dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>26 dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	>RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto



6dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>6 dB Bandwidth
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

NOTE: The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.

**Test Result****26dB Bandwidth & 99% Bandwidth**

TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	OCB [MHz]	Verdict
11A	Ant1	5180	18.560	16.480	PASS
	Ant2	5180	18.360	16.472	PASS
	Ant1	5200	18.360	16.452	PASS
	Ant2	5200	18.320	16.457	PASS
	Ant1	5240	18.480	16.499	PASS
	Ant2	5240	18.560	16.481	PASS
	Ant1	5260	18.600	16.464	PASS
	Ant2	5260	18.720	16.460	PASS
	Ant1	5280	18.480	16.492	PASS
	Ant2	5280	18.720	16.506	PASS
	Ant1	5320	18.400	16.497	PASS
	Ant2	5320	18.440	16.475	PASS
	Ant1	5500	18.400	16.527	PASS
	Ant2	5500	18.840	16.528	PASS
	Ant1	5580	18.480	16.486	PASS
	Ant2	5580	18.560	16.553	PASS
	Ant1	5700	18.360	16.530	PASS
	Ant2	5700	18.480	16.489	PASS
	Ant1	5745	18.400	16.473	PASS
	Ant2	5745	18.520	16.536	PASS
	Ant1	5785	18.400	16.476	PASS
	Ant2	5785	18.600	16.483	PASS
	Ant1	5825	18.560	16.498	PASS
	Ant2	5825	18.720	16.548	PASS
11N20MIMO	Ant1	5180	19.520	17.622	PASS
	Ant2	5180	19.360	17.604	PASS
	Ant1	5200	19.440	17.593	PASS
	Ant2	5200	19.360	17.590	PASS
	Ant1	5240	19.600	17.616	PASS
	Ant2	5240	19.480	17.621	PASS
	Ant1	5260	19.520	17.625	PASS
	Ant2	5260	19.480	17.620	PASS
	Ant1	5280	19.320	17.635	PASS
	Ant2	5280	19.440	17.640	PASS
	Ant1	5320	19.520	17.602	PASS
	Ant2	5320	19.440	17.601	PASS
	Ant1	5500	19.480	17.646	PASS
	Ant2	5500	19.400	17.658	PASS
	Ant1	5580	19.360	17.639	PASS
	Ant2	5580	19.400	17.626	PASS
	Ant1	5700	19.360	17.624	PASS
	Ant2	5700	19.400	17.623	PASS
	Ant1	5745	19.360	17.614	PASS
	Ant2	5745	19.520	17.642	PASS
	Ant1	5785	19.440	17.640	PASS
	Ant2	5785	19.480	17.618	PASS
	Ant1	5825	19.400	17.628	PASS
	Ant2	5825	19.400	17.633	PASS
11N40MIMO	Ant1	5190	40.480	36.210	PASS
	Ant2	5190	40.080	36.133	PASS
	Ant1	5230	41.440	36.514	PASS
	Ant2	5230	41.120	36.753	PASS
	Ant1	5270	40.640	36.397	PASS
	Ant2	5270	40.960	36.290	PASS
	Ant1	5310	40.240	36.186	PASS
	Ant2	5310	40.960	36.281	PASS
	Ant1	5510	41.440	36.487	PASS
	Ant2	5510	41.360	36.417	PASS
	Ant1	5550	40.400	36.167	PASS

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict,
Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing
Society : yz.cncaq.com



	Ant2	5550	40.240	36.251	PASS
	Ant1	5670	40.720	36.134	PASS
	Ant2	5670	40.480	36.277	PASS
	Ant1	5755	41.280	36.301	PASS
	Ant2	5755	40.640	36.338	PASS
	Ant1	5795	40.320	36.246	PASS
	Ant2	5795	40.400	36.301	PASS
11AC80MIMO	Ant1	5210	80.640	74.423	PASS
	Ant2	5210	80.480	74.511	PASS
	Ant1	5290	81.600	74.773	PASS
	Ant2	5290	81.440	74.804	PASS
	Ant1	5530	80.640	74.691	PASS
	Ant2	5530	80.480	74.328	PASS
	Ant1	5610	81.600	74.574	PASS
	Ant2	5610	81.280	74.526	PASS
	Ant1	5775	81.120	74.720	PASS
	Ant2	5775	80.480	74.646	PASS

**6dB Bandwidth**

TestMode	Antenna	Freq(MHz)	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.280	5736.840	5753.120	0.5	PASS
	Ant2	5745	16.360	5736.800	5753.160	0.5	PASS
	Ant1	5785	16.320	5776.800	5793.120	0.5	PASS
	Ant2	5785	16.320	5776.800	5793.120	0.5	PASS
	Ant1	5825	16.280	5816.840	5833.120	0.5	PASS
	Ant2	5825	16.360	5816.800	5833.160	0.5	PASS
11N20MIMO	Ant1	5745	17.560	5736.200	5753.760	0.5	PASS
	Ant2	5745	17.560	5736.200	5753.760	0.5	PASS
	Ant1	5785	17.560	5776.200	5793.760	0.5	PASS
	Ant2	5785	17.160	5776.200	5793.360	0.5	PASS
	Ant1	5825	17.560	5816.200	5833.760	0.5	PASS
	Ant2	5825	17.320	5816.440	5833.760	0.5	PASS
11N40MIMO	Ant1	5755	35.120	5737.400	5772.520	0.5	PASS
	Ant2	5755	35.120	5737.400	5772.520	0.5	PASS
	Ant1	5795	34.960	5777.480	5812.440	0.5	PASS
	Ant2	5795	34.960	5777.560	5812.520	0.5	PASS
11AC80MIMO	Ant1	5775	75.040	5737.400	5812.440	0.5	PASS
	Ant2	5775	72.480	5737.560	5810.040	0.5	PASS