

Antenna Report

Revision History

Date	Revision	Comment
2019-06-5	1st	The fist version

Content


1. INTRODUCTION.....	3
2. TEST SOLUTION.....	3
3. EQUIPMENT LIST.....	3
4. TEST ENVIRONMENT.....	4
5. TEST RESULT.....	5
6. ANNEX DUT PHOTO.....	8

1. Introduction

This document records the detail antenna radiation performance of OTT Box. It is a confidential document of Skyworth.

2. Test Solution

The test topology is following figure.

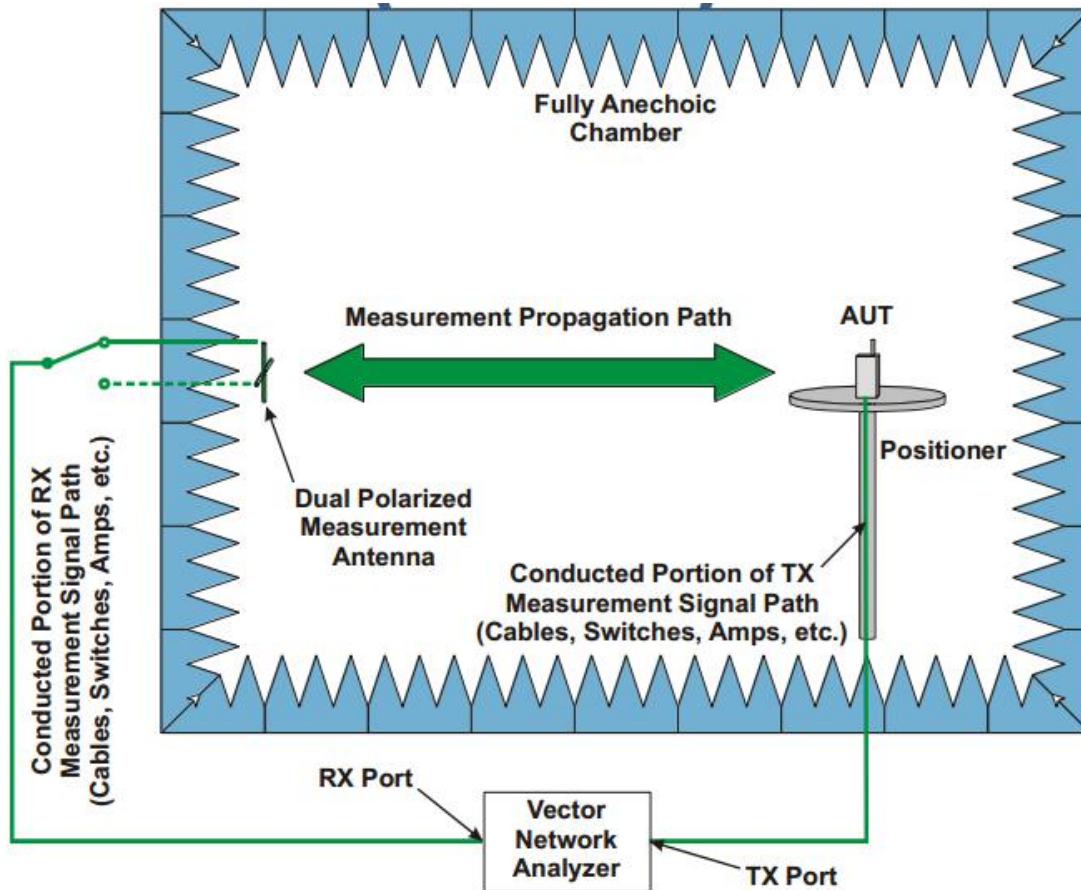


3. Equipment List

No.	Equipment	Model	Calibration	Remark
1	Network analyzer	ZNB-8	2019/06	/
3	Anechoic Chamber	AMS-8050	2019/03	/
4	Wireless Connectivity Tester	CMW270	2019/03	
5	Power Splitter	ZN2PD-63-S+	/	

4. Test Environment




Anechoic Chamber Facade

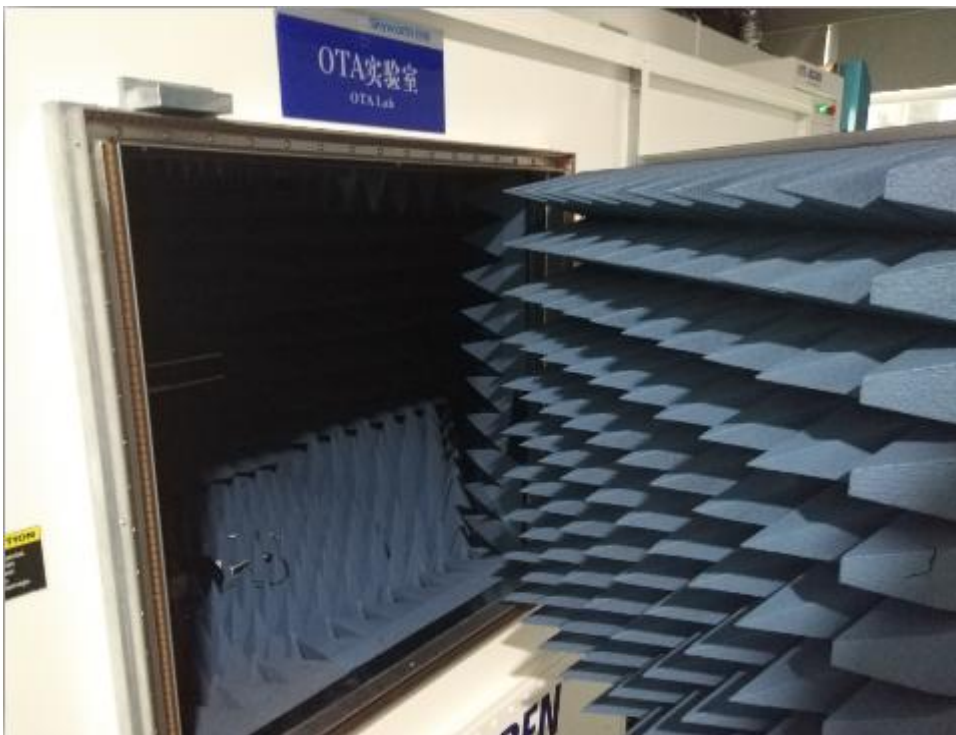

Anechoic Chamber Inside


5. Test Result

5.1 Antenna S Parameter

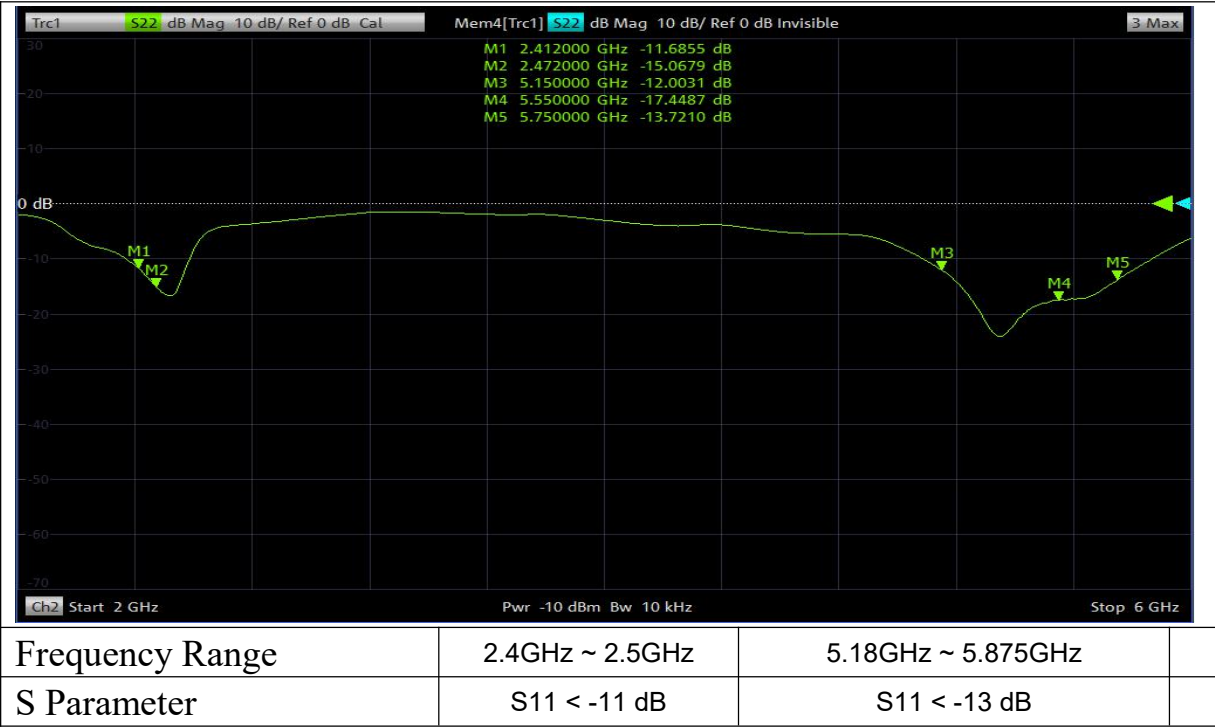

5.2 Antenna Gain and Efficiency



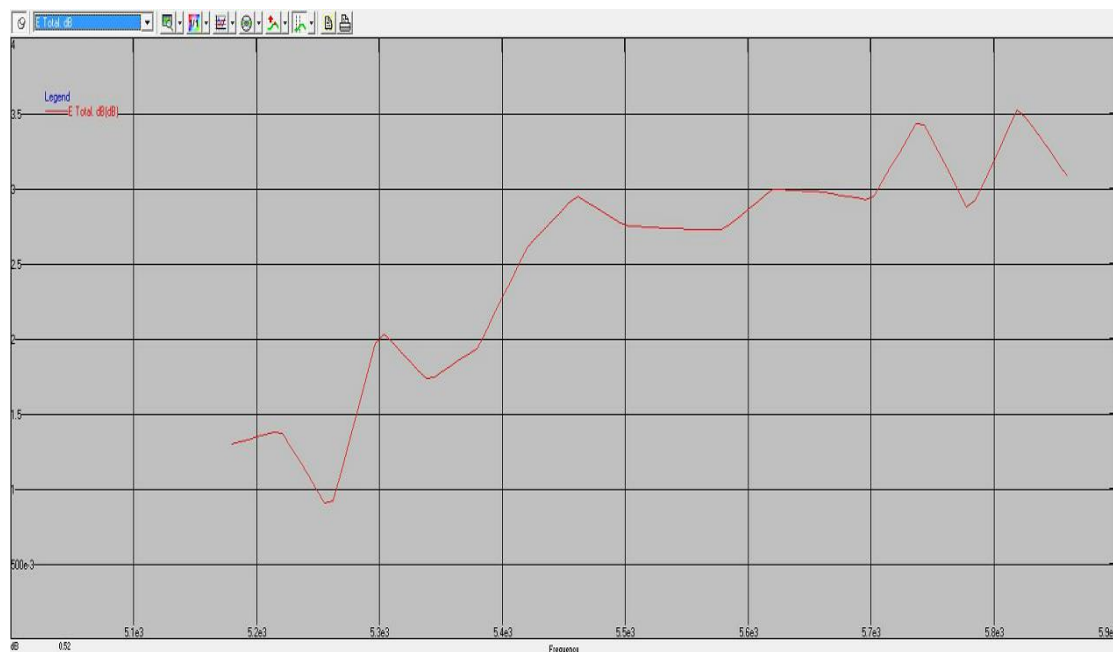


Freq/GHz	5.18	5.26	5.34	5.42	5.5	5.58	5.66	5.74	5.82	
Gain/dBi	1.3	0.85	1.72	2.61	2.76	2.72	2.98	3.48	3.54	
Effic.	38%	37%	43%	54%	56%	58%	61%	68%	69%	


5.3 Dual-Antenna Far Field Radiation

5.3.1 2D Far Field Radiation


---2410MHz

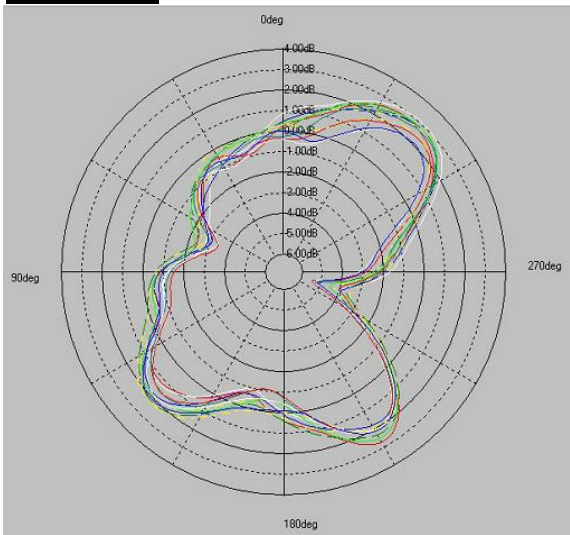


Phi = 0 degree for 2.4G

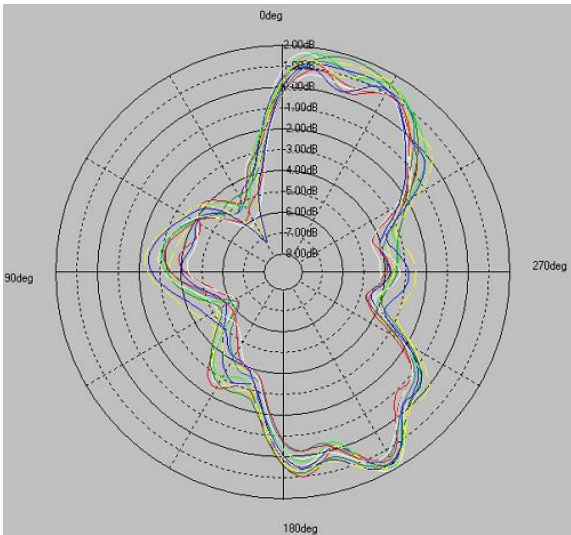


Phi = 90 degree for 2.4G

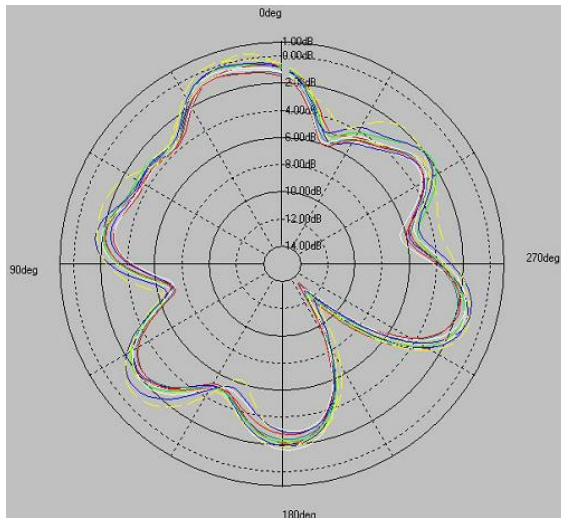


Theta = 90 degree for 2.4G

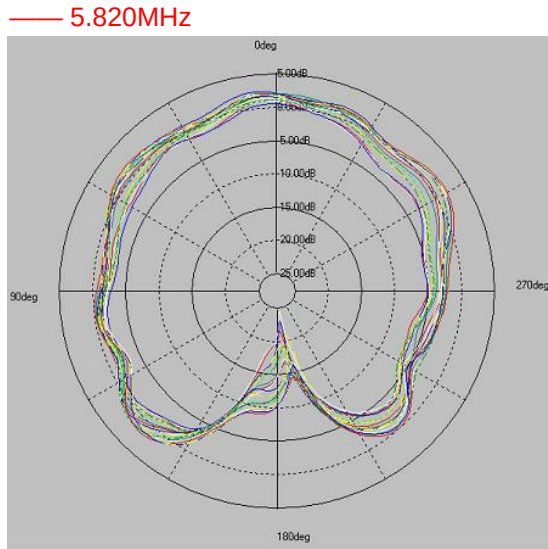

Phi = 0 degree for 5G

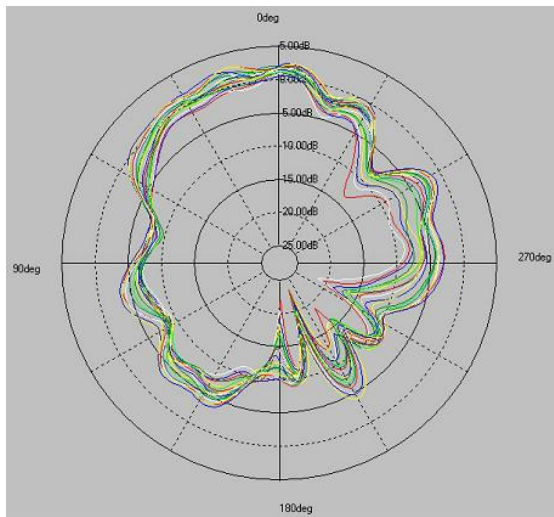

Phi = 90 degree for 5G

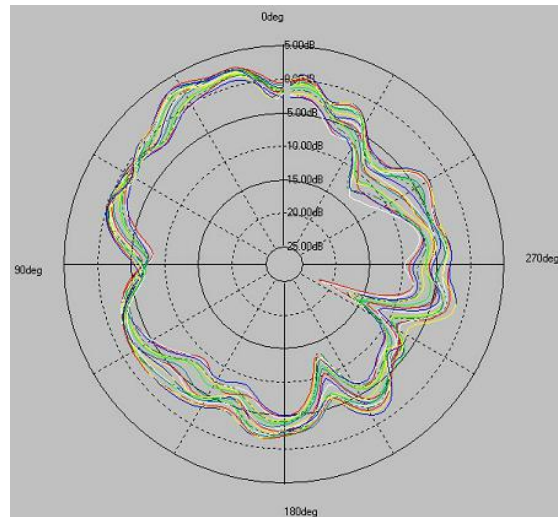


Theta = 0 degree for 5G

5.4 Other Parameter

Item	Parameter
Impedance	50 ohm
Polarization	line
Max VSWR	2:1
Radiation Properties	Omni-directional
Max Input Power	2 W
Material	Stainless steel
Connector	PCB trace(on board)
Operation Temperature	- 40 ~ 85 °C
RoHs Compliant	YES

6. ANNEX DUT PHOTO

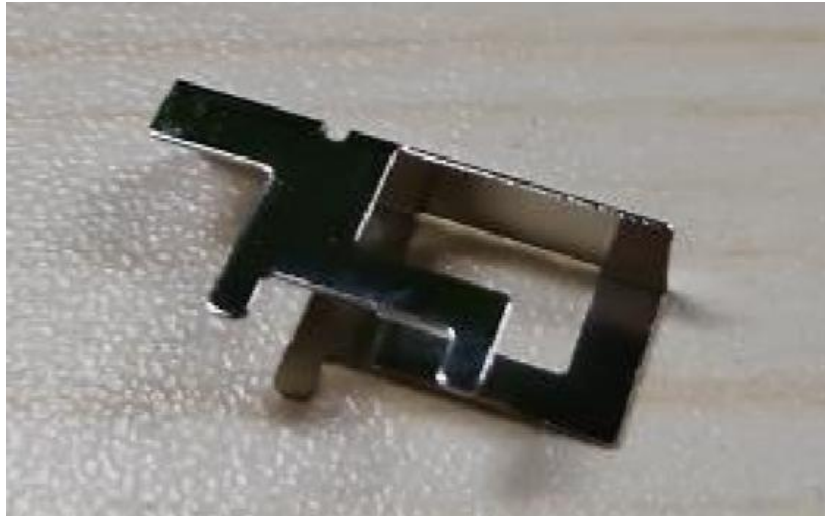

Unit:mm

