


Thank you for purchasing this Autel MaxiIM KM100. Our tools are manufactured to a high standard and — when used according to these instructions and properly maintained — will provide years of trouble-free performance.



IMPORTANT: Before operating or maintaining this unit, please read these instructions carefully, paying extra attention to the safety warnings and precautions. Failure to use this product properly may cause damage and/or personal injury and will void the product warranty.


◎ **MaxiIM KM100**

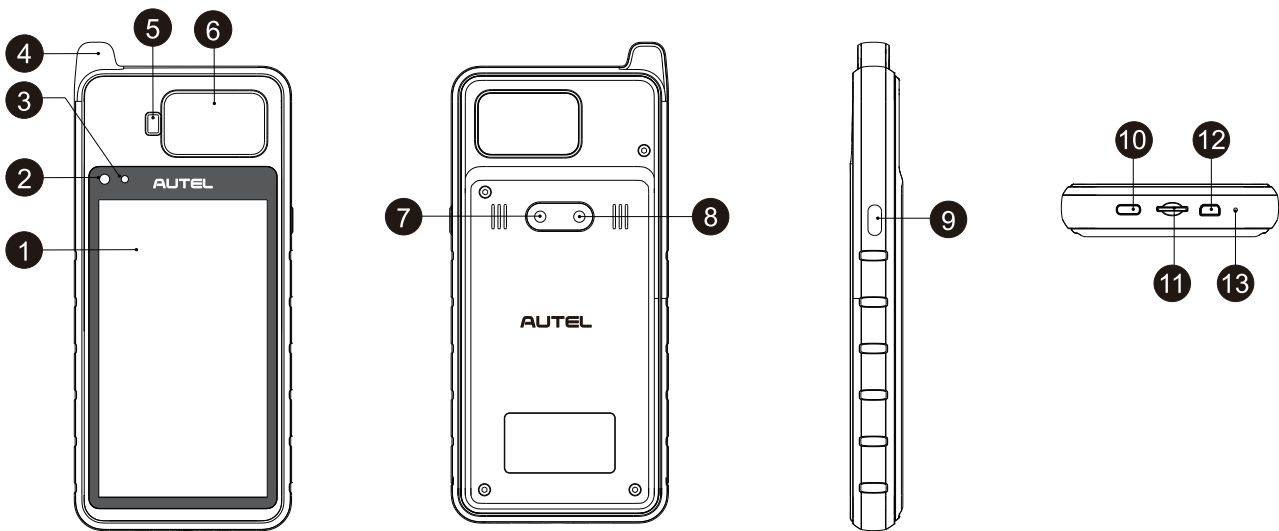

- 1. 5.5-inch Touchscreen
- 2. Ambient Light Sensor — detects ambient brightness
- 3. Status LED
- 4. Low Frequency Detection Collector — collects low frequency data
- 5. Transponder Slot — reads and writes transponder
- 6. Vehicle Key Slot — reads key information and measures remote frequency

- 7. Rear Camera
- 8. Camera Flash
- 9. Lock/Power Button — press and hold to turn on/off the tool, or tap to lock the screen
- 10. Type-C USB Port
- 11. SD Card Slot
- 12. Mini USB Port
- 13. Microphone

◎ **VCI (Vehicle Communication Interface) Device — MaxiVCI V200**

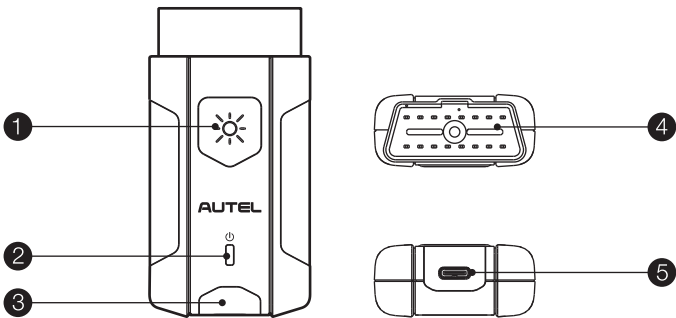

- 1. Flashlight Power Button
- 2. Power LED
- 3. Vehicle/Connection LED
- 4. Vehicle Data Connector (16-pin)
- 5. USB Port

VCI LED Description


LED	Color	Description
Power LED	Yellow	The VCI is powered on and performing self-check.
	Green	The VCI is ready for use.
	Flashing Red	The firmware is updating.
Vehicle /Connection LED	Green	• Solid Green: The VCI is connected via USB cable. • Flashing Green: The VCI is communicating via USB cable.
	Blue	• Solid Blue: The VCI is connected via Bluetooth. • Flashing Blue: The VCI is communicating via Bluetooth.

Getting Started



IMPORTANT: Prior to use, update the KM100 and MaxiVCI V200 with the latest version of software and firmware. Ensure the KM100 is connected to the Internet and is fully charged or connected to a power adapter.

1

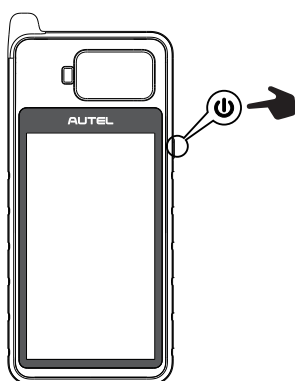


- Press and hold the **Lock/Power** button to power on the tool.

2




- Scan the above QR code to visit our website at www.autel.com.
- Create an Autel ID and register the tool with device's serial number and password.

3

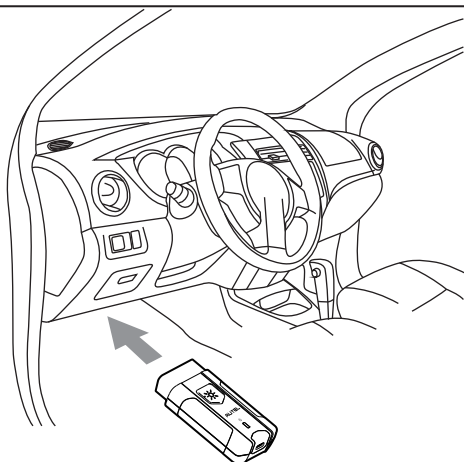


- Insert the Vehicle Data Connector on the MaxiVCI V200 into the vehicle's DLC, which is generally located under the vehicle dashboard.

4

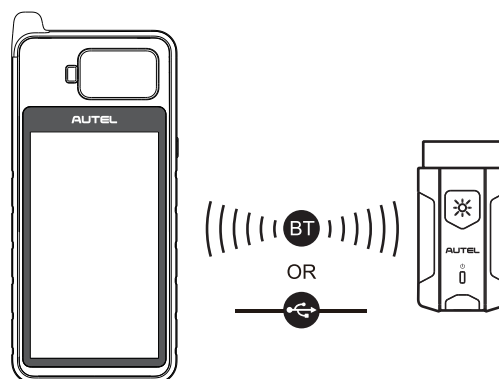

- Turn the vehicle ignition to the ON position and pair the KM100 with the MaxiVCI V200 via Bluetooth or connect via supplied USB cable to establish a communication link. Your key tool is now ready for use.

5

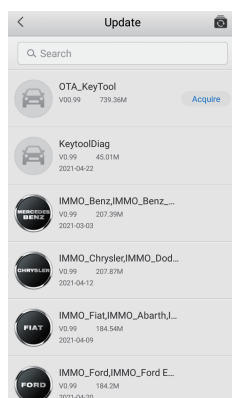

- **Software Update:** connect the KM100 to the Internet and tap **Update** on the home screen to view all available updates.

