

FCC PART 15.407


TEST REPORT

For

ID TECH

10721 Walker Street, Cypress California United States

FCC ID: WQJ-AP3880P

Report Type: Original Report	Product Name: AP3880P
Report Number:	RKSA250319001-00D
Report Date:	2025-05-28
Reviewed By:	Bard Liu 
Approved By:	Kyle Xu 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	8
EQUIPMENT MODIFICATIONS	12
SUPPORT EQUIPMENT LIST AND DETAILS	12
EXTERNAL I/O CABLE.....	12
BLOCK DIAGRAM OF TEST SETUP	12
TEST EQUIPMENT LIST	14
SUMMARY OF TEST RESULTS	16
FCC §1.1307(b) & §2.1093 - RF EXPOSURE.....	17
APPLICABLE STANDARD	17
FCC §15.203 – ANTENNA REQUIREMENT	18
APPLICABLE STANDARD	18
ANTENNA CONNECTOR CONSTRUCTION	18
FCC §15.407 (b) (9) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS.....	19
APPLICABLE STANDARD	19
TEST SYSTEM SETUP.....	19
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE	20
TEST RESULTS SUMMARY	20
§15.205 & §15.209 & §15.407(B) – UNDESIRABLE EMISSION & RESTRICTED BANDS	21
APPLICABLE STANDARD	21
TEST SYSTEM SETUP.....	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER.....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
FCC §15.407(a) - POWER SPECTRAL DENSITY	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
EUT PHOTOGRAPHS	28
TEST SETUP PHOTOGRAPHS	29

APPENDIX - TEST DATA.....30

CONDUCTED EMISSIONS30

TRANSMITTER UNWANTED EMISSIONS & RESTRICTED FREQUENCY BANDS33

EMISSION BANDWIDTH.....69

CONDUCTED TRANSMITTER OUTPUT POWER83

POWER SPECTRAL DENSITY84

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA250319001-00D	R1V1	2025-05-28	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	ID TECH	
Tested Model:	AP3880P	
Product Name:	AP3880P	
Power Supply:	DC 7.4V from battery or DC 5V charging by adapter	
Maximum Average Output Power	5G Wi-Fi B1:	5G Wi-Fi B4:
	802.11a: 12.06 dBm	12.11 dBm
	802.11ac20: 10.96 dBm	10.84 dBm
	802.11ac40: 7.98 dBm	7.54 dBm
	802.11ac80: 3.19 dBm	3.01 dBm
Operating Frequency	B1: 5180-5240 MHz, B4: 5745-5825 MHz	
Channel Number	B1: 7; B4: 8	
Channel Separation	802.11 a/ac20/n20: 20 MHz; 802.11ac40/n40: 40 MHz; 802.11ac80: 80 MHz	
Modulation Type	OFDM	
Antenna Type	FPC Antenna	
★Maximum Antenna Gain	Band 1: -0.96 dBi Band 4: -1.98 dBi	

Adapter Information:

Model: UT-681A-5200ZCY

Input: 100-240V, 50/60Hz, 0.35A

Output: 5.0V, 2.0A 10.0W

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RKSA250319001-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2025-03-19.)

Objective

This type approval report is prepared for *ID TECH* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions' rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan).

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The system support 802.11a/n20/n40/ac20/ac40/ ac80, the 802.11 n20/n40 were reduced since the identical parameters with 802.11ac20 and ac40.

For **5150~5250 MHz** band, test channel list is as below,

802.11a/ac20 mode Channel 36, 40, 48 were tested.

802.11ac40 mode Channel 38, 46 were tested.

802.11ac80 mode Channel 42 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For **5725~5850 MHz** band,

802.11a/ac20 mode Channel 149, 157, 165 were tested.

802.11ac40 mode Channel 151, 159 were tested.

802.11ac80 mode Channel 155 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
155	5775	/	/
157	5785	/	/

EUT Exercise Software

Engineering Mode

The worst case was performed under:

U-NII	Mode	Data rate	★Power Level		
			Low Channel	Middle Channel	High Channel
5150~5250MHz	802.11a	6Mbps	15	15	15
	802.11ac-VHT20	MCS0	14	14	14
	802.11ac-VHT40	MCS0	10	/	10
	802.11ac-VHT80	MCS0	/	9	/

U-NII	Mode	Data rate	★Power Level		
			Low Channel	Middle Channel	High Channel
5725~5850MHz	802.11a	6Mbps	15	15	15
	802.11ac-VHT20	MCS0	14	14	14
	802.11ac-VHT40	MCS0	10	/	10
	802.11ac-VHT80	MCS0	/	9	/


Note: The power level was declared by the applicant.

Duty Cycle:

Environmental Conditions


Test Date:	2025-04-22
Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	100.9 kPa
Test Engineer:	Neil Zhou

5150MHz-5250MHz Band:
802.11a mode

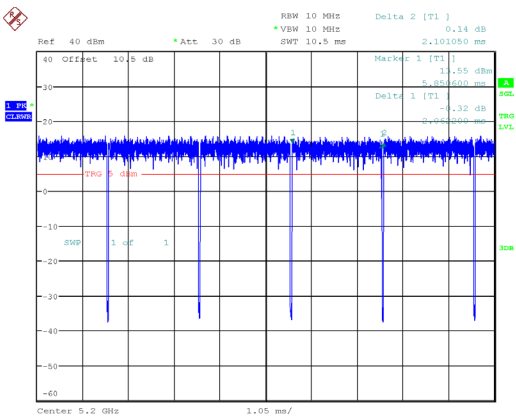


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 14:46:25

802.11ac20 mode

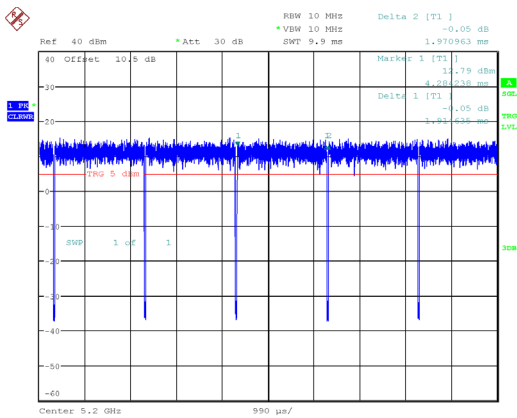


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:00:39

802.11ac40 mode

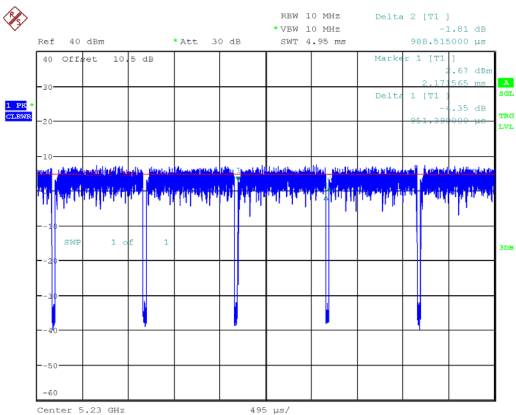


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:16:40


802.11ac80 mode

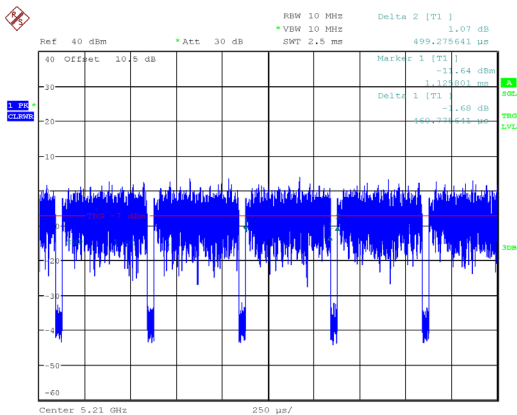


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:25:03

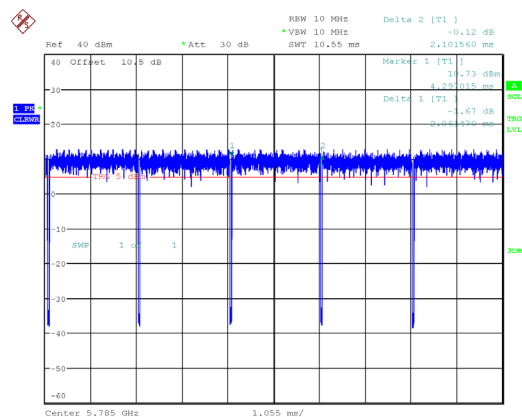5725MHz-5850MHz Band:**802.11a mode**


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:37:41

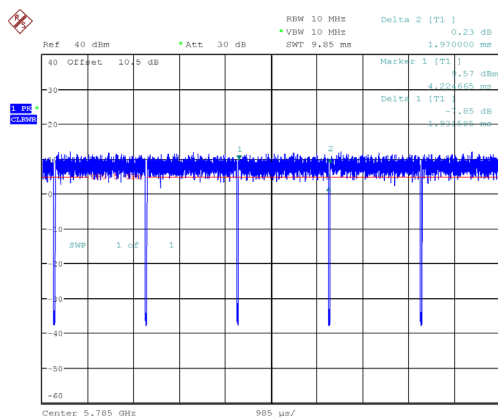802.11ac20 mode

ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:50:57

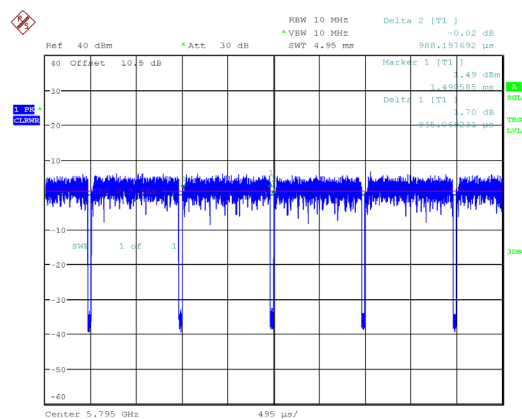802.11ac40 mode

ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 16:11:19

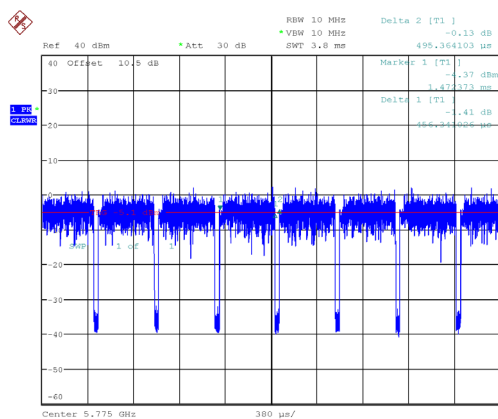802.11ac80 mode

ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 16:17:29

Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

5150MHz-5250MHz:

Mode	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/Ton (Hz)
a_5200MHz_Chain 0	2.062	2.101	98.14	/	/
ac20_5200MHz_Chain 0	1.915	1.971	97.16	0.13	522
ac40_5230MHz_Chain 0	0.951	0.989	96.16	0.17	1052
ac80_5290MHz_Chain 0	0.461	0.499	92.38	0.34	2169

5725MHz-5850MHz:

Mode	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/Ton (Hz)
a_5785MHz_Chain 0	2.061	2.102	98.05	/	/
ac20_5785MHz_Chain 0	1.932	1.970	98.07	/	/
ac40_5795MHz_Chain 0	0.945	0.988	95.65	0.19	1058
ac80_5775MHz_Chain 0	0.456	0.495	92.12	0.36	2193

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To Port
Power Cable	1.0	AC Source/LISN	Adapter
USB Cable 1	1.5	Adapter	EUT

Block Diagram of Test Setup


For Conducted Emissions:

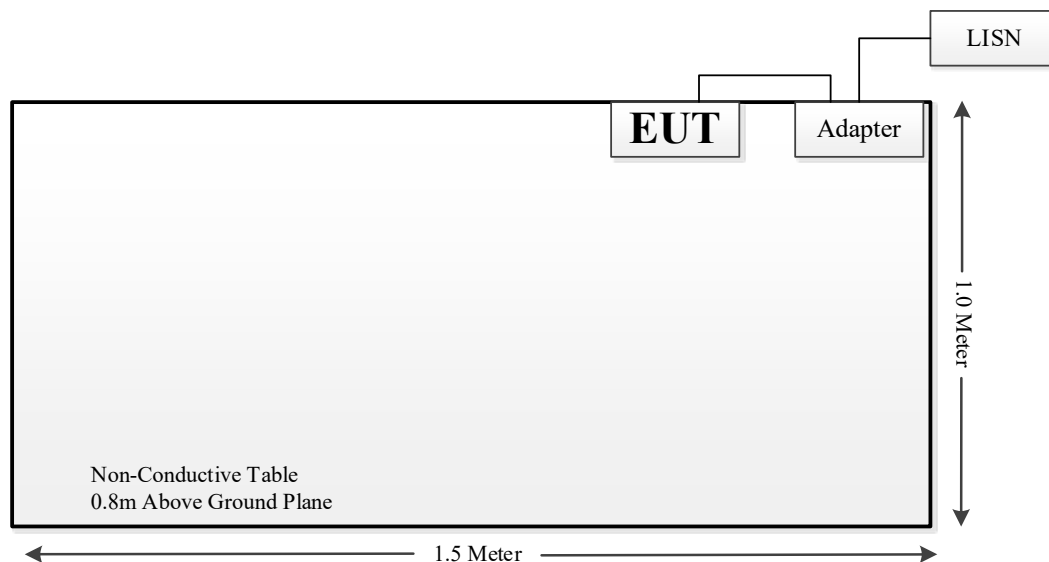

For Radiated Emissions (Below 1GHz):

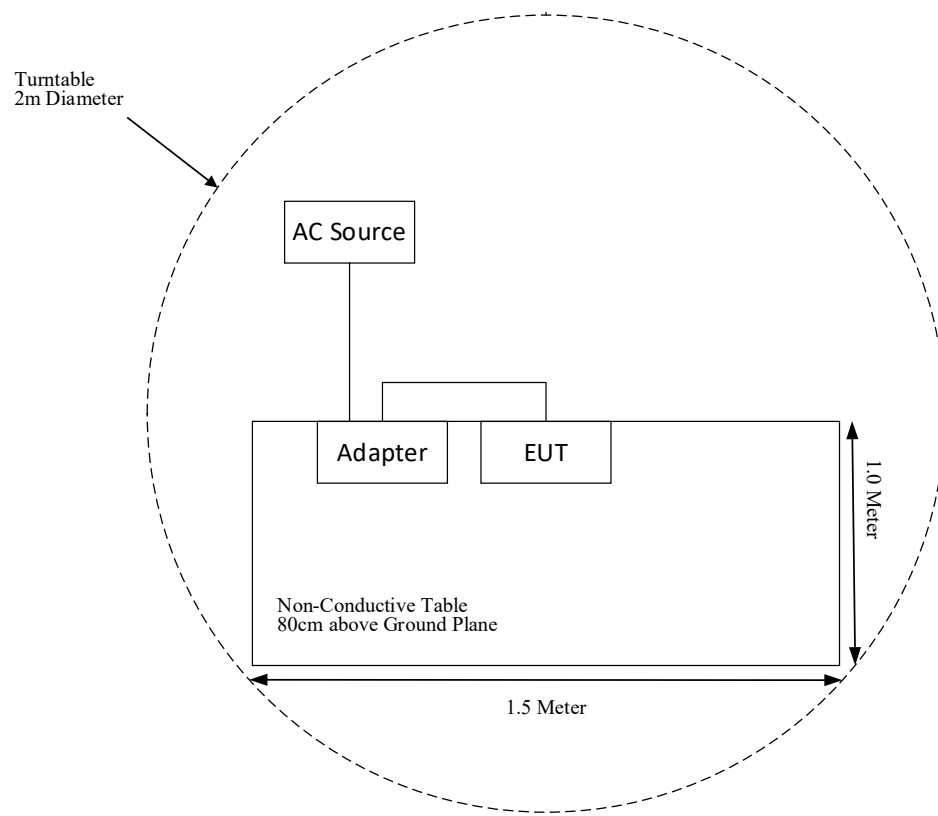

For Radiated Emissions (Above 1 GHz):

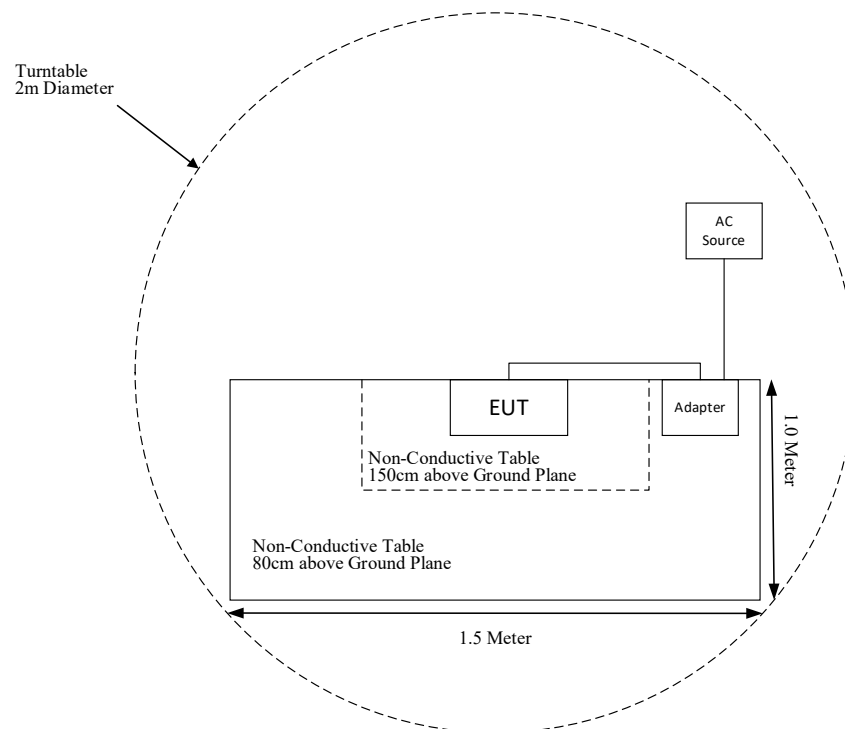

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2025-04-09	2026-04-08
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Narda	6dB Attenuator	773-6	10690812-2-1	2024-10-29	2027-10-28
BACL	Active Loop Antenna	1313-1A	4041511	2024-11-22	2027-11-21
Sonoma Instrument	Pre-amplifier	310N	171205	2024-04-23	2025-04-22
Sonoma Instrument	Pre-amplifier	310N	171205	2025-04-09	2026-04-08
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-10	010	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-8	008	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-9	009	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-10	010	2025-04-09	2026-04-08
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2024-04-25	2025-04-24
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2024-12-02	2025-12-01
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
A.H.Systems, inc	Amplifier	PAM-0118P	512	2024-04-25	2025-04-24
SELECTOR	Amplifier	EM18G40G	060726	2024-04-25	2025-04-24
MICRO-TRONICS	Band Reject Filter	BRM50716	G059	2024-05-23	2025-05-22
Narda	Attenuator	10dB	010	2025-04-08	2026-04-07
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-11	011	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-12	012	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-13	013	2024-04-25	2025-04-24
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2024-04-24	2025-04-23
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2025-04-09	2026-04-08
Narda	Attenuator	10dB	010	2024-04-23	2025-04-22
Narda	Attenuator	10dB	010	2025-04-08	2026-04-07
Anritsu	Power Sensor	MA24418A	12621	2024-04-23	2025-04-22
Anritsu	Power Sensor	MA24418A	12621	2025-04-09	2026-04-08
XHFDZ	RG316 Coaxial Cable	SMA-316	XHF-1175	Each time	N/A

Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2024-07-28	2025-07-27
Rohde & Schwarz	LISN	ENV216	101115	2024-04-23	2025-04-22
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-15	015	2024-04-23	2025-04-22

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 & §15.407(b) (9)	AC Power Line Conducted Emissions	Compliant
§ 15.205 & §15.209 & §15.407(b)	Undesirable Emission & Restricted Bands	Compliant
§§15.407(a) & §15.407(e)	Emission Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§1.1307(b)(1)& §2.1093	RF EXPOSURE	Compliant

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1307, §2.1093.

Measurement Result

Result: Please refer to the SAR report: RKSA250319001-20B.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407, if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

Antenna permanently attached to the unit. fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Frequency Range	Max. Antenna Gain	Input impedance
FPC	5150~5250 MHz	-0.96 dBi	50Ω
	5725~5850 MHz	-1.98 dBi	50Ω


Result: Compliant.

FCC §15.407 (b) (9) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (9)

Test System Setup

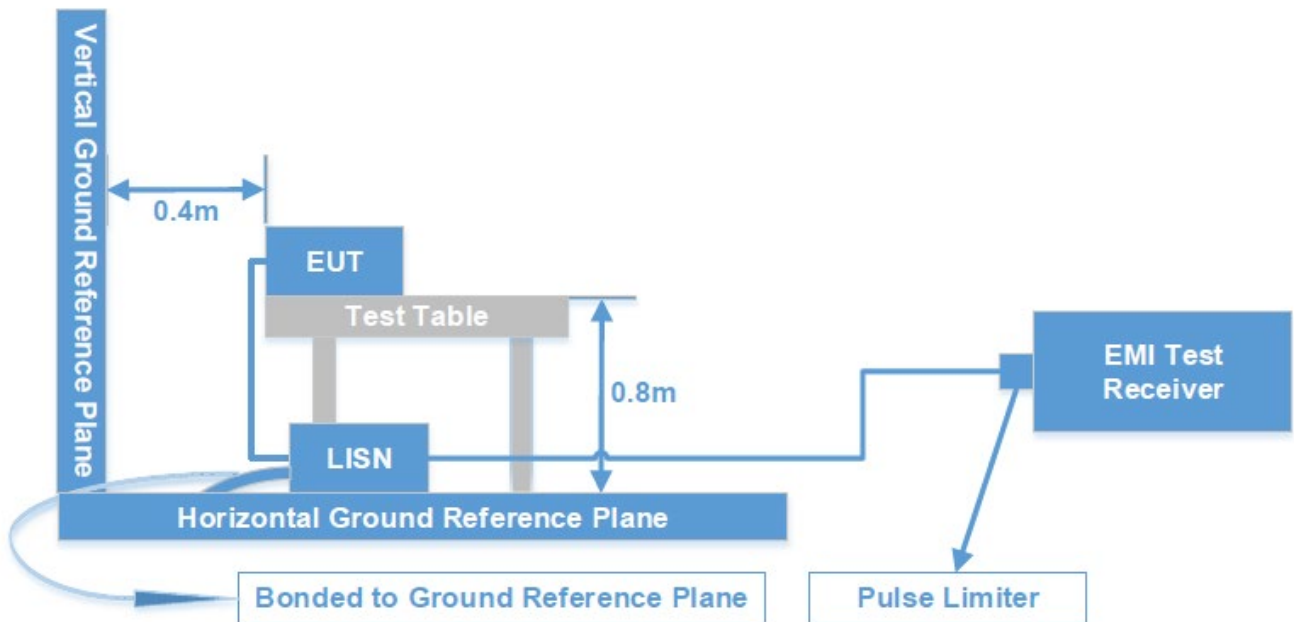

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW
150 kHz - 30 MHz	9 kHz	30 kHz

Test Procedure

During the conducted emission test, the EUT or adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Level (dB}\mu\text{V)} &= \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Level (dB}\mu\text{V)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix

§15.205 & §15.209 & §15.407(B) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:


(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz.


According to 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP [dBm] + 95.2$, for $d = 3$ meters.

Test System Setup


9kHz-30 MHz:

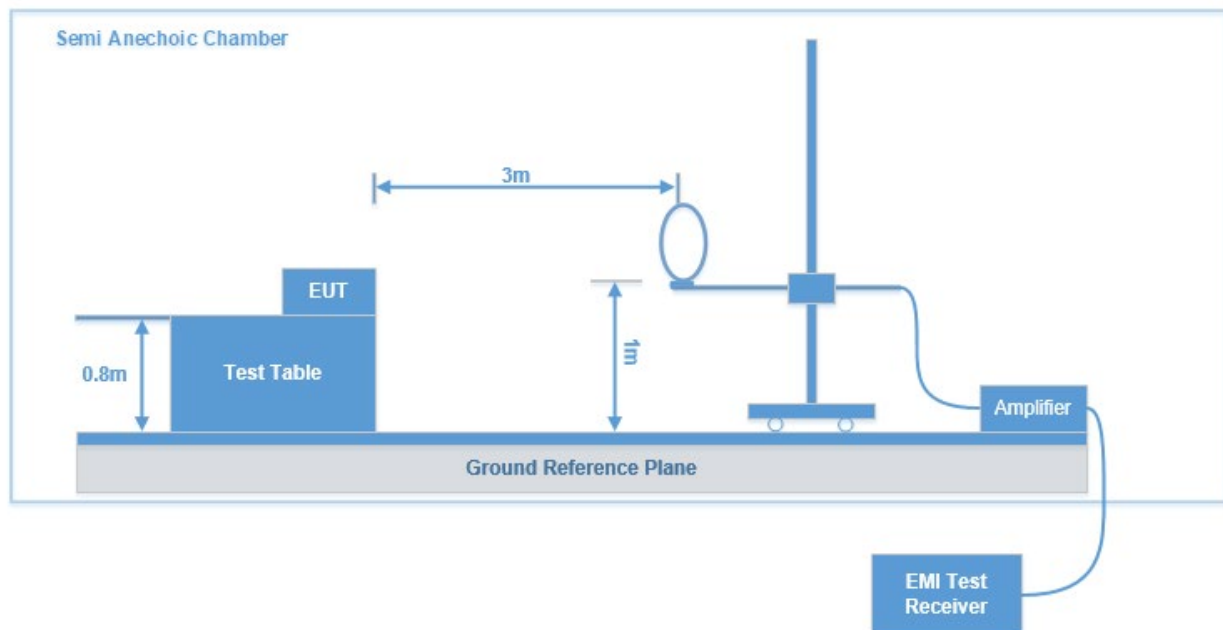


30MHz-1GHz:

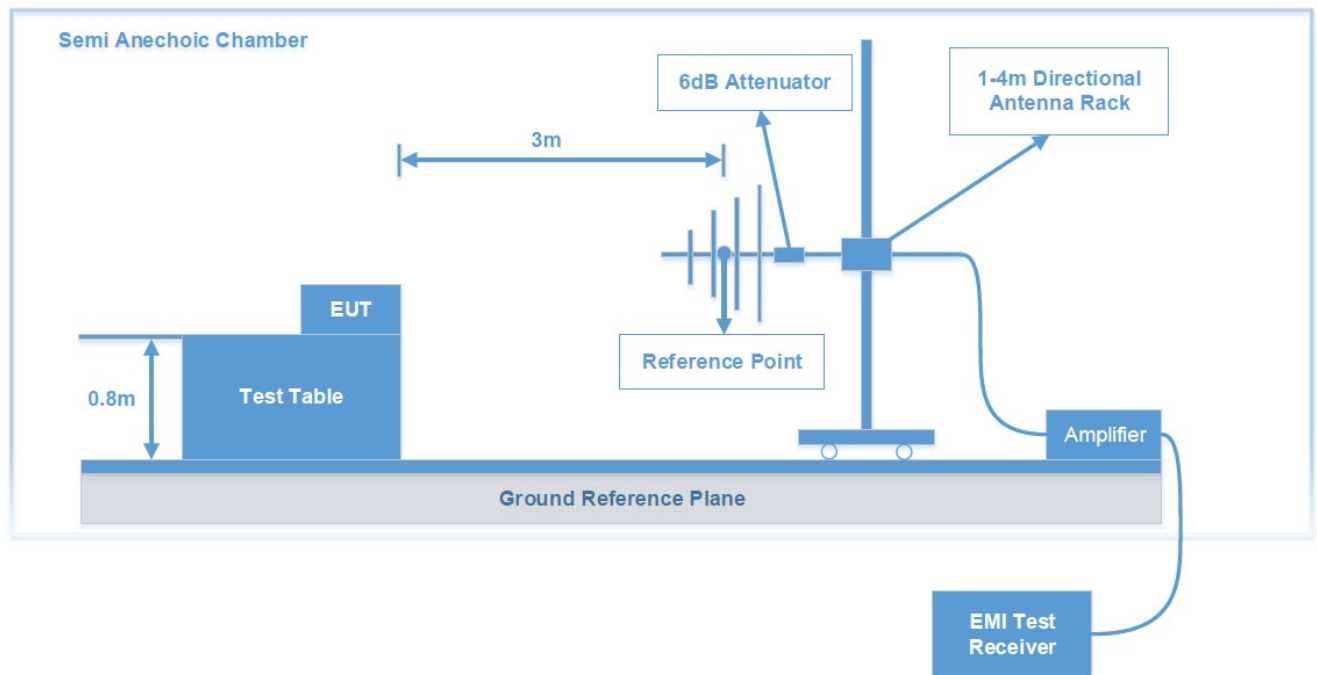

1 GHz-18GHz:

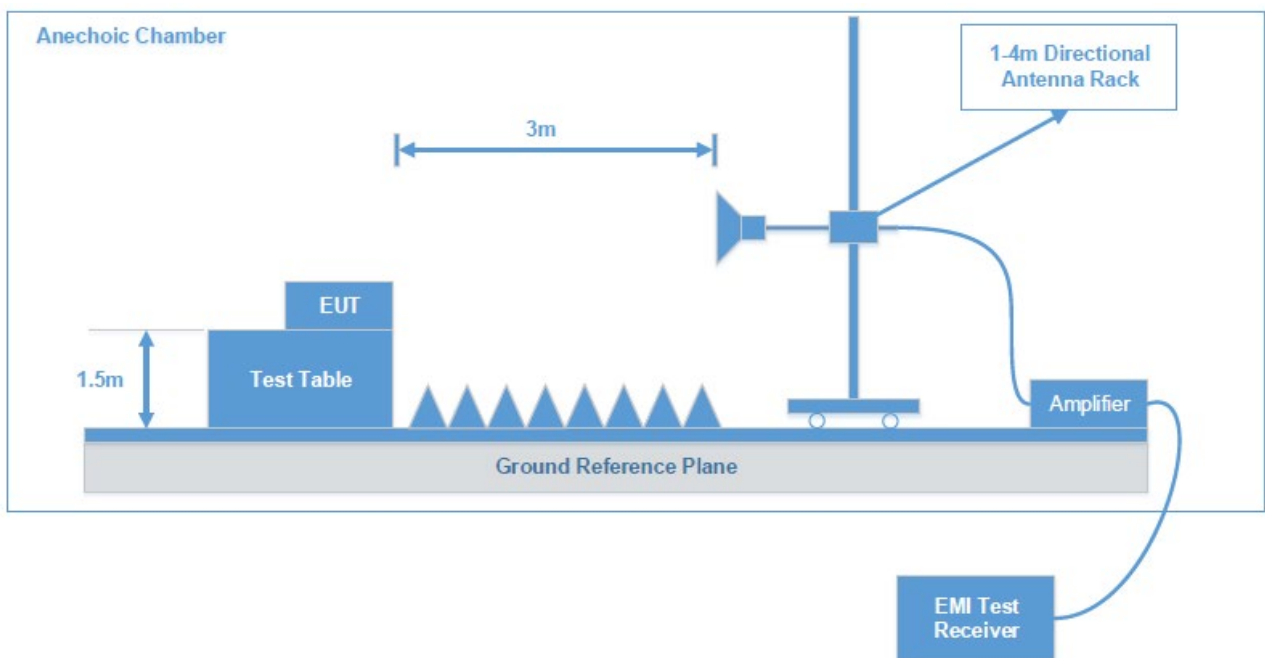

18-40GHz:

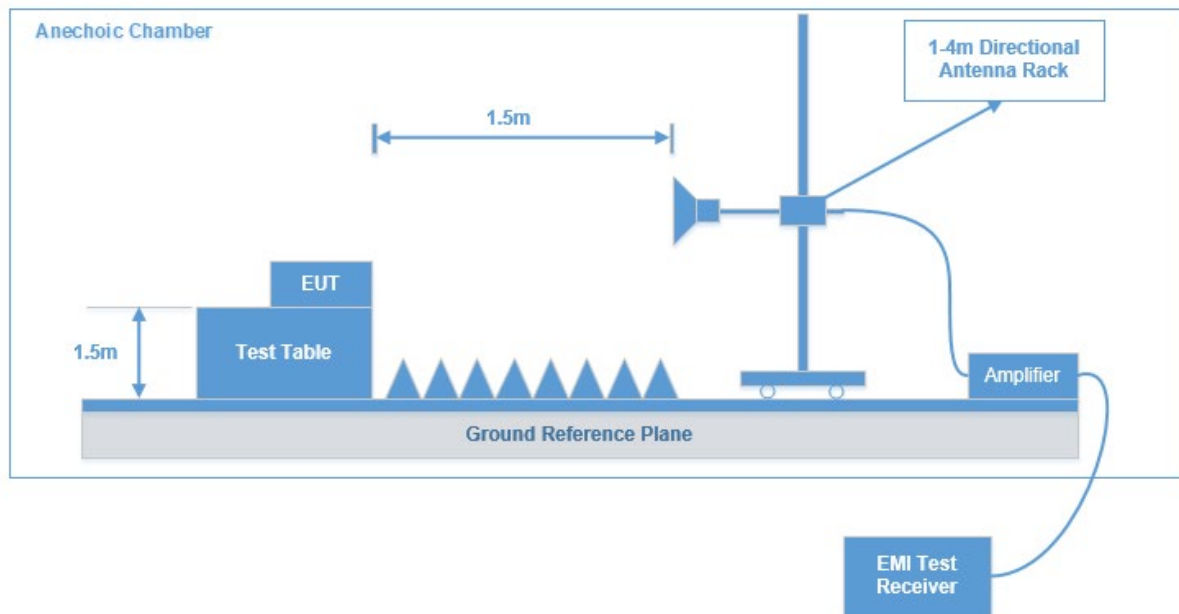

The radiated emission tests were performed in the 3 meters test site for below 18GHz and 1.5m for 18-40 GHz, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209 and FCC 15.407 limits. The limit at 1.5m for 18-40 GHz is 80dB μ V/m (Peak) and 60dB μ V/m (Average).

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	/	Average

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Test Procedure

During the radiated emission test, the adapter was connected to AC floor outlet. Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Corrected Amplitude (dB}\mu\text{V/m)} &= \text{Meter Reading (dB}\mu\text{V)} + \text{Corrected factor (dB/m)} \\ \text{Corrected factor (dB/m)} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}\end{aligned}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Note: The QuasiPeak (dB μ V/m), MaxPeak (dB μ V/m), Average (dB μ V/m) which shown in the data table are all Corrected Amplitude.

Test Data: See Appendix

FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Data: See Appendix

FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data: See Appendix

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.


Test Procedure

The measurements are base on C63.10:2020

Duty cycle $\geq 98\%$,Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$,Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$,Method SA-3 should be applied.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Data: See Appendix

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT D - TEST SETUP PHOTOGRAPHS.

APPENDIX - TEST DATA


CONDUCTED EMISSIONS

Environmental Conditions & Test Information

Test Date:	2025-03-29
Temperature:	23.1 °C
Relative Humidity:	60 %
ATM Pressure:	100.2 kPa
Test Engineer:	Myles Miao

EUT operation mode: Transmitting in 802.11a mode 5180MHz (maximum output power)

AC 120V/60 Hz, Line

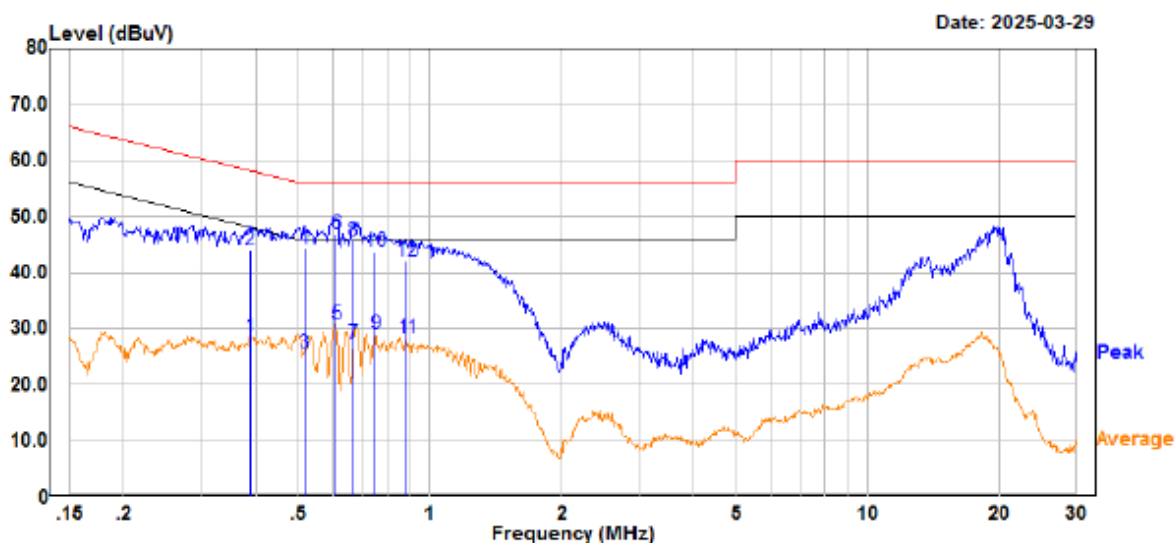


Trace: 1

Site : CE
Condition : limit\FCC PART 15.207
: DET:Peak
Project No. : RKSA250319001
Model : AP3880P
Phase : L
Voltage : 120V/60Hz
Mode : 5G WIFI
Test Equipment : ENV216,ESR
Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
Temperature : 23.1°C
Humidity : 60%
Atmospheric pressure: 100.2kPa
Test Engineer : Myles Miao

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.389	8.30	20.20	28.50	48.09	-19.59	Average
2	0.389	23.70	20.20	43.90	58.09	-14.19	QP
3	0.516	5.40	20.12	25.52	46.00	-20.48	Average
4	0.516	24.20	20.12	44.32	56.00	-11.68	QP
5	0.612	10.70	20.09	30.79	46.00	-15.21	Average
6	0.612	26.90	20.09	46.99	56.00	-9.01	QP
7	0.669	7.31	20.07	27.38	46.00	-18.62	Average
8	0.669	25.71	20.07	45.78	56.00	-10.22	QP
9	0.750	8.90	20.00	28.90	46.00	-17.10	Average
10	0.750	23.80	20.00	43.80	56.00	-12.20	QP
11	0.885	8.40	19.84	28.24	46.00	-17.76	Average
12	0.885	22.20	19.84	42.04	56.00	-13.96	QP

AC 120V/60 Hz, Neutral

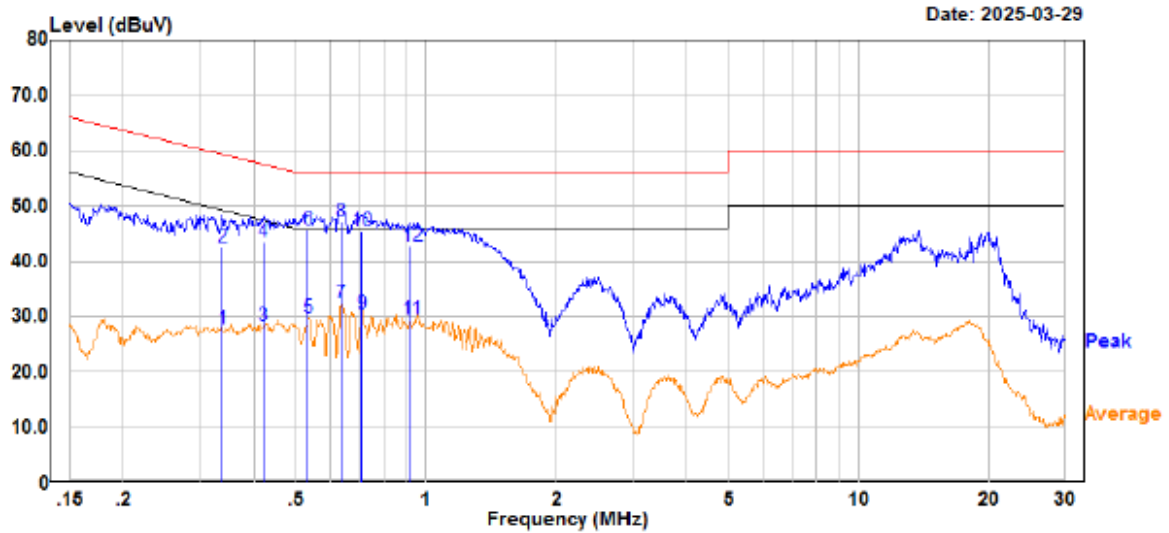

Trace: 1

Site : CE
 Condition : limit\FCC PART 15.207
 : DET:Peak
 Project No. : RKSA250319001
 Model : AP3880P
 Phase : N
 Voltage : 120V/60Hz
 Mode : 5G WIFI
 Test Equipment : ENV216,ESR
 Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
 Temperature : 23.1°C
 Humidity : 60%
 Atmospheric pressure: 100.2kPa
 Test Engineer : Myles Miao

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.338	7.50	20.19	27.69	49.25	-21.56 Average
2	0.338	22.30	20.19	42.49	59.25	-16.76 QP
3	0.421	8.01	20.21	28.22	47.43	-19.21 Average
4	0.421	23.31	20.21	43.52	57.43	-13.91 QP
5	0.535	9.50	20.12	29.62	46.00	-16.38 Average
6	0.535	25.60	20.12	45.72	56.00	-10.28 QP
7	0.637	12.20	20.09	32.29	46.00	-13.71 Average
8	0.637	27.00	20.09	47.09	56.00	-8.91 QP
9	0.710	10.30	20.06	30.36	46.00	-15.64 Average
10	0.710	25.30	20.06	45.36	56.00	-10.64 QP
11	0.925	9.60	19.80	29.40	46.00	-16.60 Average
12	0.925	22.90	19.80	42.70	56.00	-13.30 QP

TRANSMITTER UNWANTED EMISSIONS & RESTRICTED FREQUENCY BANDS**Environmental Conditions & Test Information**


Frequency Range:	9 kHz-30 MHz	30 MHz-1GHz	1 GHz-18 GHz		18 GHz-40 GHz
Test Date:	2025-04-25	2025-03-26	2025-04-17	2025-04-18	2025-04-24
Temperature:	23 °C	22.6 °C	23.6 °C	24.7 °C	24.1 °C
Relative Humidity:	45 %	48 %	44 %	45 %	53 %
ATM Pressure:	102.0 kPa	99.8 kPa	100.8 kPa	101.1 kPa	101.3 kPa
Test Engineer:	Jerry Yan	Jerry Yan	Destine Hu	Destine Hu	Hugh Wu

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:


9 kHz-30 MHz: Transmitting in 802.11a mode 5180MHz (maximum output power)

Parallel(worst case)

9kHz-150kHz

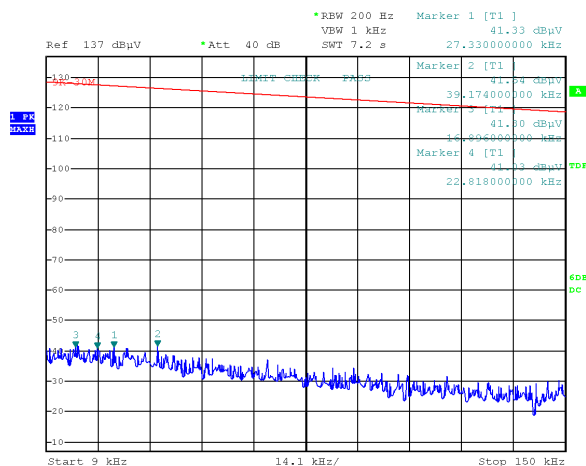

150kHz-30MHz

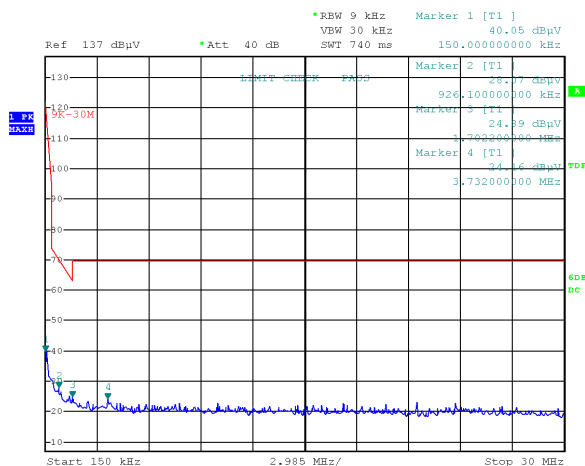

Project No.RKSA250319001
Date: 25.APR.2025 10:41:55

Tester:Jerry Yan

Project No.RKSA250319001
Date: 25.APR.2025 10:45:55

Tester:Jerry Yan

9kHz-150kHz


Frequency (kHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
27.33	41.33	PK	-0.60	118.87	77.54
39.17	41.54	PK	-2.08	115.75	74.21
16.90	41.30	PK	-0.55	123.05	81.75
22.82	41.03	PK	-0.57	120.44	79.41

150kHz-30MHz

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.15	40.05	PK	-11.34	104.08	64.03
0.93	28.07	PK	-27.12	68.23	40.16
1.70	24.89	PK	-29.92	63.00	38.11
3.73	24.16	PK	-31.78	69.54	45.38

30MHz-1GHz: Transmitting in 802.11a mode 5180MHz (maximum output power)**Common Information**


Project No: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11a mode low channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature: 22.6°C
Humidity: 48%
Barometric Pressure: 99.8kPa
Test Engineer: Jerry Yan
Test Date: 2025/3/26

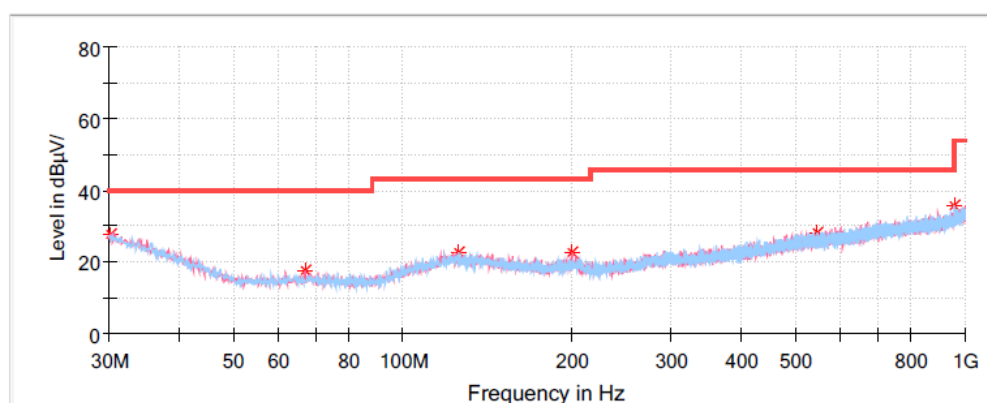**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
30.121250	27.92	40.00	12.08	V	-4.8
66.860000	17.53	40.00	22.47	V	-16.7
125.423750	22.70	43.50	20.80	H	-11.0
199.628750	22.65	43.50	20.85	V	-12.0
546.282500	28.29	46.00	17.71	H	-4.7
958.532500	35.95	46.00	10.05	H	1.6

1GHz-18GHz (5150-5250MHz Band):**802.11a Mode:****Low Channel: 5180MHz****Common Information**


Project No.:	RKSA250319001
EUT Model:	AP3880P
Test Mode:	Transmitting in 802.11a mode
Standard:	FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	23.6°C
Humidity:	44%
Atmospheric Pressure:	100.8kPa
Test Engineer:	Destine Hu
Test Date:	2025/4/17

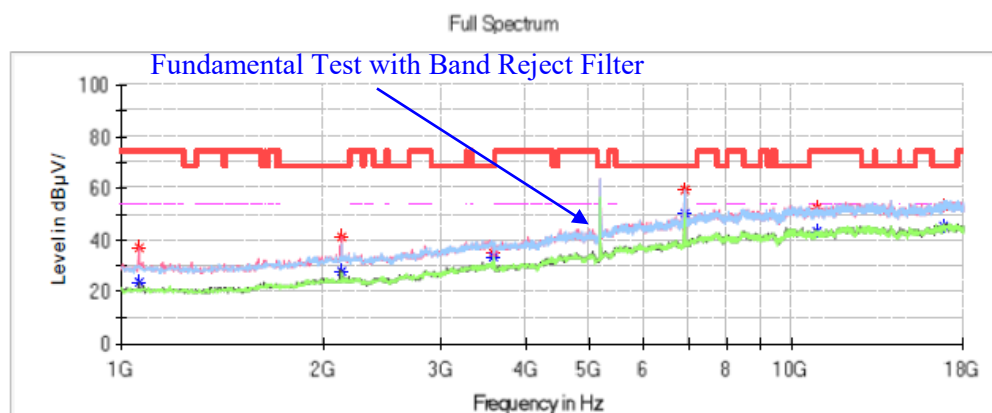**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
1061.200000	---	23.56	54.00	30.44	V	-15.4
1061.200000	36.72	---	74.00	37.28	V	-15.4
2132.200000	40.94	---	68.20	27.26	V	-11.3
3597.600000	35.15	---	68.20	33.05	H	-6.3
6905.800000	59.27	---	68.20	8.93	H	2.2
10863.400000	---	43.15	54.00	10.85	V	7.3
10863.400000	52.34	---	74.00	21.66	V	7.3
16820.200000	53.46	---	68.20	14.74	V	11.7

Middle Channel: 5200MHz**Common Information**


Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11a mode
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.6℃
Humidity: 44%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Test Date: 2025/4/17

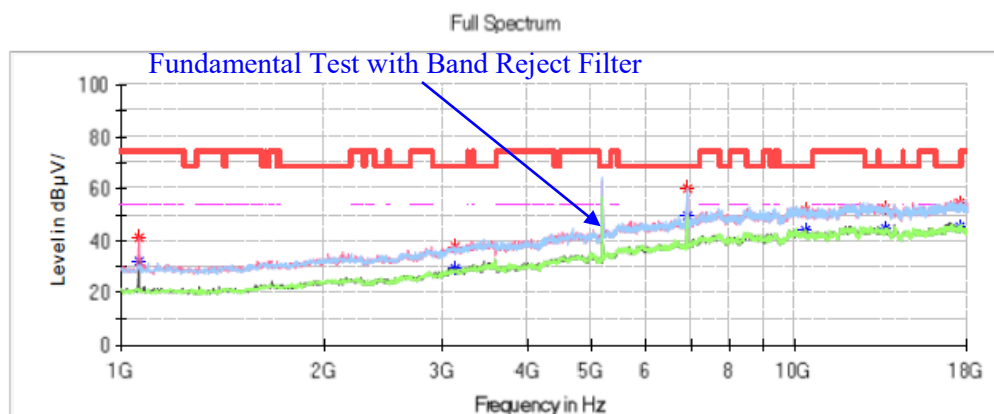**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	32.27	54.00	21.73	V	-15.4
1061.200000	41.00	---	74.00	33.00	V	-15.4
3138.600000	37.85	---	68.20	30.35	V	-7.9
6905.800000	60.26	---	68.20	7.94	H	2.2
10360.200000	51.90	---	68.20	16.30	V	7.1
13607.200000	52.51	---	68.20	15.69	H	9.6
17592.000000	54.31	---	68.20	13.89	H	11.6

High Channel: 5240MHz**Common Information**


Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11a mode
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.6℃
 Humidity: 44%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/17

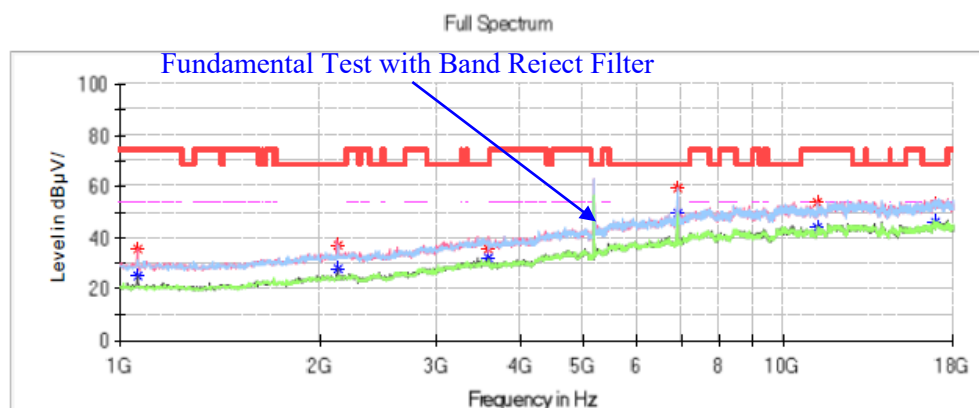**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	25.41	54.00	28.59	V	-15.4
1061.200000	35.48	---	74.00	38.52	V	-15.4
2132.200000	37.16	---	68.20	31.04	V	-11.3
3597.600000	35.54	---	68.20	32.66	H	-6.3
6905.800000	59.43	---	68.20	8.77	H	2.2
11220.400000	---	43.99	54.00	10.01	H	8.0
11220.400000	53.69	---	74.00	20.31	H	8.0
16966.400000	53.27	---	68.20	14.93	V	12.2

802.11ac20 Mode:**Low Channel: 5180MHz****Common Information**

Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac20 mode
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.6℃
 Humidity: 44%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/17

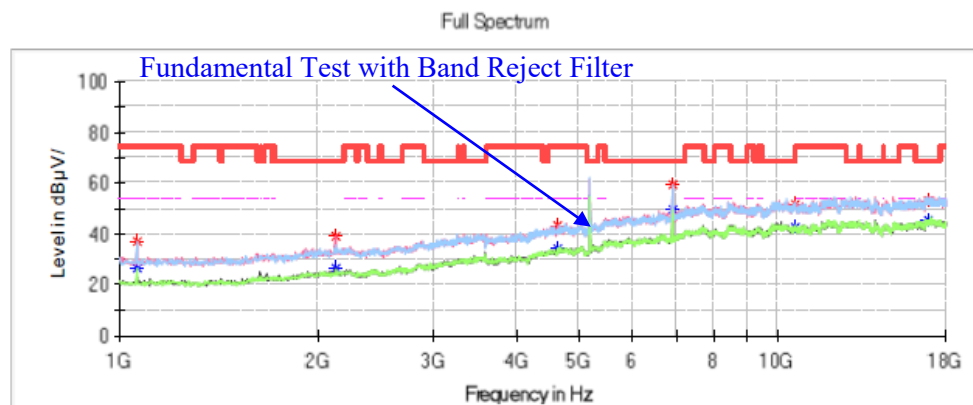
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	26.87	54.00	27.13	H	-15.4
1061.200000	37.01	---	74.00	36.99	H	-15.4
2125.400000	39.20	---	68.20	29.00	V	-11.3
4617.600000	---	33.92	54.00	20.08	H	-3.8
4617.600000	43.01	---	74.00	30.99	H	-3.8
6905.800000	59.49	---	68.20	8.71	H	2.2
10649.200000	---	42.78	54.00	11.22	H	7.2
10649.200000	51.69	---	74.00	22.31	H	7.2
16905.200000	52.83	---	68.20	15.37	H	12.0

Middle Channel: 5200MHz**Common Information**

Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac20 mode
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.6℃
 Humidity: 44%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/17


Full Spectrum

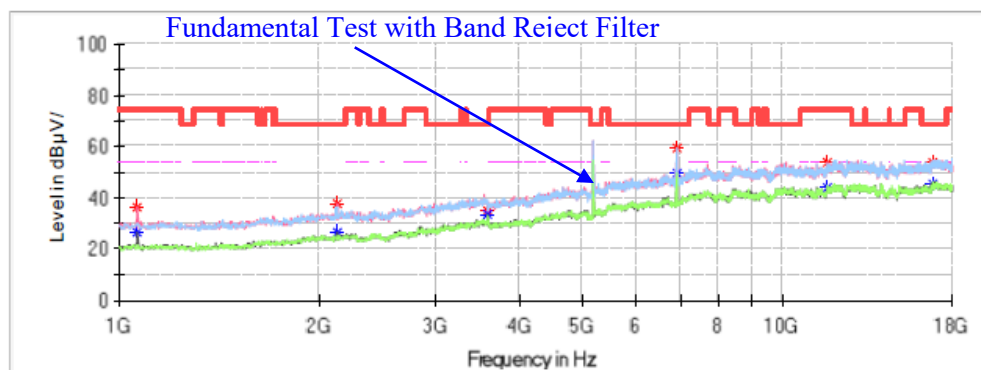**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	26.82	54.00	27.18	V	-15.4
1064.600000	36.27	---	74.00	37.73	V	-15.4
2125.400000	37.49	---	68.20	30.71	V	-11.3
3597.600000	35.08	---	68.20	33.12	V	-6.3
6905.800000	59.23	---	68.20	8.97	H	2.2
11645.400000	---	43.81	54.00	10.19	V	8.9
11645.400000	53.51	---	74.00	20.49	V	8.9
16864.400000	53.84	---	68.20	14.36	V	11.9

High Channel: 5240MHz**Common Information**


Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac20 mode
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.6°C
 Humidity: 44%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/17

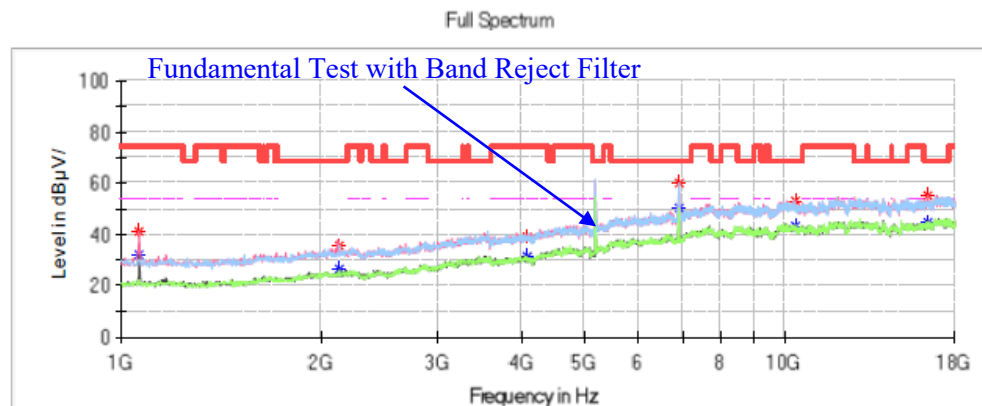**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	31.95	54.00	22.05	V	-15.4
1064.600000	41.05	---	74.00	32.95	V	-15.4
2128.800000	35.45	---	68.20	32.75	V	-11.3
4077.000000	---	31.26	54.00	22.74	H	-5.7
4077.000000	39.41	---	74.00	34.59	H	-5.7
6905.800000	60.07	---	68.20	8.13	H	2.2
10350.000000	53.26	---	68.20	14.94	V	7.1
16412.200000	54.92	---	68.20	13.28	H	10.5

802.11ac40 Mode:**Channel: 5190MHz****Common Information**


Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac40 mode
 Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.6°C
 Humidity: 44%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/17

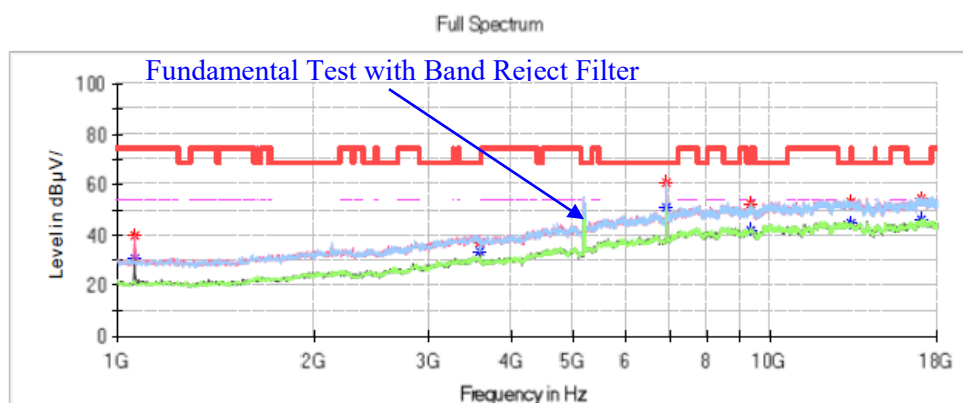**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	30.57	54.00	23.43	V	-15.4
1061.200000	39.88	---	74.00	34.12	V	-15.4
3597.600000	36.90	---	68.20	31.30	V	-6.3
6919.400000	60.86	---	68.20	7.34	H	2.3
9333.400000	---	42.21	54.00	11.79	H	5.4
9333.400000	52.50	---	74.00	21.50	H	5.4
13257.000000	---	44.80	54.00	9.20	V	9.6
13257.000000	53.44	---	74.00	20.56	V	9.6
17010.600000	54.28	---	68.20	13.92	V	12.3

Channel: 5230MHz**Common Information**


Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11ac40 mode
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.6℃
Humidity: 44%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Test Date: 2025/4/17

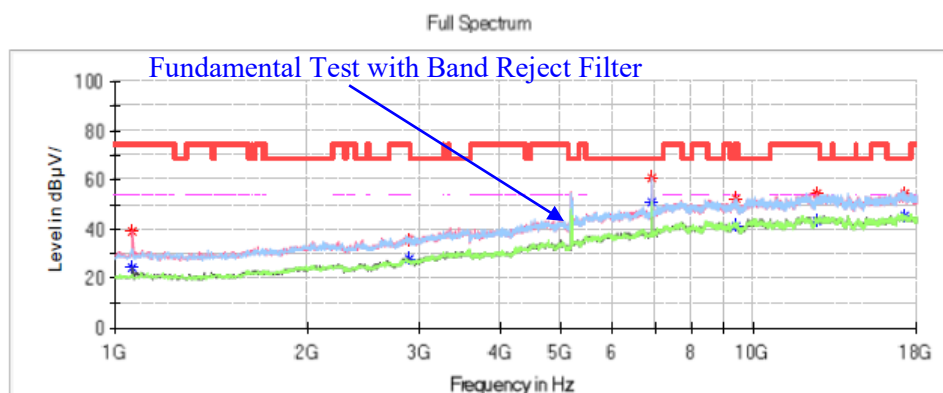**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	24.40	54.00	29.60	V	-15.4
1064.600000	39.13	---	74.00	34.87	V	-15.4
2887.000000	---	28.23	54.00	25.77	V	-8.8
2887.000000	35.99	---	74.00	38.01	V	-8.8
6919.400000	61.19	---	68.20	7.01	H	2.3
9411.600000	---	41.34	54.00	12.66	H	5.4
9411.600000	52.42	---	74.00	21.58	H	5.4
12536.200000	---	43.68	54.00	10.32	V	9.7
12536.200000	54.61	---	74.00	19.39	V	9.7
17248.600000	54.71	---	68.20	13.49	H	11.9

802.11ac80 Mode:**Channel: 5210MHz****Common Information**


Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac80 mode
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.6℃
 Humidity: 44%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/17

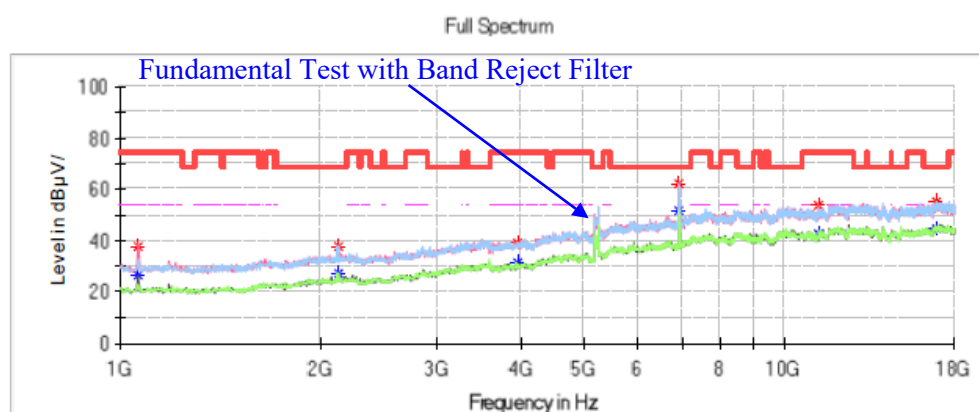**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	26.45	54.00	27.55	V	-15.4
1061.200000	37.47	---	74.00	36.53	V	-15.4
2132.200000	37.67	---	68.20	30.53	V	-11.3
3964.800000	---	31.57	54.00	22.43	H	-5.9
3964.800000	39.14	---	74.00	34.86	H	-5.9
6946.600000	62.22	---	68.20	5.98	H	2.4
11220.400000	---	42.99	54.00	11.01	V	8.0
11220.400000	54.12	---	74.00	19.88	V	8.0
16912.000000	55.21	---	68.20	12.99	V	12.0

1GHz-18GHz(5725-5850MHz Band):**802.11a Mode:****Low Channel: 5745MHz****Common Information**


Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11a mode 5745 channel
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.7°C
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Test Date: 2025/4/18

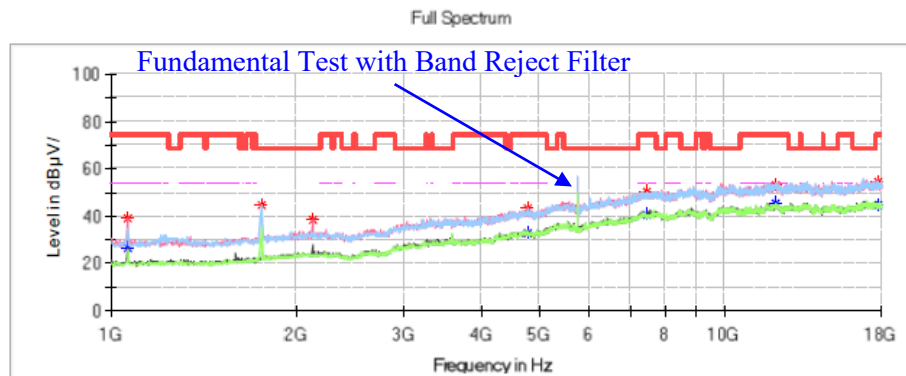**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	26.73	54.00	27.27	V	-15.4
1061.200000	39.19	---	74.00	34.81	V	-15.4
1761.600000	44.65	---	68.20	23.55	H	-13.2
2128.800000	38.72	---	68.20	29.48	V	-11.3
4767.200000	43.21	---	74.00	30.79	H	-3.3
4767.200000	---	32.63	54.00	21.37	H	-3.3
7446.400000	---	40.88	54.00	13.12	H	3.8
7446.400000	50.48	---	74.00	23.52	H	3.8
12128.200000	53.41	---	74.00	20.59	V	9.1
12128.200000	---	45.56	54.00	8.44	V	9.1
17782.400000	54.88	---	74.00	19.12	V	11.8
17782.400000	---	44.41	54.00	9.59	V	11.8

Middle Channel: 5785MHz**Common Information**


Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11a mode 5785 channel
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.7℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Test Date: 2025/4/18

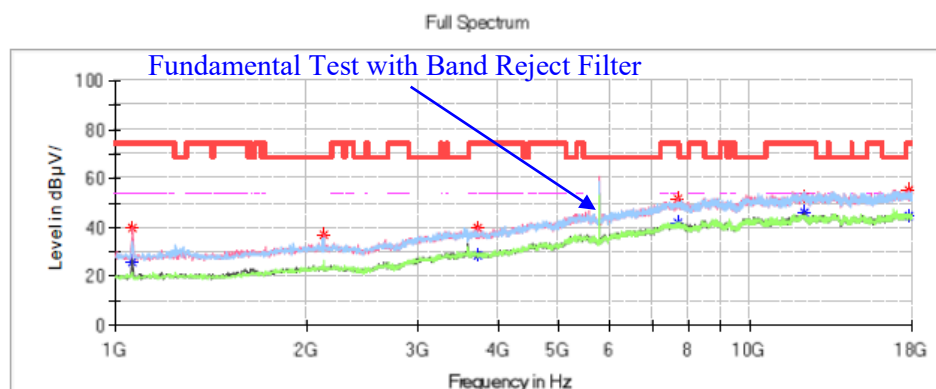**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	40.13	---	74.00	33.87	V	-15.4
1064.600000	---	25.60	54.00	28.40	V	-15.4
2128.800000	37.26	---	68.20	30.94	V	-11.3
3720.000000	---	28.79	54.00	25.21	V	-6.2
3720.000000	39.95	---	74.00	34.05	V	-6.2
7711.600000	---	42.29	54.00	11.71	H	3.9
7711.600000	51.98	---	74.00	22.02	H	3.9
12169.000000	---	45.83	54.00	8.17	V	9.2
12169.000000	52.52	---	74.00	21.48	V	9.2
17768.800000	---	44.73	54.00	9.27	V	11.8
17768.800000	55.08	---	74.00	18.92	V	11.8

High Channel: 5825MHz**Common Information**


Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11a mode 5825 channel
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.7°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/18

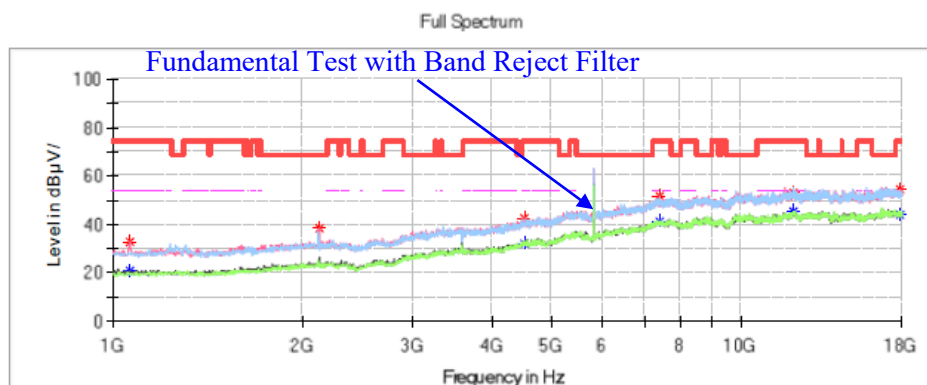**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	32.94	---	74.00	41.06	V	-15.4
1061.200000	---	20.93	54.00	33.07	V	-15.4
2125.400000	38.68	---	68.20	29.52	V	-11.3
4505.400000	---	32.48	54.00	21.52	V	-4.2
4505.400000	42.76	---	74.00	31.24	V	-4.2
7412.400000	---	40.91	54.00	13.09	V	3.7
7412.400000	51.44	---	74.00	22.56	V	3.7
12124.800000	---	45.60	54.00	8.40	H	9.1
12124.800000	52.90	---	74.00	21.10	H	9.1
17853.800000	---	44.12	54.00	9.88	V	11.8
17853.800000	54.57	---	74.00	19.43	V	11.8

802.11ac20 Mode:**Low Channel: 5745MHz****Common Information**


Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11ac20 mode 5745 channel
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.7°C
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Test Date: 2025/4/18

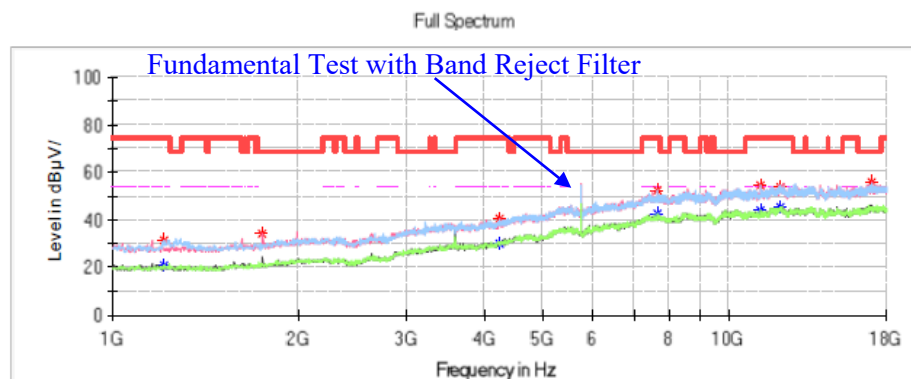**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1214.200000	---	21.08	54.00	32.92	H	-15.1
1214.200000	31.29	---	74.00	42.71	H	-15.1
1751.400000	34.16	---	68.20	34.04	V	-13.2
4240.200000	---	30.39	54.00	23.61	V	-5.1
4240.200000	40.88	---	74.00	33.12	V	-5.1
7660.600000	---	42.57	54.00	11.43	H	3.9
7660.600000	52.35	---	74.00	21.65	H	3.9
11261.200000	---	44.25	54.00	9.75	V	8.1
11261.200000	54.65	---	74.00	19.35	V	8.1
12124.800000	54.09	---	74.00	19.91	H	9.1
12124.800000	---	45.61	54.00	8.39	H	9.1
17071.800000	56.14	---	68.20	12.06	V	12.2

Middle Channel: 5785MHz**Common Information**


Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac20 mode 5785 channel
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.7°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/18

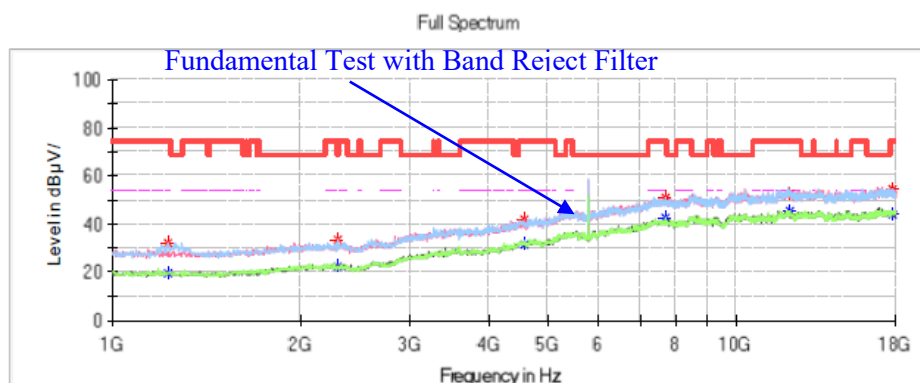**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1227.800000	---	19.59	54.00	34.41	H	-15.1
1227.800000	32.13	---	74.00	41.87	H	-15.1
2298.800000	---	22.07	54.00	31.93	V	-10.8
2298.800000	33.31	---	74.00	40.69	V	-10.8
4583.600000	42.29	---	74.00	31.71	V	-4.0
4583.600000	---	31.47	54.00	22.53	V	-4.0
7711.600000	---	42.37	54.00	11.63	H	3.9
7711.600000	51.04	---	74.00	22.96	H	3.9
12162.200000	---	45.75	54.00	8.25	V	9.2
12162.200000	52.53	---	74.00	21.47	V	9.2
17731.400000	54.30	---	74.00	19.70	H	11.7
17731.400000	---	44.09	54.00	9.91	H	11.7

High Channel: 5825MHz**Common Information**


Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac20 mode 5825 channel
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.7°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/18

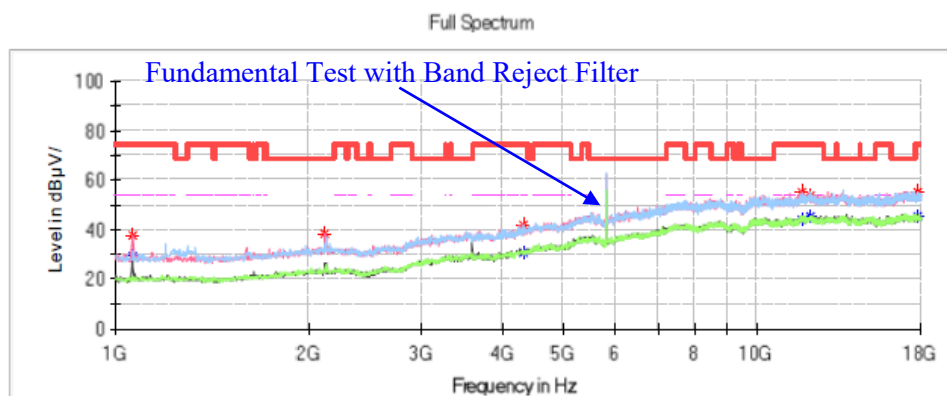**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	29.14	54.00	24.86	V	-15.4
1061.200000	37.82	---	74.00	36.18	V	-15.4
2122.000000	38.21	---	68.20	29.99	V	-11.4
4335.400000	42.26	---	74.00	31.74	H	-4.8
4335.400000	---	30.97	54.00	23.03	H	-4.8
11761.000000	55.27	---	74.00	18.73	V	8.9
11761.000000	---	44.37	54.00	9.63	V	8.9
12077.200000	53.55	---	74.00	20.45	V	9.1
12077.200000	---	45.71	54.00	8.29	V	9.1
17792.600000	---	45.31	54.00	8.69	H	11.8
17792.600000	55.01	---	74.00	18.99	H	11.8

802.11ac40 Mode:**Channel: 5755MHz****Common Information**


Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11ac40 mode 5755 channel
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.7°C
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Test Date: 2025/4/18

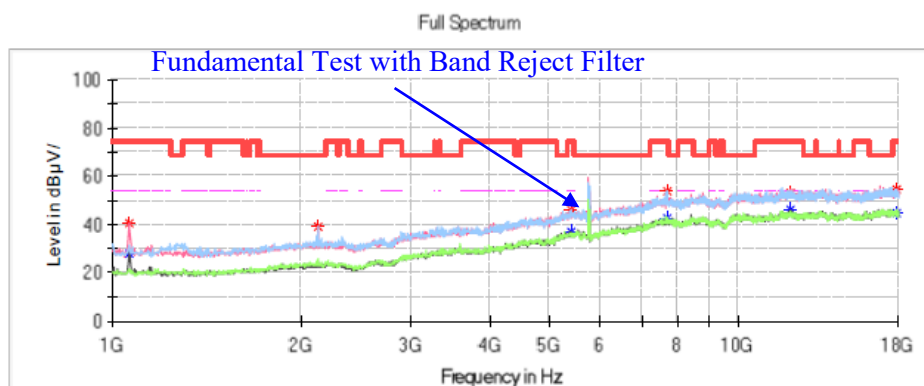**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	27.97	54.00	26.03	V	-15.4
1061.200000	40.48	---	74.00	33.52	V	-15.4
2128.800000	38.90	---	68.20	29.30	H	-11.3
5392.800000	46.33	---	74.00	27.67	H	-0.8
5392.800000	---	37.04	54.00	16.96	H	-0.8
7674.200000	54.14	---	74.00	19.86	H	3.9
7674.200000	---	42.38	54.00	11.62	H	3.9
12067.000000	53.39	---	74.00	20.61	V	9.1
12067.000000	---	45.95	54.00	8.05	V	9.1
17904.800000	---	45.03	54.00	8.97	H	11.9
17904.800000	54.69	---	74.00	19.31	H	11.9

Channel: 5795MHz**Common Information**


Project No.:	RKSA250319001
EUT Model:	AP3880P
Test Mode:	Transmitting in 802.11ac20 mode 5785 channel
Standard:	FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.7°C
Humidity:	45%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Test Date:	2025/4/18

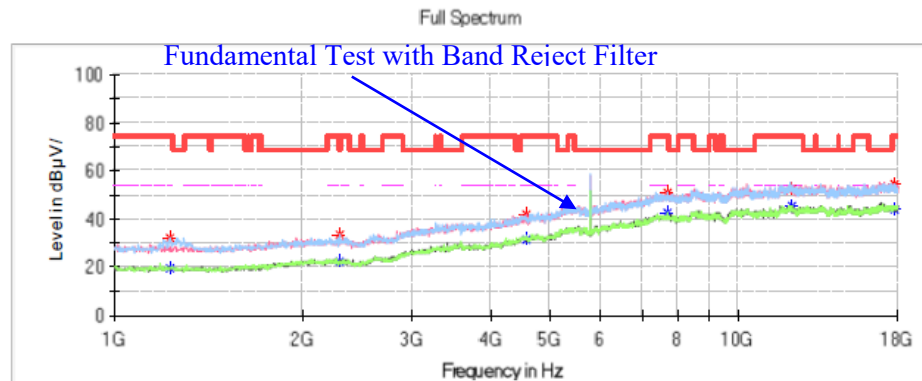**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1227.800000	---	19.59	54.00	34.41	H	-15.1
1227.800000	32.13	---	74.00	41.87	H	-15.1
2298.800000	---	22.07	54.00	31.93	V	-10.8
2298.800000	33.31	---	74.00	40.69	V	-10.8
4583.600000	42.29	---	74.00	31.71	V	-4.0
4583.600000	---	31.47	54.00	22.53	V	-4.0
7711.600000	---	42.37	54.00	11.63	H	3.9
7711.600000	51.04	---	74.00	22.96	H	3.9
12162.200000	---	45.75	54.00	8.25	V	9.2
12162.200000	52.53	---	74.00	21.47	V	9.2
17731.400000	54.30	---	74.00	19.70	H	11.7
17731.400000	---	44.09	54.00	9.91	H	11.7

802.11ac80 Mode:**Channel: 5775MHz****Common Information**


Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11ac80 mode 5775 channel
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.7℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Test Date: 2025/4/18

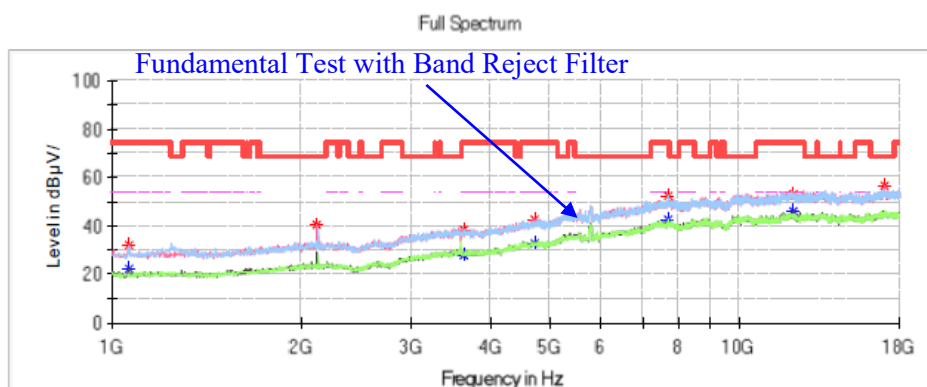**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	32.40	---	74.00	41.60	V	-15.4
1061.200000	---	22.05	54.00	31.95	V	-15.4
2122.000000	40.40	---	68.20	27.80	V	-11.4
3628.200000	---	27.96	54.00	26.04	V	-6.2
3628.200000	38.62	---	74.00	35.38	V	-6.2
4709.400000	---	32.57	54.00	21.43	H	-3.5
4709.400000	42.74	---	74.00	31.26	H	-3.5
7698.000000	---	42.75	54.00	11.25	H	3.9
7698.000000	52.14	---	74.00	21.86	H	3.9
12169.000000	53.16	---	74.00	20.84	V	9.2
12169.000000	---	45.87	54.00	8.13	V	9.2
17010.600000	56.72	---	68.20	11.48	V	12.3


18GHz-40GHz:

Pre-scan with 802.11a, 802.11ac20, 802.11ac40, 802.11ac80 modes of operation in the X,Y and Z axes of orientation, the worst case **802.11a mode (5180MHz)** was recorded

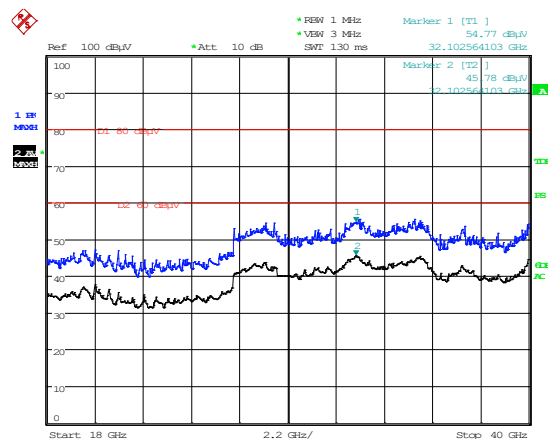Horizontal

Project No : RKSA250319001
Date: 24.APR.2025 22:04:02

Tester :Hugh Wu

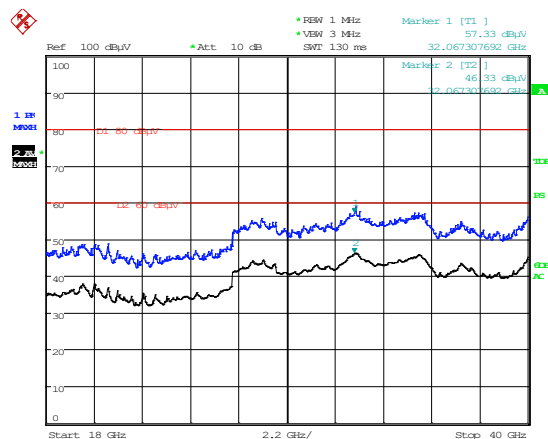Vertical

Project No : RKSA250319001
Date: 24.APR.2025 22:36:51

Tester :Hugh Wu

Note: The test distance is 1.5m. The limit is 80dBμV/m(Peak) and 60dBμV/m(Average).

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
32.07	---	46.33	60	13.67	V	23.21
32.07	57.33	---	80	22.67	V	23.21
32.10	---	45.78	60	14.22	H	23.24
32.10	54.77	---	80	25.23	H	23.24

Restricted Bands Emissions Test (5150-5250MHz Band):


Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

802.11a Mode:**Common Information**

Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11a mode
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.6℃
 Humidity: 44%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/17

Full Spectrum

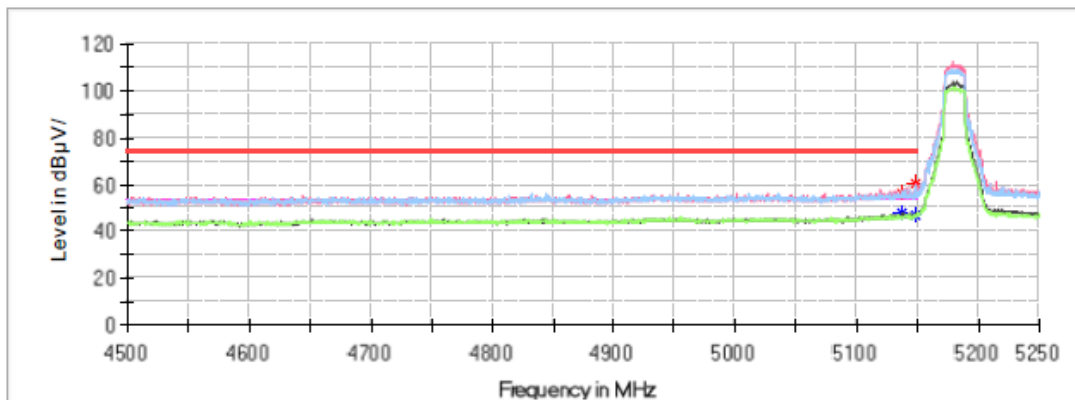
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5136.900000	---	47.90	54.00	6.10	V	8.2
5136.900000	56.35	---	74.00	17.65	V	8.2
5147.700000	---	47.19	54.00	6.81	V	8.2
5147.700000	60.63	---	74.00	13.37	V	8.2

Common Information

Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11a mode
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.6℃
Humidity: 44%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Test Date: 2025/4/17

Full Spectrum

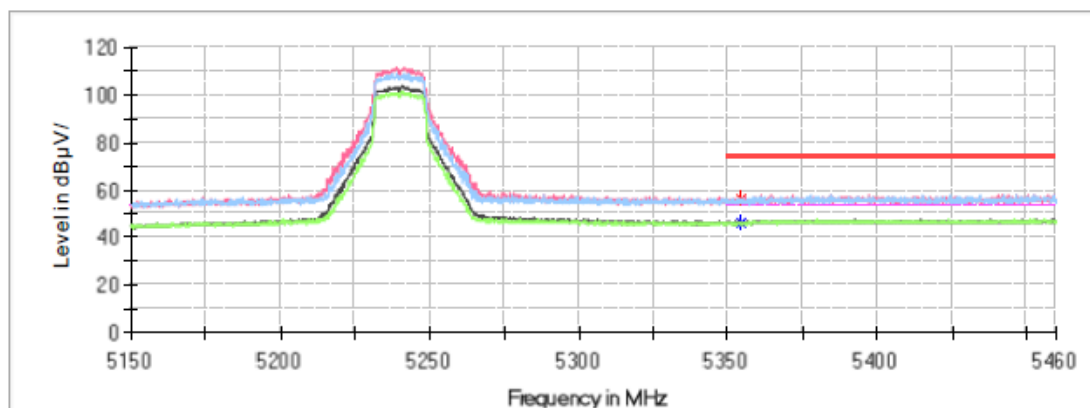


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5354.228000	---	46.20	54.00	7.80	H	8.7
5354.228000	56.19	---	74.00	17.81	H	8.7

802.11ac20 Mode:**Common Information**

Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11ac20 mode
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.6°C
Humidity: 44%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Test Date: 2025/4/17

Full Spectrum

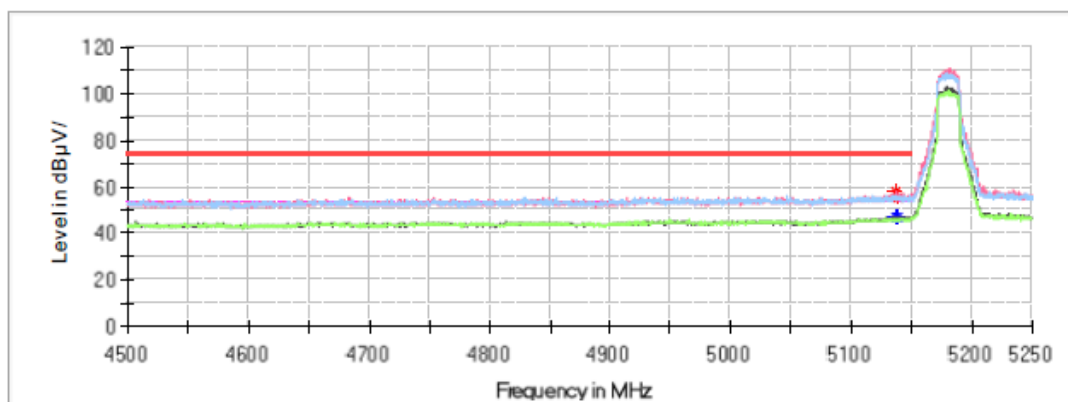
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5137.500000	---	46.60	54.00	7.40	V	8.2
5137.500000	57.77	---	74.00	16.23	V	8.2
5138.400000	---	47.21	54.00	6.79	H	8.2
5138.400000	55.43	---	74.00	18.57	H	8.2

Common Information

Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11ac20 mode
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.6°C
Humidity: 44%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Test Date: 2025/4/17

Full Spectrum

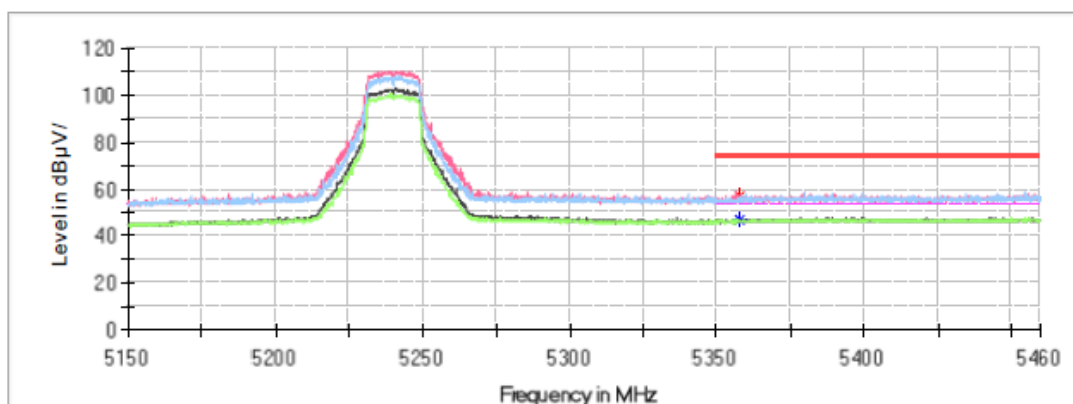


Critical_Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5357.452000	---	46.80	54.00	7.20	V	8.8
5357.452000	56.93	---	74.00	17.07	V	8.8

802.11ac40 Mode:**Common Information**

Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11ac40 mode
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.6℃
Humidity: 44%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Test Date: 2025/4/17

Full Spectrum

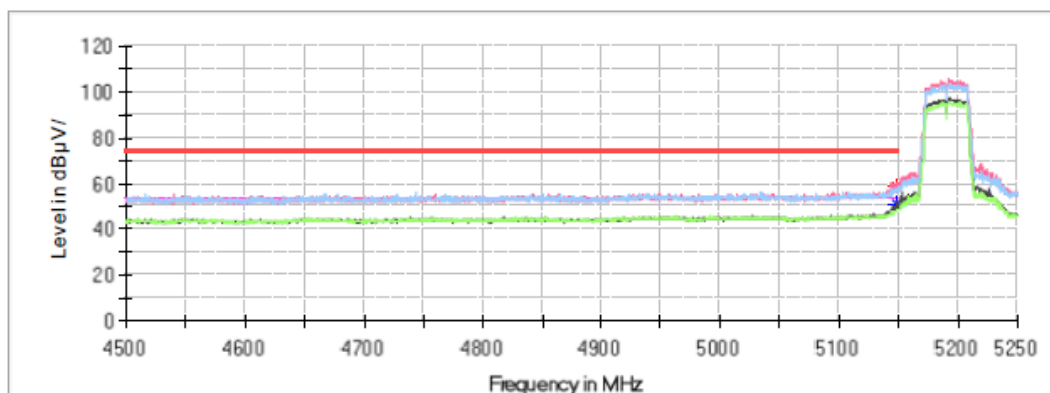
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5148.600000	58.84	---	74.00	15.16	V	8.2
5148.600000	---	50.79	54.00	3.21	V	8.2

Common Information

Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11ac40 mode
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.6°C
Humidity: 44%
Atmospheric Pressure: 100.8kPa
Test Engineer: Destine Hu
Test Date: 2025/4/17

Full Spectrum

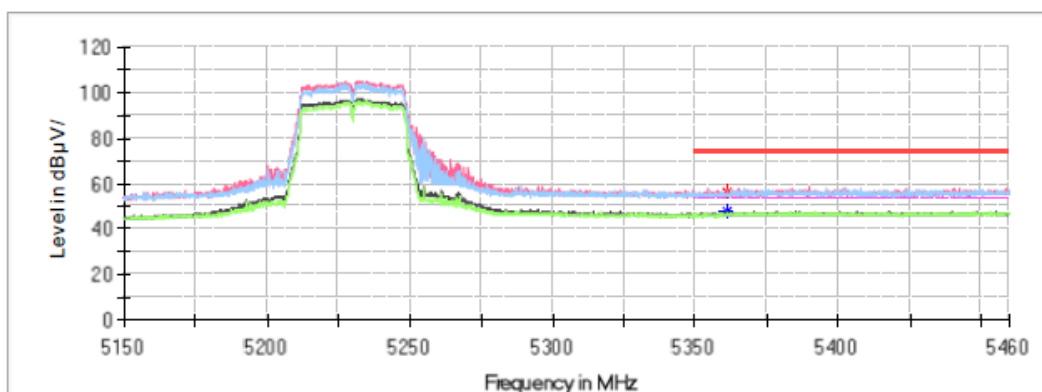


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5360.924000	---	47.79	54.00	6.21	V	8.8
5360.924000	56.04	---	74.00	17.96	V	8.8

802.11ac80 Mode:**Common Information**

Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac80 mode
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.6°C
 Humidity: 44%
 Atmospheric Pressure: 100.8kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/17

Full Spectrum

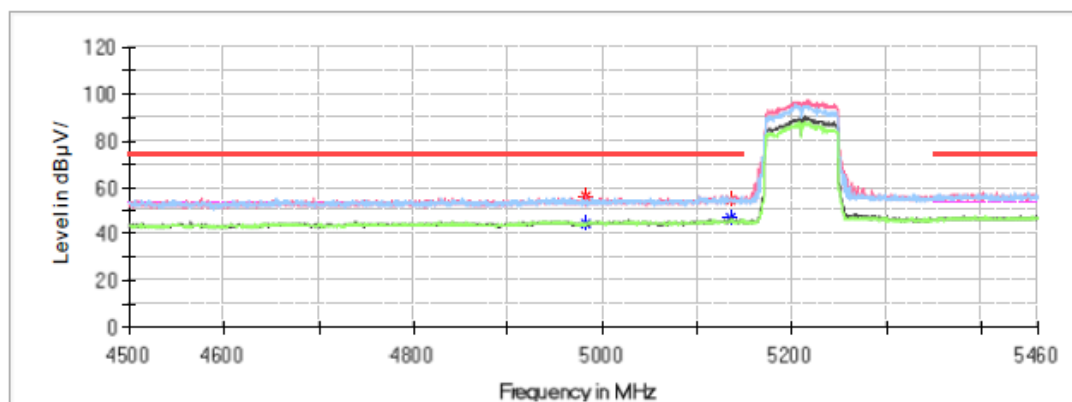**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
4981.920000	---	44.33	54.00	9.67	V	7.8
4981.920000	56.46	---	74.00	17.54	V	7.8
5135.904000	---	46.69	54.00	7.31	H	8.2
5135.904000	54.19	---	74.00	19.81	H	8.2


Bandedge Emissions Test (5725-5850MHz Band):

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

802.11a Mode:**Common Information**


Project No.:	RKSA250319001
EUT Model:	AP3880P
Test Mode:	Transmitting in 802.11a mode 5745 channel
Standard:	FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.7℃
Humidity:	45%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Test Date:	2025/4/18

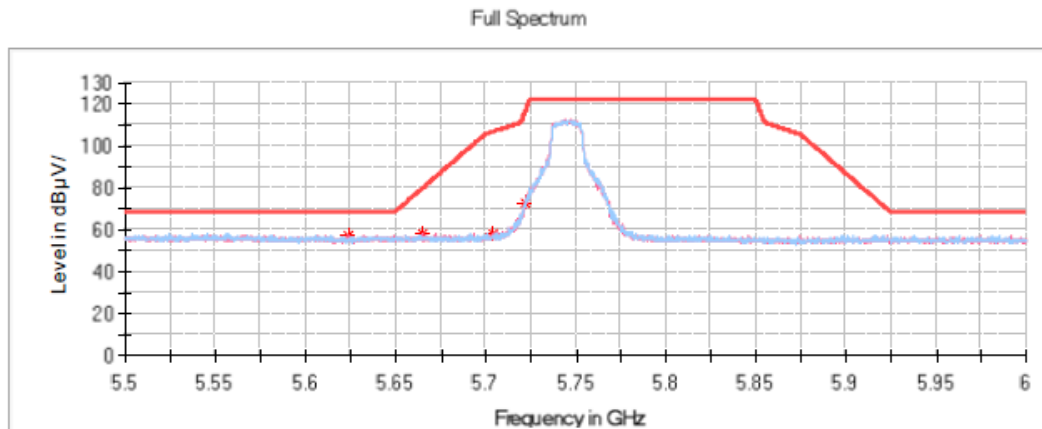**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5623.200000	57.26	---	68.20	10.94	V	9.0
5665.000000	57.73	---	79.30	21.57	V	8.9
5703.600000	58.58	---	106.21	47.62	V	8.9
5721.600000	73.17	---	114.45	41.28	H	8.9

Common Information

Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11a mode 5825 channel
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.7°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/18

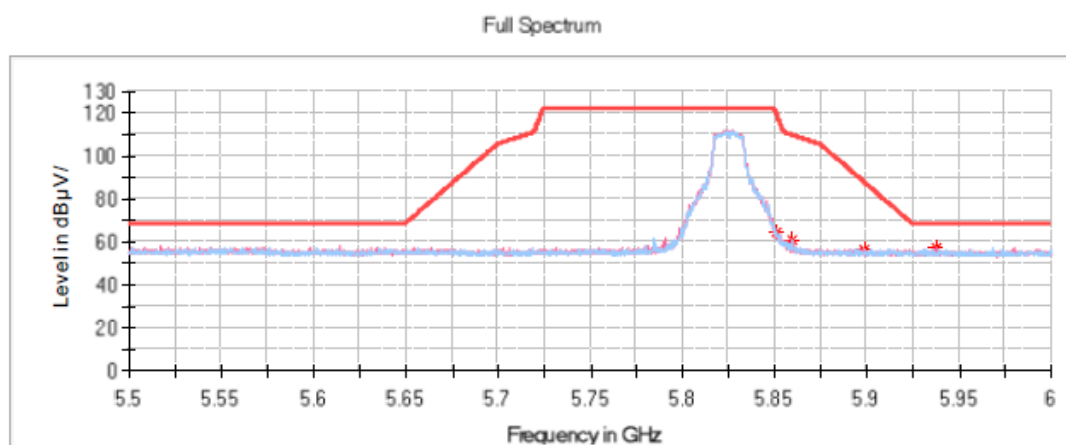


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5851.200000	64.29	---	119.46	55.17	H	8.7
5859.600000	60.65	---	109.51	48.87	H	8.7
5898.400000	56.69	---	87.88	31.19	H	8.7
5938.000000	57.26	---	68.20	10.94	V	8.6

802.11ac20 Mode:**Common Information**

Project No.: RKSA250319001
EUT Model: AP3880P
Test Mode: Transmitting in 802.11ac20 mode 5745 channel
Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.7°C
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Test Date: 2025/4/18

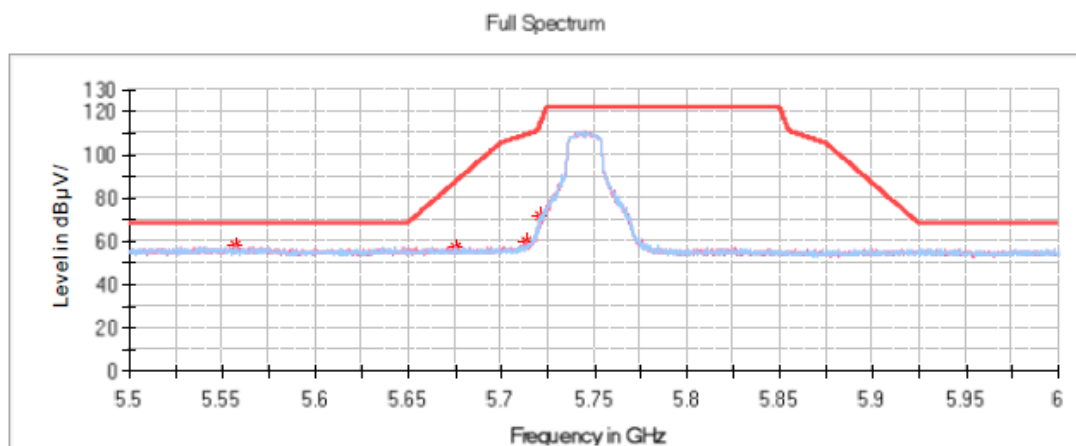
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5557.200000	57.95	---	68.20	10.25	V	9.0
5675.000000	57.18	---	86.70	29.52	H	8.9
5713.200000	59.79	---	108.90	49.11	V	8.9
5720.800000	71.70	---	112.62	40.93	H	8.9

Common Information

Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac20 mode 5825 channel
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.7°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/18

Full Spectrum

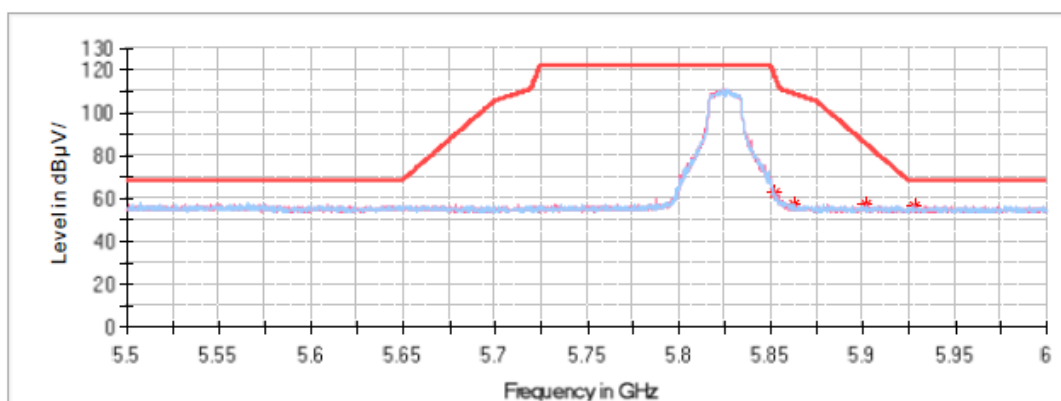


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5852.400000	63.11	---	116.73	53.62	V	8.7
5862.600000	57.15	---	108.67	51.52	H	8.7
5902.200000	57.13	---	85.07	27.94	V	8.7
5928.400000	56.77	---	68.20	11.43	V	8.7

802.11ac40 Mode:**Common Information**

Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac40 mode 5755 channel
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.7℃
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/18

Full Spectrum

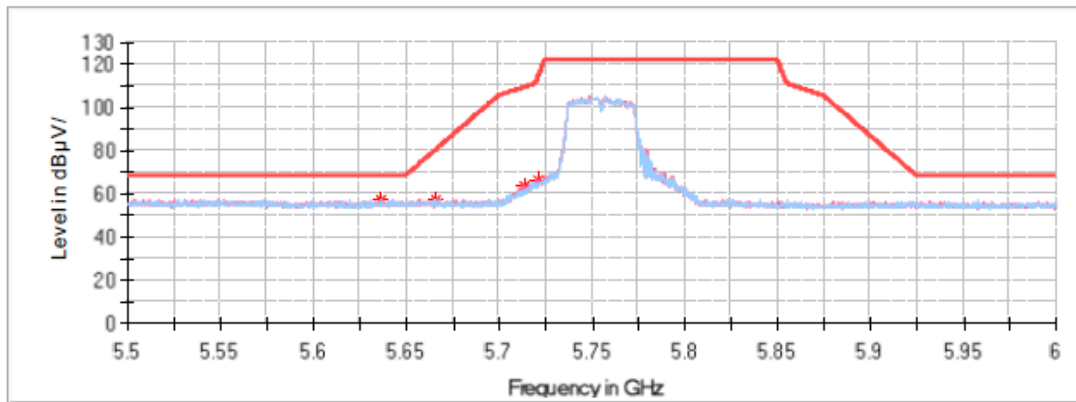
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5636.400000	57.58	---	68.20	10.62	H	9.0
5666.200000	57.53	---	80.19	22.66	H	8.9
5713.600000	63.96	---	109.01	45.04	V	8.9
5721.200000	66.29	---	113.54	47.25	V	8.9

Common Information

Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac40 mode 5795 channel
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.7℃
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/18

Full Spectrum

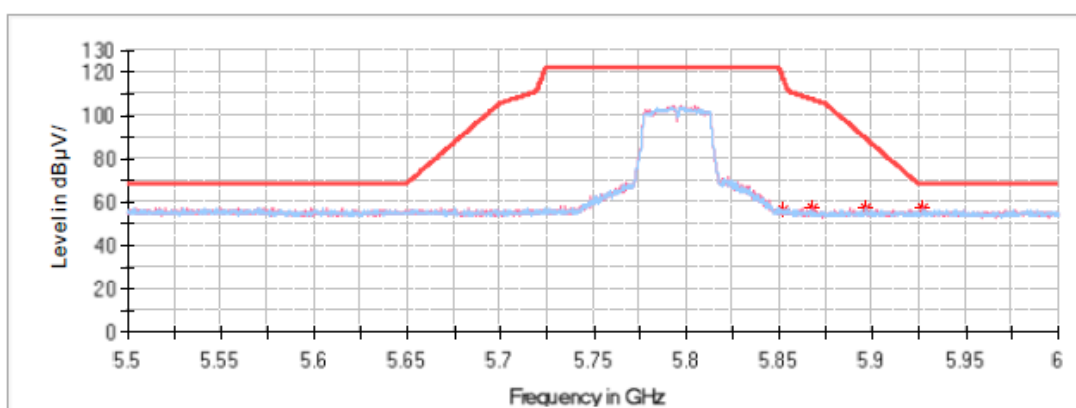


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5852.400000	56.07	---	116.73	60.66	H	8.7
5868.200000	56.88	---	107.10	50.23	V	8.7
5896.800000	57.10	---	89.07	31.97	H	8.7
5927.000000	57.45	---	68.20	10.75	V	8.7

802.11ac80 Mode:**Common Information**

Project No.: RKSA250319001
 EUT Model: AP3880P
 Test Mode: Transmitting in 802.11ac80 mode 5775 channel
 Standard: FCC Part 15.407& FCC Part 15.205&FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.7°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/18

Full Spectrum

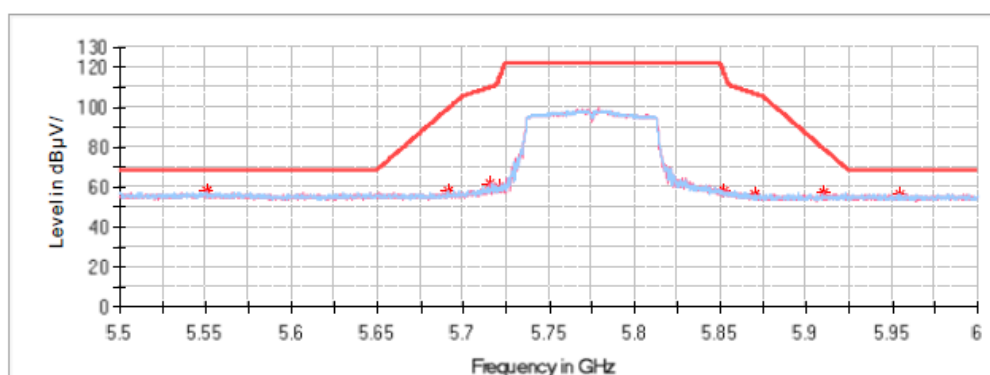**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5551.000000	58.26	---	68.20	9.94	V	9.1
5691.400000	58.26	---	98.84	40.57	H	8.9
5715.200000	61.86	---	109.46	47.60	V	8.9
5721.400000	60.20	---	113.99	53.79	H	8.9
5851.600000	58.28	---	118.55	60.27	V	8.7
5870.400000	56.15	---	106.49	50.33	H	8.7
5910.400000	57.10	---	79.00	21.91	V	8.7
5954.400000	56.58	---	68.20	11.62	V	8.6

EMISSION BANDWIDTH**Environmental Conditions & Test Information**

Test Date:	2025-04-22~2025-05-28
Temperature:	23.1~25.1 °C
Relative Humidity:	51~54.2 %
ATM Pressure:	100.8~101.3 kPa
Test Engineer:	Neil Zhou

Test Result: Compliant*5150-5250 MHz:*

Test mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11 a	Low	5180	22.367	16.600
	Middle	5200	23.140	16.650
	High	5240	23.730	16.650
802.11 ac20	Low	5180	23.831	17.800
	Middle	5200	23.843	17.800
	High	5240	24.342	17.850
802.11 ac40	Low	5190	41.800	36.400
	High	5230	42.100	36.400
802.11 ac80	Middle	5210	87.200	75.800

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz

5725-5850MHz:


Test mode	Channel	Frequency (MHz)	99% Bandwidth (MHz)
802.11 a	Low	5745	16.600
	Middle	5785	16.600
	High	5825	16.600
802.11 ac20	Low	5745	17.800
	Middle	5785	17.800
	High	5825	17.800
802.11 ac40	Low	5755	36.400
	High	5795	36.400
802.11 ac80	Middle	5775	75.800

Note: the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz.

Test mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11 a	Low	5745	15.600	0.5
	Middle	5785	15.400	
	High	5825	15.450	
802.11 ac20	Low	5745	16.050	
	Middle	5785	16.050	
	High	5825	16.050	
802.11 ac40	Low	5755	35.400	
	High	5795	36.000	
802.11 ac80	Middle	5775	75.600	


**6dB Bandwidth
5725-5850 MHz Band**

802.11a mode, 5745MHz

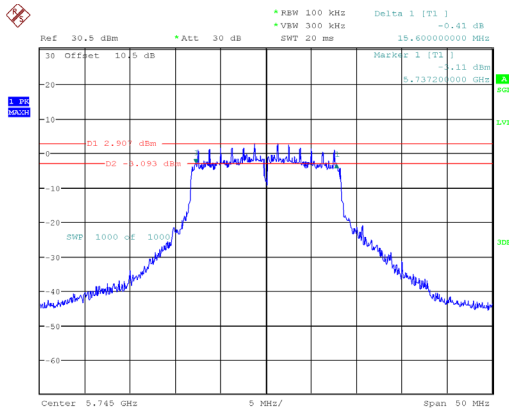


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 28.MAY.2025 13:27:41

802.11a mode, 5785MHz

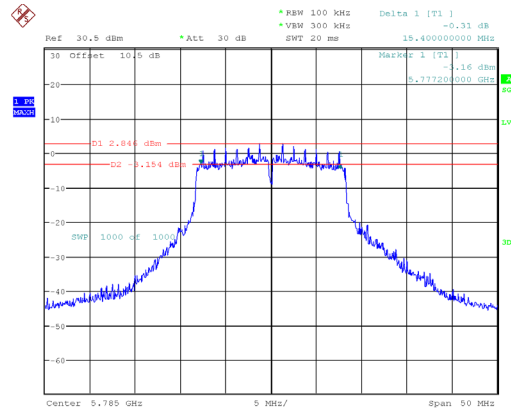


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 28.MAY.2025 13:30:31

802.11a mode, 5825MHz

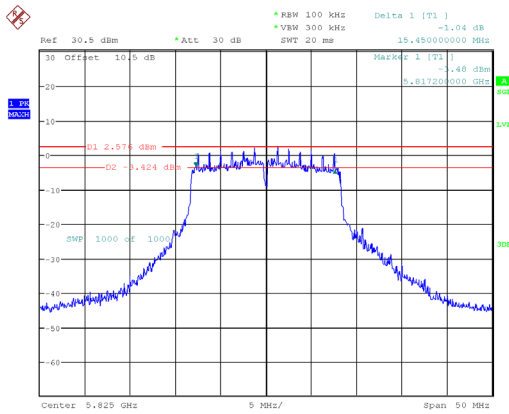


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 28.MAY.2025 13:33:43

802.11ac20 mode, 5745MHz

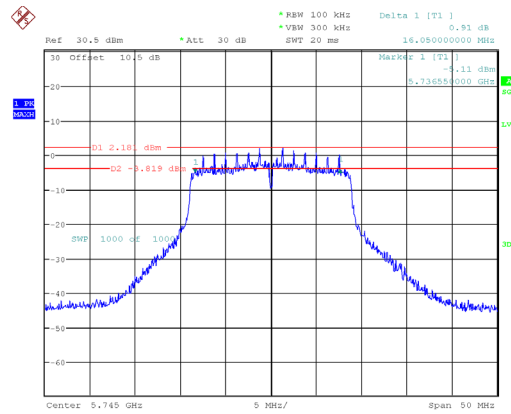


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 28.MAY.2025 13:37:19

802.11 ac20 mode, 5785MHz

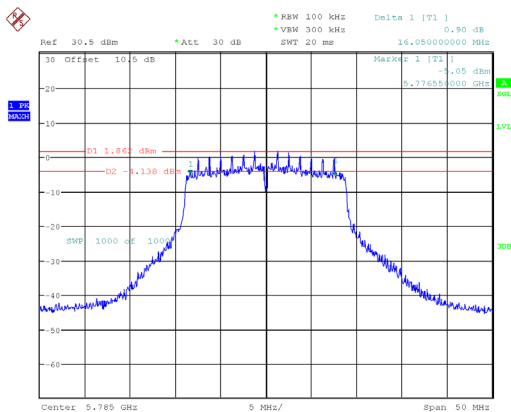


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 28.MAY.2025 13:40:03

802.11 ac20 mode, 5825MHz

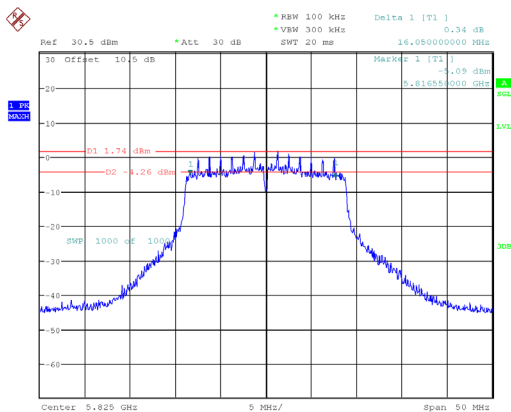


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 28.MAY.2025 13:42:45

802.11ac40 mode, 5755MHz

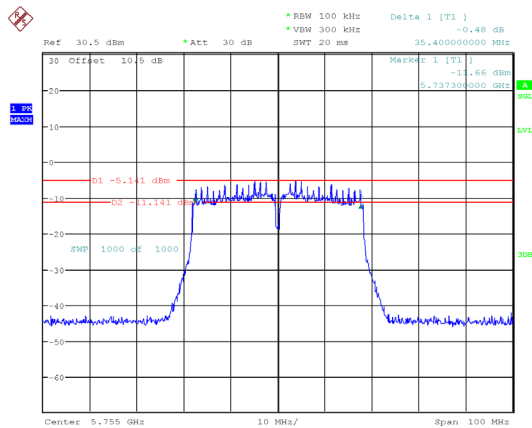


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 28.MAY.2025 13:46:09

802.11 ac40 mode, 5795MHz

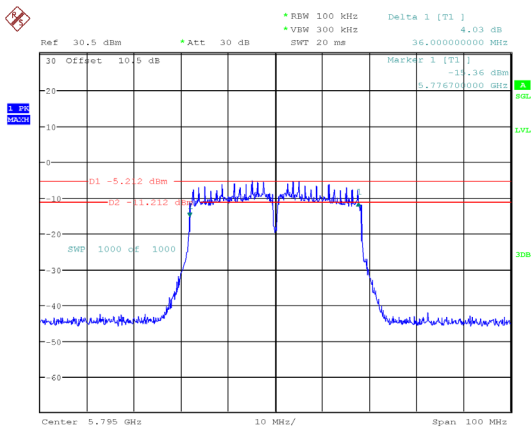

ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 28.MAY.2025 13:50:24

802.11ac80 mode, 5775MHz

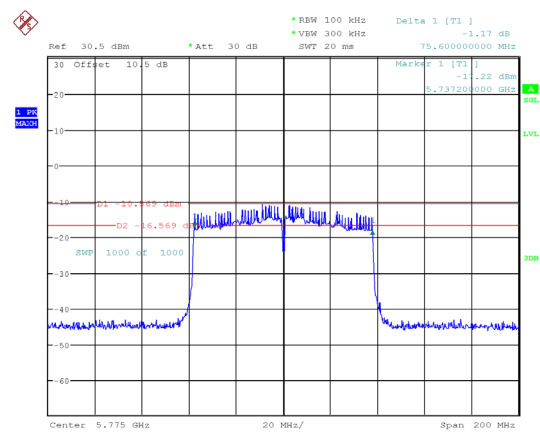


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 28.MAY.2025 13:56:18

26 Bandwidth


5150-5250 MHz Band:

802.11a mode, 5180MHz

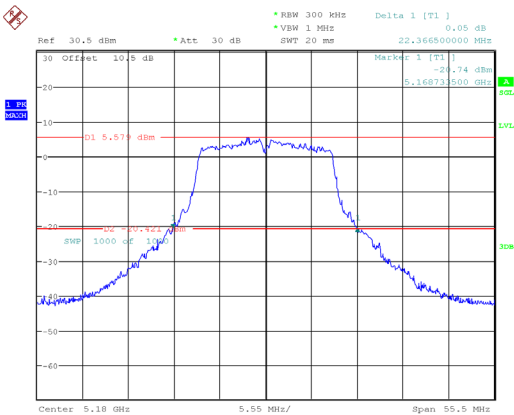


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 14:43:07

802.11a mode, 5200MHz

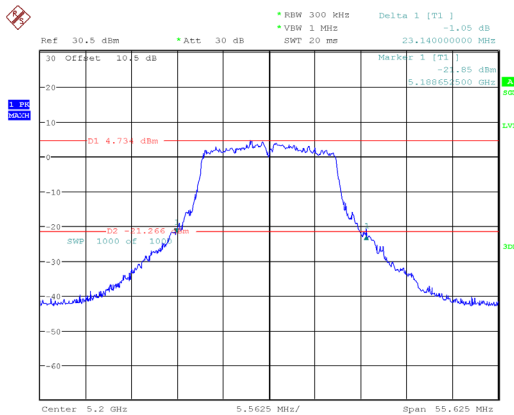


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 14:48:20

802.11a mode, 5240MHz

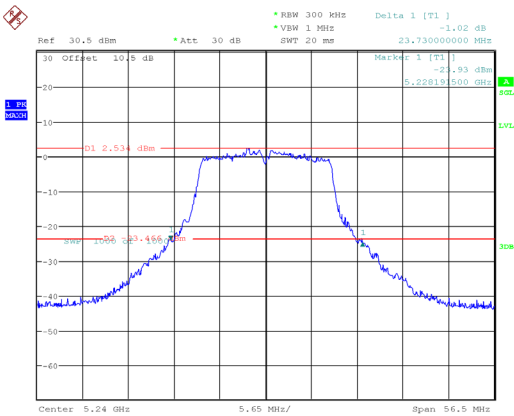


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 14:52:38

802.11ac20 mode, 5180MHz

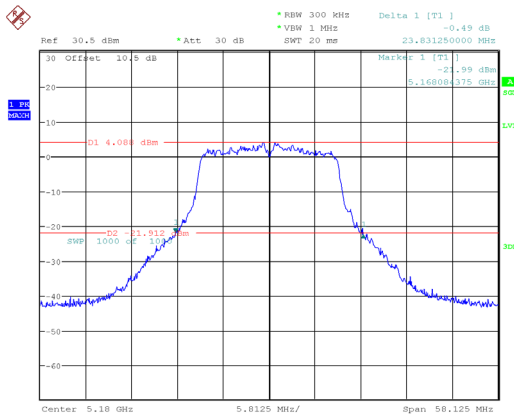


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 14:58:14

802.11 ac20 mode, 5200MHz

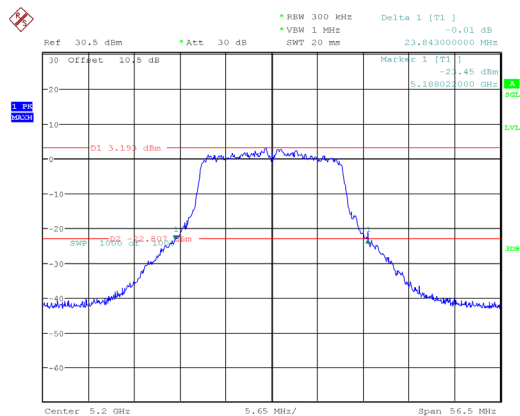


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:02:33

802.11 ac20 mode, 5240MHz

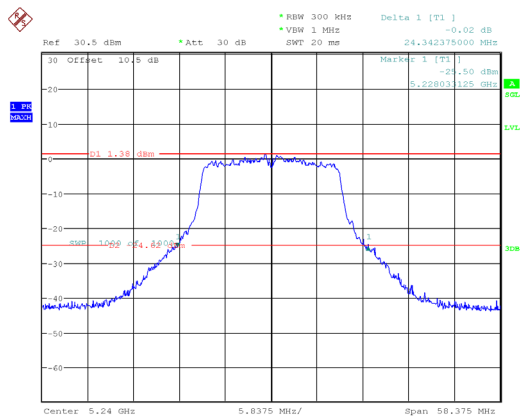


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:06:58

802.11ac40 mode, 5190MHz

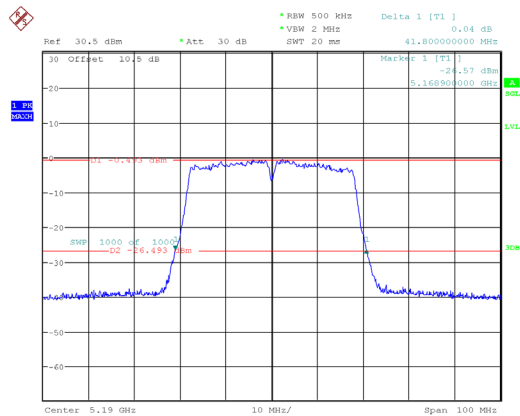

ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:11:29

802.11 ac40 mode, 5230MHz

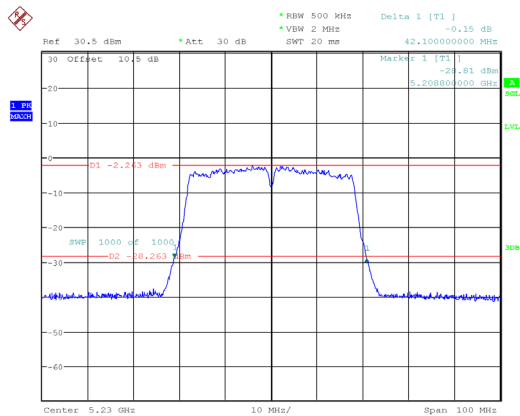


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:18:14

The screenshot shows a Keysight Spectrum Analyzer interface. The main display area shows a signal spectrum with a blue trace. A red horizontal line is drawn at -3.987 dBm, labeled 'D1 -3.987 dBm'. Another red horizontal line is drawn at -30.000 dBm, labeled 'SWP 1000 uF 1000'. The signal trace shows a flat noise floor at approximately -40 dBm, a sharp rise to a plateau at approximately -3.987 dBm, and a sharp fall back to the noise floor. The x-axis is labeled 'Center 5.21 GHz' and '20 MHz/'. The y-axis is labeled 'Span 200 MHz'. The top status bar shows 'Ref 30.5 dBm', 'Att 30 dB', 'SMT 20 ms', 'Delta 1 [T1] -1.60 dB', and '78.200000000 MHz'. The bottom status bar shows 'Marker 1 [T1] -30.14 dBm' and '5.16620000 GHz'. The left side of the screen shows a '1000 uF' label and a 'SWP' label. The right side of the screen shows a '30.000 dBm' label and a '30.000 dBm' label.

ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 15:26:38


99% Occupied Bandwidth

5150-5250 MHz Band:
802.11a mode, 5180MHz

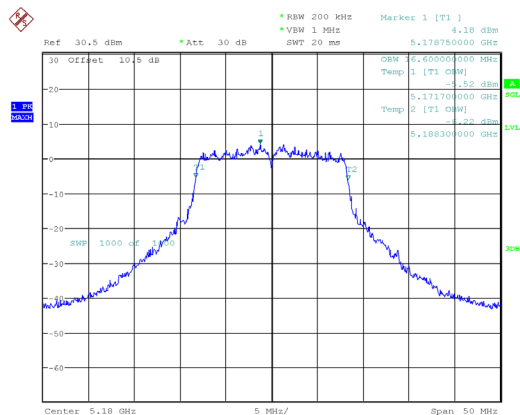


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 14:44:06

802.11a mode, 5200MHz

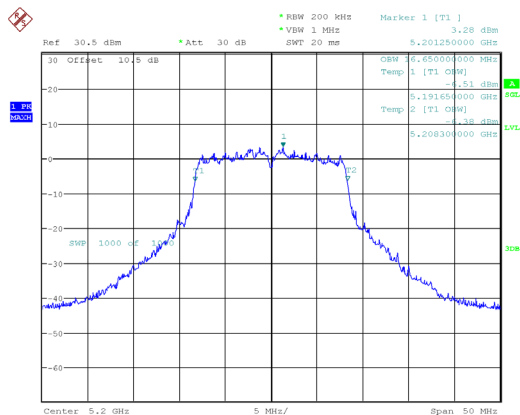


ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 14:49:19

802.11a mode, 5240MHz

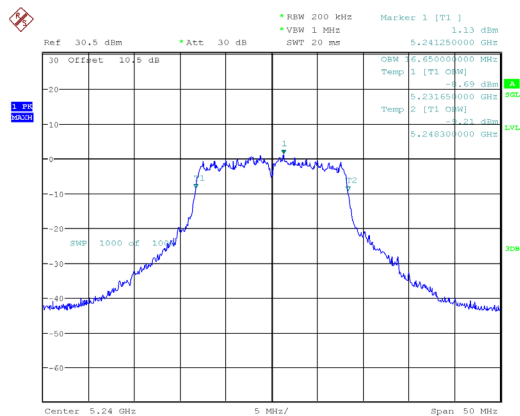

ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 14:53:41

802.11ac20 mode, 5180MHz

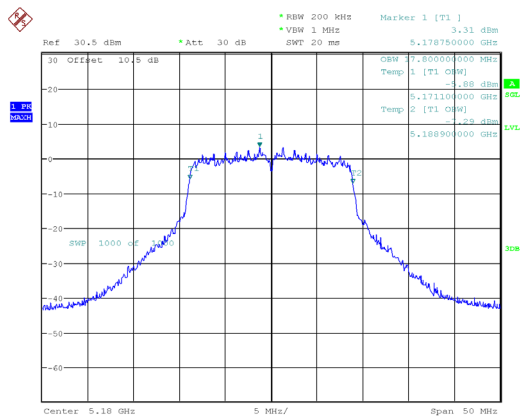

ProjectNo.:RKSA250319001 Tester:Neil Zhou
Date: 22.APR.2025 14:59:12