

RF TEST REPORT

Applicant	ID TECH
FCC ID	WQJ-AP6800
Product	AP6800
Brand	ID TECH
Model	AP6800-0308; AP6800-0308D
Report No.	R2405A0528-R1V1
Issue Date	September 2, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2023)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the Test Report.....	5
1.2. Test Facility	5
1.3. Testing Location.....	5
2. General Description of Equipment Under Test.....	6
2.1. Applicant and Manufacturer Information	6
2.2. General Information	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. Unwanted Emission	9
5.2. Conducted Emission	44
6. Main Test Instruments.....	49
ANNEX A: The EUT Appearance.....	50
ANNEX B: Test Setup Photos	51

Version	Revision Description	Issue Date
Rev.0	Initial issue of report.	August 20, 2024
Rev.1	Update description.	September 2, 2024
Note: This revised report (Report No.: R2405A0528-R1V1) supersedes and replaces the previously issued report (Report No.: R2405A0528-R1). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Unwanted Emissions	15.247(d), 15.205, 15.209	PASS
2	Conducted Emissions	15.207	PASS
Date of Testing: May 17, 2024 ~ August 7, 2024			
Date of Sample Received: May 17, 2024			
Note: All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

Only Unwanted Emissions and Conducted Emissions is tested for AP6800-0308D in this report. Other test items refer to the Module report (Report No.: ER/2020/80120; ER/2020/80121, FCC ID: VPYLB1YM, Grant date: 01/19/2021).

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment Under Test

2.1. Applicant and Manufacturer Information

Applicant	ID TECH
Applicant address	10721 Walker Street, Cypress, California 90630, United States
Manufacturer	ID TECH TAIWAN
Manufacturer address	No. 16, Lane 22, GaoQing Rd., YanMei Dist., TaoYuan City 326, Taiwan

2.2. General Information

EUT Description	
Model	AP6800-0308; AP6800-0308D
SN	415T272329
Hardware Version	Rev.A
Software Version	v1.00
Power Supply	AC Adapter
Antenna Type	Internal Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	3.0 dBi
Additional Beamforming Gain	NA
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz Bluetooth LE: 2402 ~2480 MHz
Modulation Type	802.11b: DSSS 802.11g/n: OFDM Bluetooth LE: GFSK
Auxiliary Test Equipment	
PC	Manufacturer: DELL Model: 0000053 (SN: 7ZX7R9)
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. AP6800-0308 and AP6800-0308D are the same except for different models, and this report only tests AP6800-0308D.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2023) Radio Frequency Devices

ANSI C63.10-2013

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis for Wi-Fi; X axis for Bluetooth LE) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth (Low Energy)	1 Mbps; 2 Mbps

Band	Data Rate	
	SISO	MIMO
802.11b	1Mbps	1Mbps
802.11g	6Mbps	6Mbps
802.11n HT20	MCS0	MCS8

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO
Unwanted Emissions	--	--	O
Conducted Emission	--	--	O
Note: "O": test all bands			

5. Test Case Results

5.1. Unwanted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. EUT and receive antenna should be 3m or 10m below 1GHz; 3 meters for above 1GHz.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9kHz, VBW=30kHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.


Test Setup

9kHz~ 30MHz

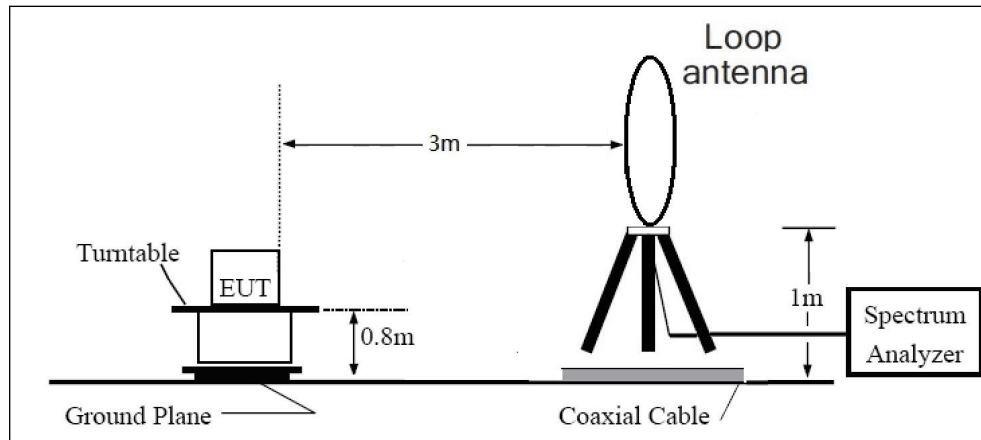


30MHz~ 1GHz

Distance 3m

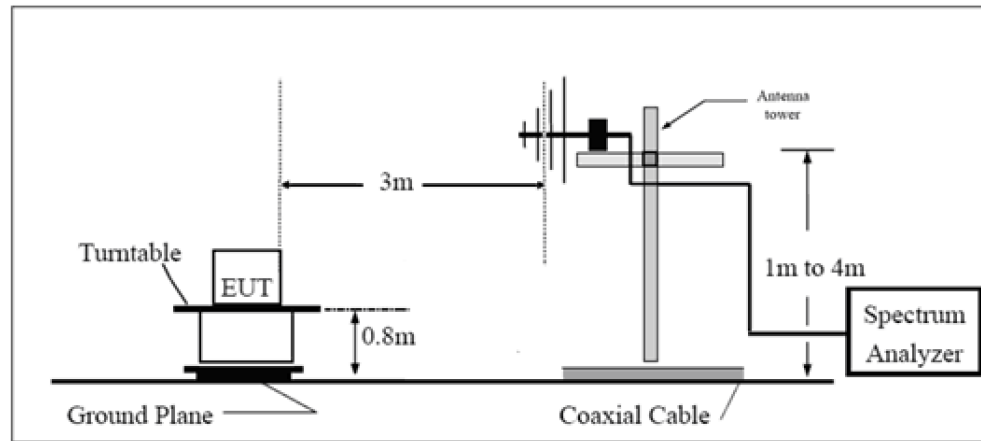


Distance 10m

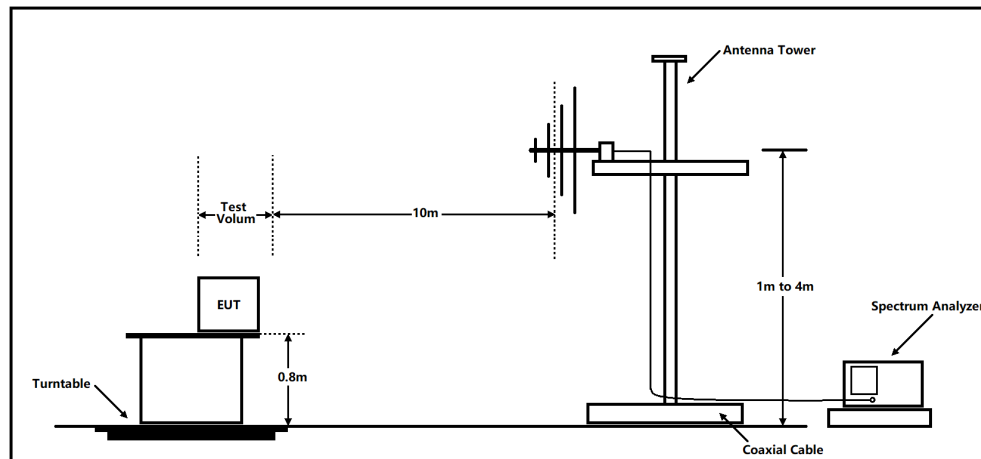

Note: Area side: 21m x 12m

Above 1GHz

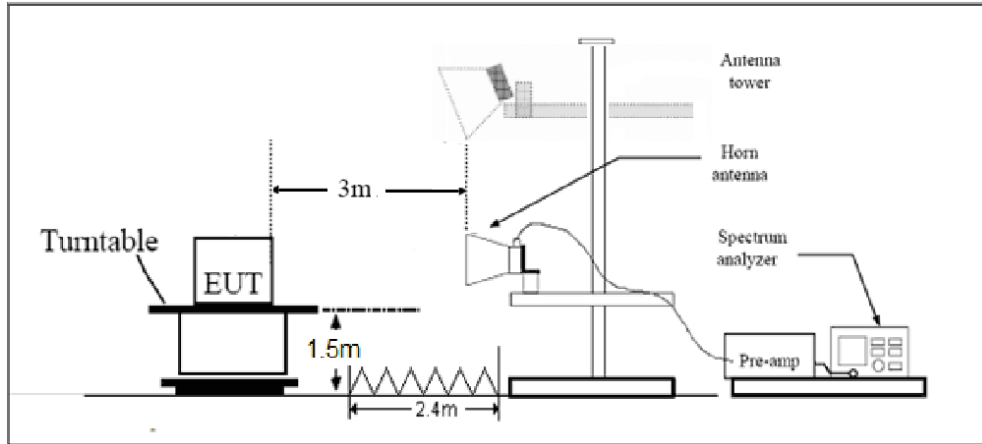

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength($\mu\text{V/m}$)	Field strength($\text{dB}\mu\text{V/m}$)
0.009–0.490	$2400/F(\text{kHz})$	/
0.490–1.705	$24000/F(\text{kHz})$	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 $\text{dB}\mu\text{V/m}$

Average Limit=54 $\text{dB}\mu\text{V/m}$

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty(3m)	Uncertainty(10m)
9kHz-30MHz	3.55 dB	--
30MHz-200MHz	4.17 dB	3.39 dB
200MHz-1GHz	4.84 dB	3.82 dB
1-18GHz	4.35 dB	--
18-26.5GHz	5.90 dB	--
26.5GHz~40GHz	5.92 dB	--


Test Results:

The following graphs display the maximum values of horizontal and vertical by software.
Blue trace uses the peak detection, Green trace uses the average detection.


A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means (dB $\mu\text{V/m}$)

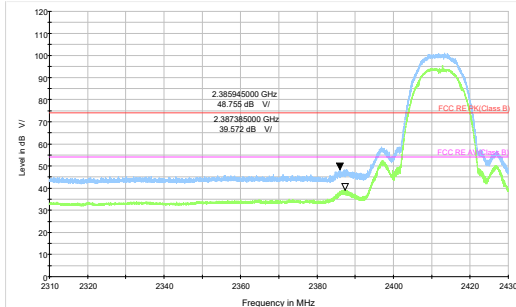


802.11b-Channel 1 Peak+ Average

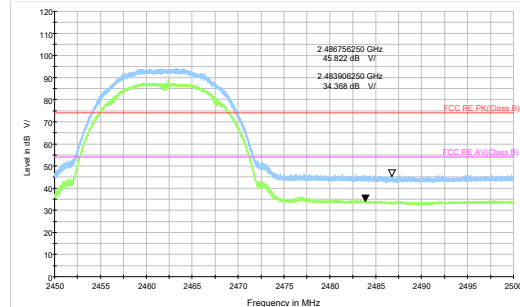


802.11b-Channel 11 Peak+ Average

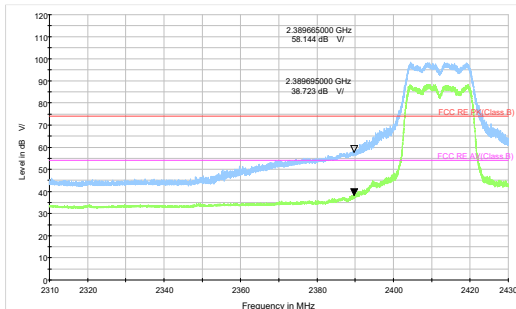


802.11g-Channel 1 Peak+ Average

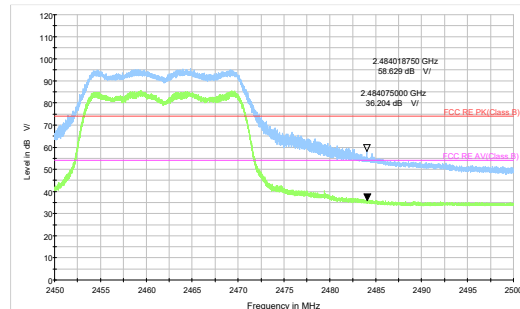

802.11g-Channel 11 Peak+ Average

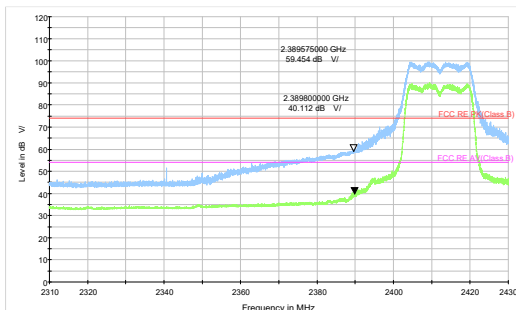


802.11n HT20-Channel 1 Peak+ Average

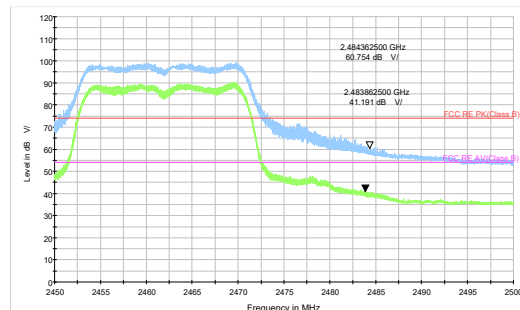


802.11n HT20-Channel 11 Peak+ Average

After the pretest, Bluetooth LE (2M) was selected as the worst Mode for Bluetooth LE.

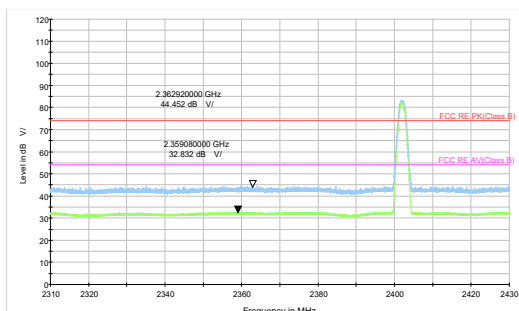

Bluetooth LE (2M) Channel 0 Peak+ Average

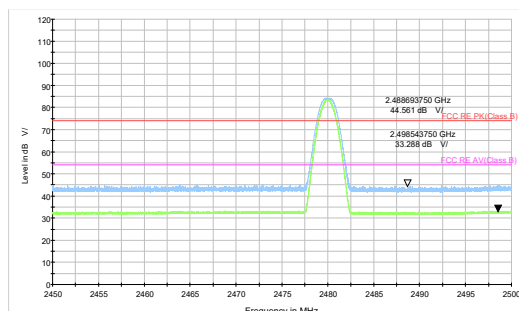

Bluetooth LE (2M) Channel 39 Peak+Average

Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz are more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.


For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

Continuous TX mode:

Wi-Fi 2.4G

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, **802.11n (HT20) CH6** are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means ($\text{dB}\mu\text{V/m}$)

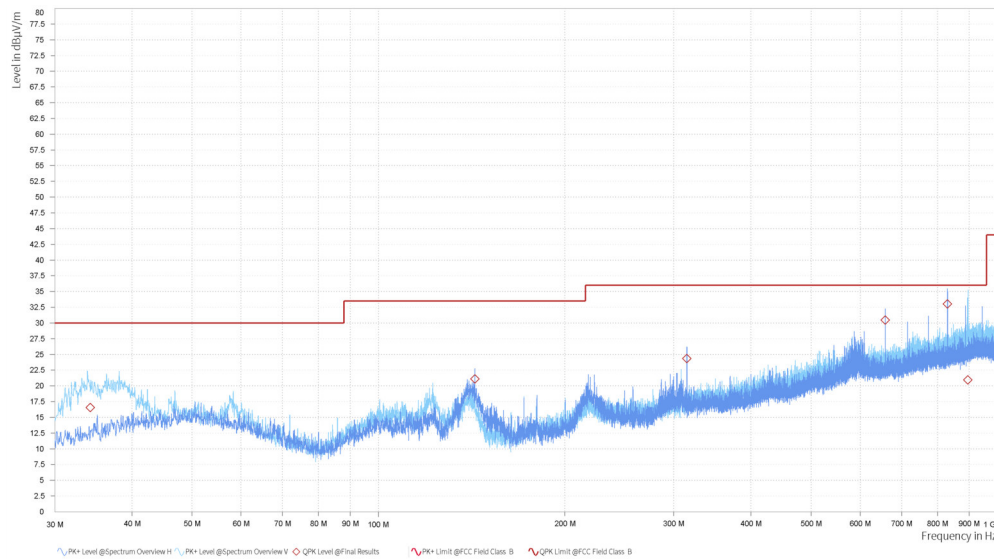



Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (m)	Polarization	Azimuth (deg)	Correct Factor (dB)
143.227	21.13	33.50	12.37	3.75	H	298.3	-13.61
315.072	24.37	36.00	11.63	2.86	H	312.4	-7.63
658.823	30.45	36.00	5.55	1.16	H	258.6	-1.76
830.735	33.01	36.00	2.99	1.00	H	129	-0.14
34.240	16.59	30.00	13.41	1.11	V	164.3	-11.30
896.053	20.93	36.00	15.07	1.80	V	65.1	2.51


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – Quasi-Peak

802.11b CH1

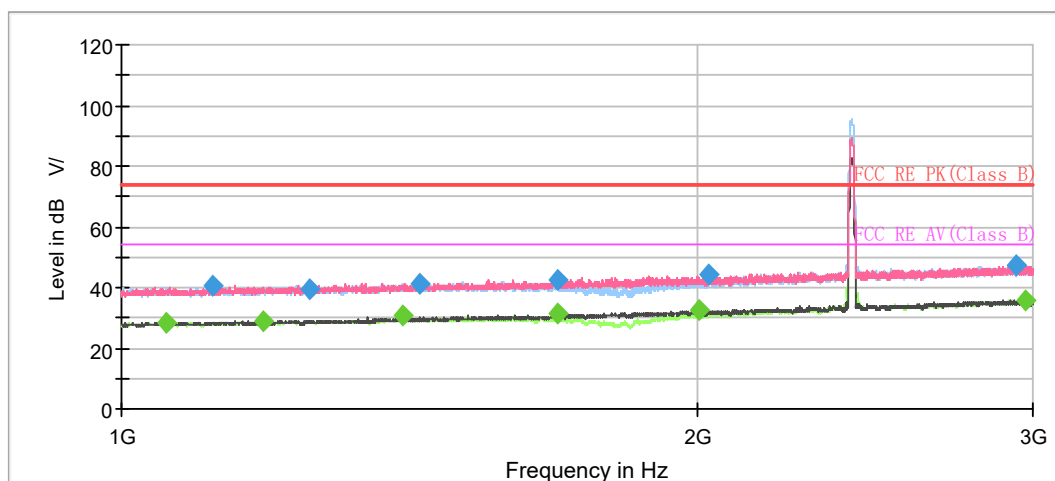

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

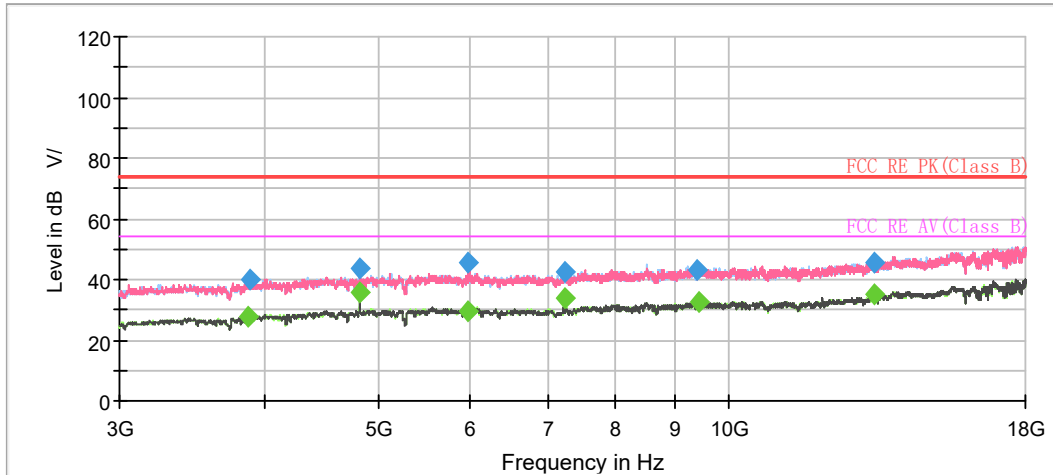

PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Final Results
 PK Limit
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit



Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1055.750000	---	28.60	54.00	25.40	500.0	100.0	H	53.0	-9.6
1116.250000	40.82	---	74.00	33.18	500.0	100.0	H	345.0	-9.2
1185.000000	---	28.83	54.00	25.17	500.0	100.0	H	312.0	-8.8
1255.250000	39.54	---	74.00	34.46	500.0	200.0	H	358.0	-8.3
1403.250000	---	30.76	54.00	23.24	500.0	200.0	V	2.0	-7.5
1431.500000	41.46	---	74.00	32.54	500.0	200.0	V	194.0	-7.3
1690.000000	---	31.59	54.00	22.41	500.0	100.0	V	0.0	-5.9
1690.500000	42.49	---	74.00	31.51	500.0	200.0	V	7.0	-5.9
2005.250000	---	32.33	54.00	21.67	500.0	200.0	V	124.0	-4.4
2030.750000	44.09	---	74.00	29.91	500.0	100.0	V	206.0	-4.3
2941.500000	47.28	---	74.00	26.72	500.0	200.0	H	306.0	-1.0
2973.750000	---	35.79	54.00	18.21	500.0	100.0	H	208.0	-0.7


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11b CH6

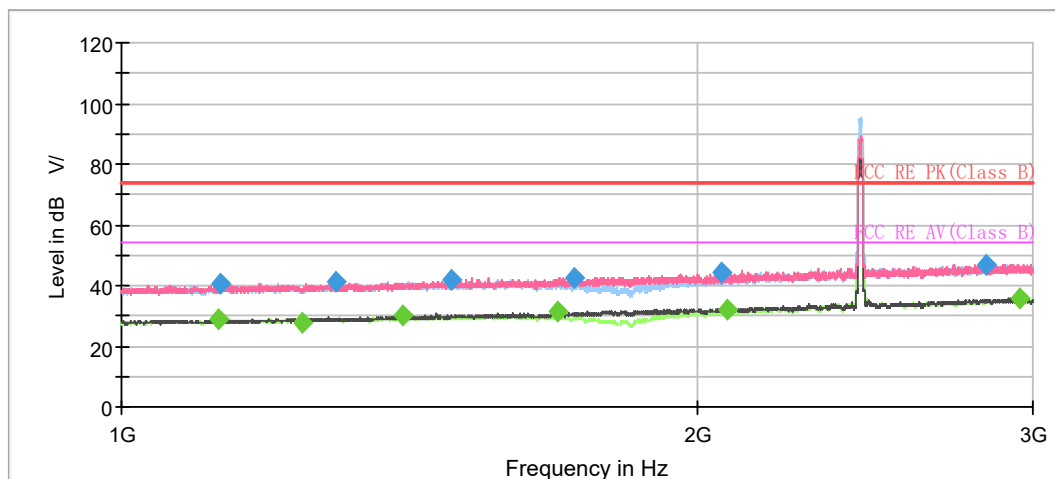

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

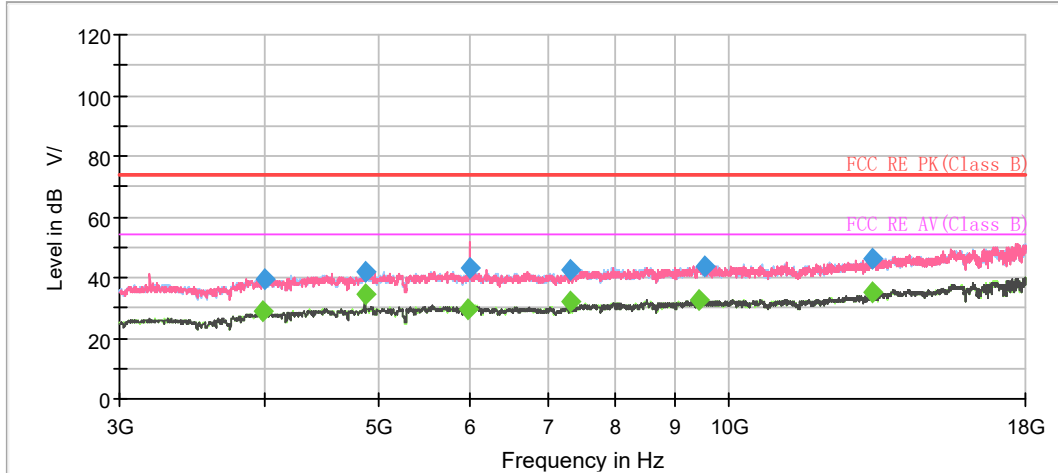

PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Final Results
 PK Limit
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1123.750000	---	28.82	54.00	25.18	500.0	200.0	V	45.0	-9.1
1125.500000	40.52	---	74.00	33.48	500.0	200.0	H	177.0	-9.1
1242.250000	---	27.76	54.00	26.24	500.0	200.0	H	335.0	-8.3
1293.500000	41.30	---	74.00	32.70	500.0	200.0	V	280.0	-8.1
1403.500000	---	30.28	54.00	23.72	500.0	200.0	V	0.0	-7.5
1489.750000	41.70	---	74.00	32.30	500.0	200.0	V	235.0	-6.9
1690.000000	---	31.11	54.00	22.89	500.0	100.0	V	294.0	-5.9
1725.000000	42.52	---	74.00	31.48	500.0	100.0	V	284.0	-5.7
2059.750000	44.25	---	74.00	29.75	500.0	200.0	V	206.0	-4.2
2074.000000	---	32.07	54.00	21.93	500.0	200.0	V	36.0	-4.1
2834.000000	47.04	---	74.00	26.96	500.0	200.0	H	265.0	-1.2
2950.750000	---	35.77	54.00	18.23	500.0	200.0	H	359.0	-0.9

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11b CH11

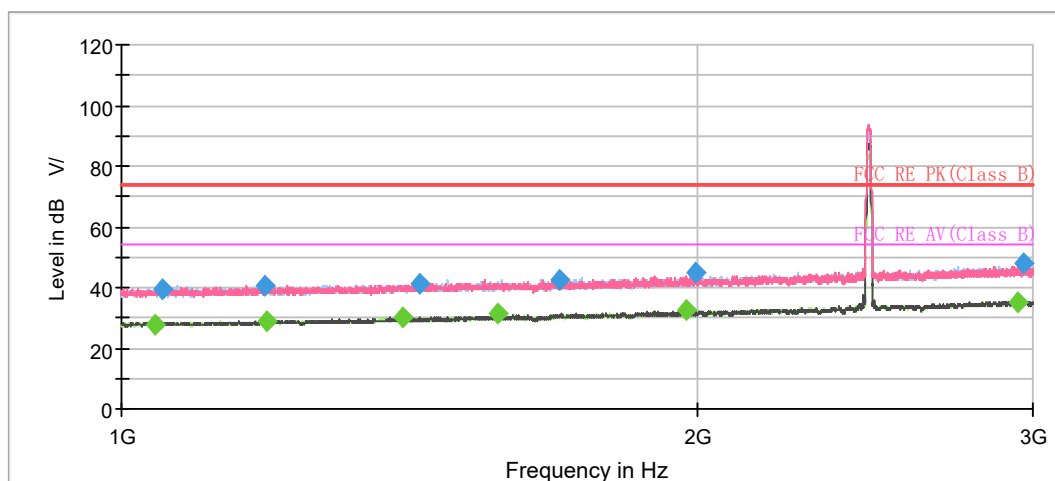

PK Level @Spectrum Overview H PK Level @Spectrum Overview V PK Level @Final Results PK Limit
 AVG Level @Spectrum Overview H AVG Level @Spectrum Overview V AVG Level @Final Results AVG Limit

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

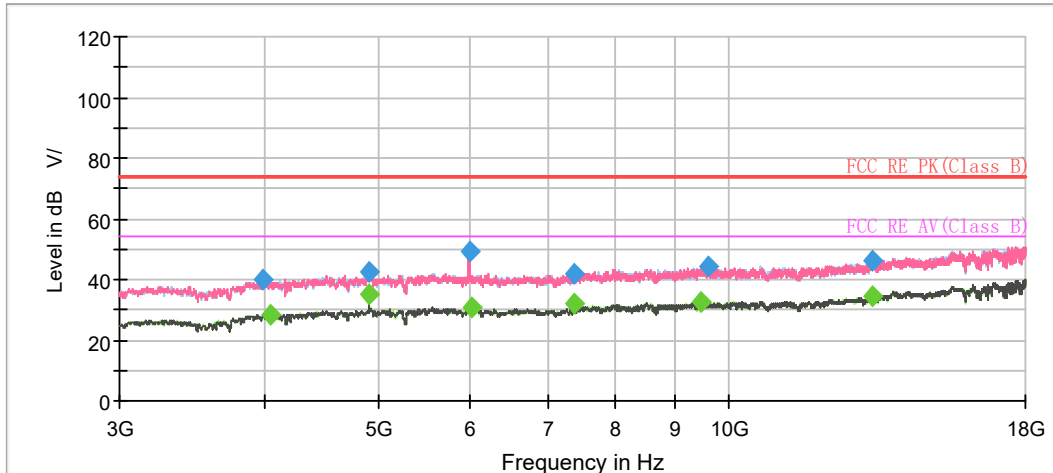

PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Final Results
 PK Limit
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1041.250000	---	27.70	54.00	26.30	500.0	100.0	H	219.0	-9.7
1050.250000	39.11	---	74.00	34.89	500.0	100.0	V	224.0	-9.7
1189.250000	40.81	---	74.00	33.19	500.0	100.0	V	164.0	-8.7
1190.750000	---	28.96	54.00	25.04	500.0	200.0	H	226.0	-8.7
1403.750000	---	30.41	54.00	23.59	500.0	200.0	V	274.0	-7.4
1431.250000	41.09	---	74.00	32.91	500.0	200.0	V	253.0	-7.3
1575.250000	---	31.31	54.00	22.69	500.0	200.0	V	259.0	-6.5
1694.000000	42.73	---	74.00	31.27	500.0	200.0	H	250.0	-5.9
1977.000000	---	32.39	54.00	21.61	500.0	200.0	V	163.0	-4.6
1997.750000	44.69	---	74.00	29.31	500.0	200.0	V	218.0	-4.5
2946.500000	---	35.38	54.00	18.62	500.0	200.0	V	163.0	-0.9
2967.250000	47.70	---	74.00	26.30	500.0	100.0	V	118.0	-0.8

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11g CH1

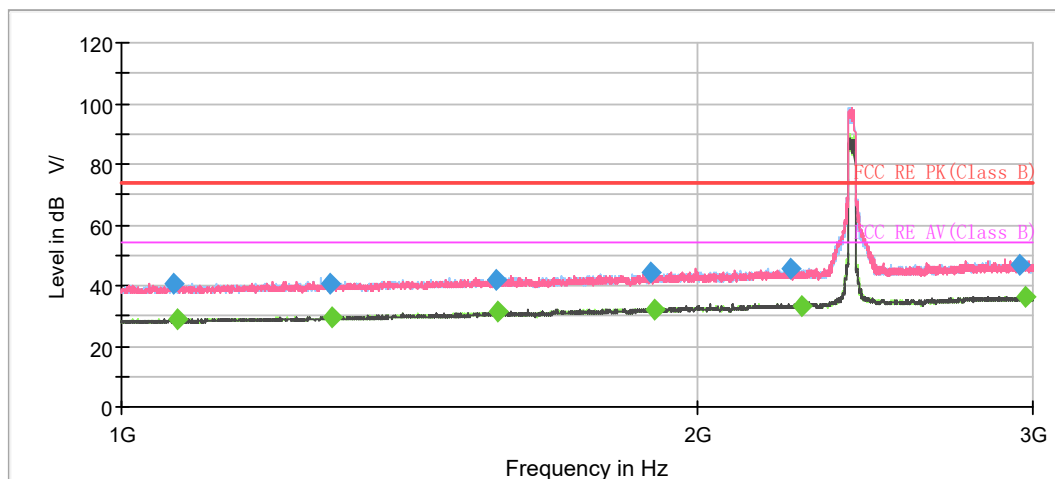

PK Level @Spectrum Overview H PK Level @Spectrum Overview V PK Level @Final Results PK Limit
 AVG Level @Spectrum Overview H AVG Level @Spectrum Overview V AVG Level @Final Results AVG Limit

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

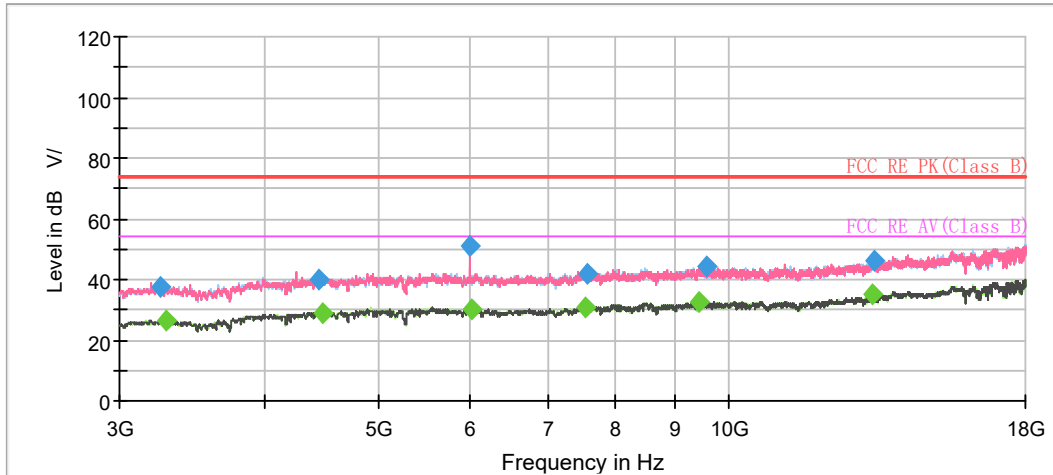

PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Final Results
 PK Limit
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1063.750000	40.78	---	74.00	33.22	500.0	200.0	V	223.0	-9.5
1068.750000	---	28.75	54.00	25.25	500.0	100.0	V	162.0	-9.5
1286.500000	40.74	---	74.00	33.26	500.0	200.0	V	236.0	-8.1
1289.500000	---	29.38	54.00	24.62	500.0	200.0	H	153.0	-8.1
1569.750000	42.00	---	74.00	32.00	500.0	100.0	V	173.0	-6.5
1575.750000	---	31.28	54.00	22.72	500.0	200.0	H	92.0	-6.5
1893.500000	44.37	---	74.00	29.63	500.0	200.0	V	171.0	-5.0
1901.000000	---	31.73	54.00	22.27	500.0	100.0	H	238.0	-4.9
2241.000000	45.80	---	74.00	28.20	500.0	100.0	H	219.0	-3.5
2272.500000	---	33.50	54.00	20.50	500.0	200.0	H	120.0	-3.3
2954.750000	47.06	---	74.00	26.94	500.0	100.0	H	181.0	-0.8
2973.250000	---	36.30	54.00	17.70	500.0	200.0	H	110.0	-0.7

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11g CH6

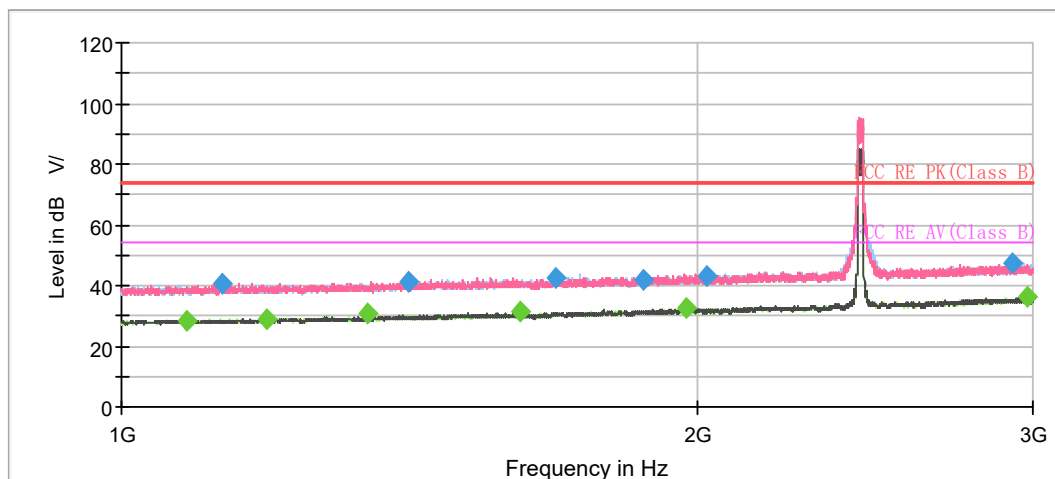

~ PK Level @Spectrum Overview H
 ~ PK Level @Spectrum Overview V
 ◆ PK Level @Final Results
 — PK Limit
~ AVG Level @Spectrum Overview H
 ~ AVG Level @Spectrum Overview V
 ◆ AVG Level @Final Results
 — AVG Limit

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

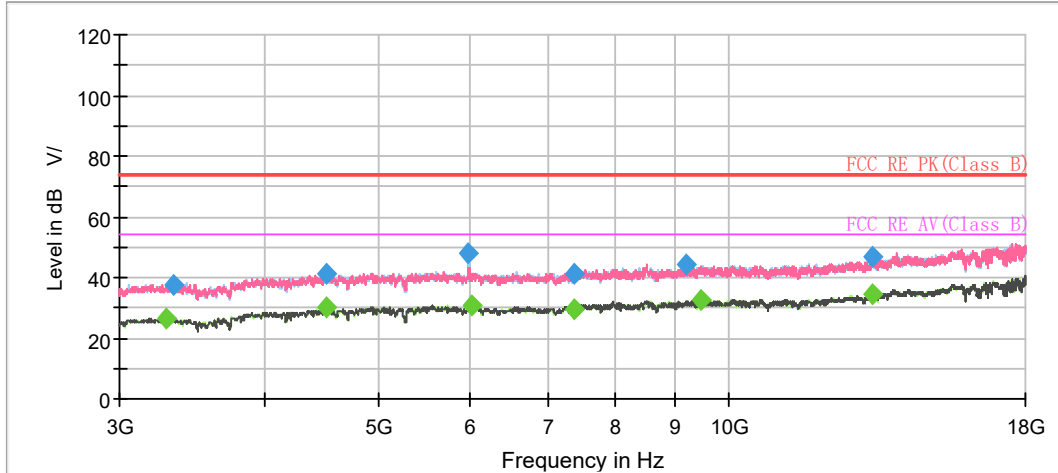

PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Final Results
 PK Limit
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1082.750000	---	28.21	54.00	25.79	500.0	200.0	V	192.0	-9.4
1129.750000	40.60	---	74.00	33.40	500.0	200.0	H	230.0	-9.1
1191.500000	---	28.86	54.00	25.14	500.0	100.0	H	102.0	-8.7
1346.000000	---	30.87	54.00	23.13	500.0	200.0	V	273.0	-7.8
1412.000000	41.47	---	74.00	32.53	500.0	100.0	H	199.0	-7.4
1616.250000	---	31.09	54.00	22.91	500.0	200.0	V	114.0	-6.3
1689.750000	42.75	---	74.00	31.25	500.0	100.0	H	85.0	-5.9
1876.500000	42.09	---	74.00	31.91	500.0	200.0	H	198.0	-5.0
1977.000000	---	32.32	54.00	21.68	500.0	200.0	V	96.0	-4.6
2025.500000	42.79	---	74.00	31.21	500.0	100.0	H	96.0	-4.3
2927.000000	47.30	---	74.00	26.70	500.0	100.0	H	85.0	-1.1
2982.750000	---	36.16	54.00	17.84	500.0	200.0	V	87.0	-0.7

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11g CH11

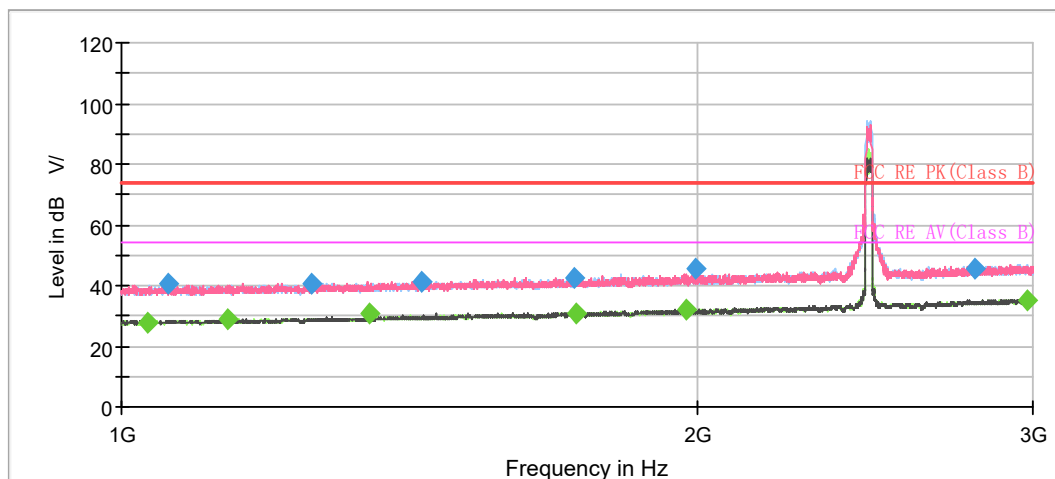

~ PK Level @Spectrum Overview H ~ PK Level @Spectrum Overview V ◆ PK Level @Final Results — PK Limit
~ AVG Level @Spectrum Overview H ~ AVG Level @Spectrum Overview V ◆ AVG Level @Final Results — AVG Limit

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

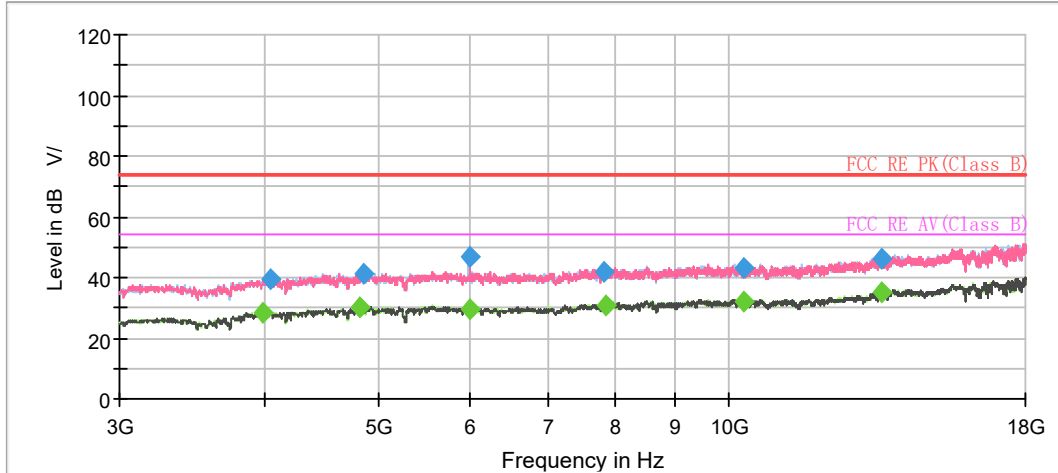

PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Final Results
 PK Limit
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1032.750000	---	27.83	54.00	26.17	500.0	100.0	H	104.0	-9.7
1057.250000	40.38	---	74.00	33.62	500.0	100.0	H	165.0	-9.6
1137.500000	---	29.21	54.00	24.79	500.0	200.0	H	230.0	-9.0
1258.500000	40.32	---	74.00	33.68	500.0	200.0	H	275.0	-8.3
1346.750000	---	30.50	54.00	23.50	500.0	200.0	V	274.0	-7.8
1436.500000	41.46	---	74.00	32.54	500.0	200.0	H	178.0	-7.2
1724.500000	42.72	---	74.00	31.28	500.0	100.0	H	216.0	-5.7
1728.750000	---	31.02	54.00	22.98	500.0	100.0	H	197.0	-5.7
1976.250000	---	32.07	54.00	21.93	500.0	200.0	V	116.0	-4.6
1999.250000	45.38	---	74.00	28.62	500.0	100.0	V	275.0	-4.4
2801.000000	45.73	---	74.00	28.27	500.0	100.0	H	141.0	-1.4
2978.500000	---	35.27	54.00	18.73	500.0	100.0	H	85.0	-0.7

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH1

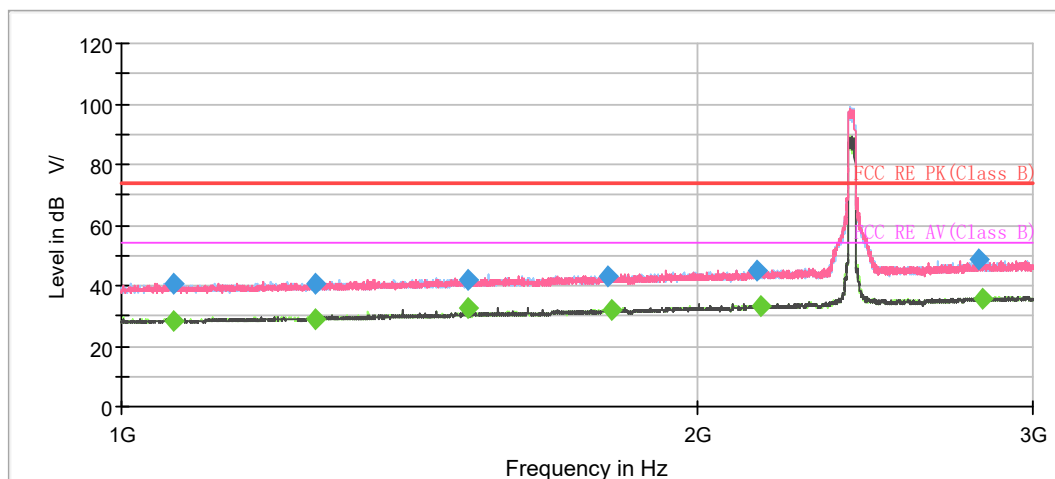

~ PK Level @Spectrum Overview H ~ PK Level @Spectrum Overview V ◆ PK Level @Final Results — PK Limit
~ AVG Level @Spectrum Overview H ~ AVG Level @Spectrum Overview V ◆ AVG Level @Final Results — AVG Limit

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

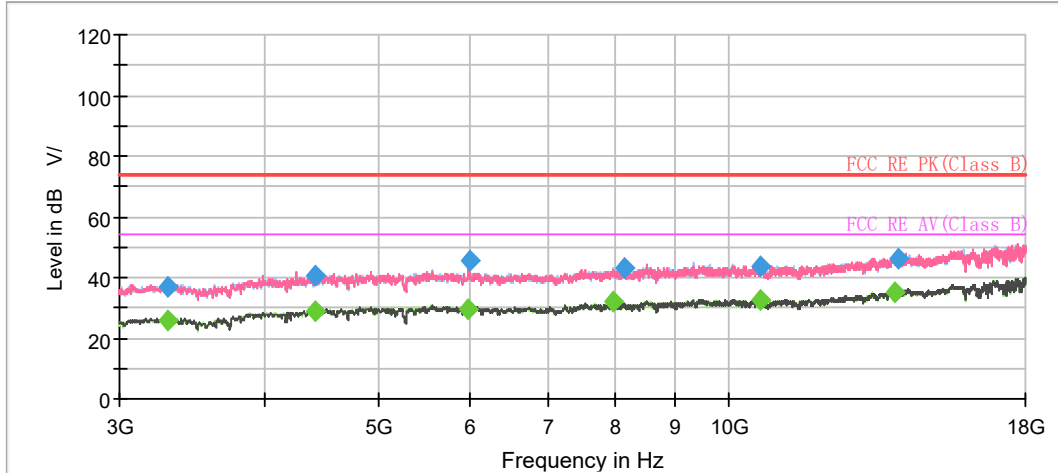

~ PK Level @Spectrum Overview H ~ PK Level @Spectrum Overview V ◆ PK Level @Final Results — PK Limit
~ AVG Level @Spectrum Overview H ~ AVG Level @Spectrum Overview V ◆ AVG Level @Final Results — AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1066.000000	---	28.60	54.00	25.40	500.0	100.0	H	245.0	-9.5
1066.000000	40.63	---	74.00	33.37	500.0	100.0	H	245.0	-9.5
1262.250000	40.67	---	74.00	33.33	500.0	100.0	H	348.0	-8.3
1262.750000	---	29.08	54.00	24.92	500.0	100.0	H	286.0	-8.3
1517.750000	41.60	---	74.00	32.40	500.0	100.0	H	8.0	-6.8
1518.000000	---	32.32	54.00	21.68	500.0	200.0	V	56.0	-6.8
1798.500000	42.86	---	74.00	31.14	500.0	200.0	V	27.0	-5.3
1804.750000	---	32.24	54.00	21.76	500.0	200.0	H	157.0	-5.3
2152.000000	44.95	---	74.00	29.05	500.0	100.0	H	238.0	-3.7
2160.000000	---	33.49	54.00	20.51	500.0	200.0	H	194.0	-3.7
2807.750000	48.45	---	74.00	25.55	500.0	200.0	V	281.0	-1.4
2821.750000	---	35.98	54.00	18.02	500.0	100.0	H	268.0	-1.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH6

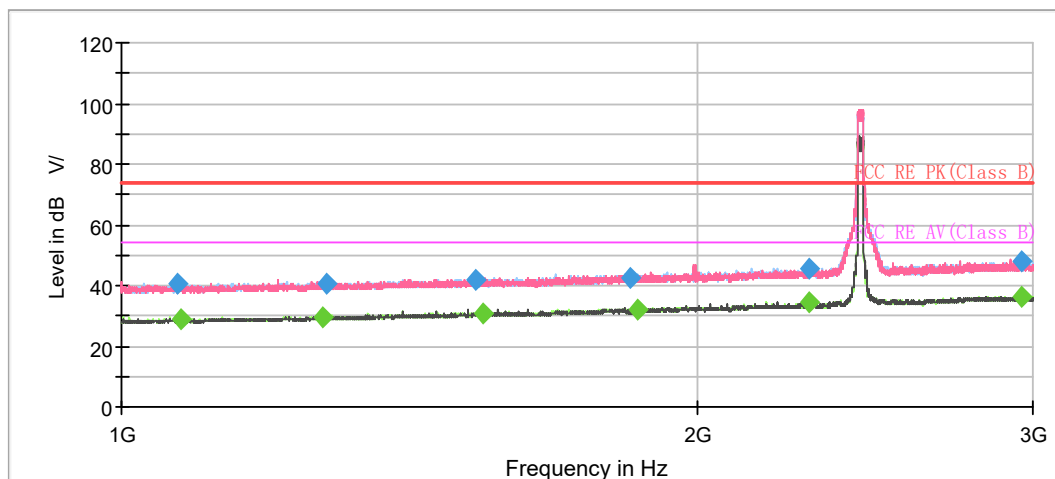

~ PK Level @Spectrum Overview H
 ~ PK Level @Spectrum Overview V
 ◆ PK Level @Final Results
 — PK Limit
~ AVG Level @Spectrum Overview H
 ~ AVG Level @Spectrum Overview V
 ◆ AVG Level @Final Results
 — AVG Limit

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

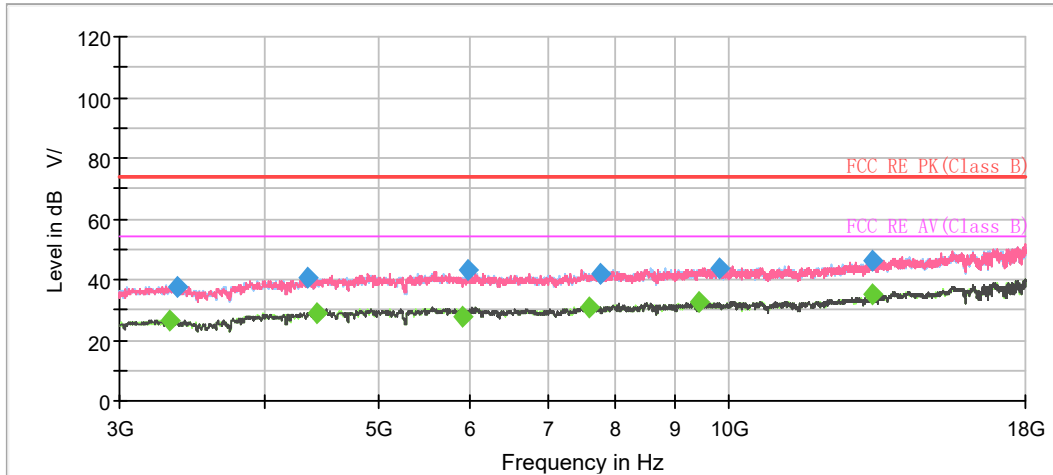

PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Final Results
 PK Limit
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1069.250000	40.78	---	74.00	33.22	500.0	200.0	H	38.0	-9.5
1074.500000	---	28.79	54.00	25.21	500.0	200.0	H	186.0	-9.5
1275.000000	---	29.27	54.00	24.73	500.0	100.0	H	183.0	-8.2
1279.250000	40.91	---	74.00	33.09	500.0	100.0	H	108.0	-8.1
1531.250000	41.73	---	74.00	32.27	500.0	200.0	H	33.0	-6.6
1546.250000	---	30.95	54.00	23.05	500.0	100.0	H	334.0	-6.6
1846.000000	42.40	---	74.00	31.60	500.0	100.0	H	271.0	-5.1
1861.750000	---	32.22	54.00	21.78	500.0	100.0	H	329.0	-5.1
2291.250000	45.83	---	74.00	28.17	500.0	100.0	H	357.0	-3.3
2291.750000	---	34.33	54.00	19.67	500.0	200.0	H	43.0	-3.3
2961.000000	47.84	---	74.00	26.16	500.0	200.0	H	130.0	-0.8
2961.750000	---	36.38	54.00	17.62	500.0	100.0	V	0.0	-0.8

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH11

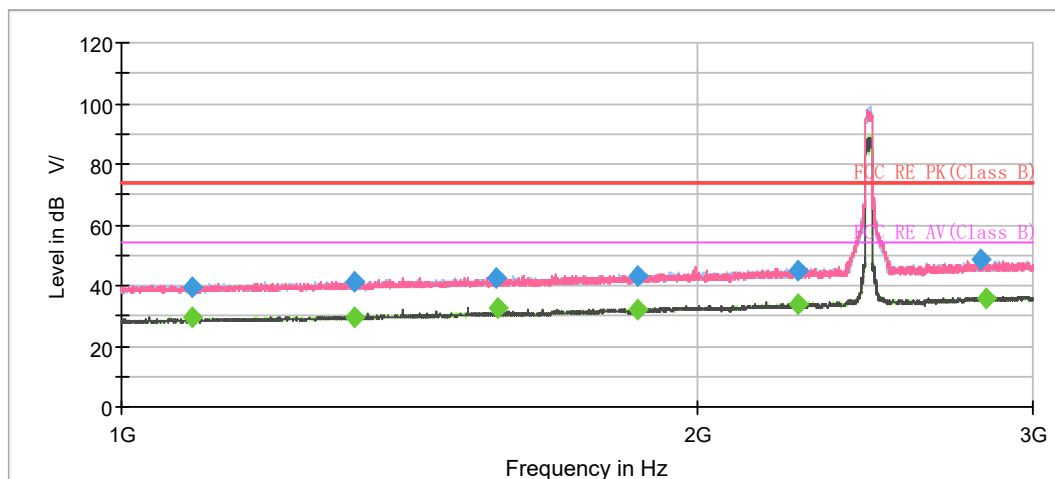

PK Level @Spectrum Overview H PK Level @Spectrum Overview V PK Level @Final Results PK Limit
 AVG Level @Spectrum Overview H AVG Level @Spectrum Overview V AVG Level @Final Results AVG Limit

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

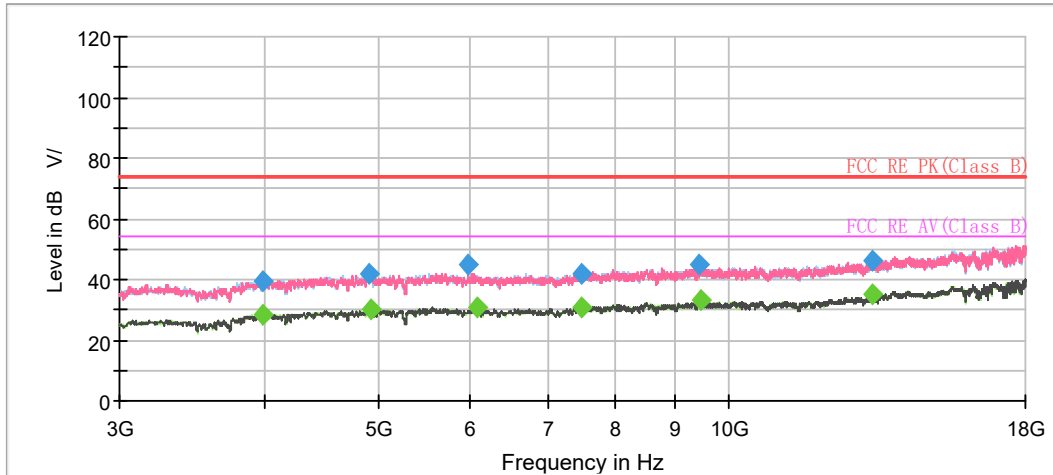

PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Final Results
 PK Limit
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1089.250000	---	29.34	54.00	24.66	500.0	200.0	V	350.0	-9.4
1089.250000	39.69	---	74.00	34.31	500.0	200.0	H	248.0	-9.4
1323.250000	41.30	---	74.00	32.70	500.0	200.0	V	208.0	-7.9
1324.000000	---	29.85	54.00	24.16	500.0	200.0	H	56.0	-7.9
1572.000000	42.28	---	74.00	31.72	500.0	100.0	H	69.0	-6.5
1575.500000	---	32.59	54.00	21.41	500.0	200.0	V	294.0	-6.5
1861.250000	42.91	---	74.00	31.09	500.0	100.0	H	359.0	-5.1
1861.750000	---	32.09	54.00	21.91	500.0	100.0	V	88.0	-5.1
2260.000000	44.97	---	74.00	29.03	500.0	100.0	V	131.0	-3.3
2262.000000	---	33.60	54.00	20.40	500.0	200.0	H	51.0	-3.3
2816.000000	48.53	---	74.00	25.47	500.0	200.0	H	21.0	-1.3
2836.250000	---	35.96	54.00	18.04	500.0	100.0	V	174.0	-1.2

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, 802.11n (HT20) CH6 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

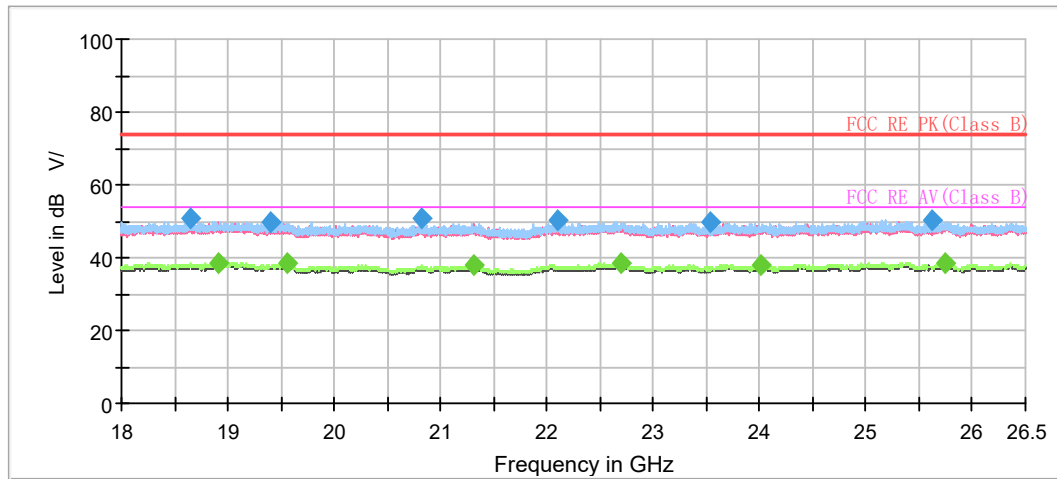

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18647.062500	50.56	---	74.00	23.44	500.0	100.0	H	276.0	-4.5
18912.687500	---	38.67	54.00	15.33	500.0	100.0	H	178.0	-4.3
19398.250000	49.56	---	74.00	24.44	500.0	100.0	H	36.0	-4.6
19560.812500	---	38.31	54.00	15.69	500.0	100.0	H	60.0	-4.8
20813.500000	50.70	---	74.00	23.30	500.0	100.0	H	192.0	-4.3
21313.937500	---	37.93	54.00	16.07	500.0	100.0	H	220.0	-4.1
22105.500000	50.32	---	74.00	23.68	500.0	100.0	H	330.0	-3.4
22695.187500	---	38.41	54.00	15.59	500.0	100.0	H	183.0	-2.9
23544.125000	49.57	---	74.00	24.43	500.0	100.0	H	216.0	-2.7
24012.687500	---	38.16	54.00	15.84	500.0	200.0	V	193.0	-2.5
25625.562500	50.12	---	74.00	23.88	500.0	200.0	H	193.0	-1.5
25748.812500	---	38.66	54.00	15.34	500.0	100.0	H	298.0	-1.3


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

Bluetooth LE

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, Bluetooth LE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means (dB $\mu\text{V/m}$)

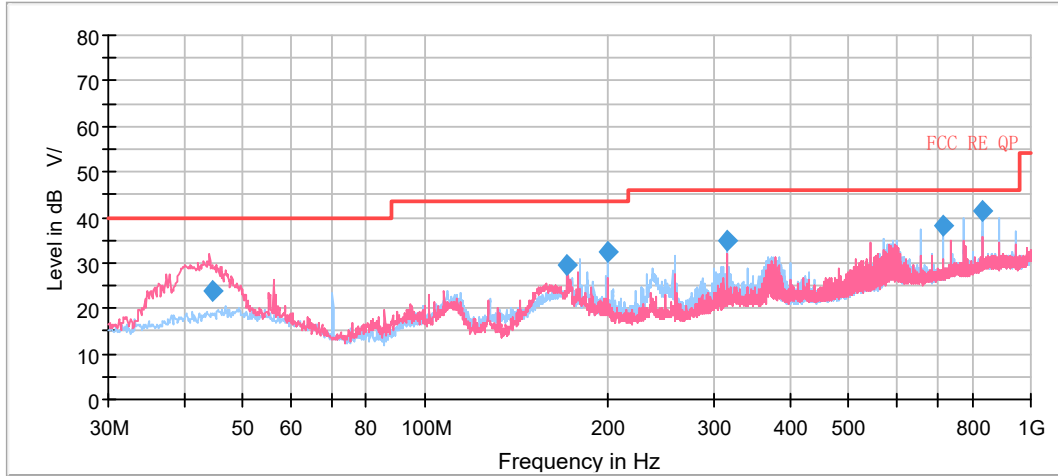



Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB $\mu\text{V/m}$)	Limit (dB $\mu\text{V/m}$)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
44.665000	23.74	40.00	16.26	109.0	V	98.0	20.8
171.862500	29.51	43.50	13.99	116.0	H	285.0	18.1
200.517500	32.47	43.50	11.03	109.0	H	291.0	18.7
315.098750	34.73	46.00	11.27	100.0	H	280.0	21.3
716.153750	38.20	46.00	7.80	100.0	H	136.0	28.0
830.735000	41.50	46.00	4.50	100.0	H	129.0	30.2


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – Quasi-Peak

Bluetooth LE-Channel 0

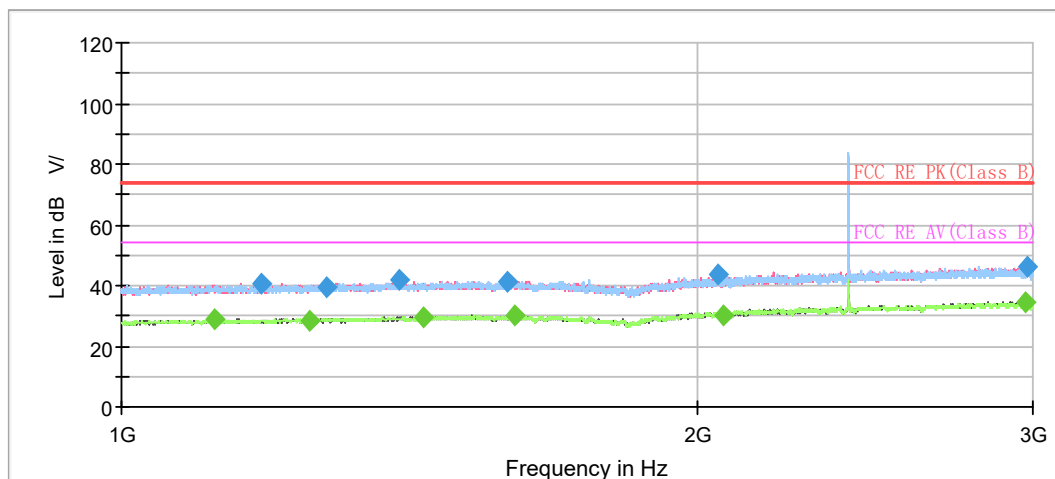

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

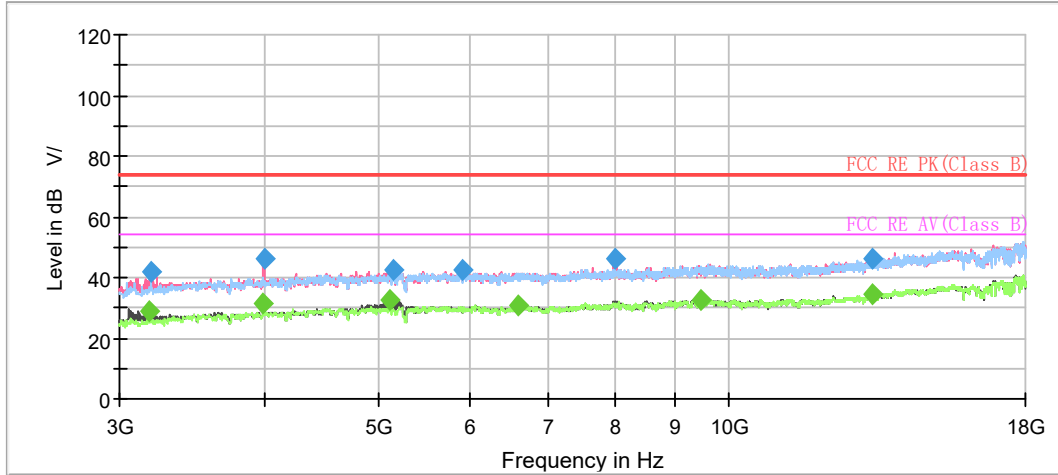

PK Level @Spectrum Overview H PK Level @Spectrum Overview V PK Level @Final Results PK Limit
 AVG Level @Spectrum Overview H AVG Level @Spectrum Overview V AVG Level @Final Results AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1118.500000	---	28.91	54.00	25.09	500.0	100.0	V	286.0	-9.2
1183.250000	40.59	---	74.00	33.41	500.0	200.0	H	326.0	-8.8
1255.000000	---	28.49	54.00	25.51	500.0	100.0	V	11.0	-8.3
1279.250000	39.51	---	74.00	34.49	500.0	100.0	H	18.0	-8.1
1396.500000	41.72	---	74.00	32.28	500.0	100.0	H	102.0	-7.5
1440.250000	---	29.66	54.00	24.34	500.0	200.0	H	167.0	-7.2
1593.250000	41.47	---	74.00	32.53	500.0	100.0	H	247.0	-6.3
1605.000000	---	30.06	54.00	23.94	500.0	200.0	V	65.0	-6.3
2051.250000	43.66	---	74.00	30.34	500.0	100.0	H	0.0	-4.3
2064.500000	---	30.38	54.00	23.62	500.0	100.0	H	141.0	-4.2
2975.000000	---	34.57	54.00	19.43	500.0	200.0	V	202.0	-0.7
2978.000000	46.36	---	74.00	27.64	500.0	200.0	V	29.0	-0.7

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

Bluetooth LE-Channel 19

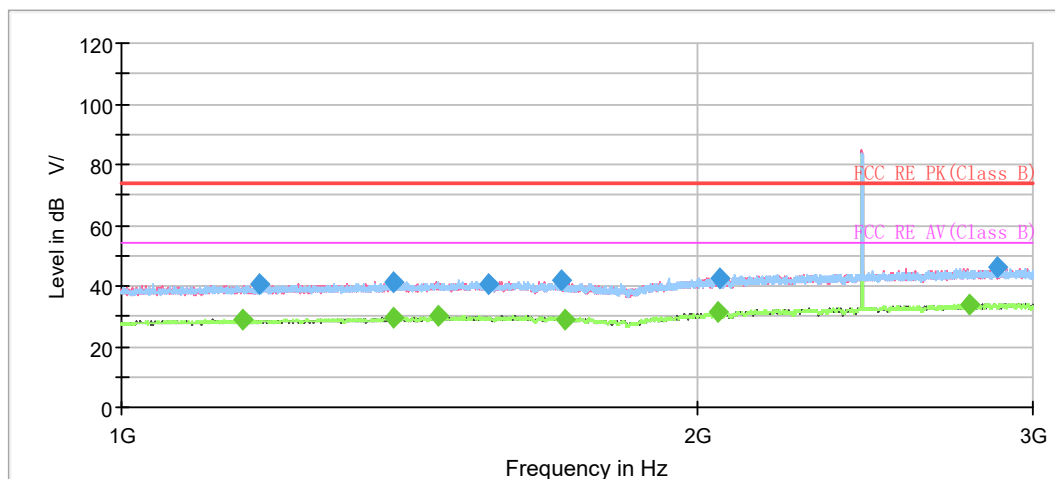

PK Level @Spectrum Overview H PK Level @Spectrum Overview V PK Level @Final Results PK Limit
 AVG Level @Spectrum Overview H AVG Level @Spectrum Overview V AVG Level @Final Results AVG Limit

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

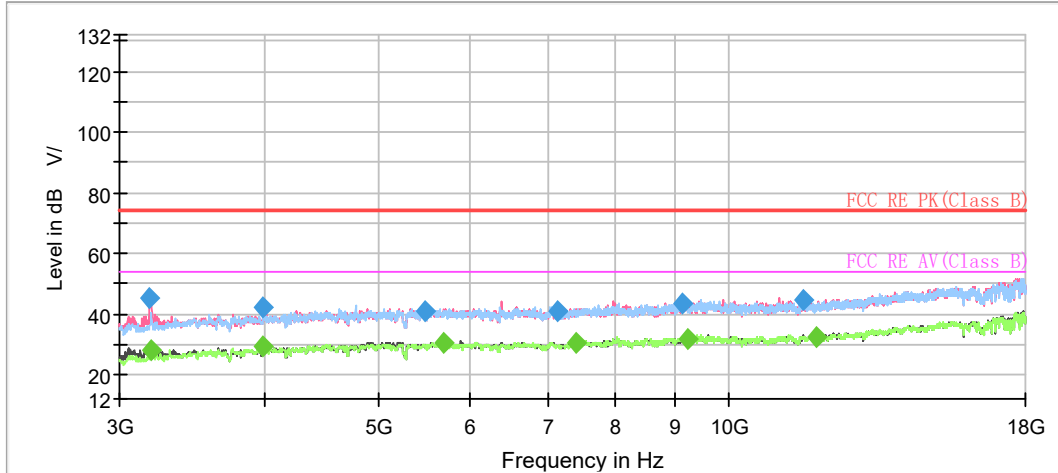

PK Level @Spectrum Overview H PK Level @Spectrum Overview V PK Level @Final Results PK Limit
 AVG Level @Spectrum Overview H AVG Level @Spectrum Overview V AVG Level @Final Results AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1158.000000	---	29.18	54.00	24.82	500.0	200.0	V	26.0	-8.9
1182.000000	40.76	---	74.00	33.24	500.0	100.0	H	60.0	-8.8
1387.500000	---	29.74	54.00	24.26	500.0	100.0	H	65.0	-7.5
1388.000000	41.41	---	74.00	32.59	500.0	100.0	H	311.0	-7.5
1464.750000	---	30.15	54.00	23.85	500.0	200.0	V	355.0	-7.0
1558.250000	40.58	---	74.00	33.42	500.0	200.0	V	251.0	-6.5
1701.000000	41.70	---	74.00	32.30	500.0	100.0	H	37.0	-5.9
1706.250000	---	28.73	54.00	25.27	500.0	100.0	V	297.0	-5.9
2052.250000	---	31.09	54.00	22.91	500.0	100.0	H	78.0	-4.3
2056.250000	42.52	---	74.00	31.48	500.0	200.0	H	253.0	-4.2
2780.250000	---	34.03	54.00	19.97	500.0	100.0	V	253.0	-1.5
2871.500000	46.27	---	74.00	27.73	500.0	200.0	H	234.0	-1.1

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit –MAX Peak/ Average

Bluetooth LE-Channel 39

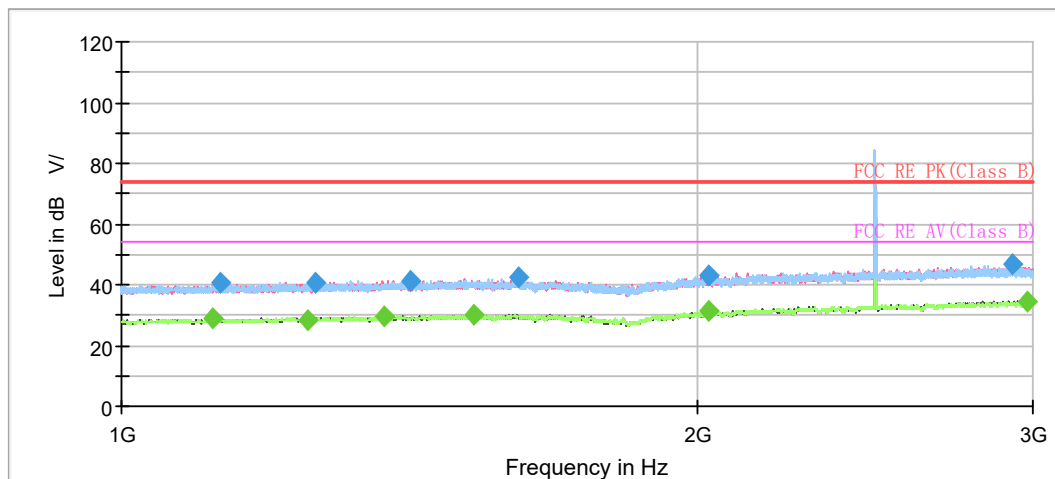

~ PK Level @Spectrum Overview H ~ PK Level @Spectrum Overview V ◆ PK Level @Final Results — PK Limit
~ AVG Level @Spectrum Overview H ~ AVG Level @Spectrum Overview V ◆ AVG Level @Final Results — AVG Limit

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

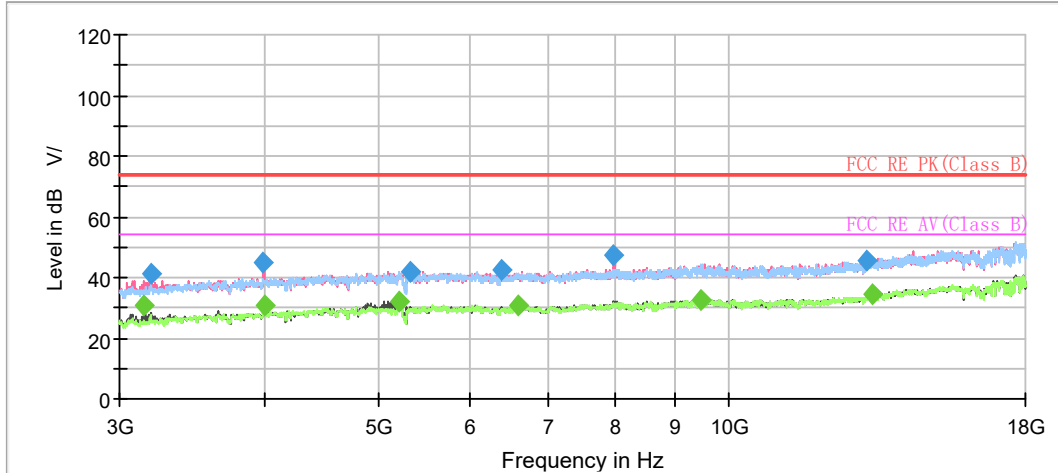

PK Level @Spectrum Overview H
 PK Level @Spectrum Overview V
 PK Level @Final Results
 PK Limit
 AVG Level @Spectrum Overview H
 AVG Level @Spectrum Overview V
 AVG Level @Final Results
 AVG Limit


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1116.750000	---	28.93	54.00	25.07	500.0	100.0	H	212.0	-9.2
1126.750000	40.43	---	74.00	33.57	500.0	200.0	H	183.0	-9.1
1252.500000	---	28.07	54.00	25.93	500.0	100.0	V	259.0	-8.3
1262.500000	40.53	---	74.00	33.47	500.0	200.0	V	1.0	-8.3
1373.750000	---	29.63	54.00	24.37	500.0	200.0	H	206.0	-7.6
1417.000000	41.27	---	74.00	32.73	500.0	100.0	V	190.0	-7.3
1530.250000	---	30.22	54.00	23.78	500.0	200.0	H	100.0	-6.6
1614.500000	42.15	---	74.00	31.85	500.0	100.0	H	58.0	-6.3
2031.250000	---	31.18	54.00	22.82	500.0	200.0	H	336.0	-4.3
2031.500000	42.93	---	74.00	31.07	500.0	200.0	V	200.0	-4.3
2929.750000	46.52	---	74.00	27.48	500.0	100.0	V	282.0	-1.1
2977.500000	---	34.73	54.00	19.27	500.0	200.0	V	43.0	-0.7

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, Bluetooth LE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

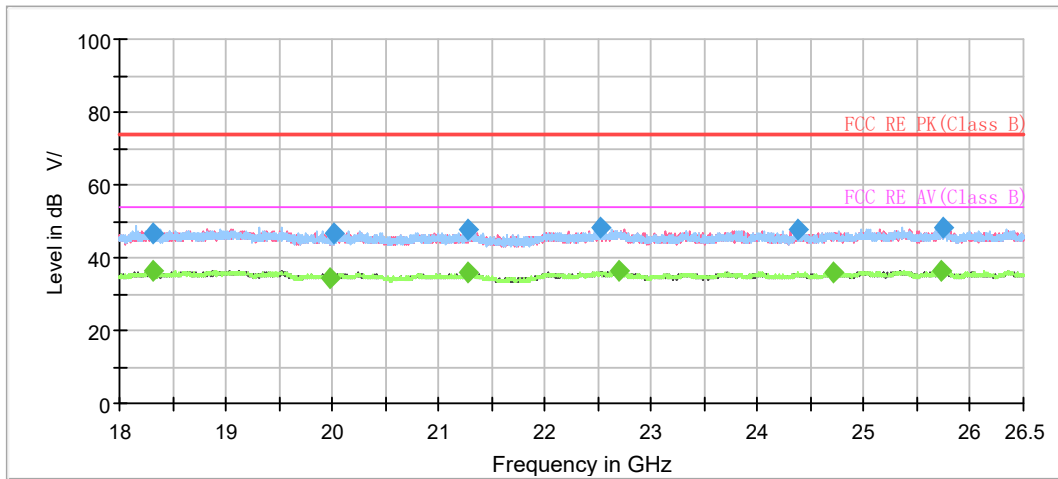

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18308.125000	46.66	---	74.00	27.34	500.0	100.0	V	66.0	-4.6
18312.375000	---	36.16	54.00	17.84	500.0	200.0	H	134.0	-4.6
19981.562500	---	34.61	54.00	19.39	500.0	100.0	V	85.0	-4.7
20016.625000	46.52	---	74.00	27.48	500.0	100.0	H	148.0	-4.6
21269.312500	47.61	---	74.00	26.39	500.0	200.0	H	23.0	-4.1
21284.187500	---	35.93	54.00	18.07	500.0	200.0	H	167.0	-4.1
22522.000000	48.13	---	74.00	25.87	500.0	100.0	V	33.0	-3.0
22692.000000	---	36.19	54.00	17.81	500.0	100.0	V	182.0	-2.9
24371.812500	47.44	---	74.00	26.56	500.0	200.0	H	55.0	-2.3
24706.500000	---	35.87	54.00	18.13	500.0	100.0	V	139.0	-2.2
25722.250000	---	36.47	54.00	17.53	500.0	200.0	H	134.0	-1.3
25743.500000	48.10	---	74.00	25.90	500.0	100.0	V	131.0	-1.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

5.2. Conducted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

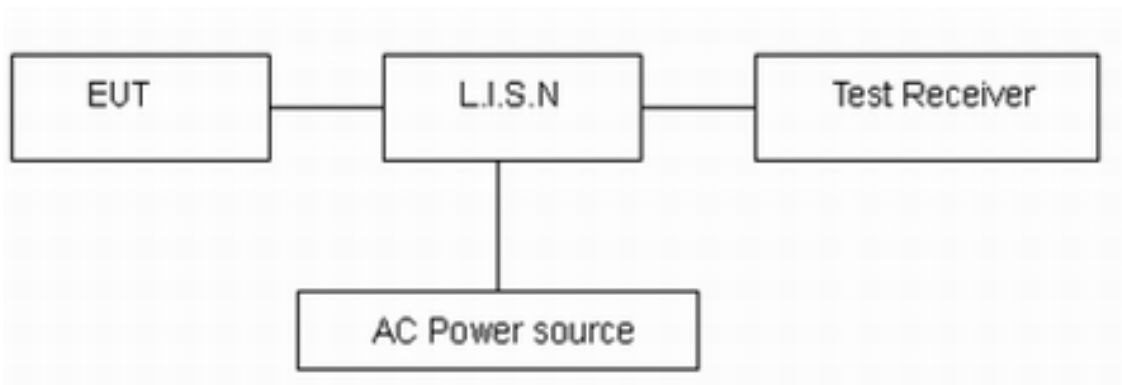

Note: AC Power source is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection.

Wi-Fi 2.4G


During the test, the Conducted Emission was performed in all modes with all channels, 802.11n (HT20) CH6 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

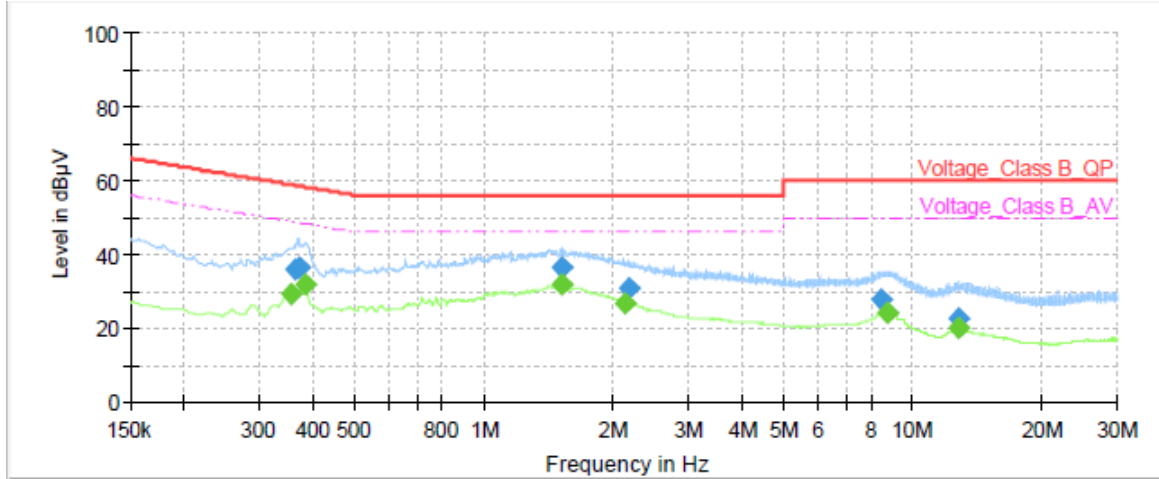

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.35	---	29.40	48.85	19.45	1000.0	9.000	L1	ON	21.0
0.36	35.66	---	58.69	23.03	1000.0	9.000	L1	ON	21.0
0.37	36.23	---	58.49	22.26	1000.0	9.000	L1	ON	21.0
0.38	---	31.93	48.24	16.31	1000.0	9.000	L1	ON	21.0
1.51	36.17	---	56.00	19.83	1000.0	9.000	L1	ON	19.9
1.52	---	31.81	46.00	14.19	1000.0	9.000	L1	ON	19.9
2.12	---	26.84	46.00	19.16	1000.0	9.000	L1	ON	19.7
2.19	30.88	---	56.00	25.12	1000.0	9.000	L1	ON	19.7
8.44	27.54	---	60.00	32.46	1000.0	9.000	L1	ON	19.5
8.74	---	24.20	50.00	25.80	1000.0	9.000	L1	ON	19.5
12.78	22.77	---	60.00	37.23	1000.0	9.000	L1	ON	19.6
12.83	---	19.76	50.00	30.24	1000.0	9.000	L1	ON	19.6

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 kHz to 30 MHz

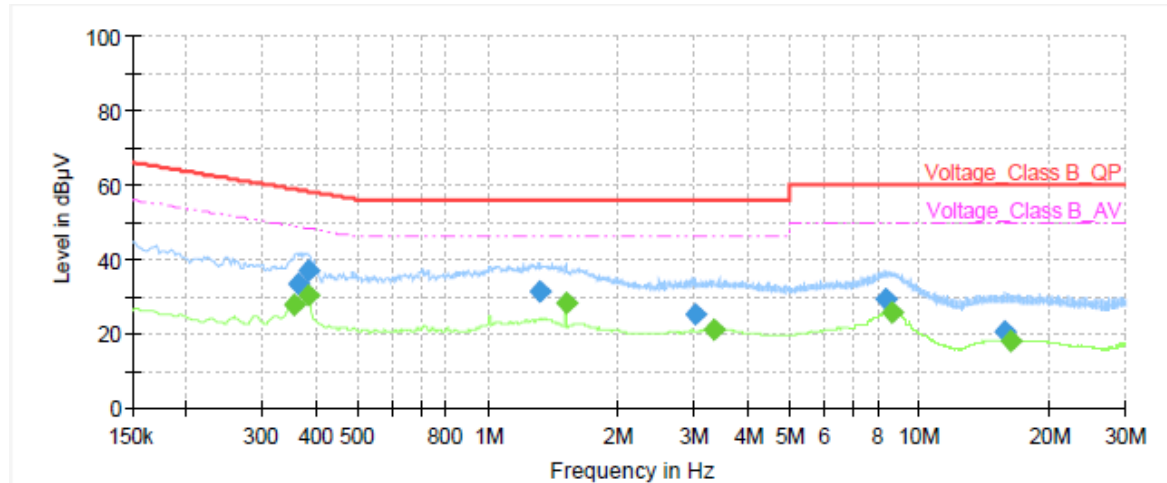


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.36	---	27.58	48.80	21.22	1000.0	9.000	N	ON	21.0
0.36	33.47	---	58.69	25.22	1000.0	9.000	N	ON	21.0
0.38	---	30.14	48.24	18.10	1000.0	9.000	N	ON	21.0
0.38	36.85	---	58.24	21.39	1000.0	9.000	N	ON	21.0
1.31	31.41	---	56.00	24.59	1000.0	9.000	N	ON	20.0
1.52	---	28.40	46.00	17.60	1000.0	9.000	N	ON	19.9
3.04	25.05	---	56.00	30.95	1000.0	9.000	N	ON	19.6
3.32	---	21.11	46.00	24.89	1000.0	9.000	N	ON	19.5
8.34	29.46	---	60.00	30.54	1000.0	9.000	N	ON	19.5
8.64	---	25.85	50.00	24.15	1000.0	9.000	N	ON	19.5
15.72	20.63	---	60.00	39.37	1000.0	9.000	N	ON	19.7
16.19	---	18.17	50.00	31.83	1000.0	9.000	N	ON	19.7

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 kHz to 30 MHz

Bluetooth LE


During the test, the Conducted Emission was performed in all modes with all channels, Bluetooth LE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

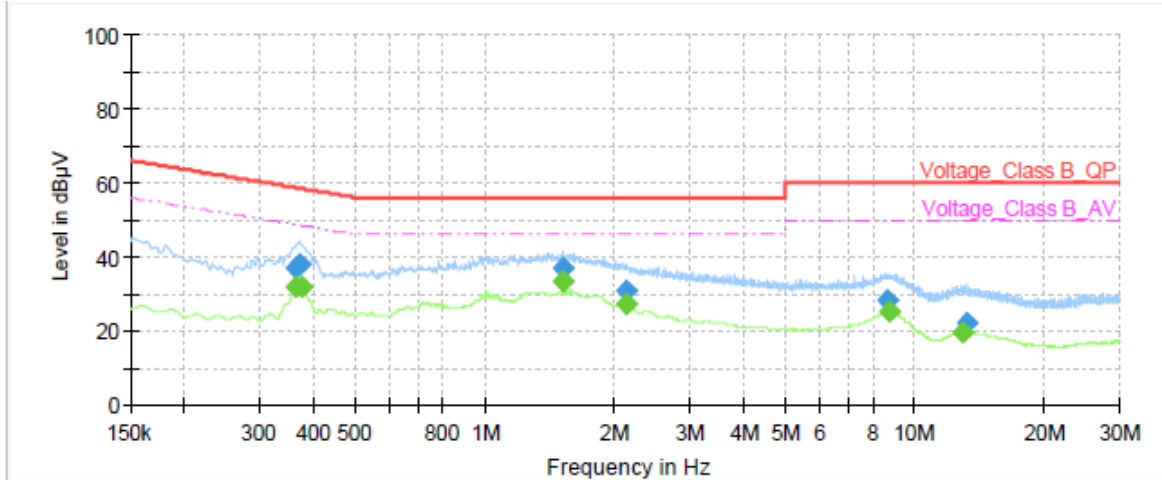

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.36	---	31.78	48.69	16.91	1000.0	9.000	L1	ON	21.0
0.36	37.02	---	58.69	21.67	1000.0	9.000	L1	ON	21.0
0.37	37.73	---	58.49	20.76	1000.0	9.000	L1	ON	21.0
0.38	---	31.67	48.34	16.67	1000.0	9.000	L1	ON	21.0
1.52	37.00	---	56.00	19.00	1000.0	9.000	L1	ON	19.9
1.52	---	33.11	46.00	12.89	1000.0	9.000	L1	ON	19.9
2.13	---	27.03	46.00	18.97	1000.0	9.000	L1	ON	19.7
2.14	30.95	---	56.00	25.05	1000.0	9.000	L1	ON	19.7
8.63	28.39	---	60.00	31.61	1000.0	9.000	L1	ON	19.5
8.73	---	25.06	50.00	24.94	1000.0	9.000	L1	ON	19.5
13.00	---	19.52	50.00	30.48	1000.0	9.000	L1	ON	19.6
13.28	22.15	---	60.00	37.85	1000.0	9.000	L1	ON	19.6

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

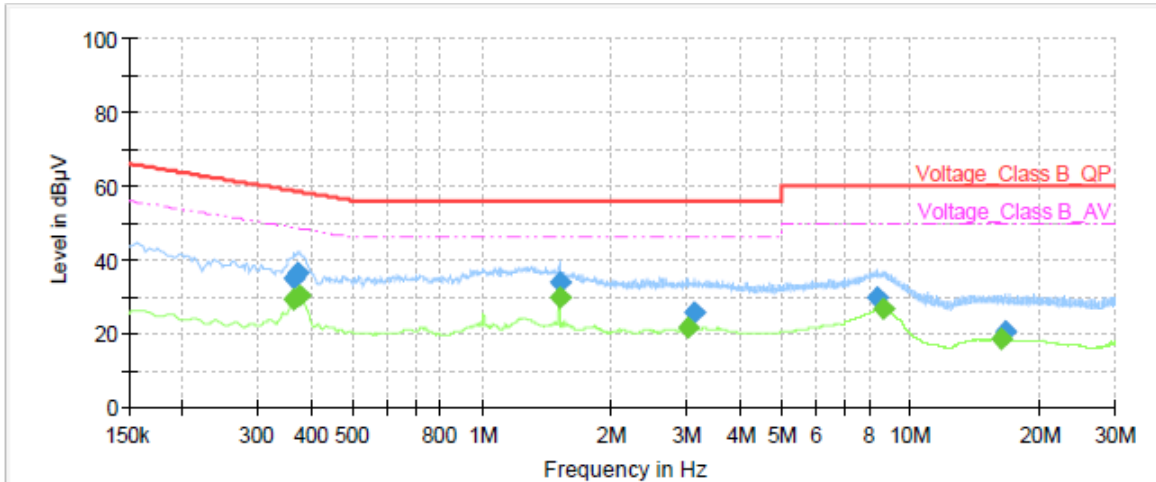

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.36	---	29.13	48.69	19.56	1000.0	9.000	N	ON	21.0
0.36	35.02	---	58.69	23.67	1000.0	9.000	N	ON	21.0
0.37	36.59	---	58.44	21.85	1000.0	9.000	N	ON	21.0
0.38	---	30.49	48.34	17.85	1000.0	9.000	N	ON	21.0
1.51	33.95	---	56.00	22.05	1000.0	9.000	N	ON	19.9
1.52	---	29.69	46.00	16.31	1000.0	9.000	N	ON	19.9
3.03	---	21.56	46.00	24.44	1000.0	9.000	N	ON	19.6
3.14	25.50	---	56.00	30.50	1000.0	9.000	N	ON	19.5
8.37	29.85	---	60.00	30.15	1000.0	9.000	N	ON	19.5
8.60	---	26.51	50.00	23.49	1000.0	9.000	N	ON	19.5
16.28	---	18.33	50.00	31.67	1000.0	9.000	N	ON	19.7
16.59	20.59	---	60.00	39.41	1000.0	9.000	N	ON	19.7

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Unwanted Emissions					
EMI Test Receiver	R&S	ESCI3	100948	2024-05-07	2025-05-06
Signal Analyzer	R&S	FSV40	101186	2024-05-07	2025-05-06
EMI Test Receiver	R&S	ESR	102720	2024-05-07	2025-05-06
EMI Test Receiver	R&S	ESR	102721	2024-05-07	2025-05-06
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01111	2022-10-25	2025-10-24
Horn Antenna	R&S	BBHA9120 D	02728	2023-09-19	2026-09-18
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01614	2023-09-13	2026-09-12
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01615	2023-10-19	2026-10-18
Software	R&S	EMC32	9.26.01	/	/
Software	R&S	ELEKTRA	5.00.2	/	/
Conducted Emissions					
Artificial main network	R&S	ENV216	102191	2022-12-10	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2024-05-07	2025-05-06
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****