

47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

VP6325

MODEL NUMBER: VP6325

REPORT NUMBER: 04776400-1-RF-1

FCC ID: WQJ-VP632X

ISED: 9847A-VP632X

ISSUE DATE: Aug. 31, 2026

Prepared for

ID TECH

10721 Walker Street, Cypress, California 90630

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd., Song Shan Lake Branch
Room 101, Building 2, No. 4, Information Road, Songshan Lake, Dongguan, Guangdong,
China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	Aug. 31, 2026	Initial Issue	\

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	Transmitter 99% Emission Bandwidth / 20dB Bandwidth	Part 15.215 (c)	PASS
2	Transmitter Frequency Stability (Temperature & Voltage Variation)	CFR 47 §15.225(e)	PASS
3	Fundamental Field Strength	CFR 47 §15.225(a)(b)(c)(d)	PASS
4	Radiated Emissions	CFR 47 FCC§15.209(a) CFR 47 FCC§15.225(d)	PASS
5	Band Edge Radiated Emissions	CFR 47 §15.209(a) CFR 47 §15.225(c)(d)	PASS
6	Conducted Emission Test for AC Power Port	CFR 47 §15.207	PASS
7	Antenna Requirement	CFR 47 §15.203	PASS
Note: 1. All items are performed according to ANSI C63.10-2020 (Incl. C63.10 COR 1-2023, ANSI C63.10a-2024 & Errata to ANSI C63.10a-2024). 2. This test report is only published to and used by the applicant, and it is not for evidence purpose in China. 3. The measurement result for the sample received is <Pass> according to <CFR 47 PART 15 SUBPART C> when <Simple Acceptance> decision rule is applied.			

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION.....	7
4.2. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT.....	8
5.2. MAXIMUM FIELD STRENGTH	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. TEST ENVIRONMENT.....	9
5.5. DESCRIPTION OF TEST SETUP	10
6. MEASURING INSTRUMENT AND SOFTWARE USED.....	11
7. ANTENNA PORT TEST RESULTS	12
7.1. 99% & 20dB BANDWIDTH.....	12
7.2. TRANSMITTER FREQUENCY STABILITY.....	14
8. RADIATED EMISSION TEST RESULTS	16
8.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS.....	22
8.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30MHz	23
8.3. SPURIOUS EMISSIONS BELOW 30MHz.....	25
9. AC POWER LINE CONDUCTED EMISSIONS	28
10. ANTENNA REQUIREMENTS.....	34
END OF REPORT	34

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: ID TECH
Address: 10721 Walker Street, Cypress, California 90630

Manufacturer Information


Company Name: ID TECH
Address: 10721 Walker Street, Cypress, California 90630

EUT Information

EUT Name: VP6325
Model: VP6325
Series Model: See section 5.1
Model Difference: See section 5.1
Brand: \
Sample Received Date: June 22, 2026
Sample Status: Normal
Sample ID: 9894640-2
Date of Tested: June 25, 2026 to September 2, 2026


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:



James Qin
Project Engineer

Checked By:



Kebo Zhang
Operations Leader

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, CFR 47 Part 2, CFR 47 Part 15, ANSI C63.10-2020 (Incl. C63.10 COR 1-2023, ANSI C63.10a-2024 & Errata to ANSI C63.10a-2024).

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been assessed and proved to be in compliance with VCCI, the membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	--

Note:

1. All measurement facilities that used to collect the measurement data are located at Room 101, Building 2, No. 4, Information Road, Songshan Lake, Dongguan, Guangdong, China.
2. The anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field site (OFS), the anechoic chamber is proved to be equivalent to the worst case from the open field site (OFS).
3. Radiation measurements below 30 MHz have been performed in anechoic chamber, the measurement result is compared to the result that obtained on an open field site (OFS) and have been correlated to measurements result collected on an open field site (OFS).

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiation Emission test (include Fundamental emission) (9KHz-30MHz)	4.36 dB
Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	4.47 dB
Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	5.65 dB (1 GHz ~ 18 GHz)
	4.73 dB (18 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

Remark: For Radiated Emission measurements (200 MHz - 18 GHz), the EUT support table is made of Expanded Polystyrene (EPS). This material is characterized by a low dielectric constant, as recognized in CISPR 16-1-4, to minimize its influence on field strength measurements. This influence has been considered in the uncertainty budget.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name:	VP6325					
Model:	VP6325					
Series Model:	VP6328, VP6328C					
Model Difference:	Mode Name	ICC	MSR	SAM	Others	
	VP6325 (IDVV-6372D, IDVV-6372 These two models just have difference key)	YES	YES	YES	All the same	
	VP6325 (IDVV-6370D, IDVV-6370 These two models just have difference key)	YES	YES	NO		
	VP6328(IDVV-6272D, IDVV-6272 These two models just have difference key)	NO	YES	YES		
	VP6328(IDVV-6270D, IDVV-6270 These two models just have difference key)	NO	YES	NO		
	VP6328C(IDVV-6172D, IDVV-6172 These two models just have difference key)	NO	NO	YES		
	The key is a software key which is related to the transaction.					
Frequency	13.56 MHz					
Normal Test Voltage	AC 120V 60Hz					

5.2. MAXIMUM FIELD STRENGTH

Frequency (MHz)	Max Peak field strength @30m (dBμV/m)
13.56	29.70

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
13.56	Coil antenna	0

5.4. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	45 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	-30 ~ 50°C
Voltage:	VL	AC 102 V
	VN	AC 120 V
	VH	AC 138 V

Note:

1. VL= Lower Extreme Test Voltage
2. VN= Nominal Voltage
3. VH= Upper Extreme Test Voltage
4. TN= Normal Temperature

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
/	Laptop	LENOVO	ThinkPad T14 Gen1	UL Support


I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/

ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	AC/DC SWITCHING ADAPTOR	MW	NGE12U09-P1J	INPUT: 100-240VAC, 50/60Hz, 0.5-0.25A OUTPUT: 9.0V $\pm$ 1.33A, 12W MAX.
2	RS232 To USB-A cable	/	/	1.02m
3	Eval cable socket	/	/	1.0m

SETUP DIAGRAM FOR TESTS

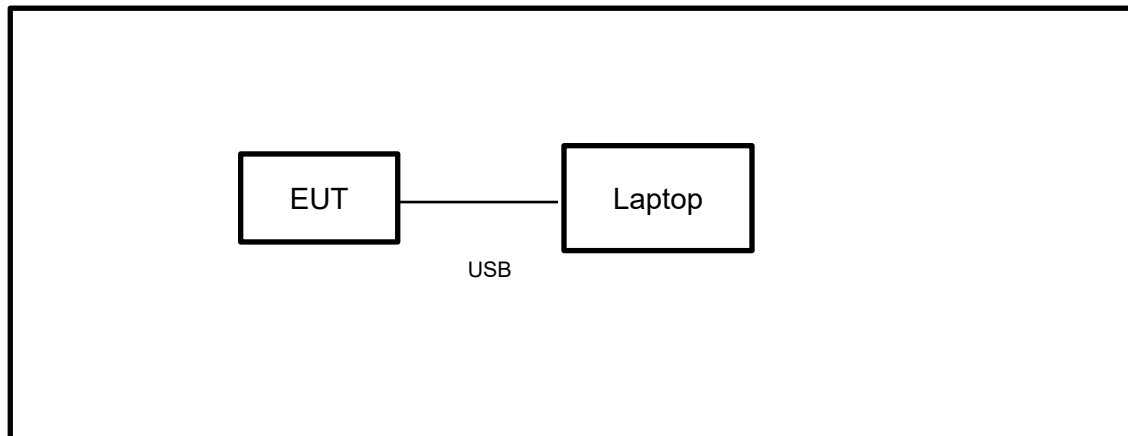

Note:

- Test was performed with tag and without tag, but only the worst case data (with tag) was recorded in the report.
- NFC support both ISO /IEC 14443A and ISO /IEC 14443B. All lowest and highest data rates as per the standards are supported - 106 kbps, 212 kbps, 424 kbps and 848 kbps, all the modes had been tested, but only the worst data (ISO 14443A 106 kbps) was recorded in the report.

6. MEASURING INSTRUMENT AND SOFTWARE USED

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.12, 2025	Sep.11, 2026
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1
Other instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. 99% & 20dB BANDWIDTH

LIMITS

Section	Test Item	Limit
ANSI C63.10 Section 6.9.2	20dB% Bandwidth	For reporting purposes only.
/	99 % Occupied Bandwidth	For reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1 kHz. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

The type of band for the signal is narrowband.

TEST SETUP




TEST ENVIRONMENT

Temperature	23.4 °C	Relative Humidity	59 %
Atmosphere Pressure	101 kPa	Test Voltage	120V~, 60HZ

RESULTS

Frequency (MHz)	99% Occupied Bandwidth (kHz)	20dB bandwidth (kHz)
13.56	2.287	2.695

99%&20dB bandwidth

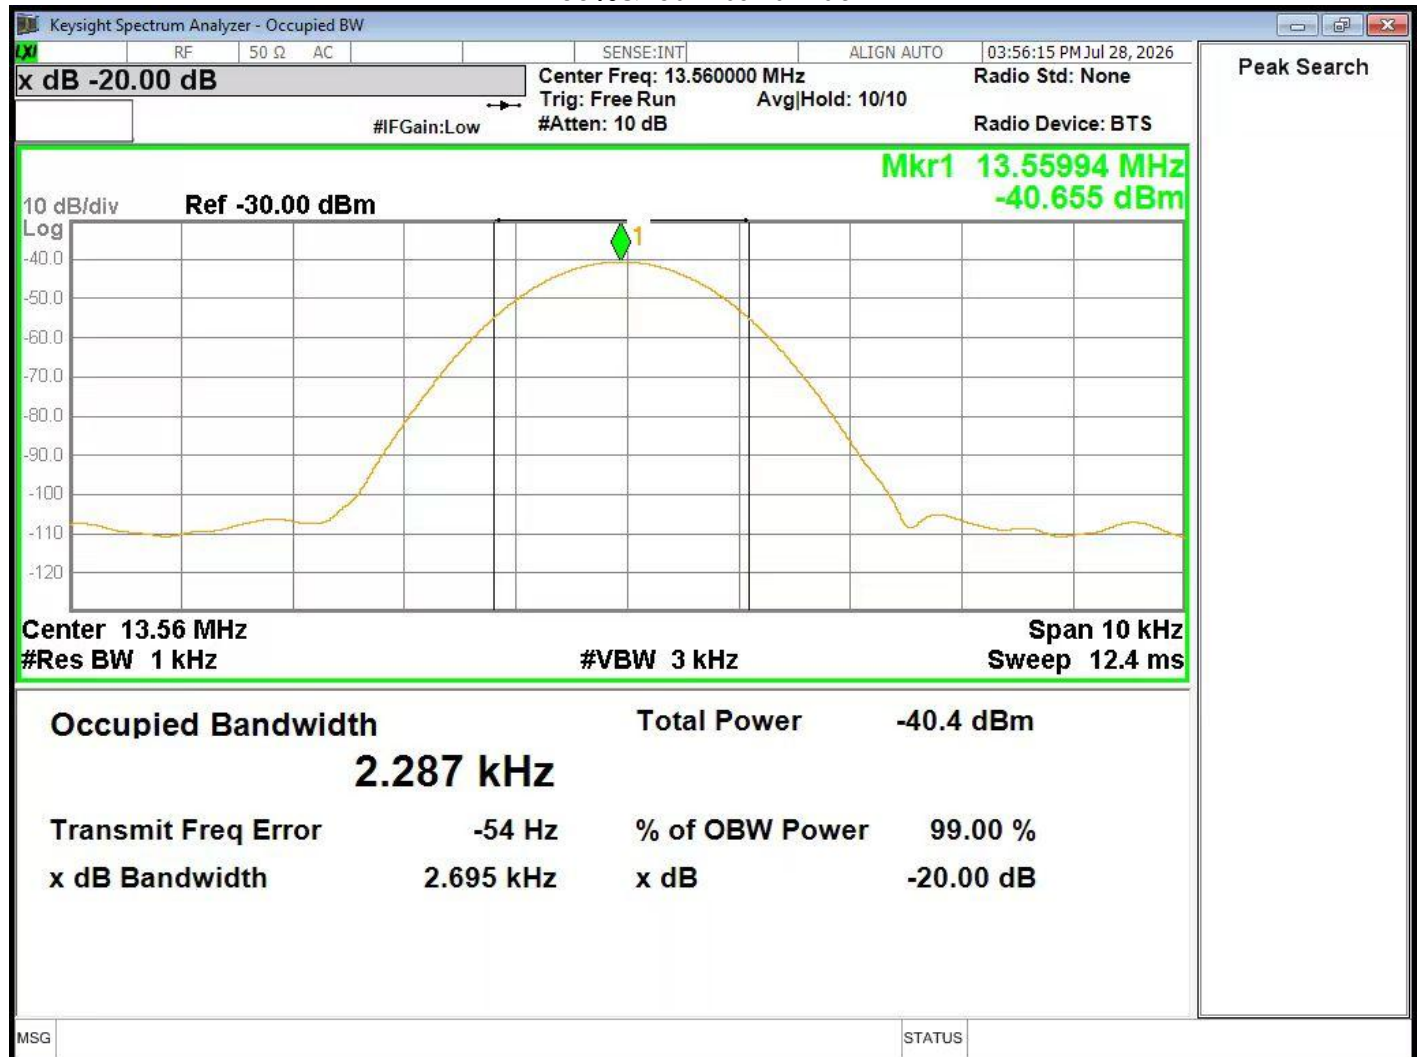

7.2. TRANSMITTER FREQUENCY STABILITY

LIMITS

CFR 47 §15.225(e)

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.


TEST SETUP AND PROCEDURE

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	10KHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculate the frequency drift.

TEST SETUP

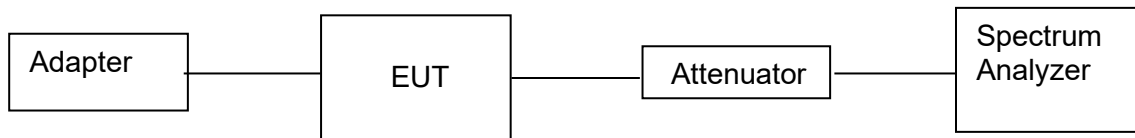

Note: The manufacturer claims that the normal operating voltage range of the battery is 7.4 ~ 10 Vdc, the sample will not work properly beyond this range.

TEST RESULTS

Maximum frequency error of the EUT with variations in ambient temperature.

Temperature (°C)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
-20	13.5592	13.5607	13.5602	13.5601
-10	13.5602	13.5607	13.5610	13.5601
0	13.5603	13.5607	13.5608	13.5607
10	13.5597	13.5601	13.5600	13.5594
20	13.5598	13.5607	13.5593	13.5595
30	13.5598	13.5593	13.5595	13.5602
40	13.5590	13.5595	13.5607	13.5609
50	13.5599	13.5607	13.5595	13.5609
Maximum frequency error	0.0025%	0.0053%	0.0072%	0.0066%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass

Maximum frequency error of the EUT with declared battery operation voltage at a temperature of 20 degrees.

Supply Voltage by Battery	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
7.4 Vdc	13.5607	13.5591	13.5603	13.5592
8.7 Vdc	13.5600	13.5592	13.5591	13.5593
10 Vdc	13.5598	13.5603	13.5602	13.5605
Maximum frequency error	0.0050%	0.0021%	0.0021%	0.0037%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass

Maximum frequency error of the EUT with 85% to 115% of the rated supply voltage at a temperature of 20 degrees.

Supply Voltage by adapter	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
138 Vac, 60Hz	13.5600	13.5604	13.5599	13.5595
120 Vac, 60Hz	13.5600	13.5603	13.5602	13.5608
102 Vac, 60Hz	13.5596	13.5603	13.5599	13.5602
Maximum frequency error	0.0003%	0.0029%	0.0015%	0.0058%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass

8. RADIATED EMISSION TEST RESULTS

LIMITS

Fundamental field strength

FCC Reference:	Part 15.225(a)(b)(c)(d) & 15.209(a)
Test Method Used:	ANSI C63.10-2020 (Incl. C63.10 COR 1-2023, ANSI C63.10a-2024 & Errata to ANSI C63.10a-2024) Sections 6.3, 6.4 and 6.5

Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measured Distance (Meters)
13.553-13.567	15848	84	30
13.410-13.553/13.567-13.710	334	50.47	30
13.110-13.410/13.710-14.010	106	40.51	30

Note:

1. The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.
2. The limit is specified at a test distance of 30 meters. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).

Radiation Disturbance Test Limit for FCC (Class B) (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30MHz.

Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.


²Above 38.6c

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

TEST SETUP AND PROCEDURE

Below 30 MHz

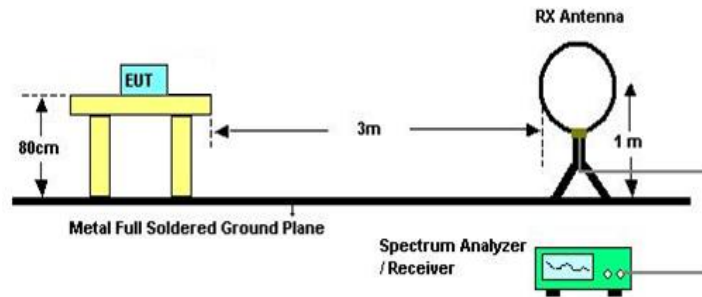


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 (Incl. C63.10 COR 1-2023, ANSI C63.10a-2024 & Errata to ANSI C63.10a-2024) clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ω ; For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1G

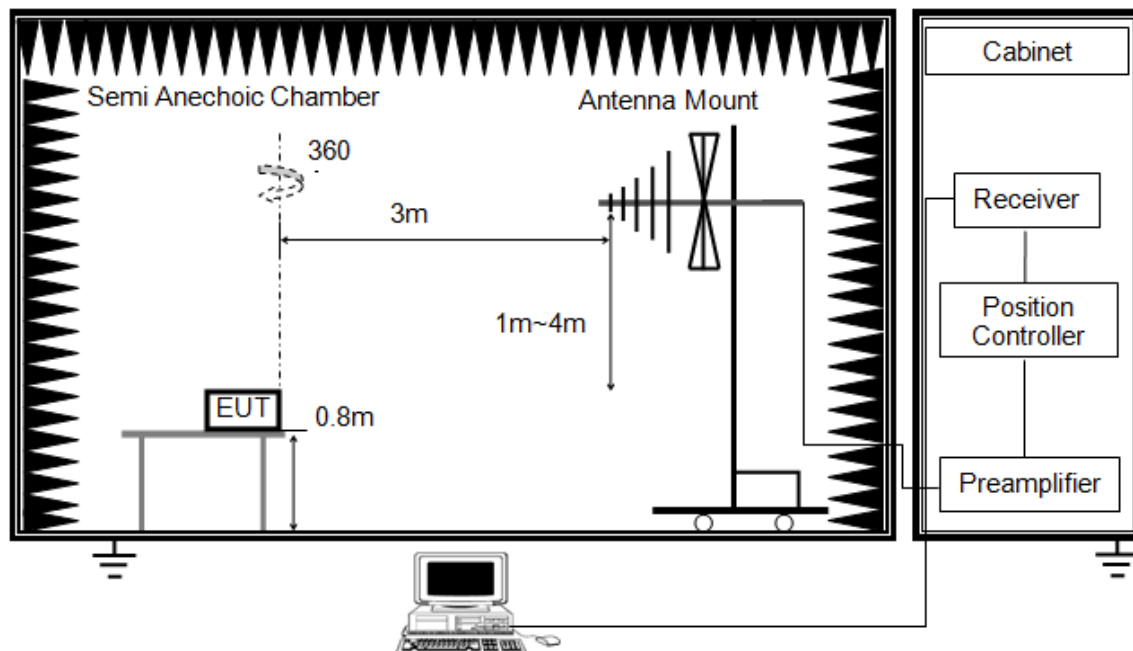


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 (Incl. C63.10 COR 1-2023, ANSI C63.10a-2024 & Errata to ANSI C63.10a-2024) clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
7. The initial step of collecting radiated emission data is to set a spectrum analyzer peak detector mode, pre-scanning the measurement frequency range. Significant peaks then be marked and each peak mark is checked to be highest by slowing down the sweep time, rotated speed of turntable and lifting speed of receive antenna, then switch to receiver mode to read QP value for the marker whose margin is less than 3dB.

X axis, Y axis, Z axis positions:

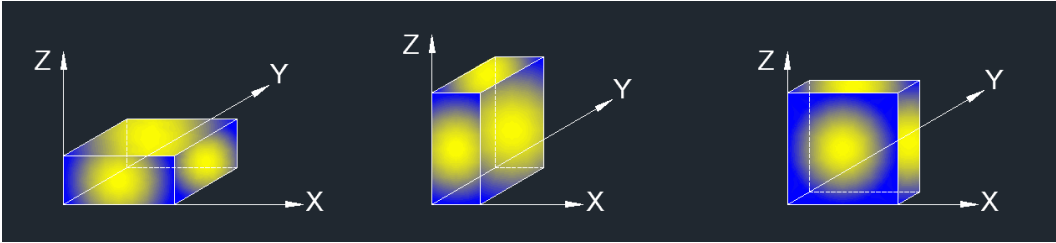

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


TEST ENVIRONMENT

Temperature	21.5 °C	Relative Humidity	51 %
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

RESULTS

8.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

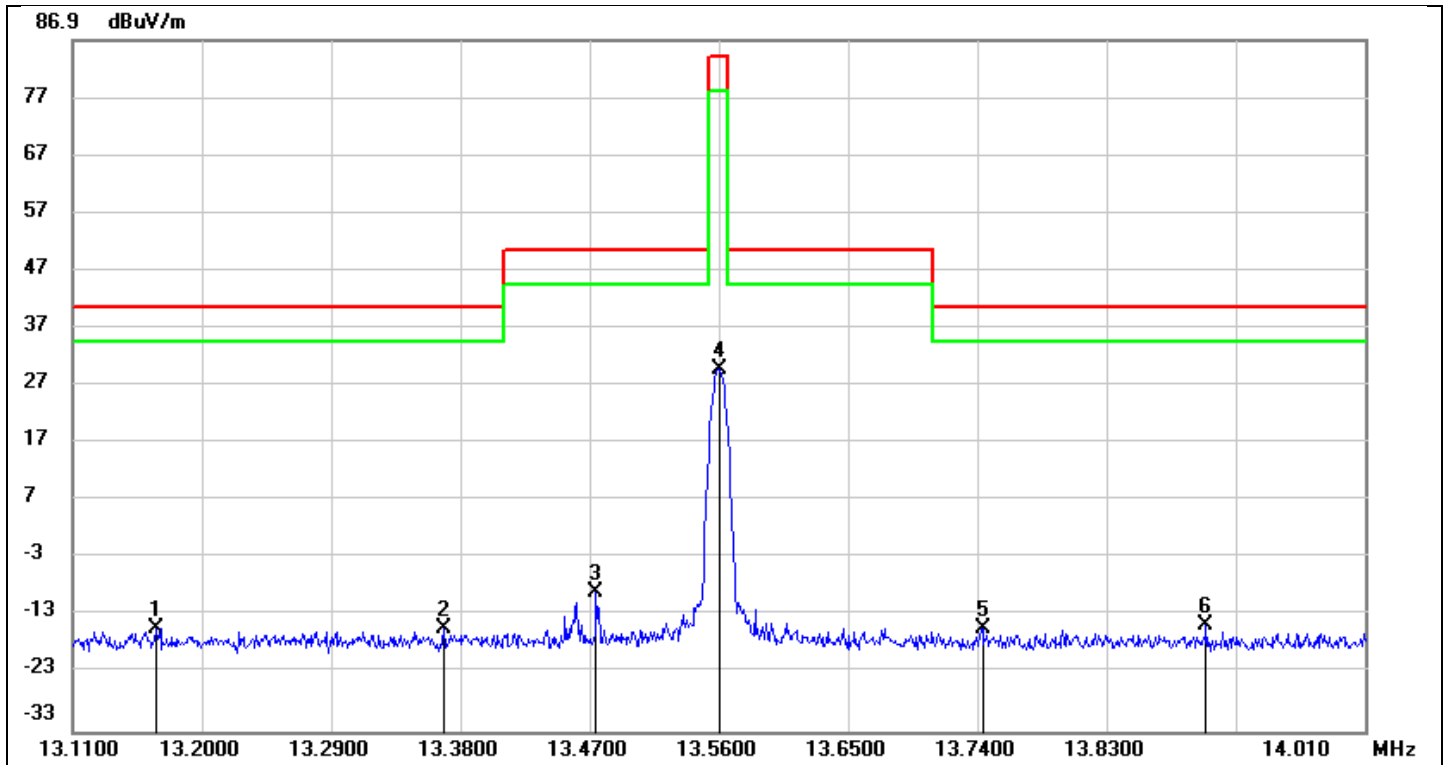


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.1685	36.08	-51.19	-15.11	40.51	-55.62	peak
2	13.3683	35.79	-51.18	-15.39	40.51	-55.90	peak
3	13.4745	42.30	-51.17	-8.87	50.47	-59.34	peak
4	13.5600	80.87	-51.17	29.70	84.00	-54.30	peak
5	13.7427	35.80	-51.16	-15.36	40.51	-55.87	peak
6	13.8993	36.49	-51.14	-14.65	40.51	-55.16	peak

Note:

1. Result Level = Read Level + Correct Factor.
2. The test result is for 30m, the distance extrapolation factor (40dB/decade) has been considered in the test result.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

8.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30MHz

SPURIOUS EMISSIONS (HORIZONTAL)

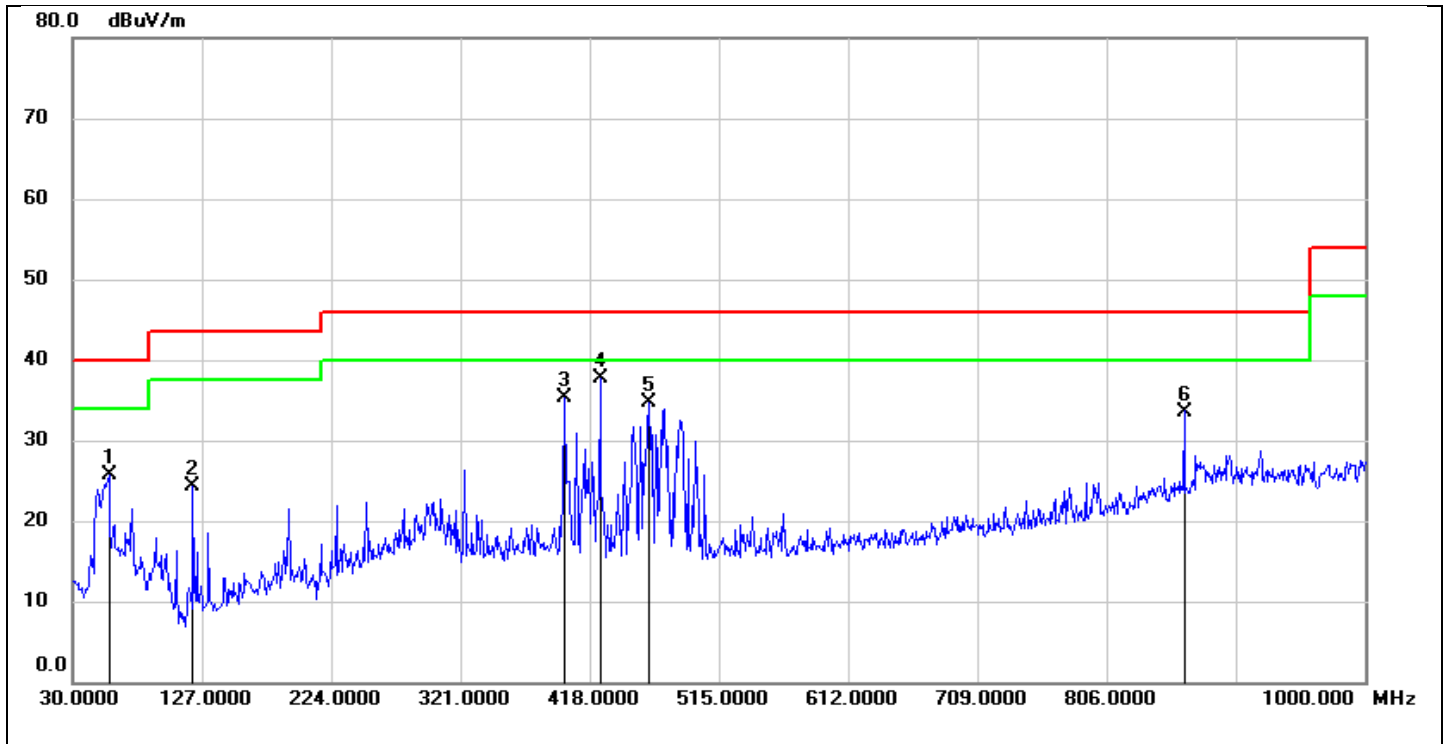


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	40.82	-15.18	25.64	40.00	-14.36	peak
2	120.2100	39.34	-14.98	24.36	43.50	-19.14	peak
3	398.6000	45.02	-9.66	35.36	46.00	-10.64	peak
4	425.7600	46.39	-8.69	37.70	46.00	-8.30	peak
5	462.6200	42.36	-7.71	34.65	46.00	-11.35	peak
6	864.2000	34.70	-1.10	33.60	46.00	-12.40	peak

Note:

1. Result Level = Read Level + Correct Factor.
2. The peak value is compliant with the QP limit, and the margin is greater than 3dB, QP value is not captured.

HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

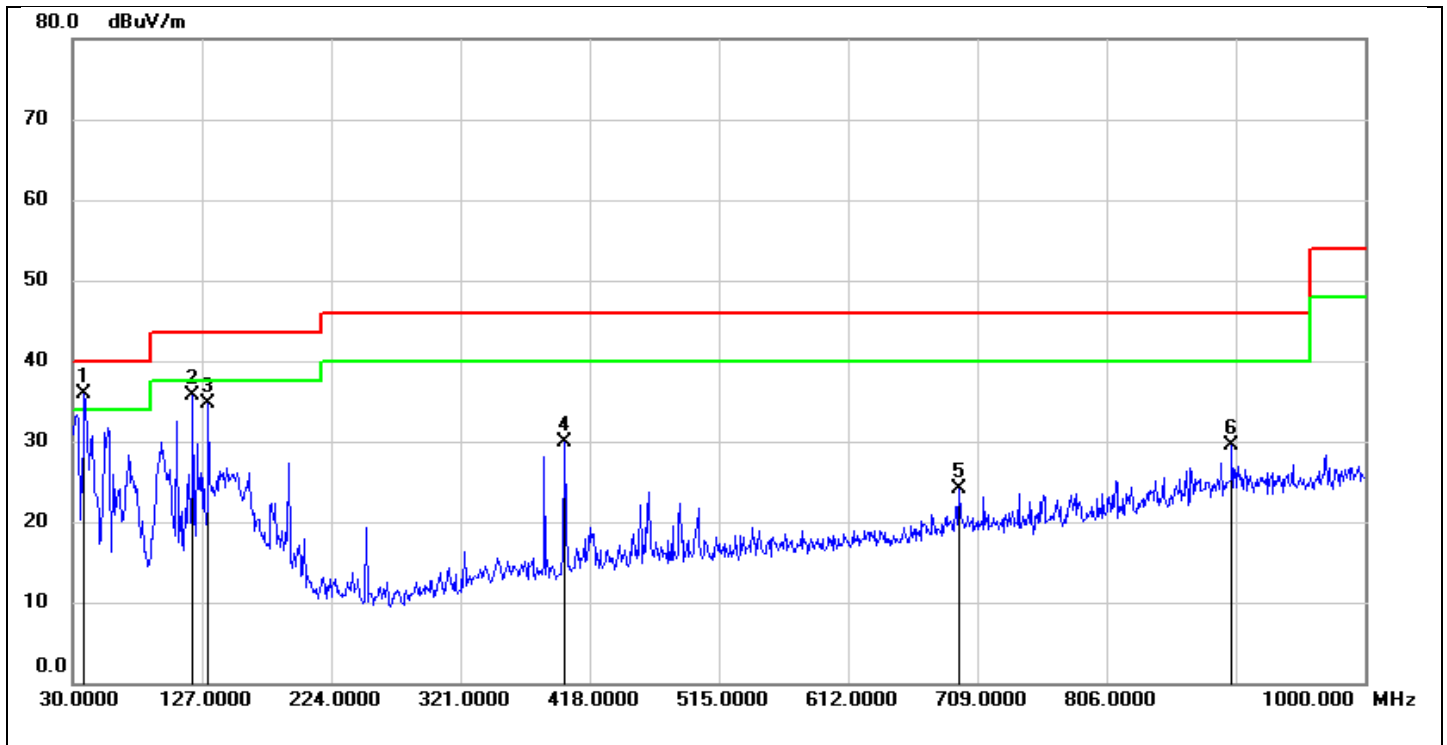


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.7300	50.76	-14.93	35.83	40.00	-4.17	peak
2	120.2100	50.68	-14.98	35.70	43.50	-7.80	peak
3	131.8500	49.27	-14.48	34.79	43.50	-8.71	peak
4	399.5700	39.53	-9.66	29.87	46.00	-16.13	peak
5	695.4200	28.34	-4.17	24.17	46.00	-21.83	peak
6	900.0900	30.08	-0.54	29.54	46.00	-16.46	peak

Note:

1. Result Level = Read Level + Correct Factor.
2. The peak value is compliant with the QP limit, and the margin is greater than 3dB, QP value is not captured.

8.3. SPURIOUS EMISSIONS BELOW 30MHz

SPURIOUS EMISSIONS OF 9 kHz~ 150 kHz (LOOP ANTENNA FACE ON TO THE EUT)

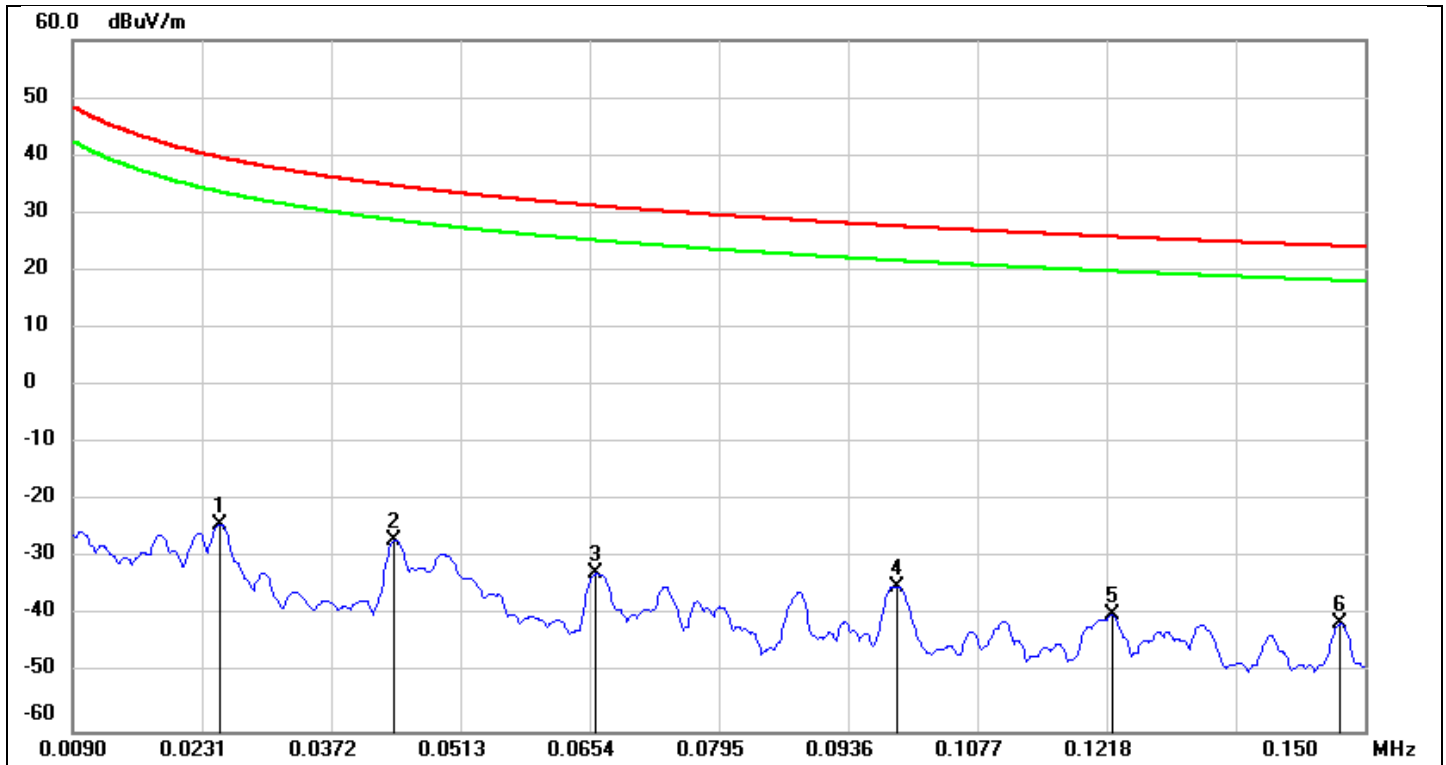


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0250	66.28	-90.39	-24.11	39.64	-63.75	peak
2	0.0441	64.74	-91.55	-26.81	34.71	-61.52	peak
3	0.0661	59.95	-92.58	-32.63	31.20	-63.83	peak
4	0.0989	57.83	-92.71	-34.88	27.70	-62.58	peak
5	0.1223	52.69	-92.55	-39.86	25.86	-65.72	peak
6	0.1473	51.01	-92.39	-41.38	24.24	-65.62	peak

Note:

1. Measurement = Reading Level + Correct Factor
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. About the Fundamental emission test result please refer to section 7.1.

SPURIOUS EMISSIONS OF 150 kHz~ 490 kHz (LOOP ANTENNA FACE ON TO THE EUT)

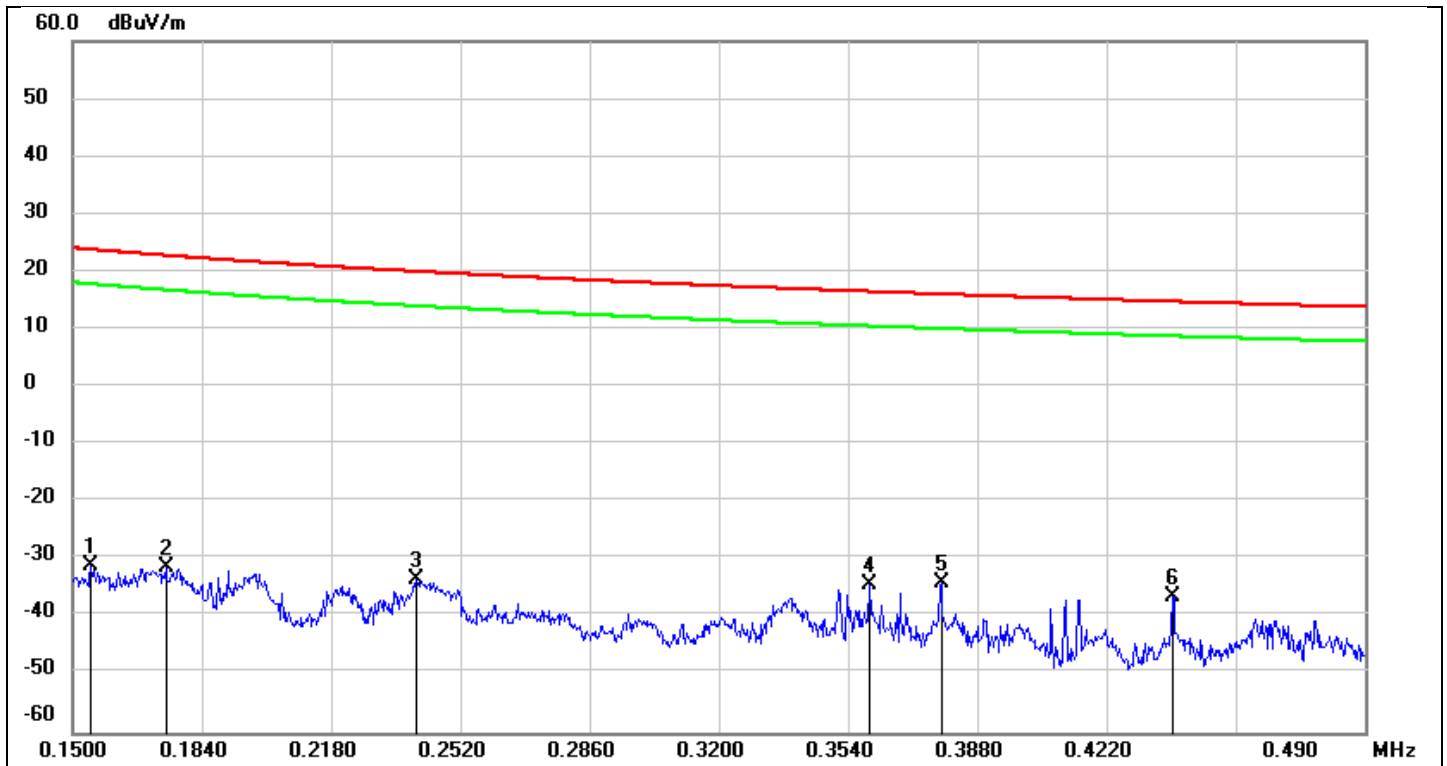


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1548	61.17	-92.35	-31.18	23.81	-54.99	peak
2	0.1745	60.74	-92.22	-31.48	22.77	-54.25	peak
3	0.2404	58.91	-92.23	-33.32	19.98	-53.30	peak
4	0.3594	58.30	-92.63	-34.33	16.49	-50.82	peak
5	0.3785	58.53	-92.68	-34.15	16.04	-50.19	peak
6	0.4393	56.48	-92.81	-36.33	14.75	-51.08	peak

Note:

1. Measurement = Reading Level + Correct Factor
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. About the Fundamental emission test result please refer to section 7.1.

SPURIOUS EMISSIONS OF 490 kHz~ 30 MHz (LOOP ANTENNA FACE ON TO THE EUT)

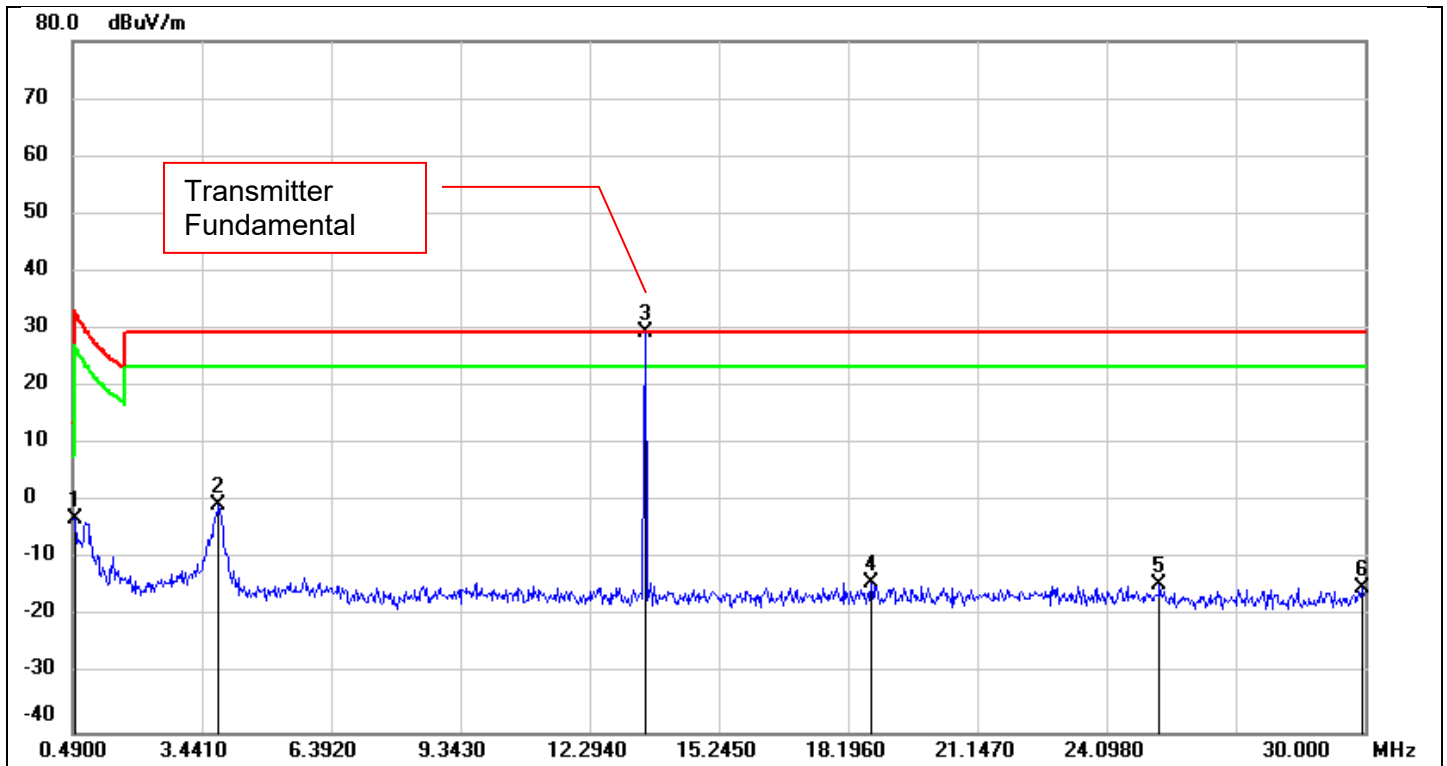

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5490	49.97	-52.91	-2.94	32.81	-35.75	peak
2	3.8246	51.06	-51.51	-0.45	29.54	-29.99	peak
3	13.5629	80.71	-51.17	29.54	29.54	0.00	peak
4	18.7271	36.65	-50.57	-13.92	29.54	-43.46	peak
5	25.3079	35.44	-49.79	-14.35	29.54	-43.89	peak
6	29.9410	35.46	-50.31	-14.85	29.54	-44.39	peak

Note:

- Measurement = Reading Level + Correct Facto
- If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
- All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
- About the Fundamental emission test result please refer to section 7.1.

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS


Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

1. The tighter limit applies at the band edges.
2. The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

TEST SETUP AND PROCEDURE

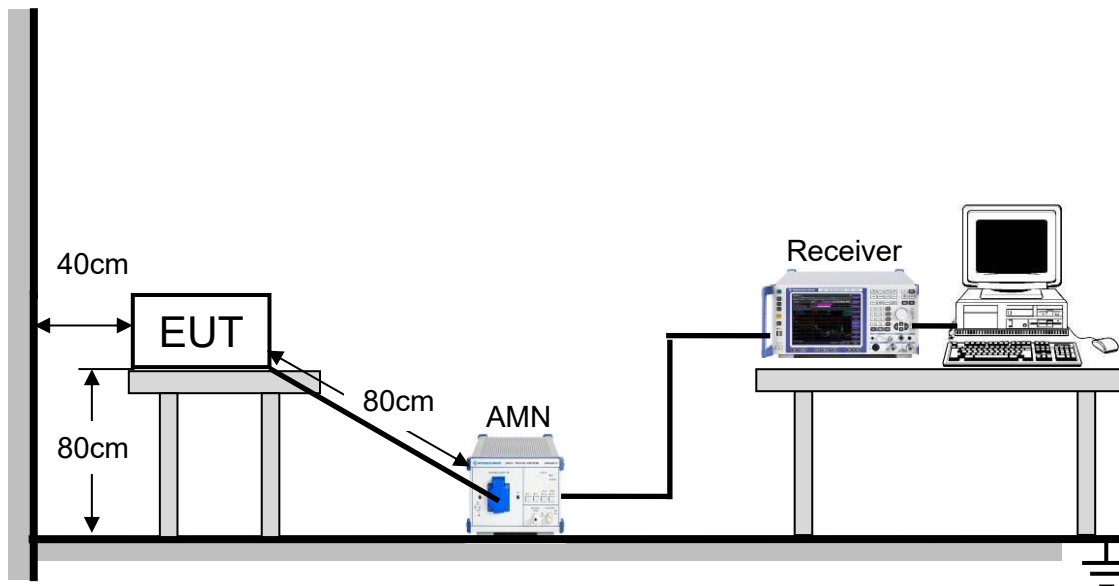

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

1. The testing follows the guidelines in ANSI C63.10-2020 (Incl. C63.10 COR 1-2023, ANSI C63.10a-2024 & Errata to ANSI C63.10a-2024).
2. The EUT was placed on the top of a rotating table 0.8 meters above the horizontal ground plane and being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
4. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. LISN at least 80 cm from nearest part of EUT chassis.
6. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.
7. The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	22.3°C	Relative Humidity	52%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V_60Hz

LINE L RESULTS with modified sample (transmitter **terminated** into a dummy load)

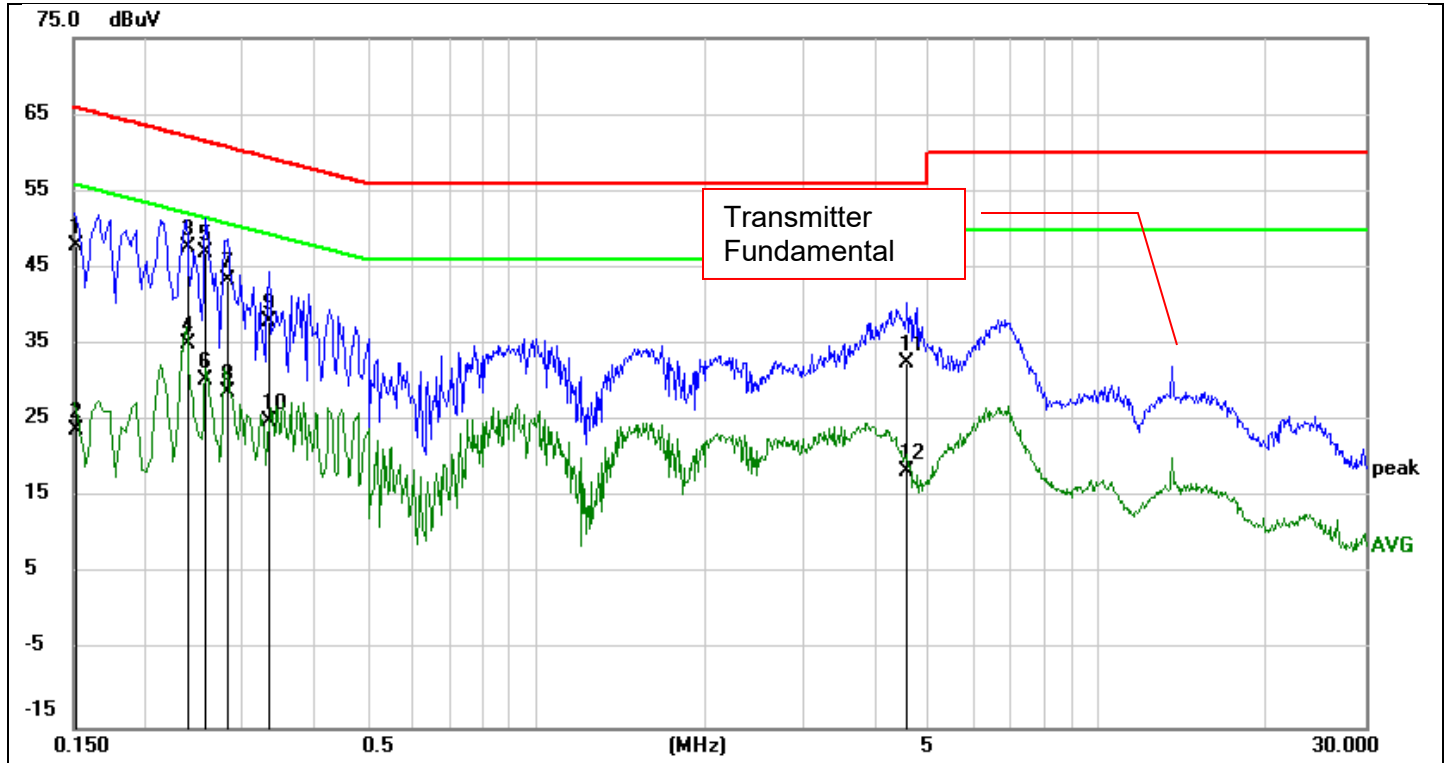


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1517	38.02	9.83	47.85	65.91	-18.06	QP
2	0.1517	14.02	9.83	23.85	55.91	-32.06	AVG
3	0.2408	38.00	9.65	47.65	62.07	-14.42	QP
4	0.2408	25.51	9.65	35.16	52.07	-16.91	AVG
5	0.2578	37.36	9.66	47.02	61.50	-14.48	QP
6	0.2578	20.60	9.66	30.26	51.50	-21.24	AVG
7	0.2811	33.76	9.67	43.43	60.78	-17.35	QP
8	0.2811	19.13	9.67	28.80	50.78	-21.98	AVG
9	0.3329	28.27	9.68	37.95	59.38	-21.43	QP
10	0.3329	15.30	9.68	24.98	49.38	-24.40	AVG
11	4.5351	22.79	9.83	32.62	56.00	-23.38	QP
12	4.5351	8.57	9.83	18.40	46.00	-27.60	AVG

Note:

- Result = Reading +Correct Factor.
- If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE N RESULTS with modified sample (transmitter terminated into a dummy load)

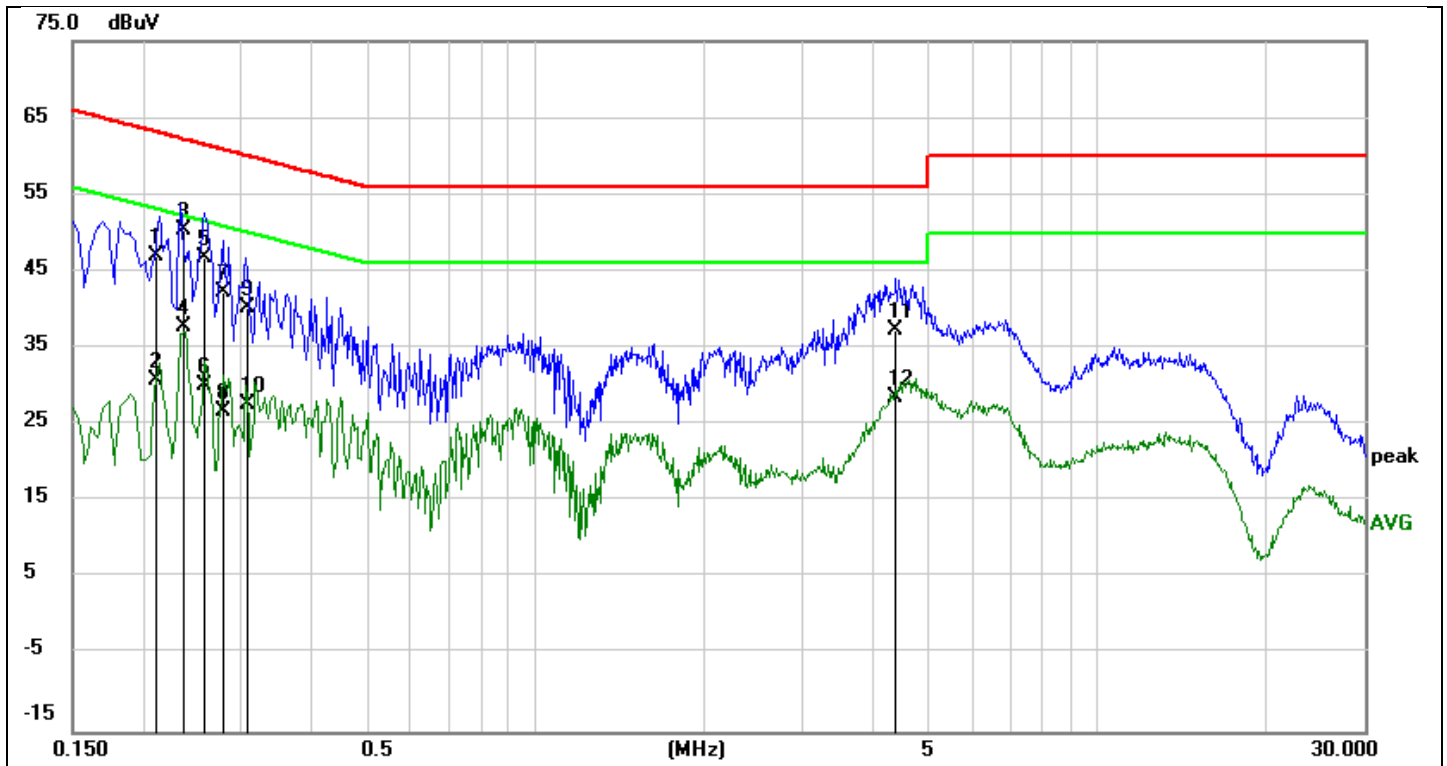


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2101	37.44	9.54	46.98	63.20	-16.22	QP
2	0.2101	21.25	9.54	30.79	53.20	-22.41	AVG
3	0.2373	40.79	9.55	50.34	62.19	-11.85	QP
4	0.2373	28.15	9.55	37.70	52.19	-14.49	AVG
5	0.2580	37.14	9.56	46.70	61.50	-14.80	QP
6	0.2580	20.57	9.56	30.13	51.50	-21.37	AVG
7	0.2773	32.80	9.57	42.37	60.90	-18.53	QP
8	0.2773	17.18	9.57	26.75	50.90	-24.15	AVG
9	0.3065	30.72	9.58	40.30	60.06	-19.76	QP
10	0.3065	17.99	9.58	27.57	50.06	-22.49	AVG
11	4.3832	27.54	9.72	37.26	56.00	-18.74	QP
12	4.3832	18.77	9.72	28.49	46.00	-17.51	AVG

Note:

1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L RESULTS with unmodified sample (antenna present)

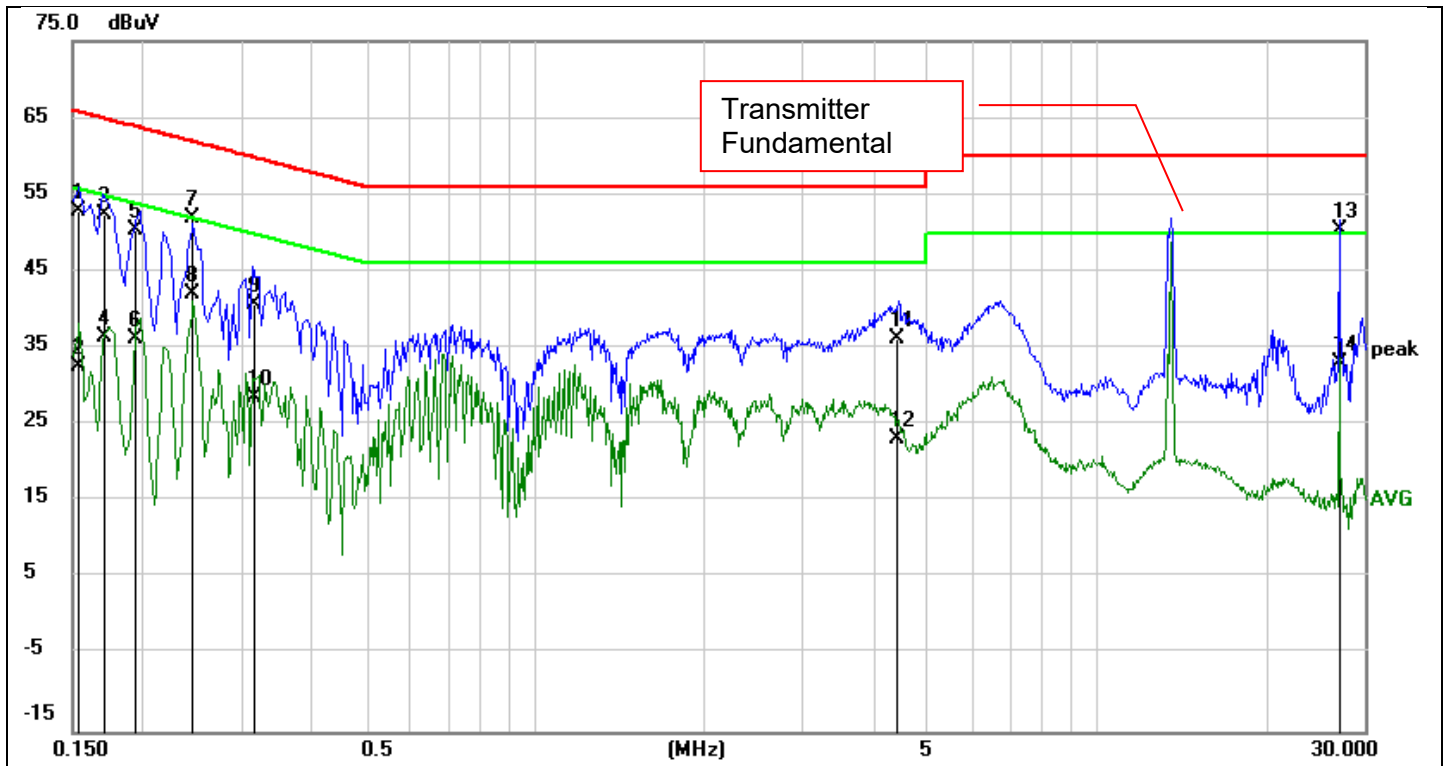


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	43.03	9.82	52.85	65.79	-12.94	QP
2	0.1539	22.80	9.82	32.62	55.79	-23.17	AVG
3	0.1713	42.56	9.75	52.31	64.90	-12.59	QP
4	0.1713	26.62	9.75	36.37	54.90	-18.53	AVG
5	0.1932	40.79	9.67	50.46	63.90	-13.44	QP
6	0.1932	26.55	9.67	36.22	53.90	-17.68	AVG
7	0.2460	42.26	9.66	51.92	61.89	-9.97	QP
8	0.2460	32.34	9.66	42.00	51.89	-9.89	AVG
9	0.3155	30.92	9.68	40.60	59.82	-19.22	QP
10	0.3155	18.84	9.68	28.52	49.82	-21.30	AVG
11	4.4248	26.25	9.83	36.08	56.00	-19.92	QP
12	4.4248	13.34	9.83	23.17	46.00	-22.83	AVG
13	27.1198	40.57	9.71	50.28	60.00	-9.72	QP
14	27.1198	23.43	9.71	33.14	50.00	-16.86	AVG

Note:

1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE N RESULTS with unmodified sample (antenna present)

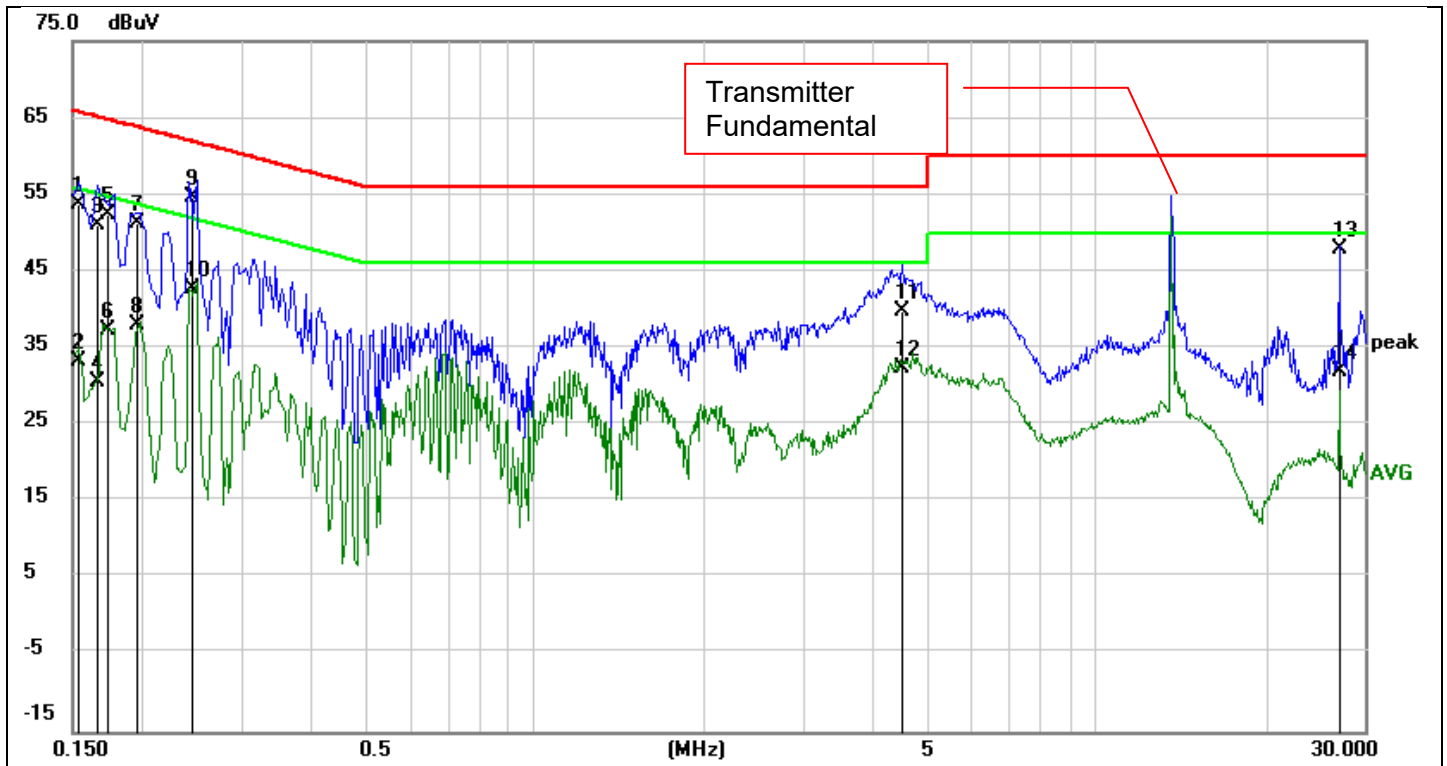

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1544	44.17	9.54	53.71	65.76	-12.05	QP
2	0.1544	23.73	9.54	33.27	55.76	-22.49	AVG
3	0.1655	41.61	9.54	51.15	65.18	-14.03	QP
4	0.1655	21.07	9.54	30.61	55.18	-24.57	AVG
5	0.1737	42.93	9.54	52.47	64.78	-12.31	QP
6	0.1737	27.73	9.54	37.27	54.78	-17.51	AVG
7	0.1949	41.82	9.54	51.36	63.83	-12.47	QP
8	0.1949	28.52	9.54	38.06	53.83	-15.77	AVG
9	0.2456	45.00	9.56	54.56	61.90	-7.34	QP
10	0.2456	33.26	9.56	42.82	51.90	-9.08	AVG
11	4.5301	30.05	9.71	39.76	56.00	-16.24	QP
12	4.5301	22.62	9.71	32.33	46.00	-13.67	AVG
13	27.1198	38.30	9.64	47.94	60.00	-12.06	QP
14	27.1198	22.30	9.64	31.94	50.00	-18.06	AVG

Note:

1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to 47CFR §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT