

TEST REPORT

 CTK Co., Ltd. The Prime Leader of Global Engineers Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-02014 Page (1) / (150) Pages	
---	---	---	--

1. Client

- Name : KAONMEDIA Co., Ltd.
- Address : KAONMEDIA Building, 884-3 Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea
- Date of Receipt : 2019-05-07

2. Manufacturer

- Name : KAONMEDIA Co., Ltd.
- Address : KAONMEDIA Building, 884-3 Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea

3. Use of Report : For FCC Certification

4. Test Sample / Model: WiFi Mesh Repeater / AR3030W

5. Date of Test : 2019-05-13 to 2019-06-25

6. Test Standard(method) used : FCC 47 CFR part 15 subpart E 15.407

7. Testing Environment: Temp.: (24 ± 5) °C, Humidity: (50 ± 3) % R.H.

8. Test Results : Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by  Ji-Hye Kim: (Signature)	Technical Manager  Won-Jae, Hwang: (Signature)
-------------	---	---

2019-06-25

Republic of KOREA **CTK Co., Ltd.**

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-02014
Page (2) / (150) Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2019-06-25	Issued (CTK-2019-02014)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

CONTENTS

1. General Product Description	4
1.1 Client Information	4
1.2 Product Information.....	4
1.3 Peripheral Devices	5
2. Facility and Accreditations.....	6
2.1 Test Facility.....	6
2.2 Laboratory Accreditations and Listings	6
2.3 Calibration Details of Equipment Used for Measurement	6
3. Test Specifications	7
3.1 Standards.....	7
3.2 Mode of operation during the test.....	8
3.3 Model Differences	9
3.4 Maximum Measurement Uncertainty	9
3.5 Test Software.....	9
4. Technical Characteristic Test.....	10
4.1 26 dB Bandwidth and 99% Bandwidth.....	10
4.2 OUTPUT POWER	31
4.3 Power Spectral Density	74
4.4 Frequency Stability.....	117
4.5 Unwanted Emissions	118
4.6 AC Conducted Emissions	147
APPENDIX A – Test Equipment Used For Tests	150

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-02014 Page (4) / (150) Pages	
--	---	---	--

1. General Product Description

1.1 Client Information

Company	KAONMEDIA Co., Ltd.
Contact Point	KAONMEDIA Building, 884-3 Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea
Contact Person	Name : Kim tae-Sung E-mail : kkam@kaonmedia.com Tel : +82-31-724-8861

1.2 Product Information

FCC ID	WQT-AR3030W
Product Description	WiFi Mesh Repeater
Model name	AR3030W
Variant Model name	AR3030IL and AR3030
Operating Frequency	UNII 2A : 5 260 MHz – 5 320 MHz (20 MHz_BW) 5 270 MHz – 5 310 MHz (40 MHz_BW) 5 290 MHz (80 MHz_BW) UNII 2C : 5 500 MHz – 5 720 MHz (20 MHz_BW) 5 510 MHz – 5 710 MHz (40 MHz_BW) 5 530 MHz – 5 690 MHz (80 MHz_BW)
RF Output Power	CDD Mode_802.11a : 19.89 dBm (97.50 mW) CDD Mode_802.11n_HT20 : 20.38 dBm (109.14 mW) CDD Mode_802.11n_HT40 : 22.50 dBm (177.83 mW) CDD Mode_802.11ac_VHT20 : 20.38 dBm (109.14 mW) CDD Mode_802.11ac_VHT40 : 22.66 dBm (184.50 mW) CDD Mode_802.11ac_VHT80 : 22.57 dBm (180.72 mW) SDM Mode_802.11n_HT20 : 20.83 dBm (121.06 mW) SDM Mode_802.11n_HT40 : 22.87 dBm (193.64 mW) SDM Mode_802.11ac_VHT20 : 20.71 dBm (117.76 mW) SDM Mode_802.11ac_VHT40 : 22.74 dBm (187.93 mW) SDM Mode_802.11ac_VHT80 : 22.71 dBm (186.64 mW)
Antenna Specification	ANT1, ANT2, ANT3 type : PCB Antenna ANT1, ANT2, ANT3 Peak Gain : 2 dBi
Type of Modulation	OFDM
Data Rate	802.11a : 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps 802.11n : up to 450 Mbps 802.11ac : up to 1.3 Gbps
Power Source	DC 12 V (Adapter)
Hardware Rev	Rev 1.0
Software Rev	v.2.00.80

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-02014
Page (5) / (150) Pages

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253R6N
AC/DC Adapter	HP	HSTNN-CA40	-
AD/DC Adapter	SHENZHEN FRECOM ELECTRONICS CO., LTD.	F18L16- 120150SPAU	-

2. Facility and Accreditations

2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

2.2 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A-2
KOREA	NRRA	KR0025

2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

3. Test Specifications

3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition
15.407(e)	6 dB Bandwidth	C	Conducted
15.407(a)	26 dB Bandwidth and 99% Bandwidth	C	
15.407(a)(1)	Conducted Output Power	C	
15.407(a)(1)	Power Spectral Density	C	
15.407(g)	Frequency Stability	C	
15.407(b)	Undesirable emission	C	Radiated
15.205, 15.407(b)(5),(6)	Radiated Spurious Emission	C	
15.207	AC Conducted Emissions	C	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.			
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013			
<i>Note 4:</i> The tests were performed according to the method of measurements prescribed in KDB No.789033.			

3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
During at testing, system components were manipulated within the confines of typical usage to maximize each emission.

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit

All modulation modes were tests. The results are only attached worst cases.

Test Frequency

- 802.11a, 802.11n_HT20, 802.11ac_VHT20

	Lowest channel	Middle channel	Highest channel
UNII 2A	5 260 MHz	5 300 MHz	5 320 MHz
UNII 2C	5 500 MHz	5 600 MHz	5 720 MHz

- 802.11n_HT40, 802.11ac_VHT40

	Lowest channel	Middle channel	Highest channel
UNII 2A	5 270 MHz	-	5 310 MHz
UNII 2C	5 510 MHz	5 590 MHz	5 710 MHz

- 802.11ac_VHT80

	Lowest channel	Middle channel	Highest channel
UNII 2A	5 290 MHz	-	-
UNII 2C	5 530 MHz	-	5 690 MHz

Test mode

- CDD mode

Test mode	Modulation	Data rate	Duty Cycle	Duty Cycle Factor
802.11a	DSSS	6 Mbps	97.4%	0.12 dB
802.11n_HT20	OFDM	MCS 0	96.7%	0.15 dB
802.11n_HT40	OFDM	MCS 0	93.7%	0.28 dB
802.11ac_VHT20	OFDM	MNSS 0	96.1%	0.17 dB
802.11ac_VHT40	OFDM	MNSS 0	92.6%	0.33 dB
802.11ac_VHT80	OFDM	MNSS 0	89.1%	0.50 dB

- SDM mode

Test mode	Modulation	Data rate	Duty Cycle	Duty Cycle Factor
802.11n_HT20	OFDM	MCS 16	93.5%	0.29 dB
802.11n_HT40	OFDM	MCS 16	86.1%	0.65 dB
802.11ac_VHT20	OFDM	MNSS 0	90.9%	0.41 dB
802.11ac_VHT40	OFDM	MNSS 0	87.2%	0.60 dB
802.11ac_VHT80	OFDM	MNSS 0	79.2%	1.02 dB

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-02014 Page (9) / (150) Pages	
---	--	--	--

3.3 Model Differences

AR3030, AR3030IL and AR3030W are no technical difference from each model only except for Color(AR3030W) and WPS Key delete(AR3030IL) because of marketing purposes.

3.4 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
 Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	± 1.5 dB
Power Spectral Density	± 1.5 dB
Occupied Bandwidth	± 0.1 MHz
Unwanted Emission(conducted)	± 3.0 dB
Radiated Emissions ($f \leq 1$ GHz)	± 4.0 dB
Radiated Emissions ($f > 1$ GHz)	± 5.0 dB

3.5 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	TOYO EMI software EP5RE Ver. 5.1.0
Line Conducted Test	ESCI7, ESCI3 : EMC32 Ver. 8.50.0 ESR7 : EMC32 Ver. 8.53.0

4. Technical Characteristic Test

4.1 26 dB Bandwidth and 99 % Bandwidth

Test Procedures

KDB 789033 – Section C.1
ANSI C63.10-2013 - Section 6.9.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

Test Procedures

KDB 789033 – Section C.1
ANSI C63.10-2013 - Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = approximately 1 % of the emission bandwidth
- b) VBW $\geq$ RBW
- c) Detector = peak
- d) Trace mode = Max hold
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Minimum Standard:

NA

Test Data:

ANT1

	26 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802.11a		802.11n_HT20		802.11ac_VHT20	
Frequency	26 dB	99%	26 dB	99%	26 dB	99%
5 260 MHz	19.19	16.33	19.49	17.33	19.58	17.34
5 300 MHz	19.26	16.31	19.64	17.34	19.55	17.34
5 320 MHz	19.22	16.32	19.43	17.34	19.56	17.35
5 500 MHz	18.97	16.31	19.59	17.32	19.61	17.33
5 600 MHz	19.12	16.31	19.54	17.32	19.54	17.32
5 720 MHz	19.09	16.31	19.51	17.32	19.54	17.32
Measurement uncertainty	± 0.1 MHz					

	26 dB Bandwidth and 99% Bandwidth (MHz)			
Mode	802.11n_HT40		802.11ac_VHT40	
Frequency	26 dB	99 %	26 dB	99 %
5 270 MHz	40.21	35.78	40.37	35.70
5 310 MHz	40.19	35.79	40.34	35.68
5 510 MHz	40.11	35.82	40.07	35.72
5 590 MHz	40.30	35.77	40.15	35.67
5 710 MHz	40.12	35.72	40.13	35.65
Measurement uncertainty	± 0.1 MHz			

	26 dB Bandwidth and 99% Bandwidth (MHz)	
Mode	802.11ac_VHT80	
Frequency	26 dB	99 %
5 290 MHz	81.41	75.15
5 530 MHz	88.49	75.24
5 690 MHz	81.22	75.14
Measurement uncertainty	± 0.1 MHz	

ANT2

	26 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802.11a		802.11n_HT20		802.11ac_VHT20	
Frequency	26 dB	99%	26 dB	99%	26 dB	99%
5 260 MHz	18.74	16.38	19.56	17.38	19.55	17.41
5 300 MHz	18.79	16.38	19.56	17.38	19.51	17.40
5 320 MHz	18.69	16.38	19.65	17.38	19.51	17.39
5 500 MHz	18.85	16.37	19.33	17.36	19.58	17.37
5 600 MHz	18.75	16.38	19.56	17.36	19.58	17.37
5 720 MHz	18.78	16.37	19.55	17.35	19.51	17.36
Measurement uncertainty	± 0.1 MHz					

	26 dB Bandwidth and 99% Bandwidth (MHz)			
Mode	802.11n_HT40		802.11ac_VHT40	
Frequency	26 dB	99 %	26 dB	99 %
5 270 MHz	40.25	35.81	40.42	35.71
5 310 MHz	40.45	35.83	40.39	35.76
5 510 MHz	40.19	35.79	40.28	35.74
5 590 MHz	40.38	35.81	40.08	35.72
5 710 MHz	40.37	35.77	40.27	35.70
Measurement uncertainty	± 0.1 MHz			

	26 dB Bandwidth and 99% Bandwidth (MHz)	
Mode	802.11ac_VHT80	
Frequency	26 dB	99 %
5 290 MHz	81.99	75.20
5 530 MHz	80.80	75.24
5 690 MHz	81.52	75.23
Measurement uncertainty	± 0.1 MHz	


ANT3

	26 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802.11a		802.11n_HT20		802.11ac_VHT20	
Frequency	26 dB	99%	26 dB	99%	26 dB	99%
5 260 MHz	19.01	16.34	19.74	17.41	19.69	17.42
5 300 MHz	19.06	16.32	19.65	17.40	19.87	17.41
5 320 MHz	19.07	16.35	19.75	17.41	19.79	17.41
5 500 MHz	19.04	16.34	19.69	17.41	19.83	17.42
5 600 MHz	18.86	16.34	19.76	17.40	19.86	17.41
5 720 MHz	18.90	16.34	19.76	17.39	19.73	17.41
Measurement uncertainty	± 0.1 MHz					




	26 dB Bandwidth and 99% Bandwidth (MHz)			
Mode	802.11n_HT40		802.11ac_VHT40	
Frequency	26 dB	99 %	26 dB	99 %
5 270 MHz	40.27	35.86	40.55	35.74
5 310 MHz	40.59	35.86	40.55	35.77
5 510 MHz	40.33	35.87	40.74	35.82
5 590 MHz	40.30	35.92	40.41	35.81
5 710 MHz	40.38	35.89	40.36	35.79
Measurement uncertainty	± 0.1 MHz			

	26 dB Bandwidth and 99% Bandwidth (MHz)	
Mode	802.11ac_VHT80	
Frequency	26 dB	99 %
5 290 MHz	81.75	75.27
5 530 MHz	89.10	75.40
5 690 MHz	88.26	75.32
Measurement uncertainty	± 0.1 MHz	

See next pages for actual measured spectrum plots.

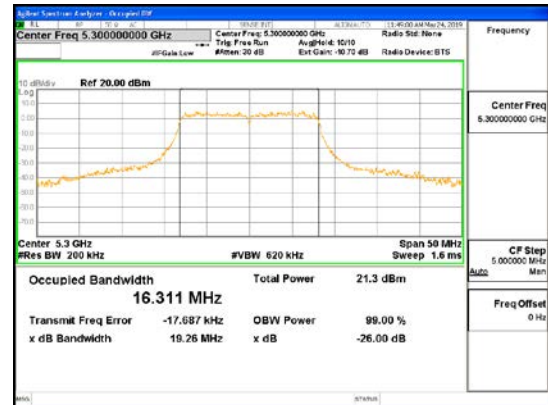


ANT1_802.11a_UNII 2A

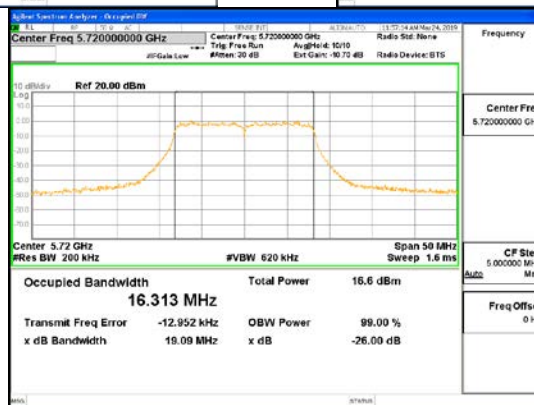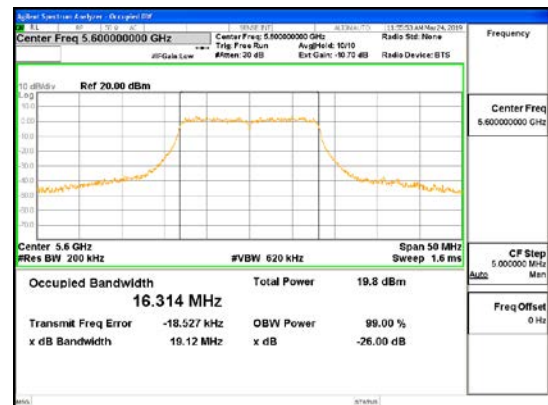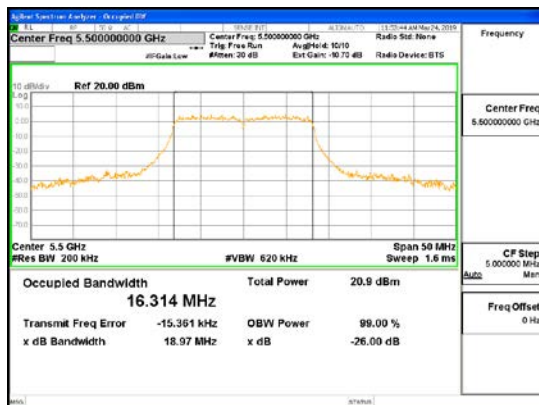


ANT1_802.11a_UNII 2C





ANT2_802.11a_UNII 2A

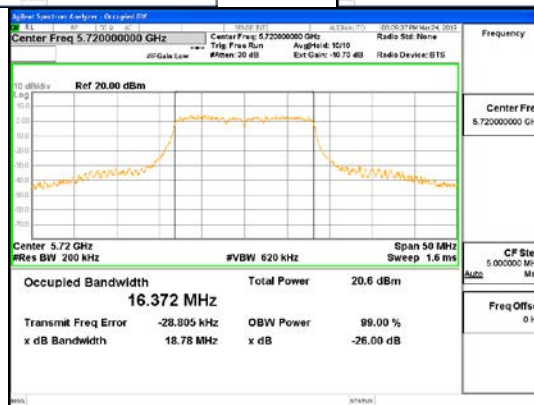



ANT2_802.11a_UNII 2C

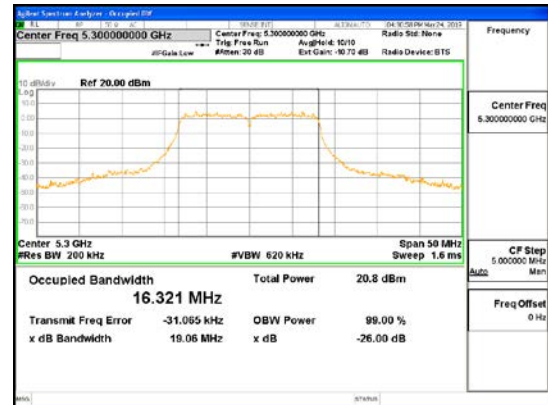



ANT3_802.11a_UNII 2A

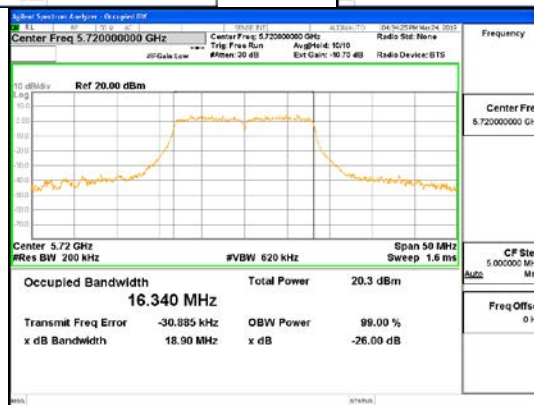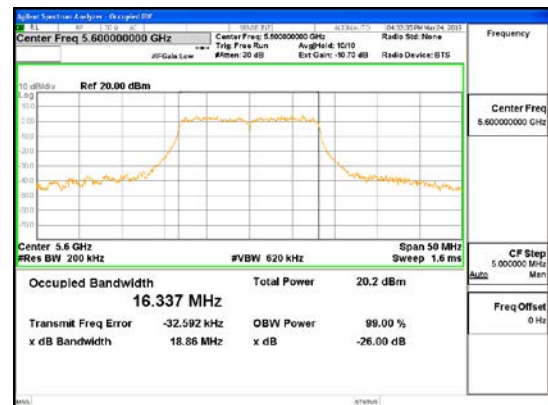




ANT3_802.11a_UNII 2C

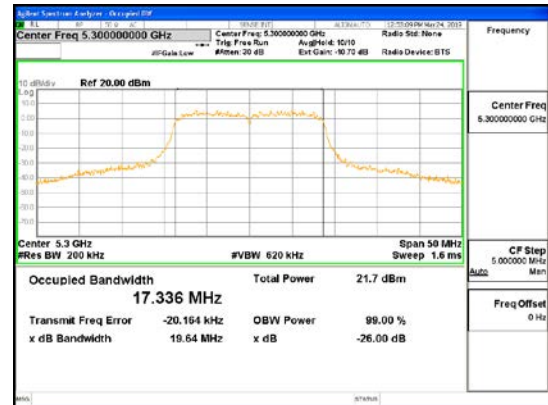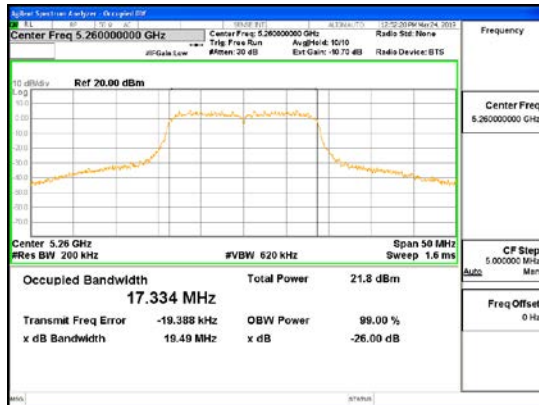



ANT1_802.11n_HT20_UNII 2A

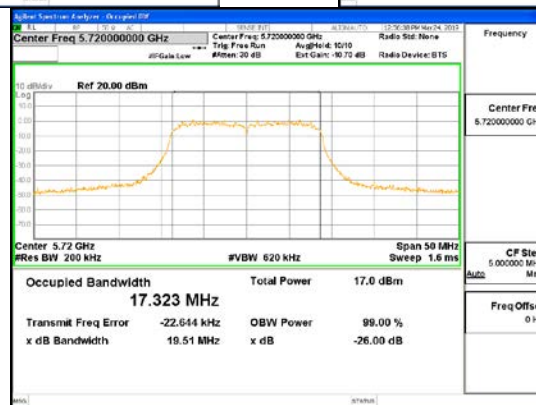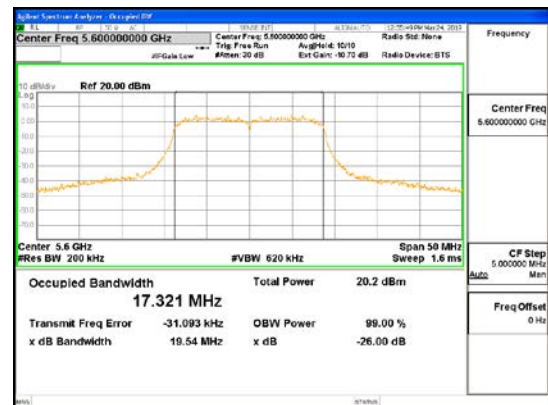

ANT1_802.11n_HT20_UNII 2C

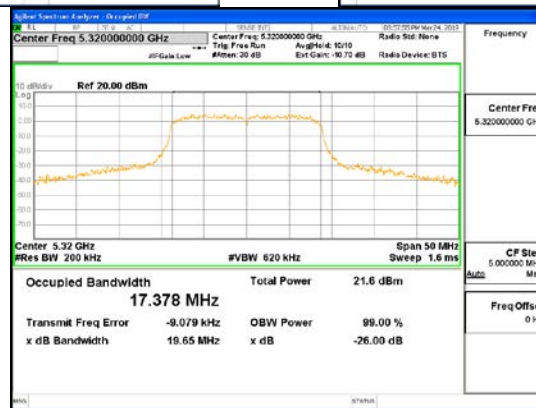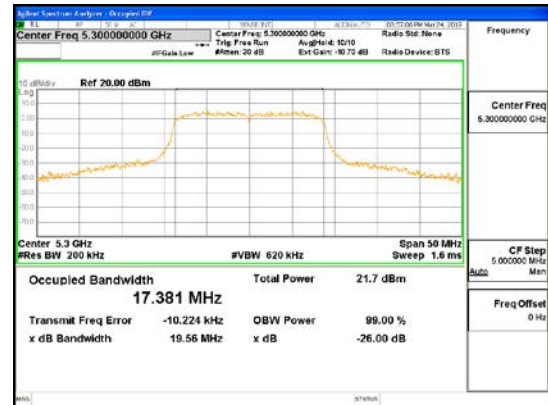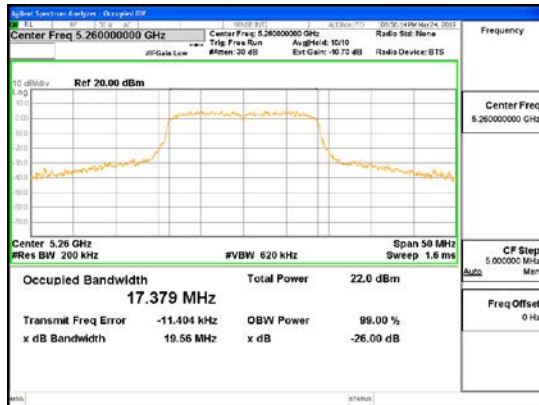


ANT2_802.11n_HT20_UNII 2A

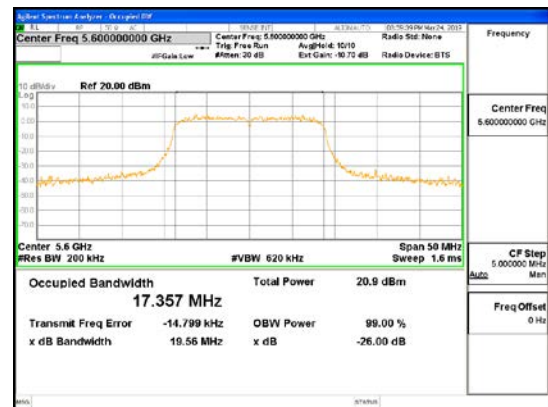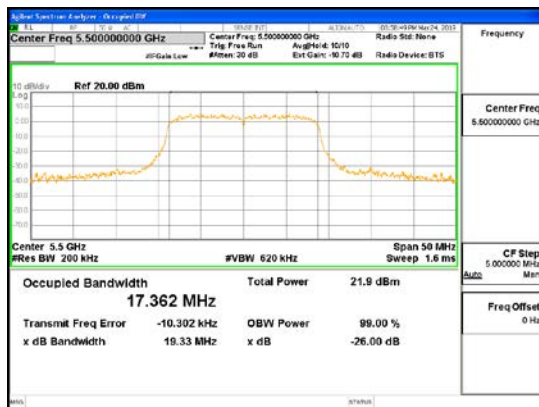



ANT2_802.11n_HT20_UNII 2C






ANT3_802.11n_HT20_UNII 2A

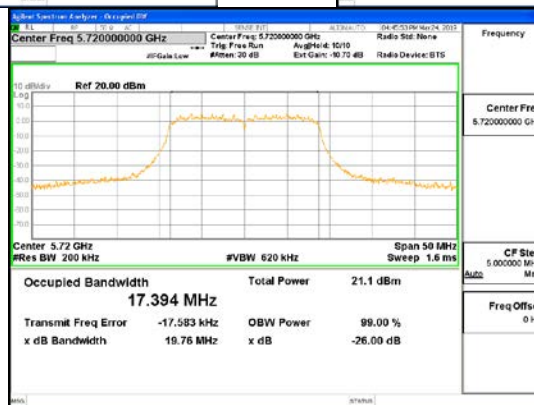




ANT3_802.11n_HT20_UNII 2C

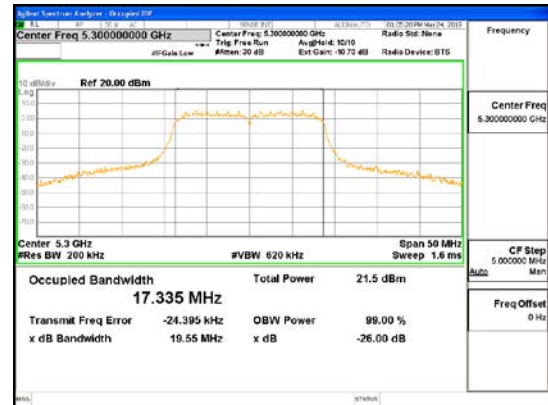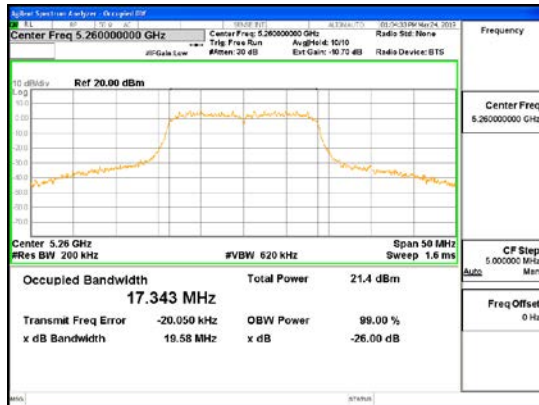



ANT1_802.11ac_VHT20_UNII 2A

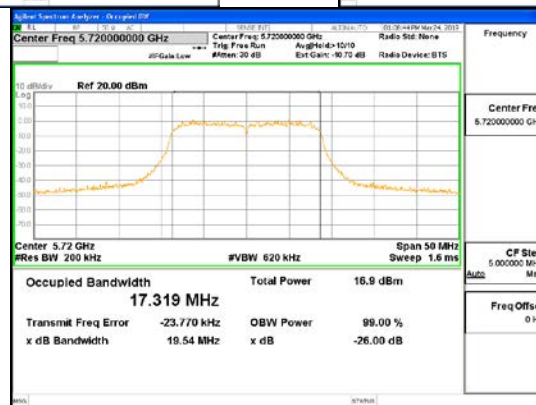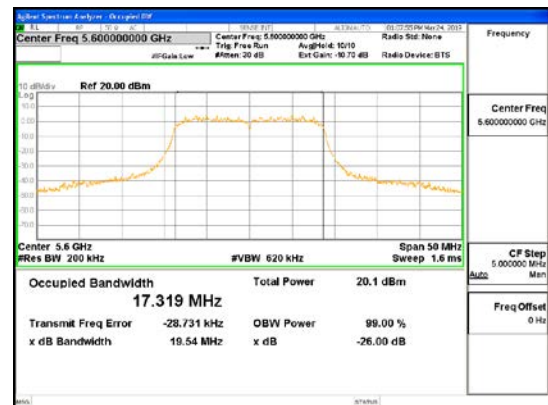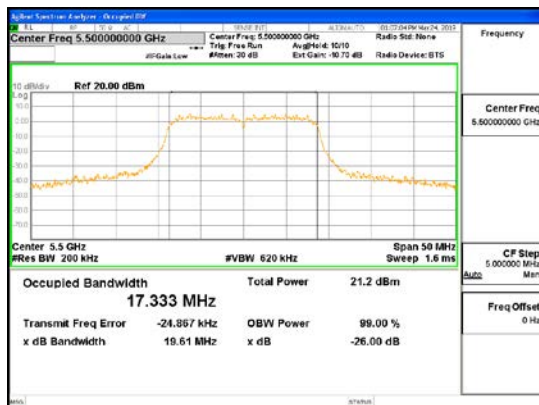

ANT1_802.11ac_VHT20_UNII 2C

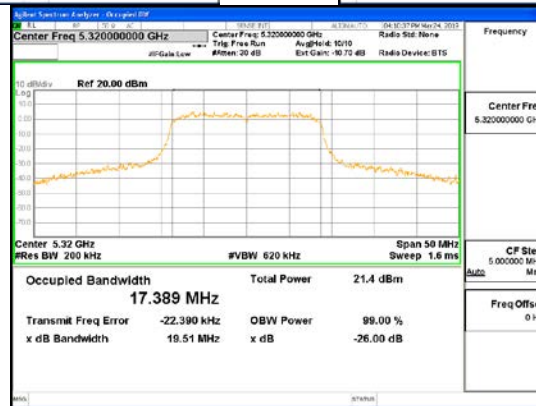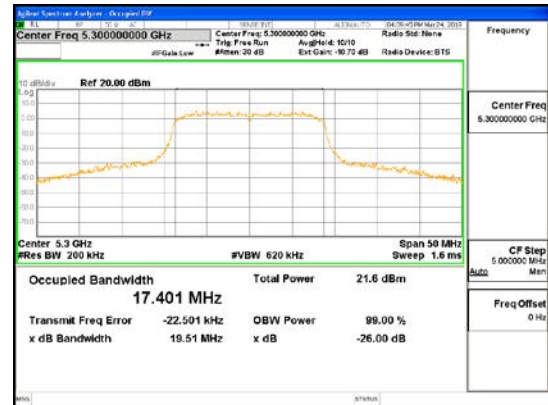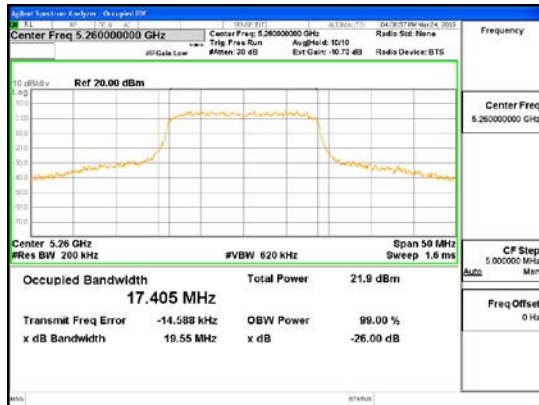




ANT2_802.11ac_VHT20_UNII 2A

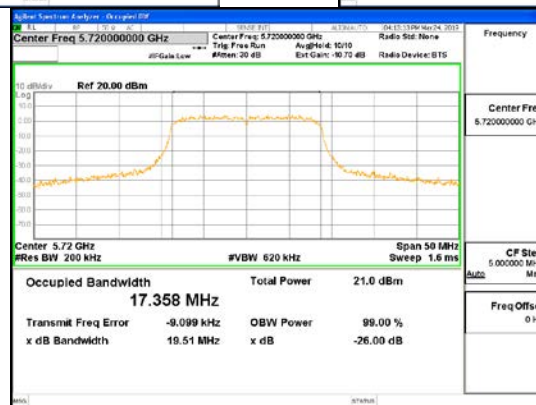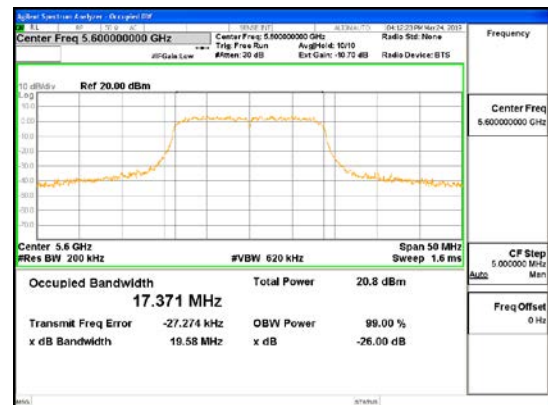



ANT2_802.11ac_VHT20_UNII 2C






ANT3_802.11ac_VHT20_UNII 2A

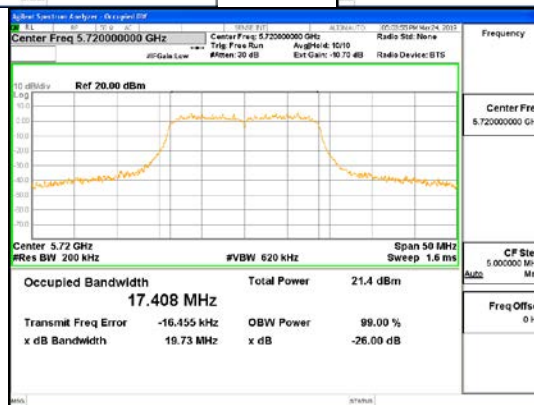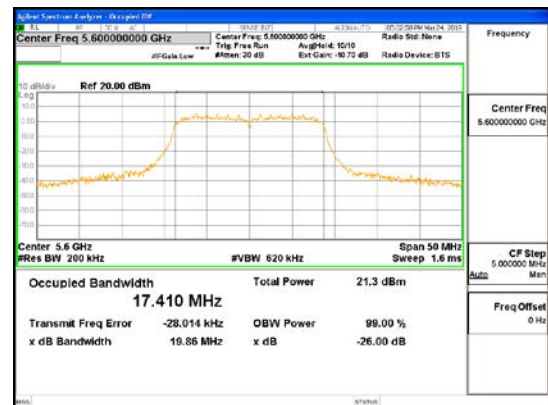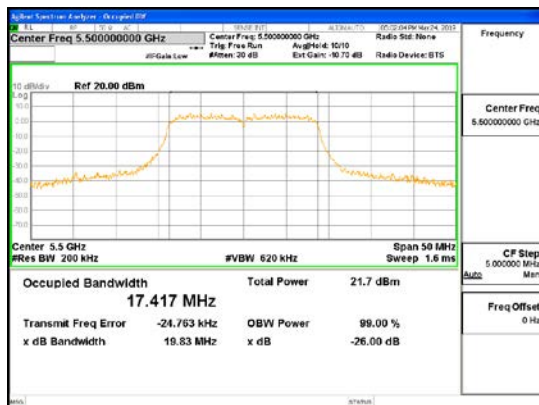



ANT3_802.11ac_VHT20_UNII 2C

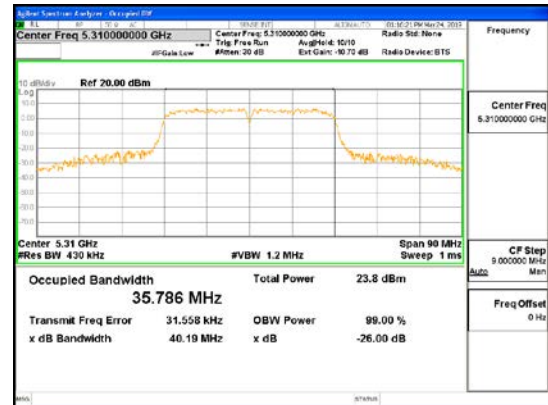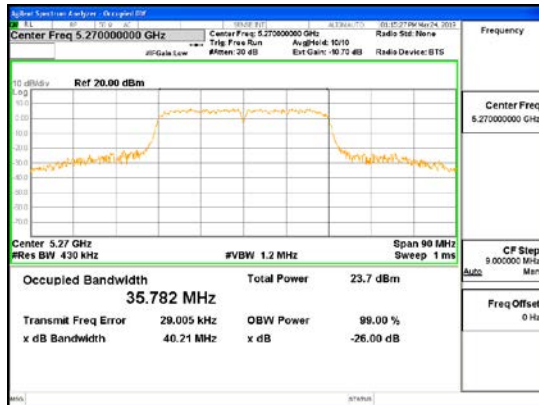




ANT1_802.11n_HT40_UNI1 2A

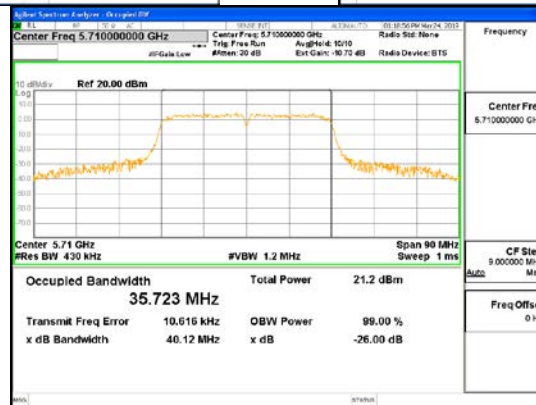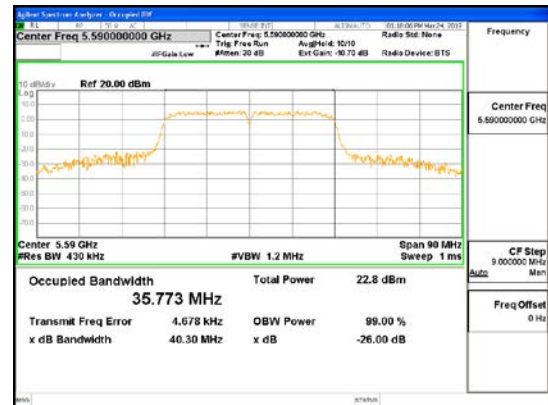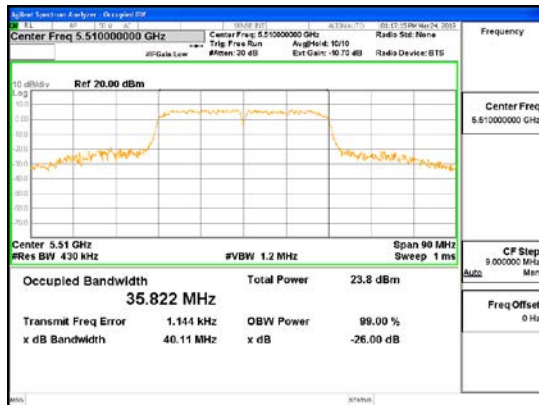



ANT1_802.11n_HT40_UNI1 2C

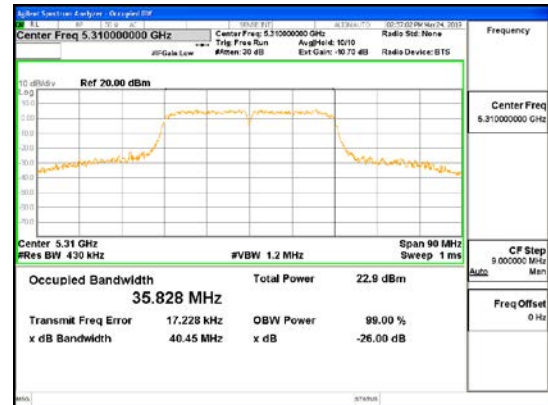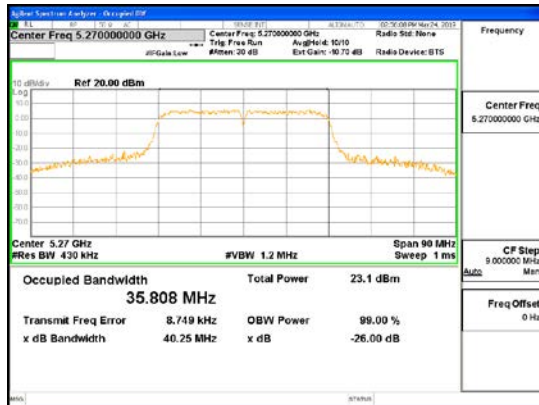




ANT2_802.11n_HT40_UNII 2A

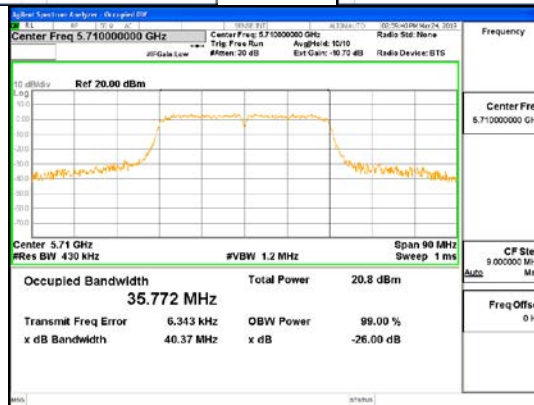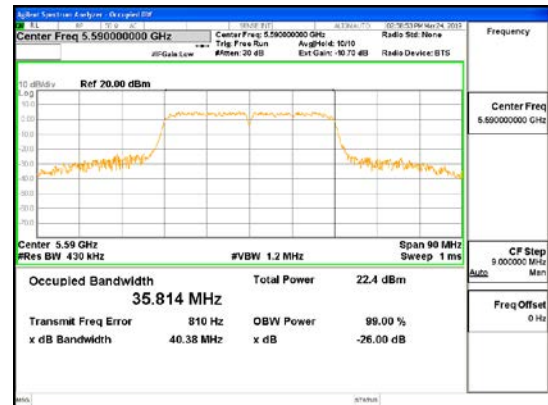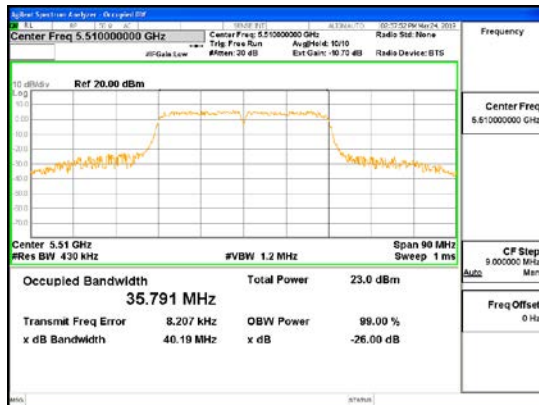



ANT2_802.11n_HT40_UNII 2C

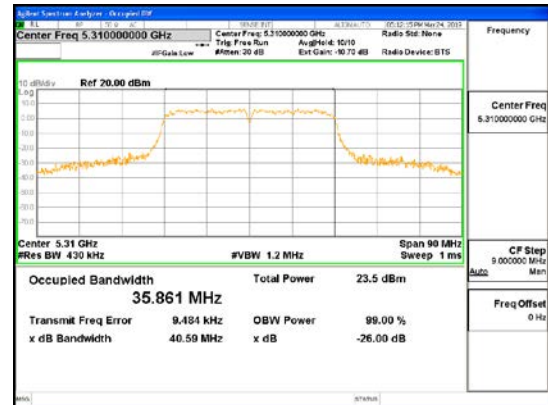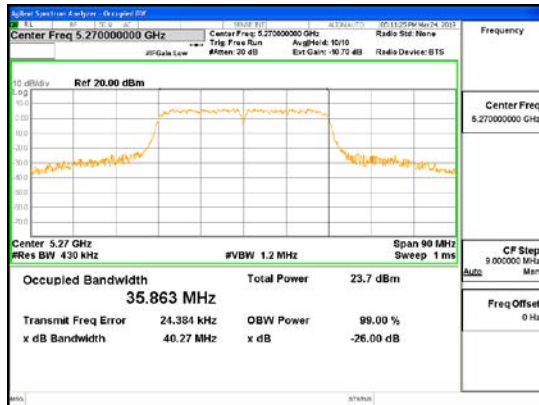




ANT3_802.11n_HT40_UNII 2A

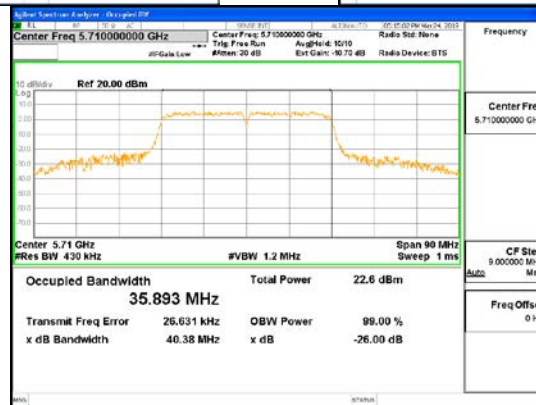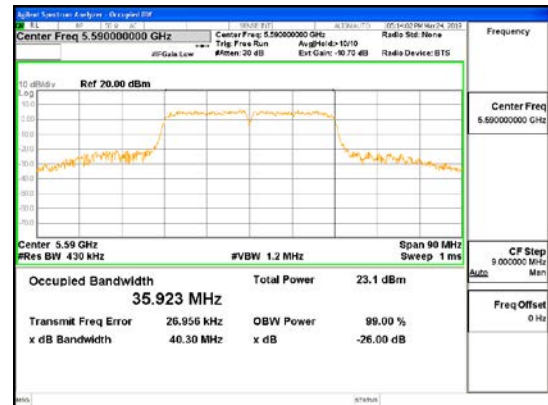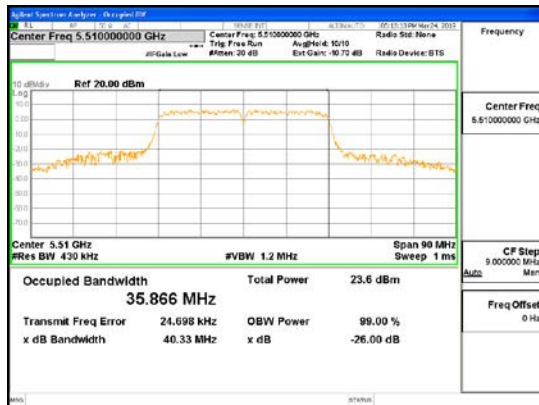

ANT3_802.11n_HT40_UNII 2C

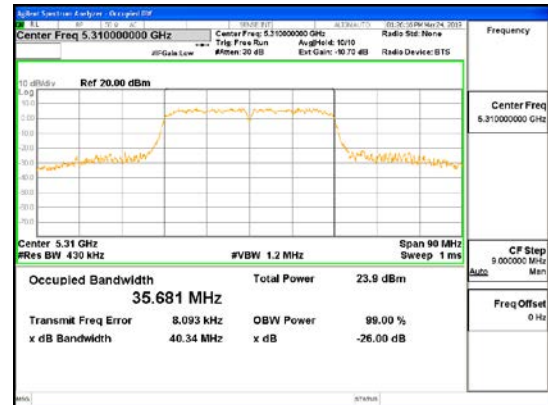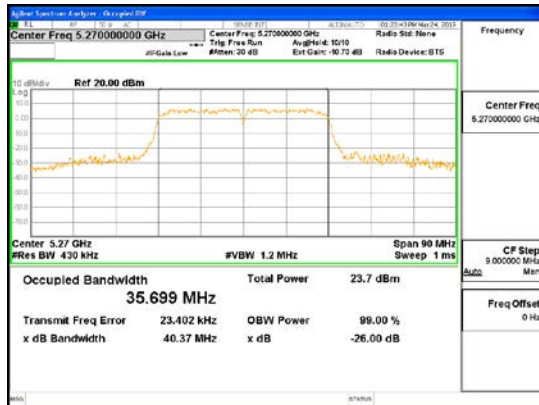



ANT1_802.11ac_VHT40_UNII 2A

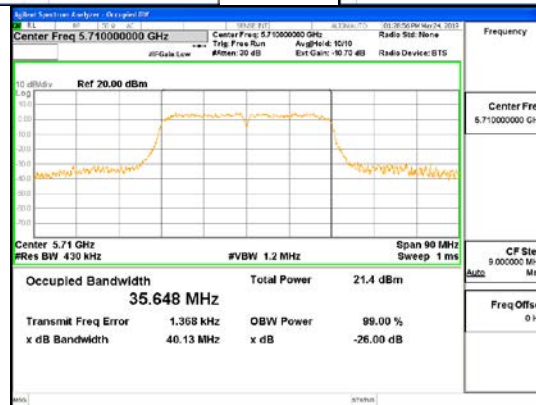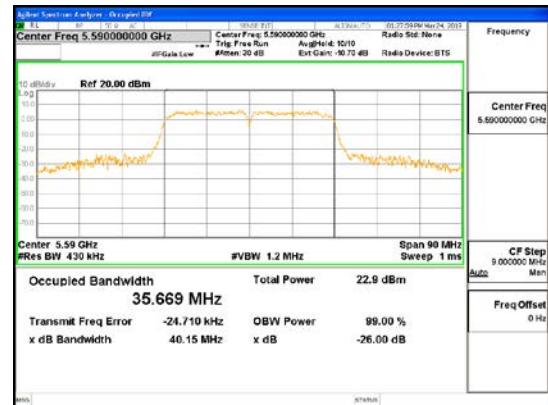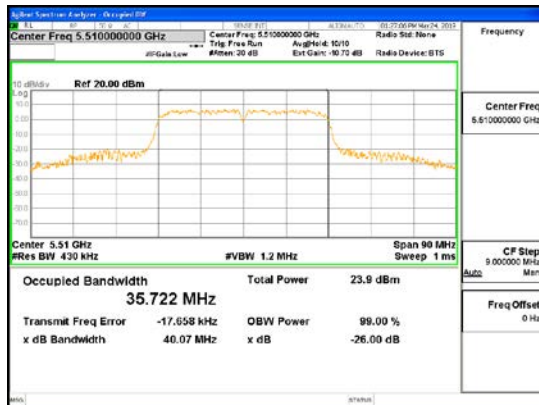


ANT1_802.11ac_VHT40_UNII 2C






ANT2_802.11ac_VHT40_UNII 2A

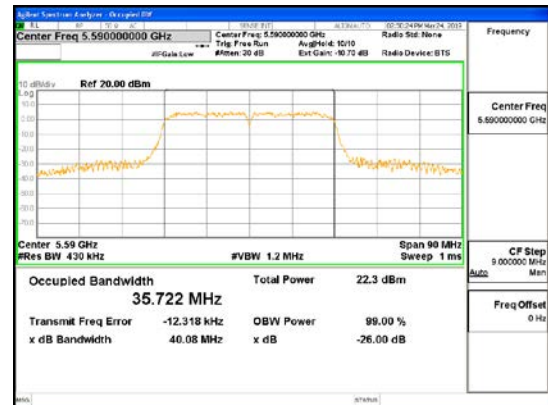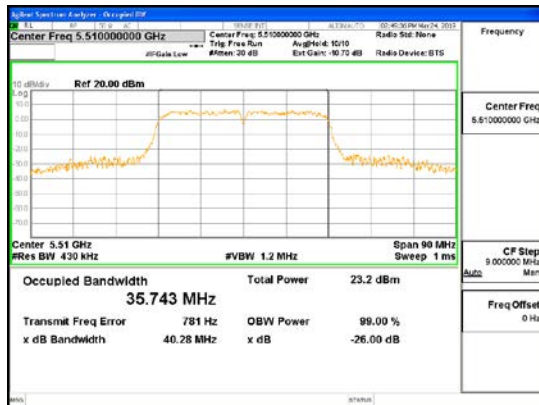


ANT2_802.11ac_VHT40_UNII 2C

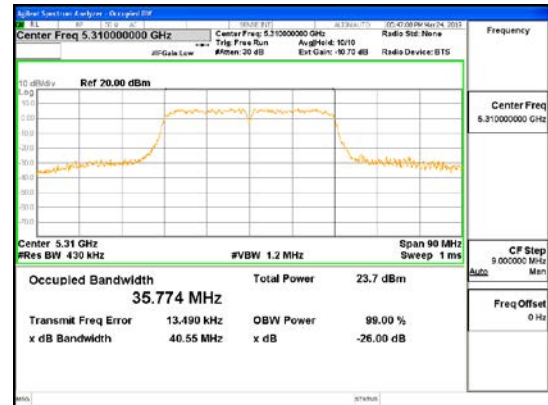



ANT3_802.11ac_VHT40_UNII 2A

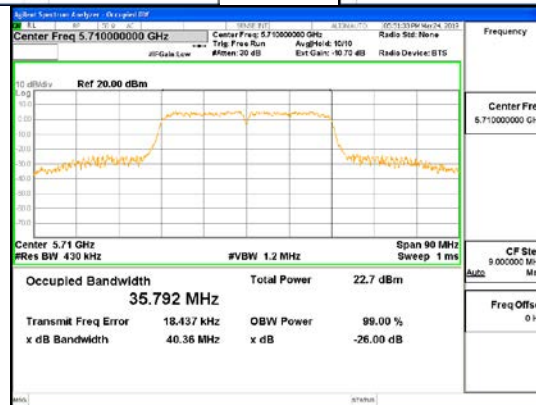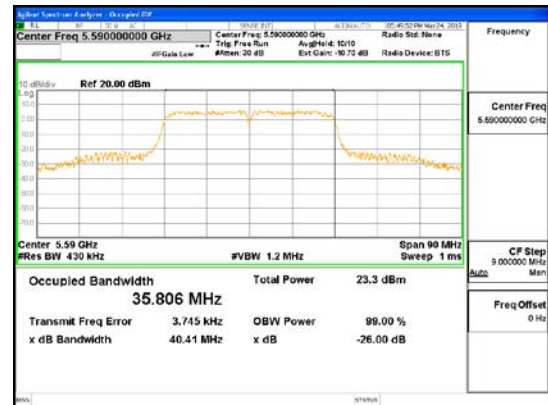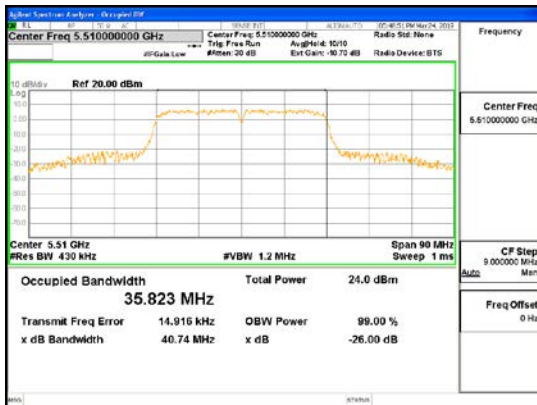


ANT3_802.11ac_VHT40_UNII 2C

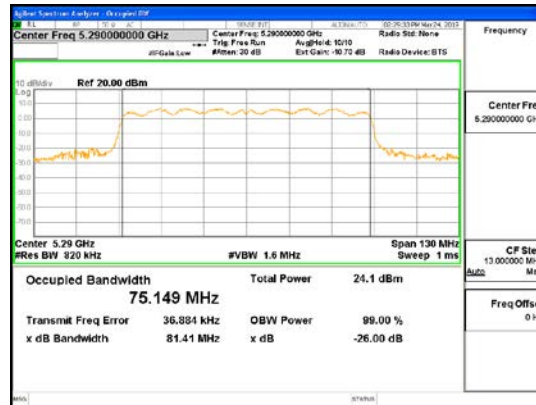



ANT1_802.11ac_VHT80_UNII 2A

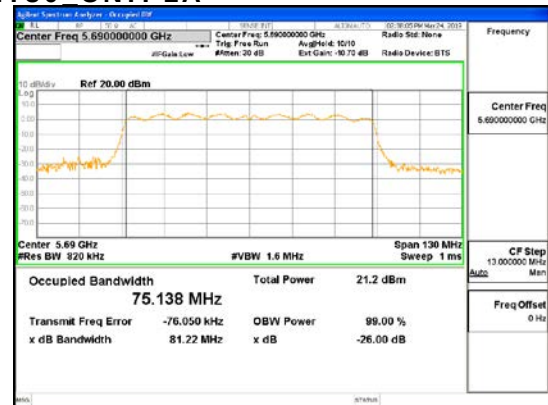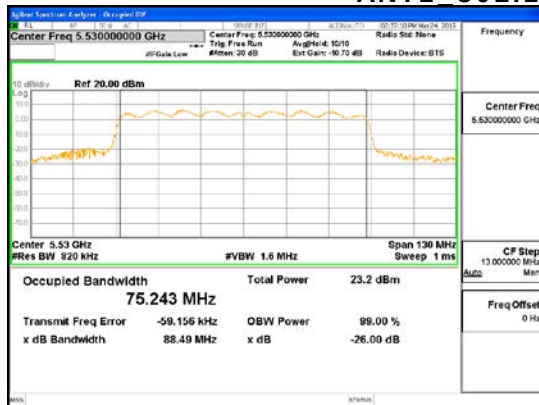


ANT1_802.11ac_VHT80_UNII 2C

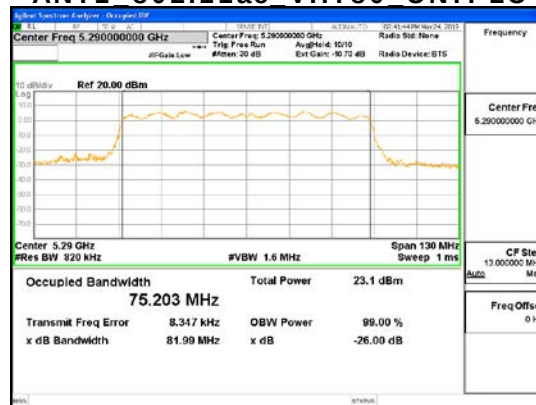


ANT2_802.11ac_VHT80_UNII 2A

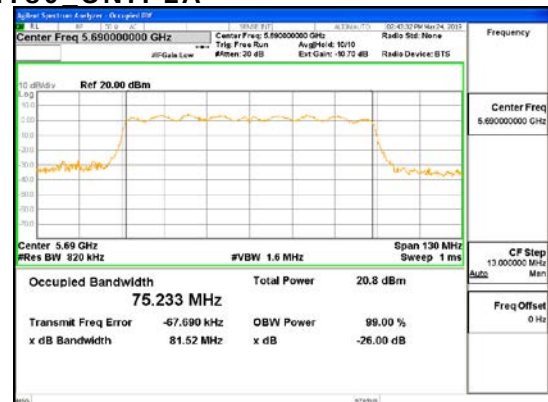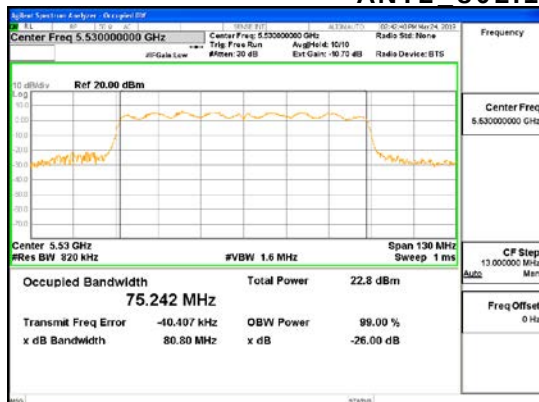


ANT2_802.11ac_VHT80_UNII 2C

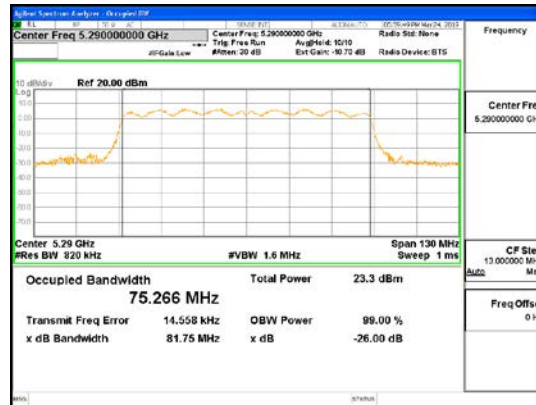

ANT3_802.11ac_VHT80_UNII 2A

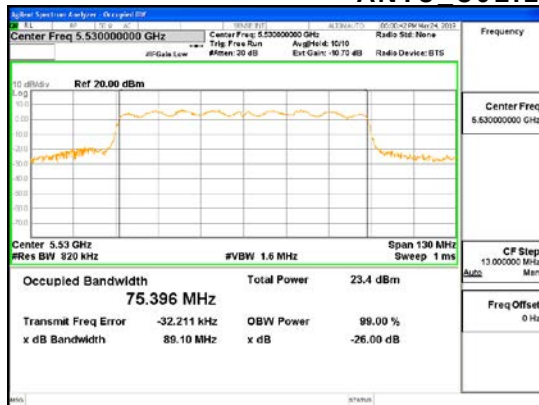

ANT3_802.11ac_VHT80_UNII 2C

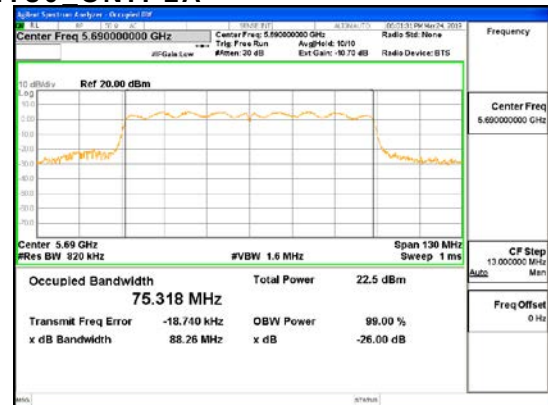


4.2 OUTPUT POWER

Test Procedures

KDB 789033 – Section E.2.d (Method SA-2, Maximum Conducted Output Power)
KDB 662911 D01, D02 (Multiple Transmitter Output)

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 1 MHz
- b) VBW $\geq 3 \times$ RBW
- c) Sweep time = auto
- d) Detector = power averaging (rms)
- e) Trace mode = Average at least 100
- f) Duty cycle factor = $10\log(1/x)$

Test mode		Duty Cycle Factor (dB)
CDD Mode	802.11a	0.12
	802.11n_HT20	0.15
	802.11n_HT40	0.28
	802.11ac_VHT20	0.17
	802.11ac_VHT40	0.33
	802.11ac_VHT80	0.50
SDM Mode	802.11n_HT20	0.29
	802.11n_HT40	0.65
	802.11ac_VHT20	0.41
	802.11ac_VHT40	0.60
	802.11ac_VHT80	1.02

Limit

Operating Mode	Band	Mode	ANT Configuration	ANT Gain (dBi)	Limit (dBm)
SISO	UNII 2A	802.11a/n/ac	ANT1, ANT2, ANT3	2.00	24.00
	UNII 2C				
MIMO (2Tx)	UNII 2A	802.11a/n/ac	ANT1 + ANT2	5.01	24.00
	UNII 2C				
MIMO (3Tx)	UNII 2A	802.11a/n/ac	ANT1 + ANT2 + ANT3	6.77	23.23
	UNII 2C				

Test Data

CDD Mode_ANT1

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	14.99	0.12	15.11	24.00	8.89
	5 300	15.17	0.12	15.29	24.00	8.71
	5 320	15.22	0.12	15.34	24.00	8.66
	5 500	14.78	0.12	14.90	24.00	9.10
	5 600	13.66	0.12	13.78	24.00	10.22
	5 720	10.19	0.12	10.31	24.00	13.69
802.11n_HT20	5 260	15.77	0.15	15.92	24.00	8.08
	5 300	15.82	0.15	15.97	24.00	8.03
	5 320	15.78	0.15	15.93	24.00	8.07
	5 500	15.67	0.15	15.82	24.00	8.18
	5 600	14.20	0.15	14.35	24.00	9.65
	5 720	11.01	0.15	11.16	24.00	12.84
802.11ac_VHT20	5 260	15.49	0.17	15.66	24.00	8.34
	5 300	15.55	0.17	15.72	24.00	8.28
	5 320	15.63	0.17	15.80	24.00	8.20
	5 500	15.30	0.17	15.47	24.00	8.53
	5 600	13.95	0.17	14.12	24.00	9.88
	5 720	10.94	0.17	11.11	24.00	12.89
802.11n_HT40	5 270	17.58	0.28	17.86	24.00	6.14
	5 310	17.63	0.28	17.91	24.00	6.09
	5 510	17.72	0.28	18.00	24.00	6.00
	5 590	16.72	0.28	17.00	24.00	7.00
	5 710	15.22	0.28	15.50	24.00	8.50
802.11ac_VHT40	5 270	17.62	0.33	17.95	24.00	6.05
	5 310	17.77	0.33	18.10	24.00	5.90
	5 510	17.71	0.33	18.04	24.00	5.96
	5 590	16.88	0.33	17.21	24.00	6.79
	5 710	15.35	0.33	15.68	24.00	8.32
802.11ac_VHT80	5 290	17.47	0.50	17.97	24.00	6.03
	5 530	17.29	0.50	17.79	24.00	6.21
	5 690	15.24	0.50	15.74	24.00	8.26
Measurement uncertainty		± 1.5 dB				

CDD Mode_ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	15.09	0.12	15.21	24.00	8.79
	5 300	14.79	0.12	14.91	24.00	9.09
	5 320	14.84	0.12	14.96	24.00	9.04
	5 500	14.98	0.12	15.10	24.00	8.90
	5 600	14.01	0.12	14.13	24.00	9.87
	5 720	14.27	0.12	14.39	24.00	9.61
802.11n_HT20	5 260	15.43	0.15	15.58	24.00	8.42
	5 300	15.13	0.15	15.28	24.00	8.72
	5 320	15.07	0.15	15.22	24.00	8.78
	5 500	15.29	0.15	15.44	24.00	8.56
	5 600	14.27	0.15	14.42	24.00	9.58
	5 720	14.47	0.15	14.62	24.00	9.38
802.11ac_VHT20	5 260	15.20	0.17	15.37	24.00	8.63
	5 300	14.90	0.17	15.07	24.00	8.93
	5 320	14.90	0.17	15.07	24.00	8.93
	5 500	15.16	0.17	15.33	24.00	8.67
	5 600	14.08	0.17	14.25	24.00	9.75
	5 720	14.36	0.17	14.53	24.00	9.47
802.11n_HT40	5 270	16.97	0.28	17.25	24.00	6.75
	5 310	16.83	0.28	17.11	24.00	6.89
	5 510	16.97	0.28	17.25	24.00	6.75
	5 590	16.21	0.28	16.49	24.00	7.51
	5 710	14.85	0.28	15.13	24.00	8.87
802.11ac_VHT40	5 270	17.12	0.33	17.45	24.00	6.55
	5 310	16.78	0.33	17.11	24.00	6.89
	5 510	17.05	0.33	17.38	24.00	6.62
	5 590	16.11	0.33	16.44	24.00	7.56
	5 710	14.78	0.33	15.11	24.00	8.89
802.11ac_VHT80	5 290	17.02	0.50	17.52	24.00	6.48
	5 530	16.87	0.50	17.37	24.00	6.63
	5 690	14.97	0.50	15.47	24.00	8.53
Measurement uncertainty		± 1.5 dB				

CDD Mode_ANT3

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	14.91	0.12	15.03	24.00	8.97
	5 300	14.64	0.12	14.76	24.00	9.24
	5 320	14.51	0.12	14.63	24.00	9.37
	5 500	14.43	0.12	14.55	24.00	9.45
	5 600	14.03	0.12	14.15	24.00	9.85
	5 720	14.19	0.12	14.31	24.00	9.69
802.11n_HT20	5 260	14.98	0.15	15.13	24.00	8.87
	5 300	14.85	0.15	15.00	24.00	9.00
	5 320	14.86	0.15	15.01	24.00	8.99
	5 500	15.41	0.15	15.56	24.00	8.44
	5 600	14.83	0.15	14.98	24.00	9.02
	5 720	15.02	0.15	15.17	24.00	8.83
802.11ac_VHT20	5 260	14.99	0.17	15.16	24.00	8.84
	5 300	14.90	0.17	15.07	24.00	8.93
	5 320	14.79	0.17	14.96	24.00	9.04
	5 500	15.83	0.17	16.00	24.00	8.00
	5 600	15.19	0.17	15.36	24.00	8.64
	5 720	15.36	0.17	15.53	24.00	8.47
802.11n_HT40	5 270	17.59	0.28	17.87	24.00	6.13
	5 310	17.41	0.28	17.69	24.00	6.31
	5 510	17.61	0.28	17.89	24.00	6.11
	5 590	16.99	0.28	17.27	24.00	6.73
	5 710	16.60	0.28	16.88	24.00	7.12
802.11ac_VHT40	5 270	17.90	0.33	18.23	24.00	5.77
	5 310	17.49	0.33	17.82	24.00	6.18
	5 510	17.74	0.33	18.07	24.00	5.93
	5 590	17.03	0.33	17.36	24.00	6.64
	5 710	16.60	0.33	16.93	24.00	7.07
802.11ac_VHT80	5 290	17.39	0.50	17.89	24.00	6.11
	5 530	17.38	0.50	17.88	24.00	6.12
	5 690	16.48	0.50	16.98	24.00	7.02
Measurement uncertainty		± 1.5 dB				

CDD Mode_ANT1+ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	18.05	0.12	18.17	24.00	5.83
	5 300	17.99	0.12	18.11	24.00	5.89
	5 320	18.04	0.12	18.16	24.00	5.84
	5 500	17.89	0.12	18.01	24.00	5.99
	5 600	16.85	0.12	16.97	24.00	7.03
	5 720	15.70	0.12	15.82	24.00	8.18
802.11n_HT20	5 260	18.61	0.15	18.76	24.00	5.24
	5 300	18.50	0.15	18.65	24.00	5.35
	5 320	18.45	0.15	18.60	24.00	5.40
	5 500	18.49	0.15	18.64	24.00	5.36
	5 600	17.25	0.15	17.40	24.00	6.60
	5 720	16.09	0.15	16.24	24.00	7.76
802.11ac_VHT20	5 260	18.36	0.17	18.53	24.00	5.47
	5 300	18.25	0.17	18.42	24.00	5.58
	5 320	18.29	0.17	18.46	24.00	5.54
	5 500	18.24	0.17	18.41	24.00	5.59
	5 600	17.03	0.17	17.20	24.00	6.80
	5 720	15.99	0.17	16.16	24.00	7.84
802.11n_HT40	5 270	20.30	0.28	20.58	24.00	3.42
	5 310	20.26	0.28	20.54	24.00	3.46
	5 510	20.37	0.28	20.65	24.00	3.35
	5 590	19.48	0.28	19.76	24.00	4.24
	5 710	18.05	0.28	18.33	24.00	5.67
802.11ac_VHT40	5 270	20.39	0.33	20.72	24.00	3.28
	5 310	20.31	0.33	20.64	24.00	3.36
	5 510	20.40	0.33	20.73	24.00	3.27
	5 590	19.52	0.33	19.85	24.00	4.15
	5 710	18.08	0.33	18.41	24.00	5.59
802.11ac_VHT80	5 290	20.26	0.50	20.76	24.00	3.24
	5 530	20.10	0.50	20.60	24.00	3.40
	5 690	18.12	0.50	18.62	24.00	5.38
Measurement uncertainty		± 1.5 dB				

CDD Mode_ANT1+ANT2+ANT3

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	19.77	0.12	19.89	23.23	3.34
	5 300	19.64	0.12	19.76	23.23	3.47
	5 320	19.64	0.12	19.76	23.23	3.47
	5 500	19.51	0.12	19.63	23.23	3.60
	5 600	18.67	0.12	18.79	23.23	4.44
	5 720	18.02	0.12	18.14	23.23	5.09
802.11n_HT20	5 260	20.18	0.15	20.33	23.23	2.90
	5 300	20.06	0.15	20.21	23.23	3.02
	5 320	20.03	0.15	20.18	23.23	3.05
	5 500	20.23	0.15	20.38	23.23	2.85
	5 600	19.21	0.15	19.36	23.23	3.87
	5 720	18.60	0.15	18.75	23.23	4.48
802.11ac_VHT20	5 260	20.00	0.17	20.17	23.23	3.06
	5 300	19.90	0.17	20.07	23.23	3.16
	5 320	19.89	0.17	20.06	23.23	3.17
	5 500	20.21	0.17	20.38	23.23	2.85
	5 600	19.21	0.17	19.38	23.23	3.85
	5 720	18.70	0.17	18.87	23.23	4.36
802.11n_HT40	5 270	22.16	0.28	22.44	23.23	0.79
	5 310	22.07	0.28	22.35	23.23	0.88
	5 510	22.22	0.28	22.50	23.23	0.73
	5 590	21.42	0.28	21.70	23.23	1.53
	5 710	20.40	0.28	20.68	23.23	2.55
802.11ac_VHT40	5 270	22.33	0.33	22.66	23.23	0.57
	5 310	22.14	0.33	22.47	23.23	0.76
	5 510	22.28	0.33	22.61	23.23	0.62
	5 590	21.46	0.33	21.79	23.23	1.44
	5 710	20.42	0.33	20.75	23.23	2.48
802.11ac_VHT80	5 290	22.07	0.50	22.57	23.23	0.66
	5 530	21.96	0.50	22.46	23.23	0.77
	5 690	20.39	0.50	20.89	23.23	2.34
Measurement uncertainty		± 1.5 dB				

SDM Mode_ANT1

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	16.07	0.29	16.36	24.00	7.64
	5 300	15.93	0.29	16.22	24.00	7.78
	5 320	15.99	0.29	16.28	24.00	7.72
	5 500	15.62	0.29	15.91	24.00	8.09
	5 600	14.33	0.29	14.62	24.00	9.38
	5 720	11.66	0.29	11.95	24.00	12.05
802.11ac_VHT20	5 260	15.84	0.41	16.25	24.00	7.75
	5 300	15.84	0.41	16.25	24.00	7.75
	5 320	15.91	0.41	16.32	24.00	7.68
	5 500	15.73	0.41	16.14	24.00	7.86
	5 600	14.21	0.41	14.62	24.00	9.38
	5 720	11.50	0.41	11.91	24.00	12.09
802.11n_HT40	5 270	17.35	0.65	18.00	24.00	6.00
	5 310	17.35	0.65	18.00	24.00	6.00
	5 510	17.47	0.65	18.12	24.00	5.88
	5 590	16.44	0.65	17.09	24.00	6.91
	5 710	14.86	0.65	15.51	24.00	8.49
802.11ac_VHT40	5 270	17.35	0.60	17.95	24.00	6.05
	5 310	17.37	0.60	17.97	24.00	6.03
	5 510	17.38	0.60	17.98	24.00	6.02
	5 590	16.37	0.60	16.97	24.00	7.03
	5 710	14.79	0.60	15.39	24.00	8.61
802.11ac_VHT80	5 290	15.99	1.02	17.01	24.00	6.99
	5 530	16.96	1.02	17.98	24.00	6.02
	5 690	14.77	1.02	15.79	24.00	8.21
Measurement uncertainty		± 1.5 dB				

SDM Mode_ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	15.58	0.29	15.87	24.00	8.13
	5 300	15.47	0.29	15.76	24.00	8.24
	5 320	15.48	0.29	15.77	24.00	8.23
	5 500	15.27	0.29	15.56	24.00	8.44
	5 600	14.15	0.29	14.44	24.00	9.56
	5 720	15.49	0.29	15.78	24.00	8.22
802.11ac_VHT20	5 260	15.17	0.41	15.58	24.00	8.42
	5 300	14.93	0.41	15.34	24.00	8.66
	5 320	14.88	0.41	15.29	24.00	8.71
	5 500	14.94	0.41	15.35	24.00	8.65
	5 600	13.77	0.41	14.18	24.00	9.82
	5 720	15.16	0.41	15.57	24.00	8.43
802.11n_HT40	5 270	17.22	0.65	17.87	24.00	6.13
	5 310	17.06	0.65	17.71	24.00	6.29
	5 510	17.36	0.65	18.01	24.00	5.99
	5 590	16.40	0.65	17.05	24.00	6.95
	5 710	14.92	0.65	15.57	24.00	8.43
802.11ac_VHT40	5 270	17.07	0.60	17.67	24.00	6.33
	5 310	16.97	0.60	17.57	24.00	6.43
	5 510	17.23	0.60	17.83	24.00	6.17
	5 590	16.26	0.60	16.86	24.00	7.14
	5 710	14.87	0.60	15.47	24.00	8.53
802.11ac_VHT80	5 290	16.86	1.02	17.88	24.00	6.12
	5 530	16.98	1.02	18.00	24.00	6.00
	5 690	14.94	1.02	15.96	24.00	8.04
Measurement uncertainty		± 1.5 dB				

SDM Mode_ANT3

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	15.64	0.29	15.93	24.00	8.07
	5 300	15.51	0.29	15.80	24.00	8.20
	5 320	15.71	0.29	16.00	24.00	8.00
	5 500	16.26	0.29	16.55	24.00	7.45
	5 600	15.48	0.29	15.77	24.00	8.23
	5 720	15.56	0.29	15.85	24.00	8.15
802.11ac_VHT20	5 260	15.54	0.41	15.95	24.00	8.05
	5 300	15.26	0.41	15.67	24.00	8.33
	5 320	15.15	0.41	15.56	24.00	8.44
	5 500	15.52	0.41	15.93	24.00	8.07
	5 600	14.91	0.41	15.32	24.00	8.68
	5 720	15.70	0.41	16.11	24.00	7.89
802.11n_HT40	5 270	17.47	0.65	18.12	24.00	5.88
	5 310	17.48	0.65	18.13	24.00	5.87
	5 510	17.51	0.65	18.16	24.00	5.84
	5 590	17.12	0.65	17.77	24.00	6.23
	5 710	16.66	0.65	17.31	24.00	6.69
802.11ac_VHT40	5 270	17.46	0.60	18.06	24.00	5.94
	5 310	17.30	0.60	17.90	24.00	6.10
	5 510	17.48	0.60	18.08	24.00	5.92
	5 590	16.98	0.60	17.58	24.00	6.42
	5 710	16.56	0.60	17.16	24.00	6.84
802.11ac_VHT80	5 290	16.94	1.02	17.96	24.00	6.04
	5 530	16.82	1.02	17.84	24.00	6.16
	5 690	15.73	1.02	16.75	24.00	7.25
Measurement uncertainty		± 1.5 dB				

SDM Mode_ANT1+ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	18.84	0.29	19.13	24.00	4.87
	5 300	18.72	0.29	19.01	24.00	4.99
	5 320	18.75	0.29	19.04	24.00	4.96
	5 500	18.46	0.29	18.75	24.00	5.25
	5 600	17.25	0.29	17.54	24.00	6.46
	5 720	16.99	0.29	17.28	24.00	6.72
802.11ac_VHT20	5 260	18.53	0.41	18.94	24.00	5.06
	5 300	18.42	0.41	18.83	24.00	5.17
	5 320	18.44	0.41	18.85	24.00	5.15
	5 500	18.36	0.41	18.77	24.00	5.23
	5 600	17.01	0.41	17.42	24.00	6.58
	5 720	16.71	0.41	17.12	24.00	6.88
802.11n_HT40	5 270	20.30	0.65	20.95	24.00	3.05
	5 310	20.22	0.65	20.87	24.00	3.13
	5 510	20.43	0.65	21.08	24.00	2.92
	5 590	19.43	0.65	20.08	24.00	3.92
	5 710	17.90	0.65	18.55	24.00	5.45
802.11ac_VHT40	5 270	20.22	0.60	20.82	24.00	3.18
	5 310	20.18	0.60	20.78	24.00	3.22
	5 510	20.32	0.60	20.92	24.00	3.08
	5 590	19.33	0.60	19.93	24.00	4.07
	5 710	17.84	0.60	18.44	24.00	5.56
802.11ac_VHT80	5 290	19.46	1.02	20.48	24.00	3.52
	5 530	19.98	1.02	21.00	24.00	3.00
	5 690	17.87	1.02	18.89	24.00	5.11
Measurement uncertainty		± 1.5 dB				


SDM Mode_ANT1+ANT2+ANT3

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	20.54	0.29	20.83	23.23	2.40
	5 300	20.41	0.29	20.70	23.23	2.53
	5 320	20.50	0.29	20.79	23.23	2.44
	5 500	20.51	0.29	20.80	23.23	2.43
	5 600	19.47	0.29	19.76	23.23	3.47
	5 720	19.35	0.29	19.64	23.23	3.59
802.11ac_VHT20	5 260	20.30	0.41	20.71	23.23	2.52
	5 300	20.13	0.41	20.54	23.23	2.69
	5 320	20.11	0.41	20.52	23.23	2.71
	5 500	20.18	0.41	20.59	23.23	2.64
	5 600	19.09	0.41	19.50	23.23	3.73
	5 720	19.25	0.41	19.66	23.23	3.57
802.11n_HT40	5 270	22.12	0.65	22.77	23.23	0.46
	5 310	22.07	0.65	22.72	23.23	0.51
	5 510	22.22	0.65	22.87	23.23	0.36
	5 590	21.44	0.65	22.09	23.23	1.14
	5 710	20.33	0.65	20.98	23.23	2.25
802.11ac_VHT40	5 270	22.07	0.60	22.67	23.23	0.56
	5 310	21.99	0.60	22.59	23.23	0.64
	5 510	22.14	0.60	22.74	23.23	0.49
	5 590	21.32	0.60	21.92	23.23	1.31
	5 710	20.26	0.60	20.86	23.23	2.37
802.11ac_VHT80	5 290	21.39	1.02	22.41	23.23	0.82
	5 530	21.69	1.02	22.71	23.23	0.52
	5 690	19.94	1.02	20.96	23.23	2.27
Measurement uncertainty		± 1.5 dB				

See next pages for actual measured spectrum plots.






CDD Mode_ANT1_802.11a_UNII 2A

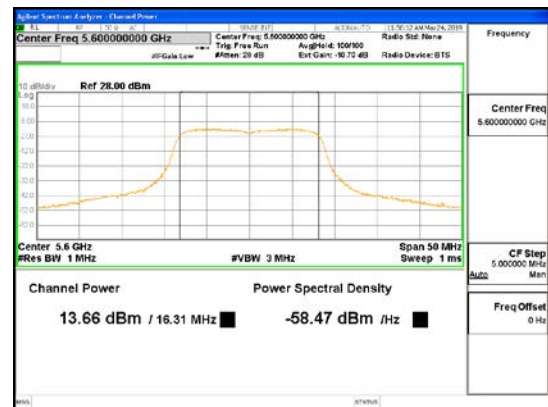


CDD Mode_ANT1_802.11a_UNII 2C





CDD Mode_ANT2_802.11a_UNII 2A

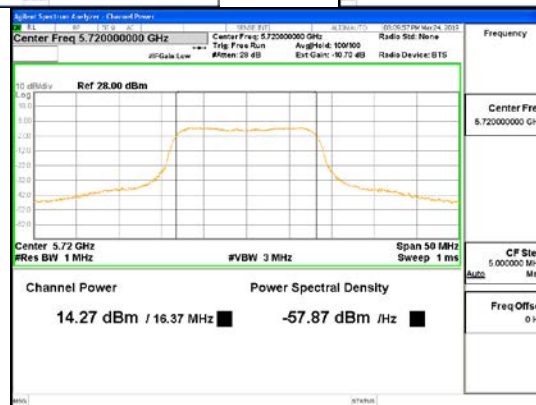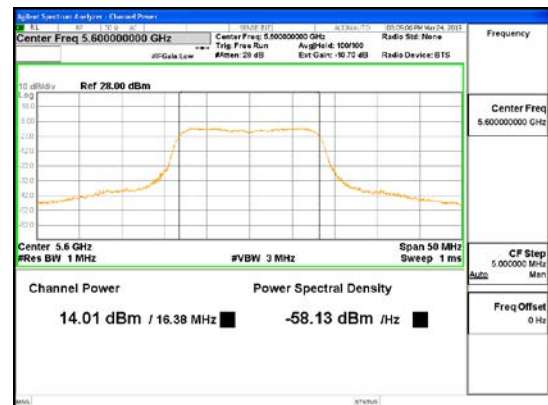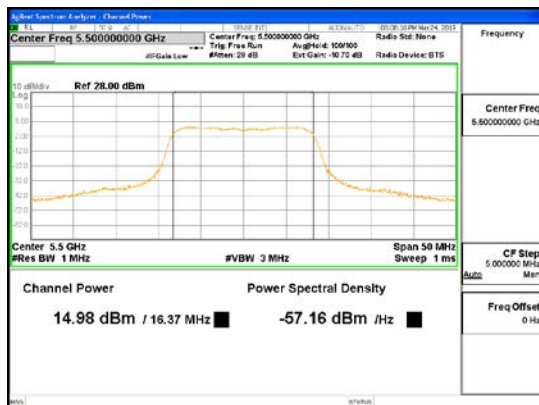



CDD Mode_ANT2_802.11a_UNII 2C

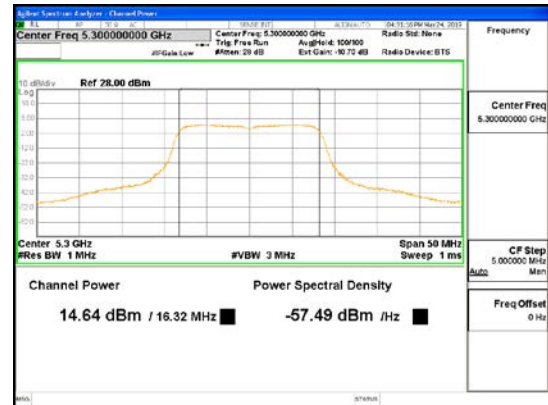




CDD Mode_ANT3_802.11a_UNII 2A

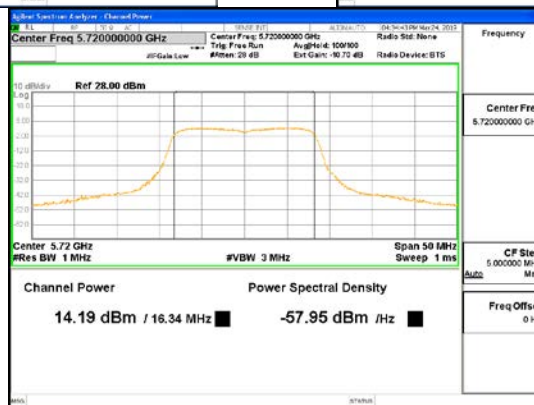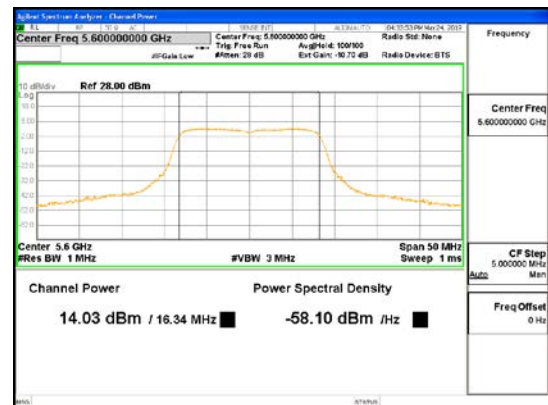



CDD Mode_ANT3_802.11a_UNII 2C

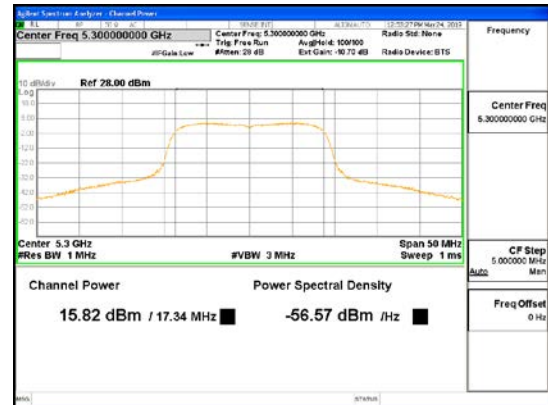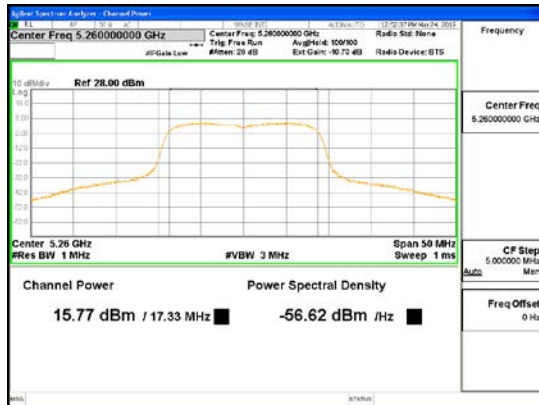



CDD Mode_ANT1_802.11n_HT20_UNII 2A

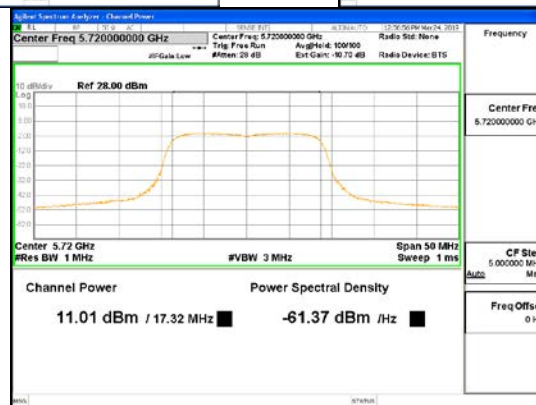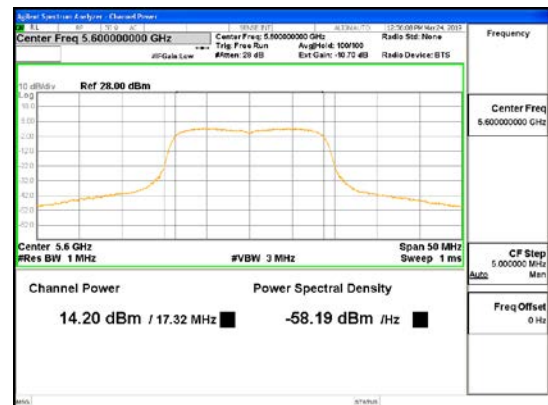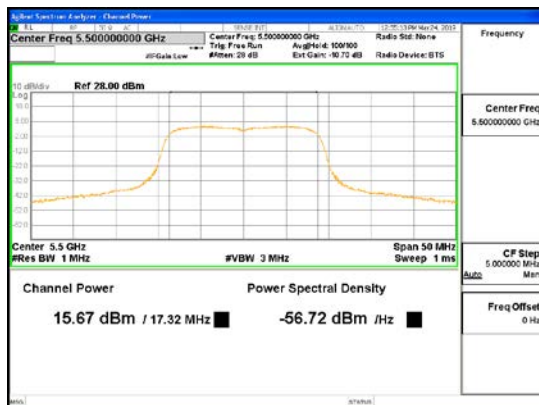


CDD Mode_ANT1_802.11n_HT20_UNII 2C

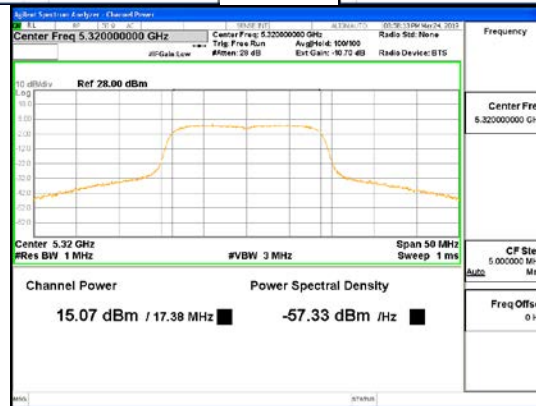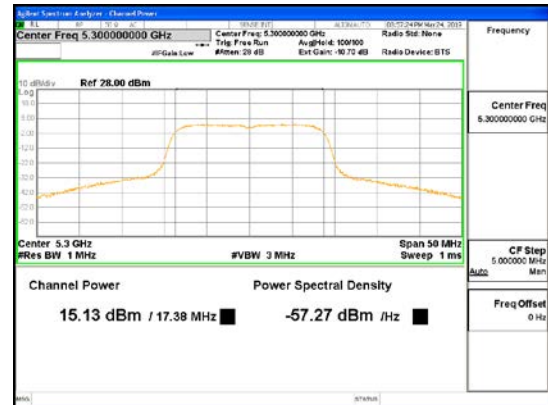



CDD Mode_ANT2_802.11n_HT20_UNII 2A

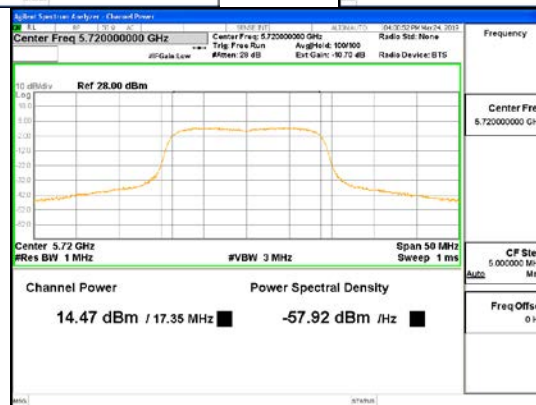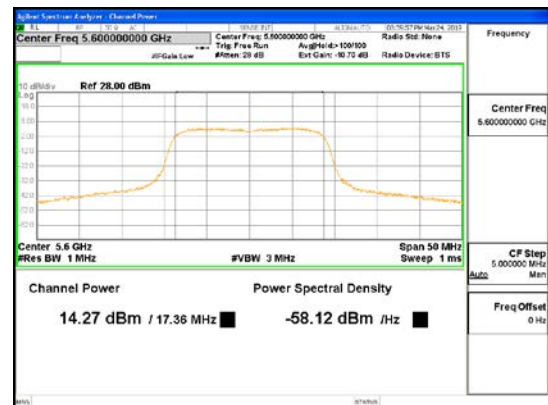


CDD Mode_ANT2_802.11n_HT20_UNII 2C

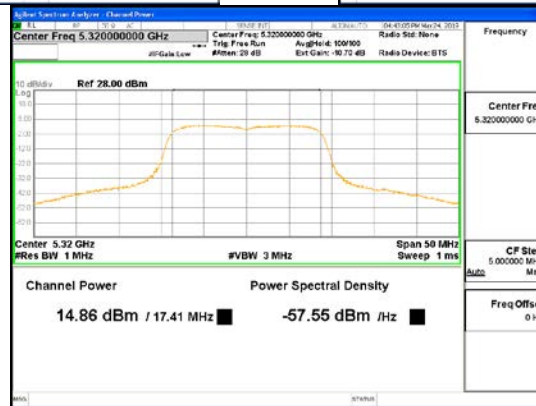




CDD Mode_ANT3_802.11n_HT20_UNII 2A

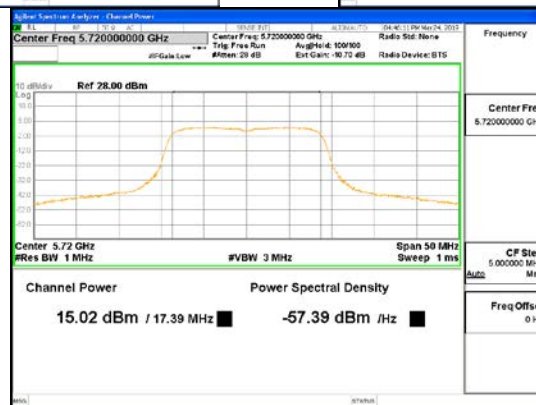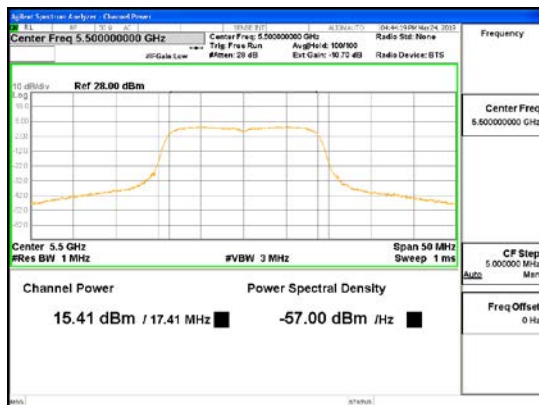

CDD Mode_ANT3_802.11n_HT20_UNII 2C

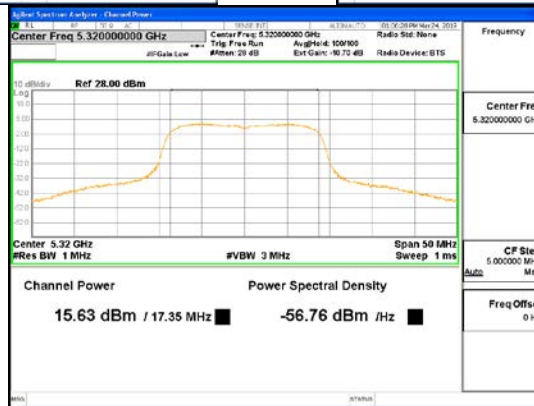




CDD Mode_ANT1_802.11ac_VHT20_UNII 2A

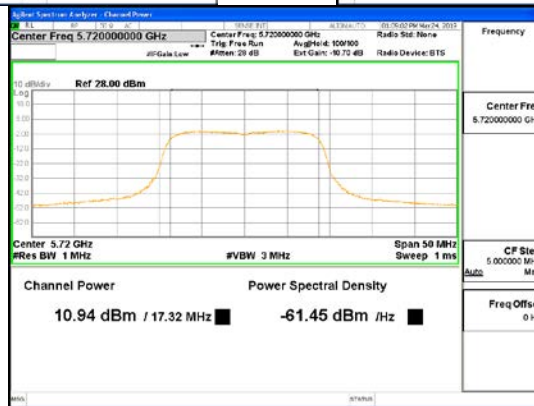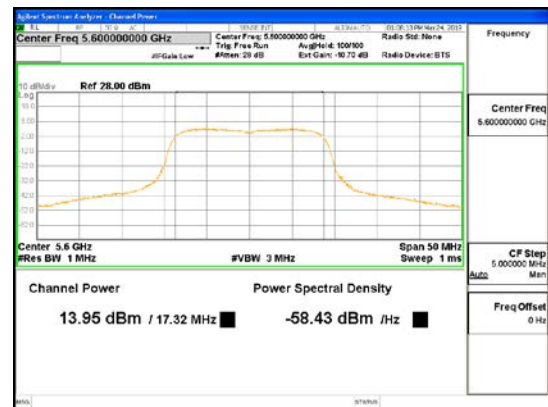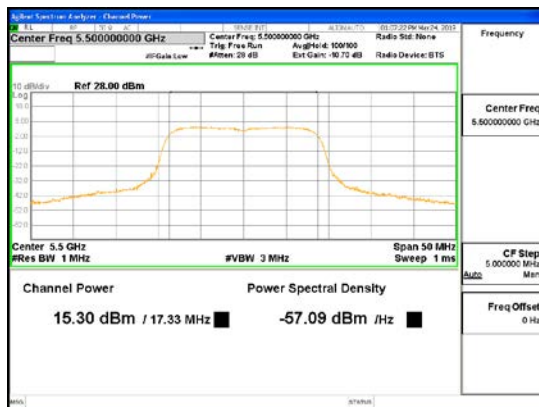


CDD Mode_ANT1_802.11ac_VHT20_UNII 2C





CDD Mode_ANT2_802.11ac_VHT20_UNII 2A

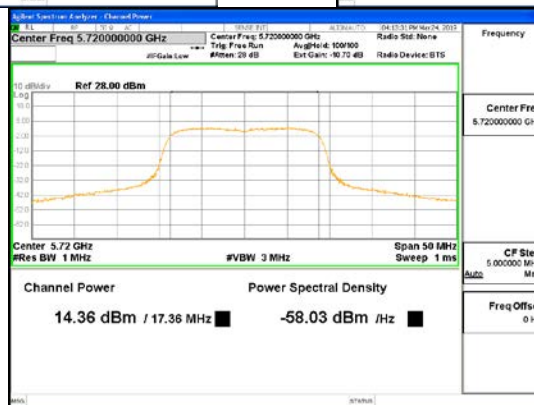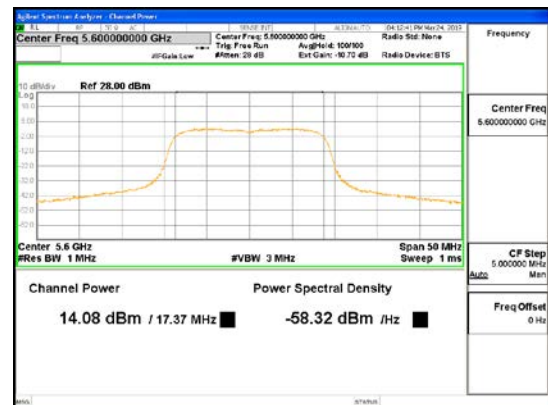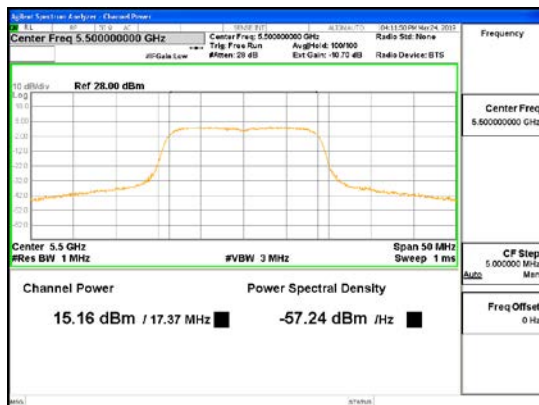


CDD Mode_ANT2_802.11ac_VHT20_UNII 2C

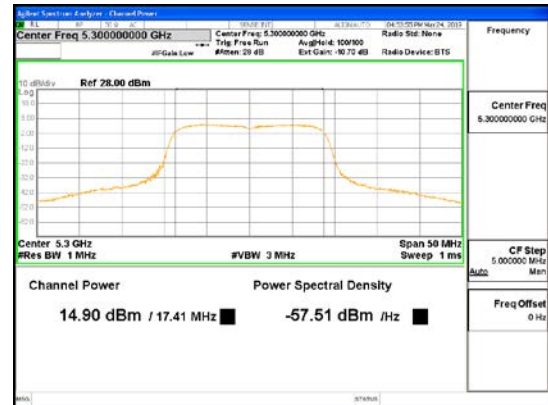




CDD Mode_ANT3_802.11ac_VHT20_UNII 2A

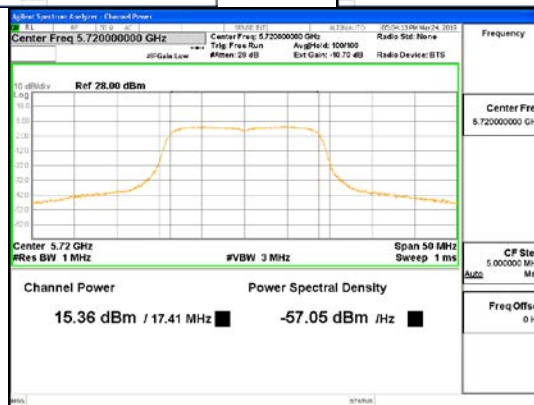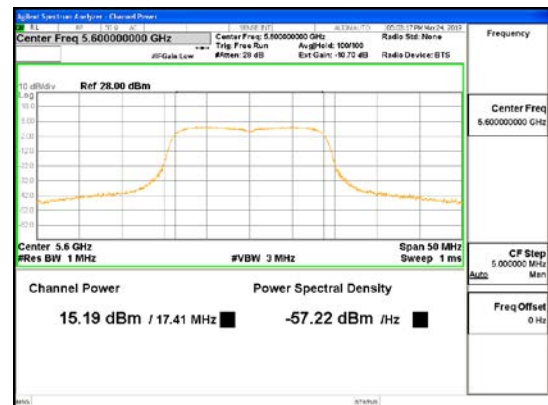

CDD Mode_ANT3_802.11ac_VHT20_UNII 2C

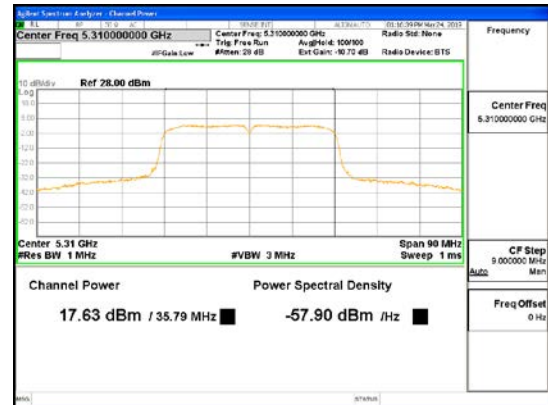


CDD Mode_ANT1_802.11n_HT40_UNII 2A

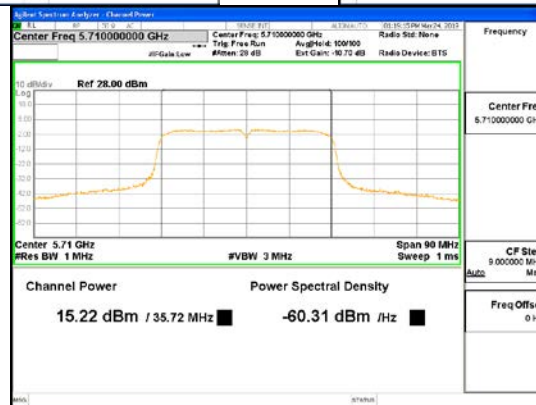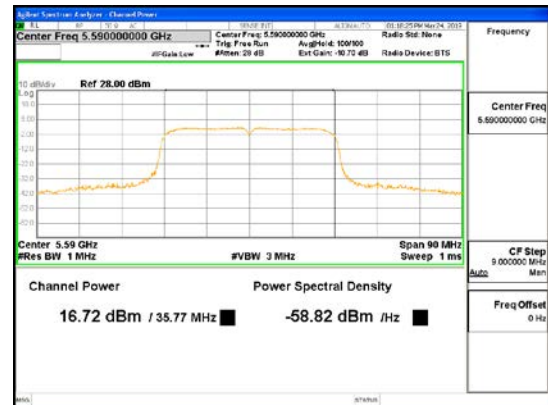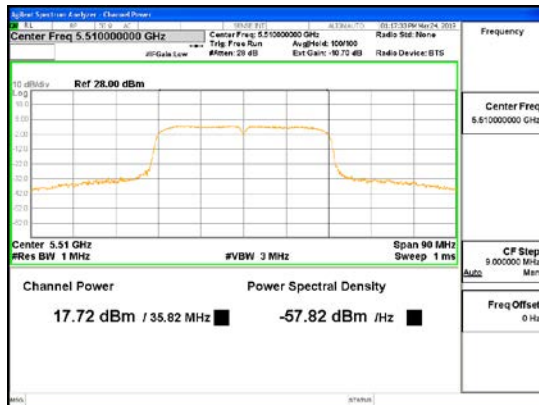

CDD Mode_ANT1_802.11n_HT40_UNII 2C






CDD Mode_ANT2_802.11n_HT40_UNII 2A

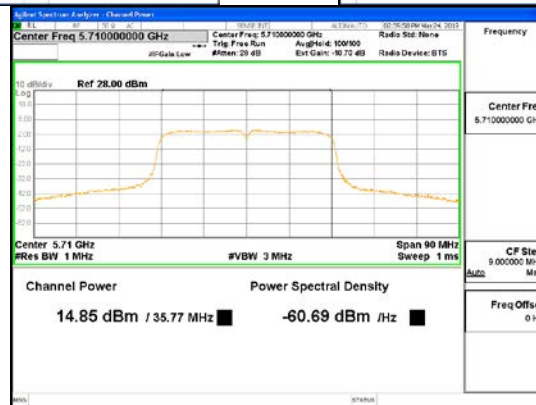


CDD Mode_ANT2_802.11n_HT40_UNII 2C






CDD Mode_ANT3_802.11n_HT40_UNII 2A

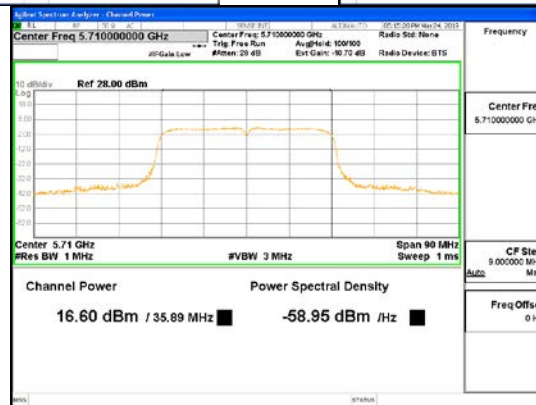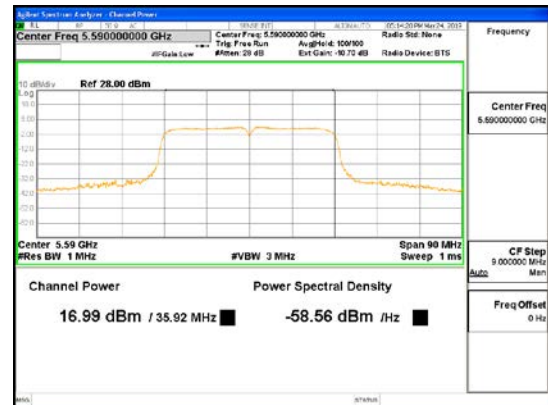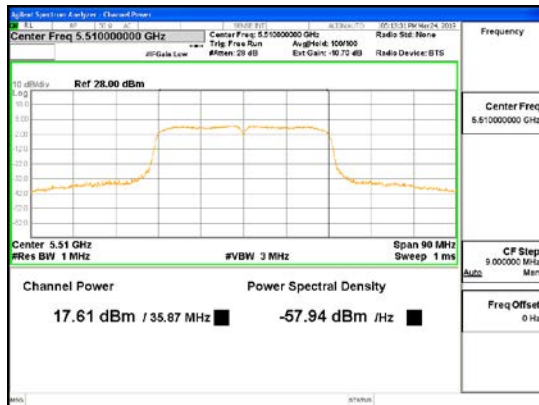

CDD Mode_ANT3_802.11n_HT40_UNII 2C

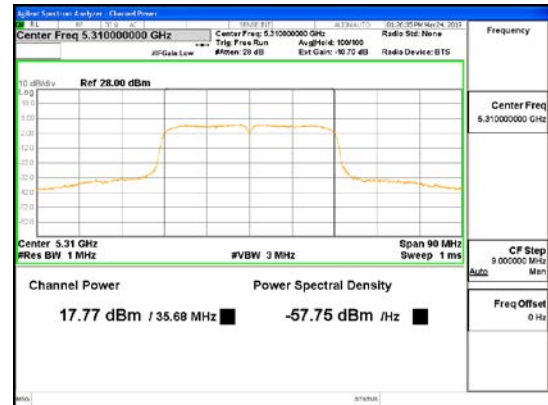



CDD Mode_ANT1_802.11ac_VHT40_UNII 2A

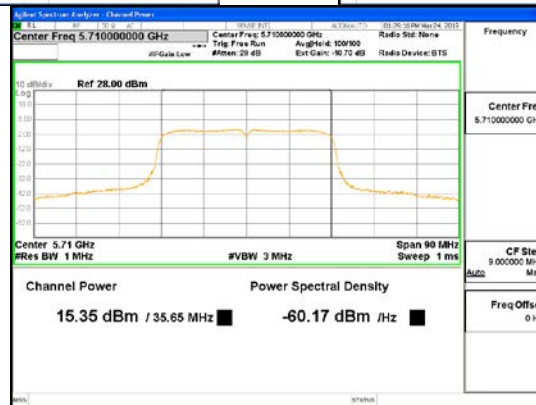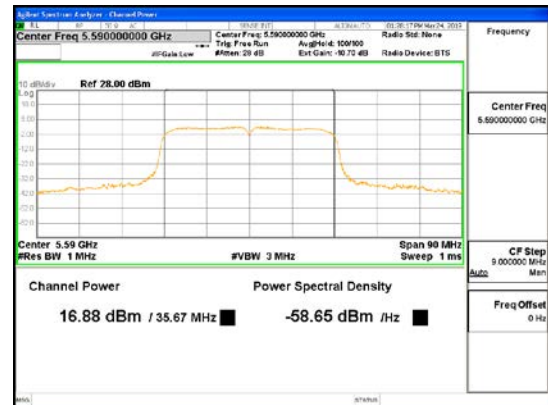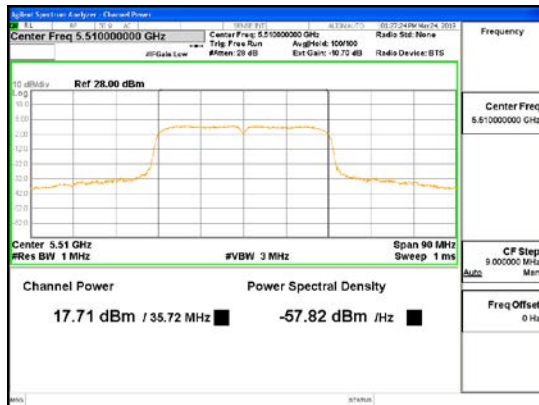


CDD Mode_ANT1_802.11ac_VHT40_UNII 2C






CDD Mode_ANT2_802.11ac_VHT40_UNII 2A

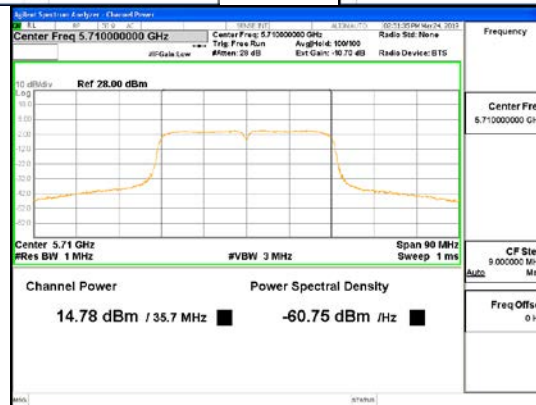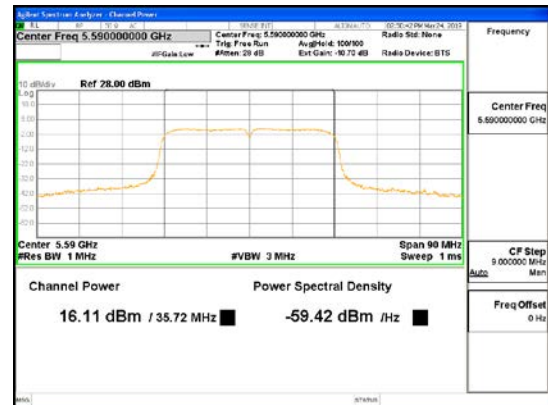


CDD Mode_ANT2_802.11ac_VHT40_UNII 2C

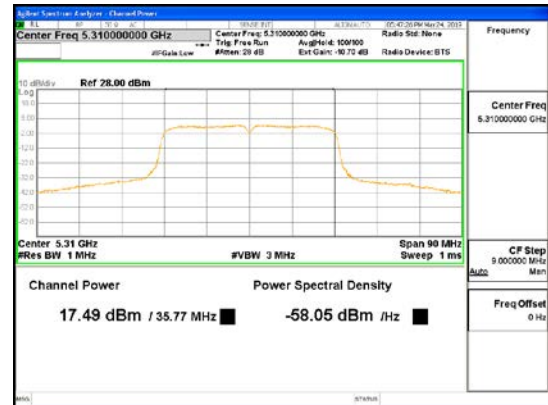



CDD Mode_ANT3_802.11ac_VHT40_UNII 2A

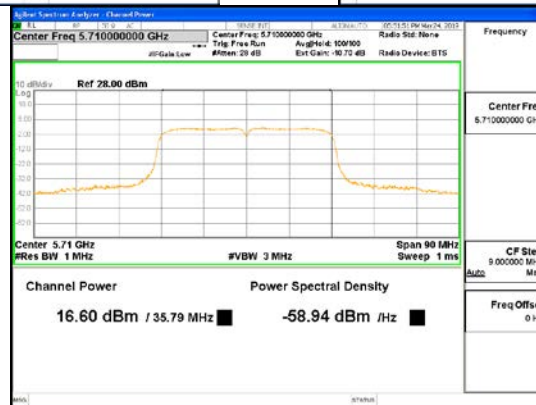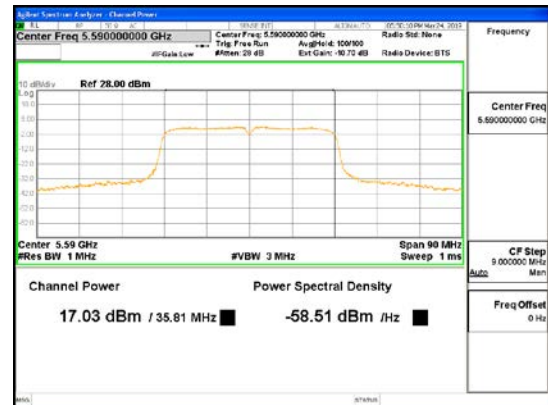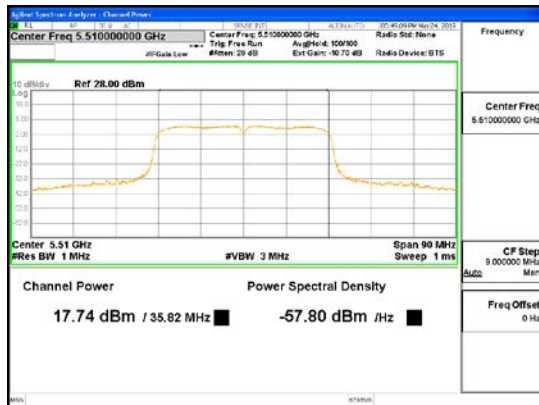


CDD Mode_ANT3_802.11ac_VHT40_UNII 2C

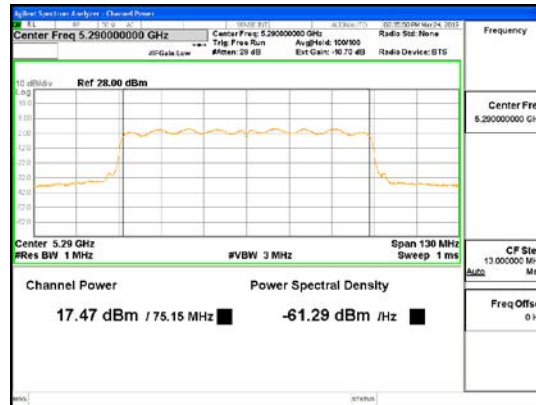



CDD Mode_ANT1_802.11ac_VHT80_UNII 2A

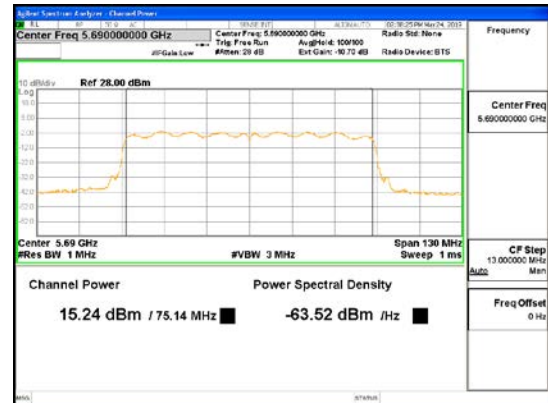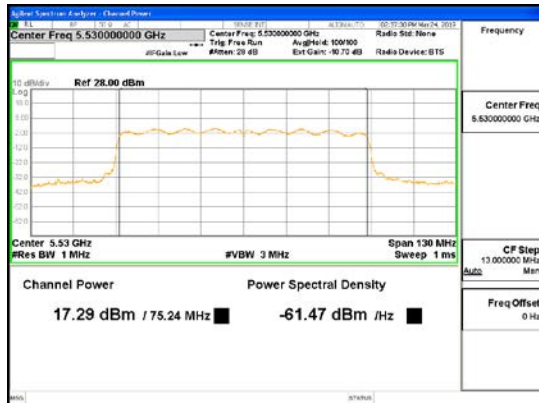

CDD Mode_ANT1_802.11ac_VHT80_UNII 2C

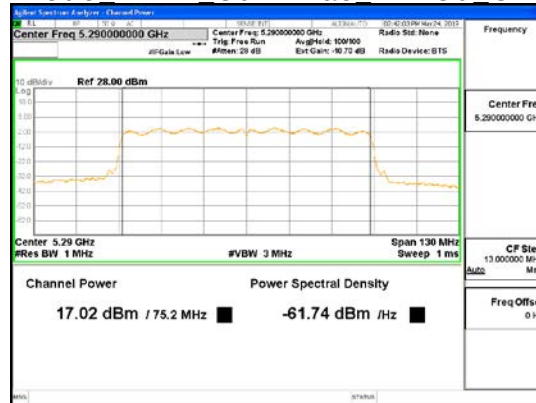

CDD Mode_ANT2_802.11ac_VHT80_UNII 2A

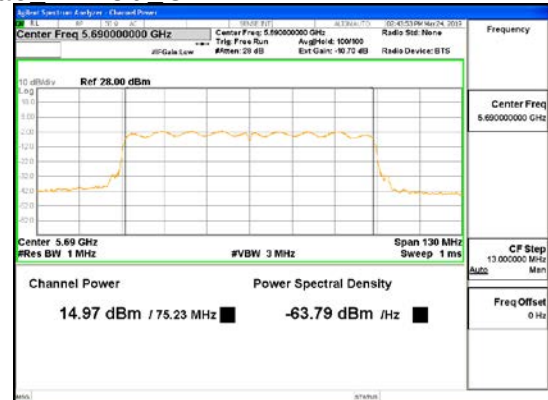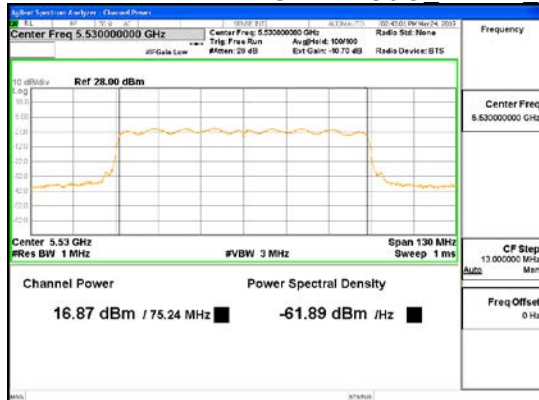

CDD Mode_ANT2_802.11ac_VHT80_UNII 2C