

Wireless test report – REP039744

Applicant:

TOPCON POSITIONING SYSTEMS, INC.
7400 National Drive, Livermore CA 94551, USA

Product name:

Multiradio module

Model:

CL55

FCC ID:

WR4-CL55

IC Registration number

6050B-CL55

Variant:

CL-55 3G, CL-55 3G +RADIO, CL-55 3G SDF,
CL-55 3G +RADIO SDF

Specifications:

- ◆ FCC 47 CFR Part 15 Subpart C, §15.209 and RSS-Gen Issue 5 §8.9
- ◆ FCC 47 CFR Part 15 Subpart C, §15.247 (d) and RSS-247 Issue 3 §5.5
- ◆ FCC 47 CFR Part 15 Subpart E, §15.407 (b) and RSS-247 Issue 3 §6.2
- ◆ FCC 47 CFR Part 27 Subpart C, §27.53 (c) and (h)
- ◆ FCC 47 CFR Part 22 Subpart H, §22.917 (a) and RSS-132 Issue 4 §5.5
- ◆ FCC 47 CFR Part 24 Subpart E, §24.238 (a) and RSS-133 Issue 6 §6.5.1

This test report may not be partially reproduced, except with the prior written permission of Nemko Spa

The test report merely corresponds to the tested sample.

The phase of sampling / collection of equipment under test is carried out by the customer.

Test location(s)

Company name	Nemko Spa
Address	Via del Carroccio, 4
City	Biassono
Province	MB
Postal code	20853
Country	Italy
Telephone	+39 039 220 12 01
Facsimile	+39 039 220 12 21
Website	www.nemko.com
Site number	FCC test site registration number: 682159 (10 m semi anechoic chamber) ISED test site number: 9109A

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Spa's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Date of issue: October 19, 2023

Tested by
(name, function) O. Frau

(project handler)

Signature: 

Reviewed by
(name, function) R. Giampaglia

(verifier)

Signature:

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Test methods	4
1.4 Statement of compliance	4
1.5 Exclusions	4
1.6 Test report revision history	5
Section 2. Summary of test results	6
2.1 FCC Part 15 Subpart C, FCC Part 22 Subpart H and FCC Part 24 Subpart E test results	6
2.2 RSS test results	6
Section 3. Equipment under test (EUT) details	7
3.1 Sample information	7
3.2 EUT information	7
3.3 Technical information	7
3.4 EUT setup diagram	8
3.5 EUT sub assemblies	8
Section 4. Engineering considerations	9
4.1 Modifications incorporated in the EUT	9
4.2 Technical judgment	9
4.3 Deviations from laboratory tests procedures	9
Section 5. Test conditions	10
5.1 Atmospheric conditions	10
5.2 Power supply range	10
Section 6. Measurement uncertainty	11
6.1 Uncertainty of measurement	11
Section 7. Test equipment	12
7.1 Test equipment list	12
Section 8. Testing data	13
8.1 Radiated emission	13
Section 9. Block diagrams of test set-ups	81
9.1 Radiated emissions set-up for frequencies below 1 GHz	81
9.2 Radiated emissions set-up for frequencies above 1 GHz	81
Section 10. Photos	82
10.1 Photos of the test set-up	82
10.2 Photos of the EUT	83

Section 1. Report summary

1.1 Applicant and manufacturer

Company name	TOPCON POSITIONING SYSTEMS, INC.
Address	7400 National Drive, Livermore CA 94551, USA

1.2 Test specifications

FCC 47 CFR Part 15 Subpart C, §15.209	Radiated emission limits; general requirements. Operation within the bands 902.2 -927.8 MHz, 2400-2483.5 MHz, and 5725-5850 MHz. Unlicensed National Information Infrastructure Devices
FCC 47 CFR Part 15 Subpart C, §15.247	
FCC 47 CFR Part 15 Subpart E, §15.407	
FCC 47 CFR Part 22 Subpart H, §22.917	Emission limitations for cellular equipment.
FCC 47 CFR Part 24 Subpart E, §24.238	Emission limitations for Broadband PCS equipment.
RSS-Gen Issue 5, April 2018, Amendment 1 (March 2019), Amendment 2 (February 2021) - §8.9	General Requirements for Compliance of Radio Apparatus - Transmitter emission limits Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices - Unwanted emissions Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices - Power and unwanted emissions limits Cellular Systems Operating in the Bands 824-849 MHz and 869-894 MHz - Transmitter Unwanted Emissions 2 GHz Personal Communications Services - Transmitter Unwanted Emissions
RSS-247 Issue 3, August 2023 - §5.5	
RSS-247 Issue 3, August 2023 - §6.2	
RSS-132 Issue 4, January 31, 2023 - §5.5	
RSS-133 Issue 6 Amendment 1, January 18, 2018 - §6.5.1	

1.3 Test methods

ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.26 v2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.5 below. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.5 Exclusions

As per quote, the purpose of this report is verification of transmitters colocation. Only inter-modulation products within restricted bands were assessed, other requirements were excluded from the scope of this report.

1.6 Test report revision history

Revision #	Date of issue	Details of changes made to test report
REP039744	October 19, 2023	Original report issued

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, FCC Part 22 Subpart H and FCC Part 24 Subpart E test results

Part	Test description	Verdict
§15.209	Radiated emission limits; general requirements.	Pass
§15.247 (d)	Spurious emissions.	Pass
§15.407 (b)	Undesirable emission limits.	Pass
§22.917 (a)	Out of band emissions for cellular equipment.	Pass
§24.238 (a)	Out of band emissions for Broadband PCS equipment.	Pass

2.2 RSS test results

Part	Test description	Verdict
RSS-Gen Issue 5 §8.9	Transmitter emission limits	Pass
RSS-247 Issue 3 §5.5	Unwanted emissions	Pass
RSS-247 Issue 3 §6.2	Unwanted emission limits	Pass
RSS-132 Issue 4 §5.5	Transmitter Unwanted Emissions	Pass
RSS-133 Issue 6 §6.5.1	Transmitter Unwanted Emissions	Pass

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	February 25, 2019
Nemko sample ID number	367596-1/3

3.2 EUT information

Product name	Multiradio module
Model	CL-55 3G+RADIO
Serial number	1907009AA

3.3 Technical information

Frequency band	WIFI/ BT/BLE: 2400–2483.5 MHz band WIFI: 5150–5250 MHz, 5250–5350 MHz 5450–5725 and 5725–5850 MHz WCDMA: North American Bands UHF: 902.2 – 927.8 MHz
Type of modulation	GFSK, 802.11a/n, OFDM
Emission classification (F1D, G1D, D1D)	F1D, W7D
EUT power requirements	8 to 36 V DC
Antenna information	The EUT uses a unique antenna coupling. EUT has 2 antenna configurations. First configuration: 4 in 1 antenna Taoglas model MA245-LBIC.008 with 3.0 mt cable and half wave antenna ComAnt model CA915H_A. Second configuration: 4 in 1 antenna Taoglas model MA245-LBIC.008 with 0.4 m cable and half wave antenna ComAnt model CA915H_A.

3.4 EUT setup diagram

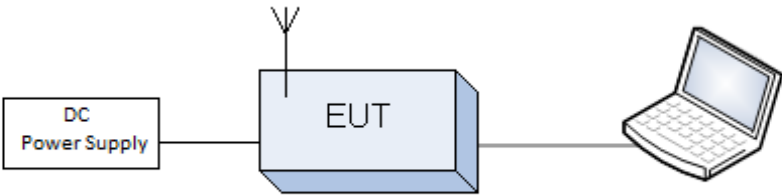


Figure 3.4-1: Setup diagram

3.5 EUT sub assemblies

Table 3.5-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number
General Purpose IoT device	Topcon AG Turin	CL-55 3G+RADIO	1910036AA
4 in 1 antenna	Taoglas	MA245-LBIC.008	--
UHF antenna	ComAnt	CA915H_A	--

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

Temperature	18–33 °C
Relative humidity	30–60 %
Air pressure	980–1060 mbar

Test equipment used for the monitoring of the environmental conditions

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Thermohygrometer data loggers	Testo	175-H2	20012380/305	2013-01	2025-01
Thermohygrometer data loggers	Testo	175-H2	38203337/703	2013-01	2025-01
Barometer	MSR	MSR145B	330080	2013-04	2014-04

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

EUT	Type	Test	Range and Setup features	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
		Carrier power RF Output Power	10 kHz ÷ 30 MHz	1.0 dB	(1)
			30 MHz ÷ 18 GHz	1.5 dB	(1)
			18 MHz ÷ 40 GHz	3.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.6 dB	(1)
		Conducted spurious emissions	10 kHz ÷ 26 GHz	3.0 dB	(1)
			26 GHz ÷ 40 GHz	4.5 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter– Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
		Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
	Radiated	Radiated spurious emissions	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 40 GHz	8.0 dB	(1)
		Effective radiated power transmitter	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26,5 GHz ÷ 40 GHz	8.0 dB	(1)
Receiver	Radiated	Radiated spurious emissions	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 40 GHz	8.0 dB	(1)
	Conducted	Conducted spurious emissions	1 MHz ÷ 18 GHz	6.0 dB	(1)
			10 kHz ÷ 26 GHz	3.0 dB	(1)
			26 GHz ÷ 40 GHz	4.5 dB	(1)

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2$ which has been derived from the assumed normal probability distribution with infinite degrees of freedom and for a coverage probability of 95 %

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI receiver (20 Hz ÷ 8 GHz)	R&S	ESU8	100202	2023-01	2024-01
EMI receiver (20 Hz ÷ 8 GHz)	R&S	ESW44	101620	2023-05	2024-05
Trilog Broadband Antenna	Schwarzbeck	VULB 9162	9162-025	2021-07	2024-07
Bilog antenna (1 ÷ 18 GHz)	Schwarzbeck	STLP 9148	9148-123	2021-07	2024-07
Horn antenna (4 ÷ 40 GHz)	RFSpin	DRH40	061106A40	2023-02	2026-02
Preamplifier (1 ÷ 18 GHz)	Schwarzbeck	BBV9718	9718-137	2023-08	2024-08
Preamplifier (18 ÷ 40 GHz)	Miteq	JS44-18004000-35-8P-R	1.627	2023-08	2024-08
Antenna mast	R&S	HCM	836 529/05	NCR	NCR
Controller	R&S	HCC	836 620/7	NCR	NCR
Turning-table	R&S	HCT	835 803/03	NCR	NCR
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	2021-09	2024-09
Shielded room	Siemens	10m control room	1947	NCR	NCR

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 Radiated emission

Definitions and limits

FCC § 15.209 (f)

In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device.

FCC §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

FCC §15.407 (b)

Undesirable emission limits. Except as shown in paragraph (b)(10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

FCC §22.917 (a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC §24.238 (a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

RSS-247 Issue 3 §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

RSS-247 Issue 3 §6.2

6.2.1 Frequency band 5150-5250 MHz

LE-LAN devices are restricted to indoor operation only in the band 5150-5250 MHz. However, original equipment manufacturer (OEM) devices, which are installed in vehicles by vehicle manufacturers, are permitted.

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

6.2.2 Frequency band 5250-5350 MHz

For devices installed in vehicles, only OEM devices installed by vehicle manufacturers are permitted.

6.2.2.2 Unwanted emission limits

Devices shall comply with the following:

- a. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b. All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text "for indoor use only."

6.2.3 Frequency bands 5470-5600 MHz and 5650-5725 MHz

Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz. This restriction is for the protection of Environment Canada's weather radars operating in this band.

6.2.3.2 Unwanted emission limits

Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

6.2.4 Frequency band 5725-5850 MHz

6.2.4.1 General

The following requirements apply to devices operating in the range 5725-5850 MHz. For devices that have channels that span across 5850 MHz (e.g. 5725-5895 MHz), the requirements are described in section 6.2.5.

6.2.4.3 Unwanted emission limits

Devices operating in the band 5725-5850 MHz shall comply with the following e.i.r.p. spectral density limits:

- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

RSS-132 Issue 4 §5.5

Equipment shall meet the unwanted emission limits specified below:

- i. In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated below the transmitter output power P (dBW) by at least $43 + 10 \log(p)$ dB.
- ii. After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated below the transmitter output power P (dBW) by at least $43 + 10 \log(p)$ dB. If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

p is the output power specified in watts.

RSS-133 Issue 6 §6.5.1

Equipment shall comply with the limits in (i) and (ii) below.

- i. In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log(10p(\text{watts}))$.
- ii. After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log(10p(\text{watts}))$. If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

Section 8
Test name
Specification

Testing data
Radiated emission limits
FCC §15.209 (f), §15.247 (d), §15.407 (b), §27.53 (c), §27.53 (h), RSS-Gen Issue 5 §8.9
RSS-247 Issue 3 §5.5, RSS-247 Issue 3 §6.2, RSS-132 Issue 4 §5.5, RSS-133 Issue 6 §6.5.1



Table 8.1-1: FCC §15.209– Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.1-2: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

Table 8.1-3: ISSED restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	12.57675–12.57725	399.9–410	7.25–7.75
0.495–0.505	13.36–13.41	608–614	8.025–8.5
2.1735–2.1905	16.42–16.423	960–1427	9.0–9.2
3.020–3.026	16.69475–16.69525	1435–1626.5	9.3–9.5
4.125–4.128	16.80425–16.80475	1645.5–1646.5	10.6–12.7
4.17725–4.17775	25.5–25.67	1660–1710	13.25–13.4
4.20725–4.20775	37.5–38.25	1718.8–1722.2	14.47–14.5
5.677–5.683	73–74.6	2200–2300	15.35–16.2
6.215–6.218	74.8–75.2	2310–2390	17.7–21.4
6.26775–6.26825	108–138	2483.5–2500	22.01–23.12
6.31175–6.31225	149.9–150.05	2655–2900	23.6–24.0
8.291–8.294	156.52475–156.52525	3260–3267	31.2–31.8
8.362–8.366	156.7–156.9	3332–3339	36.43–36.5
8.37625–8.38675	162.0125–167.17	3345.8–3358	
8.41425–8.41475	167.72–173.2	3500–4400	
12.29–12.293	240–285	4500–5150	Above 38.6
12.51975–12.52025	322–335.4	5350–5460	

Note: Certain frequency bands listed in Table 8.1-3 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

Test summary

Test start date	September 18, 2023
Test engineer	P. Barbieri

Observations, settings and special notes

The spectrum was searched from 30 MHz to 40 GHz.
EUT's LTE and WIFI transmitters were set to transmit continuously, different channel setting has been investigated as per provided by client's setup
Radiated measurements were performed at a distance of 3 m.

Spectrum analyzer settings for frequencies below 1000 MHz:

Detector mode	Quasi-Peak
Resolution bandwidth	120 kHz
Trace mode	Max Hold
Measurement time	100 ms


Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for average radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Average
Trace mode:	Max Hold

8.1.4 Test data

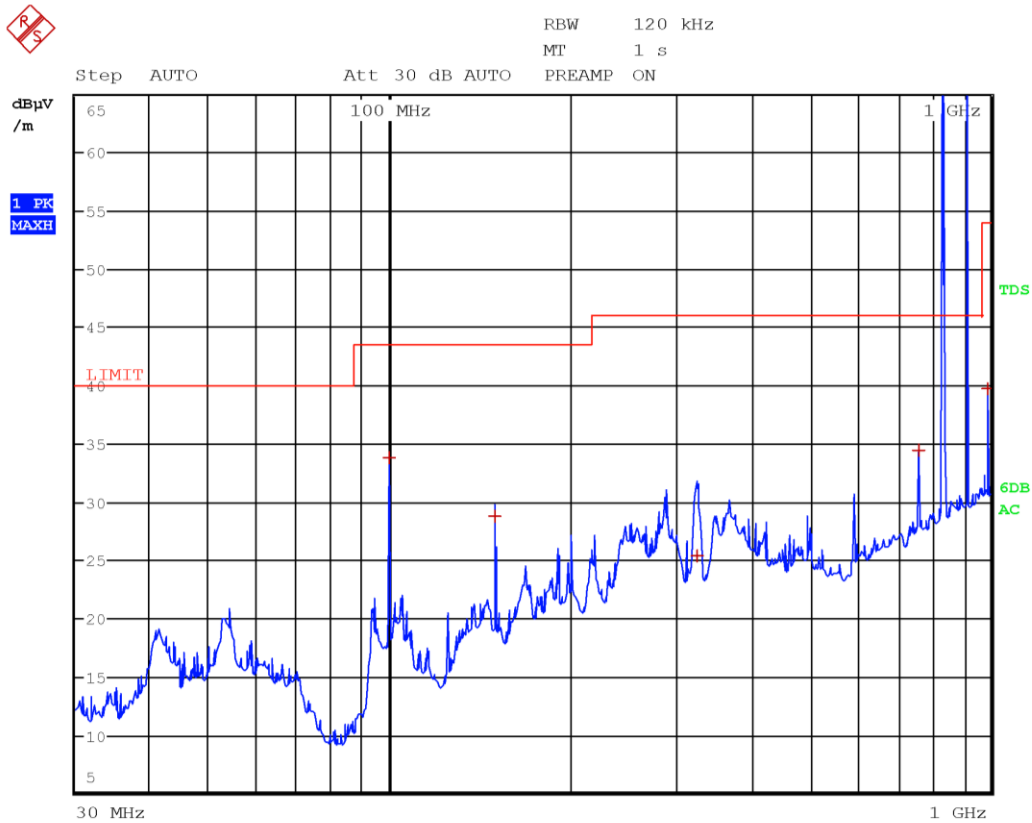


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
99.9900	33.9	43.5	-9.6	QP
150.0000	28.8	43.5	-14.7	QP
324.9900	25.4	46.0	-20.6	QP
758.8500	34.5	46.0	-11.5	QP
836.6000	120.0	--	--	PK
915.0000	116.2	--	--	PK
990.0000	39.8	54.0	-14.2	QP

Limit exceeded by the carriers

8.1.4 Test data, continued

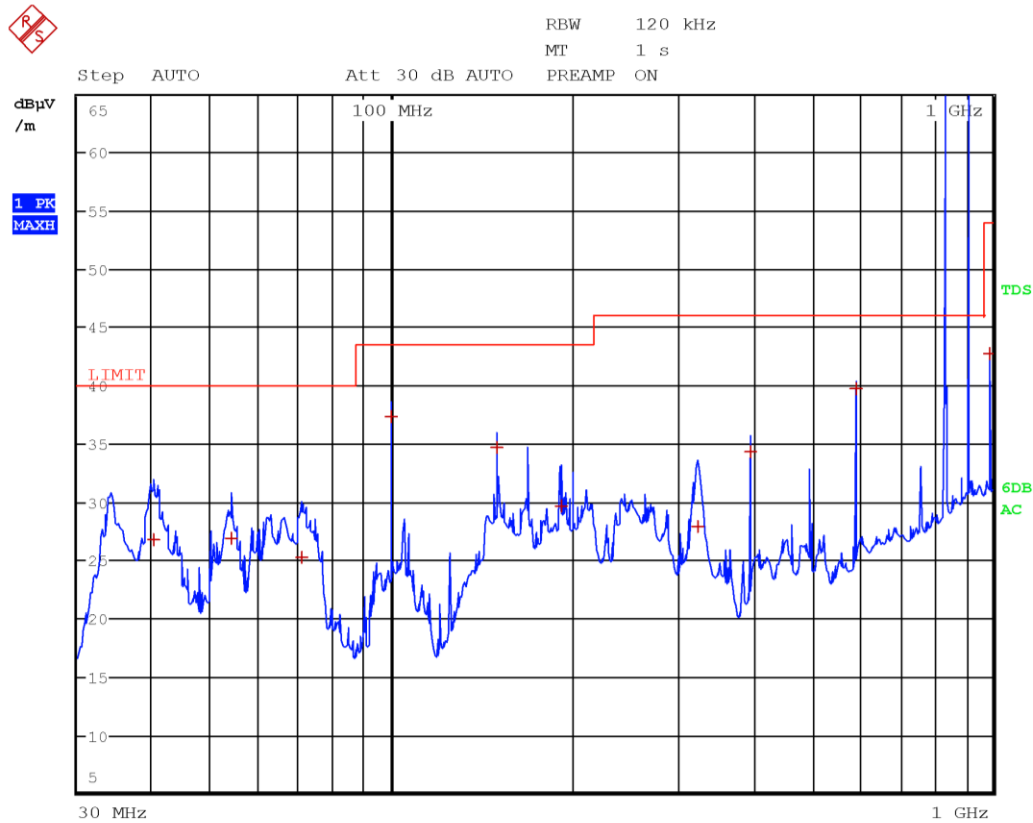


Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
40.1100	26.8	40.0	-13.2	QP
54.1500	26.9	40.0	-13.1	QP
70.8000	25.3	40.0	-14.7	QP
100.0200	37.4	43.5	-6.1	QP
150.0000	34.7	43.5	-8.8	QP
191.9700	29.7	43.5	-13.8	QP
323.6400	27.9	46.0	-18.1	QP
396.0000	34.4	46.0	-11.6	QP
594.0000	39.7	46.0	-6.3	QP
836.6000	111.4	--	--	PK
915.0000	127.1	--	--	PK
990.0000	42.8	54.0	-11.2	QP

Limit exceeded by the carriers

8.1.4 Test data, continued

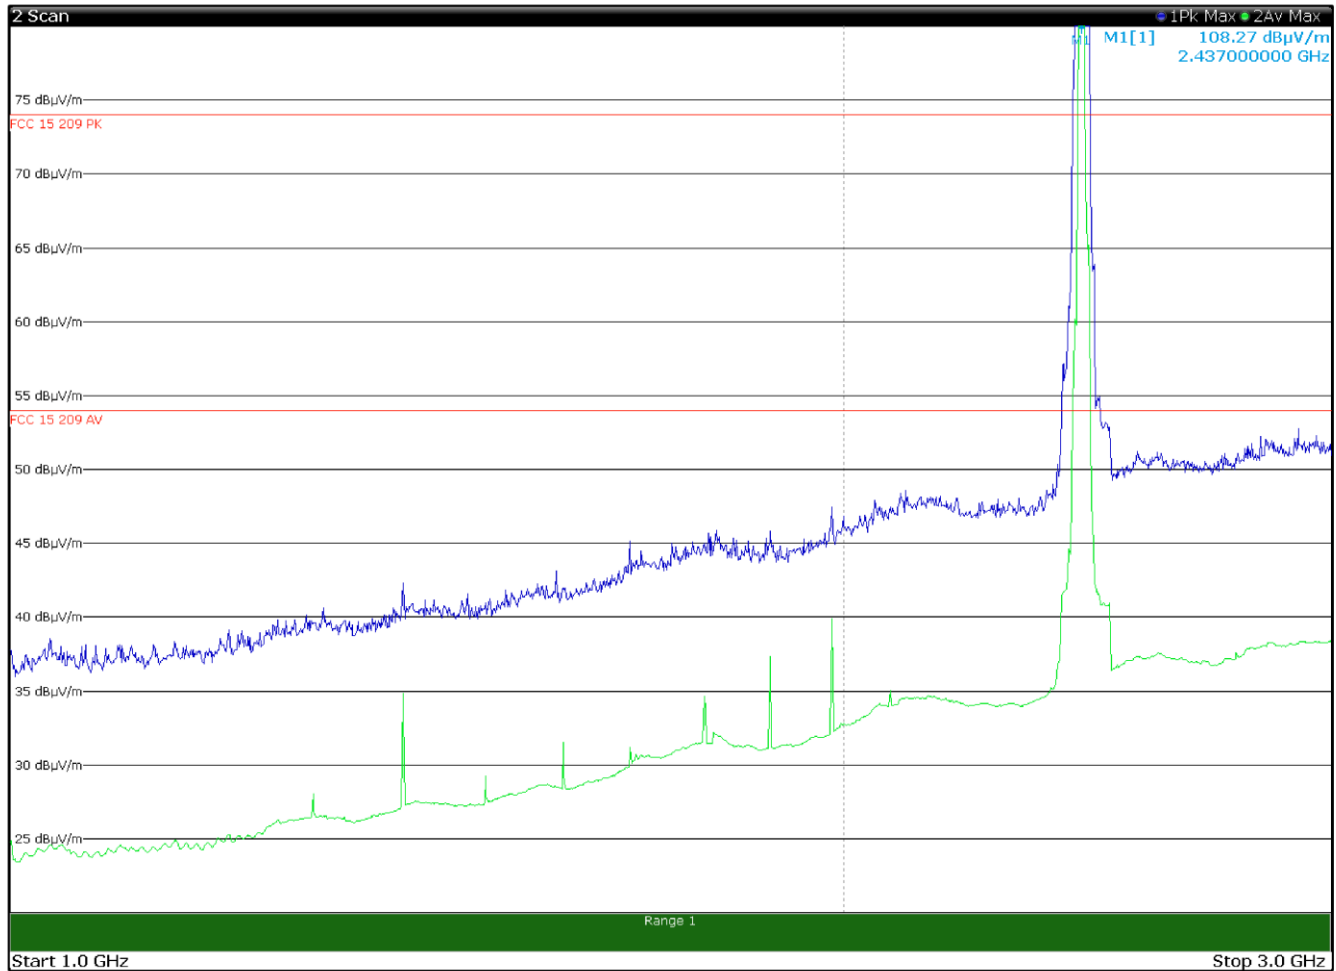


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1386.0000	34.9	54.0	-19.1	Av
1673.2000	47.2	82.2	-35.0	Pk
1881.0000	37.4	54.0	-16.6	Av
1980.0000	40.0	54.0	-14.0	Av
2437.0000	112.3	--	--	Pk

Limit exceeded by the carriers

The limit for FCC 22.917 is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m

8.1.4 Test data, continued

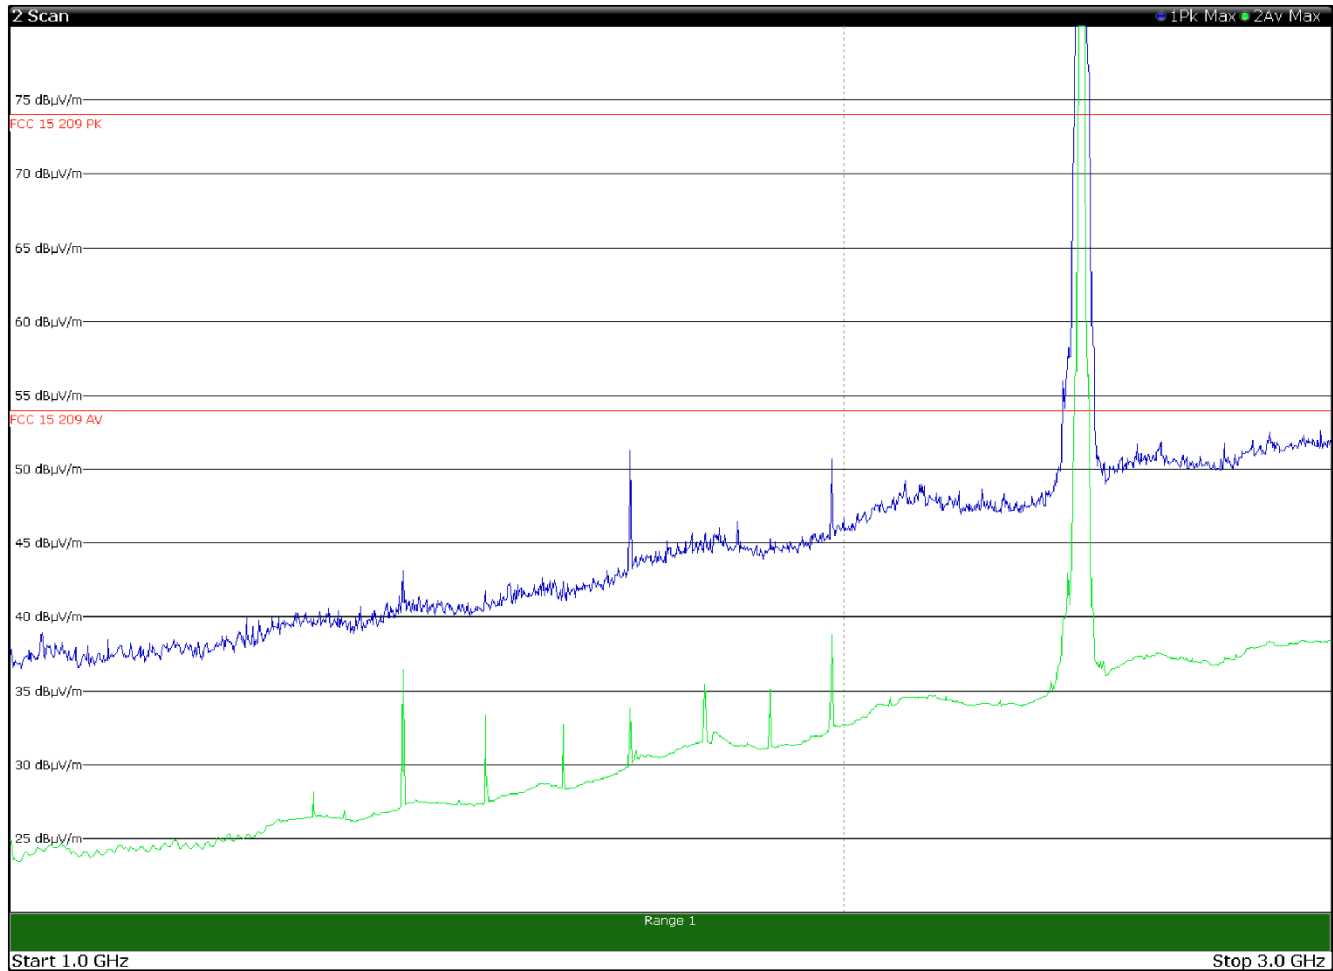


Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1386.0000	36.5	54.0	-17.5	Av
1673.2000	51.3	82.2	-30.9	Pk
1980.0000	38.8	54.0	-15.2	Av
2437.0000	105.9	--	--	Pk

Limit exceeded by the carriers

The limit for FCC 22.917 is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m

8.1.4 Test data, continued

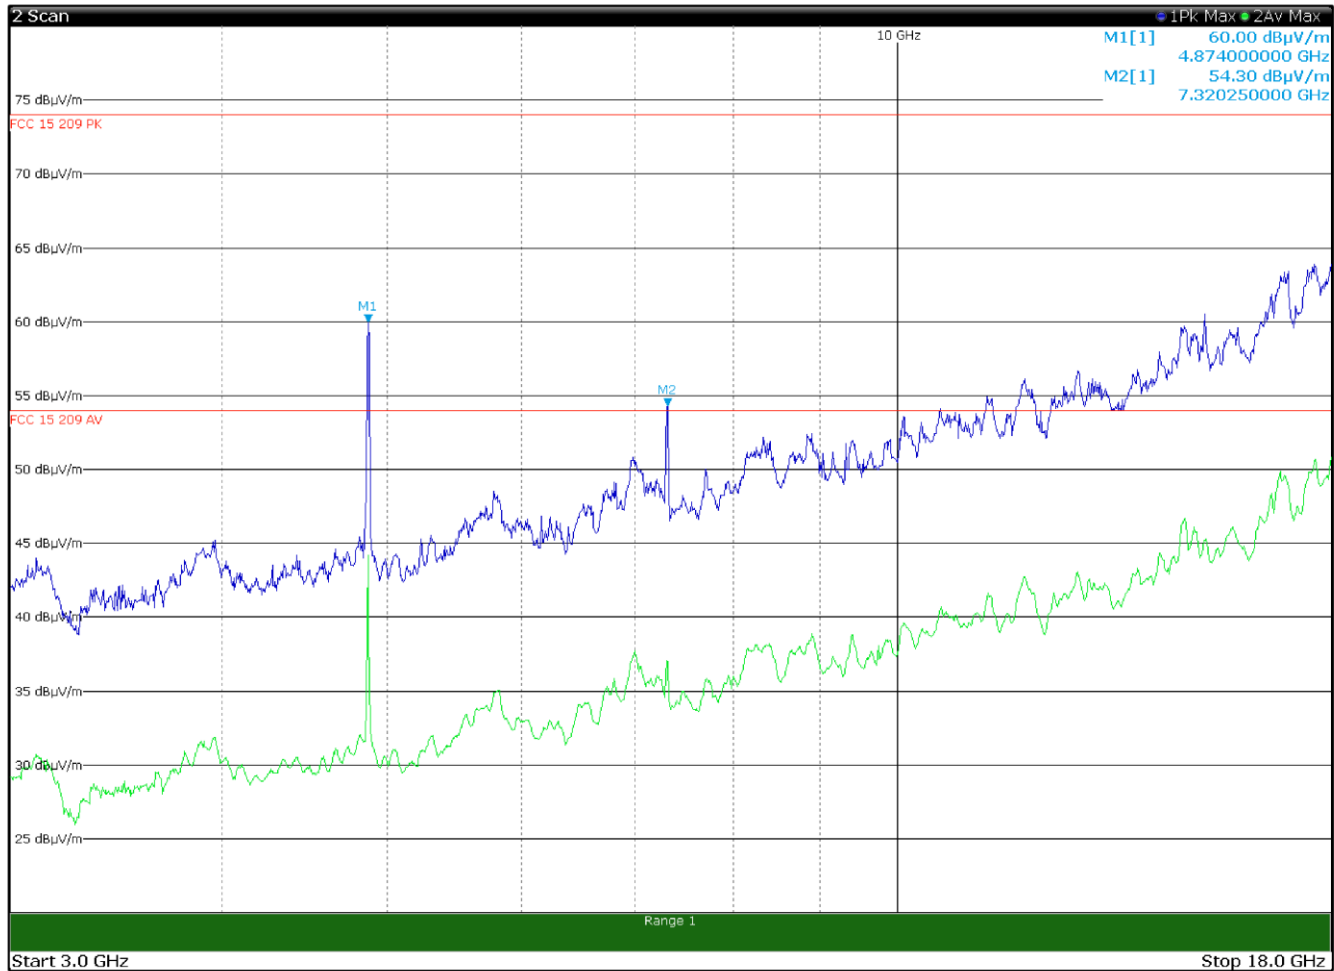


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
4874.0000	60.0	74.0	-14.0	Pk
4874.0000	51.6	54.0	-2.4	Av
7320.2500	54.3	74.0	-19.7	Pk
7320.2500	45.9	54.0	-8.1	Av

The correction factor for the average value of pulsed emissions is $20 \log (DC) = 20 \log (0.38) = 8.4 \text{ dB}$

8.1.4 Test data, continued

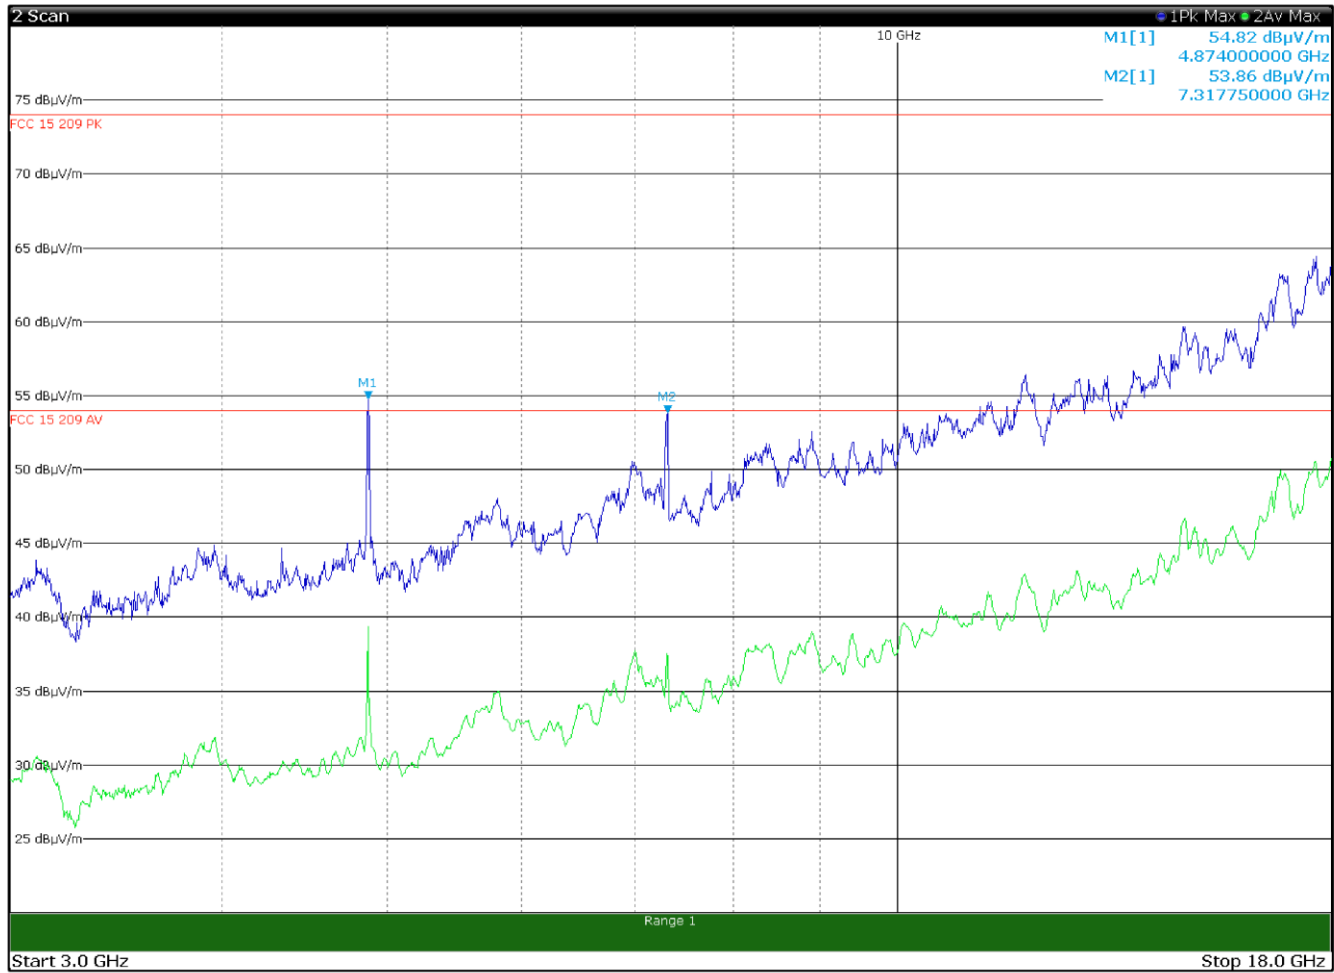

Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
4874.0000	54.9	74.0	-19.1	Pk
4874.0000	46.5	54.0	-7.5	Av
7317.7500	53.9	74.0	-20.1	Pk
7317.7500	45.5	54.0	-8.5	Av


The correction factor for the average value of pulsed emissions is $20 \log (DC) = 20 \log (0.38) = 8.4 \text{ dB}$

Section 8
Test name
Specification

Testing data
Radiated emission limits
FCC §15.209 (f), §15.247 (d), §15.407 (b), §27.53 (c), §27.53 (h), RSS-Gen Issue 5 §8.9
RSS-247 Issue 3 §5.5, RSS-247 Issue 3 §6.2, RSS-132 Issue 4 §5.5, RSS-133 Issue 6 §6.5.1



8.1.4 Test data, continued

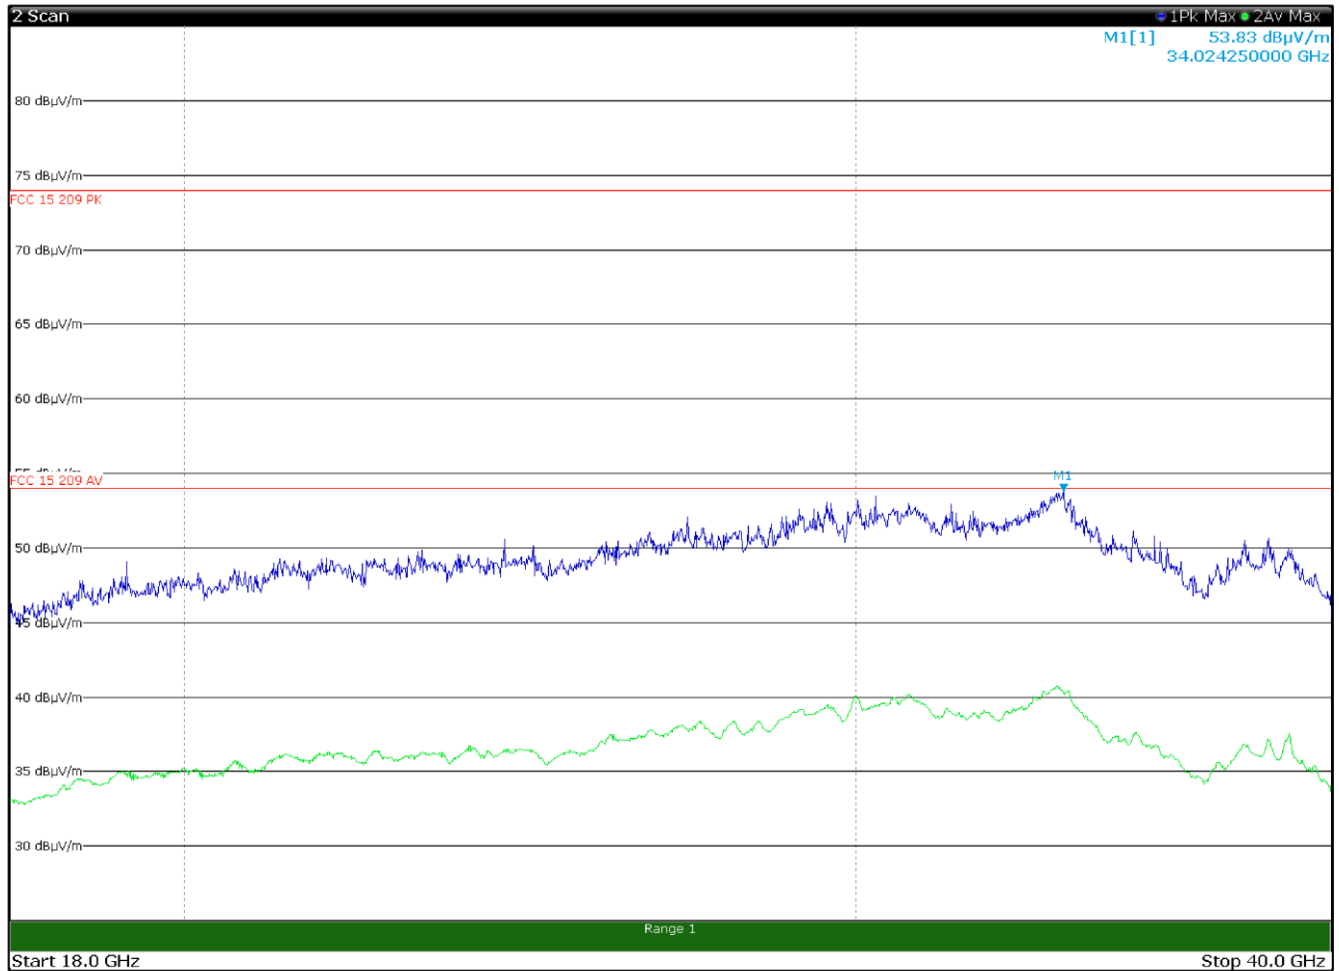


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Section 8
Test name
Specification

Testing data
Radiated emission limits
FCC §15.209 (f), §15.247 (d), §15.407 (b), §27.53 (c), §27.53 (h), RSS-Gen Issue 5 §8.9
RSS-247 Issue 3 §5.5, RSS-247 Issue 3 §6.2, RSS-132 Issue 4 §5.5, RSS-133 Issue 6 §6.5.1




8.1.4 Test data, continued

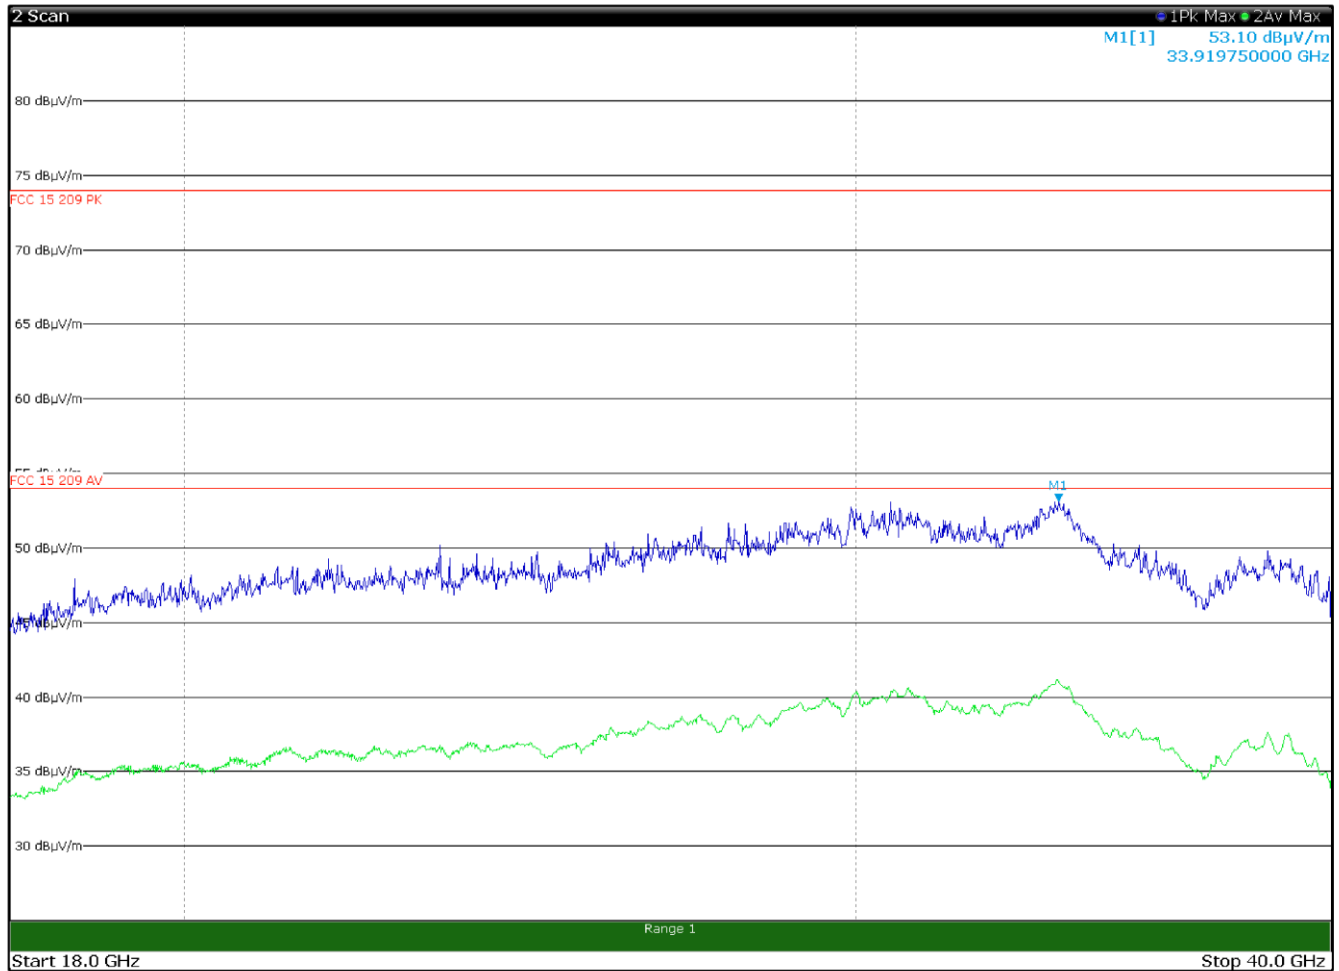

Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

8.1.4 Test data, continued

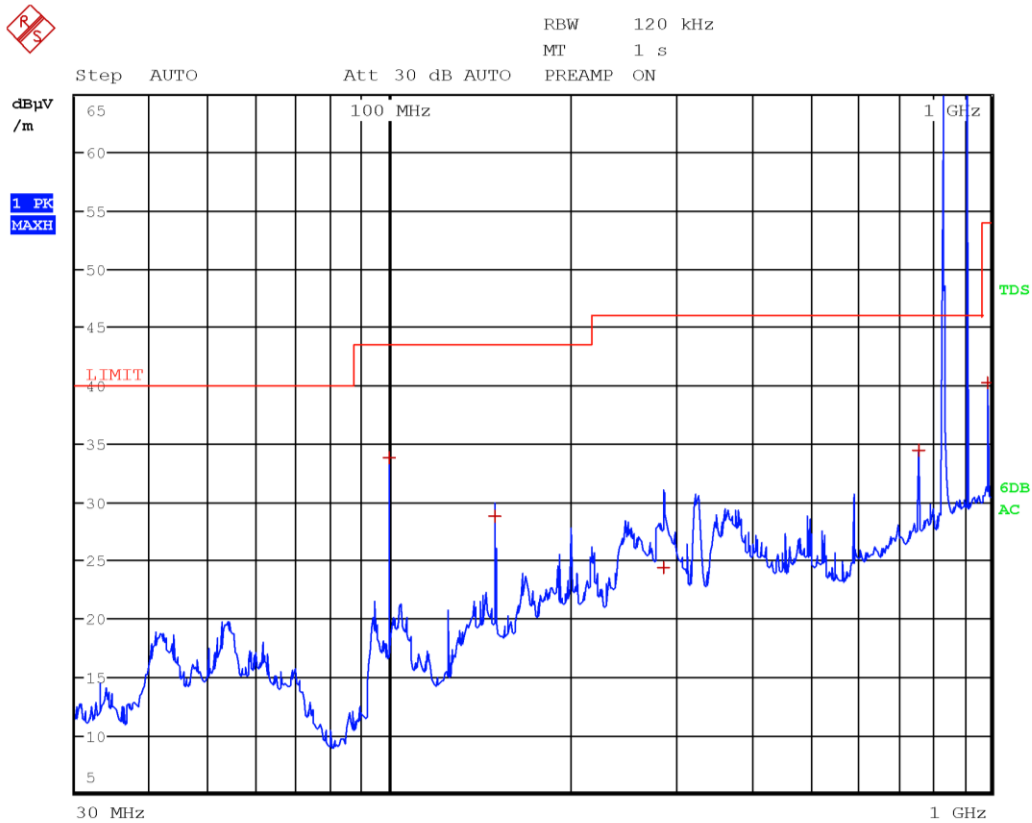


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
99.9900	33.8	43.5	-9.7	QP
150.0000	28.8	43.5	-14.7	QP
286.3200	24.4	46.0	-21.6	QP
759.1200	34.4	46.0	-11.6	QP
836.6000	119.6	--	--	PK
915.0000	115.9	--	--	PK
990.0000	40.2	54.0	-13.8	QP

Limit exceeded by the carriers

8.1.4 Test data, continued

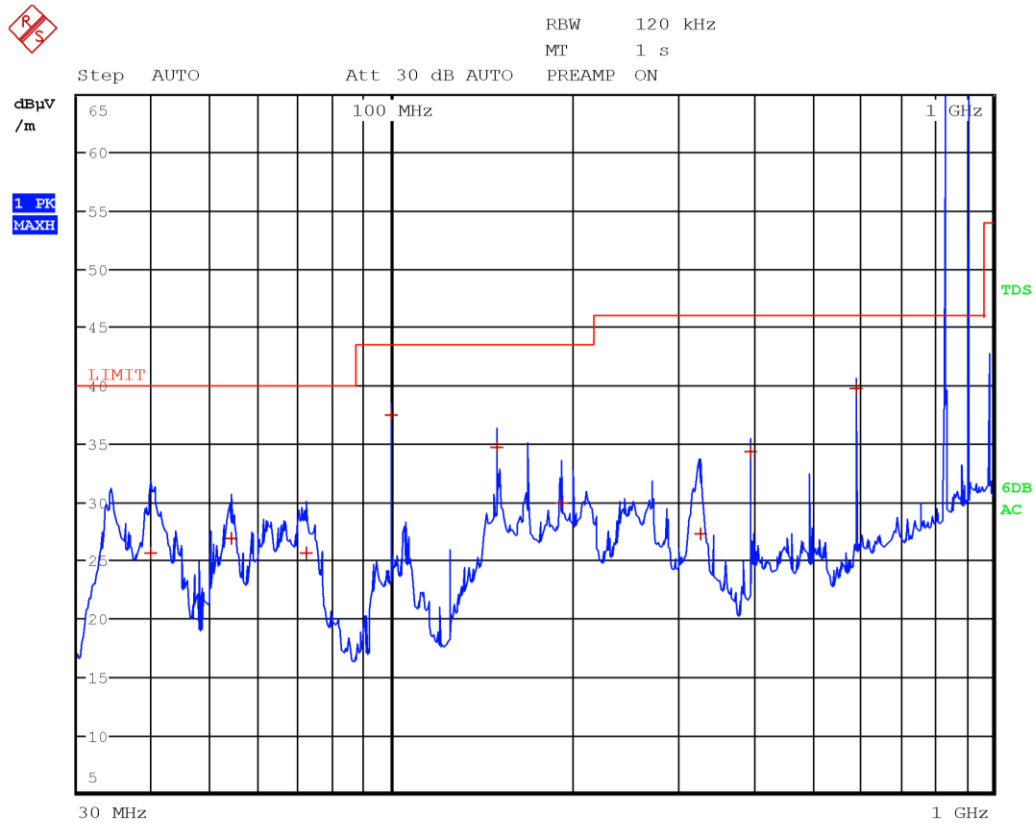

Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
39.6300	25.6	40.0	-14.4	QP
54.1500	27.0	40.0	-13.0	QP
72.0000	25.6	40.0	-14.4	QP
99.9900	37.6	43.5	-5.9	QP
150.0000	34.7	43.5	-8.8	QP
192.0300	29.9	43.5	-13.6	QP
326.1900	27.3	46.0	-18.7	QP
396.0000	34.3	46.0	-11.7	QP
594.0000	39.7	46.0	-6.3	QP
836.6000	110.8	--	--	PK
915.0000	127.6	--	--	PK

Limit exceeded by the carriers

8.1.4 Test data, continued




Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1386.0000	33.7	54.0	-20.3	Av
1673.2000	47.9	82.2	-34.3	Pk
2441.0000	97.7	--	--	Pk
2511.0000	57.2	74.0	-16.8	Pk
5220.0000	116.6	--	--	Pk

Limit exceeded by the carriers

The limit for FCC 22.917 is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m

8.1.4 Test data, continued

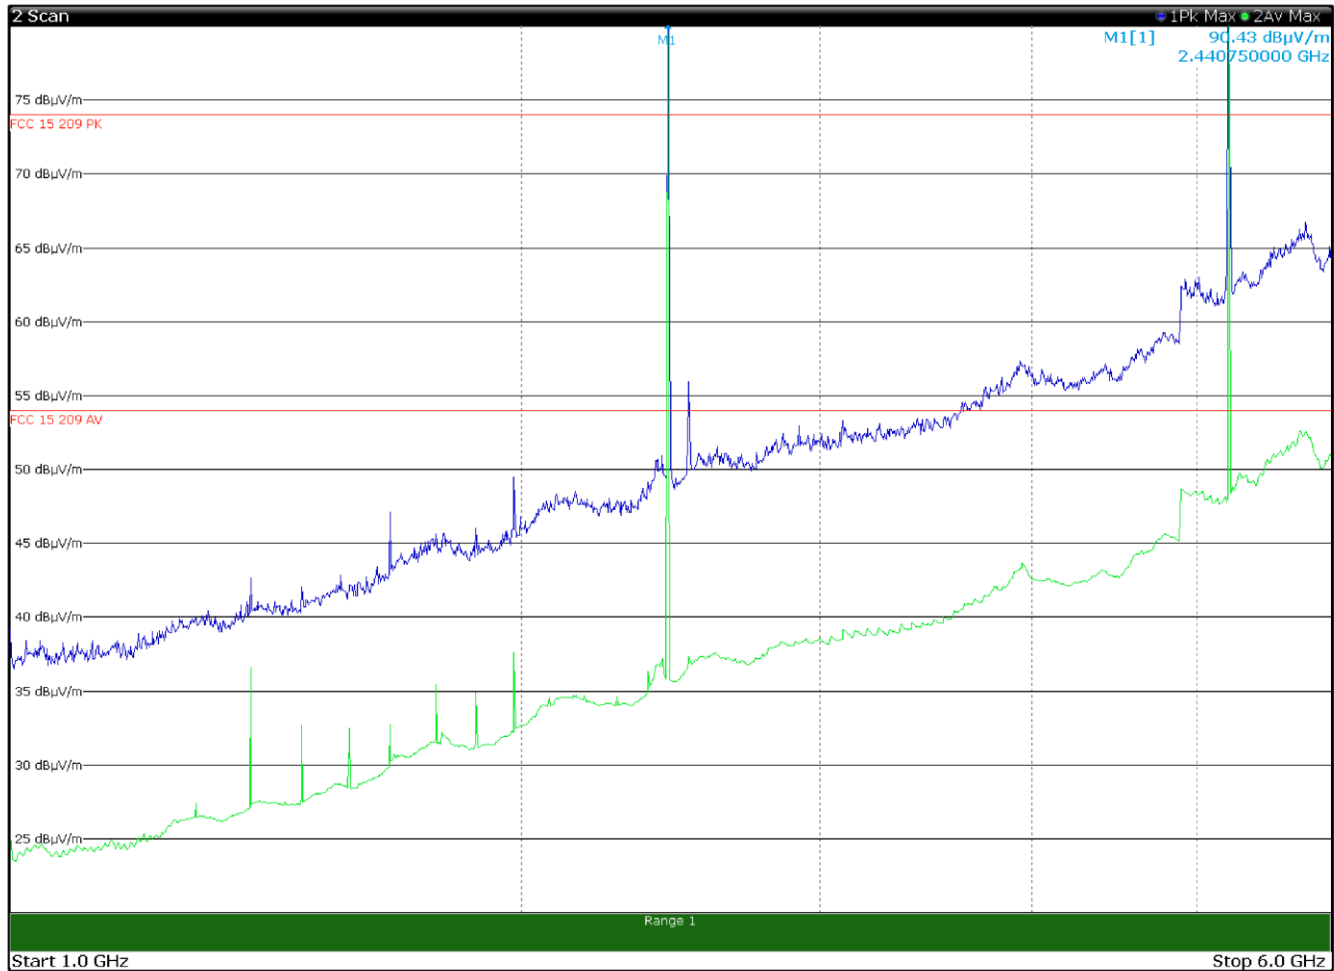


Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1386.0000	36.6	54.0	-17.4	Av
1673.2000	50.9	82.2	-31.3	Pk
2441.0000	89.3	--	--	Pk
2511.0000	56.0	74.0	-18.0	Pk
5220.0000	105.5	--	--	Pk

Limit exceeded by the carriers

The limit for FCC 22.917 is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m

8.1.4 Test data, continued

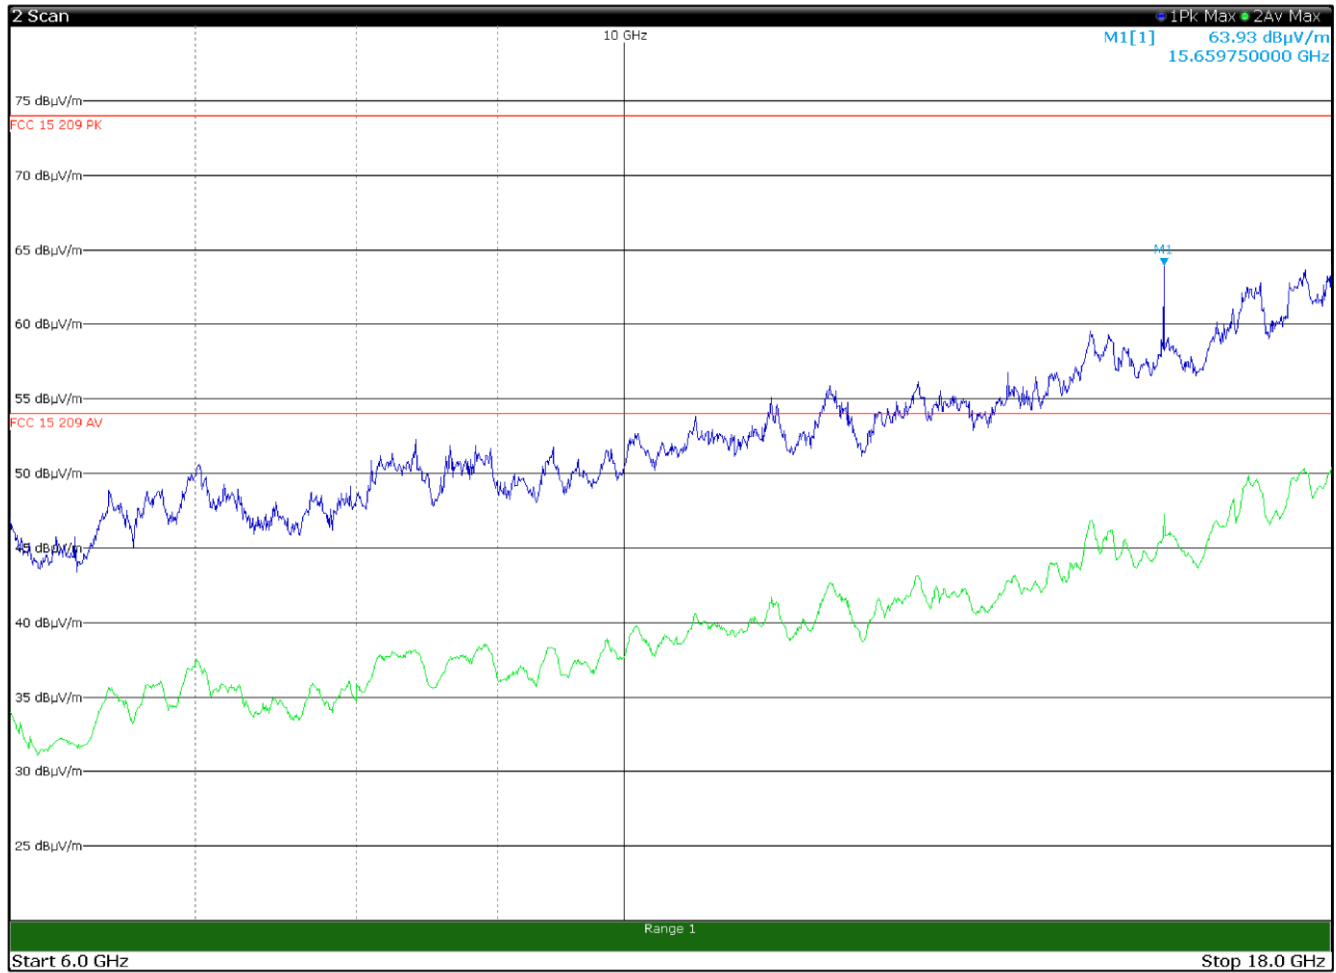

Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
15659.75	64.0	74.0	-10.0	Pk
15659.75	49.1	54.0	-4.9	Av


The correction factor for the average value of pulsed emissions is $20 \log (DC) = 20 \log (0.18) = 14.9 \text{ dB}$

Section 8
Test name
Specification

Testing data
Radiated emission limits
FCC §15.209 (f), §15.247 (d), §15.407 (b), §27.53 (c), §27.53 (h), RSS-Gen Issue 5 §8.9
RSS-247 Issue 3 §5.5, RSS-247 Issue 3 §6.2, RSS-132 Issue 4 §5.5, RSS-133 Issue 6 §6.5.1



8.1.4 Test data, continued

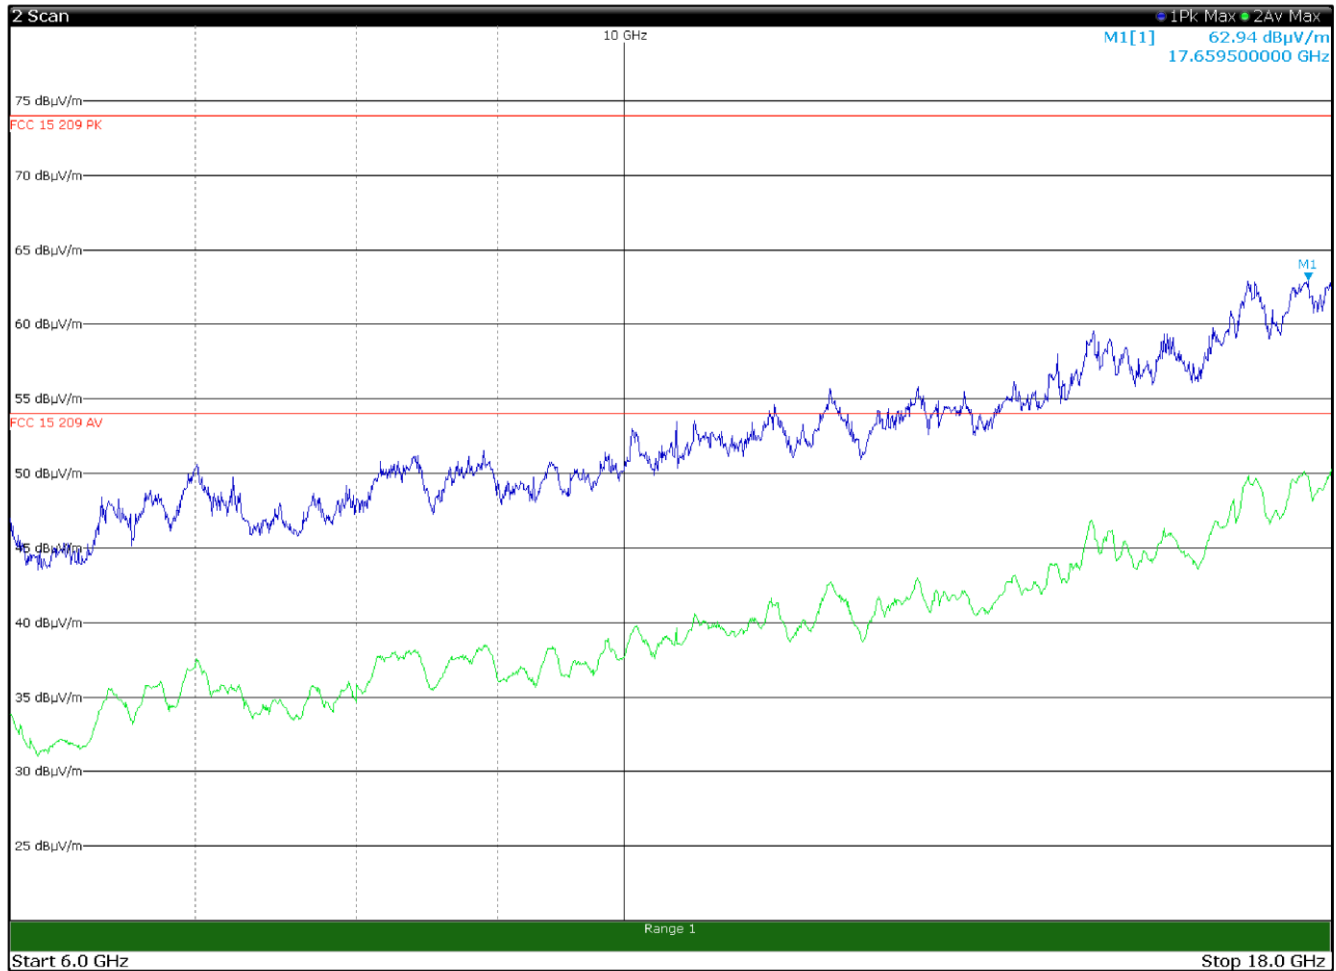


Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Section 8
Test name
Specification

Testing data
Radiated emission limits
FCC §15.209 (f), §15.247 (d), §15.407 (b), §27.53 (c), §27.53 (h), RSS-Gen Issue 5 §8.9
RSS-247 Issue 3 §5.5, RSS-247 Issue 3 §6.2, RSS-132 Issue 4 §5.5, RSS-133 Issue 6 §6.5.1



8.1.4 Test data, continued

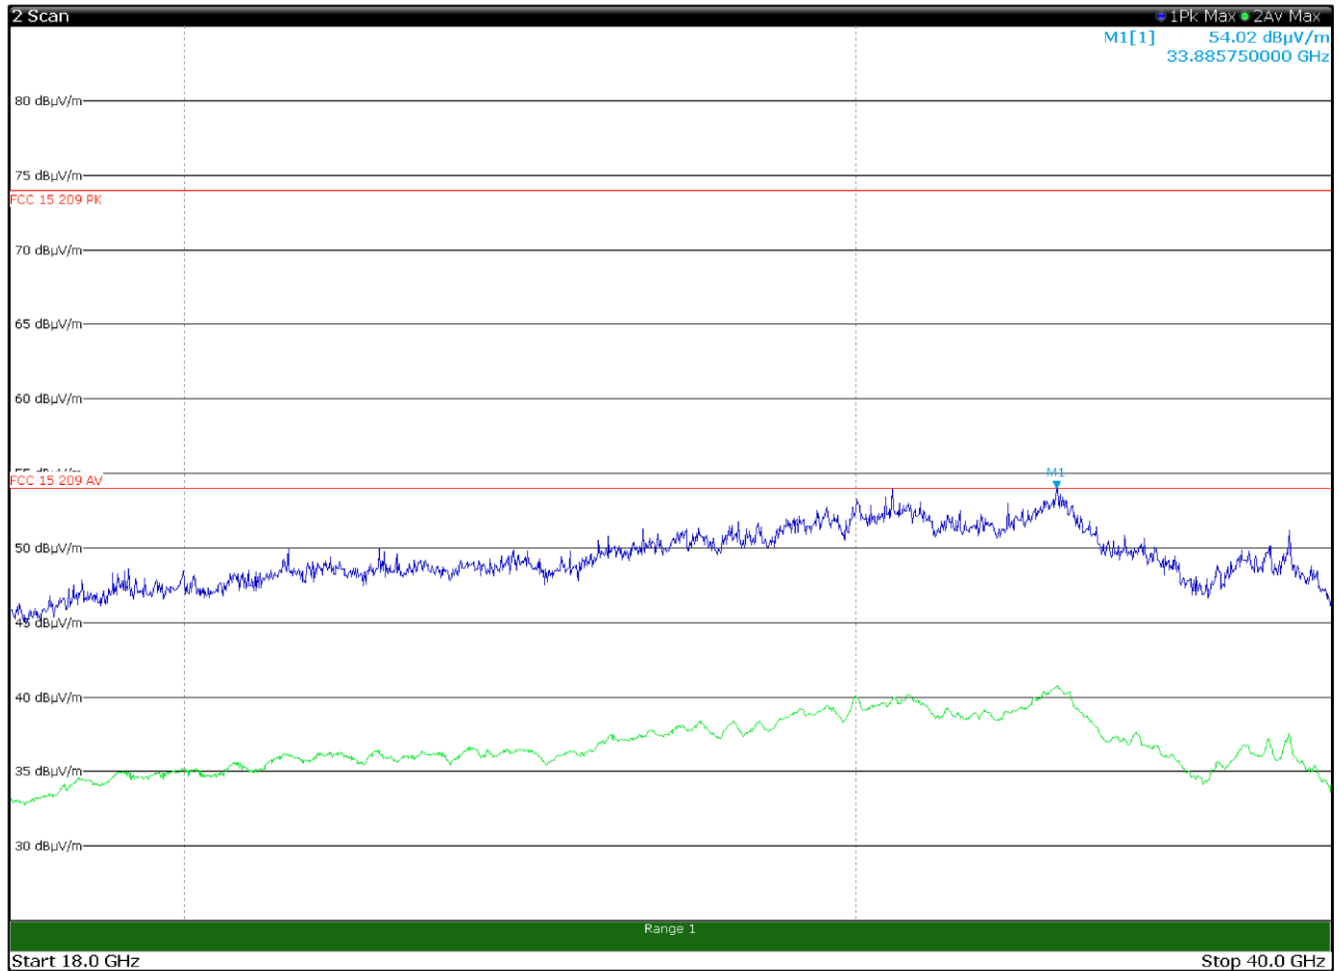


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Section 8
Test name
Specification

Testing data
Radiated emission limits
FCC §15.209 (f), §15.247 (d), §15.407 (b), §27.53 (c), §27.53 (h), RSS-Gen Issue 5 §8.9
RSS-247 Issue 3 §5.5, RSS-247 Issue 3 §6.2, RSS-132 Issue 4 §5.5, RSS-133 Issue 6 §6.5.1




8.1.4 Test data, continued

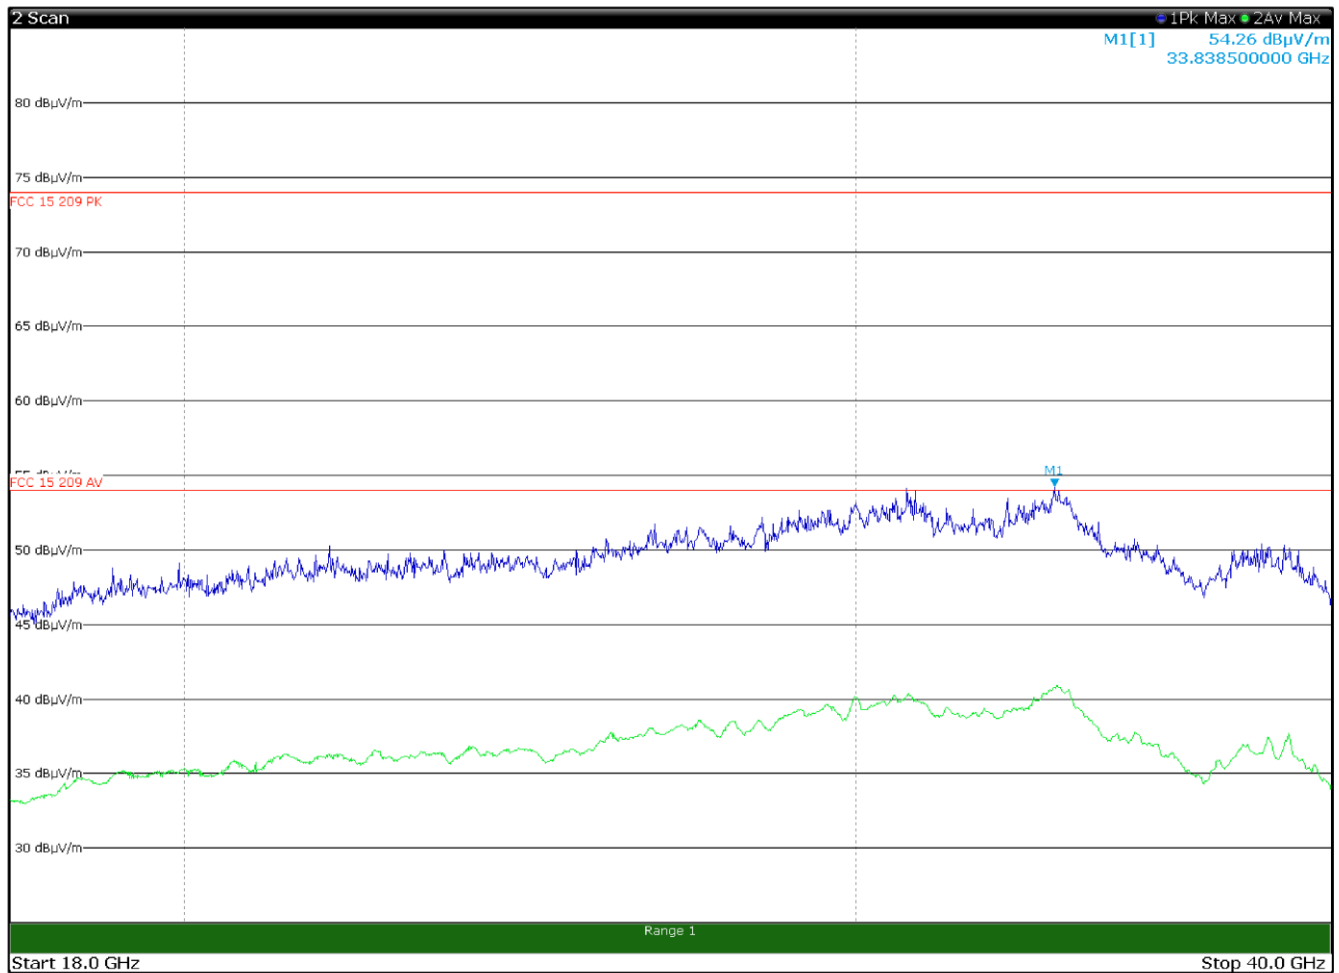

Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 837 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

8.1.4 Test data, continued

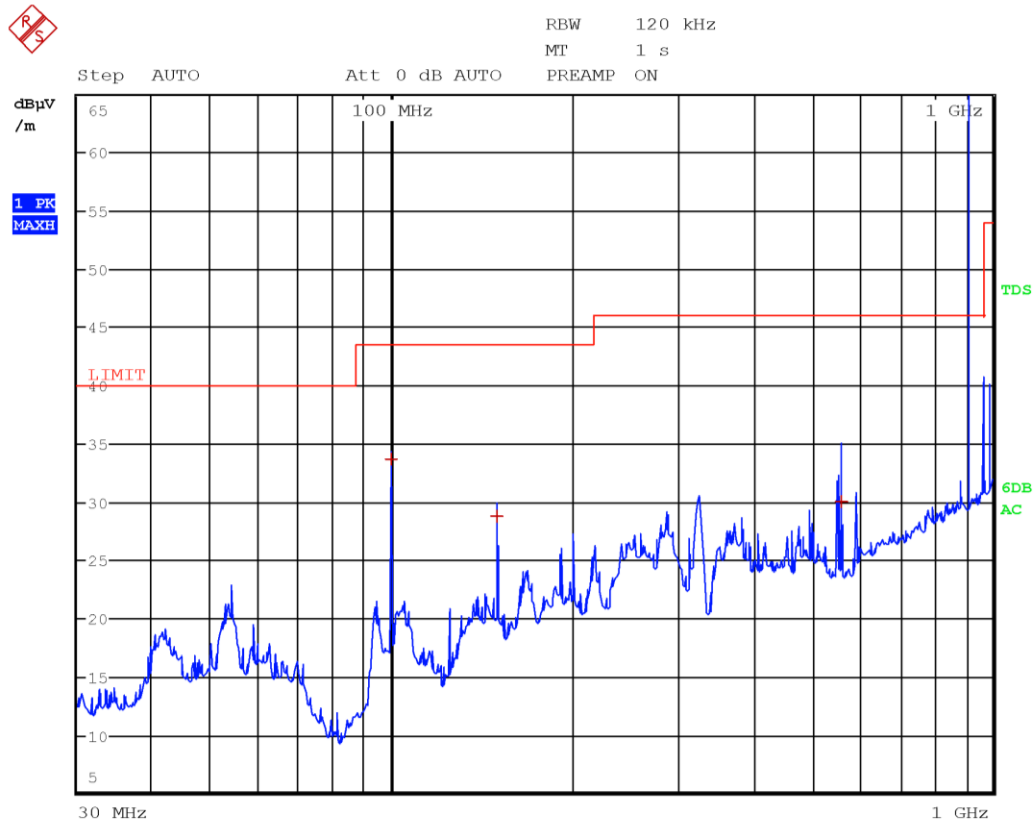


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
99.9900	33.8	43.5	-9.7	QP
150.0000	28.9	43.5	-14.6	QP
559.6200	30.0	46.0	-16.0	QP
915.0000	116.8	--	--	PK

Limit exceeded by the carriers

8.1.4 Test data, continued

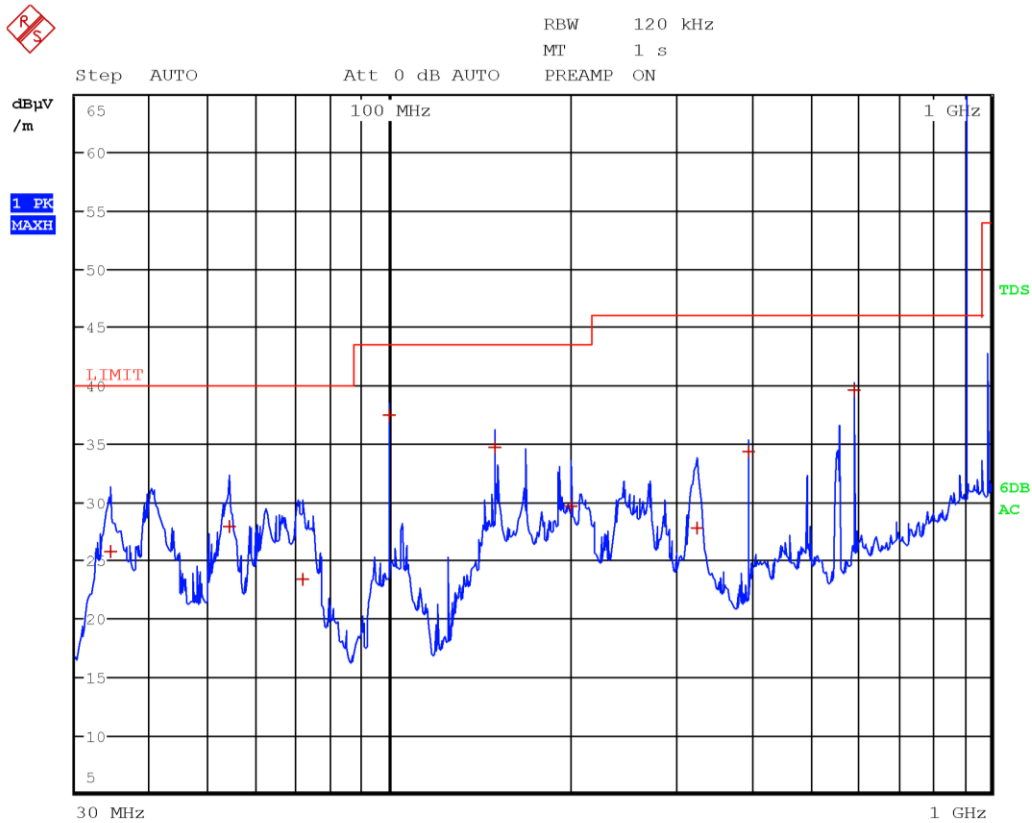


Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
34.3200	25.8	40.0	-14.2	QP
54.1500	28.0	40.0	-12.0	QP
71.7900	23.4	40.0	-16.6	QP
99.9900	37.5	43.5	-6.0	QP
150.0000	34.7	43.5	-8.8	QP
199.9800	29.7	43.5	-13.8	QP
324.1800	27.8	46.0	-18.2	QP
396.0000	34.3	46.0	-11.7	QP
594.0000	39.7	46.0	-6.3	QP
915.0000	126.8	--	--	PK

Limit exceeded by the carriers

8.1.4 Test data, continued

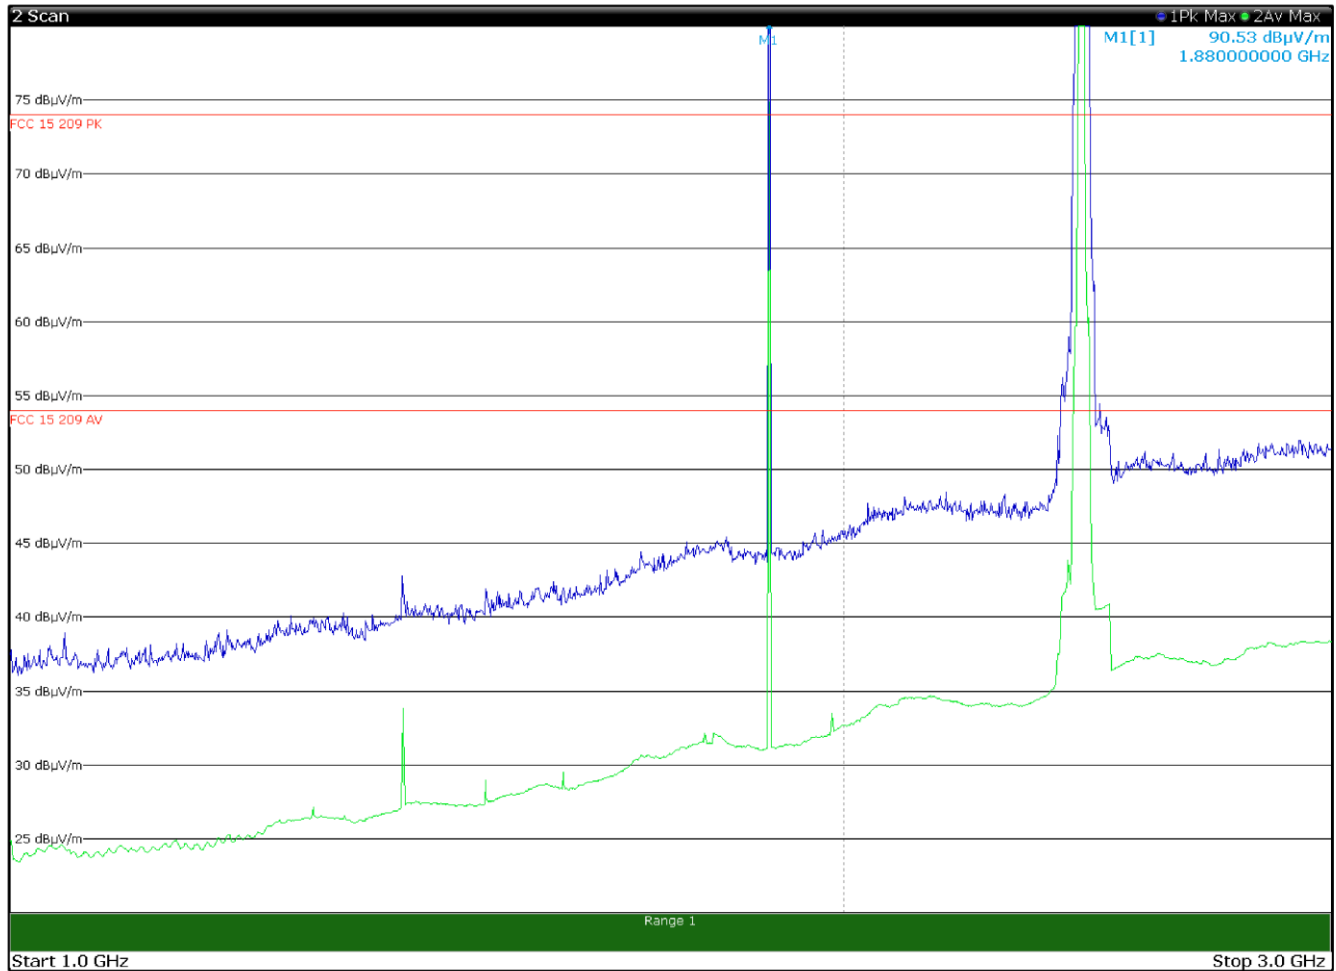


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1386.0000	33.8	54.0	-20.2	Av
1880.0000	117.9	--	--	Pk
2437.0000	112.5	--	--	Pk

Limit exceeded by the carriers

8.1.4 Test data, continued

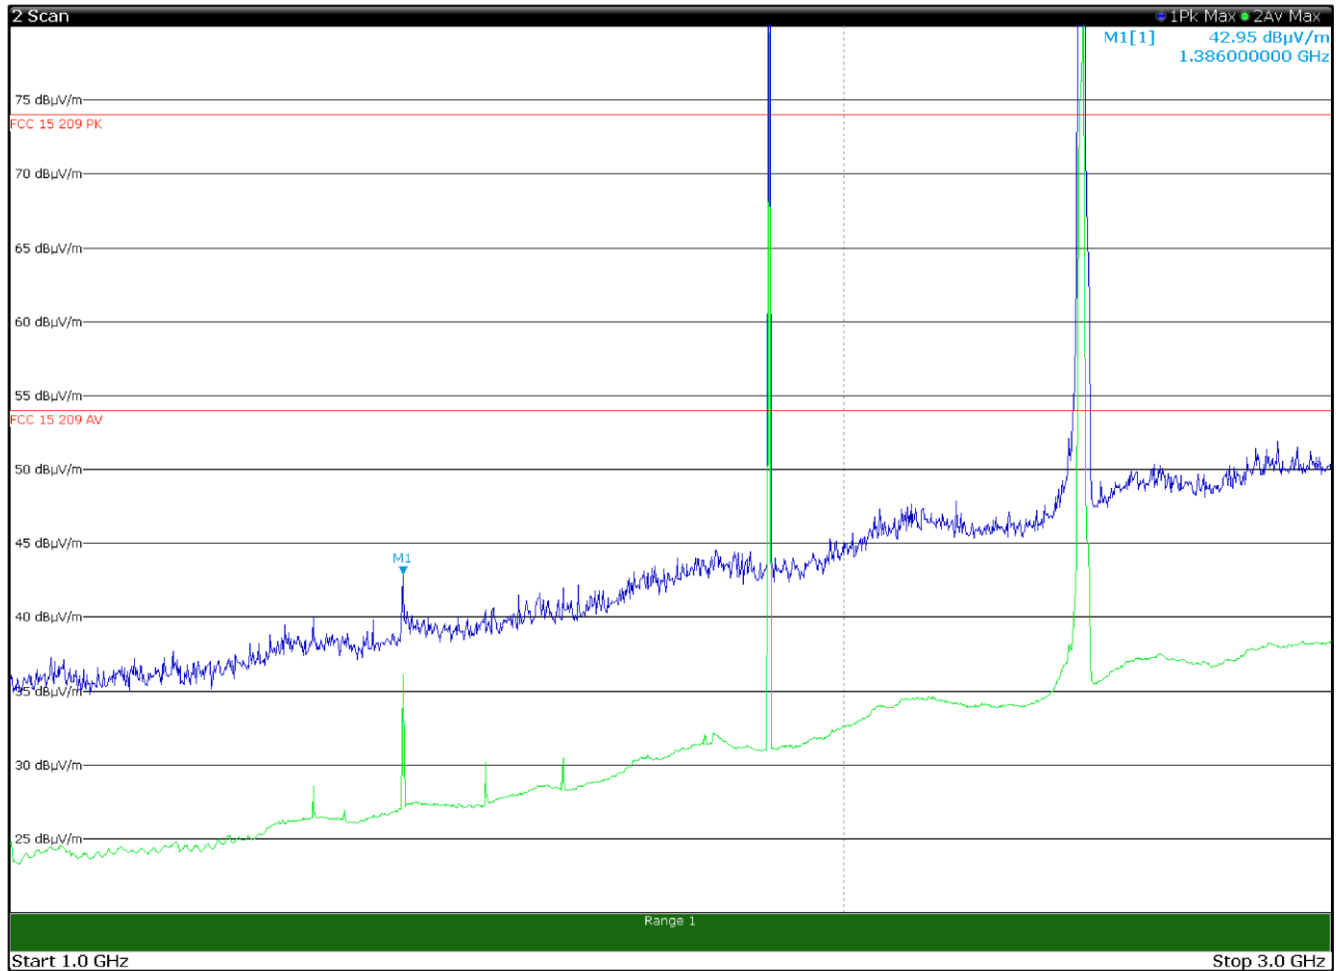


Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1386.0000	36.1	54.0	-17.9	Av
1880.0000	109.4	--	--	Pk
2437.0000	105.5	--	--	Pk

Limit exceeded by the carriers

8.1.4 Test data, continued

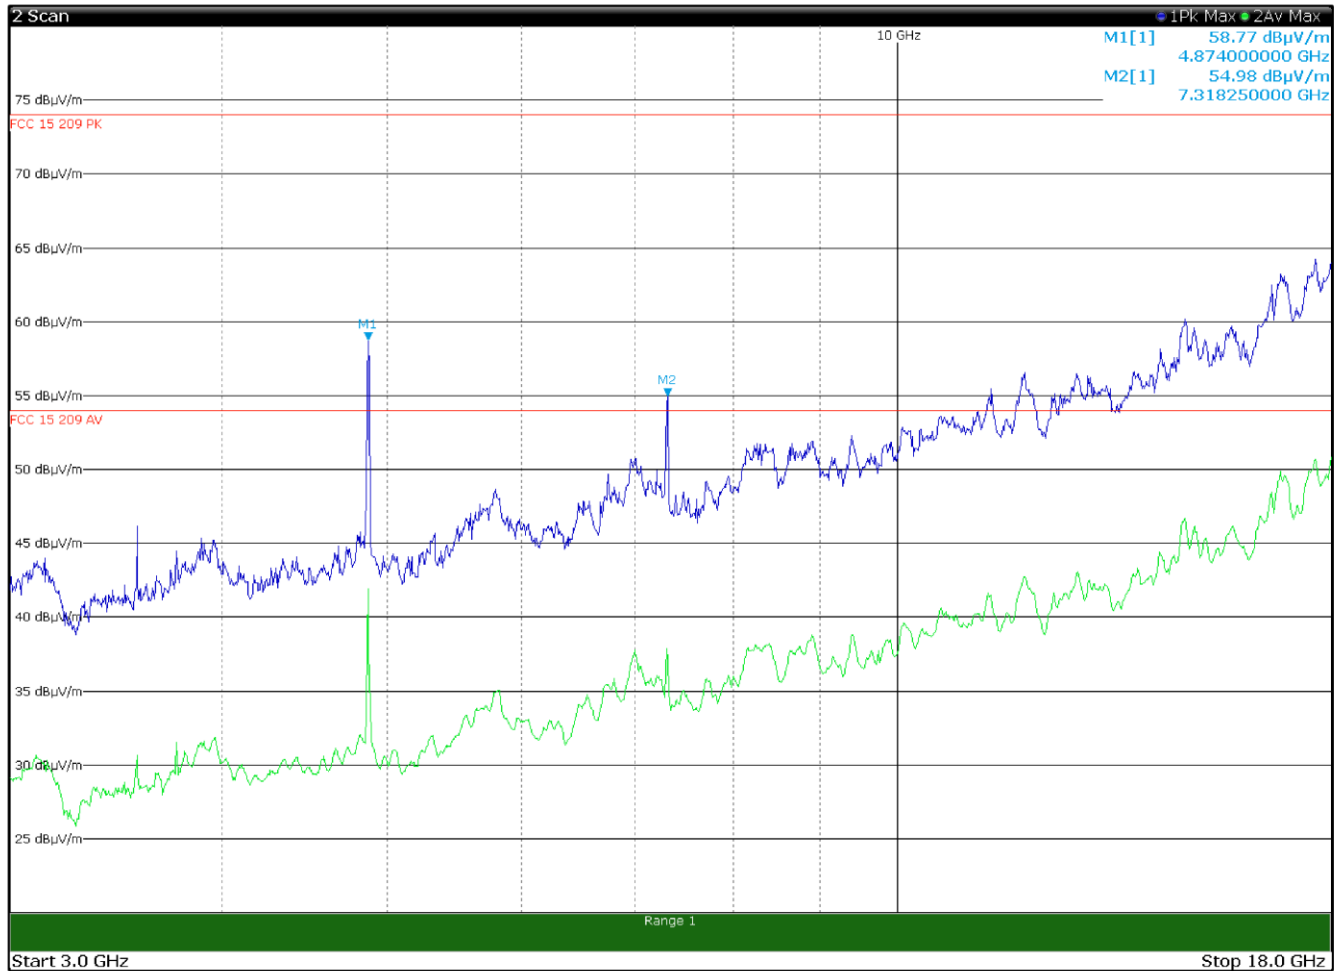


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
4874.0000	59.1	74.0	-14.9	Pk
4874.0000	50.7	54.0	-3.3	Av
7318.2500	55.0	74.0	-19.0	Pk
7318.2500	46.6	54.0	-7.4	Av

The correction factor for the average value of pulsed emissions is $20 \log (DC) = 20 \log (0.38) = 8.4 \text{ dB}$

8.1.4 Test data, continued

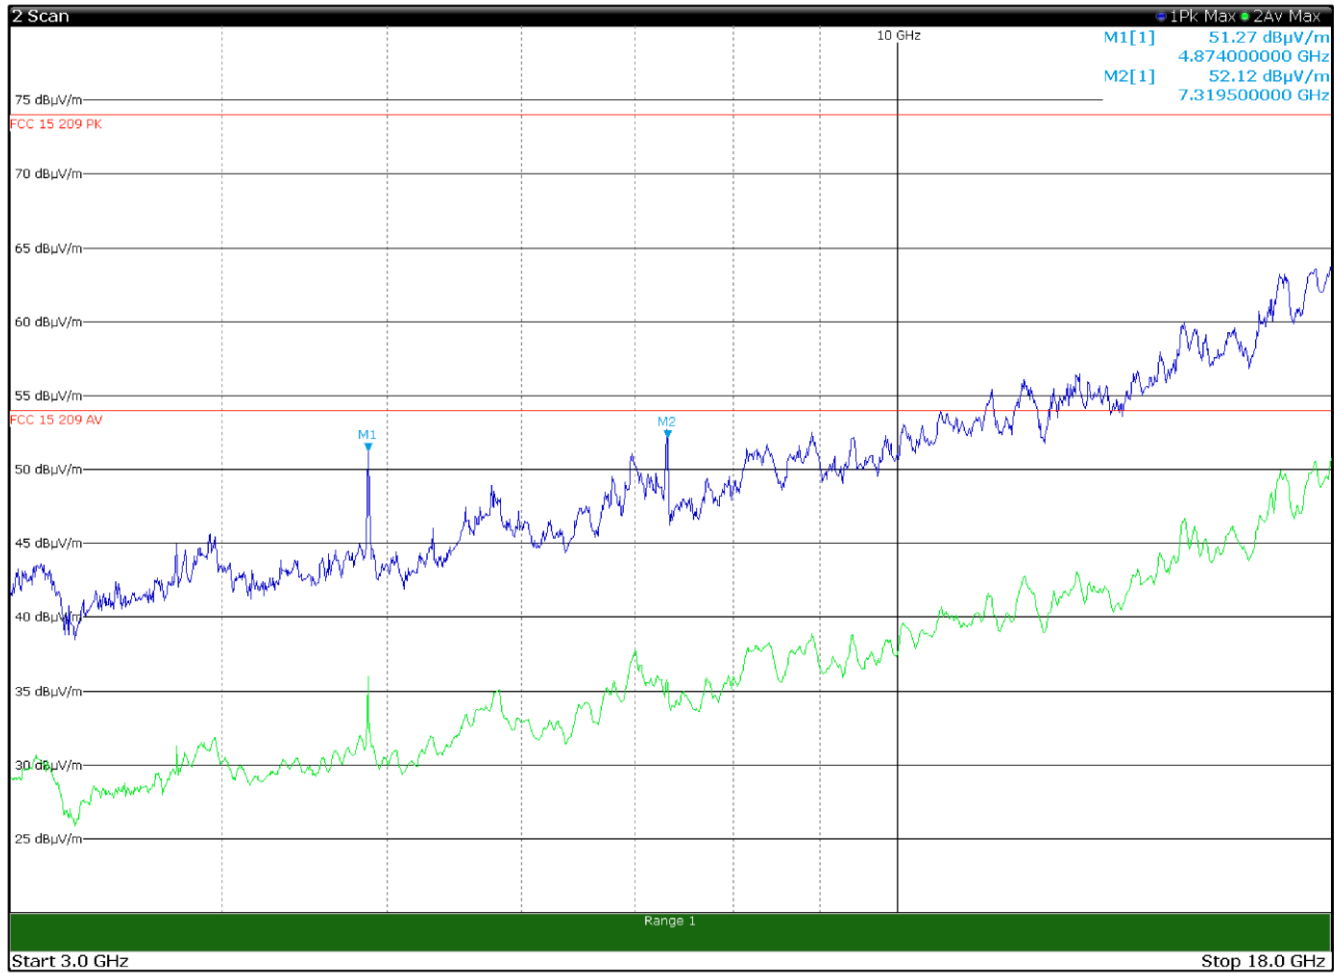

Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
4874.0000	54.1	74.0	-19.9	Pk
4874.0000	45.7	54.0	-8.3	Av
7319.5000	52.8	74.0	-21.2	Pk
7319.5000	44.4	54.0	-9.6	Av


The correction factor for the average value of pulsed emissions is $20 \log (DC) = 20 \log (0.38) = 8.4 \text{ dB}$

Section 8
Test name
Specification

Testing data
Radiated emission limits
FCC §15.209 (f), §15.247 (d), §15.407 (b), §27.53 (c), §27.53 (h), RSS-Gen Issue 5 §8.9
RSS-247 Issue 3 §5.5, RSS-247 Issue 3 §6.2, RSS-132 Issue 4 §5.5, RSS-133 Issue 6 §6.5.1



8.1.4 Test data, continued

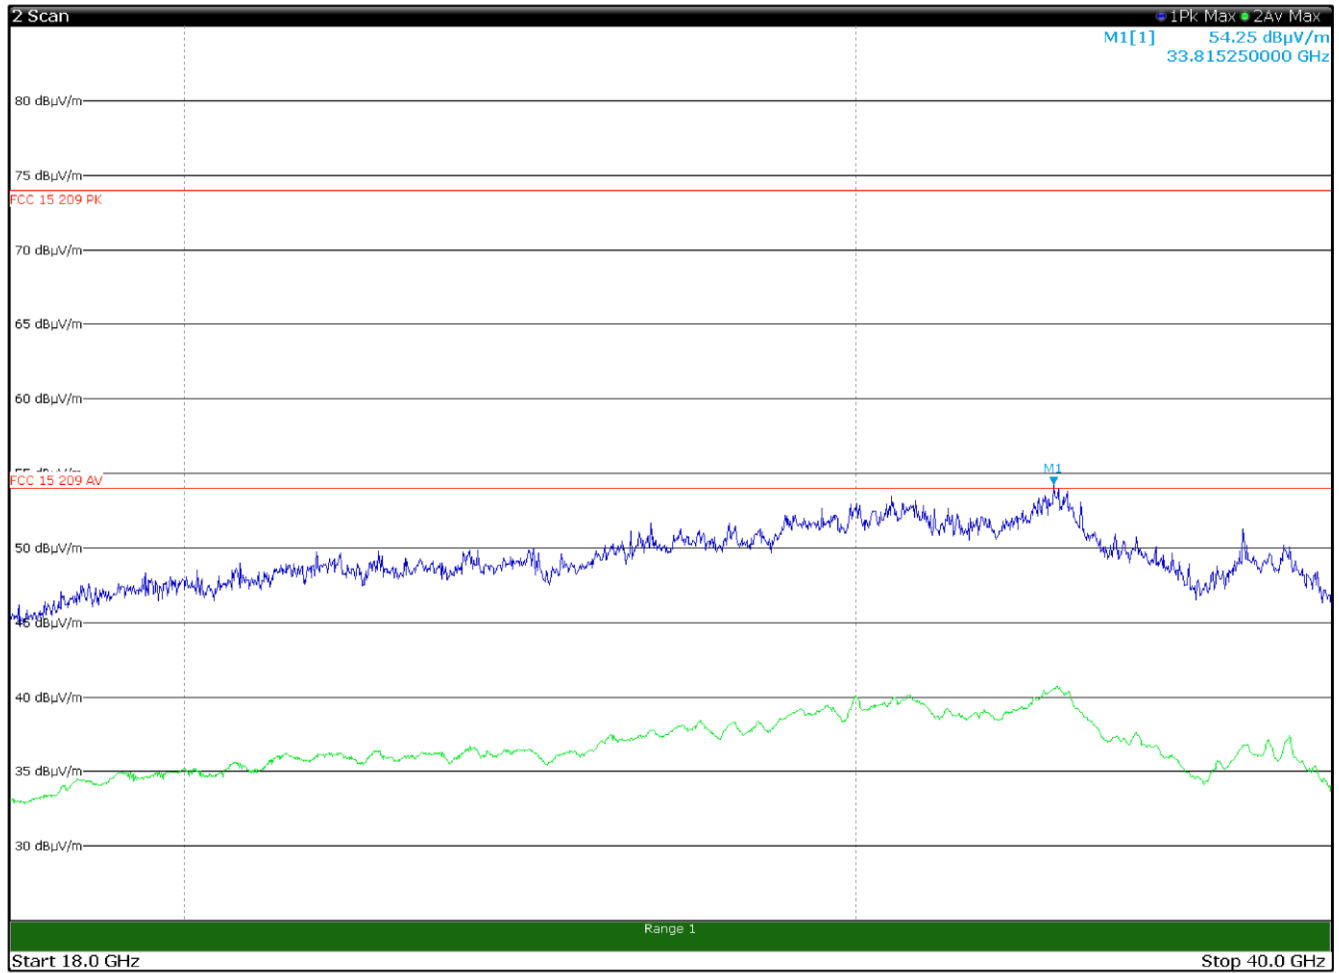


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Section 8
Test name
Specification

Testing data
Radiated emission limits
FCC §15.209 (f), §15.247 (d), §15.407 (b), §27.53 (c), §27.53 (h), RSS-Gen Issue 5 §8.9
RSS-247 Issue 3 §5.5, RSS-247 Issue 3 §6.2, RSS-132 Issue 4 §5.5, RSS-133 Issue 6 §6.5.1




8.1.4 Test data, continued

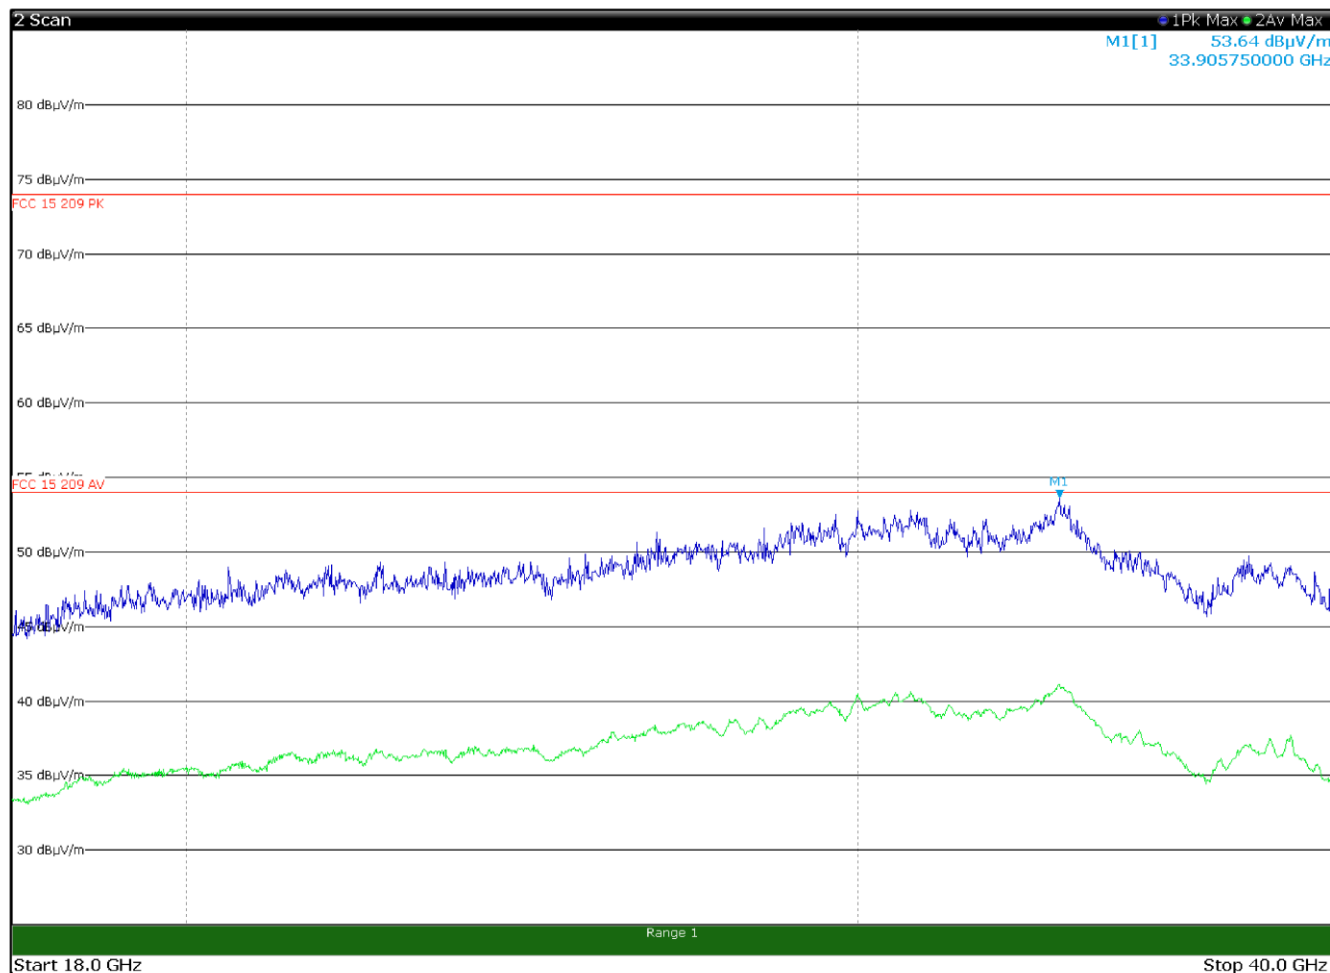

Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 2437 MHz and BT Tx at 2441 MHz (antenna configuration 1)

8.1.4 Test data, continued

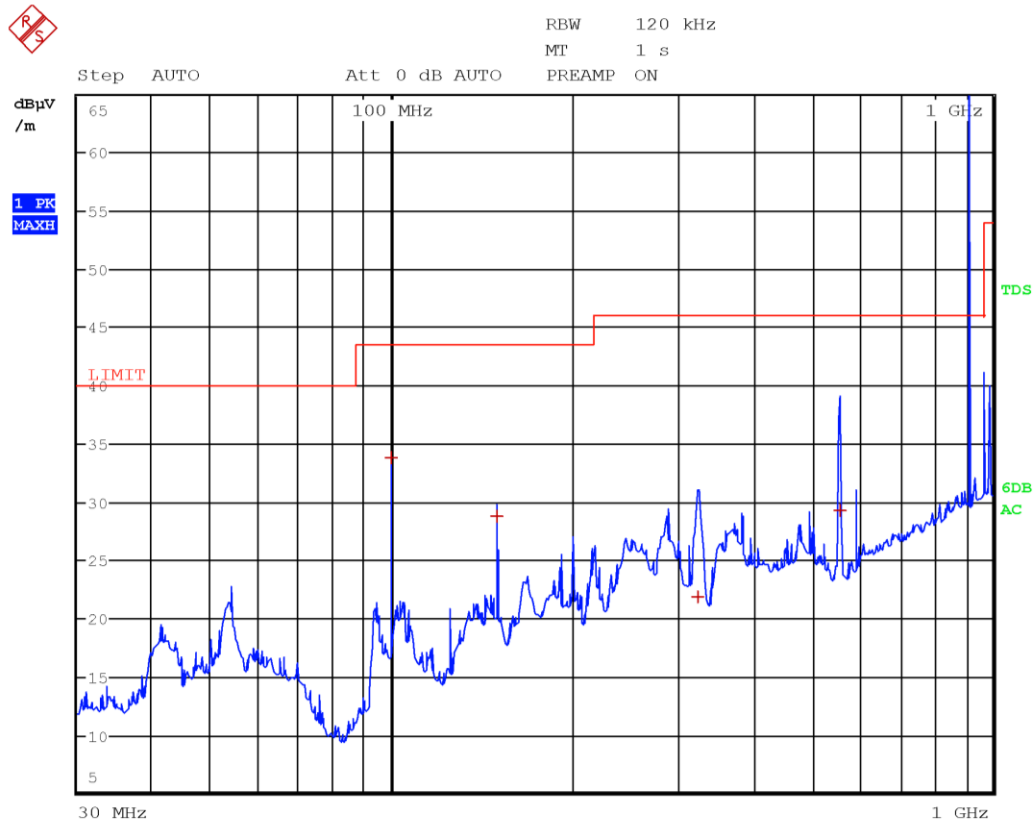


Radiated spurious emissions with antenna in horizontal polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
99.9900	33.8	43.5	-9.7	QP
150.0000	28.8	43.5	-14.7	QP
323.4900	21.9	46.0	-24.1	QP
557.2500	29.3	46.0	-16.7	QP
915.0000	116.4	--	--	PK

Limit exceeded by the carriers

8.1.4 Test data, continued

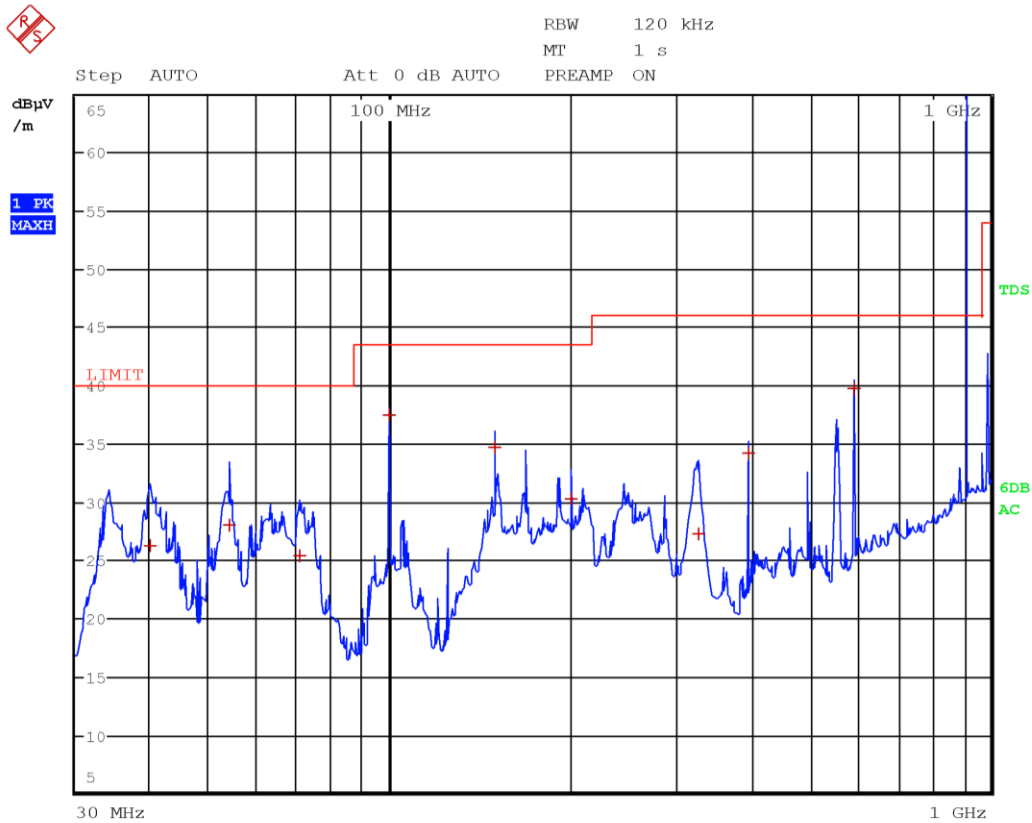

Radiated spurious emissions with antenna in vertical polarization and with
WCDMA Tx at 1880 MHz, UHF Tx at 915 MHz, WIFI Tx at 5220 MHz and BT Tx at 2441 MHz (antenna configuration 1)

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
39.8700	26.3	40.0	-13.7	QP
54.1500	28.0	40.0	-12.0	QP
70.8300	25.4	40.0	-14.6	QP
99.9900	37.5	43.5	-6.0	QP
150.0000	34.7	43.5	-8.8	QP
200.0100	30.3	43.5	-13.2	QP
326.5200	27.2	46.0	-18.8	QP
396.0000	34.3	46.0	-11.7	QP
594.0000	39.7	46.0	-6.3	QP
915.0000	127.2	--	--	PK

Limit exceeded by the carriers