FCC TEST REPORT
FCC ID: WR4-CRS1

Applicant Name.....	:	Topcon Positioning Systems, Inc.
Address.....	:	7400 National Drive Livermore California United States 94551
Manufacturer Name.....	:	Beijing Green Valley Technology Co., Ltd
Address.....	:	2301-2308, Suite A Building No.2 Zhongguancun Software Park, Haidian District, Beijing, P.R.China
Product.....	:	CR-S1 Handheld Mapping System
Model(s).....	:	CR-S1
Additional Model(s).....	:	/
Trademark.....	:	/
Model Difference.....	:	/
Prepared by.....	:	Guangdong Zhonghan Testing Technology Co., Ltd.
Address.....	:	Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Date of Receipt.....	:	Mar. 30, 2026
Date of Test(s).....	:	Mar. 30, 2026 to May 13, 2026
Date of Issue.....	:	May 13, 2026
Test Requested.....	:	Select test(s) as requested by the client.
Test Standard(s).....	:	FCC Part 15 Subpart E 15.407 KDB789033 D02 General U-NII Test Procedures New Rules v02r01
Test procedure.....	:	ANSI C63.10-2020+Cor 1-2023+Cor 1-2023

In the configuration tested, the EUT complied with the standards specified above.

Prepared by:	Reviewed by:	Approved by:
Kimi Lu	Baret.Wu	Levi Lee
Kimi Lu/ Engineer	Baret Wu/ Director	Levi Lee/ Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document.

Table of Contents Page

1.SUMMARY OF TEST RESULTS 5
2. GENERAL INFORMATION 6
2.1 GENERAL DESCRIPTION OF EUT 6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) 9
3. TEST FACILITY AND TEST INSTRUMENT USED 10
3.1 TEST FACILITY 10
3.2 EQUIPMENTS LIST FOR ALL TEST ITEMS 10
3.3 TESTING SOFTWARE 11
3.4 MEASUREMENT UNCERTAINTY 12
4.EMC EMISSION TEST 13
4.1 CONDUCTED EMISSION MEASUREMENT 13
4.1.1 POWER LINE CONDUCTED EMISSION Limits 13
4.1.2 TEST PROCEDURE 13
4.1.3 DEVIATION FROM TEST STANDARD 13
4.1.4 TEST SETUP 14
4.1.5 EUT OPERATING CONDITIONS 14
4.1.6 TEST RESULTS 14
4.2 RADIATED EMISSION MEASUREMENT 15
4.2.1 APPLICABLE STANDARD 15
4.2.2 CONFORMANCE LIMIT 15
4.2.3 MEASURING INSTRUMENTS 16
4.2.4 TEST CONFIGURATION 17
4.2.5 TEST PROCEDURE 18
5.POWER SPECTRAL DENSITY TEST 40
5.1 APPLIED PROCEDURES / LIMIT 40
5.2 TEST PROCEDURE 41
5.3 DEVIATION FROM STANDARD 41
5.4 TEST SETUP 41
5.5 EUT OPERATION CONDITIONS 41
5.6 TEST RESULTS 42
6. 26DB & 6DB &99% EMISSION BANDWIDTH 43
6.1 APPLIED PROCEDURES / LIMIT 43
6.2 TEST PROCEDURE 43
6.3 EUT OPERATION CONDITIONS 44
6.4 TEST RESULTS 44

Table of Contents Page

7.MAXIMUM CONDUCTED OUTPUT POWER 45
7.1 PLIED PROCEDURES / LIMIT 45
7.2 TEST PROCEDURE 46
7.3 DEVIATION FROM STANDARD 46
7.4 TEST SETUP 46
7.5 EUT OPERATION CONDITIONS 46
7.6 TEST RESULTS 46
8.OUT OF BAND EMISSIONS 47
8.1 APPLICABLE STANDARD 47
8.2 TEST PROCEDURE 48
8.3 DEVIATION FROM STANDARD 48
8.4 TEST SETUP 48
8.5 EUT OPERATION CONDITIONS 48
8.6 TEST RESULTS 48
9.SPURIOUS RF CONDUCTED EMISSIONS 49
9.1 CONFORMANCE LIMIT 49
9.3 TEST SETUP 49
9.4 TEST PROCEDURE 49
9.5 TEST RESULTS 50
10.FREQUENCY STABILITY MEASUREMENT 51
10.1 LIMIT 51
10.2 TEST PROCEDURES 51
10.3 TEST SETUP LAYOUT 51
10.4 EUT OPERATION DURING TEST 52
10.5 TEST RESULTS 52
11.CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME 53
11.1LIMIT 53
11.2 TEST SETUP LAYOUT 53
11.3TEST PROCEDURE 53
11.4TEST RESULTS 54
12.NON-OCCUPANCY PERIOD TEST 55
12.1LIMIT 55
12.2TEST SETUP LAYOUT 55

Table of Contents Page

13.DFS DETECTION THRESHOLDS 56
13.1LIMIT 57
13.2TEST SETUP LAYOUT 57
13.3TEST RESULTS 57
14.ANTENNA REQUIREMENT 59
15. TEST SETUP PHOTO 60
16. EUT CONSTRUCTIONAL DETAILS 60

1.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207(a)	AC Power Line Conducted Emission	N/A	
15.205(a)/§15.209(a) 15.407(b)(1) 15.407(b)(4) 15.407(b)(8)	Radiated Emissions and Band Edge	PASS	
15.407 (e) 789033 D02 General U-NII	26dB Emission Bandwidth and 6dB Occupied Bandwidth	PASS	
15.407(a)(1) 15.407 (a)(3) i	Power Spectral Density	PASS	
15.407(a)(1) 15.407 (a)(3) i 15.407(a)(12)	Maximum Conducted Output Power	PASS	
15.407(b)(1) 15.407(b)(4) 15.407(b)(8)	Conducted Band Edge	PASS	
15.407(g)	Frequency Stability	PASS	
789033 D02 General U-NII	Duty Cycle	PASS	
15.203	Antenna Requirement	PASS	
15.407(h)(2)(iii)	Channel Move Time, Channel Closing Transmission Time	PASS	
15.407(h)(2)(iv)	Non-Occupancy Period Test	PASS	
KDB 905462 D02, Clause 5.2 Table 3	DFS Detection Thresholds	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	CR-S1 Handheld Mapping System	
Test Model No.:	CR-S1	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac (20MHz channel bandwidth) ☒ 802.11n/ac (40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n/ac(HT20/HT40):MCS0-MCS7; 802.11ac(VHT80):NSS1, MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; ☒ 5260-5320MHz for 802.11a/n(HT20)/ac20; 5270-5310MHz for 802.11n(HT40)/ac40; 5290MHz for 802.11 ac80; ☒ 5500-5700MHz for 802.11a/n(HT20)/ac20; 5510-5670MHz for 802.11n(HT40)/ac40; 5530-5610MHz for 802.11 ac80; ☒ 5745-5825 MHz for802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40; 5775MHz for 802.11 ac80;
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230 MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 4 channels for 802.11a/n20/ac20 in the 5260-5320MHz band ; 2 channels for 802.11 n40/ac40 in the 5270-5310 MHz band ; 1 channels for 802.11 ac80 in the 5290MHz band ; ☒ 11 channels for 802.11a/n20/ac20 in the 5500-5700MHz band ; 5 channels for 802.11 n40/ac40 in the 5510-5670 MHz band ; 2 channels for 802.11 ac80 in the 5530-5610MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795 MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
TPC:	☐ Supported ☒ Unspported	
Channel Puncturing Function:	☒ Supported ☐ Unspported	
Channel List	Please refer to the Note 2.	
Antenna Type and Antenna gain:	Internal Antenna, 4.2dBi	
Power supply:	DC 14.4 V powered by battery	

Note:
For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

802.11a/n/ac(20MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	40	5200	48	5240
52	5260	56	5280	60	5300	64	5320
100	5500	104	5520	108	5540	112	5560
120	5600	132	5660	136	5680	140	5700
149	5745	153	5765	157	5785	161	5805
165	5825						

802.11n(40MHz) Frequency Channel 802.11n /ac(40MHz)Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	54	5270	62	5310
102	5510	110	5550	118	5590	126	5630
134	5670	151	5755	159	5795		

802.11ac(80MHz) Frequency Channel	
Channel	Frequency (MHz)
42	5210
58	5290
106	5530
122	5610
155	5775

2.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Pretest Mode	Description
Mode 1	802.11a / n20/ac 20/ CH36/ CH40/ CH48/ CH52/ CH56/ CH64/ CH100/ CH120/ CH140/ CH149 / CH157 / CH165
Mode 2	802.11n 40/ac40 CH38/ CH46/ CH54/ CH62/ CH102/ CH118/ CH134/ CH151/ CH159
Mode 3	802.11 ac80 CH42/ CH58/ CH106/ CH122/ CH155
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n20/ac 20/ CH36/ CH40/ CH48/ CH52/ CH56/ CH64/ CH100/ CH120/ CH140/ CH149 / CH157 / CH165
Mode 2	802.11n 40/ac40 CH38/ CH46/ CH54/ CH62/ CH102/ CH118/ CH134/ CH151/ CH159
Mode 3	802.11 ac80 CH42/ CH58/ CH106/ CH122/ CH155
Mode 4	Link Mode

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Radiated Emission



RF Conducted Test



DFS test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Laptop	Lenovo (Beijing) Co., Ltd	ThinkPad E480	/	AE
E-2	FTTH GEN8 AX GPON GR140IG V2 B05-1	Altice Labs	GR140IG	FCC ID:2AW68-GR140IG	AE

Note:

(1) The support equipment was authorized by Declaration of Confirmation.

(2) For detachable type I/O cable should be specified the length in cm in『Length』column.

(3) The test software is the SecureCRTPortable.exe which can set the EUT into the individual test modes.TX Power:default.

Note 1: We test all channels that need to be tested for DFS, reporting only part of the test pattemand data. in this report, wehave identified other parts that are compliant with FCC regulations.

Note 2: The method of establishing a connection between the master device and the slave device.After inserting the EUT USB port into the PC, the laptop opens the router control interface toconnect to the EUT and control its corresponding signal transmission.

1. The frequency range of equipment operation is: U-NII-1: 5180 MHz to 5240 MHz, U-NII-2A: 5260 MHz to 5320 MHz, U-NII-2C: 5500 MHz to 5700 MHz, U-NII-3: 5745 MHz to 5825 MHz.
2. The operating modes is Client, Equipped with radar detection capability, the main U-NII device FCC ID used for DFS testing is 2AW68-GR140IG
3. Please refer to section 5.4 of this report for the maximum and minimum possible power levels(Eguivalent Isotropic Radiated Power (EIRP)) of the equipment, The antenna gain is 4.2dBi.
4. Test sequences or messages that should be used for communication between Master andClient Devices, which are used for Channel loading.Stream the test file from the Master Deviceto the Client Device for IP based systems or frame based systems which dynamically allocatethe talk/listen ratio.
5. The time required for the master and slave devices to fully start is 120 seconds.
6. The product belongs to Slave without radar detection
7. Manufacturer statement confirming that infommation regarding the parameters of the detectedRadar Waveforms is not available to the end user.
8. Manufacturers can manually select the channel 5290MHz and 5300MHz.

3. TEST FACILITY AND TEST INSTRUMENT USED

3.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add. : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

3.2 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
					Apr. 24, 2026	Apr. 23, 2027
2	Loop Antenna	TESEQ	HLA6121	58357	Sept. 8, 2025	Sept. 7, 2026
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	May 6, 2025	May 5, 2026
					Apr. 24, 2026	Apr. 23, 2027
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 7, 2025	May 6, 2026
					May 8, 2026	May 7, 2027
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	May 15, 2025	May 14, 2026
					Apr. 25, 2026	Apr. 24, 2027
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 15, 2025	May 14, 2026
					Apr. 25, 2026	Apr. 24, 2027
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 20, 2025	Oct. 19, 2026
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 20, 2025	Oct. 19, 2026
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
					Apr. 24, 2026	Apr. 23, 2027
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 7, 2025	May 6, 2026
					Apr. 24, 2026	Apr. 23, 2027
12	Single Generator	Agilent	N5182A	MY48180575	May 7, 2025	May 6, 2026
					Apr. 24, 2026	Apr. 23, 2027
13	Power Sensor	MWRFtest	MW100-RFCB	/	May 7, 2025	May 6, 2026
					Apr. 24, 2026	Apr. 23, 2027
14	CABLE	EMToni	DA800-NM-NM-11000MM	/	May 6, 2025	May 5, 2026
					Apr. 24, 2026	Apr. 23, 2027

Conduction Test equipment

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
				Apr. 24, 2026	Apr. 23, 2027
LISN	R&S	ENV216	102794	May 6, 2025	May 5, 2026
				Apr. 24, 2026	Apr. 23, 2027
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	May 7, 2025	May 6, 2026
				Apr. 24, 2026	Apr. 23, 2027
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	May 7, 2025	May 6, 2026
				Apr. 24, 2026	Apr. 23, 2027
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2025	May 7, 2026
				Apr. 24, 2026	Apr. 23, 2027
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2025	May 7, 2026
				Apr. 24, 2026	Apr. 23, 2027
CABLE	EMToni	G223-NM-BNCM -2000MM	/	May 7, 2025	May 6, 2026
				Apr. 24, 2026	Apr. 23, 2027

Conducted Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
2	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
					Apr. 24, 2026	Apr. 23, 2027
3	Power Sensor	MWRFtest	MW100-RFCB	/	May 7, 2025	May 6, 2026
					Apr. 24, 2026	Apr. 23, 2027
4	Constant Temperature and Humidity Test Chamber	OJN	OJN-9606	/	Apr. 20, 2025	Apr. 19, 2026
					Apr. 15, 2026	Apr. 14, 2027

3.3 TESTING SOFTWARE

Project	Software name	Edition
RF Conducted	MTS 8310	2.0.0.0
Conducted Emission	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission	EZ-EMC	FA-03A2 RE+

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ± U,where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2,providing a level of confidence of approximately 95 %。

No.	Item	Uncertainty
1	Conducted Emission Test	0.92dB
2	RF conducted power	0.16dB
3	Conducted spurious emissions	0.21dB
4	All radiated emissions (9k-30MHz)	4.68dB
5	All radiated emissions (30-1GHz)	5.1dB
6	All radiated emissions (1-6GHz)	3.9dB
7	All radiated emissions (6GHz-18GHz)	4.3dB
8	All radiated emissions (18-40GHz)	4.65dB
9	Temperature	0.5°C
10	Humidity	2%
11	Occupied Bandwidth	4.96%
12	RF Power Density	0.77dB
13	DFS Detection Thresholds	U95% = 2 x uc = 2 x 1.23 = 1.94(dB) U95% = 2 x uc = 2 x 0.03 = 0.03(s)

Decision Rule

☒ Uncertainty is not included

☐ Uncertainty is included

4.EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen 8.8
Test Method:	ANSI C63.10-2020+Cor 1-2023+Cor 1-2023
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.


d. LISN at least 80 cm from nearest part of EUT chassis.

e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

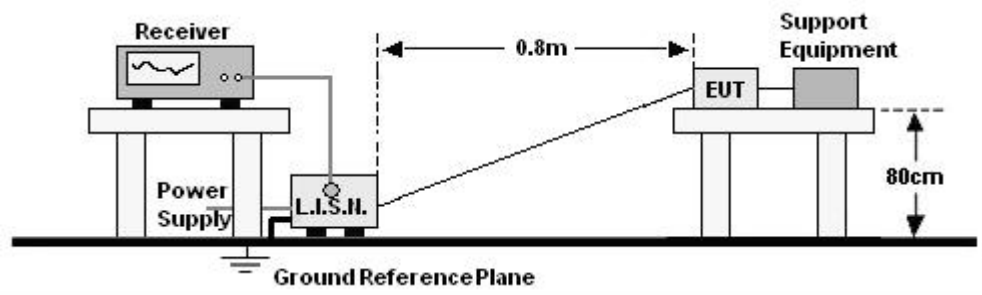

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 TEST RESULTS

N/A

The EUT is powered by the DC only, The test item is not applicable.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209, RSS-247 6.2.1.2, RSS-Gen

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

RSS-Gen 8.10 Restricted frequency bands

MHz	MHz	MHz	GHz
0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475-156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614		

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5850	-27(Note 2)	68.2
	10(Note 2)	105.2
	15.6(Note 2)	110.8
	27(Note 2)	122.2

NOTE:
1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:
E= $\frac{1000000\sqrt{30P}}{3}$ uV/m, where P is the eirp (Watts)
2, According to FCC 16-24,All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to RSS-Gen§8.9: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field

strength limits specified in RSS-Gen Issue 5 is not required.
In case the emission fall within the restricted band specified on RSS-Gen Issue 5, then the RSS-Gen Issue 5 limit in the table below has to be followed.


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

4.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

4.2.4 TEST CONFIGURATION


1.For radiated emissions below 30MHz

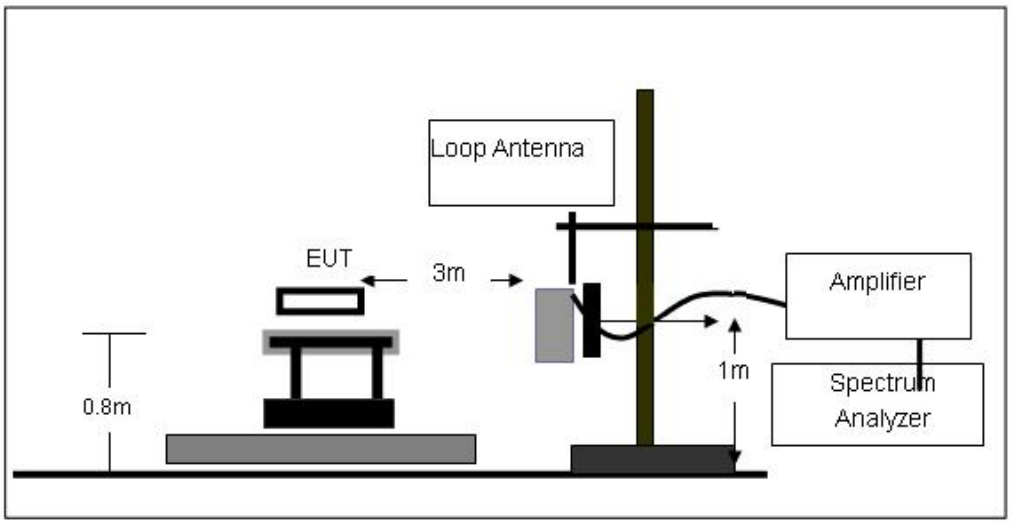

2.For radiated emissions from 30MHz to 1000MHz

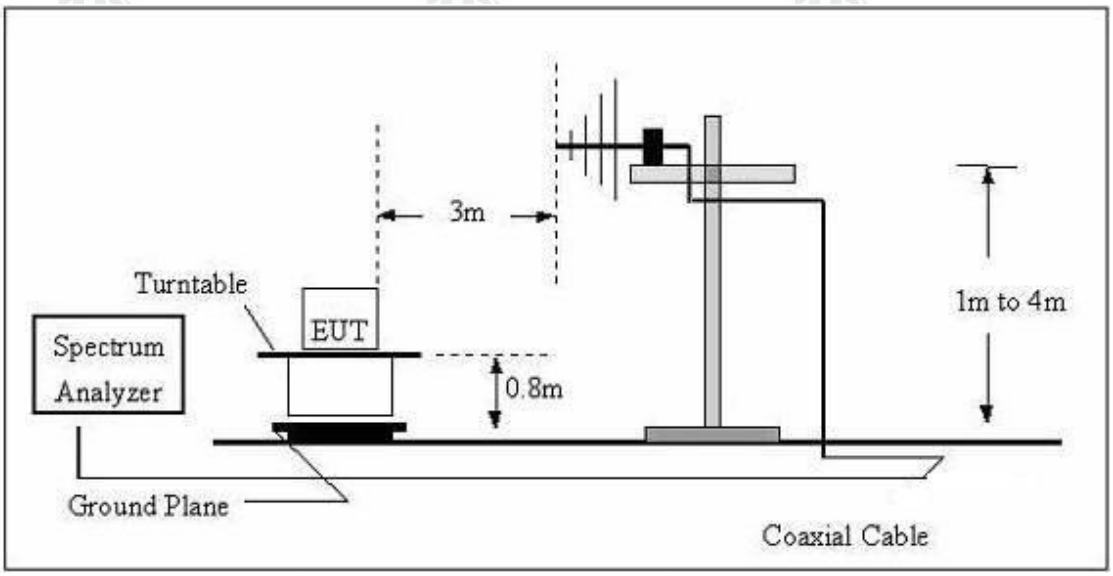

3. Radiated Emission Test-Up Frequency Above 1GHz

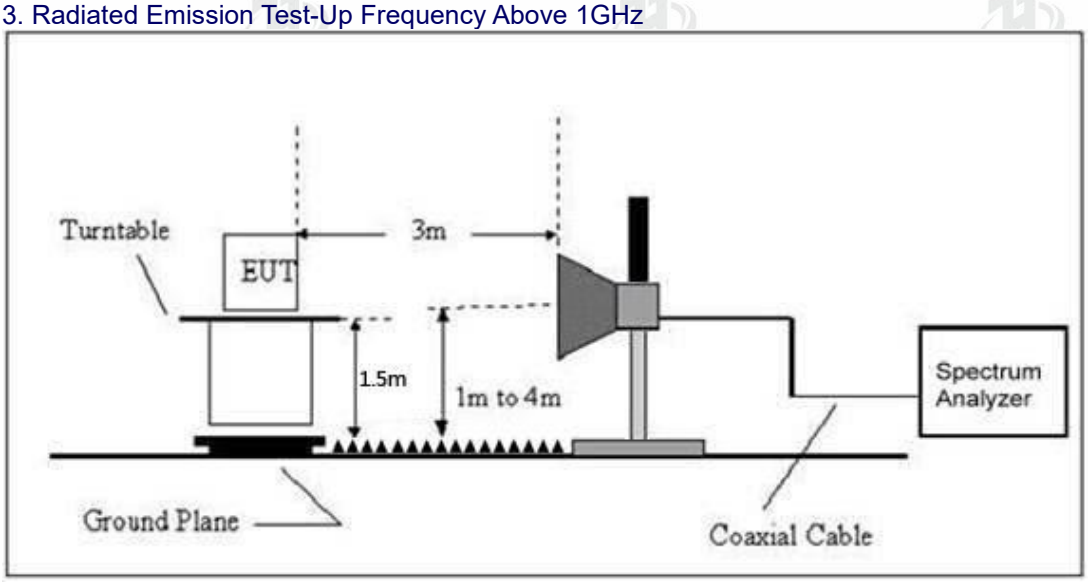

4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2020+Cor 1-2023. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2020+Cor 1-2023 and CAN/CSA-CEI/IEC CISPR 22.
This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.
It must be performed with the highest gain of each type of antenna proposed for use with the EUT.
Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:
Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz


Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

4.2.6 TEST RESULT(Between 9KHz – 30MHz)

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


Between 30MHz – 1GHz

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 14.4 V		

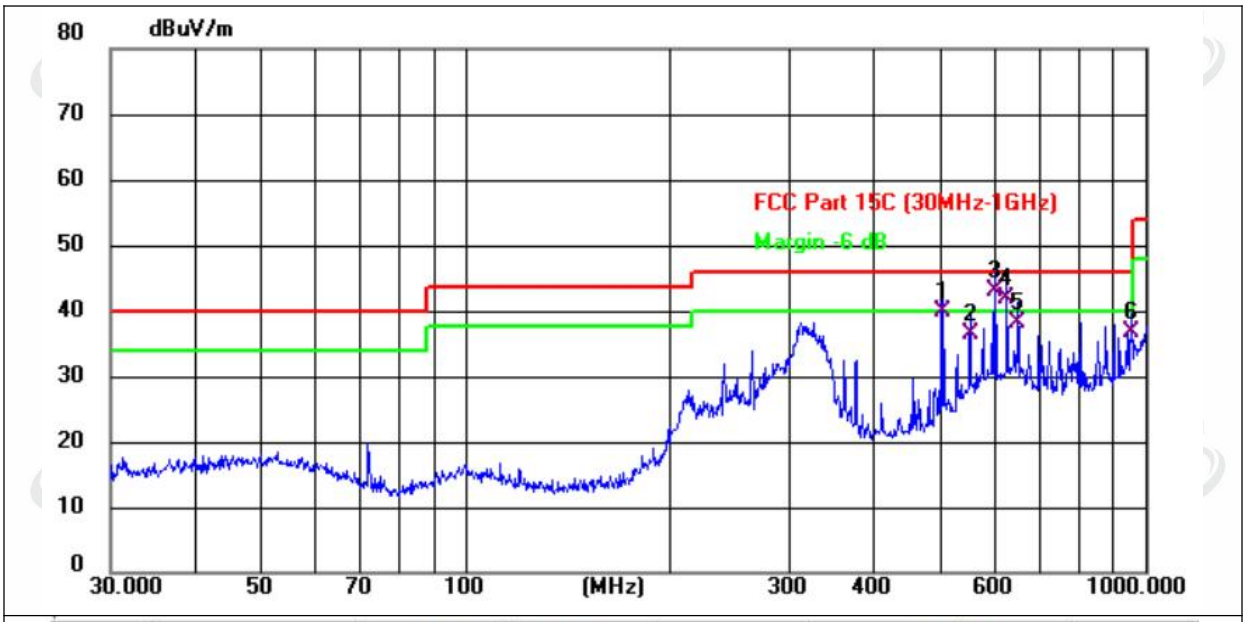

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	504.7062	43.10	-3.26	39.84	46.00	-6.16	QP
2	552.8832	38.83	-2.32	36.51	46.00	-9.49	QP
3 *	601.4265	44.25	-1.39	42.86	46.00	-3.14	QP
4 !	625.0780	42.87	-0.92	41.95	46.00	-4.05	QP
5	649.6594	38.62	-0.47	38.15	46.00	-7.85	QP
6	952.0937	32.68	3.97	36.65	46.00	-9.35	QP

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 14.4 V		

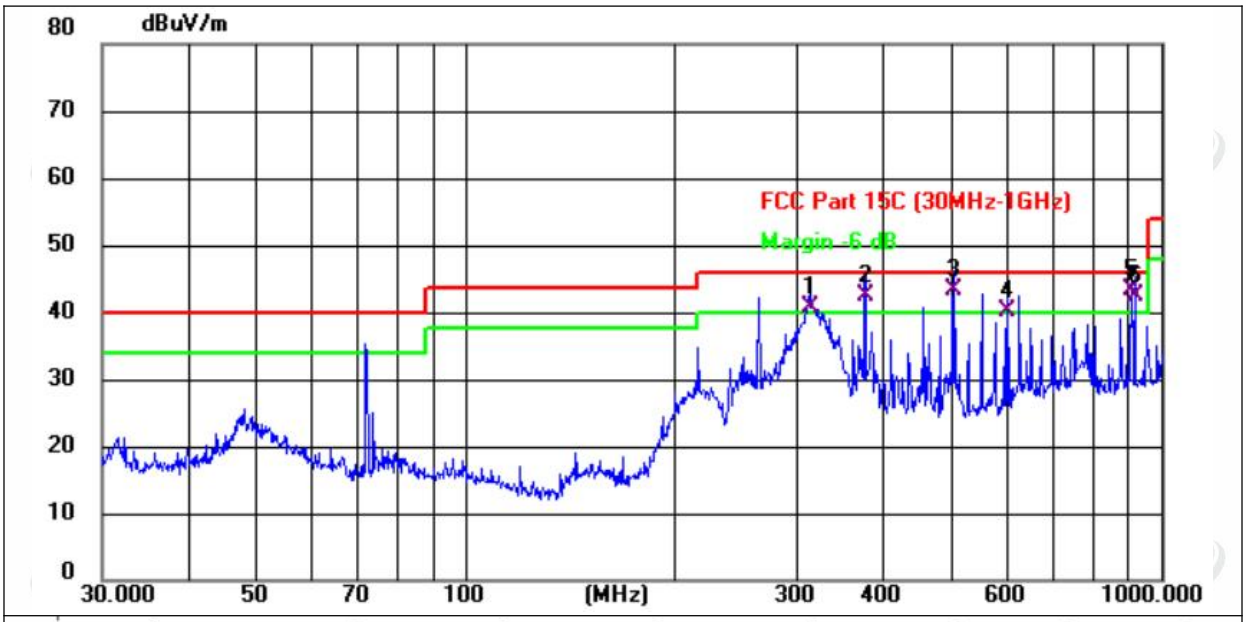

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	312.1792	47.57	-6.94	40.63	46.00	-5.37	QP
2 !	375.9384	48.07	-5.56	42.51	46.00	-3.49	QP
3 !	504.7062	46.43	-3.26	43.17	46.00	-2.83	QP
4 !	601.4265	41.45	-1.39	40.06	46.00	-5.94	QP
5 *	906.4823	39.87	3.51	43.38	46.00	-2.62	QP
6 !	916.0684	38.68	3.61	42.29	46.00	-3.71	QP

Remarks:
1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2.The emission levels of other frequencies are very lower than the limit and not show in test report.
3.All mode have been tested,The worst mode is 5.8G 802.11n20 5825MHz is recorded.

Temperature :	24.2℃	Relative Humidity:	54%
Pressure :	1010 hPa	Test Voltage :	DC 14.4 V

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
5180MHz									
H	15540.0	55.5	30.55	5.77	24.66	55.38	68.2	-18.62	PK
H	15540.0	41.54	30.55	5.77	24.66	41.42	54	-12.58	AV
V	15540.0	59.45	30.33	6.32	24.55	59.99	68.2	-14.01	PK
V	15540.0	44.57	30.33	6.32	24.55	45.11	54	-8.89	AV
5200MHz									
H	15600.0	56.33	30.55	5.77	24.66	56.21	68.2	-17.79	PK
H	15600.0	41.71	30.55	5.77	24.66	41.59	54	-12.41	AV
V	15600.0	57.31	30.33	6.32	24.55	57.85	68.2	-16.15	PK
V	15600.0	44.2	30.33	6.32	24.55	44.74	54	-9.26	AV
5240MHz									
H	15720.0	59.61	30.55	5.77	24.66	59.49	68.2	-14.51	PK
H	15720.0	41.36	30.55	5.77	24.66	41.24	54	-12.76	AV
V	15720.0	55.58	30.33	6.32	24.55	56.12	68.2	-17.88	PK
V	15720.0	42.93	30.33	6.32	24.55	43.47	54	-10.53	AV
5260MHz									
H	15780.0	55.34	30.55	5.77	24.66	55.22	68.2	-18.78	PK
H	15780.0	41.75	30.55	5.77	24.66	41.63	54	-12.37	AV
V	15780.0	57.56	30.33	6.32	24.55	58.1	68.2	-15.9	PK
V	15780.0	41.86	30.33	6.32	24.55	42.4	54	-11.6	AV
5280MHz									
H	15840.0	57.02	30.55	5.77	24.66	56.9	68.2	-17.1	PK
H	15840.0	41.72	30.55	5.77	24.66	41.6	54	-12.4	AV
V	15840.0	56.45	30.33	6.32	24.55	56.99	68.2	-17.01	PK
V	15840.0	43.92	30.33	6.32	24.55	44.46	54	-9.54	AV
5320MHz									
H	15960.0	56.47	30.55	5.77	24.66	56.35	68.2	-17.65	PK
H	15960.0	43.73	30.55	5.77	24.66	43.61	54	-10.39	AV
V	15960.0	56.32	30.33	6.32	24.55	56.86	68.2	-17.14	PK
V	15960.0	42.28	30.33	6.32	24.55	42.82	54	-11.18	AV
5500MHz									
H	16500.0	55.41	30.55	5.77	24.66	55.29	68.2	-18.71	PK
H	16500.0	44.56	30.55	5.77	24.66	44.44	54	-9.56	AV
V	16500.0	58.19	30.33	6.32	24.55	58.73	68.2	-15.27	PK
V	16500.0	44.17	30.33	6.32	24.55	44.71	54	-9.29	AV
5600MHz									
H	16740.0	58.45	30.55	5.77	24.66	58.33	68.2	-15.67	PK
H	16740.0	44.82	30.55	5.77	24.66	44.7	54	-9.3	AV
V	16740.0	59.32	30.33	6.32	24.55	59.86	68.2	-14.14	PK
V	16740.0	42.8	30.33	6.32	24.55	43.34	54	-10.66	AV
5700MHz									
H	17100.0	56.52	30.55	5.77	24.66	56.4	68.2	-17.6	PK
H	17100.0	41.68	30.55	5.77	24.66	41.56	54	-12.44	AV
V	17100.0	56.31	30.33	6.32	24.55	56.85	68.2	-17.15	PK
V	17100.0	42.09	30.33	6.32	24.55	42.63	54	-11.37	AV

5745MHz									
H	17235.0	57.87	30.55	5.77	24.66	57.75	68.2	-16.25	PK
H	17235.0	42	30.55	5.77	24.66	41.88	54	-12.12	AV
V	17235.0	57.2	30.33	6.32	24.55	57.74	68.2	-16.26	PK
V	17235.0	41.54	30.33	6.32	24.55	42.08	54	-11.92	AV
5785MHz									
H	17355.0	57.67	30.55	5.77	24.66	57.55	68.2	-16.45	PK
H	17355.0	41.09	30.55	5.77	24.66	40.97	54	-13.03	AV
V	17355.0	56.1	30.33	6.32	24.55	56.64	68.2	-17.36	PK
V	17355.0	43.77	30.33	6.32	24.55	44.31	54	-9.69	AV
5825MHz									
H	17475.0	59.07	30.55	5.77	24.66	58.95	68.2	-15.05	PK
H	17475.0	44.62	30.55	5.77	24.66	44.5	54	-9.5	AV
V	17475.0	59.8	30.33	6.32	24.55	60.34	68.2	-13.66	PK
V	17475.0	41.21	30.33	6.32	24.55	41.75	54	-12.25	AV

802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
5180MHz									
H	15540.0	58.24	30.55	5.77	24.66	58.12	68.2	-15.88	PK
H	15540.0	42.52	30.55	5.77	24.66	42.4	54	-11.6	AV
V	15540.0	55.97	30.33	6.32	24.55	56.51	68.2	-17.49	PK
V	15540.0	41.4	30.33	6.32	24.55	41.94	54	-12.06	AV
5200MHz									
H	15600.0	57.45	30.55	5.77	24.66	57.33	68.2	-16.67	PK
H	15600.0	43.86	30.55	5.77	24.66	43.74	54	-10.26	AV
V	15600.0	59.38	30.33	6.32	24.55	59.92	68.2	-14.08	PK
V	15600.0	41.69	30.33	6.32	24.55	42.23	54	-11.77	AV
5240MHz									
H	15720.0	58.9	30.55	5.77	24.66	58.78	68.2	-15.22	PK
H	15720.0	41.75	30.55	5.77	24.66	41.63	54	-12.37	AV
V	15720.0	56.91	30.33	6.32	24.55	57.45	68.2	-16.55	PK
V	15720.0	44.85	30.33	6.32	24.55	45.39	54	-8.61	AV
5260MHz									
H	15780.0	57.54	30.55	5.77	24.66	57.42	68.2	-16.58	PK
H	15780.0	41.68	30.55	5.77	24.66	41.56	54	-12.44	AV
V	15780.0	59.99	30.33	6.32	24.55	60.53	68.2	-13.47	PK
V	15780.0	41.63	30.33	6.32	24.55	42.17	54	-11.83	AV
5280MHz									
H	15840.0	56.06	30.55	5.77	24.66	55.94	68.2	-18.06	PK
H	15840.0	41.58	30.55	5.77	24.66	41.46	54	-12.54	AV
V	15840.0	57.87	30.33	6.32	24.55	58.41	68.2	-15.59	PK
V	15840.0	43.78	30.33	6.32	24.55	44.32	54	-9.68	AV
5320MHz									
H	15960.0	58.61	30.55	5.77	24.66	58.49	68.2	-15.51	PK
H	15960.0	41	30.55	5.77	24.66	40.88	54	-13.12	AV
V	15960.0	58.28	30.33	6.32	24.55	58.82	68.2	-15.18	PK
V	15960.0	43.96	30.33	6.32	24.55	44.5	54	-9.5	AV
5500MHz									
H	16500.0	58.2	30.55	5.77	24.66	58.08	68.2	-15.92	PK
H	16500.0	42.4	30.55	5.77	24.66	42.28	54	-11.72	AV
V	16500.0	58.96	30.33	6.32	24.55	59.5	68.2	-14.5	PK
V	16500.0	42.5	30.33	6.32	24.55	43.04	54	-10.96	AV

5600MHz									
H	16740.0	59.78	30.55	5.77	24.66	59.66	68.2	-14.34	PK
H	16740.0	43.7	30.55	5.77	24.66	43.58	54	-10.42	AV
V	16740.0	58.42	30.33	6.32	24.55	58.96	68.2	-15.04	PK
V	16740.0	42.23	30.33	6.32	24.55	42.77	54	-11.23	AV
5700MHz									
H	17100.0	56.54	30.55	5.77	24.66	56.42	68.2	-17.58	PK
H	17100.0	41.27	30.55	5.77	24.66	41.15	54	-12.85	AV
V	17100.0	57.56	30.33	6.32	24.55	58.1	68.2	-15.9	PK
V	17100.0	41.43	30.33	6.32	24.55	41.97	54	-12.03	AV
5745MHz									
H	17235.0	58.44	30.55	5.77	24.66	58.32	68.2	-15.68	PK
H	17235.0	41.75	30.55	5.77	24.66	41.63	54	-12.37	AV
V	17235.0	57.5	30.33	6.32	24.55	58.04	68.2	-15.96	PK
V	17235.0	41.12	30.33	6.32	24.55	41.66	54	-12.34	AV
5785MHz									
H	17355.0	55.62	30.55	5.77	24.66	55.5	68.2	-18.5	PK
H	17355.0	41.74	30.55	5.77	24.66	41.62	54	-12.38	AV
V	17355.0	58.97	30.33	6.32	24.55	59.51	68.2	-14.49	PK
V	17355.0	43.36	30.33	6.32	24.55	43.9	54	-10.1	AV
5825MHz									
H	17475.0	55.53	30.55	5.77	24.66	55.41	68.2	-18.59	PK
H	17475.0	43.08	30.55	5.77	24.66	42.96	54	-11.04	AV
V	17475.0	58.38	30.33	6.32	24.55	58.92	68.2	-15.08	PK
V	17475.0	43.43	30.33	6.32	24.55	43.97	54	-10.03	AV

802.11ac20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
5180MHz									
H	15540.0	57.2	30.55	5.77	24.66	57.08	68.2	-16.92	PK
H	15540.0	43.52	30.55	5.77	24.66	43.4	54	-10.6	AV
V	15540.0	59.45	30.33	6.32	24.55	59.99	68.2	-14.01	PK
V	15540.0	42.33	30.33	6.32	24.55	42.87	54	-11.13	AV
5200MHz									
H	15600.0	57.26	30.55	5.77	24.66	57.14	68.2	-16.86	PK
H	15600.0	41.16	30.55	5.77	24.66	41.04	54	-12.96	AV
V	15600.0	59.45	30.33	6.32	24.55	59.99	68.2	-14.01	PK
V	15600.0	44.09	30.33	6.32	24.55	44.63	54	-9.37	AV
5240MHz									
H	15720.0	57.85	30.55	5.77	24.66	57.73	68.2	-16.27	PK
H	15720.0	41.42	30.55	5.77	24.66	41.3	54	-12.7	AV
V	15720.0	58.23	30.33	6.32	24.55	58.77	68.2	-15.23	PK
V	15720.0	42.29	30.33	6.32	24.55	42.83	54	-11.17	AV
5260MHz									
H	15780.0	55.56	30.55	5.77	24.66	55.44	68.2	-18.56	PK
H	15780.0	41.96	30.55	5.77	24.66	41.84	54	-12.16	AV
V	15780.0	55.77	30.33	6.32	24.55	56.31	68.2	-17.69	PK
V	15780.0	41.75	30.33	6.32	24.55	42.29	54	-11.71	AV
5280MHz									
H	15840.0	57.8	30.55	5.77	24.66	57.68	68.2	-10.52	PK
H	15840.0	41.75	30.55	5.77	24.66	41.63	54	-12.37	AV
V	15840.0	55.21	30.33	6.32	24.55	55.75	68.2	-12.45	PK
V	15840.0	41.88	30.33	6.32	24.55	42.42	54	-11.58	AV
5320MHz									

H	15960.0	56.61	30.55	5.77	24.66	56.49	68.2	-17.51	PK
H	15960.0	41.71	30.55	5.77	24.66	41.59	54	-12.41	AV
V	15960.0	56.36	30.33	6.32	24.55	56.9	68.2	-17.1	PK
V	15960.0	44.29	30.33	6.32	24.55	44.83	54	-9.17	AV
5500MHz									
H	16500.0	57.58	30.55	5.77	24.66	57.46	68.2	-16.54	PK
H	16500.0	42.94	30.55	5.77	24.66	42.82	54	-11.18	AV
V	16500.0	55.07	30.33	6.32	24.55	55.61	68.2	-18.39	PK
V	16500.0	42.57	30.33	6.32	24.55	43.11	54	-10.89	AV
5600MHz									
H	16740.0	55.76	30.55	5.77	24.66	55.64	68.2	-18.36	PK
H	16740.0	44.86	30.55	5.77	24.66	44.74	54	-9.26	AV
V	16740.0	59.03	30.33	6.32	24.55	59.57	68.2	-14.43	PK
V	16740.0	43.14	30.33	6.32	24.55	43.68	54	-10.32	AV
5700MHz									
H	17100.0	56.05	30.55	5.77	24.66	55.93	68.2	-18.07	PK
H	17100.0	43.08	30.55	5.77	24.66	42.96	54	-11.04	AV
V	17100.0	57.11	30.33	6.32	24.55	57.65	68.2	-16.35	PK
V	17100.0	42.96	30.33	6.32	24.55	43.5	54	-10.5	AV
5745MHz									
H	17235.0	55.45	30.55	5.77	24.66	55.33	68.2	-18.67	PK
H	17235.0	41.42	30.55	5.77	24.66	41.3	54	-12.7	AV
V	17235.0	59.71	30.33	6.32	24.55	60.25	68.2	-13.75	PK
V	17235.0	43.21	30.33	6.32	24.55	43.75	54	-10.25	AV
5785MHz									
H	17355.0	55.81	30.55	5.77	24.66	55.69	68.2	-18.31	PK
H	17355.0	41.7	30.55	5.77	24.66	41.58	54	-12.42	AV
V	17355.0	57.74	30.33	6.32	24.55	58.28	68.2	-15.72	PK
V	17355.0	41.09	30.33	6.32	24.55	41.63	54	-12.37	AV
5825MHz									
H	17475.0	56.95	30.55	5.77	24.66	56.83	68.2	-17.17	PK
H	17475.0	41.38	30.55	5.77	24.66	41.26	54	-12.74	AV
V	17475.0	57.48	30.33	6.32	24.55	58.02	68.2	-15.98	PK
V	17475.0	44.53	30.33	6.32	24.55	45.07	54	-8.93	AV

802.11n40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
5190MHz									
H	15570.0	56.45	30.55	5.77	24.66	56.33	68.2	-17.67	PK
H	15570.0	44.22	30.55	5.77	24.66	44.1	54	-9.9	AV
V	15570.0	59.58	30.33	6.32	24.55	60.12	68.2	-13.88	PK
V	15570.0	44.51	30.33	6.32	24.55	45.05	54	-8.95	AV
5200MHz									
H	15600.0	56.38	30.55	5.77	24.66	56.26	68.2	-17.74	PK
H	15600.0	41.78	30.55	5.77	24.66	41.66	54	-12.34	AV
V	15600.0	55.46	30.33	6.32	24.55	56	68.2	-18	PK
V	15600.0	44.13	30.33	6.32	24.55	44.67	54	-9.33	AV
5270MHz									
H	15810.0	55	30.55	5.77	24.66	54.88	68.2	-19.12	PK
H	15810.0	41.5	30.55	5.77	24.66	41.38	54	-12.62	AV
V	15810.0	58.95	30.33	6.32	24.55	59.49	68.2	-14.51	PK
V	15810.0	42.44	30.33	6.32	24.55	42.98	54	-11.02	AV
5310MHz									
H	15930.0	55.48	30.55	5.77	24.66	55.36	68.2	-18.64	PK

H	15930.0	41	30.55	5.77	24.66	40.88	54	-13.12	AV
V	15930.0	58.01	30.33	6.32	24.55	58.55	68.2	-15.45	PK
V	15930.0	44.65	30.33	6.32	24.55	45.19	54	-8.81	AV
5510MHz									
H	16530.0	57.09	30.55	5.77	24.66	56.97	68.2	-17.03	PK
H	16530.0	41.54	30.55	5.77	24.66	41.42	54	-12.58	AV
V	16530.0	58.12	30.33	6.32	24.55	58.66	68.2	-15.34	PK
V	16530.0	41.19	30.33	6.32	24.55	41.73	54	-12.27	AV
5590MHz									
H	16650.0	55.73	30.55	5.77	24.66	55.61	68.2	-18.39	PK
H	16650.0	41.26	30.55	5.77	24.66	41.14	54	-12.86	AV
V	16650.0	58.61	30.33	6.32	24.55	59.15	68.2	-14.85	PK
V	16650.0	43.91	30.33	6.32	24.55	44.45	54	-9.55	AV
5670MHz									
H	16500.0	56.2	30.55	5.77	24.66	56.08	68.2	-12.12	PK
H	16500.0	45	30.55	5.77	24.66	44.88	54	-9.12	AV
V	16500.0	59.05	30.33	6.32	24.55	59.59	68.2	-8.61	PK
V	16500.0	41.76	30.33	6.32	24.55	42.3	54	-11.7	AV
5755MHz									
H	17265.0	55.5	30.55	5.77	24.66	55.38	68.2	-18.62	PK
H	17265.0	42.56	30.55	5.77	24.66	42.44	54	-11.56	AV
V	17265.0	58.96	30.33	6.32	24.55	59.5	68.2	-14.5	PK
V	17265.0	42.75	30.33	6.32	24.55	43.29	54	-10.71	AV
5795MHz									
H	17385.0	58.19	30.55	5.77	24.66	58.07	68.2	-15.93	PK
H	17385.0	44.46	30.55	5.77	24.66	44.34	54	-9.66	AV
V	17385.0	58.58	30.33	6.32	24.55	59.12	68.2	-14.88	PK
V	17385.0	41.28	30.33	6.32	24.55	41.82	54	-12.18	AV

802.11ac40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
5190MHz									
H	15570.0	55.21	30.55	5.77	24.66	55.09	68.2	-13.11	PK
H	15570.0	41.28	30.55	5.77	24.66	41.16	54	-12.84	AV
V	15570.0	57.36	30.33	6.32	24.55	57.9	68.2	-10.3	PK
V	15570.0	41.05	30.33	6.32	24.55	41.59	54	-12.41	AV
5200MHz									
H	15600.0	58.79	30.55	5.77	24.66	58.67	68.2	-15.33	PK
H	15600.0	44.4	30.55	5.77	24.66	44.28	54	-9.72	AV
V	15600.0	59.5	30.33	6.32	24.55	60.04	68.2	-13.96	PK
V	15600.0	42.15	30.33	6.32	24.55	42.69	54	-11.31	AV
5270MHz									
H	15810.0	56.06	30.55	5.77	24.66	55.94	68.2	-12.26	PK
H	15810.0	43.49	30.55	5.77	24.66	43.37	54	-10.63	AV
V	15810.0	57.49	30.33	6.32	24.55	58.03	68.2	-10.17	PK
V	15810.0	43.77	30.33	6.32	24.55	44.31	54	-9.69	AV
5310MHz									
H	15930.0	56.68	30.55	5.77	24.66	56.56	68.2	-17.44	PK
H	15930.0	41.56	30.55	5.77	24.66	41.44	54	-12.56	AV
V	15930.0	59.97	30.33	6.32	24.55	60.51	68.2	-13.49	PK
V	15930.0	41.02	30.33	6.32	24.55	41.56	54	-12.44	AV
5510MHz									
H	16530.0	58.19	30.55	5.77	24.66	58.07	68.2	-15.93	PK
H	16530.0	41.68	30.55	5.77	24.66	41.56	54	-12.44	AV

V	16530.0	58.08	30.33	6.32	24.55	58.62	68.2	-15.38	PK
V	16530.0	41.61	30.33	6.32	24.55	42.15	54	-11.85	AV
5590MHz									
H	16650.0	58.99	30.55	5.77	24.66	58.87	68.2	-9.33	PK
H	16650.0	41.03	30.55	5.77	24.66	40.91	54	-13.09	AV
V	16650.0	58.27	30.33	6.32	24.55	58.81	68.2	-9.39	PK
V	16650.0	41.92	30.33	6.32	24.55	42.46	54	-11.54	AV
5670MHz									
H	16500.0	56.74	30.55	5.77	24.66	56.62	68.2	-17.38	PK
H	16500.0	41.13	30.55	5.77	24.66	41.01	54	-12.99	AV
V	16500.0	59.62	30.33	6.32	24.55	60.16	68.2	-13.84	PK
V	16500.0	44.38	30.33	6.32	24.55	44.92	54	-9.08	AV
5755MHz									
H	17265.0	57.8	30.55	5.77	24.66	57.68	68.2	-10.52	PK
H	17265.0	41.48	30.55	5.77	24.66	41.36	54	-12.64	AV
V	17265.0	55.5	30.33	6.32	24.55	56.04	68.2	-12.16	PK
V	17265.0	41.84	30.33	6.32	24.55	42.38	54	-11.62	AV
5795MHz									
H	17385.0	56.64	30.55	5.77	24.66	56.52	68.2	-17.48	PK
H	17385.0	42.34	30.55	5.77	24.66	42.22	54	-11.78	AV
V	17385.0	59.86	30.33	6.32	24.55	60.4	68.2	-13.6	PK
V	17385.0	44.27	30.33	6.32	24.55	44.81	54	-9.19	AV

802.11ac80

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
5210MHz									
H	15600.0	55.88	30.55	5.77	24.66	55.76	68.2	-18.24	PK
H	15600.0	44.21	30.55	5.77	24.66	44.09	54	-9.91	AV
V	15600.0	59.72	30.33	6.32	24.55	60.26	68.2	-13.74	PK
V	15600.0	43.7	30.33	6.32	24.55	44.24	54	-9.76	AV
5290MHz									
H	15810.0	57.12	30.55	5.77	24.66	57	68.2	-11.2	PK
H	15810.0	41.28	30.55	5.77	24.66	41.16	54	-12.84	AV
V	15810.0	56.66	30.33	6.32	24.55	57.2	68.2	-11	PK
V	15810.0	41.94	30.33	6.32	24.55	42.48	54	-11.52	AV
5530MHz									
H	16530.0	55.79	30.55	5.77	24.66	55.67	68.2	-18.33	PK
H	16530.0	41.36	30.55	5.77	24.66	41.24	54	-12.76	AV
V	16530.0	57.22	30.33	6.32	24.55	57.76	68.2	-16.24	PK
V	16530.0	41.26	30.33	6.32	24.55	41.8	54	-12.2	AV
5610MHz									
H	16650.0	59.48	30.55	5.77	24.66	59.36	68.2	-8.84	PK
H	16650.0	41.58	30.55	5.77	24.66	41.46	54	-12.54	AV
V	16650.0	57.33	30.33	6.32	24.55	57.87	68.2	-10.33	PK
V	16650.0	41.64	30.33	6.32	24.55	42.18	54	-11.82	AV
5775MHz									
H	17385.0	57.31	30.55	5.77	24.66	57.19	68.2	-16.81	PK
H	17385.0	41.65	30.55	5.77	24.66	41.53	54	-12.47	AV
V	17385.0	58	30.33	6.32	24.55	58.54	68.2	-15.46	PK
V	17385.0	42	30.33	6.32	24.55	42.54	54	-11.46	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. All the modes have been tested and recorded worst mode in the report.

RADIATED Band EMISSION MEASUREMENT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin(dB)	Detector Type	Result
802.11a	Low Channel 5180MHz										
	H	5141.5	61.70	30.22	4.85	23.98	60.31	74.00	-13.69	PK	PASS
	H	5141.5	48.89	30.22	4.85	23.98	47.50	54.00	-6.50	AV	PASS
	H	5150	60.52	30.22	4.85	23.98	59.13	74.00	-14.87	PK	PASS
	H	5150	46.18	30.22	4.85	23.98	44.79	54.00	-9.21	AV	PASS
	V	5141.5	59.46	30.22	4.85	23.98	58.07	74.00	-15.93	PK	PASS
	V	5141.5	46.64	30.22	4.85	23.98	45.25	54.00	-8.75	AV	PASS
	V	5150	62.80	30.22	4.85	23.98	61.41	74.00	-12.59	PK	PASS
	V	5150	48.54	30.22	4.85	23.98	47.15	54.00	-6.85	AV	PASS
	High Channel 5240MHz										
	H	5350	59.78	30.22	4.85	23.98	58.39	74.00	-15.61	PK	PASS
	H	5350	46.49	30.22	4.85	23.98	45.10	54.00	-8.90	AV	PASS
	H	5410	62.09	30.22	4.85	23.98	60.70	74.00	-13.30	PK	PASS
	H	5410	46.64	30.22	4.85	23.98	45.25	54.00	-8.75	AV	PASS
	V	5350	62.08	30.22	4.85	23.98	60.69	74.00	-13.31	PK	PASS
	V	5350	48.72	30.22	4.85	23.98	47.33	54.00	-6.67	AV	PASS
	V	5410	60.30	30.22	4.85	23.98	58.91	74.00	-15.09	PK	PASS
	V	5410	48.79	30.22	4.85	23.98	47.40	54.00	-6.60	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin(dB)	Detector Type	Result
802.11a	Low Channel5745MHz										
	H	5650	60.75	30.22	4.85	23.98	59.36	74.00	-14.64	PK	PASS
	H	5650	46.57	30.22	4.85	23.98	45.18	54.00	-8.82	AV	PASS
	H	5725	60.96	30.22	4.85	23.98	59.57	74.00	-14.43	PK	PASS
	H	5725	48.70	30.22	4.85	23.98	47.31	54.00	-6.69	AV	PASS
	V	5650	62.80	30.22	4.85	23.98	61.41	74.00	-12.59	PK	PASS
	V	5650	46.62	30.22	4.85	23.98	45.23	54.00	-8.77	AV	PASS
	V	5725	61.41	30.22	4.85	23.98	60.02	74.00	-13.98	PK	PASS
	V	5725	48.76	30.22	4.85	23.98	47.37	54.00	-6.63	AV	PASS
	High Channel 5825MHz										
	H	5850	60.10	30.22	4.85	23.98	58.71	74.00	-15.29	PK	PASS
	H	5850	46.40	30.22	4.85	23.98	45.01	54.00	-8.99	AV	PASS
	H	5916.4	62.77	30.22	4.85	23.98	61.38	74.00	-12.62	PK	PASS
	H	5916.4	48.74	30.22	4.85	23.98	47.35	54.00	-6.65	AV	PASS
	V	5850	59.73	30.22	4.85	23.98	58.34	74.00	-15.66	PK	PASS
	V	5850	46.22	30.22	4.85	23.98	44.83	54.00	-9.17	AV	PASS
	V	5916.4	61.30	30.22	4.85	23.98	59.91	74.00	-14.09	PK	PASS
	V	5916.4	48.37	30.22	4.85	23.98	46.98	54.00	-7.02	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin(dB)	Dete ctor Type	Result
802.11 n20	Low Channel 5180MHz										
	H	5141.5	60.01	30.22	4.85	23.98	58.62	74.00	-15.38	PK	PASS
	H	5141.5	46.00	30.22	4.85	23.98	44.61	54.00	-9.39	AV	PASS
	H	5150	61.18	30.22	4.85	23.98	59.79	74.00	-14.21	PK	PASS
	H	5150	48.74	30.22	4.85	23.98	47.35	54.00	-6.65	AV	PASS
	V	5141.5	59.46	30.22	4.85	23.98	58.07	74.00	-15.93	PK	PASS
	V	5141.5	48.31	30.22	4.85	23.98	46.92	54.00	-7.08	AV	PASS
	V	5150	62.81	30.22	4.85	23.98	61.42	74.00	-12.58	PK	PASS
	V	5150	48.46	30.22	4.85	23.98	47.07	54.00	-6.93	AV	PASS
	High Channel 5240MHz										
	H	5350	62.15	30.22	4.85	23.98	60.76	74.00	-13.24	PK	PASS
	H	5350	47.73	30.22	4.85	23.98	46.34	54.00	-7.66	AV	PASS
	H	5410	61.10	30.22	4.85	23.98	59.71	74.00	-14.29	PK	PASS
	H	5410	47.56	30.22	4.85	23.98	46.17	54.00	-7.83	AV	PASS
	V	5350	61.09	30.22	4.85	23.98	59.70	74.00	-14.30	PK	PASS
	V	5350	48.28	30.22	4.85	23.98	46.89	54.00	-7.11	AV	PASS
	V	5410	62.16	30.22	4.85	23.98	60.77	74.00	-13.23	PK	PASS
	V	5410	46.07	30.22	4.85	23.98	44.68	54.00	-9.32	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin(dB)	Dete ctor Type	Result
802.11 n20	Low Channel5745MHz										
	H	5650	60.12	30.22	4.85	23.98	58.73	74.00	-15.27	PK	PASS
	H	5650	46.74	30.22	4.85	23.98	45.35	54.00	-8.65	AV	PASS
	H	5725	60.21	30.22	4.85	23.98	58.82	74.00	-15.18	PK	PASS
	H	5725	46.30	30.22	4.85	23.98	44.91	54.00	-9.09	AV	PASS
	V	5650	61.45	30.22	4.85	23.98	60.06	74.00	-13.94	PK	PASS
	V	5650	46.61	30.22	4.85	23.98	45.22	54.00	-8.78	AV	PASS
	V	5725	59.49	30.22	4.85	23.98	58.10	74.00	-15.90	PK	PASS
	V	5725	48.36	30.22	4.85	23.98	46.97	54.00	-7.03	AV	PASS
	High Channel 5825MHz										
	H	5850	61.46	30.22	4.85	23.98	60.07	74.00	-13.93	PK	PASS
	H	5850	48.93	30.22	4.85	23.98	47.54	54.00	-6.46	AV	PASS
	H	5916.4	62.91	30.22	4.85	23.98	61.52	74.00	-12.48	PK	PASS
	H	5916.4	47.72	30.22	4.85	23.98	46.33	54.00	-7.67	AV	PASS
	V	5850	62.68	30.22	4.85	23.98	61.29	74.00	-12.71	PK	PASS
	V	5850	46.82	30.22	4.85	23.98	45.43	54.00	-8.57	AV	PASS
	V	5916.4	59.05	30.22	4.85	23.98	57.66	74.00	-16.34	PK	PASS
	V	5916.4	46.69	30.22	4.85	23.98	45.30	54.00	-8.70	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 n40	Low Channel5190MHz										
	H	5148.8	61.70	30.22	4.85	23.98	60.31	74.00	-13.69	PK	PASS
	H	5148.8	46.21	30.22	4.85	23.98	44.82	54.00	-9.18	AV	PASS
	H	5150	61.72	30.22	4.85	23.98	60.33	74.00	-13.67	PK	PASS
	H	5150	47.58	30.22	4.85	23.98	46.19	54.00	-7.81	AV	PASS
	V	5148.8	60.29	30.22	4.85	23.98	58.90	74.00	-15.10	PK	PASS
	V	5148.8	46.58	30.22	4.85	23.98	45.19	54.00	-8.81	AV	PASS
	V	5150	60.46	30.22	4.85	23.98	59.07	74.00	-14.93	PK	PASS
	V	5150	47.71	30.22	4.85	23.98	46.32	54.00	-7.68	AV	PASS
	High Channel 5230MHz										
	H	5350.0	60.17	30.22	4.85	23.98	58.78	74.00	-15.22	PK	PASS
	H	5350.0	46.95	30.22	4.85	23.98	45.56	54.00	-8.44	AV	PASS
	H	5353.4	62.99	30.22	4.85	23.98	61.60	74.00	-12.40	PK	PASS
	H	5353.4	46.84	30.22	4.85	23.98	45.45	54.00	-8.55	AV	PASS
	V	5350.0	59.71	30.22	4.85	23.98	58.32	74.00	-15.68	PK	PASS
	V	5350.0	48.13	30.22	4.85	23.98	46.74	54.00	-7.26	AV	PASS
	V	5353.4	61.27	30.22	4.85	23.98	59.88	74.00	-14.12	PK	PASS
	V	5353.4	48.04	30.22	4.85	23.98	46.65	54.00	-7.35	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 n40	Low Channel5755MHz										
	H	5720.6	61.99	30.22	4.85	23.98	60.60	74.00	-13.40	PK	PASS
	H	5720.6	47.43	30.22	4.85	23.98	46.04	54.00	-7.96	AV	PASS
	H	5725.0	62.17	30.22	4.85	23.98	60.78	74.00	-13.22	PK	PASS
	H	5725.0	46.11	30.22	4.85	23.98	44.72	54.00	-9.28	AV	PASS
	V	5720.6	60.27	30.22	4.85	23.98	58.88	74.00	-15.12	PK	PASS
	V	5720.6	48.28	30.22	4.85	23.98	46.89	54.00	-7.11	AV	PASS
	V	5725.0	62.18	30.22	4.85	23.98	60.79	74.00	-13.21	PK	PASS
	V	5725.0	47.15	30.22	4.85	23.98	45.76	54.00	-8.24	AV	PASS
	High Channel 5795MHz										
	H	5850.0	61.73	30.22	4.85	23.98	60.34	74.00	-13.66	PK	PASS
	H	5850.0	48.91	30.22	4.85	23.98	47.52	54.00	-6.48	AV	PASS
	H	5853.2	61.57	30.22	4.85	23.98	60.18	74.00	-13.82	PK	PASS
	H	5853.2	47.32	30.22	4.85	23.98	45.93	54.00	-8.07	AV	PASS
	V	5850.0	59.29	30.22	4.85	23.98	57.90	74.00	-16.10	PK	PASS
	V	5850.0	48.57	30.22	4.85	23.98	47.18	54.00	-6.82	AV	PASS
	V	5853.2	62.56	30.22	4.85	23.98	61.17	74.00	-12.83	PK	PASS
	V	5853.2	47.74	30.22	4.85	23.98	46.35	54.00	-7.65	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac20	Low Channel5180MHz										
	H	5141.5	59.87	30.22	4.85	23.98	58.48	74.00	-15.52	PK	PASS
	H	5141.5	48.74	30.22	4.85	23.98	47.35	54.00	-6.65	AV	PASS
	H	5150	59.58	30.22	4.85	23.98	58.19	74.00	-15.81	PK	PASS
	H	5150	48.63	30.22	4.85	23.98	47.24	54.00	-6.76	AV	PASS
	V	5141.5	60.26	30.22	4.85	23.98	58.87	74.00	-15.13	PK	PASS
	V	5141.5	48.61	30.22	4.85	23.98	47.22	54.00	-6.78	AV	PASS
	V	5150	60.81	30.22	4.85	23.98	59.42	74.00	-14.58	PK	PASS
	V	5150	48.82	30.22	4.85	23.98	47.43	54.00	-6.57	AV	PASS
	High Channel 5240MHz										
	H	5350	59.03	30.22	4.85	23.98	57.64	74.00	-16.36	PK	PASS
	H	5350	48.64	30.22	4.85	23.98	47.25	54.00	-6.75	AV	PASS
	H	5410	61.21	30.22	4.85	23.98	59.82	74.00	-14.18	PK	PASS
	H	5410	46.22	30.22	4.85	23.98	44.83	54.00	-9.17	AV	PASS
	V	5350	59.18	30.22	4.85	23.98	57.79	74.00	-16.21	PK	PASS
	V	5350	48.15	30.22	4.85	23.98	46.76	54.00	-7.24	AV	PASS
	V	5410	60.95	30.22	4.85	23.98	59.56	74.00	-14.44	PK	PASS
	V	5410	47.80	30.22	4.85	23.98	46.41	54.00	-7.59	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac20	Low Channel5745MHz										
	H	5650	59.62	30.22	4.85	23.98	58.23	74.00	-15.77	PK	PASS
	H	5650	48.98	30.22	4.85	23.98	47.59	54.00	-6.41	AV	PASS
	H	5725	61.08	30.22	4.85	23.98	59.69	74.00	-14.31	PK	PASS
	H	5725	48.07	30.22	4.85	23.98	46.68	54.00	-7.32	AV	PASS
	V	5650	59.04	30.22	4.85	23.98	57.65	74.00	-16.35	PK	PASS
	V	5650	48.32	30.22	4.85	23.98	46.93	54.00	-7.07	AV	PASS
	V	5725	59.15	30.22	4.85	23.98	57.76	74.00	-16.24	PK	PASS
	V	5725	47.71	30.22	4.85	23.98	46.32	54.00	-7.68	AV	PASS
	High Channel 5825MHz										
	H	5850	62.19	30.22	4.85	23.98	60.80	74.00	-13.20	PK	PASS
	H	5850	46.84	30.22	4.85	23.98	45.45	54.00	-8.55	AV	PASS
	H	5916.4	61.72	30.22	4.85	23.98	60.33	74.00	-13.67	PK	PASS
	H	5916.4	48.95	30.22	4.85	23.98	47.56	54.00	-6.44	AV	PASS
	V	5850	61.77	30.22	4.85	23.98	60.38	74.00	-13.62	PK	PASS
	V	5850	46.04	30.22	4.85	23.98	44.65	54.00	-9.35	AV	PASS
	V	5916.4	60.91	30.22	4.85	23.98	59.52	74.00	-14.48	PK	PASS
	V	5916.4	48.92	30.22	4.85	23.98	47.53	54.00	-6.47	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac40	Low Channel5190MHz										
	H	5148.8	59.74	30.22	4.85	23.98	58.35	74.00	-15.65	PK	PASS
	H	5148.8	47.35	30.22	4.85	23.98	45.96	54.00	-8.04	AV	PASS
	H	5150	62.92	30.22	4.85	23.98	61.53	74.00	-12.47	PK	PASS
	H	5150	47.91	30.22	4.85	23.98	46.52	54.00	-7.48	AV	PASS
	V	5148.8	62.94	30.22	4.85	23.98	61.55	74.00	-12.45	PK	PASS
	V	5148.8	46.40	30.22	4.85	23.98	45.01	54.00	-8.99	AV	PASS
	V	5150	62.97	30.22	4.85	23.98	61.58	74.00	-12.42	PK	PASS
	V	5150	47.66	30.22	4.85	23.98	46.27	54.00	-7.73	AV	PASS
	High Channel 5230MHz										
	H	5350.0	59.89	30.22	4.85	23.98	58.50	74.00	-15.50	PK	PASS
	H	5350.0	48.21	30.22	4.85	23.98	46.82	54.00	-7.18	AV	PASS
	H	5353.4	61.59	30.22	4.85	23.98	60.20	74.00	-13.80	PK	PASS
	H	5353.4	46.88	30.22	4.85	23.98	45.49	54.00	-8.51	AV	PASS
	V	5350.0	61.77	30.22	4.85	23.98	60.38	74.00	-13.62	PK	PASS
	V	5350.0	48.82	30.22	4.85	23.98	47.43	54.00	-6.57	AV	PASS
	V	5353.4	61.96	30.22	4.85	23.98	60.57	74.00	-13.43	PK	PASS
	V	5353.4	47.59	30.22	4.85	23.98	46.20	54.00	-7.80	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac40	Low Channel5755MHz										
	H	5720.6	61.29	30.22	4.85	23.98	59.90	74.00	-14.10	PK	PASS
	H	5720.6	48.39	30.22	4.85	23.98	47.00	54.00	-7.00	AV	PASS
	H	5725.0	61.70	30.22	4.85	23.98	60.31	74.00	-13.69	PK	PASS
	H	5725.0	48.11	30.22	4.85	23.98	46.72	54.00	-7.28	AV	PASS
	V	5720.6	61.92	30.22	4.85	23.98	60.53	74.00	-13.47	PK	PASS
	V	5720.6	48.74	30.22	4.85	23.98	47.35	54.00	-6.65	AV	PASS
	V	5725.0	60.33	30.22	4.85	23.98	58.94	74.00	-15.06	PK	PASS
	V	5725.0	47.28	30.22	4.85	23.98	45.89	54.00	-8.11	AV	PASS
	High Channel 5795MHz										
	H	5850.0	59.94	30.22	4.85	23.98	58.55	74.00	-15.45	PK	PASS
	H	5850.0	46.42	30.22	4.85	23.98	45.03	54.00	-8.97	AV	PASS
	H	5853.2	60.21	30.22	4.85	23.98	58.82	74.00	-15.18	PK	PASS
	H	5853.2	48.99	30.22	4.85	23.98	47.60	54.00	-6.40	AV	PASS
	V	5850.0	60.17	30.22	4.85	23.98	58.78	74.00	-15.22	PK	PASS
	V	5850.0	47.87	30.22	4.85	23.98	46.48	54.00	-7.52	AV	PASS
	V	5853.2	62.04	30.22	4.85	23.98	60.65	74.00	-13.35	PK	PASS
	V	5853.2	47.85	30.22	4.85	23.98	46.46	54.00	-7.54	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac80	5210MHz										
	H	5123.0	60.11	30.22	4.85	23.98	58.72	74.00	-15.28	PK	PASS
	H	5123.0	48.81	30.22	4.85	23.98	47.42	54.00	-6.58	AV	PASS
	H	5150.0	61.16	30.22	4.85	23.98	59.77	74.00	-14.23	PK	PASS
	H	5150.0	47.09	30.22	4.85	23.98	45.70	54.00	-8.30	AV	PASS
	V	5150.0	61.01	30.22	4.85	23.98	59.62	74.00	-14.38	PK	PASS
	V	5150.0	46.57	30.22	4.85	23.98	45.18	54.00	-8.82	AV	PASS
	V	5150.0	59.18	30.22	4.85	23.98	57.79	74.00	-16.21	PK	PASS
	V	5150.0	46.58	30.22	4.85	23.98	45.19	54.00	-8.81	AV	PASS
	5775MHz										
	H	5723.8	61.35	30.22	4.85	23.98	59.96	74.00	-14.04	PK	PASS
	H	5723.8	48.57	30.22	4.85	23.98	47.18	54.00	-6.82	AV	PASS
	H	5725.0	61.32	30.22	4.85	23.98	59.93	74.00	-14.07	PK	PASS
	H	5725.0	48.65	30.22	4.85	23.98	47.26	54.00	-6.74	AV	PASS
	V	5723.8	62.15	30.22	4.85	23.98	60.76	74.00	-13.24	PK	PASS
	V	5723.8	47.99	30.22	4.85	23.98	46.60	54.00	-7.40	AV	PASS
	V	5725.0	62.69	30.22	4.85	23.98	61.30	74.00	-12.70	PK	PASS
	V	5725.0	48.48	30.22	4.85	23.98	47.09	54.00	-6.91	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11a	Low Channel 5260MHz										
	H	5241.5	62.89	30.22	4.85	23.98	61.50	74.00	-12.50	PK	PASS
	H	5241.5	46.70	30.22	4.85	23.98	45.31	54.00	-8.69	AV	PASS
	H	5250	59.55	30.22	4.85	23.98	58.16	74.00	-15.84	PK	PASS
	H	5250	47.90	30.22	4.85	23.98	46.51	54.00	-7.49	AV	PASS
	V	5241.5	60.69	30.22	4.85	23.98	59.30	74.00	-14.70	PK	PASS
	V	5241.5	47.01	30.22	4.85	23.98	45.62	54.00	-8.38	AV	PASS
	V	5250	62.91	30.22	4.85	23.98	61.52	74.00	-12.48	PK	PASS
	V	5250	47.56	30.22	4.85	23.98	46.17	54.00	-7.83	AV	PASS
	High Channel 5320MHz										
	H	5350	61.35	30.22	4.85	23.98	59.96	74.00	-14.04	PK	PASS
	H	5350	48.82	30.22	4.85	23.98	47.43	54.00	-6.57	AV	PASS
	H	5410	62.92	30.22	4.85	23.98	61.53	74.00	-12.47	PK	PASS
	H	5410	47.17	30.22	4.85	23.98	45.78	54.00	-8.22	AV	PASS
	V	5350	59.74	30.22	4.85	23.98	58.35	74.00	-15.65	PK	PASS
	V	5350	48.73	30.22	4.85	23.98	47.34	54.00	-6.66	AV	PASS
	V	5410	61.52	30.22	4.85	23.98	60.13	74.00	-13.87	PK	PASS
	V	5410	48.73	30.22	4.85	23.98	47.34	54.00	-6.66	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11a	Low Channel5500MHz										
	H	5560	60.28	30.22	4.85	23.98	58.89	74.00	-15.11	PK	PASS
	H	5560	48.71	30.22	4.85	23.98	47.32	54.00	-6.68	AV	PASS
	H	5525	59.88	30.22	4.85	23.98	58.49	74.00	-15.51	PK	PASS
	H	5525	47.44	30.22	4.85	23.98	46.05	54.00	-7.95	AV	PASS
	V	5560	60.36	30.22	4.85	23.98	58.97	74.00	-15.03	PK	PASS
	V	5560	47.71	30.22	4.85	23.98	46.32	54.00	-7.68	AV	PASS
	V	5525	59.75	30.22	4.85	23.98	58.36	74.00	-15.64	PK	PASS
	V	5525	48.33	30.22	4.85	23.98	46.94	54.00	-7.06	AV	PASS
	High Channel 5700MHz										
	H	5750	62.49	30.22	4.85	23.98	61.10	74.00	-12.90	PK	PASS
	H	5750	48.05	30.22	4.85	23.98	46.66	54.00	-7.34	AV	PASS
	H	5716.4	62.01	30.22	4.85	23.98	60.62	74.00	-13.38	PK	PASS
	H	5716.4	47.55	30.22	4.85	23.98	46.16	54.00	-7.84	AV	PASS
	V	5750	60.56	30.22	4.85	23.98	59.17	74.00	-14.83	PK	PASS
	V	5750	46.21	30.22	4.85	23.98	44.82	54.00	-9.18	AV	PASS
	V	5716.4	59.47	30.22	4.85	23.98	58.08	74.00	-15.92	PK	PASS
	V	5716.4	46.30	30.22	4.85	23.98	44.91	54.00	-9.09	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 n20	Low Channel 5260MHz										
	H	5241.5	59.23	30.22	4.85	23.98	57.84	74.00	-16.16	PK	PASS
	H	5241.5	47.98	30.22	4.85	23.98	46.59	54.00	-7.41	AV	PASS
	H	5250	59.91	30.22	4.85	23.98	58.52	74.00	-15.48	PK	PASS
	H	5250	48.35	30.22	4.85	23.98	46.96	54.00	-7.04	AV	PASS
	V	5241.5	60.90	30.22	4.85	23.98	59.51	74.00	-14.49	PK	PASS
	V	5241.5	48.66	30.22	4.85	23.98	47.27	54.00	-6.73	AV	PASS
	V	5250	60.42	30.22	4.85	23.98	59.03	74.00	-14.97	PK	PASS
	V	5250	48.86	30.22	4.85	23.98	47.47	54.00	-6.53	AV	PASS
	High Channel 5320MHz										
	H	5350	59.63	30.22	4.85	23.98	58.24	74.00	-15.76	PK	PASS
	H	5350	48.60	30.22	4.85	23.98	47.21	54.00	-6.79	AV	PASS
	H	5310	62.63	30.22	4.85	23.98	61.24	74.00	-12.76	PK	PASS
	H	5310	48.06	30.22	4.85	23.98	46.67	54.00	-7.33	AV	PASS
	V	5350	62.05	30.22	4.85	23.98	60.66	74.00	-13.34	PK	PASS
	V	5350	46.26	30.22	4.85	23.98	44.87	54.00	-9.13	AV	PASS
	V	5310	59.14	30.22	4.85	23.98	57.75	74.00	-16.25	PK	PASS
	V	5310	48.22	30.22	4.85	23.98	46.83	54.00	-7.17	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 n20	Low Channel 5500MHz										
	H	5560	60.73	30.22	4.85	23.98	59.34	74.00	-14.66	PK	PASS
	H	5560	46.71	30.22	4.85	23.98	45.32	54.00	-8.68	AV	PASS
	H	5525	60.19	30.22	4.85	23.98	58.80	74.00	-15.20	PK	PASS
	H	5525	48.17	30.22	4.85	23.98	46.78	54.00	-7.22	AV	PASS
	V	5560	60.13	30.22	4.85	23.98	58.74	74.00	-15.26	PK	PASS
	V	5560	47.55	30.22	4.85	23.98	46.16	54.00	-7.84	AV	PASS
	V	5525	59.92	30.22	4.85	23.98	58.53	74.00	-15.47	PK	PASS
	V	5525	46.20	30.22	4.85	23.98	44.81	54.00	-9.19	AV	PASS
	High Channel 5700MHz										
	H	5750	60.06	30.22	4.85	23.98	58.67	74.00	-15.33	PK	PASS
	H	5750	46.49	30.22	4.85	23.98	45.10	54.00	-8.90	AV	PASS
	H	5716.4	61.17	30.22	4.85	23.98	59.78	74.00	-14.22	PK	PASS
	H	5716.4	48.02	30.22	4.85	23.98	46.63	54.00	-7.37	AV	PASS
	V	5750	60.51	30.22	4.85	23.98	59.12	74.00	-14.88	PK	PASS
	V	5750	47.34	30.22	4.85	23.98	45.95	54.00	-8.05	AV	PASS
	V	5716.4	59.86	30.22	4.85	23.98	58.47	74.00	-15.53	PK	PASS
	V	5716.4	48.05	30.22	4.85	23.98	46.66	54.00	-7.34	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 n40	Low Channel5270MHz										
	H	5248.8	62.01	30.22	4.85	23.98	60.62	74.00	-13.38	PK	PASS
	H	5248.8	46.75	30.22	4.85	23.98	45.36	54.00	-8.64	AV	PASS
	H	5250	62.31	30.22	4.85	23.98	60.92	74.00	-13.08	PK	PASS
	H	5250	46.77	30.22	4.85	23.98	45.38	54.00	-8.62	AV	PASS
	V	5248.8	59.79	30.22	4.85	23.98	58.40	74.00	-15.60	PK	PASS
	V	5248.8	46.44	30.22	4.85	23.98	45.05	54.00	-8.95	AV	PASS
	V	5250	59.35	30.22	4.85	23.98	57.96	74.00	-16.04	PK	PASS
	V	5250	46.92	30.22	4.85	23.98	45.53	54.00	-8.47	AV	PASS
	High Channel 5310MHz										
	H	5350.0	59.53	30.22	4.85	23.98	58.14	74.00	-15.86	PK	PASS
	H	5350.0	47.14	30.22	4.85	23.98	45.75	54.00	-8.25	AV	PASS
	H	5353.4	59.46	30.22	4.85	23.98	58.07	74.00	-15.93	PK	PASS
	H	5353.4	48.79	30.22	4.85	23.98	47.40	54.00	-6.60	AV	PASS
	V	5350.0	61.00	30.22	4.85	23.98	59.61	74.00	-14.39	PK	PASS
	V	5350.0	48.93	30.22	4.85	23.98	47.54	54.00	-6.46	AV	PASS
	V	5353.4	60.06	30.22	4.85	23.98	58.67	74.00	-15.33	PK	PASS
	V	5353.4	48.84	30.22	4.85	23.98	47.45	54.00	-6.55	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 n40	Low Channel5510MHz										
	H	5520.6	62.89	30.22	4.85	23.98	61.50	74.00	-12.50	PK	PASS
	H	5520.6	48.10	30.22	4.85	23.98	46.71	54.00	-7.29	AV	PASS
	H	5525.0	62.92	30.22	4.85	23.98	61.53	74.00	-12.47	PK	PASS
	H	5525.0	48.43	30.22	4.85	23.98	47.04	54.00	-6.96	AV	PASS
	V	5520.6	59.81	30.22	4.85	23.98	58.42	74.00	-15.58	PK	PASS
	V	5520.6	47.77	30.22	4.85	23.98	46.38	54.00	-7.62	AV	PASS
	V	5525.0	61.49	30.22	4.85	23.98	60.10	74.00	-13.90	PK	PASS
	V	5525.0	47.03	30.22	4.85	23.98	45.64	54.00	-8.36	AV	PASS
	High Channel 5670MHz										
	H	5650.0	60.60	30.22	4.85	23.98	59.21	74.00	-14.79	PK	PASS
	H	5650.0	46.43	30.22	4.85	23.98	45.04	54.00	-8.96	AV	PASS
	H	5653.2	61.05	30.22	4.85	23.98	59.66	74.00	-14.34	PK	PASS
	H	5653.2	46.36	30.22	4.85	23.98	44.97	54.00	-9.03	AV	PASS
	V	5650.0	60.19	30.22	4.85	23.98	58.80	74.00	-15.20	PK	PASS
	V	5650.0	48.64	30.22	4.85	23.98	47.25	54.00	-6.75	AV	PASS
	V	5653.2	60.94	30.22	4.85	23.98	59.55	74.00	-14.45	PK	PASS
	V	5653.2	47.89	30.22	4.85	23.98	46.50	54.00	-7.50	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac20	Low Channel5260MHz										
	H	5241.5	60.36	30.22	4.85	23.98	58.97	74.00	-15.03	PK	PASS
	H	5241.5	47.40	30.22	4.85	23.98	46.01	54.00	-7.99	AV	PASS
	H	5250	62.50	30.22	4.85	23.98	61.11	74.00	-12.89	PK	PASS
	H	5250	48.44	30.22	4.85	23.98	47.05	54.00	-6.95	AV	PASS
	V	5241.5	60.49	30.22	4.85	23.98	59.10	74.00	-14.90	PK	PASS
	V	5241.5	47.66	30.22	4.85	23.98	46.27	54.00	-7.73	AV	PASS
	V	5250	61.20	30.22	4.85	23.98	59.81	74.00	-14.19	PK	PASS
	V	5250	47.29	30.22	4.85	23.98	45.90	54.00	-8.10	AV	PASS
	High Channel 5320MHz										
	H	5350	61.76	30.22	4.85	23.98	60.37	74.00	-13.63	PK	PASS
	H	5350	47.53	30.22	4.85	23.98	46.14	54.00	-7.86	AV	PASS
	H	5310	62.41	30.22	4.85	23.98	61.02	74.00	-12.98	PK	PASS
	H	5310	46.62	30.22	4.85	23.98	45.23	54.00	-8.77	AV	PASS
	V	5350	61.26	30.22	4.85	23.98	59.87	74.00	-14.13	PK	PASS
	V	5350	48.87	30.22	4.85	23.98	47.48	54.00	-6.52	AV	PASS
	V	5310	62.82	30.22	4.85	23.98	61.43	74.00	-12.57	PK	PASS
	V	5310	48.68	30.22	4.85	23.98	47.29	54.00	-6.71	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac20	Low Channel5500MHz										
	H	5550	60.13	30.22	4.85	23.98	58.74	74.00	-15.26	PK	PASS
	H	5550	48.81	30.22	4.85	23.98	47.42	54.00	-6.58	AV	PASS
	H	5525	60.76	30.22	4.85	23.98	59.37	74.00	-14.63	PK	PASS
	H	5525	47.58	30.22	4.85	23.98	46.19	54.00	-7.81	AV	PASS
	V	5550	59.70	30.22	4.85	23.98	58.31	74.00	-15.69	PK	PASS
	V	5550	47.59	30.22	4.85	23.98	46.20	54.00	-7.80	AV	PASS
	V	5525	60.82	30.22	4.85	23.98	59.43	74.00	-14.57	PK	PASS
	V	5525	46.63	30.22	4.85	23.98	45.24	54.00	-8.76	AV	PASS
	High Channel 5700MHz										
	H	5750	61.86	30.22	4.85	23.98	60.47	74.00	-13.53	PK	PASS
	H	5750	47.99	30.22	4.85	23.98	46.60	54.00	-7.40	AV	PASS
	H	5716.4	61.25	30.22	4.85	23.98	59.86	74.00	-14.14	PK	PASS
	H	5716.4	46.63	30.22	4.85	23.98	45.24	54.00	-8.76	AV	PASS
	V	5750	61.27	30.22	4.85	23.98	59.88	74.00	-14.12	PK	PASS
	V	5750	48.36	30.22	4.85	23.98	46.97	54.00	-7.03	AV	PASS
	V	5716.4	61.53	30.22	4.85	23.98	60.14	74.00	-13.86	PK	PASS
	V	5716.4	48.24	30.22	4.85	23.98	46.85	54.00	-7.15	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac40	Low Channel 5270MHz										
	H	5248.8	59.39	30.22	4.85	23.98	58.00	74.00	-16.00	PK	PASS
	H	5248.8	46.30	30.22	4.85	23.98	44.91	54.00	-9.09	AV	PASS
	H	5250	59.61	30.22	4.85	23.98	58.22	74.00	-15.78	PK	PASS
	H	5250	48.16	30.22	4.85	23.98	46.77	54.00	-7.23	AV	PASS
	V	5248.8	61.70	30.22	4.85	23.98	60.31	74.00	-13.69	PK	PASS
	V	5248.8	46.70	30.22	4.85	23.98	45.31	54.00	-8.69	AV	PASS
	V	5250	62.52	30.22	4.85	23.98	61.13	74.00	-12.87	PK	PASS
	V	5250	46.70	30.22	4.85	23.98	45.31	54.00	-8.69	AV	PASS
	High Channel 5310MHz										
	H	5350.0	62.64	30.22	4.85	23.98	61.25	74.00	-12.75	PK	PASS
	H	5350.0	48.24	30.22	4.85	23.98	46.85	54.00	-7.15	AV	PASS
	H	5353.4	60.94	30.22	4.85	23.98	59.55	74.00	-14.45	PK	PASS
	H	5353.4	48.06	30.22	4.85	23.98	46.67	54.00	-7.33	AV	PASS
	V	5350.0	61.54	30.22	4.85	23.98	60.15	74.00	-13.85	PK	PASS
	V	5350.0	46.59	30.22	4.85	23.98	45.20	54.00	-8.80	AV	PASS
	V	5353.4	62.35	30.22	4.85	23.98	60.96	74.00	-13.04	PK	PASS
	V	5353.4	46.36	30.22	4.85	23.98	44.97	54.00	-9.03	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac40	Low Channel5510MHz										
	H	5520.6	59.85	30.22	4.85	23.98	58.46	74.00	-15.54	PK	PASS
	H	5520.6	48.45	30.22	4.85	23.98	47.06	54.00	-6.94	AV	PASS
	H	5525.0	60.23	30.22	4.85	23.98	58.84	74.00	-15.16	PK	PASS
	H	5525.0	47.84	30.22	4.85	23.98	46.45	54.00	-7.55	AV	PASS
	V	5520.6	60.75	30.22	4.85	23.98	59.36	74.00	-14.64	PK	PASS
	V	5520.6	47.28	30.22	4.85	23.98	45.89	54.00	-8.11	AV	PASS
	V	5525.0	61.05	30.22	4.85	23.98	59.66	74.00	-14.34	PK	PASS
	V	5525.0	46.00	30.22	4.85	23.98	44.61	54.00	-9.39	AV	PASS
	High Channel 5670MHz										
	H	5650.0	62.84	30.22	4.85	23.98	61.45	74.00	-12.55	PK	PASS
	H	5650.0	48.98	30.22	4.85	23.98	47.59	54.00	-6.41	AV	PASS
	H	5653.2	61.49	30.22	4.85	23.98	60.10	74.00	-13.90	PK	PASS
	H	5653.2	48.87	30.22	4.85	23.98	47.48	54.00	-6.52	AV	PASS
	V	5650.0	61.27	30.22	4.85	23.98	59.88	74.00	-14.12	PK	PASS
	V	5650.0	48.85	30.22	4.85	23.98	47.46	54.00	-6.54	AV	PASS
	V	5653.2	60.79	30.22	4.85	23.98	59.40	74.00	-14.60	PK	PASS
	V	5653.2	47.71	30.22	4.85	23.98	46.32	54.00	-7.68	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detector Type	Result
802.11 ac80	5290MHz										
	H	5223.0	59.53	30.22	4.85	23.98	58.14	74.00	-15.86	PK	PASS
	H	5223.0	46.06	30.22	4.85	23.98	44.67	54.00	-9.33	AV	PASS
	H	5250.0	62.28	30.22	4.85	23.98	60.89	74.00	-13.11	PK	PASS
	H	5250.0	46.05	30.22	4.85	23.98	44.66	54.00	-9.34	AV	PASS
	V	5250.0	62.44	30.22	4.85	23.98	61.05	74.00	-12.95	PK	PASS
	V	5250.0	48.71	30.22	4.85	23.98	47.32	54.00	-6.68	AV	PASS
	V	5250.0	61.57	30.22	4.85	23.98	60.18	74.00	-13.82	PK	PASS
	V	5250.0	47.24	30.22	4.85	23.98	45.85	54.00	-8.15	AV	PASS
	Low Channel 5530MHz										
	H	5523.8	60.24	30.22	4.85	23.98	58.85	74.00	-15.15	PK	PASS
	H	5523.8	46.71	30.22	4.85	23.98	45.32	54.00	-8.68	AV	PASS
	H	5525.0	61.71	30.22	4.85	23.98	60.32	74.00	-13.68	PK	PASS
	H	5525.0	47.02	30.22	4.85	23.98	45.63	54.00	-8.37	AV	PASS
	V	5523.8	61.94	30.22	4.85	23.98	60.55	74.00	-13.45	PK	PASS
	V	5523.8	47.44	30.22	4.85	23.98	46.05	54.00	-7.95	AV	PASS
	V	5525.0	59.97	30.22	4.85	23.98	58.58	74.00	-15.42	PK	PASS
	V	5525.0	48.52	30.22	4.85	23.98	47.13	54.00	-6.87	AV	PASS

5.POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or <500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

a) Set RBW ≥ 1/T, where T is defined in section II.B.I.a).

b) Set VBW ≥ 3 RBW.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add 10log(1MHz/RBW) to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Temperature：	24.2℃	Relative Humidity:	53%
Pressure：	1010 hPa	Test Voltage ：	DC 14.4 V
Test Mode：	TX		
5.2G(5180-5240 MHz):	Please refer to the Appendix A.5 for 5G WIFI RF Test Data.		
5.3G(5260-5320 MHz):	Please refer to the Appendix B.5 for 5G WIFI RF Test Data.		
5.6G(5500-5700 MHz):	Please refer to the Appendix C.5 for 5G WIFI RF Test Data.		
5.8G(5745-5825 MHz):	Please refer to the Appendix D.5 for 5G WIFI RF Test Data.		

6. 26DB & 6DB &99% EMISSION BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

6.2 TEST PROCEDURE

a) Set RBW = 1 % to 5 % of the OBW .

b) Set the VBW = 3 · RBW

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by -26 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW ≥ 3 · RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Emission bandwidth for the band 5.725 GHz to 5.85 GHz.

The following procedure shall be used for measuring this bandwidth:

a) Set RBW = 100 kHz.

b) Set the video bandwidth (VBW) ≥ 3×RBW.

c) Detector = Peak.

d) Trace mode = max-hold.

e) Sweep = No faster than coupled (auto) time.

f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.4 TEST RESULTS

Temperature：		24.2℃	Relative Humidity:	53%
Pressure：		1010 hPa	Test Voltage ：	DC 14.4 V
Test Mode ：		TX		
-26dB Bandwidth	5.2G(5180-5240 MHz):	Please refer to the Appendix A.3 for 5G WIFI RF Test Data.		
	5.3G(5260-5320 MHz):	Please refer to the Appendix B.3 for 5G WIFI RF Test Data.		
	5.6G(5500-5610 MHz):	Please refer to the Appendix C.3 for 5G WIFI RF Test Data.		
-6dB Bandwidth	5.8G(5745-5825 MHz):	Please refer to the Appendix D.3 for 5G WIFI RF Test Data.		
99% Bandwidth	5.2G(5180-5240 MHz):	Please refer to the Appendix A.4 for 5G WIFI RF Test Data.		
	5.3G(5260-5320 MHz):	Please refer to the Appendix B.4 for 5G WIFI RF Test Data.		
	5.6G(5500-5700 MHz):	Please refer to the Appendix C.4 for 5G WIFI RF Test Data.		
	5.8G(5745-5825 MHz):	Please refer to the Appendix D.4 for 5G WIFI RF Test Data.		

7.MAXIMUM CONDUCTED OUTPUT POWER

7.1 PLIED PROCEDURES / LIMIT

According to FCC §15.407,
The maximum conduced output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.
If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.
If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.
Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power.
For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi.
Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.
If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.
If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.
If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 TEST PROCEDURE

According 789033 D02 General UNII Test Procedures New Rules v02r01.

EUT Measurement using a Power Meter (PM)

a) Method PM (Measurement using an RF average power meter):

(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:

- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
- At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
- The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

(ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.

(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(iv) Adjust the measurement in dBm by adding 10 log (1/x) where x is the duty cycle (e.g., 10 log (1/0.25) if the duty cycle is 25%).

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Temperature：	24.2℃	Relative Humidity:	53%
Pressure：	1010 hPa	Test Voltage ：	DC 14.4 V
Test Mode ：	TX		
5.2G(5180-5240 MHz):	Please refer to the Appendix A.2 for 5G WIFI RF Test Data.		
5.3G(5260-5320 MHz):	Please refer to the Appendix B.2 for 5G WIFI RF Test Data.		
5.6G(5500-5700 MHz):	Please refer to the Appendix C.2 for 5G WIFI RF Test Data.		
5.8G(5745-5825 MHz):	Please refer to the Appendix D.2 for 5G WIFI RF Test Data.		

8.OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b), RSS-247 6.2.1.2, RSS-247 6.2.4.2

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

(4) Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

(i) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

According to RSS-247 section 6.2.1.2: For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250- 5350 MHz band.

8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Temperature：	24.2℃	Relative Humidity:	53%
Pressure：	1010 hPa	Test Voltage ：	DC 14.4 V
Test Mode ：	TX		
5.2G(5180-5240MHz):	Please refer to the Appendix A.6 for 5G WIFI RF Test Data.		
5.3G(5260-5320MHz):	Please refer to the Appendix B.6 for 5G WIFI RF Test Data.		
5.6G(5500-5700 MHz):	Please refer to the Appendix C.6 for 5G WIFI RF Test Data.		
5.8G(5745-5825 MHz):	Please refer to the Appendix D.6 for 5G WIFI RF Test Data.		

9.SPURIOUS RF CONDUCTED EMISSIONS

9.1 CONFORMANCE LIMIT

Refer to 15.407(b):

Except as shown in paragraph 15.407(b)(7) of this section, the maximum emissionsoutside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

Refer to RSS-247/6.2.1.2:

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;

b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;

c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and

d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

9.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

9.3 TEST SETUP



9.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2020+Cor 1-2023 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 1GHz.Set RBW=1MHz and VBW= 3MHz to measure the peak field strength, and measure frequency range from 1GHz to 40GHz.

9.5 TEST RESULTS

Temperature：	24.2℃	Relative Humidity:	53%
Pressure：	1010 hPa	Test Voltage ：	DC 14.4 V
Test Mode ：	TX		
5.2G(5180-5240MHz):	Please refer to the Appendix A.8 for 5G WIFI RF Test Data.		
5.3G(5260-5320 MHz):	Please refer to the Appendix B.8 for 5G WIFI RF Test Data.		
5.6G(5500-5700 MHz):	Please refer to the Appendix C.8 for 5G WIFI RF Test Data.		
5.8G(5745-5825 MHz):	Please refer to the Appendix D.8 for 5G WIFI RF Test Data.		

Remark1: The measurement frequency range is from 30MHz to the 10th harmonic or 40G of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Remark2: From 26.5GHz to 40GHz,the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

10.FREQUENCY STABILITY MEASUREMENT

10.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

According to RSS-247 "Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual." According to RSS-Gen "The frequency stability shall be measured with variation of ambient temperature as follows:" (1) From −30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section. (2) From −20° to + 50° centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter. (3) From 0° to + 50° centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 30 kHz with peak detector and maxhold settings.
5. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
6. Extreme temperature is -20°C~60°C.

10.3 TEST SETUP LAYOUT

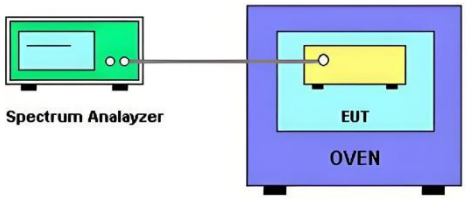

10.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

10.5 TEST RESULTS


Temperature：	24.2℃	Relative Humidity:	53%
Pressure：	1010 hPa	Test Voltage ：	DC 14.4 V
Test Mode ：	TX		
5.2G(5180-5240MHz):	Please refer to the Appendix A.7 for 5G WIFI RF Test Data.		
5.3G(5260-5320 MHz):	Please refer to the Appendix B.7 for 5G WIFI RF Test Data.		
5.6G(5500-5700 MHz):	Please refer to the Appendix C.7 for 5G WIFI RF Test Data.		
5.8G(5745-5825 MHz):	Please refer to the Appendix D.7 for 5G WIFI RF Test Data.		

11.CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME

11.1LIMIT

Channel Move Time: within 10 seconds
Channel Closing Transmission Time: 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. (The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.)

11.2 TEST SETUP LAYOUT

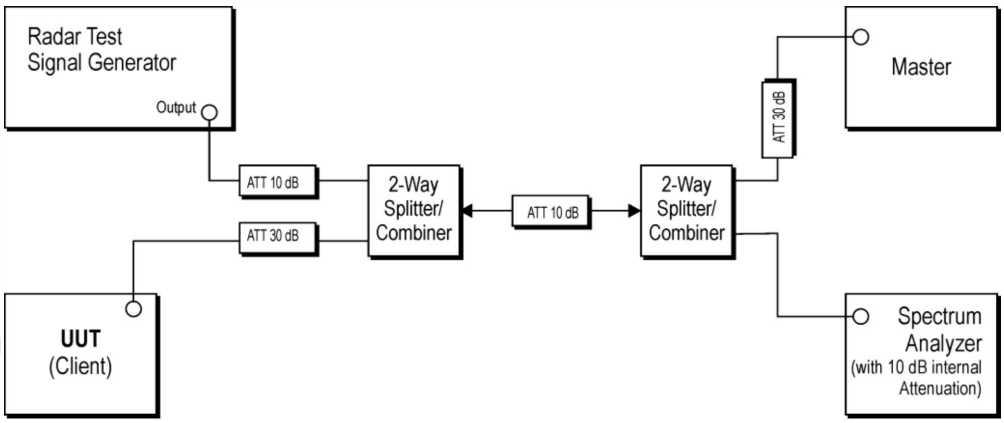

11.3TEST PROCEDURE


1.When a Client Device without Radar Detection is the UUT, the Master Device is the Radar Detection Device.
2.A spectrum analyzer is used to establish the test signal level for each radar type.
3. During this process, there are no transmissions by either the Master Device or Client Device.
4. The spectrum analyzer is switched to the zero span (time domain) mode at the frequency of the Radar Waveform generator. The peak detector function of the spectrum analyzer is utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) are set to at least 3 MHz.
5. The measured channels are 5300MHz in 20MHz Bandwidth. The Radar signal was the same as transmitted channels, and injected into the antenna port of AP(master) ,measured the DFS parameters. The master transmitted the test data to client, the transmitted duty cycle is 35%.

11.4TEST RESULTS

Channel Move Time and Channel Closing Transmission Time


Test Frequency	Requirement	Measurement Level	Limit
5290MHz	Channel Closing Transmission Time	0.0376s	≤0.26s
	Channel Move Time	0.5841s	≤10s

Channel Move Time and Closing Transmission Time_802.11a(VHT80)_2A_5290MHz

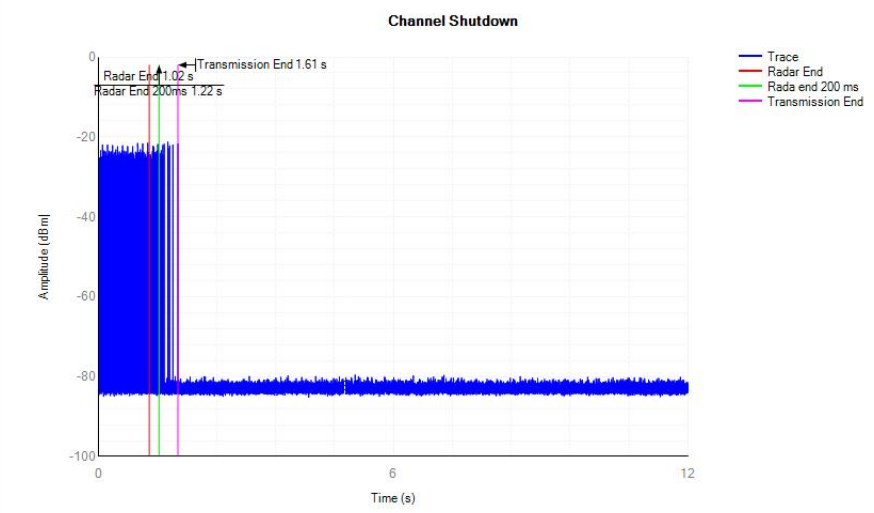

Test Frequency	Requirement	Measurement Level	Limit
5530MHz	Channel Closing Transmission Time	0.0416s	≤0.26s
	Channel Move Time	0.5977s	≤10s

Channel Move Time and Closing Transmission Time_802.11ac(VHT80)_2C_5530MHz

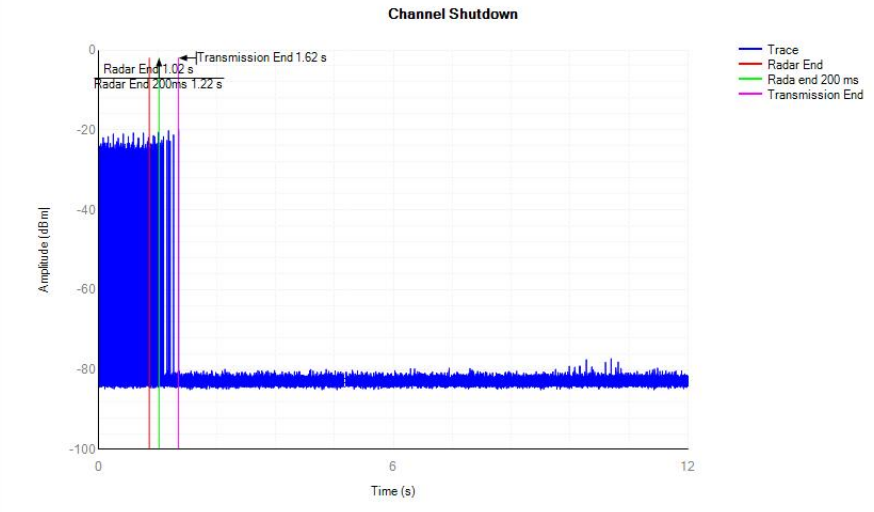


12.NON-OCCUPANCY PERIOD TEST

12.1LIMIT


A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

12.2TEST SETUP LAYOUT

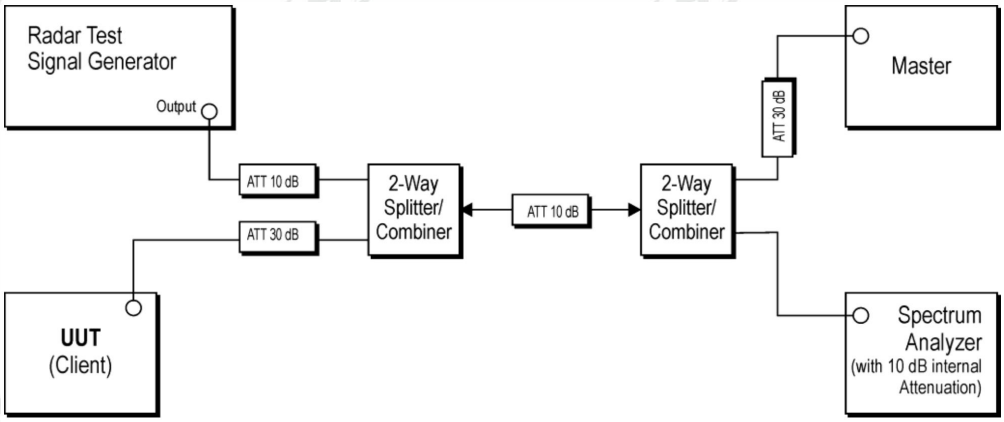


12.3TEST RESULTS

Non-Occupancy Period_802.11a(VHT80)_2A_5290MHz

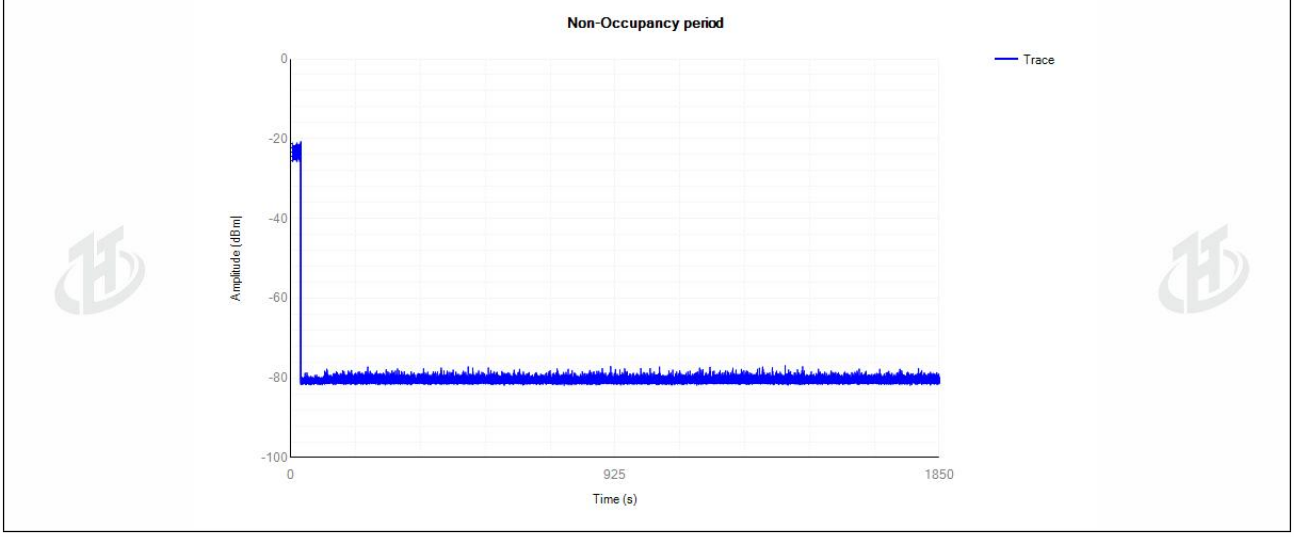

Non-Occupancy Period_802.11ac(VHT80)_2C_5530MHz

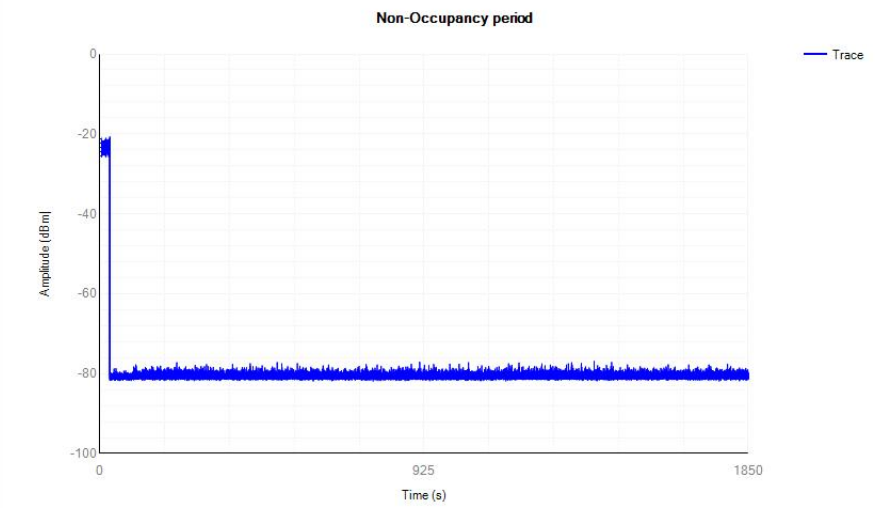

13.DFS DETECTION THRESHOLDS

13.1LIMIT

DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection


Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.


Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

13.2TEST SETUP LAYOUT

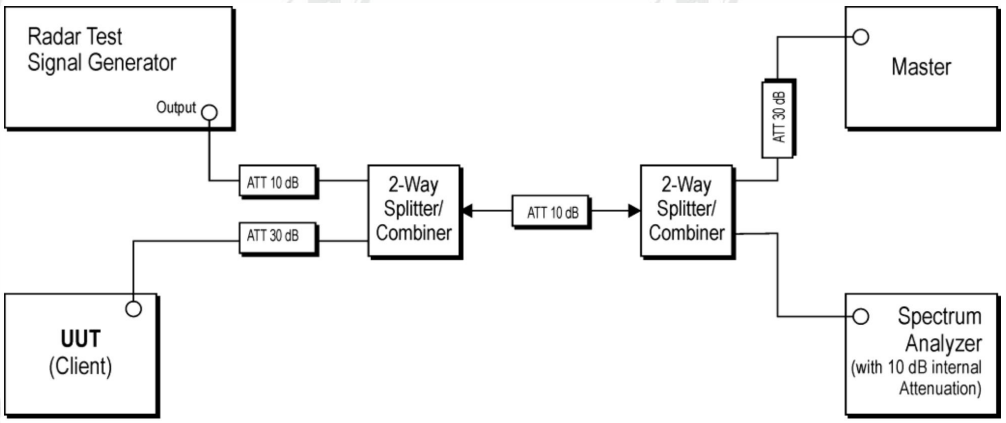


13.3TEST RESULTS

Signal Calibration_802.11a(HT80)_2A_5290MHz_RadarType0_Trial0

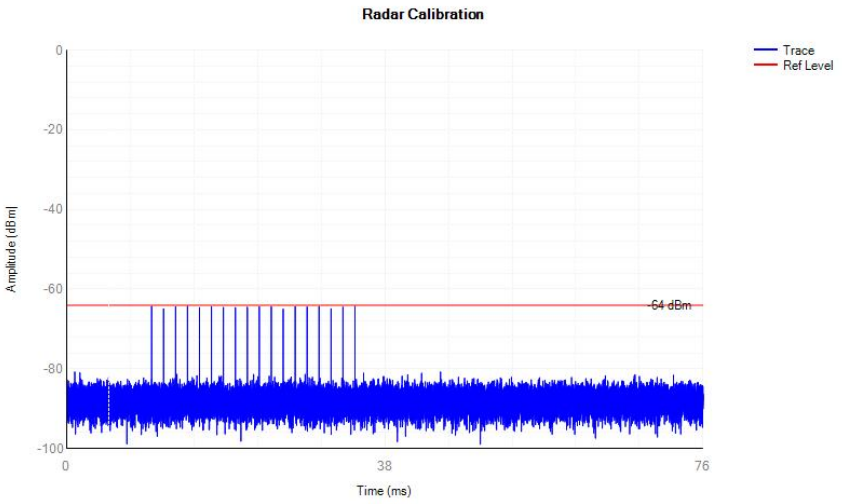

Signal Calibration_802.11ac(VHT80)_2C_5530MHz_RadarType0_Trial0

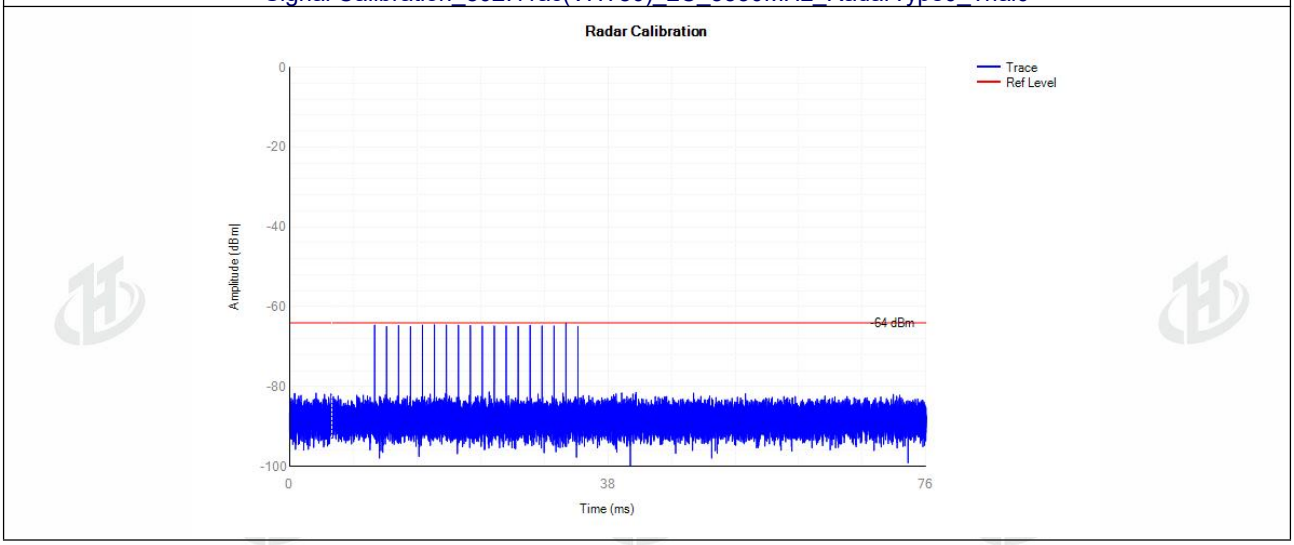

14.ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203, RSS-247 6.8
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (EIRP) limits specified in the applicable standard (RSS) for the licence-exempt apparatus. Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.	
EUT Antenna:	
The antenna is Internal Antenna, the best case gain of the antenna is 4.2dBi, reference to the appendix II for details	

15. TEST SETUP PHOTO

Reference to the appendix I for details.

16. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

※※※※※ **END OF REPORT** ※※※※※