

FCC TEST REPORT

FCC ID: WR4-CRS2

Applicant Name..... : Topcon Positioning Systems, Inc.

Address..... : 7400 National Drive Livermore California United States 94551

Manufacturer Name..... : Beijing Green Valley Technology Co., Ltd

Address..... : 2301-2308, Suite A Building No.2 Zhongguancun Software Park, Haidian District, Beijing, P.R.China

Product..... : CR-S2 Handheld Mapping System

Model(s)..... : CR-S2

Additional Model(s)..... : /

Trademark..... : /

Model Difference..... : /

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : June 18

Date of Test(s)..... : June 18 to July 1, 2026

Date of Issue..... : July 1, 2026

Test Requested..... : Select test(s) as requested by the client.

Test Standard(s)..... : FCC Part 15 Subpart E 15.407
KDB789033 D02 General U-NII Test Procedures New Rules v02r01

Test procedure..... : ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

In the configuration tested, the EUT complied with the standards specified above.

Prepared by:

Reviewed by:

Approved by:

Kimi Lu

Kimi Lu/ Engineer

Baret Wu

Baret Wu/ Director

Levi Lee

Levi Lee/ Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document.

Table of Contents

Page

1.SUMMARY OF TEST RESULTS	3
2. GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
3. TEST FACILITY AND TEST INSTRUMENT USED	9
3.1 TEST FACILITY	9
3.2 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3.3 TESTING SOFTWARE	10
3.4 MEASUREMENT UNCERTAINTY	11
4.EMC EMISSION TEST	12
4.1.1 APPLICABLE STANDARD	12
4.1.2 CONFORMANCE LIMIT	12
4.1.3 MEASURING INSTRUMENTS	13
4.1.4 TEST CONFIGURATION	14
4.1.5 TEST PROCEDURE	15
4.1.6 TEST RESULT(BETWEEN 9KHZ – 30MHZ)	15
5. TEST SETUP PHOTO	18
6. EUT CONSTRUCTIONAL DETAILS	18

**1.SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
FCC part 15.209	Radiated Spurious Emission	PASS	

NOTE:

Class II Permissive Change: The original laser MID-360 and the new laser MID-360S is different.

Note: Report is for Class II Permissive Change only. Updated test data Radiated Emission. Other test data refer to the original report ZHT-251114130W01-2, The original FCC ID issue date: 12/19/2025



Version

Report No.	Issue Date	Description
ZHT-251114130W01-2	Dec. 17, 2025	Original
ZHT-260618113W02-2	July 1, 2026	This report is based on the original report numbered ZHT-251114130W01-2 added There is a slight change in the position of the laser housing aviation plug. The only difference that the laser changes from MID-360 to MID-360S, which affects the test results. A low-frequency 30MHz-1GHz difference test was conducted, and other test data are referenced from the original report numbered ZHT-251114130W01-2.



2.1 GENERAL DESCRIPTION OF EUT

Product Name:	CR-S2 Handheld Mapping System		
Test Model No.:	CR-S2		
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac (20MHz channel bandwidth) ☒ 802.11n/ac (40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)	
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n/ac(HT20/HT40):MCS0-MCS7; 802.11ac(VHT80):NSS1, MCS0-MCS9	
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;	
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; ☒ 5260-5320MHz for 802.11a/n(HT20)/ac20; 5270-5310MHz for 802.11n(HT40)/ac40; 5290MHz for 802.11 ac80; ☒ 5500-5700MHz for 802.11a/n(HT20)/ac20; 5510-5670MHz for 802.11n(HT40)/ac40; 5530-5610MHz for 802.11 ac80; ☒ 5745-5825 MHz for802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40; 5775MHz for 802.11 ac80;	
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230 MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 4 channels for 802.11a/n20/ac20 in the 5260-5320MHz band ; 2 channels for 802.11 n40/ac40 in the 5270-5310 MHz band ; 1 channels for 802.11 ac80 in the 5290MHz band ; ☒ 11 channels for 802.11a/n20/ac20 in the 5500-5700MHz band ; 5 channels for 802.11 n40/ac40 in the 5510-5670 MHz band ; 2 channels for 802.11 ac80 in the 5530-5610MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795 MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;	
TPC:	☐ Supported ☒ Unspoorted		
Channel Puncturing Function:	☒ Supported ☐ Unspoorted		
Channel List	Please refer to the Note 2.		
Antenna Type and Antenna gain:	Internal Antenna, 3dBi		
Power supply:	DC 14.4 V powered by battery		

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

802.11a/n/ac(20MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	40	5200	48	5240
52	5260	56	5280	60	5300	64	5320
100	5500	104	5520	108	5540	112	5560
120	5600	132	5660	136	5680	140	5700
149	5745	153	5765	157	5785	161	5805
165	5825						

802.11n(40MHz) Frequency Channel							
802.11n /ac(40MHz)Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	54	5270	62	5310
102	5510	110	5550	118	5590	126	5630
134	5670	151	5755	159	5795		

802.11ac(80MHz) Frequency Channel	
Channel	Frequency (MHz)
42	5210
58	5290
106	5530
122	5610
155	5775



2.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Pretest Mode	Description
Mode 1	802.11a / n20/ac 20/ CH36/ CH40/ CH48/ CH52/ CH56/ CH64/ CH100/ CH120/ CH140/ CH149 / CH157 / CH165
Mode 2	802.11n 40/ac40 CH38/ CH46/ CH54/ CH62/ CH102/ CH118/ CH134/ CH151/ CH159
Mode 3	802.11 ac80 CH42/ CH58/ CH106/ CH122/ CH155
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n20/ac 20/ CH36/ CH40/ CH48/ CH52/ CH56/ CH64/ CH100/ CH120/ CH140/ CH149 / CH157 / CH165
Mode 2	802.11n 40/ac40 CH38/ CH46/ CH54/ CH62/ CH102/ CH118/ CH134/ CH151/ CH159
Mode 3	802.11 ac80 CH42/ CH58/ CH106/ CH122/ CH155
Mode 4	Link Mode

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission

EUT

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) The test software is the SecureCRTPortable.exe which can set the EUT into the individual test modes.TX Power:default.

Note 1: We test all channels that need to be tested for DFS, reporting only part of the test pattemand data. in this report, wehave identified other parts that are compliant with FCC regulations.

Note 2: The method of establishing a connection between the master device and the slave device.After inserting the EUT USB port into the PC, the laptop opens the router control interface toconnect to the EUT and control its corresponding signal transmission.

1. The frequency range of equipment operation is: U-NII-1: 5180 MHz to 5240 MHz, U-NII-2A: 5260 MHz to 5320 MHz, U-NII-2C: 5500 MHz to 5700 MHz, U-NII-3: 5745 MHz to 5825 MHz.
2. The operating modes is Client, Equipped with radar detection capability, the main U-NII device FCC ID used for DFS testing is 2AW68-GR140IG
3. Please refer to section 5.4 of this report for the maximum and minimum possible power levels(Equivalent Isotropic Radiated Power (EIRP)) of the equipment, The antenna gain is 3dBi.
4. Test sequences or messages that should be used for communication between Master andClient Devices, which are used for Channel loading.Stream the test file from the Master Deviceto the Client Device for IP based systems or frame based systems which dynamically allocatethe talk/listen ratio.
5. The time required for the master and slave devices to fully start is 120 seconds.
6. The product belongs to Slave without radar detection
7. Manufacturer statement confirming that infommation regarding the parameters of the detectedRadar Waveforms is not available to the end user.
8. Manufacturers can manually select the first channel 5300MHz.

3. TEST FACILITY AND TEST INSTRUMENT USED

3.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add. : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

3.2 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Equipment No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	ZH-E005	Apr. 24, 2026	Apr. 23, 2027
2	Loop Antenna	TESEQ	HLA6121	58357	ZH-E036	Sept. 8, 2025	Sept. 7, 2026
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	ZH-E019	Apr. 24, 2026	Apr. 23, 2027
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	ZH-E021	May 8, 2026	May 7, 2027
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	ZH-E017	Apr. 25, 2026	Apr. 24, 2027
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	ZH-E020	Apr. 25, 2026	Apr. 24, 2027
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	ZH-E062	Oct. 20, 2025	Oct. 19, 2026
8	Amplifier	AEROFLEX	100KHz-40GHz	097	ZH-E063	Oct. 20, 2025	Oct. 19, 2026
9	Spectrum Analyzer	R&S	FSV40	101413	ZH-E064	Apr. 24, 2026	Apr. 23, 2027
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	ZH-E032	Apr. 24, 2026	Apr. 23, 2027
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	ZH-E033	Apr. 24, 2026	Apr. 23, 2027
12	Single Generator	Agilent	N5182A	MY48180575	ZH-E034	Apr. 24, 2026	Apr. 23, 2027
13	Power Sensor	MWRFTest	MW100-RFCB	/	ZH-E066	Apr. 24, 2026	Apr. 23, 2027
14	CABLE	EMToni	DA800-NM-NM-11000MM	/	ZH-E018	Apr. 24, 2026	Apr. 23, 2027

3.3 TESTING SOFTWARE

Project	Software name	Edition
Radiated Emission	EZ-EMC	FA-03A2 RE+

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	0.92dB
2	RF conducted power	0.16dB
3	Conducted spurious emissions	0.21dB
4	All radiated emissions (9k-30MHz)	4.68dB
5	All radiated emissions (30-1GHz)	5.1dB
6	All radiated emissions (1-6GHz)	3.9dB
7	All radiated emissions (6GHz-18GHz)	4.3dB
8	All radiated emissions (18-40GHz)	4.65dB
9	Temperature	0.5°C
10	Humidity	2%
11	Occupied Bandwidth	4.96%
12	RF Power Density	0.77dB
13	DFS Detection Thresholds	$U_{95\%} = 2 \times u_c = 2 \times 1.23 = 1.94(\text{dB})$ $U_{95\%} = 2 \times u_c = 2 \times 0.03 = 0.03(\text{s})$

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included

4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209, RSS-247 6.2.1.2, RSS-Gen

4.1.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

RSS-Gen 8.10 Restricted frequency bands

MHz	MHz	MHz	GHz
0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475-156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614		

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5850	-27(Note 2)	68.2
	10(Note 2)	105.2
	15.6(Note 2)	110.8
	27(Note 2)	122.2

NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$

2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to RSS-Gen§8.9: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field

strength limits specified in RSS-Gen Issue 5 is not required.

In case the emission fall within the restricted band specified on RSS-Gen Issue 5, then the RSS-Gen Issue 5 limit in the table below has to be followed.


Frequency (MHz)	Distance (Meters)	Radiated (dBuV/m)	Radiated (uV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

4.1.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

4.1.4 TEST CONFIGURATION


1. For radiated emissions below 30MHz

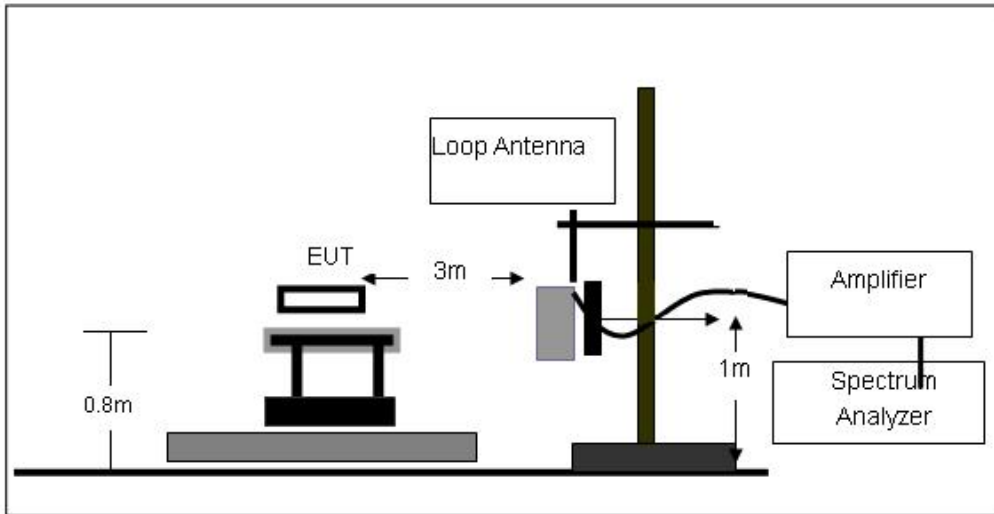

2. For radiated emissions from 30MHz to 1000MHz

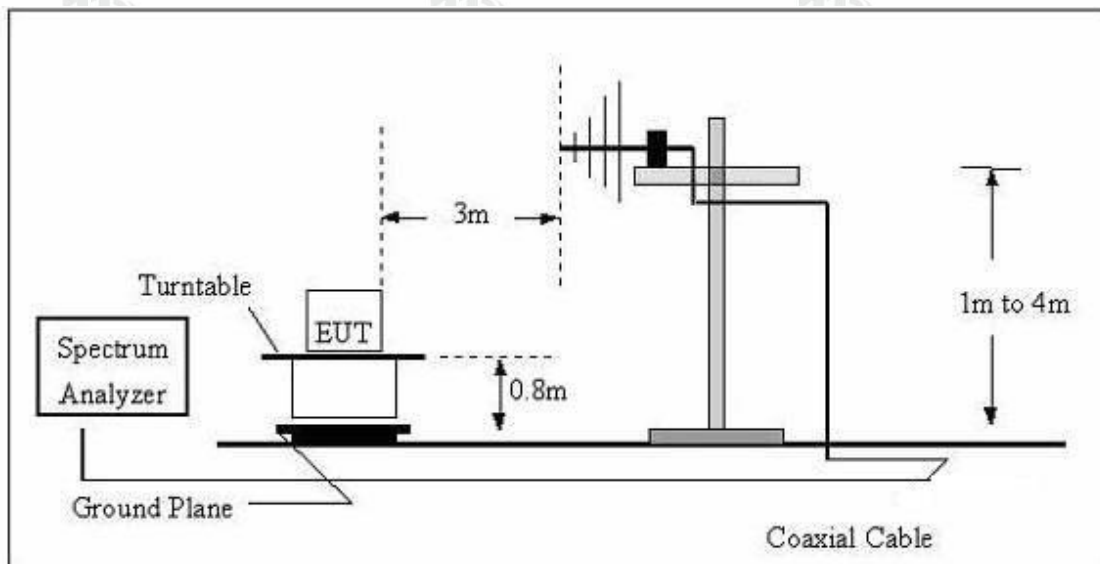

3. Radiated Emission Test-Up Frequency Above 1GHz

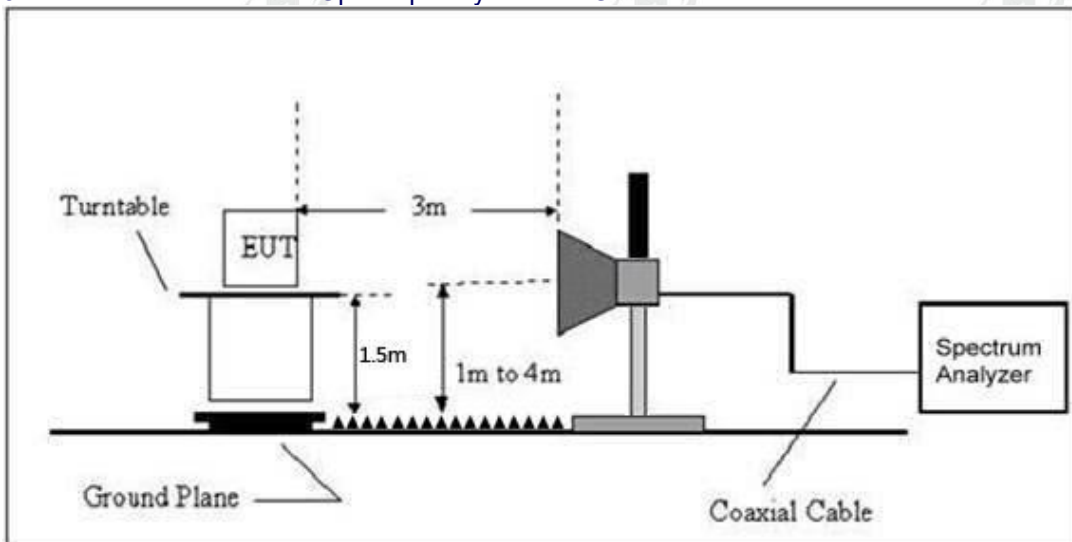



4.1.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2020. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2020 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz


Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

4.1.6 TEST RESULT(BETWEEN 9KHZ – 30MHZ)

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


Between 30MHz – 1GHz

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 14.4 V		

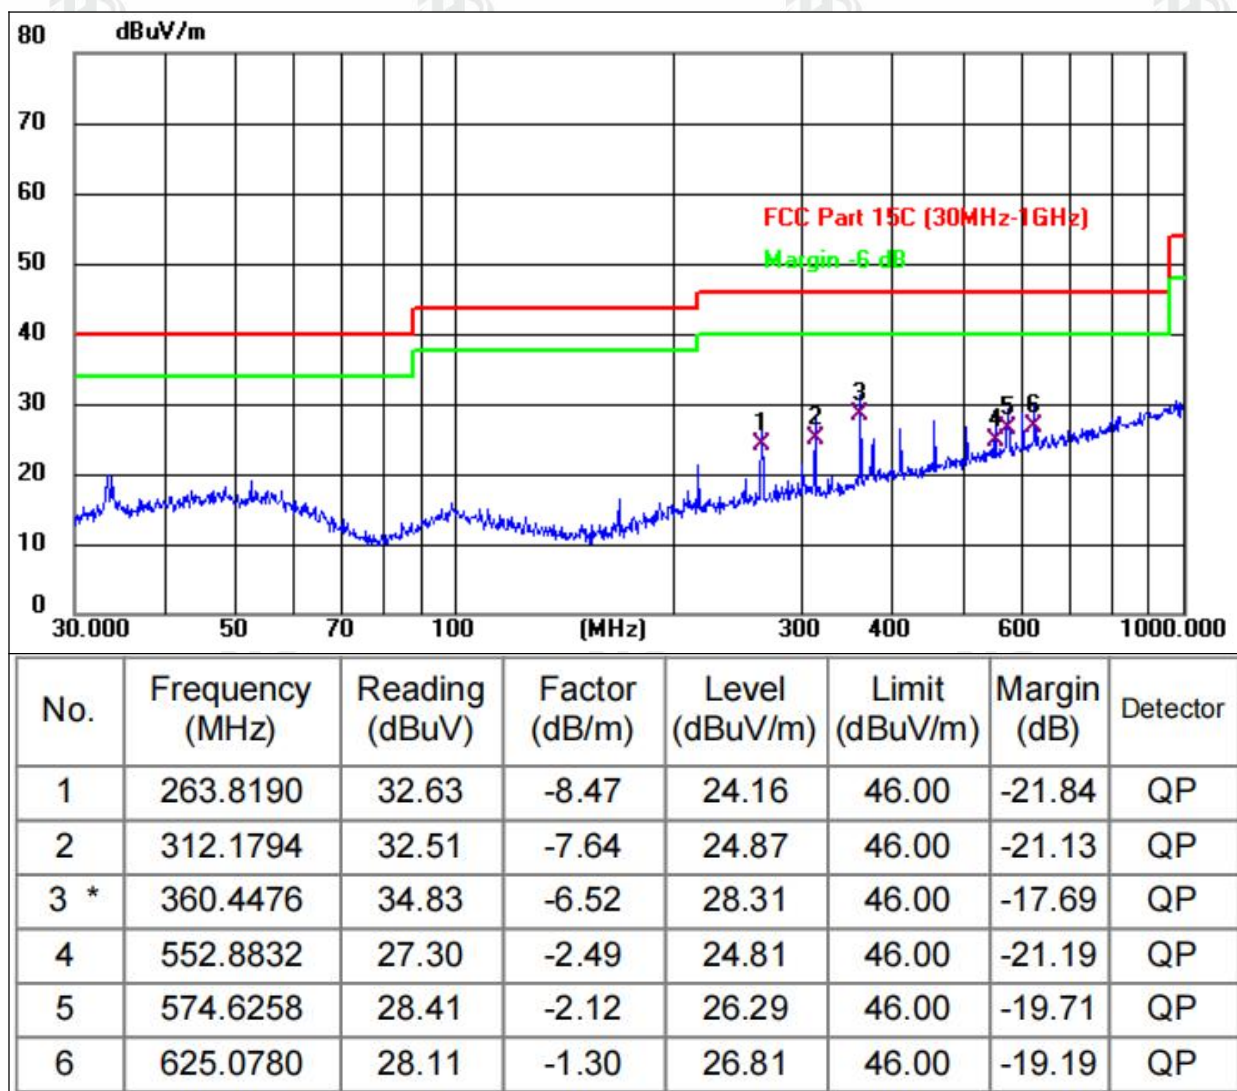



Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 14.4 V		

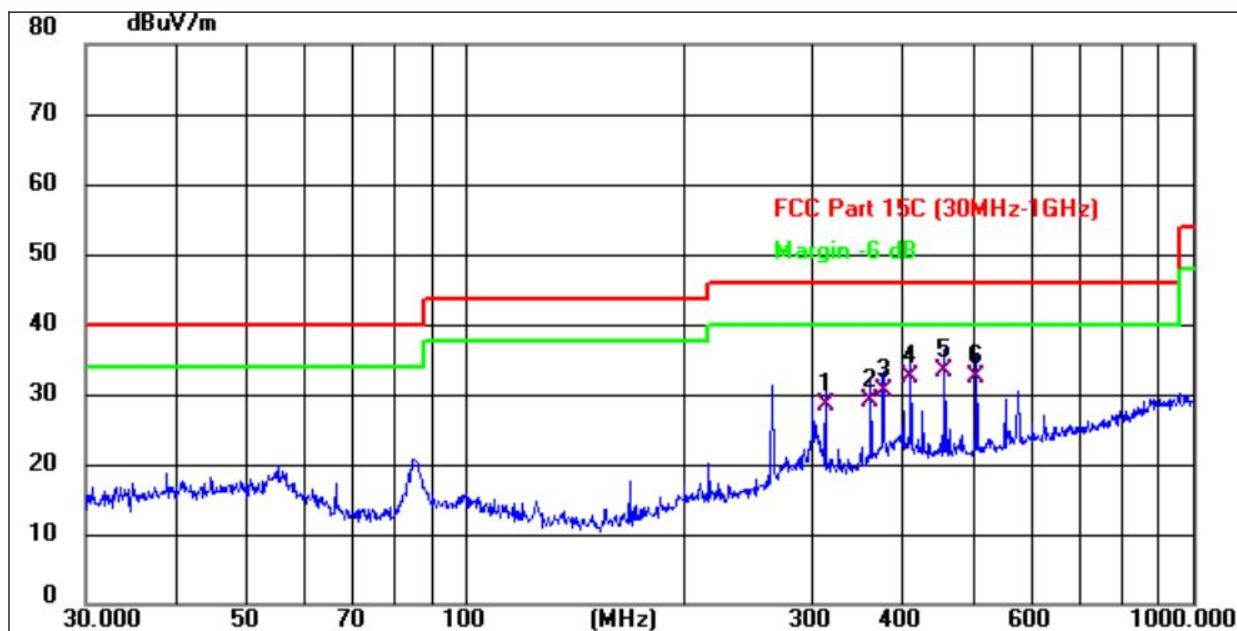

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	312.1794	36.12	-7.64	28.48	46.00	-17.52	QP
2	360.4476	35.43	-6.52	28.91	46.00	-17.09	QP
3	375.9385	36.54	-6.15	30.39	46.00	-15.61	QP
4	408.9460	37.84	-5.39	32.45	46.00	-13.55	QP
5 *	455.9058	37.78	-4.38	33.40	46.00	-12.60	QP
6	504.7062	35.89	-3.33	32.56	46.00	-13.44	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. All mode have been tested, The worst mode is 5.8G 802.11n20 5825MHz is recorded.



ZHONGHAN

5. TEST SETUP PHOTO

Reference to the appendix I for details.

6. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****