



RF Test Report

Standard(s): FCC Part 15 Subpart 15.247,
RSS-247 Issue 3:2023
Unlicensed Intentional Radiators

Issued To: Ecobee Inc
207 Queens Quay Suite 600
Toronto, ON M5J 1A7
Canada

Product Name: Smart Thermostat Lite
Model: ECB701
FCC ID: WR9202428847PR
IC: 7981A-202428847PR

Report No. ML301913B-RF00 (DTS – WIFI)
Date of Issue: March 24, 2025

Report Prepared By:

Reviewed By:

A handwritten signature in black ink that reads "Min Xie".

Min Xie, Sr. EMC/RF Project Engineer

A handwritten signature in black ink that reads "Amir Emami".

Amir Emami, Project Engineer

Megalab Group Inc. – 150 Addison Hall Circle, Aurora, Ontario, L4G 3X8, Canada
www.megalabinc.com – (905) 752-1925

This report may not be reproduced, except in full, without prior written approval of Megalab Group Inc.
TRRF_FCC-ICES-247-DTS_v1

Table of Contents

1.	Revision History	3
2.	Summary of Test Results.....	4
2.1	Test Verdict.....	4
2.2	Test Standards	5
2.3	Test Facility	6
3.	General Information	9
3.1	Client Information	9
3.2	Device Under Test (DUT)	9
3.3	Test Setup of DUT	10
3.4	Modifications for Compliance	10
4.	Test Results	11
4.1	Transmitter Spurious Radiated Emissions	11
4.2	Lower and Upper Band Edges.....	23
4.3	Power Line Conducted Emissions.....	42

1. Revision History

Project No. & Revision	Report Date	Initials	Description
ML301913B-RF00 (DTS – WIFI)	March 24, 2025	MX	Initial Release
--	--	--	--

NOTE:

- Latest reports marked as a revision replace any previous report and/or report revision issued under the same project number.

2. Summary of Test Results

2.1 Test Verdict

Unless otherwise stated, the test data and results in this test report relate only to the sample(s) tested.

Requirement		Test Type	Result	Remark
FCC	ISED			
15.247(d) 15.209	RSS-GEN 8.9 (Table 5 & 6)	Transmitter Spurious Radiated Emissions	Pass	---
15.205 15.209	RSS-GEN 8.10 (Table 7)	Lower and Upper Band Edges	Pass	Transmitter spurious radiated emissions which fall in the restricted bands
15.207	RSS-GEN (Table 4)	Power Line Conducted Emissions	Pass	--

2.1.1 Test Verdict Notes and Justifications

The DUT was mounted as in normal usage. See the Test Setup Photos for details.

This report is for an update to the original filing based on Class II Permissive Change make to the product. See C2PC Cover Letter filed with the application for additional details on the changes. Refer to the original test report, Megalab Report # **301244B-RF01 (DTS-WIFI)**, for full testing and test results.

As per the manufacturer, the transmitter in the new sample is electrically identical to previous tested sample. Non transmitter components were replaced/added with new parts. The following test was re-evaluated on the EUT to verify if this change did not degrade the emission data previously reported.

- Spurious radiated emission
- Band Edge measurements
- Power line conducted emission

Spurious radiated emissions were and band edges were tested in 802.11 b/g/n protocols to verify that these two emission characteristics were not degraded due to the changes.

2.2 Test Standards

Standard	Description
47 CFR FCC Part 15 Subpart C	Code of Federal Regulations – Radio Frequency Devices, Intentional Radiators
FCC KDB 558074:2019	Digital Transmission Systems, measurements and procedures
RSS-247 Issue 3:2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS-GEN Issue 5:2021	General Requirements for Compliance of Radio Apparatus
ANSI C63.4:2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ISO 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories

2.3 Test Facility

All tests were performed at Megalab Group Inc., located at 150 Addison Hall Circle, Aurora, ON, L4G 3X8, Canada.

The 10-meter semi-anechoic chamber for radiated emission and radiated immunity is designed to handle weights of up to 10,000lb and has power capability of over 100A. The turntable is capable of supporting test devices or systems either floor standing or table top of up to 4 meters wide and 3m tall. Conducted emissions, unless otherwise specified, are performed on a 2.44m x 2.48m ground plane and using a 2.44m x 2.48m vertical ground plane if applicable.

2.3.1 Accreditations

This report does not indicate any product endorsement by any government, accreditation agency, or Megalab Group Inc. Megalab Group Inc. shall have no liability for any deductions, interpretations or generalizations drawn by the client or others from the issued reports. If any opinions or interpretations are expressed in this report, they are outside Megalab Group Inc.'s scope of accreditation and do not necessarily reflect the opinions of Megalab Group Inc., unless otherwise specified.



A2LA (Certificate #5179.02)

Megalab Group Inc. is accredited to ISO/IEC 17025:2017 by the American Association for Laboratory Accreditation (A2LA) with Testing Certificate #5179.02. The laboratories current scope of accreditation can be found as listed on A2LA's website.



Innovation, Science and
Economic Development Canada

ISED

Megalab Group Inc. is registered with and recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 28697



FCC

Megalab Group Inc. is registered with and recognized by the Federal Communications Commission (FCC) as an accredited testing laboratory.
Registration No. 200040



VCCI

The Semi-anechoic chamber of Megalab Group Inc. is registered with the Regulations for Voluntary Control Council for Interference (VCCI). Registration No.: R-20173, G-20174, C-20132, T-20133.

2.3.2 Measurement Uncertainty

As per ISO/IEC 17025 requirements, an evaluation of the measurement uncertainties associated with the emission test results should be included in the test report.

Where relevant, the following measurement uncertainty levels have been estimated for the tests performed on the DUT as specified in CISPR 16-4-2. The measurement uncertainties given below are based on a coverage factor $k = 2$ which yields approximately a 95% level of confidence for the near-normal distribution typical of most measurement results.

Measurement	Frequency Range	Uncertainty
Conducted Emissions at AC Mains Power Port	150kHz to 30MHz	2.27 dB
Radiated Emissions	30MHz to 1GHz	5.22 dB
	1GHz to 18GHz	4.76 dB

2.3.3 Sample Calculations

Conducted Emissions

$$\begin{aligned}
 \text{Emission Level (dB}\mu\text{V)} &= \text{Read Level (dB}\mu\text{V)} + \text{LISN Factor (dB)} + \text{Attenuation Factor (dB)} + \text{Cable Loss (dB)} \\
 &= 34.8 + 0.1 + 10.0 + 0.2 \\
 &= 45.1
 \end{aligned}$$

$$\begin{aligned}
 \text{Margin (dB)} &= \text{Limit (dB}\mu\text{V)} - \text{Emission Level (dB}\mu\text{V)} \\
 &= 60.0 - 45.1 \\
 &= 14.9
 \end{aligned}$$

Radiated Emissions

$$\begin{aligned}
 \text{Emission Level (dB}\mu\text{V/m)} &= \text{Read Level (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Pre-Amp Gain (dB)} \\
 &= 52.4 + 9.4 + 1.3 - 29.2 \\
 &= 33.9
 \end{aligned}$$

$$\begin{aligned}
 \text{Margin (dB)} &= \text{Limit (dB}\mu\text{V/m)} - \text{Emission Level (dB}\mu\text{V/m)} \\
 &= 50.0 - 33.9 \\
 &= 16.1
 \end{aligned}$$

2.3.4 Terms, Definitions and Abbreviations

AE	Auxiliary Equipment
DUT	Device Under Test
DTS	Digital Transmission System
EMC	Electro-Magnetic Compatibility
FHSS	Frequency Hopping Spread Spectrum
ISM	Industrial, Scientific and Medical
LISN	Line Impedance Stabilization Network
N/A	Not Applicable
NCR	No Calibration Required
RF	Radio Frequency
RBW	Resolution Bandwidth
VBW	Video Bandwidth

Auxiliary Equipment/Support Equipment

Equipment needed to exercise and/or monitor the operation of the DUT.

Artificial Mains Network

Network that provides a defined impedance to the DUT at radio frequencies, couples the disturbance voltage to the measuring receiver and decouples the test circuit from the supply mains.

Class A Equipment

Equipment suitable for use in all locations other than those allocated in residential environments and those directly connected to a low voltage power supply network which supplies buildings used for domestic purposes.

Class B Equipment

Equipment suitable for use in all locations, including in residential environments and in establishments directly connected to a low voltage power supply network which supplies buildings used for domestic purposes.

Device Under Test

Device or system being evaluated for compliance with the requirements of the Test Standards listed in this report.

Electro-Magnetic Compatibility

Ability of equipment or system to function satisfactorily in its EM environment without introducing intolerable electromagnetic disturbances to anything in that environment.

Electromagnetic Disturbance

Any electromagnetic phenomenon which may degrade the performance of a device, equipment or system.

3. General Information

3.1 Client Information

Company	Ecobee Inc
Address	207 Queens Quay Suite 600 Toronto, ON M5J 1A7 Canada
Contact	John Russomanno
Email	john@ecobee.com

3.2 Device Under Test (DUT)

3.2.1 DUT Information

DUT Name	Smart Thermostat Lite
DUT Model(s)	ECB701
Serial Number	Production samples
Power Source (AC / DC / Battery)	AC
Input Voltage (V) or Range	24Vac
Frequency (Hz) or Range	60Hz
Mode(s) of Operation	Continuous transmission, > 98% Duty Cycle
Connectors Available on DUT	Standard thermostat connections
Transmitter Information	
FCC ID	WR9202428847PR
IC	7981A-202428847PR
Technology Used	802.11 b/g/n
Operating Frequency	2412 MHz to 2462 MHz
Modulation Type	DSSS, OFDM
Number of Channels	11
Antenna Manufacturer	Custom – PCB trace
Antenna Model	N/A
Antenna Type	Monopole
Antenna Gain	2.5 dBi

Note: Above antenna information is provided by the client. The characteristics and gain are obtained from the Antenna Manufacturer's Data Sheet.

3.2.2 DUT Description

EUT is a smart thermostat that have two 2400 – 2483.5 MHz DTS (802.11 b/g/n and BLE) transmitters on one chip, and a 920 – 928 MHz FHSS/Hybrid transmitter on second chip.

This report documents the compliance of the WIFI transmitter.

3.3 Test Setup of DUT

3.3.1 Configuration

The DUT was configured in a direct test mode with the following parameters

- For all the tests, the DUT was set to transmit continuously with maximum duty cycle
- Output Power: +20 dBm
- Channels:
 - o low, 2412MHz
 - o Mid, 2437MHz
 - o High, 2462MHz

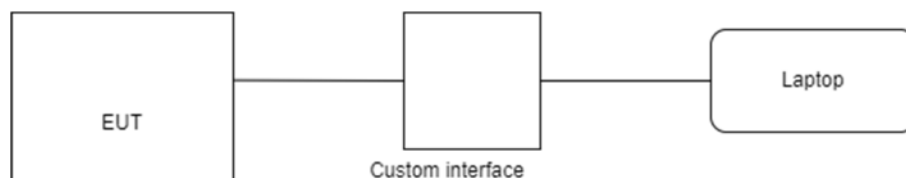


Figure 1 – Configuration Block Diagram

Description of I/O Cables			
Cable Function	Length of Cable (m)	Shielded (Y/N)	Outdoor Use (Y/N)
Thermostat control	>3	N	N

3.3.2 Support Equipment

Device	Manufacturer	Model	S/N
Custom USB Interface	Ecobee	--	---

3.4 Modifications for Compliance

No modifications were made to the device under test to comply with the testing requirements.

4. Test Results

4.1 Transmitter Spurious Radiated Emissions

Test Date: Dec 11 – 12, 2024
Temperature (°C) 20.5 – 20.9
Relative Humidity (%) 27.9 – 12.5
Barometric Pressure (kPa) 96.4 – 97.6

Initials: MX

4.1.1 Limits

Any radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the general radiated emission limits specified in FCC 15.209(a). Other emissions shall be at least 20dB below the highest level of the intentional transmitter.

Base Standard(s): FCC Subpart C 15.209 and RSS-Gen Section 8.9.

Frequency Range (MHz)	Field Strength Limit		Field Strength at 3m (dBμV/m)	Detector Type / Measurement Bandwidth
	μV/m	Distance		
0.009 – 0.150	2400/F(kHz)	300	128.5 – 104.1	Quasi-Peak‡ / 200Hz
0.150 – 0.490	2400/F(kHz)	300	104.1 – 93.8	Quasi-Peak‡ / 9kHz
0.490 – 1.705	24000/F(kHz)	30	73.8 – 63.0	Quasi-Peak / 9kHz
1.705 – 30	30	30	69.5	Quasi-Peak / 9kHz
30 – 88	100	3	40.0	Quasi-Peak / 120kHz
88 – 216	150	3	43.5	Quasi-Peak / 120kHz
216 – 960	200	3	46.0	Quasi-Peak / 120kHz
960 – 1000	500	3	54.0	Quasi-Peak / 120kHz
Above 1000	500	3	54.0	Average / 1MHz
Above 1000	5000	3	74.0	Peak / 1MHz

‡The emission limits below 1GHz shown in the above table are based on measurements employing a CISPR Quasi-Peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

As per ANSI C63.10 Section 4.1, if the Peak detector measurements do not exceed the Quasi-Peak limits, or Average limits where defined, then the DUT is considered to have passed the requirements.

4.1.2 Test Procedure

Tested according to ANSI C63.10 Section 6.3.

The device under test was setup inside a semi-anechoic chamber with remotely controlled turntable and antenna positioner at a 3m test distance. The DUT was placed on top of a 0.8m high non-conductive table above the reference ground plane for frequencies below 1GHz and 1.5m high for frequencies above 1GHz.

To determine the emission characteristics of the DUT, exploratory radiated emission scans were made while rotating the turntable 0° to 360° and using a Peak detector. The results were recorded in graphical form.


For each suspected emission, final measurements of the DUT radiated emissions with the Quasi-Peak, Average or Peak detector, as defined in the limit tables above, were made with the turntable azimuth rotated 0° to 360° and antenna height varied from 1m to 4m. The antenna was positioned to receive emissions in the vertical and horizontal polarizations such that the maximum radiated emission levels were detected.

As per FCC Part 15.33(a), the DUT was scanned to the 10th harmonic of the highest fundamental frequency.

Testing for 9 kHz – 30 MHz was performed with 3 orthogonal antenna polarities. The worst case results were present in this report.


4.1.3 Test Results

Range:	9kHz to 30 MHz	Tx Frequency	2412 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	XZ-Plane

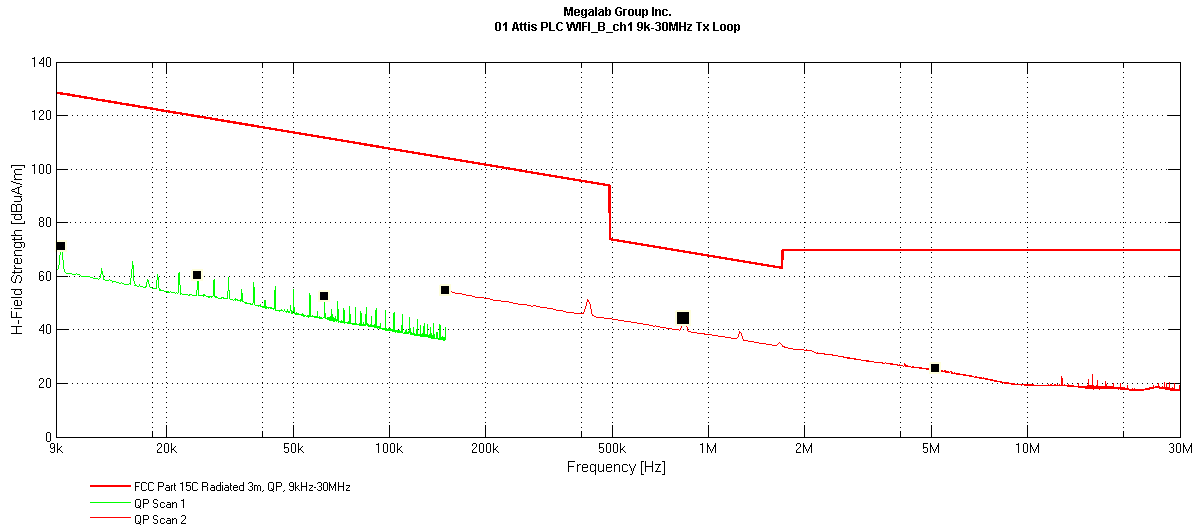


Remark: Quasi-Peak Emission Plot

Range:	30MHz to 1GHz	Tx Frequency	2412 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Horizontal

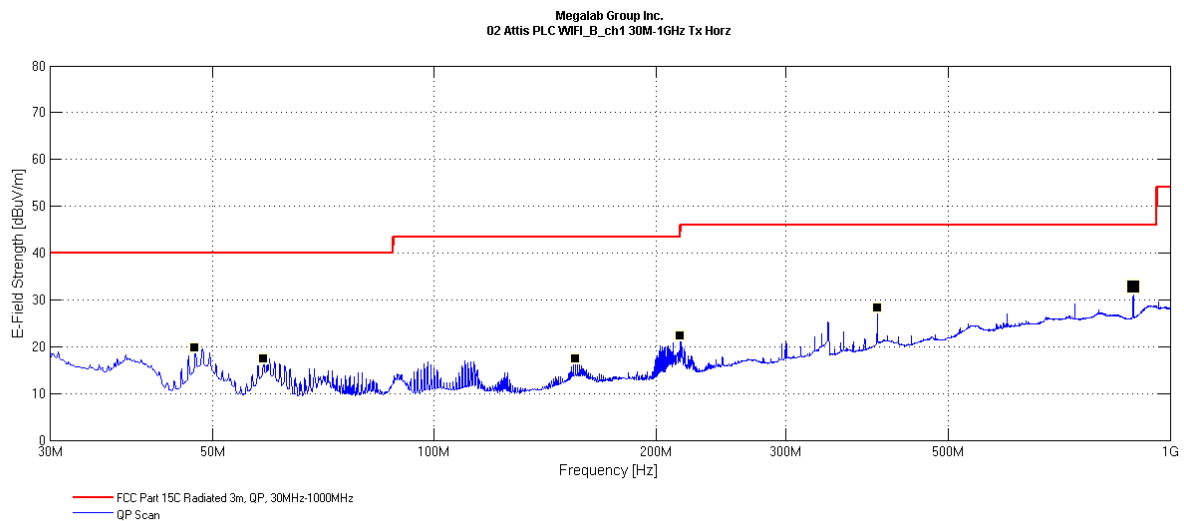


Remark: - Quasi-Peak Emission Plot
- A Notch filter was used to filter out the fundamental

Range:	1GHz to 10GHz	Tx Frequency	2412 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Horizontal

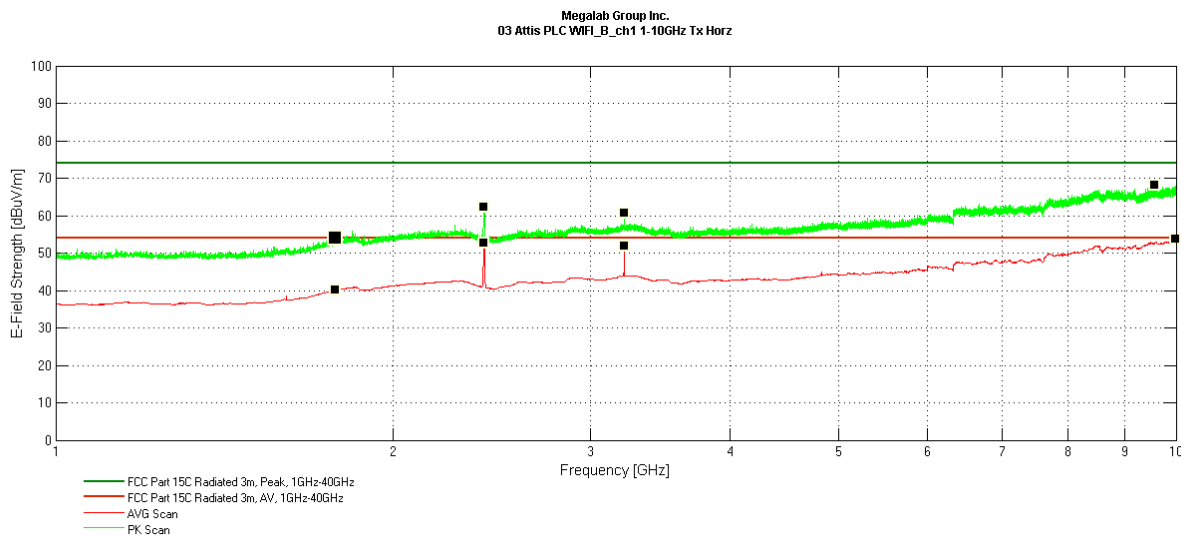


Remark: - **Peak** and **Average** Emission Plot
- A Notch filter was used to filter out the fundamental

Range:	10GHz to 18GHz	Tx Frequency	2412 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Horizontal

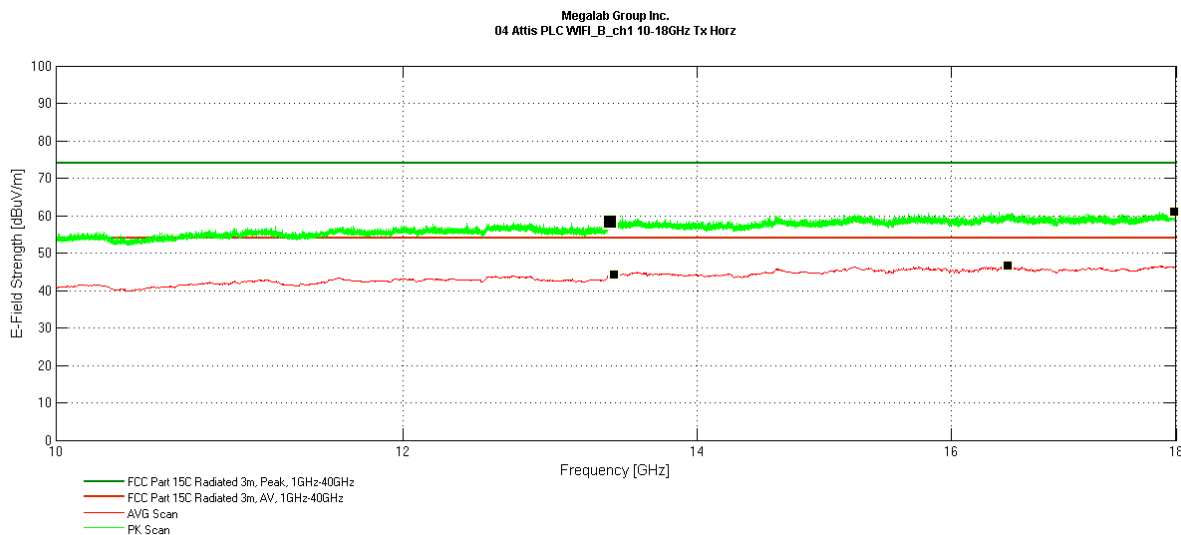

Remark: - **Peak** and **Average** Emission Plot
- A Notch filter was used to filter out the fundamental

Range:	18GHz to 25GHz	Tx Frequency	2412 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Horizontal

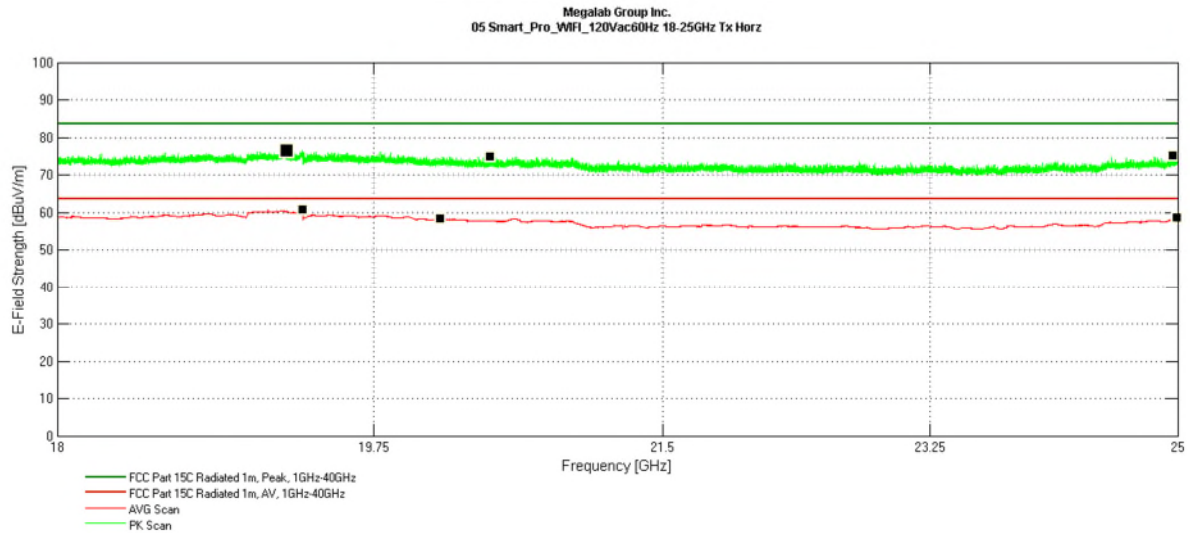

Remark: - **Peak** and **Average** Emission Plot

Horizontal Antenna Polarization							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
781.45	QP	36.8	1.9	38.7	46.0	7.3	Pass
845.20	QP	35.1	2.5	37.5	8.5	8.5	Pass
344.25	QP	34.3	-6.6	27.7	46.0	18.3	Pass
48.50	QP	35.5	-15.8	19.8	40.0	20.2	Pass

4.1.3.1. 802.11 b (Horizontal Antenna Polarization)

Horizontal Antenna Polarization – Harmonic Emissions							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
Low Channel							
4824	PEAK	48.8	0.9	49.7	74.0	24.3	Pass
4824	AVG	43.3	0.9	44.1	54.0	9.9	Pass
7236	PEAK	44.7	4.4	49.0	74.0	25.0	Pass
7236	AVG	33.2	4.4	37.6	54.0	16.4	Pass
Mid Channel							
4874	PEAK	49.2	1.1	50.2	74.0	23.8	Pass
4874	AVG	42.5	1.1	43.5	54.0	10.5	Pass
7311	PEAK	45.5	4.4	49.9	74.0	24.1	Pass
7311	AVG	33.6	4.4	38.0	54.0	16.0	Pass
High Channel							
4924	PEAK	47.1	1.2	48.4	74.0	25.6	Pass
4924	AVG	38.3	1.2	39.6	54.0	14.4	Pass
7386	PEAK	44.6	4.2	48.8	74.0	25.2	Pass
7386	AVG	33.6	4.2	37.7	54.0	16.3	Pass


4.1.3.2. 802.11 g (Horizontal Antenna Polarization)

Horizontal Antenna Polarization – Harmonic Emissions							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
Low Channel							
4824	PEAK	46.9	0.9	47.8	74.0	26.2	Pass
4824	AVG	34.3	0.9	35.2	54.0	18.8	Pass
7236	PEAK	44.5	4.4	48.9	74.0	25.1	Pass
7236	AVG	33.0	4.4	37.4	54.0	16.6	Pass
Mid Channel							
4874	PEAK	46.8	1.1	47.9	74.0	26.1	Pass
4874	AVG	34.9	1.1	36.0	54.0	18.0	Pass
7311	PEAK	44.7	4.4	49.1	74.0	24.9	Pass
7311	AVG	33.5	4.4	37.9	54.0	16.1	Pass
High Channel							
4924	PEAK	46.8	1.2	48.0	74.0	26.0	Pass
4924	AVG	34.9	1.2	36.1	54.0	17.9	Pass
7386	PEAK	44.7	4.2	48.8	74.0	25.2	Pass
7386	AVG	33.4	4.2	37.5	54.0	16.5	Pass

4.1.3.3. 802.11 n (Horizontal Antenna Polarization)


Horizontal Antenna Polarization – Harmonic Emissions							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
Low Channel							
4824	PEAK	46.9	0.9	47.8	74.0	26.2	Pass
4824	AVG	34.3	0.9	35.2	54.0	18.8	Pass
7236	PEAK	44.5	4.4	48.9	74.0	25.1	Pass
7236	AVG	33.0	4.4	37.4	54.0	16.6	Pass
Mid Channel							
4874	PEAK	46.9	1.1	48.0	74.0	26.0	Pass
4874	AVG	34.3	1.1	35.4	54.0	18.6	Pass
7311	PEAK	44.6	4.4	49.0	74.0	25.0	Pass
7311	AVG	33.1	4.4	37.5	54.0	16.5	Pass
High Channel							
4924	PEAK	46.8	1.2	48.0	74.0	26.0	Pass
4924	AVG	34.9	1.2	36.1	54.0	17.9	Pass
7386	PEAK	44.7	4.2	48.8	74.0	25.2	Pass
7386	AVG	33.4	4.2	37.5	54.0	16.5	Pass

Range:	30MHz to 1GHz	Tx Frequency	2412 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Vertical

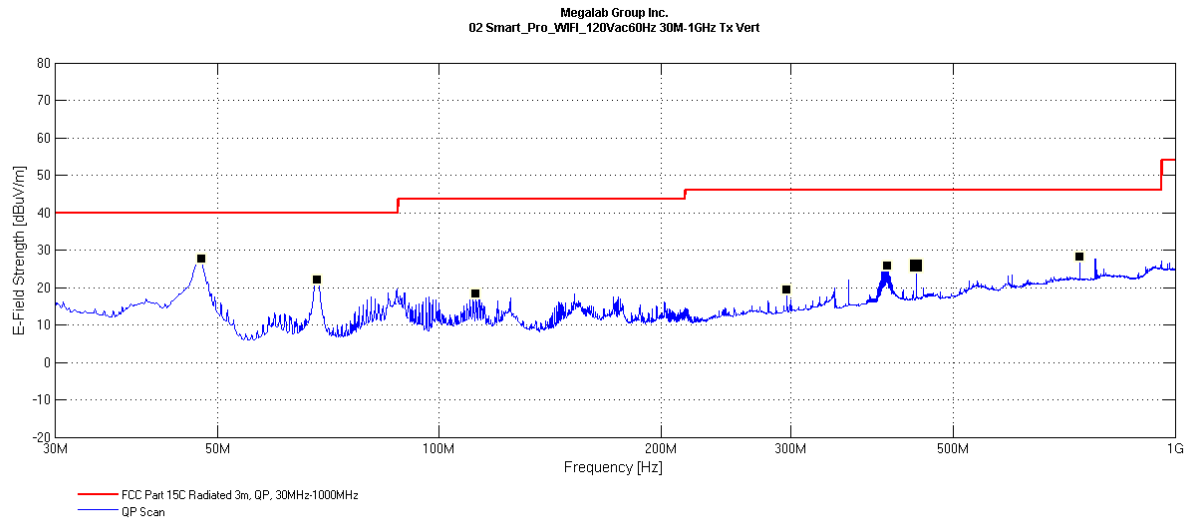


Remark: - Quasi-Peak Emission Plot
- A Notch filter was used to filter out the fundamental

Range:	1GHz to 10GHz	Tx Frequency	2412 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Vertical

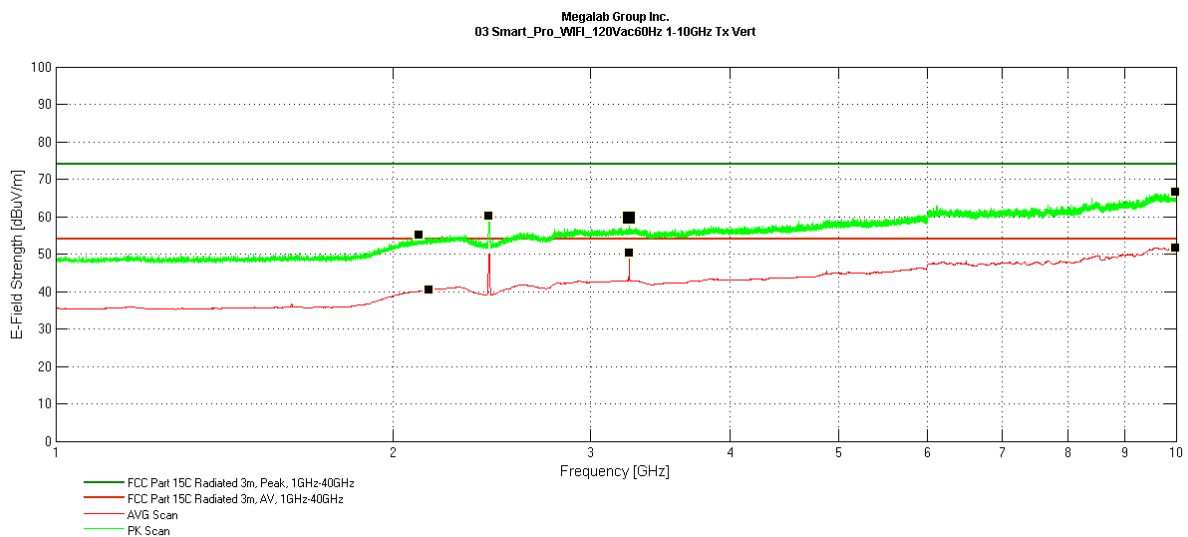


Remark: - **Peak** and **Average** Emission Plot
- A Notch filter was used to filter out the fundamental

Range:	10GHz to 18GHz	Tx Frequency	2412 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Vertical

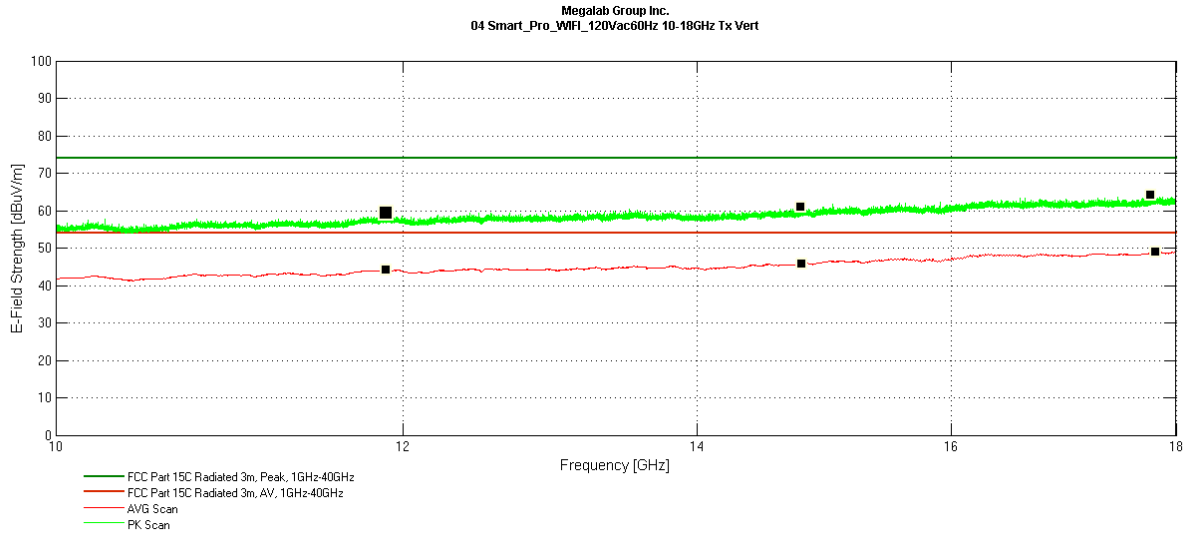

Remark: - **Peak** and **Average** Emission Plot
- A Notch filter was used to filter out the fundamental

Range:	18GHz to 25GHz	Tx Frequency	2412 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Vertical

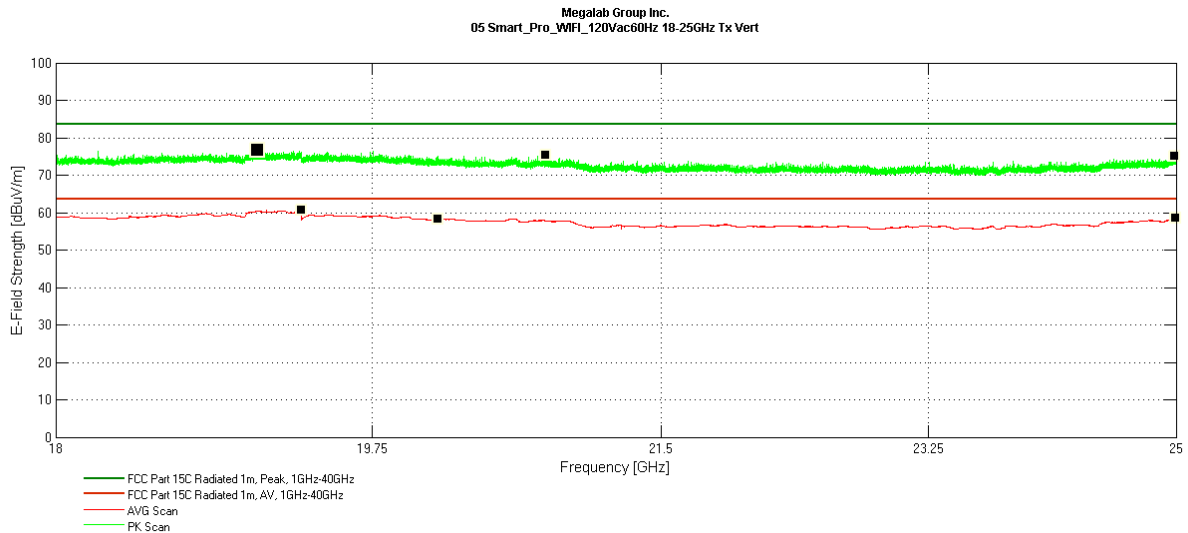

Remark: **Peak** and **Average** Emission Plot

Vertical Antenna Polarization							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
47.50	QP	43.0	-15.4	27.5	40.0	12.5	Pass
741.60	QP	26.7	1.5	28.2	46.0	17.8	Pass
68.35	QP	37.5	-15.4	22.1	40.0	17.9	Pass
406.10	QP	29.5	-3.7	25.8	46.0	20.3	Pass

4.1.3.4. 802.11 b (Vertical Antenna Polarization)

Vertical Antenna Polarization – Harmonic Emissions							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
Low Channel							
4824	PEAK	49.5	0.9	50.4	74.0	23.6	Pass
4824	AVG	42.7	0.9	43.6	54.0	10.4	Pass
7236	PEAK	46.5	4.4	50.8	74.0	23.2	Pass
7236	AVG	35.5	4.4	39.9	54.0	14.1	Pass
Mid Channel							
4874	PEAK	49.3	1.1	50.4	74.0	23.6	Pass
4874	AVG	42.8	1.1	43.9	54.0	10.1	Pass
7311	PEAK	46.5	4.4	50.9	74.0	23.1	Pass
7311	AVG	35.3	4.4	39.7	54.0	14.3	Pass
High Channel							
4924	PEAK	48.5	1.2	49.7	74.0	24.3	Pass
4924	AVG	40.3	1.2	41.5	54.0	12.5	Pass
7386	PEAK	47.2	4.2	51.4	74.0	22.6	Pass
7386	AVG	36.5	4.2	40.7	54.0	13.3	Pass

4.1.3.5. 802.11 g (Vertical Antenna Polarization)

Vertical Antenna Polarization – Harmonic Emissions							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
Low Channel							
4824	PEAK	46.3	0.9	47.2	74.0	26.8	Pass
4824	AVG	35.0	0.9	35.9	54.0	18.1	Pass
7236	PEAK	44.7	4.4	49.0	74.0	25.0	Pass
7236	AVG	33.2	4.4	37.6	54.0	16.4	Pass
Mid Channel							
4874	PEAK	46.8	1.1	47.9	74.0	26.1	Pass
4874	AVG	35.3	1.1	36.4	54.0	17.6	Pass
7311	PEAK	44.5	4.4	48.9	74.0	25.1	Pass
7311	AVG	33.5	4.4	37.8	54.0	16.2	Pass
High Channel							
4924	PEAK	46.8	1.2	48.1	74.0	25.9	Pass
4924	AVG	35.3	1.2	36.5	54.0	17.5	Pass
7386	PEAK	44.5	4.2	48.7	74.0	25.3	Pass
7386	AVG	33.5	4.2	37.6	54.0	16.4	Pass

4.1.3.6. 802.11 n (Vertical Antenna Polarization)

Vertical Antenna Polarization – Harmonic Emissions							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
Low Channel							
4824	PEAK	46.8	0.9	47.7	74.0	26.3	Pass
4824	AVG	34.9	0.9	35.8	54.0	18.2	Pass
7236	PEAK	45.0	4.4	49.4	74.0	24.6	Pass
7236	AVG	33.3	4.4	37.7	54.0	16.3	Pass
Mid Channel							
4874	PEAK	46.4	1.1	47.5	74.0	26.5	Pass
4874	AVG	35.1	1.1	36.2	54.0	17.8	Pass
7311	PEAK	44.8	4.4	49.2	74.0	24.8	Pass
7311	AVG	33.3	4.4	37.7	54.0	16.3	Pass
High Channel							
4924	PEAK	46.8	1.2	48.1	74.0	25.9	Pass
4924	AVG	35.3	1.2	36.5	54.0	17.5	Pass
7386	PEAK	44.5	4.2	48.7	74.0	25.3	Pass
7386	AVG	33.5	4.2	37.6	54.0	16.4	Pass

4.1.4 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_58	EMI Receiver	Rohde & Schwarz	ESW 44	Mar 1, 2024	Mar 1, 2026
EQ_EMC_132	EMI Test Receiver (v6.91.2)	Gauss Instruments	TDEMI X40	Nov 29, 2023	Nov 29, 2025
EQ_EMC_48	Loop Antenna	Com-Power	AL-130R	Apr 9, 2024	Apr 9, 2026
EQ_EMC_59	BiLog Antenna	ETS Lindgren	3142E	Apr 19, 2024	Apr 19, 2026
EQ_EMC_60	Horn Antenna	ETS Lindgren	3117	Apr 9, 2024	Apr 9, 2026
EQ_EMC_56	DRG Horn Antenna 18GHz-40GHz	A.H Systems	SAS-574	Apr 8, 2024	Apr 8, 2026
EQ_EMC_68	6dB Attenuator	Fairview Microwave	SA3NS-06	Apr 19, 2024	Apr 19, 2026
EQ_EMC_85	RF Cable <1GHz	Times Microwave	LMR-400	NCR	NCR
EQ_EMC_75	RF Cable >1GHz	MegaPhase	EMC2	NCR	NCR
EQ_EMC_123	Preamplifier 30MHz-9GHz	RF Bay	EPA-250T	Jan 23, 2024	Jan 23, 2026
EQ_EMC_42	Preamplifier 1GHz-18GHz	Com-Power	PAM-118A	Jan 17, 2024	Jan 17, 2026
EQ_EMC_43	Preamplifier 18GHz-40GHz	Com-Power	PAM-840A	Jan 31, 2024	Jan 31, 2026
EQ_EMC_108	2400 - 2500MHz Notch Filter	Micro-Tronics	BRM50702	NCR	NCR
EQ_EMC_149	Emission Software RE/CE	Gauss Instruments	EMI64k v6.31.2	NCR	NCR

4.2 Lower and Upper Band Edges

Test Date:	January 18/30, 2024
Temperature (°C)	20.7/ 20.4
Relative Humidity (%)	9.1 / 20.9
Barometric Pressure (kPa)	97.5 / 98.1

Initials: MX

4.2.1 Limits

Any radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the general radiated emission limits specified in FCC 15.209(a).

4.2.2 Test Procedure

Tested according to ANSI C63.10 Section 11.12

The device under test was setup inside a semi-anechoic chamber with remotely controlled turntable and antenna positioner at a 3m test distance. The DUT was placed on top of a 0.8m high non-conductive table above the reference ground plane for frequencies below 1GHz and 1.5m high for frequencies above 1GHz.

For both the lower and upper radiated band edges, the radiated emission was first maximized on the center frequency of the low and high channels with the turntable azimuth rotated 0° to 360° and antenna height varied from 1m to 4m. Once maximized, the start and stop frequency were adjusted to capture that channel's lower and upper band edges inside the restricted bands.

The antenna was positioned to receive emissions in the vertical and horizontal polarizations such that the maximum radiated emission levels were detected.


The radiated band edge measurements were made with the DUT in normal operation position.

4.2.3 Test Results – 802.11 b


The DUT met the band edge requirements. Peak output power density for low, mid and high channels were measured and the Plots Section below contains the maximum radiated emission levels captured on the spectrum analyzer at the band edges. The Final Measurements Section contains the final results with the correction factors added in.

4.2.3.1. Plots


Tx Frequency	Low Channel	Antenna Polarization	Horizontal	Emission	Peak
--------------	-------------	----------------------	------------	----------	------

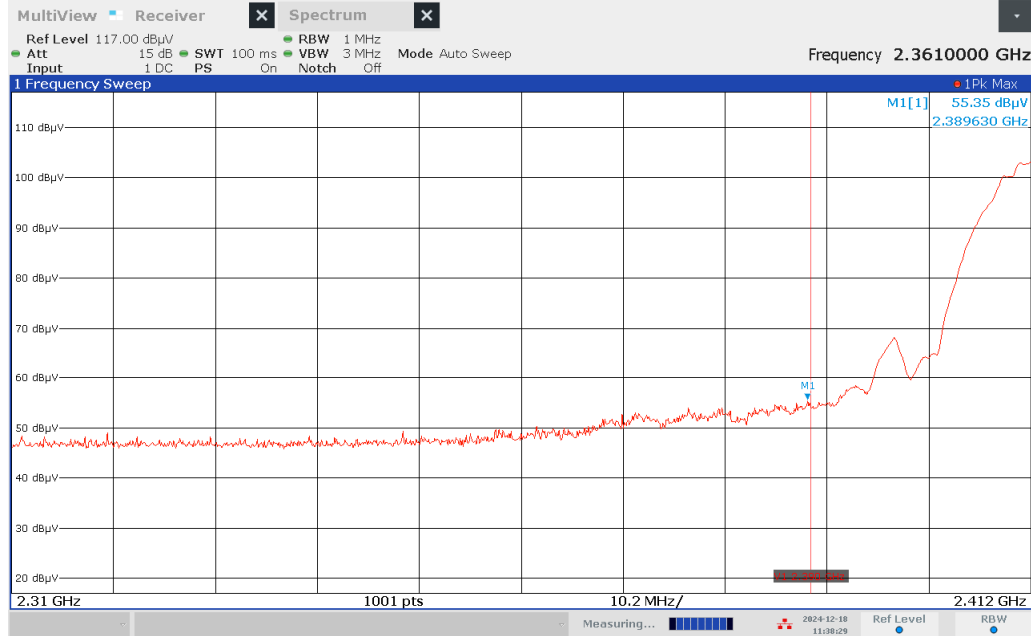

Tx Frequency	Low Channel	Antenna Polarization	Horizontal	Emission	Average
--------------	-------------	----------------------	------------	----------	---------

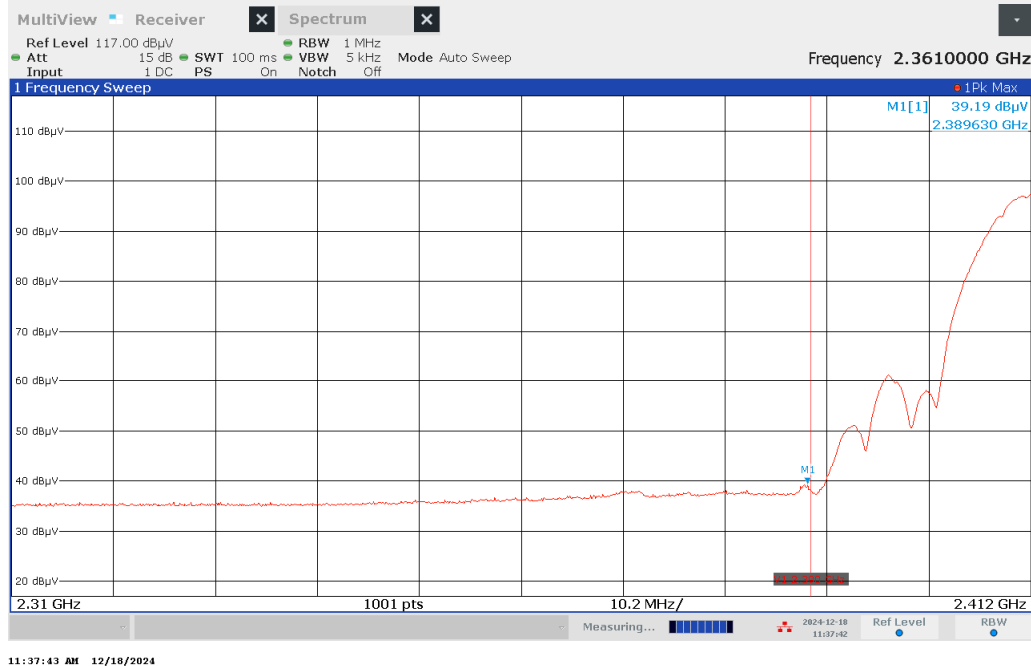


Tx Frequency	Low Channel	Antenna Polarization	Vertical	Emission	Peak
--------------	-------------	----------------------	----------	----------	------

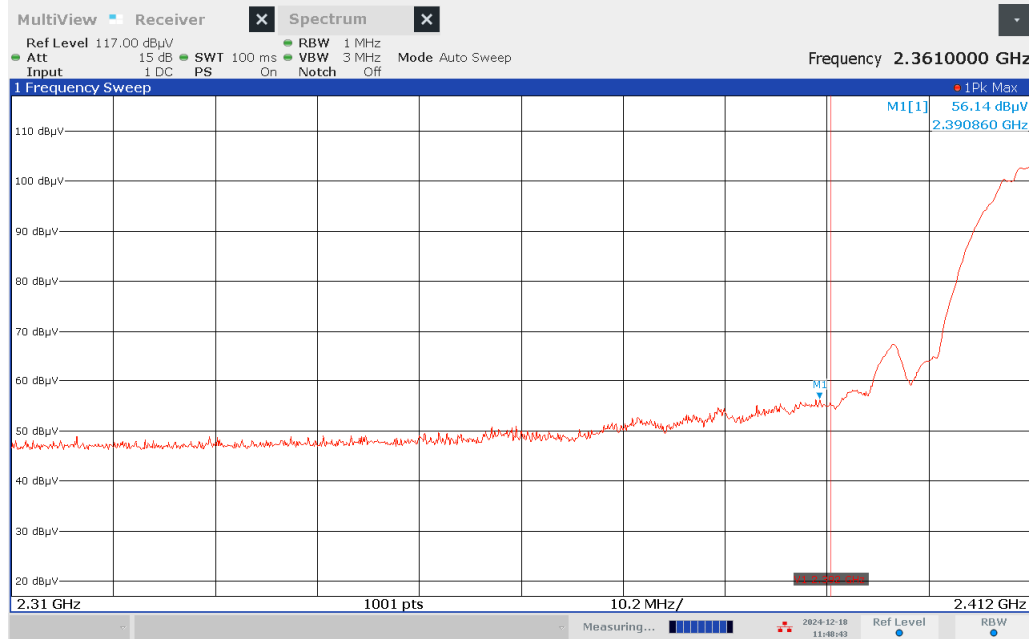


11:48:43 AM 12/18/2024

Tx Frequency	Low Channel	Antenna Polarization	Vertical	Emission	Average
--------------	-------------	----------------------	----------	----------	---------

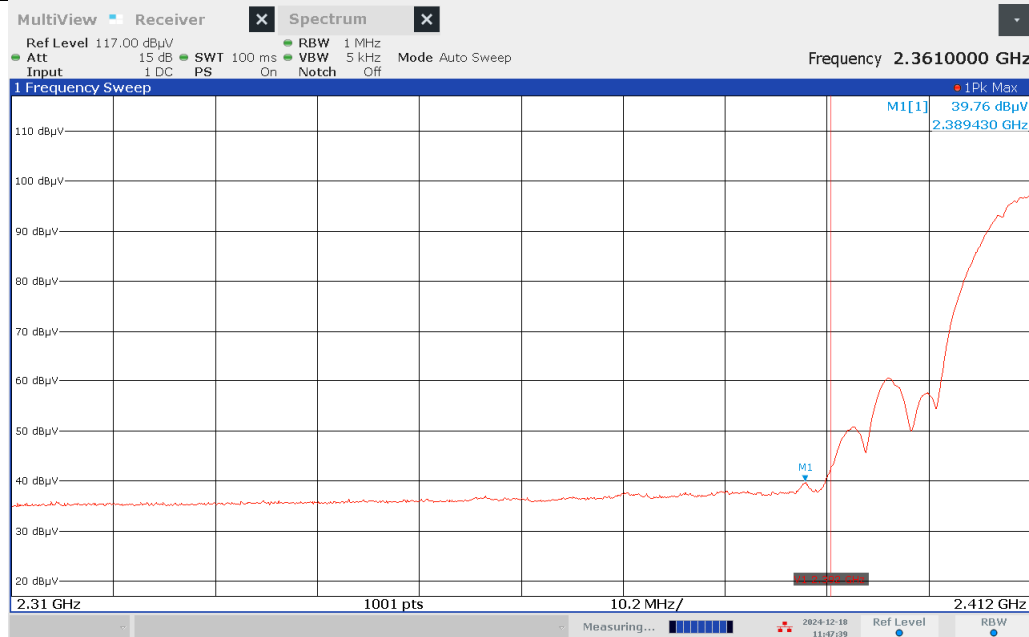

11:47:39 AM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Horizontal	Emission	Peak
--------------	--------------	----------------------	------------	----------	------

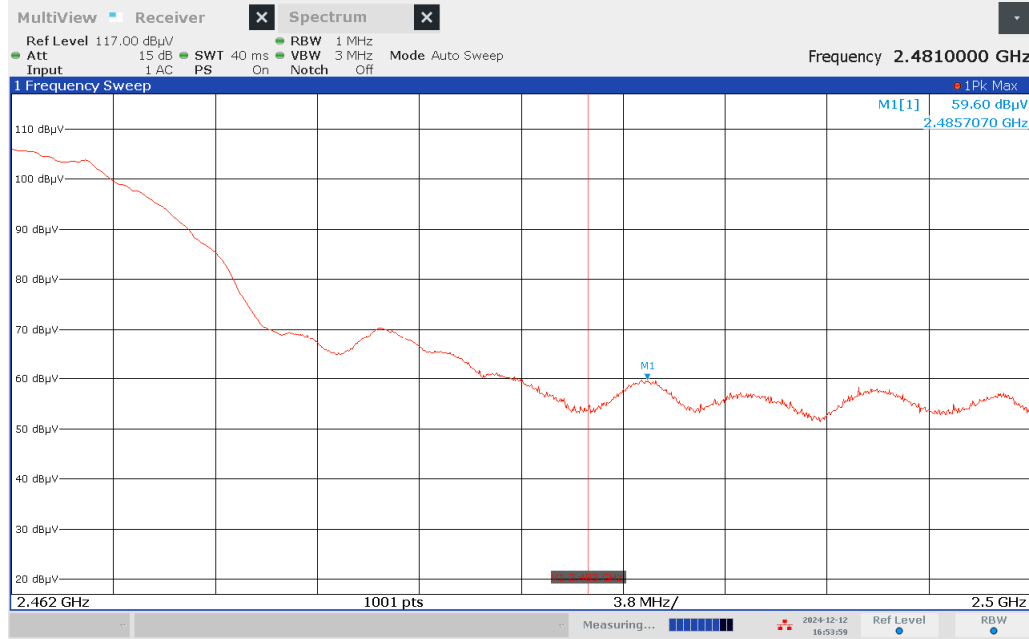


04:54:00 PM 12/12/2024

Tx Frequency	High Channel	Antenna Polarization	Horizontal	Emission	Average
--------------	--------------	----------------------	------------	----------	---------




04:52:42 PM 12/12/2024

Tx Frequency	High Channel	Antenna Polarization	Vertical	Emission	Peak
--------------	--------------	----------------------	----------	----------	------

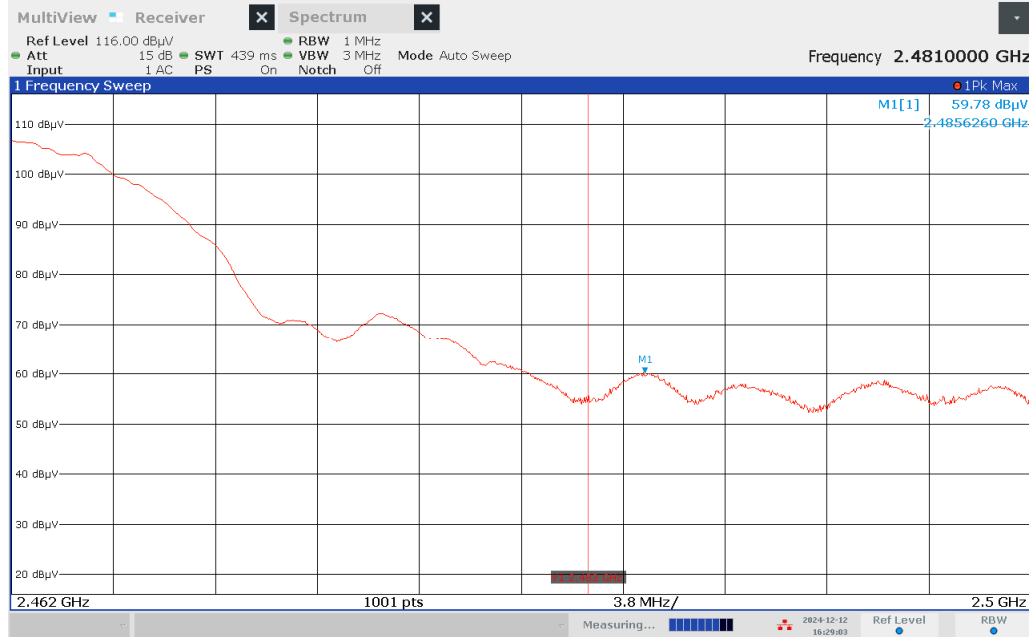

04:29:03 PM 12/12/2024

Tx Frequency	High Channel	Antenna Polarization	Vertical	Emission	Average
--------------	--------------	----------------------	----------	----------	---------

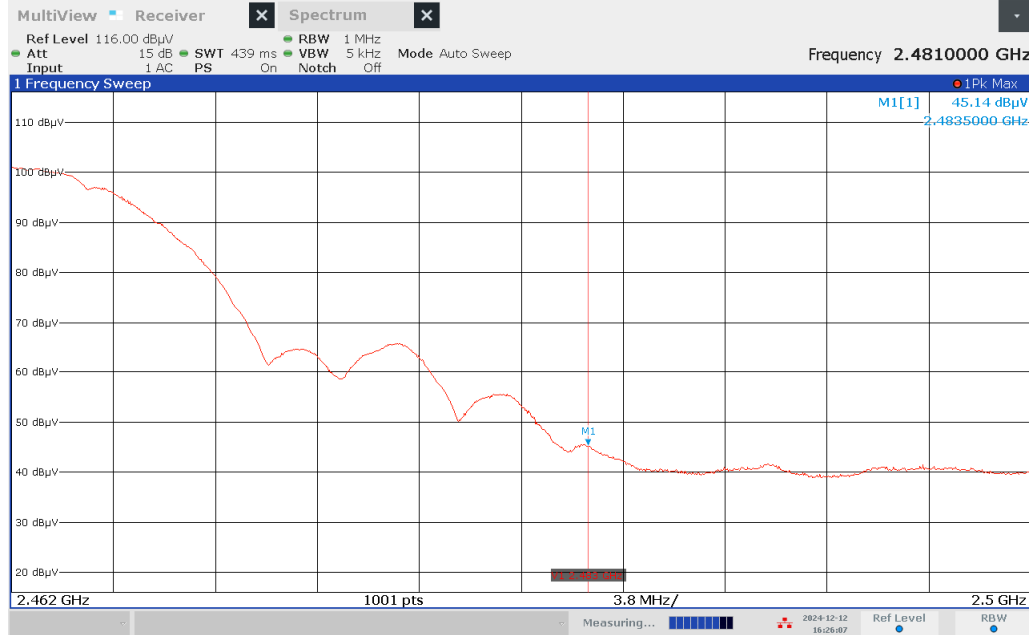

04:26:07 PM 12/12/2024


4.2.3.2. Final Measurements

Frequency (MHz)	Detector	Antenna Polarity	Reading (dBμV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
Low Channel											
B-Mode											
2412	PEAK	Horz	103.1	32.5	6.8	10.0	-41.6	110.8			Pass
2412	AVG	Horz	97.2	32.5	6.8	10.0	-41.6	104.8			Pass
2412	PEAK	Vert	103.0	32.5	6.8	10.0	-41.6	110.7			Pass
2412	AVG	Vert	97.4	32.5	6.8	10.0	-41.6	105.0			Pass
2387.79	PEAK	Horz	55.4	32.4	6.8	10.0	-41.6	63.0	74.0	11.0	Pass
2390	AVG	Horz	39.2	32.4	6.8	10.0	-41.6	46.9	54.0	7.1	Pass
2387.6	PEAK	Vert	55.1	32.4	6.8	10.0	-41.6	62.8	74.0	11.2	Pass
2371.4	AVG	Vert	29.8	32.4	6.8	10.0	-41.6	37.4	54.0	16.6	Pass
High Channel											
B-Mode											
2462	PEAK	Horz	105.9	32.5	6.9	10.0	-41.7	113.7			Pass
2462	AVG	Horz	100.0	32.5	6.9	10.0	-41.7	107.8			Pass
2462	PEAK	Vert	106.7	32.5	6.9	10.0	-41.7	114.5			Pass
2462	AVG	Vert	101.1	32.5	6.9	10.0	-41.7	108.8			Pass
2483.6	PEAK	Horz	59.6	32.6	6.9	10.0	-41.7	67.3	74.0	6.7	Pass
2483.5	AVG	Horz	43.8	32.6	6.9	10.0	-41.7	51.5	54.0	2.5	Pass
2483.6	PEAK	Vert	59.8	32.6	6.9	10.0	-41.7	67.5	74.0	6.5	Pass
2483.5	AVG	Vert	45.1	32.6	6.9	10.0	-41.7	52.9	54.0	1.1	Pass


4.2.4 Test Results – 802.11 g

The DUT met the band edge requirements. Peak output power density for low, mid and high channels were measured and the Plots Section below contains the maximum radiated emission levels captured on the spectrum analyzer at the band edges. The Final Measurements Section contains the final results with the correction factors added in.

4.2.4.1. Plots

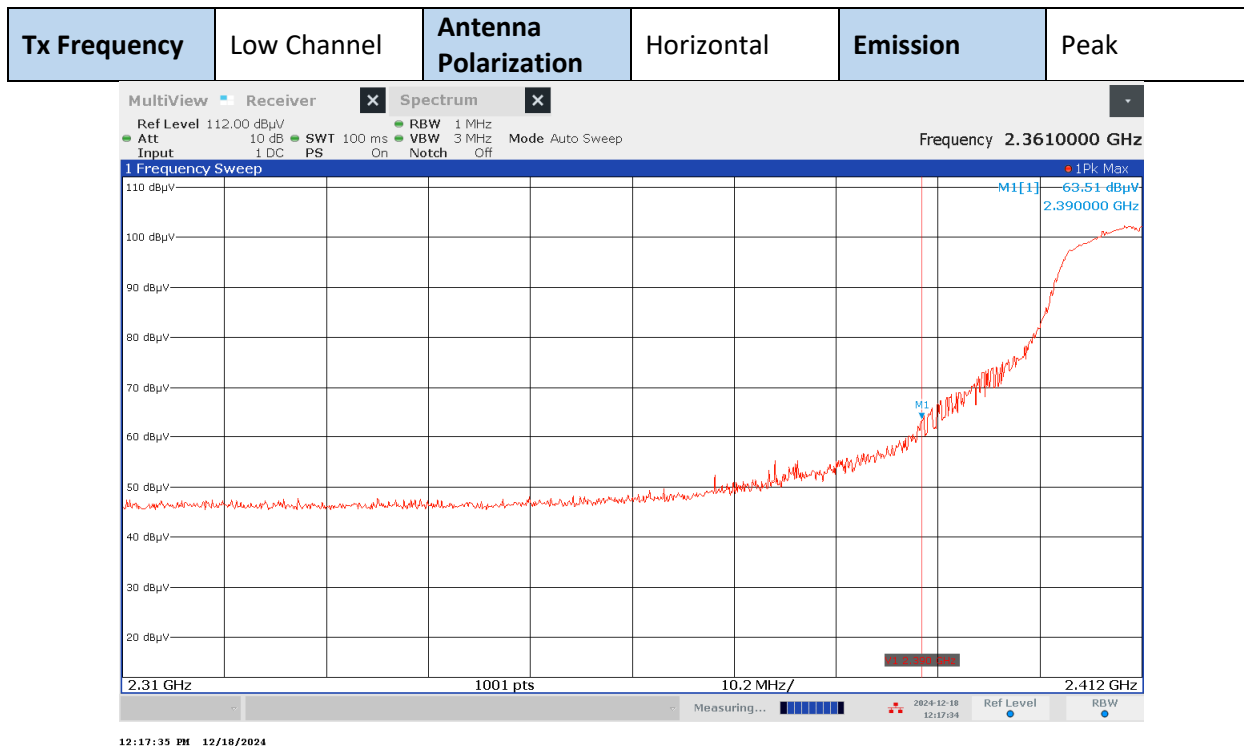


Tx Frequency	Low Channel	Antenna Polarization	Horizontal	Emission	Average
--------------	-------------	----------------------	------------	----------	---------

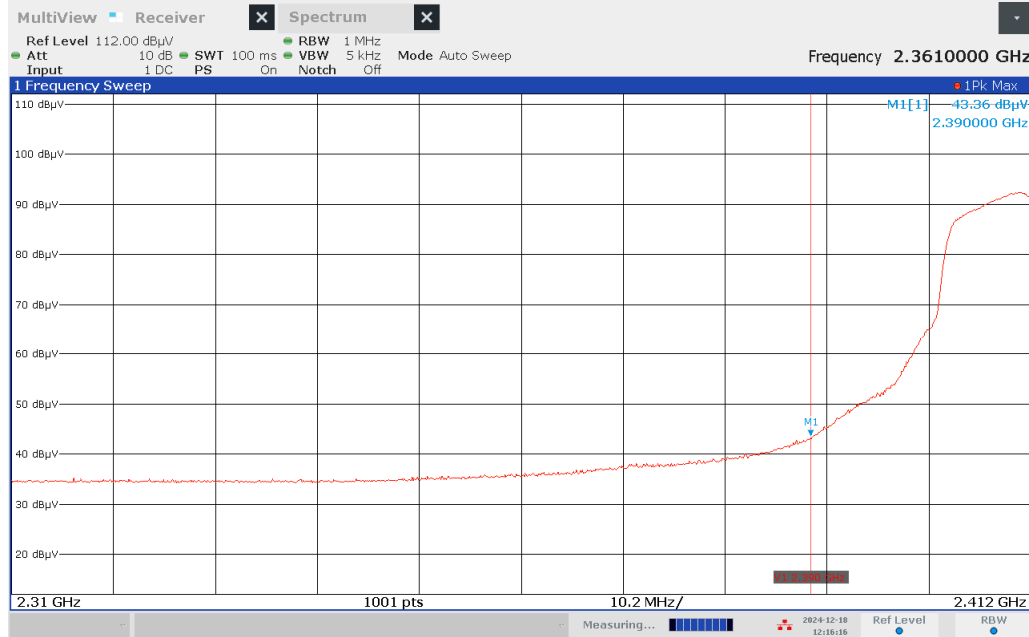


12:16:17 PM 12/18/2024

Tx Frequency	Low Channel	Antenna Polarization	Vertical	Emission	Peak
--------------	-------------	----------------------	----------	----------	------

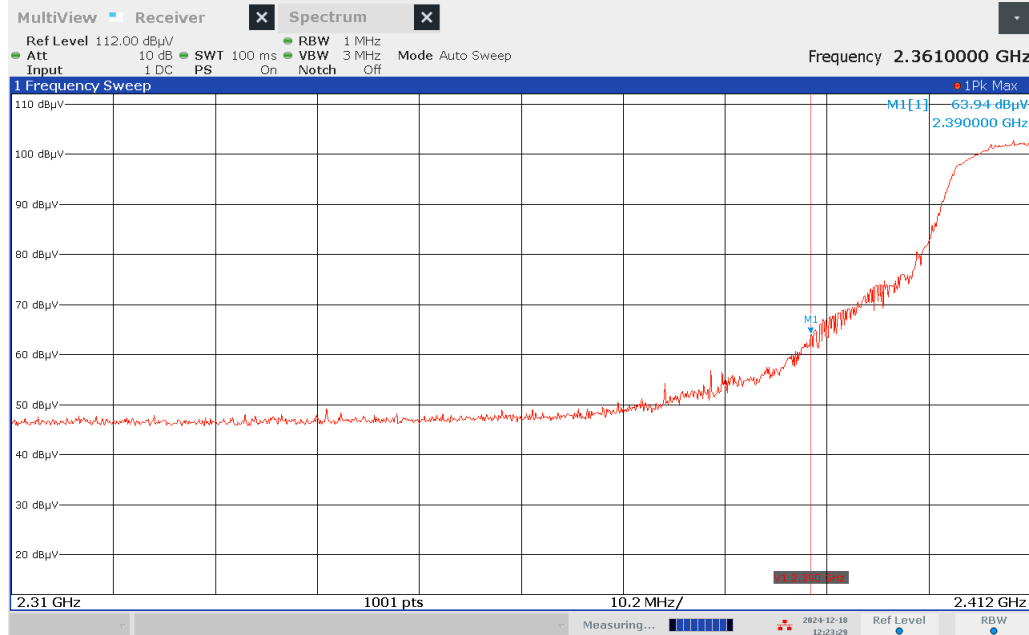

12:23:30 PM 12/18/2024

Tx Frequency	Low Channel	Antenna Polarization	Vertical	Emission	Average
--------------	-------------	----------------------	----------	----------	---------

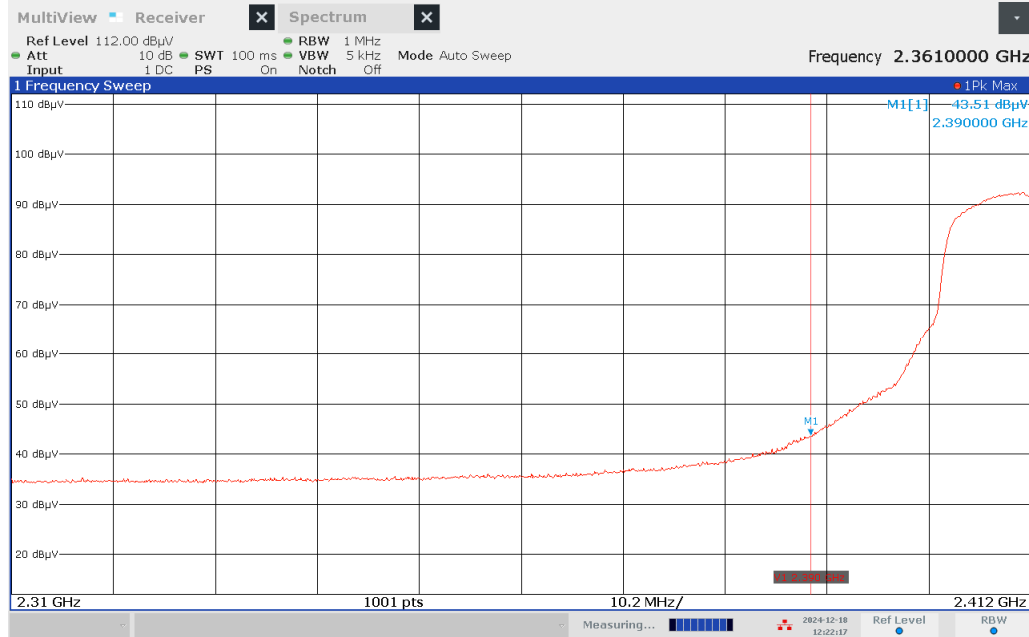


12:22:18 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Horizontal	Emission	Peak
--------------	--------------	----------------------	------------	----------	------



02:43:19 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Horizontal	Emission	Average (Integration Method)
--------------	--------------	----------------------	------------	----------	------------------------------

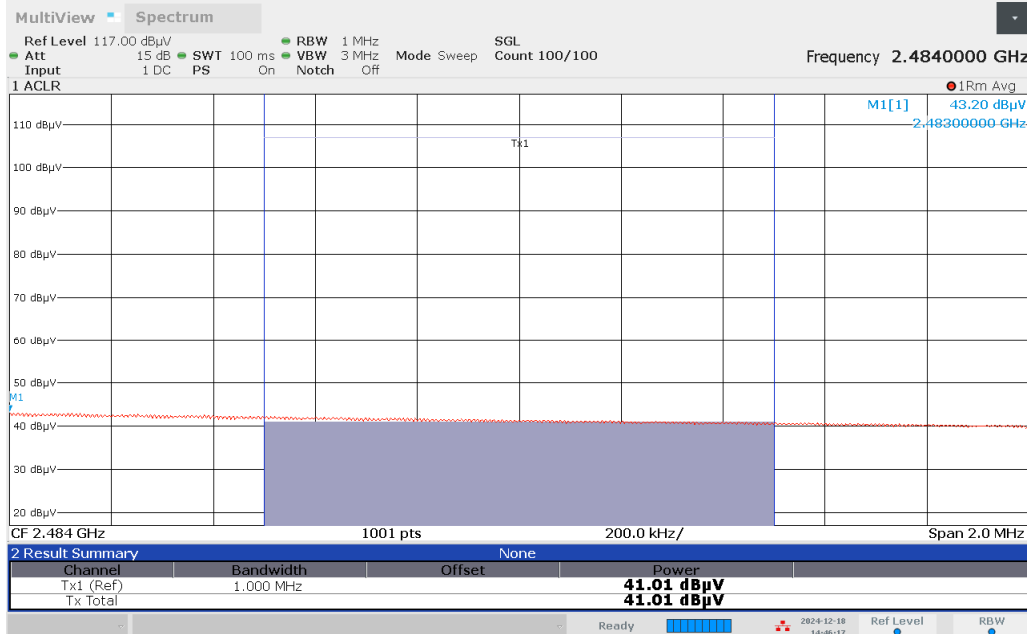

02:46:18 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Horizontal	Emission	Average
--------------	--------------	----------------------	------------	----------	---------



02:44:25 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Vertical	Emission	Peak
--------------	--------------	----------------------	----------	----------	------



03:00:14 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Vertical	Emission	Average (Integration Method)
--------------	--------------	----------------------	----------	----------	------------------------------



03:03:39 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Vertical	Emission	Average
---------------------	---------------------	-----------------------------	-----------------	-----------------	----------------



03:01:45 PM 12/18/2024


4.2.4.2. Final Measurements

Frequency (MHz)	Detector	Antenna Polarity	Reading (dBμV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
Low Channel											
G-Mode											
2412	PEAK	Horz	103.1	32.5	6.8	10.0	-41.6	110.8			Pass
2412	AVG	Horz	92.6	32.5	6.8	10.0	-41.6	100.3			Pass
2412	PEAK	Vert	103.4	32.5	6.8	10.0	-41.6	111.1			Pass
2412	AVG	Vert	92.9	32.5	6.8	10.0	-41.6	100.6			Pass
2390	PEAK	Horz	63.5	32.4	6.8	10.0	-41.6	71.2	74.0	2.8	Pass
2390	AVG	Horz	43.4	32.4	6.8	10.0	-41.6	51.0	54.0	3.0	Pass
2390	PEAK	Vert	63.9	32.4	6.8	10.0	-41.6	71.6	74.0	2.4	Pass
2390	AVG	Vert	43.5	32.4	6.8	10.0	-41.6	51.2	54.0	2.8	Pass
High Channel											
G-Mode											
2462	PEAK	Horz	102.7	32.5	6.9	10.0	-41.7	110.4			Pass
2462	AVG	Horz	92.2	32.5	6.9	10.0	-41.7	99.9			Pass
2462	PEAK	Vert	102.9	32.5	6.9	10.0	-41.7	110.6			Pass
2462	AVG	Vert	92.0	32.5	6.9	10.0	-41.7	99.8			Pass
2483.5	PEAK	Horz	62.6	32.6	6.9	10.0	-41.7	70.3	74.0	3.7	Pass
2484	AVG	Horz	41.0	32.6	6.9	10.0	-41.7	48.8	54.0	5.2	Pass
2483.5	PEAK	Vert	64.0	32.6	6.9	10.0	-41.7	71.8	74.0	2.2	Pass
2484	AVG	Vert	42.6	32.6	6.9	10.0	-41.7	50.3	54.0	3.7	Pass
2485.5	AVG	Horz	41.5	32.6	6.9	10.0	-41.7	49.2	54.0	4.8	Pass
2485.5	AVG	Vert	43.4	32.6	6.9	10.0	-41.7	51.2	54.0	2.8	Pass


4.2.5 Test Results – 802.11 n

The DUT met the band edge requirements. Peak output power density for low, mid and high channels were measured and the Plots Section below contains the maximum radiated emission levels captured on the spectrum analyzer at the band edges. The Final Measurements Section contains the final results with the correction factors added in.

4.2.5.1. Plots

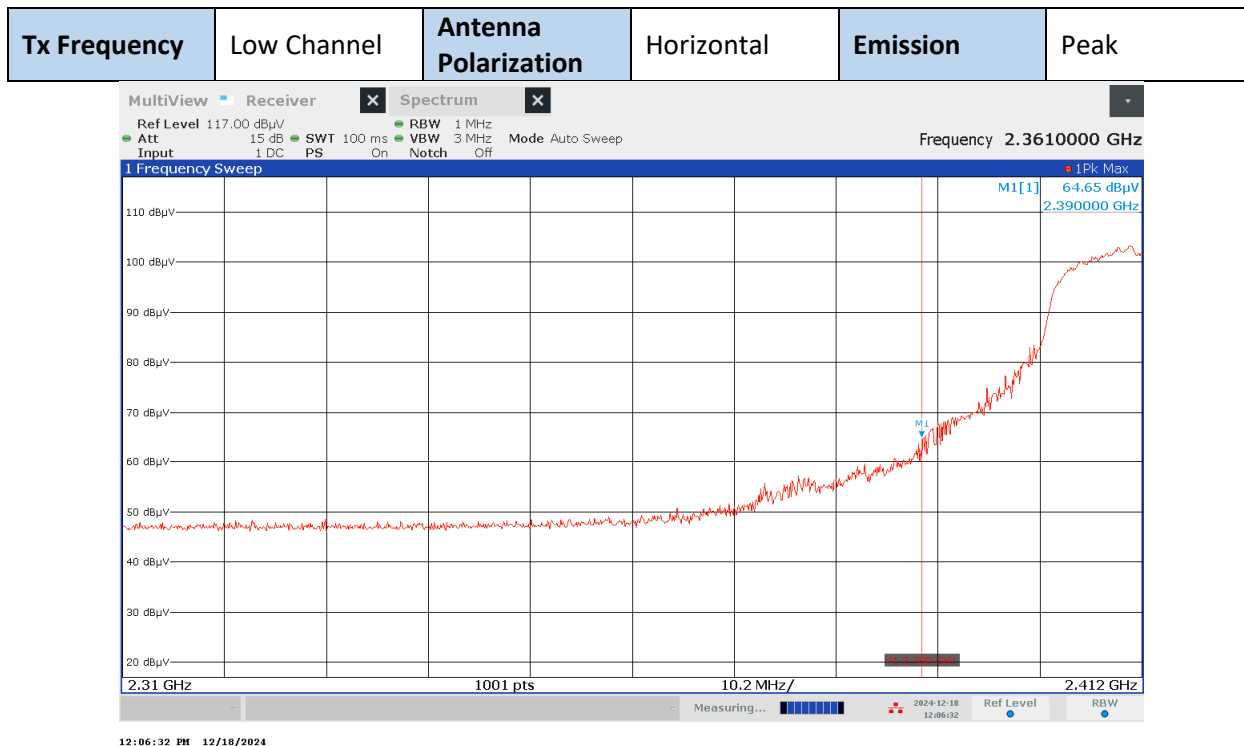


Tx Frequency	Low Channel	Antenna Polarization	Horizontal	Emission	Average
--------------	-------------	----------------------	------------	----------	---------

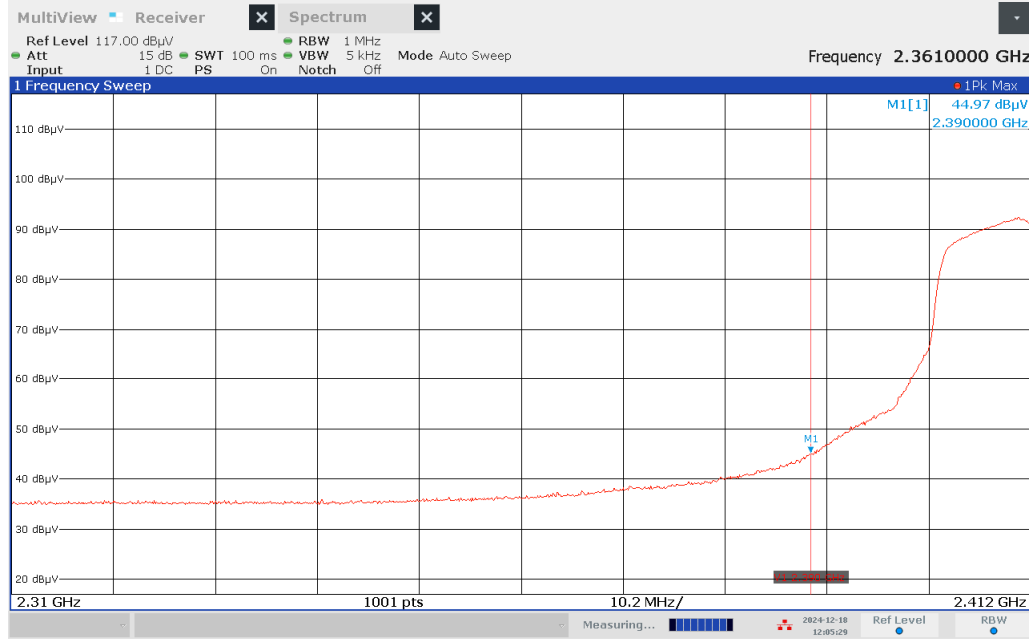


12:05:30 PM 12/18/2024

Tx Frequency	Low Channel	Antenna Polarization	Vertical	Emission	Peak
--------------	-------------	----------------------	----------	----------	------

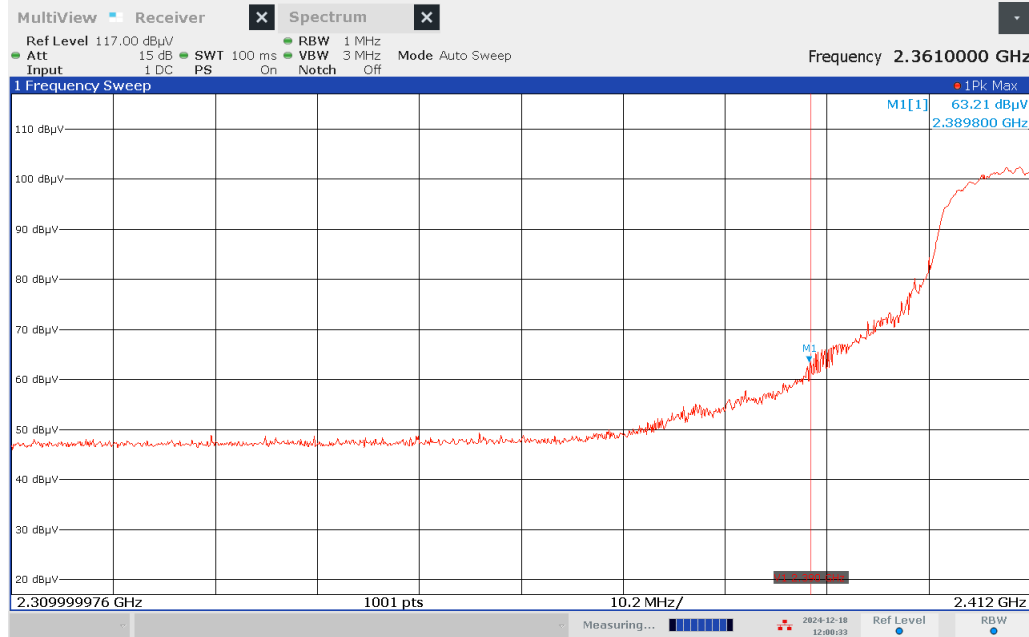


12:00:34 PM 12/18/2024

Tx Frequency	Low Channel	Antenna Polarization	Vertical	Emission	Average
--------------	-------------	----------------------	----------	----------	---------

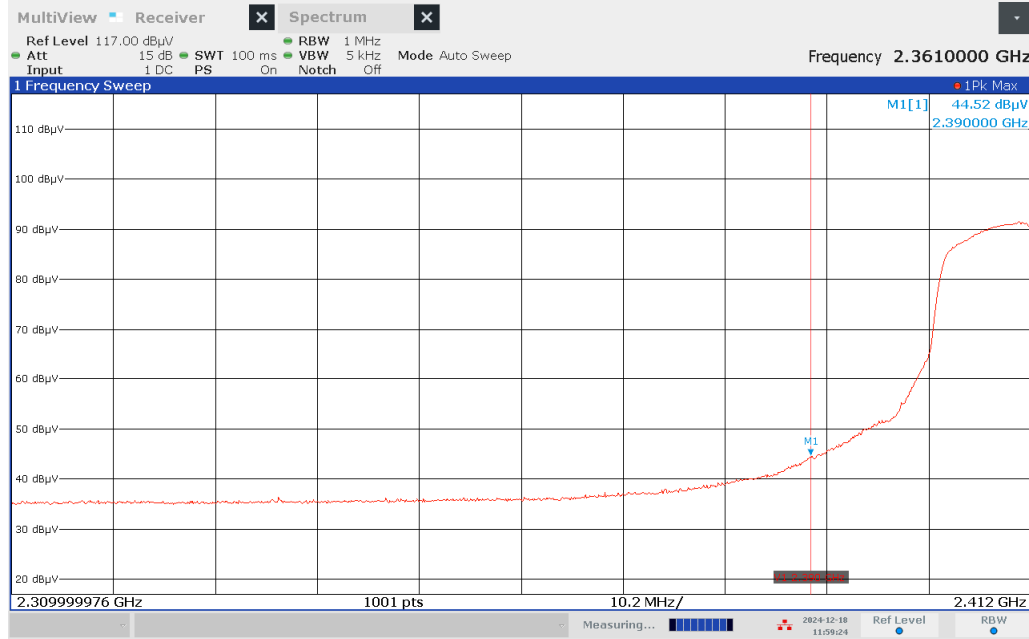


11:59:24 AM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Horizontal	Emission	Peak
--------------	--------------	----------------------	------------	----------	------

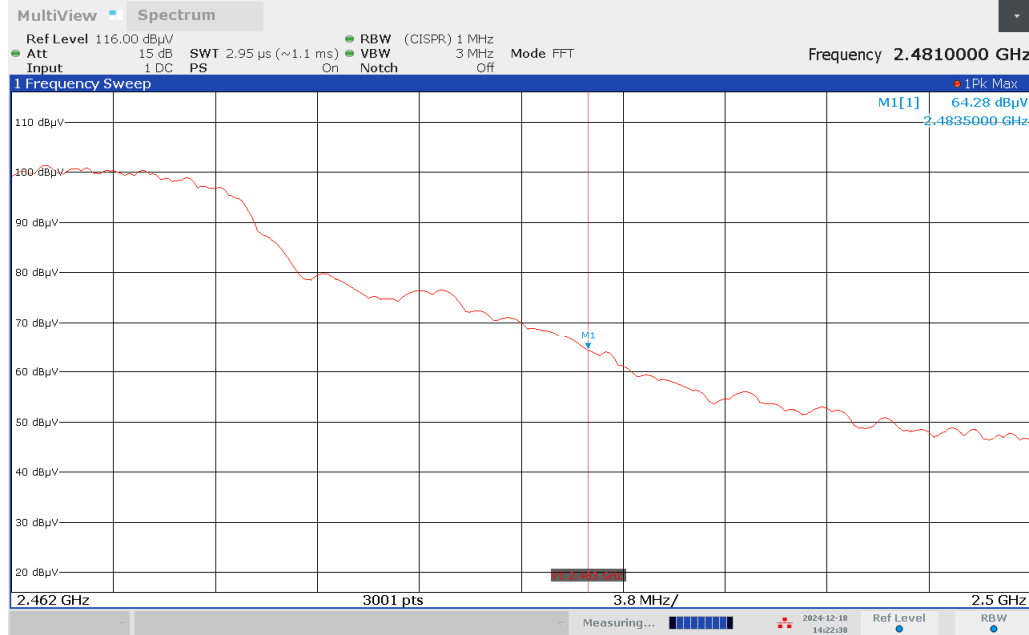

02:22:39 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Horizontal	Emission	Average (Integration Method)
--------------	--------------	----------------------	------------	----------	------------------------------

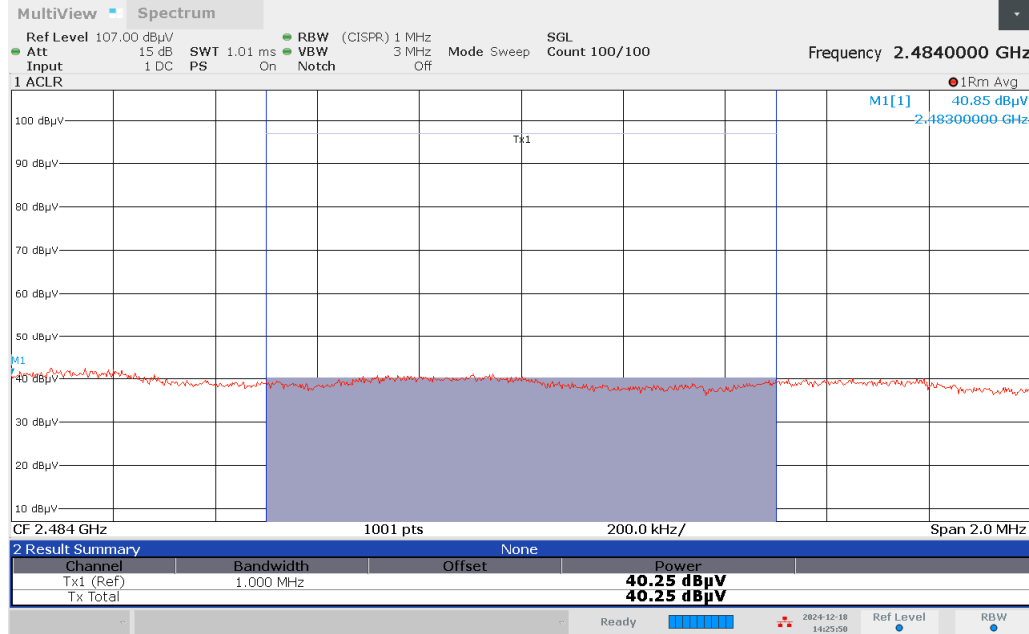


02:25:50 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Horizontal	Emission	Average
--------------	--------------	----------------------	------------	----------	---------




02:18:12 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Vertical	Emission	Peak
--------------	--------------	----------------------	----------	----------	------

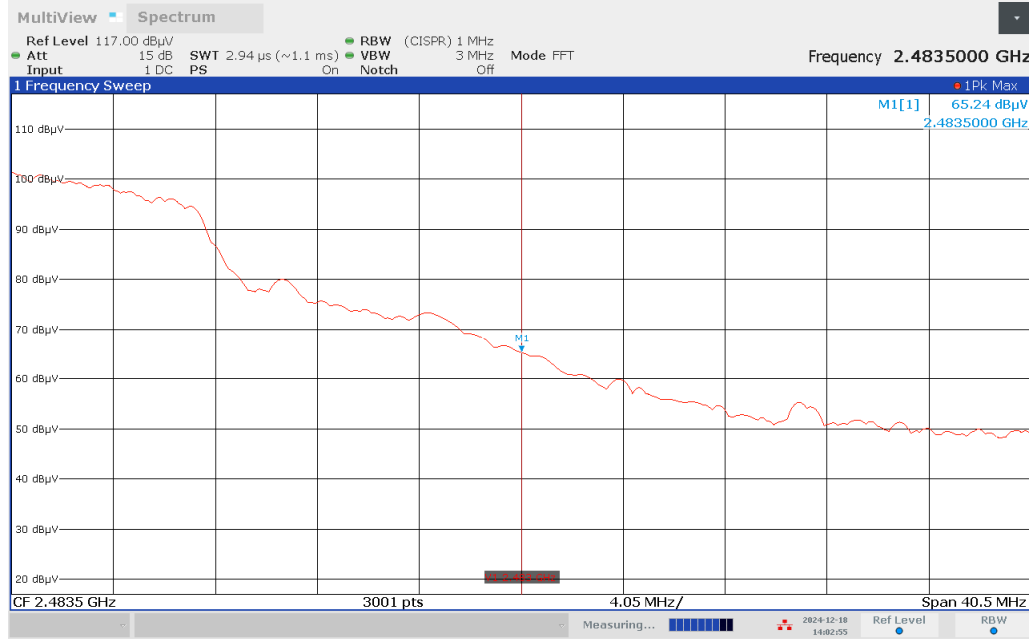


02:02:55 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Vertical	Emission	Average (Integration Method)
--------------	--------------	----------------------	----------	----------	---------------------------------

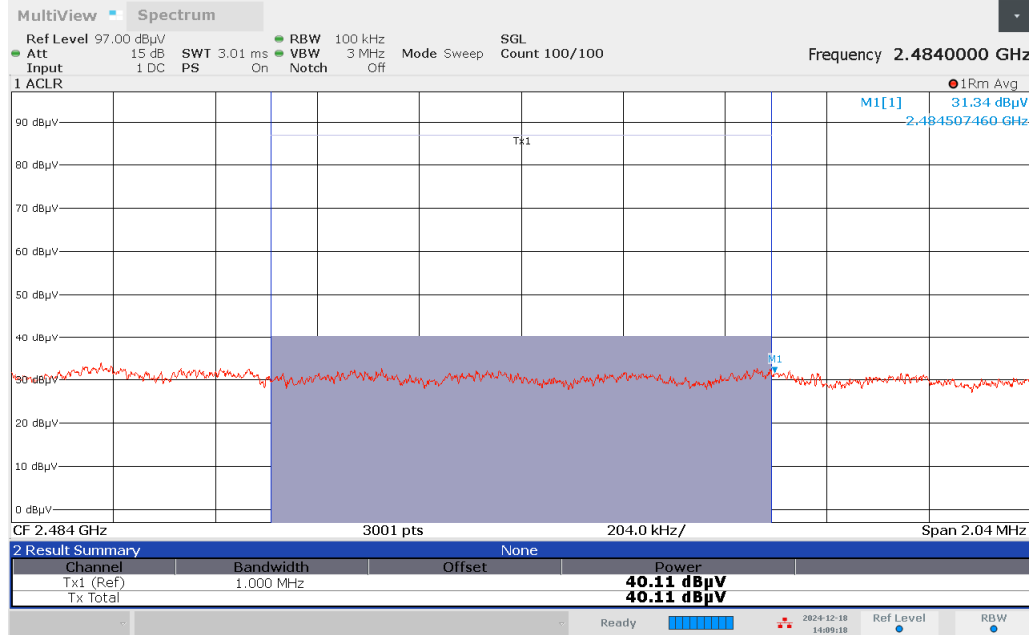

02:09:19 PM 12/18/2024

Tx Frequency	High Channel	Antenna Polarization	Vertical	Emission	Average
---------------------	---------------------	-----------------------------	-----------------	-----------------	----------------

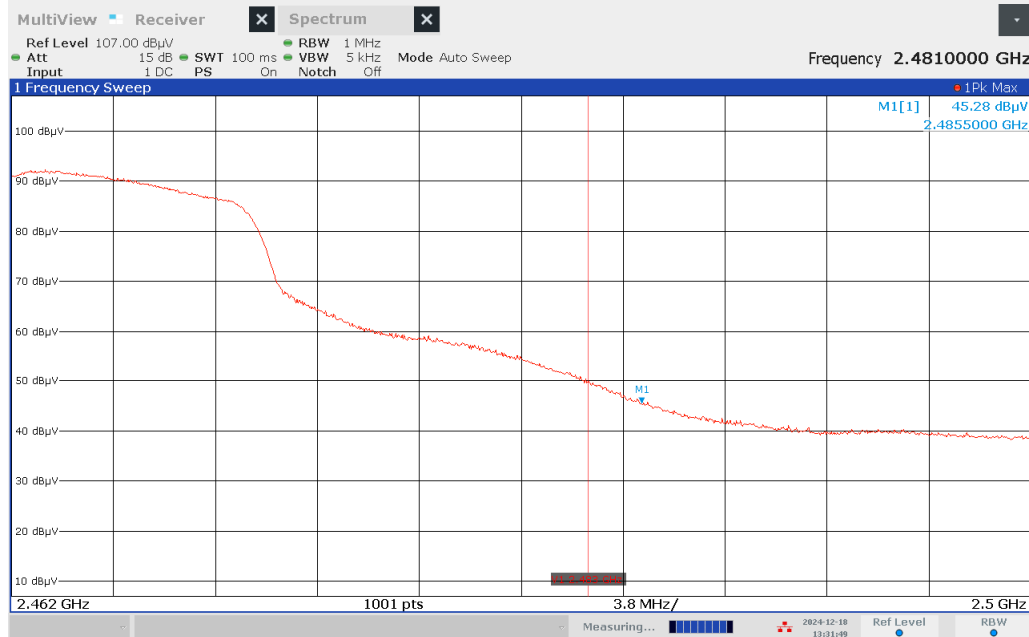

01:31:50 PM 12/18/2024

4.2.5.2. Final Measurements

Frequency (MHz)	Detector	Antenna Polarity	Reading (dBμV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
Low Channel											
N-Mode/20MHz											
2412	PEAK	Horz	103.1	32.5	6.8	10.0	-41.6	110.8			Pass
2412	AVG	Horz	92.4	32.5	6.8	10.0	-41.6	100.0			Pass
2412	PEAK	Vert	102.8	32.5	6.8	10.0	-41.6	110.4			Pass
2412	AVG	Vert	92.0	32.5	6.8	10.0	-41.6	99.7			Pass
2390	PEAK	Horz	64.7	32.4	6.8	10.0	-41.6	72.3	74.0	1.7	Pass
2390	AVG	Horz	45.0	32.4	6.8	10.0	-41.6	52.6	54.0	1.4	Pass
2390	PEAK	Vert	63.2	32.4	6.8	10.0	-41.6	70.9	74.0	3.1	Pass
2390	AVG	Vert	44.5	32.4	6.8	10.0	-41.6	52.2	54.0	1.8	Pass
High Channel											
N-Mode/20MHz BW											
2462	PEAK	Horz	103.0	32.5	6.9	10.0	-41.7	110.8			Pass
2462	AVG	Horz	92.4	32.5	6.9	10.0	-41.7	100.1			Pass
2462	PEAK	Vert	103.6	32.5	6.9	10.0	-41.7	111.3			Pass
2462	AVG	Vert	92.3	32.5	6.9	10.0	-41.7	100.0			Pass
2483.5	PEAK	Horz	64.3	32.6	6.9	10.0	-41.7	72.0	74.0	2.0	Pass
2484	AVG	Horz	40.3	32.6	6.9	10.0	-41.7	48.0	54.0	6.0	Pass
2483.5	PEAK	Vert	65.2	32.6	6.9	10.0	-41.7	73.0	74.0	1.0	Pass
2484	AVG	Vert	40.1	32.6	6.9	10.0	-41.7	47.9	54.0	6.1	Pass
2485.5	AVG	Horz	44.5	32.6	6.9	10.0	-41.7	52.2	54.0	1.8	Pass
2485.5	AVG	Vert	45.3	32.6	6.9	10.0	-41.7	53.0	54.0	1.0	Pass

4.2.6 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_58	EMI Receiver	Rohde & Schwarz	ESW 44	Mar 1, 2024	Mar 1, 2026
EQ_EMC_60	Horn Antenna	ETS Lindgren	3117	Apr 9, 2024	Apr 9, 2026
EQ_EMC_75	RF Cable >1GHz	MegaPhase	EMC2	NCR	NCR
EQ_EMC_115	10 dB Attenuator SMA	Fairview Microwave	SA18E-10	NCR	NCR
EQ_EMC_42	Preamplifier 1GHz-18GHz	Com-Power	PAM-118A	Jan 17, 2024	Jan 17, 2026

4.3 Power Line Conducted Emissions

Test Date: February 7, 2025
Temperature (°C) 20.7
Relative Humidity (%) 10.9
Barometric Pressure (kPa) 98.0

Initials: MX

The conducted emission test is to measure radio-frequency (RF) signals and noise emitted from electrical and electronic devices in the frequency range of 150kHz to 30MHz.

4.3.1 Limits

Base Standard(s): FCC Subpart B 15.207 and RSS-GEN Section 8.8.

Frequency Range (MHz)	Coupling Device	Detector Type / Bandwidth	Limit (dBμV)
0.15 to 0.50	LISN	Quasi-Peak / 9kHz	66 to 56*
0.50 to 5			56
5 to 30			60
0.15 to 0.50	LISN	Average / 9kHz	56 to 46*
0.50 to 5			46
5 to 30			50

* Decreases linearly with the logarithm of the frequency

As per ANSI C63.4 Section 4.2, if the Peak or Quasi-Peak detector measurements do not exceed the Average limits, then the DUT is considered to have passed the requirements.

4.3.2 Test Procedure

Tested according to ANSI C63.10 Section 6.2.

Conducted emissions were measured on the DUT's power port via an Artificial Mains Network (AMN), also known as Line Impedance Stabilization Network (LISN), and maximum conducted emissions are checked on all the DUT's AC lines in the frequency range of 150kHz to 30MHz. All other support equipment were powered via another LISN. The LISNs provide 50Ω/50μH of coupling impedance for the measuring receiver.

To determine the emission characteristics of the DUT, the conducted emission scans were made using a Peak detector and the results were recorded in graphical form.

For each suspected emission, final measurements of the DUT conducted emissions were made with the Quasi-Peak or Average detector as defined in the limits table above.


For Table-Top Equipment, the device under test is configured on a 0.8m high non-conductive table above the reference ground plane and 0.4m away from the vertical reference ground plane.

[illegible]

4.3.4 Test Results

Range:	150kHz to 30MHz	DUT	ECB701/BLE
Test Voltage:	120Vac 60Hz	Phase	Line


Megalab Group Inc.
Copy 01 120Vac60Hz Cont Tx L

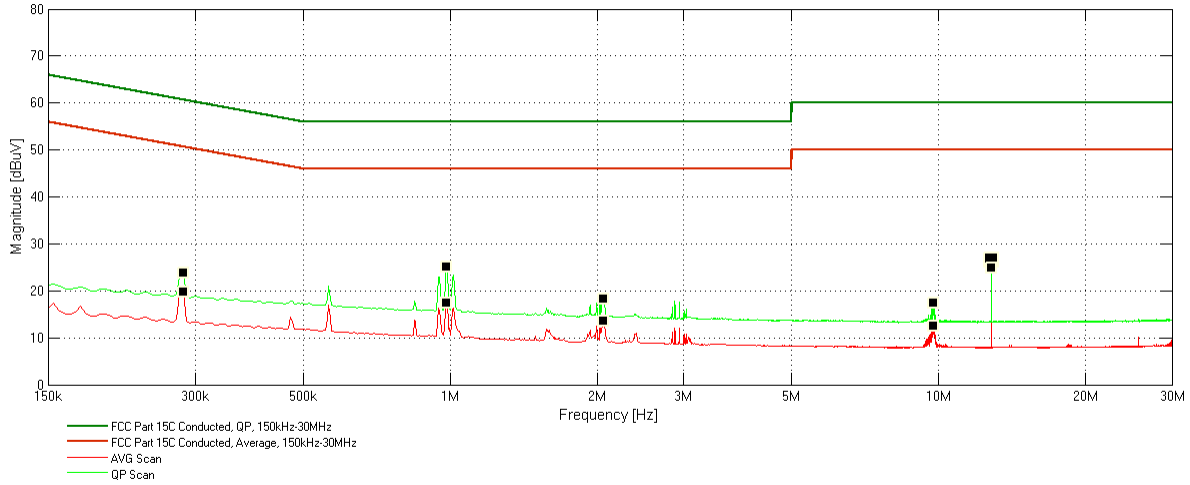

Remark: Quasi-Peak and Average Emission Plot

Line										
Freq (MHz)	QP Reading (dBμV)	AVG Reading (dBμV)	Corr Factor (dB)	QP Emission Level (dBμV)	AVG Emission Level (dBμV)	QP Limit (dBμV)	QP Margin (dB)	AVG Limit (dBμV)	AVG Margin (dB)	Test Result
12.799	16.36	14.68	10.22	26.57	24.9	60	50	33.43	25.1	Pass
0.283	13.92	9.79	9.94	23.86	19.73	60.71	50.71	36.86	30.98	Pass
0.980	15.21	7.39	9.95	25.15	17.34	56	46	30.85	28.66	Pass
2.057	8.24	3.63	9.95	18.2	13.58	56	46	37.8	32.42	Pass
9.741	7.33	2.45	10.12	17.45	12.57	60	50	42.55	37.43	Pass
12.799	16.36	14.68	10.22	26.57	24.9	60	50	33.43	25.1	Pass

Range:	150kHz to 30MHz	DUT	ECB701/BLE
Test Voltage:	120Vac 60Hz	Phase	Neutral

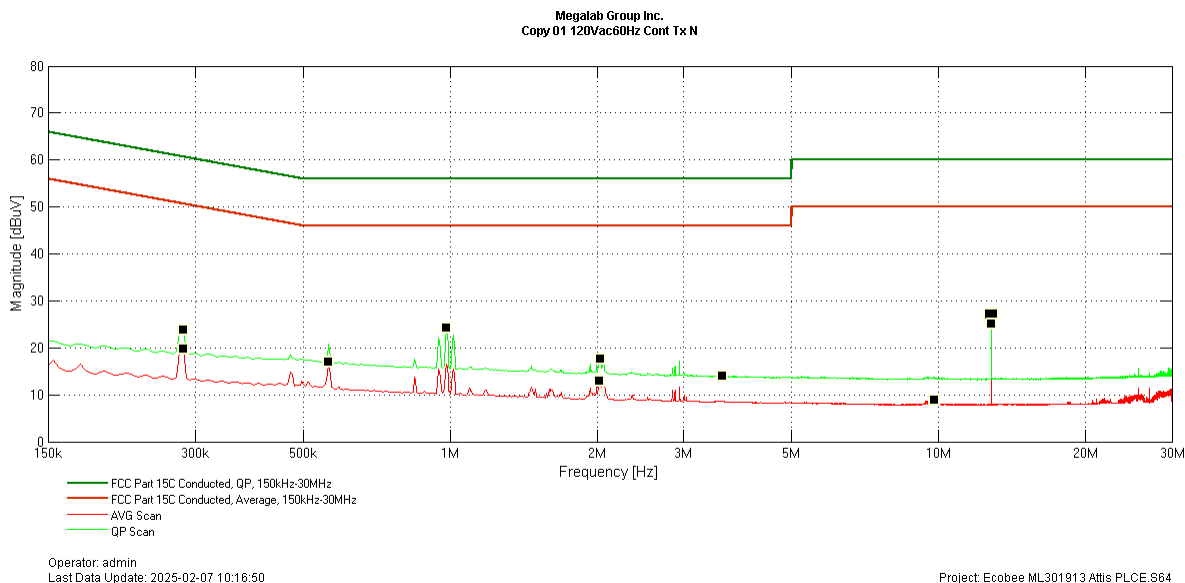

Remark: Peak Emission Plot

Neutral										
Freq (MHz)	QP Reading (dBμV)	AVG Reading (dBμV)	Corr Factor (dB)	QP Emission Level (dBμV)	AVG Emission Level (dBμV)	QP Limit (dBμV)	QP Margin (dB)	AVG Limit (dBμV)	AVG Margin (dB)	Test Result
12.799	16.56	14.85	10.22	26.78	25.07	60	50	33.22	24.93	Pass
0.283	13.84	9.77	9.94	23.78	19.71	60.71	50.71	36.93	31.01	Pass
0.980	14.24	--	9.95	24.18	--	56	--	31.82	--	Pass
2.027	7.63	--	9.95	17.58	--	56	--	38.42	--	Pass
3.613	4.08	--	9.99	14.07	--	56	--	41.93	--	Pass
0.563	--	7.03	9.93	--	16.96	--	46	--	29.04	Pass
2.023	--	2.9	9.95	--	12.86	--	46	--	33.14	Pass
9.770	--	-1.18	10.12	--	8.94	--	50	--	41.06	Pass

4.3.5 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_132	EMI Test Receiver (v6.91.2)	Gauss Instruments	TDEMI X40	Nov 29, 2023	Nov 29, 2025
EQ_EMC_61	LISN	FCC	50/250-16-2-01	Jan 16, 2024	Jan 16, 2026
EQ_EMC_44	Transient Limiter (10dB)	Com-Power	LIT-930A	NCR	NCR
EQ_EMC_84	RF Cable	Times Microwave	LMR-400	NCR	NCR
EQ_EMC_149	Emission Software RE/CE	Gauss Instruments	EMI64k v6.31.2	NCR	NCR

----- End of Test Report -----