



RF Test Report

Standard(s): FCC Part 15 Subpart 15.247,
RSS-247 Issue 3:2023
Unlicensed Intentional Radiators

Issued To: Ecobee Inc
207 Queens Quay Suite 600,
Toronto, ON M5J 1A7
Canada

Product Name: Smart Thermostat
Model: ECB601/ECB501
FCC ID: WR92025AA2060G
IC: 7981A-2025AA2060G

Report No. ML302480D-RF00 (DSS – Hybrid)
Date of Issue: January 13, 2026

Report Prepared By:

A handwritten signature in black ink, appearing to read "Min Xie", is written over a horizontal line.

Min Xie, Sr. EMC/RF Engineer

Reviewed By:

A handwritten signature in black ink, appearing to read "Amir Emami", is written over a horizontal line.

Amir Emami, Project Engineer

Megalab Group Inc. – 150 Addison Hall Circle, Aurora, Ontario, L4G 3X8, Canada

www.megalabinc.com – (905) 752-1925

This report may not be reproduced, except in full, without prior written approval of Megalab Group Inc.

Table of Contents

1.	Revision History	3
1.1	Test Verdict.....	4
1.2	Test Standards	5
1.3	Test Facility	6
2.	General Information	9
2.1	Client Information	9
2.2	Device Under Test (DUT)	9
2.3	Test Setup of DUT	10
2.4	Modifications for Compliance	10
3.	Test Results	11
3.1	Emission Bandwidth	11
3.2	Channel Carrier Frequency Separation	15
3.3	Time of Occupancy (Dwell Time)	18
3.4	Output Power	21
3.5	Power Spectral Density.....	24
3.6	Conducted Spurious Emissions (-30dBc)	27
3.7	Transmitter Spurious Radiated Emissions	33
3.8	Power Line Conducted Emissions.....	40

1. Revision History

Project No. & Revision	Report Date	Initials	Description
ML302480D-RF00 (DSS – FHSS)	January 13, 2026	MX	Initial Release
-	-	-	-

NOTE:

- Latest reports marked as a revision replace any previous report and/or report revision issued under the same project number.

Summary of Test Results

1.1 Test Verdict

Unless otherwise stated, the test data and results in this test report relate only to the sample(s) tested.

Requirement		Test Type	Result	Remark
FCC	ISED			
15.203 15.247(b)(4)	RSS-247 5.4(d)	Antenna Gain and Requirement	Pass	LDS Antenna on Plastic Frame -9.71 dBi
15.247(a)(1)	RSS-247 5.1	Emission Bandwidth	Pass	$BW_{20dB} \leq 250 \text{ kHz}$
15.247(a)(1)	RSS-247 5.1	Channel Carrier Frequency Separation	Pass	$\Delta f \geq \text{MAX} \{25 \text{ kHz}, BW_{20dB}\}$
15.247(a)(1)	RSS-247 5.1	Time of Occupancy (Dwell Time)	Pass	$t_{ch} \leq 0.4 \text{ s for } T = N_{ch} * 0.4s$
15.247(b)	RSS-247 5.4	Average Conducted Output Power	Pass	< 1 Watt
15.247(d)	RSS-247 5.5	Spurious Conducted Out of Band Emissions	Pass	< 30dBc
15.247(f)	RSS-247 5.5	Power Spectral Density	Pass	< 8 dBm in 3 kHz RBW
15.247(d)/ 15.209	RSS-GEN 8.9 (Table 5 & 6)	Transmitter Spurious Radiated Emissions	Pass	---
15.207	RSS-GEN (Table 4)	Power Line Conducted Emissions	N/A	--

1.1.1 Test Verdict Notes and Justifications

The DUT was mounted as in normal usage. See the Test Setup Photos for details.

Antenna details obtained from Manufacturer's Datasheet.

1.2 Test Standards

Standard	Description
47 CFR FCC Part 15 Subpart C	Code of Federal Regulations – Radio Frequency Devices, Intentional Radiators
FCC KDB 558074:2019	Digital Transmission Systems, measurements and procedures
RSS-247 Issue 4:2025	Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
RSS-GEN Issue 5:2021	General Requirements for Compliance of Radio Apparatus
ANSI C63.4:2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10:2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ISO 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories

1.3 Test Facility

All tests were performed at Megalab Group Inc., located at 150 Addison Hall Circle, Aurora, ON, L4G 3X8, Canada.

The 10-meter semi-anechoic chamber for radiated emission and radiated immunity is designed to handle weights of up to 10,000lb and has power capability of over 100A. The turntable is capable of supporting test devices or systems either floor standing or table top of up to 4 meters wide and 3m tall. Conducted emissions, unless otherwise specified, are performed on a 2.44m x 2.48m ground plane and using a 2.44m x 2.48m vertical ground plane if applicable.

1.3.1 Accreditations

This report does not indicate any product endorsement by any government, accreditation agency, or Megalab Group Inc. Megalab Group Inc. shall have no liability for any deductions, interpretations or generalizations drawn by the client or others from the issued reports. If any opinions or interpretations are expressed in this report, they are outside Megalab Group Inc.'s scope of accreditation and do not necessarily reflect the opinions of Megalab Group Inc., unless otherwise specified.



A2LA (Certificate #5179.02)

Megalab Group Inc. is accredited to ISO/IEC 17025:2017 by the American Association for Laboratory Accreditation (A2LA) with Testing Certificate #5179.02. The laboratories current scope of accreditation can be found as listed on A2LA's website.



Innovation, Science and
Economic Development Canada

ISED

Megalab Group Inc. is registered with and recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 28697



FCC

Megalab Group Inc. is registered with and recognized by the Federal Communications Commission (FCC) as an accredited testing laboratory.
Registration No. 200040



VCCI

The Semi-anechoic chamber of Megalab Group Inc. is registered with the Regulations for Voluntary Control Council for Interference (VCCI). Registration No.: R-20173, G-20174, C-20132, T-20133.

1.3.2 Measurement Uncertainty

As per ISO/IEC 17025 requirements, an evaluation of the measurement uncertainties associated with the emission test results should be included in the test report.

Where relevant, the following measurement uncertainty levels have been estimated for the tests performed on the DUT as specified in CISPR 16-4-2. The measurement uncertainties given below are based on a coverage factor $k = 2$ which yields approximately a 95% level of confidence for the near-normal distribution typical of most measurement results.

Measurement	Frequency Range	Uncertainty
Conducted Emissions at AC Mains Power Port	150kHz to 30MHz	2.27 dB
Radiated Emissions	30MHz to 1GHz	5.22 dB
	1GHz to 18GHz	4.76 dB

1.3.3 Sample Calculations

Conducted Emissions

$$\begin{aligned}
 \text{Emission Level (dB}\mu\text{V)} &= \text{Read Level (dB}\mu\text{V)} + \text{LISN Factor (dB)} + \text{Attenuation Factor (dB)} + \text{Cable Loss (dB)} \\
 &= 34.8 + 0.1 + 10.0 + 0.2 \\
 &= 45.1
 \end{aligned}$$

$$\begin{aligned}
 \text{Margin (dB)} &= \text{Limit (dB}\mu\text{V)} - \text{Emission Level (dB}\mu\text{V)} \\
 &= 60.0 - 45.1 \\
 &= 14.9
 \end{aligned}$$

Radiated Emissions

$$\begin{aligned}
 \text{Emission Level (dB}\mu\text{V/m)} &= \text{Read Level (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Pre-Amp Gain (dB)} \\
 &= 52.4 + 9.4 + 1.3 - 29.2 \\
 &= 33.9
 \end{aligned}$$

$$\begin{aligned}
 \text{Margin (dB)} &= \text{Limit (dB}\mu\text{V/m)} - \text{Emission Level (dB}\mu\text{V/m)} \\
 &= 50.0 - 33.9 \\
 &= 16.1
 \end{aligned}$$

1.3.4 Terms, Definitions and Abbreviations

AE	Auxiliary Equipment
DUT	Device Under Test
DTS	Digital Transmission System
EMC	Electro-Magnetic Compatibility
FHSS	Frequency Hopping Spread Spectrum
ISM	Industrial, Scientific and Medical
LISN	Line Impedance Stabilization Network
N/A	Not Applicable
NCR	No Calibration Required
RF	Radio Frequency
RBW	Resolution Bandwidth
VBW	Video Bandwidth

Auxiliary Equipment/Support Equipment

Equipment needed to exercise and/or monitor the operation of the DUT.

Artificial Mains Network

Network that provides a defined impedance to the DUT at radio frequencies, couples the disturbance voltage to the measuring receiver and decouples the test circuit from the supply mains.

Class A Equipment

Equipment suitable for use in all locations other than those allocated in residential environments and those directly connected to a low voltage power supply network which supplies buildings used for domestic purposes.

Class B Equipment

Equipment suitable for use in all locations, including in residential environments and in establishments directly connected to a low voltage power supply network which supplies buildings used for domestic purposes.

Device Under Test

Device or system being evaluated for compliance with the requirements of the Test Standards listed in this report.

Electro-Magnetic Compatibility

Ability of equipment or system to function satisfactorily in its EM environment without introducing intolerable electromagnetic disturbances to anything in that environment.

Electromagnetic Disturbance

Any electromagnetic phenomenon which may degrade the performance of a device, equipment or system.

2. General Information

2.1 Client Information

Company	Ecobee Inc
Address	207 Queens Quay Suite 600, Toronto, ON M5J 1A7 Canada
Contact	John Russomanno
Email	john@ecobee.com

2.2 Device Under Test (DUT)

2.2.1 DUT Information

DUT Name	Smart Thermostat
DUT Model(s)	ECB601/ECB501
Serial Number	Production Sample
Power Source (AC / DC / Battery)	AC
Input Voltage (V) or Range	24Vac
Frequency (Hz) or Range	60Hz
Mode(s) of Operation	Continuous transmission
Connectors Available on DUT	Standard thermostat connections
Transmitter Information	
FCC ID	WR92025AA2060G
IC	7981A-2025AA2060G
Technology Used	Hybrid
Operating Frequency	920 MHz – 928 MHz
Modulation Type	FSK
Number of Channels	2
Antenna Manufacturer	Custom - LDS Antenna on Plastic Frame
Antenna Model	N/A
Antenna Type	Custom type
Antenna Gain	-9.71 dBi

Note: Above antenna information is provided by the client. The characteristics and gain are obtained from the Antenna Manufacturer's Data Sheet.

2.2.2 DUT Description

EUT is a smart thermostat; it contains 2400 – 2483.5 MHz DTS (802.11 b/g/n and BLE), 2400 – 2483.5 MHz FHSS (Bluetooth Classic), 5150-5250 MHz, and 5725-5850 MHz transmitters on one chip, and a 920 – 928 MHz FHSS/Hybrid transmitter on second chip.

This report documents the compliance of the 920 – 928 Hybrid transmitter.

2.3 Test Setup of DUT

2.3.1 Configuration

The DUT was configured in a direct test mode with the following parameters

- For all the tests, the DUT was set to transmit continuously with 100% duty cycle
- Output Power setting: j160
- Channels:
 - o 0 (low, 920 MHz),
 - o 49 (High, 927.35 MHz)
- Packet Type: Random

During all radiated emission measurements, the DUT was mounted in three orthogonal axes. See Test Setup Photos for axis details.




Figure 1 – Configuration Block Diagram

Description of I/O Cables			
Cable Function	Length of Cable (m)	Shielded (Y/N)	Outdoor Use (Y/N)
Thermostat control	>3	N	N

2.3.2 Support Equipment

Device	Manufacturer	Model	S/N
Custom USB Interface	Ecobee	--	---

2.4 Modifications for Compliance

No modifications were made to the device under test to comply with the testing requirements.

3. Test Results

3.1 Emission Bandwidth

Test Date: September 2, 2025
Temperature (°C) 25.4
Relative Humidity (%) 36.3
Barometric Pressure (kPa) 97.9

Initials: MX

During this test, the transmitter's 20 dB and 99% emission bandwidth will be examined and verify that the upper and lower frequency are always kept within the working frequency range band.

3.1.1 Limits

Systems using frequency hopping techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands with maximum allowable 20 dB bandwidth, specified in FCC 15.247 (a)(1) and RSS-247 Section 5.1, summarized below:

Frequency Band	Maximum 20 dB Bandwidth Limit	
	$P_{\text{max-pk}} \leq 1 \text{ W}$	
902–928 MHz	$BW_{20\text{dB}} \leq 250 \text{ kHz}$	$250 \text{ kHz} < BW_{20\text{dB}} \leq 500 \text{ kHz}$ Provide: $P_{\text{max-pk}} \leq 0.25 \text{ W}$ $t_{\text{ch}} \leq 0.4 \text{ s for } T = 10 \text{ s}$
2400–2483.5 MHz	Max. $BW_{20\text{dB}}$ not specified	
5725–5850 MHz	$BW_{20\text{dB}} \leq 1 \text{ MHz}$	

*Note: FCC 15.247 and RSS-247 did not explicitly specify a maximum 20 dB bandwidth for FHSS operating in the 2400–2483.5 MHz band. The maximum 20 dB bandwidth is implicitly limited by the minimum number of hopping channels; i.e., the 20 dB bandwidth multiplied by minimum number of channels shall be within the 2400–2483.5 MHz band.

For 2400–2483.5 MHz band, the minimum number of channels specified is 15 channels. Thus, the maximum 20 dB bandwidth shall be less than 5.5 MHz (83.5 MHz/15).

The DUT operates in the 902 – 928 MHz. The applicable 20 dB BW limit is $BW_{20\text{dB}} \leq 250 \text{ kHz}$.

99% bandwidth limit is not specified but is required for certification application.

3.1.2 Test Procedure

Tested according to ANSI C63.10 Section 6.9.2 for 20 dB bandwidth and Section 6.9.3 for 99% bandwidth.

For 20 dB Emission Bandwidth:

- Set RBW in the range of 1% to 5% of the actual occupied bandwidth.

- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Span set to 2 to 5 times the occupied bandwidth.
- d) Detector: Peak
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

For 99% Emission Bandwidth:

- a) Set RBW in the range of 1% to 5% of the actual occupied bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Span set to 1.5 to 5 times the occupied bandwidth.
- d) Detector: Peak
- e) Use the 99% power bandwidth function of the instrument to measure bandwidth.

3.1.3 Test Results

The DUT met the 20 dB requirement; the 20 dB BW of the DUT is ≤ 250 kHz.

Frequency (MHz)	20 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	20 dB Bandwidth Limit (kHz)	Test Result
920.00	89.27	88.29	≤ 250	Pass
927.35	89.13	88.35	≤ 250	Pass

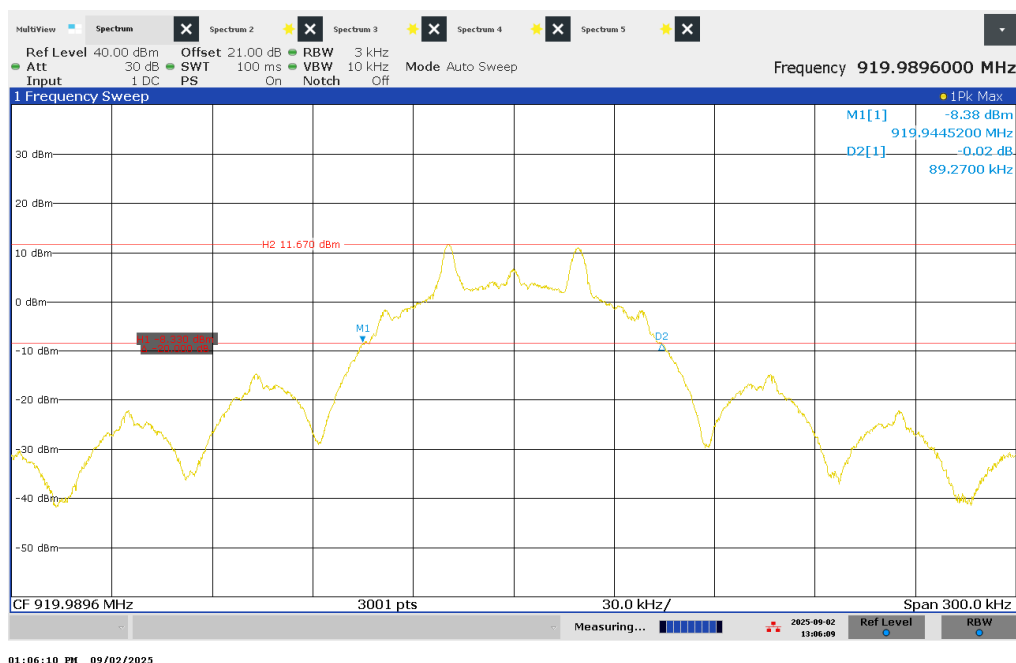


Figure 2 – 20 dB Bandwidth - Low Channel

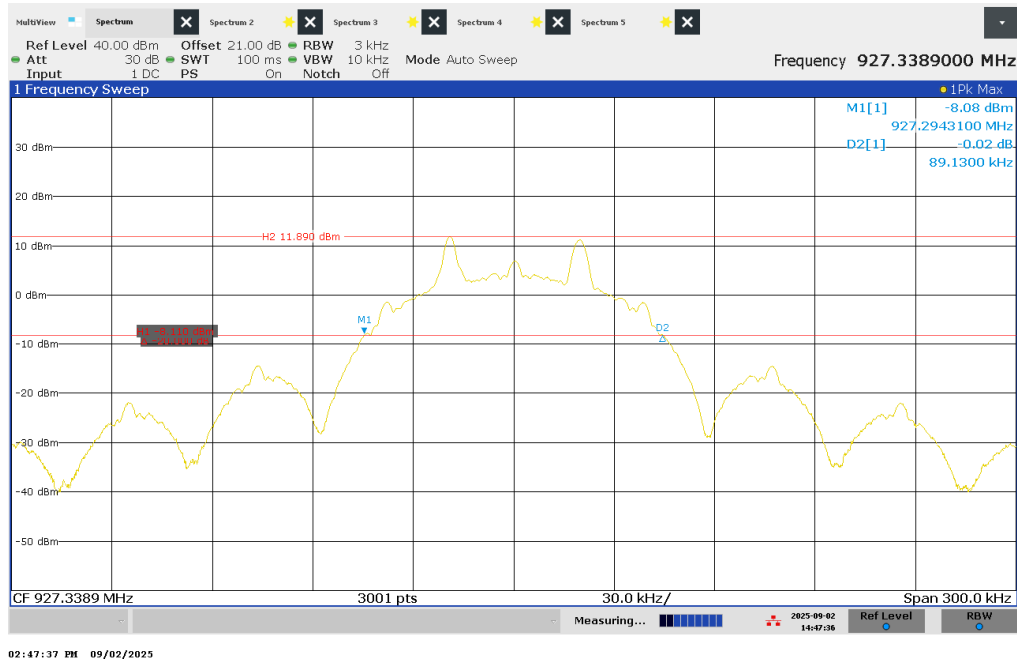


Figure 3 – 20 dB Bandwidth - High Channel

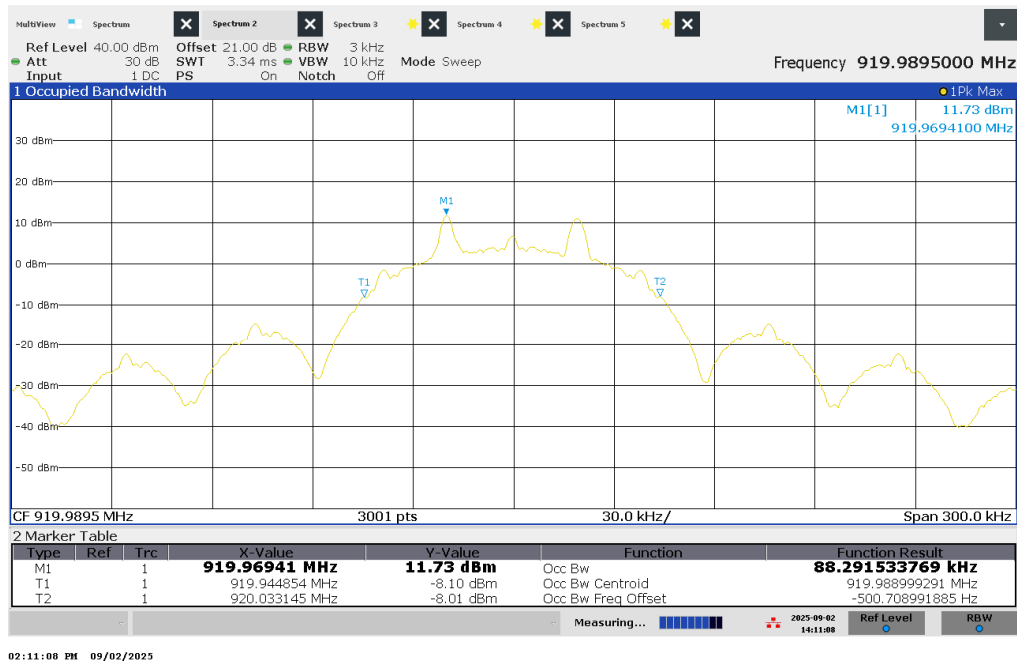


Figure 4 – 99% Bandwidth - Low Channel

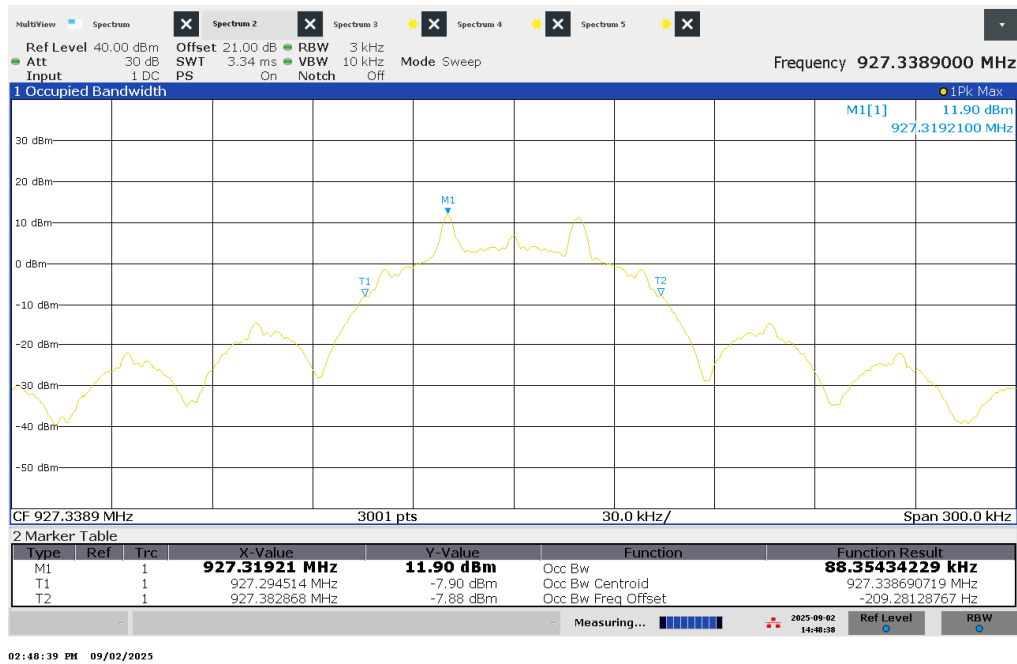


Figure 5 – 99% Bandwidth - High Channel

3.1.4 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_58	EMI Receiver	Rohde & Schwarz	ESW 44	Mar 1, 2024	Mar 1, 2026
EQ_EMC_116	20 dB Attenuator SMA	Fairview Microwave	SA18E-20	NCR	NCR

3.2 Channel Carrier Frequency Separation

Test Date: September 2, 2025
Temperature (°C) 25.4
Relative Humidity (%) 36.3
Barometric Pressure (kPa) 97.9

Initials: MX

During this test, the channel carrier frequency separation of the transmitter will be examined. This specification facilitates the prevention of data corruption while also indirectly limiting the power density of a transmitter which enable other transmitters to coexist in the same frequency band.

3.2.1 Limits

Systems using frequency hopping techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands with minimum allowable channel carrier frequency separation - Δf , specified in FCC 15.247 (a)(1) and RSS-247 Section 5.1, summarized below:

Frequency Band	Minimum Channel Separation	
	$P_{\text{max-pk}} \leq 1 \text{ W}$	
902–928 MHz	$\Delta f \geq \text{MAX} \{25 \text{ kHz}, BW_{20\text{dB}}\}$	
2400–2483.5 MHz	$\Delta f \geq \text{MAX} \{25 \text{ kHz}, BW_{20\text{dB}}\}$ Provide: $N_{\text{ch}} \geq 75$	$\Delta f \geq [\text{MAX} \{25 \text{ kHz}, \frac{2}{3} BW_{20\text{dB}}\}]$ OR $\text{MAX} \{25 \text{ kHz}, BW_{20\text{dB}}\}$ Provide: $N_{\text{ch}} \geq 15$ $P_{\text{max-pk}} \leq 0.125 \text{ W}$
5725–5850 MHz	$\Delta f \geq \text{MAX} \{25 \text{ kHz}, BW_{20\text{dB}}\}$	

The DUT's operates in the 902 - 928 MHz band. The applicable limit is therefore, the larger of 20 dB BW or 25 kHz. The system's highest 20 dB BW was measured to be 89.27 kHz. The minimum channel separation limit is 89.27 kHz.

3.2.2 Test Procedure

Tested according to ANSI C63.10 Section 7.8.2.

For Channel Carrier Frequency Separation

- Set RBW approximately to 30% of the channel spacing; adjust as necessary to identify the center of each channel.
- Set VBW $\geq$ RBW.
- Detector: Peak
- Span set to wide enough to capture at least two adjacent channels

3.2.3 Test Results

The DUT met the minimum channel separation limit. The channel separation is 7354.6 kHz which is larger than 89.27 kHz.



02:08:44 PM 09/03/2025

Figure 6 – Channel Separation

3.2.4 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_58	EMI Receiver	Rohde & Schwarz	ESW 44	Mar 1, 2024	Mar 1, 2026
EQ_EMC_116	20 dB Attenuator SMA	Fairview Microwave	SA18E-20	NCR	NCR

3.3 Time of Occupancy (Dwell Time)

Test Date: September 2, 2025
Temperature (°C) 25.4
Relative Humidity (%) 36.3
Barometric Pressure (kPa) 97.9

Initials: MX

During this test, the Time of Occupancy for each channel of the transmitter will be examined. This specification limits the time a channel is occupied which enable other transmitter to coexist in the same frequency band.

3.3.1 Limits

Systems using frequency hopping techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands with maximum Time of Occupancy for each channel - t_{ch} , specified in FCC 15.247 (a)(1) and RSS-247 Section 5.1, summarized below:

Frequency Band	Maximum Time of Occupancy
	$P_{\max\text{-pk}} \leq 1 \text{ W}$
2400–2483.5 MHz 902–928 MHz 5725–5850 MHz	$t_{ch} \leq 0.4 \text{ s for } T = 0.4 N_{ch} \text{ s}$

3.3.2 Test Procedure

Tested according to ANSI C63.10 Section 7.8.4.

For Dwell Time per Hop

- Set RBW less than channel spacing
- Detector: Peak
- Span: Zero span, centered on a hopping channel
- Sweep: Single
- Sweep Time: long enough to capture start and end of a transmission

For Number of Hop

- Sweep Time: long enough to capture at least 2 hops
- The number of hops within T is calculated from the number of hops on the channel divided by the Sweep Time multiplied by T

The Time of Occupancy is calculated by multiplying the dwell time per hop by the number of hops in T.

3.3.3 Test Results

The EUT uses 2 channels when operating in Hybrid mode. The Observation time, T, is $2 * 0.4 \text{ s} = 0.8 \text{ s}$.

The DUT's dwell time per hop is 15.458 ms (0.016 s).

There are 8 hops in 0.8 s of Observation time.

The DUT has an average occupancy t_{ch} of $8 * 0.016 \text{ s} = 0.128 \text{ s}$ which is less than 0.4 s.

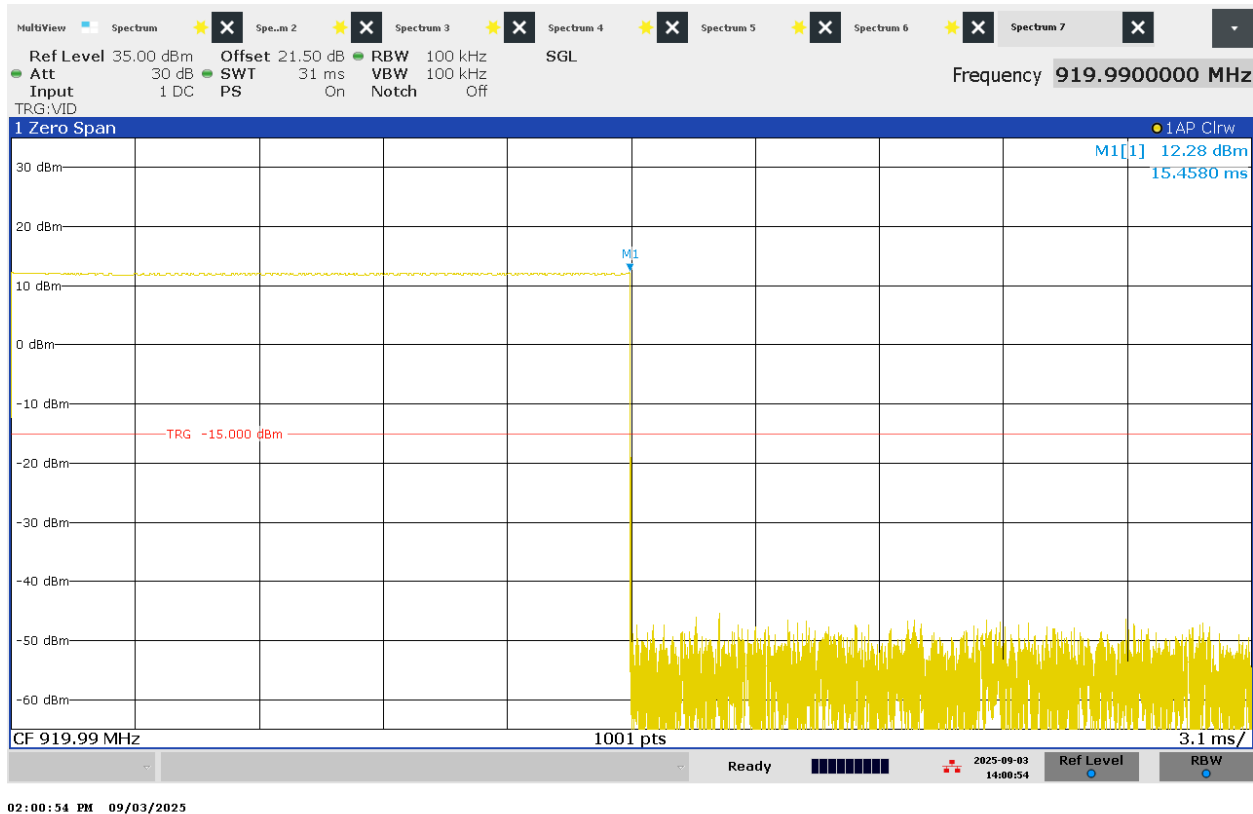


Figure 7 – Dwell Time per Hop

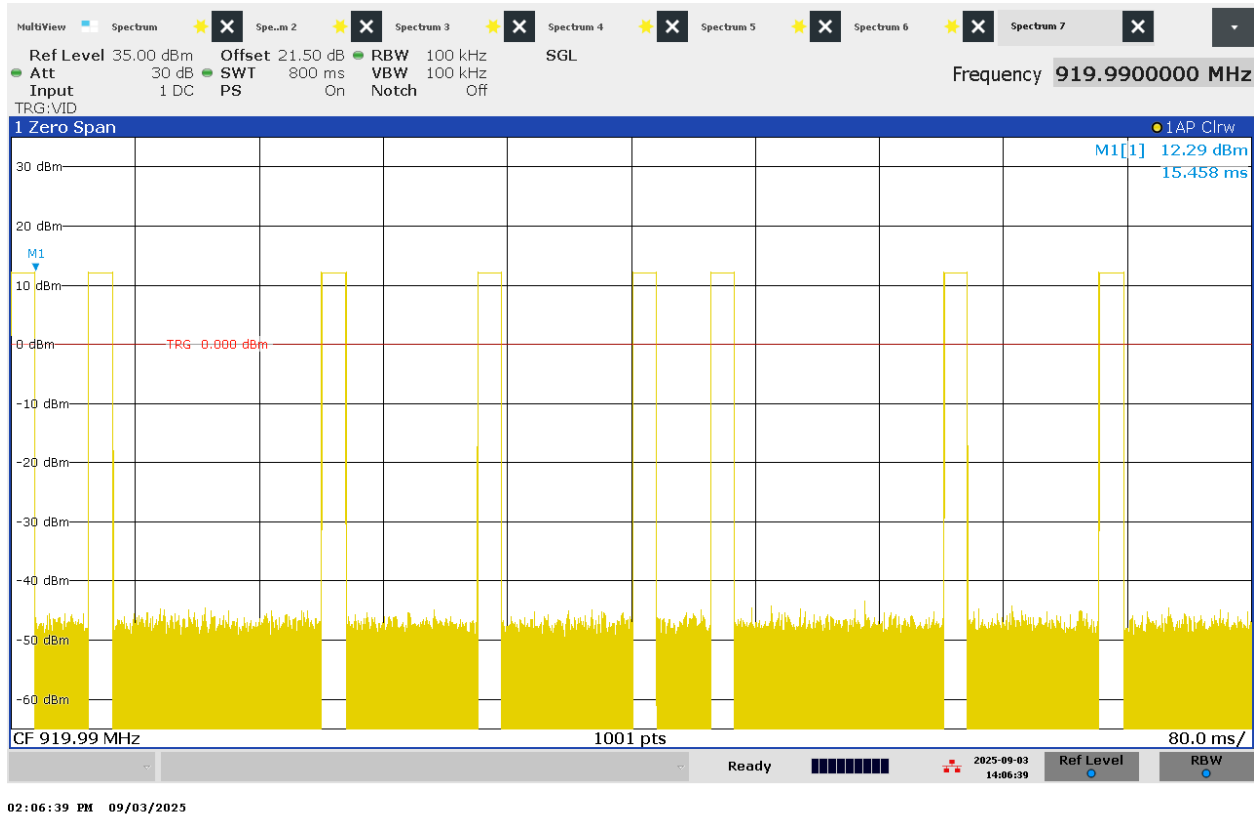


Figure 8 – Number of Hops per Sweep Time

3.3.4 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_58	EMI Receiver	Rohde & Schwarz	ESW 44	Mar 1, 2024	Mar 1, 2026
EQ_EMC_116	20 dB Attenuator SMA	Fairview Microwave	SA18E-20	NCR	NCR

3.4 Output Power

Test Date: September 2, 2025
Temperature (°C) 25.4
Relative Humidity (%) 36.3
Barometric Pressure (kPa) 97.9

Initials: MX

3.4.1 Limits

Systems using frequency hopping techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands with maximum peak conducted power, specified in FCC 15.247 (b) and RSS-247 Section 5.4, summarized below:

Frequency Band	Maximum Conducted (Average) Power
902–928 MHz 2400–2483.5 MHz 5725–5850 MHz	$P_{\text{max-pk}} \leq 1 \text{ W}$

3.4.2 Test Procedure

Tested according to ANSI C63.10 Section 11.9.2.2.

For Maximum Conducted Output (Average) Power

- Set RBW = 1% to 5% of OBW, not exceeding 1 MHz
- Set VBW $\geq 3 \times$ RBW
- Detector: RMS
- Span: At least 1.5 times the OBW
- Trace: Average
- Average Sweep Count: At least 100 times
- Trace Mode: Single
- Use instrument's band power measurement function to compute power by integrating the spectrum across the OBW.

The RF output of the DUT was connected to the spectrum analyzer with sufficient attenuation in front and the total path loss was set as reference offset to correct the final reading.

3.4.3 Test Results

The EUT meets power limits of 1 W.

Channel	Frequency (MHz)	Average Power (dBm)	Average Power (mW)	Average Power (W)	Limit (W)	Test Result
Low	920.0	11.22	13.24	0.0132	1	Pass
High	927.35	11.44	13.93	0.0139	1	Pass

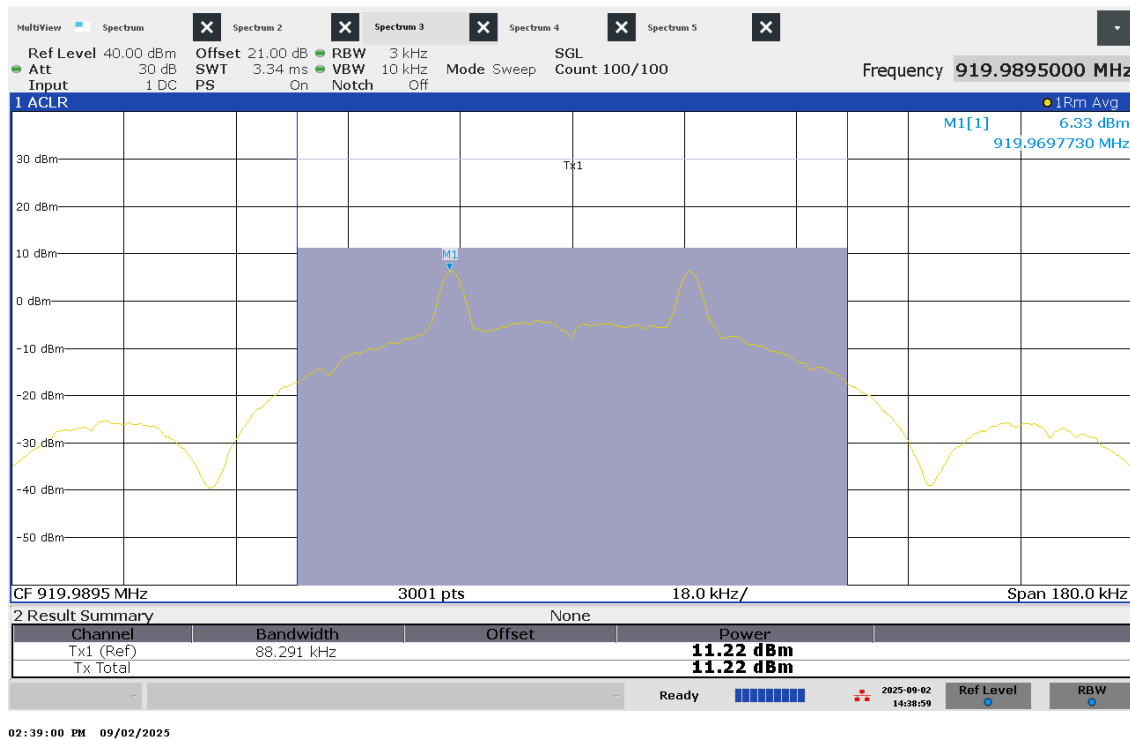


Figure 9 – Peak Power - Low Channel

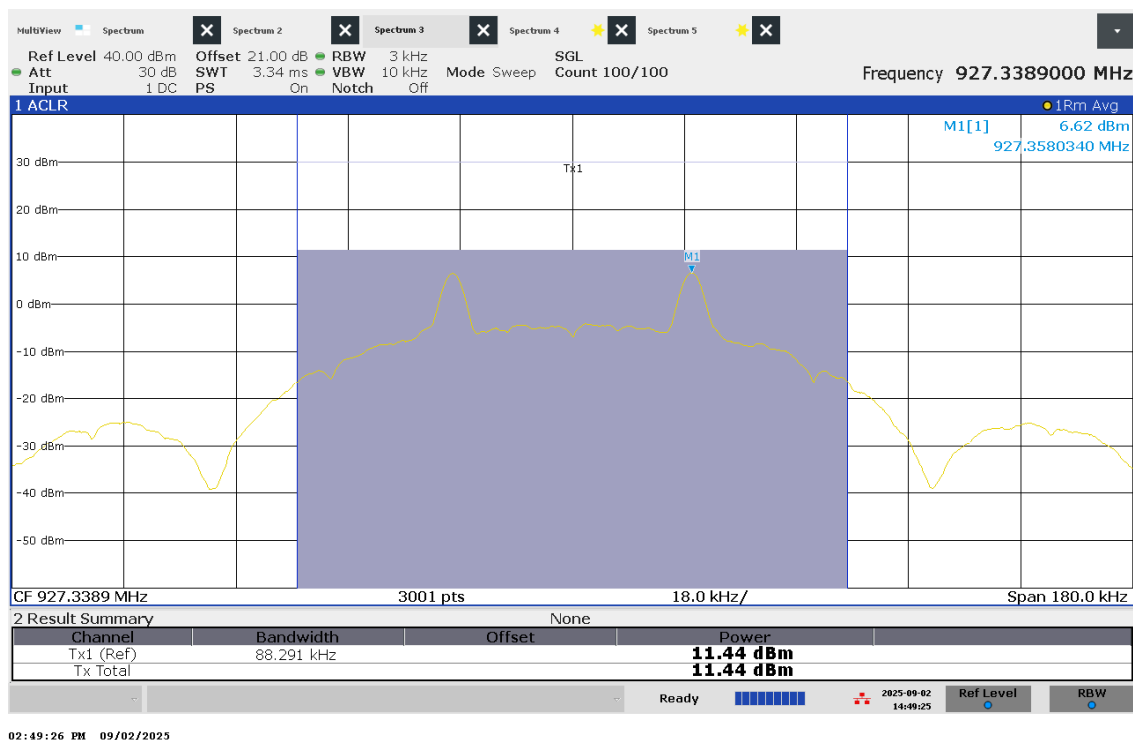


Figure 10 – Peak Power - High Channel

3.4.4 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_58	EMI Receiver	Rohde & Schwarz	ESW 44	Mar 1, 2024	Mar 1, 2026
EQ_EMC_116	20 dB Attenuator SMA	Fairview Microwave	SA18E-20	NCR	NCR

3.5 Power Spectral Density

Test Date: September 2, 2025
Temperature (°C) 25.4
Relative Humidity (%) 36.3
Barometric Pressure (kPa) 97.9

Initials: MX

3.5.1 Limits

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.5.2 Test Procedure

Tested according to ANSI C63.10 Section 11.10.3


- a) Set RBW = 3kHz and VBW $\geq [3 \times \text{RBW}]$.
- b) Set Span to at least 1.5 times the OBW.
- c) Detector: RMS
- d) Trace: Average
- e) Average Sweep Count: At least 100 times
- f) Trace Mode: Single
- g) Sweep = Auto Couple.
- h) Use the peak marker function to determine the maximum level.

The RF output of the DUT was connected to the spectrum analyzer with sufficient attenuation in front and the total path loss was set as reference offset to correct the final reading.


3.5.3 Test Results

The DUT meet the 8 dBm/3kHz power spectral density limit.

Channel	Frequency (MHz)	Average PSD (dBm)	Limit (dBm)	Test Result
Low	920.0	6.51	8	Pass
High	927.35	7.01	8	Pass

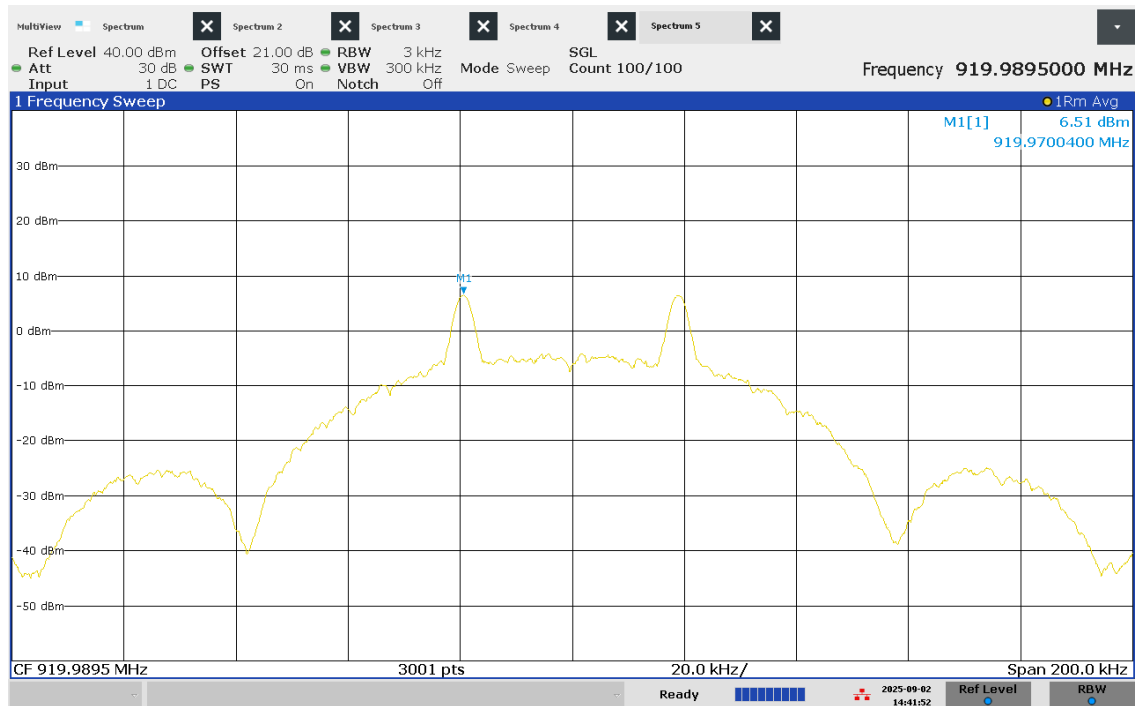

02:41:53 PM 09/02/2025

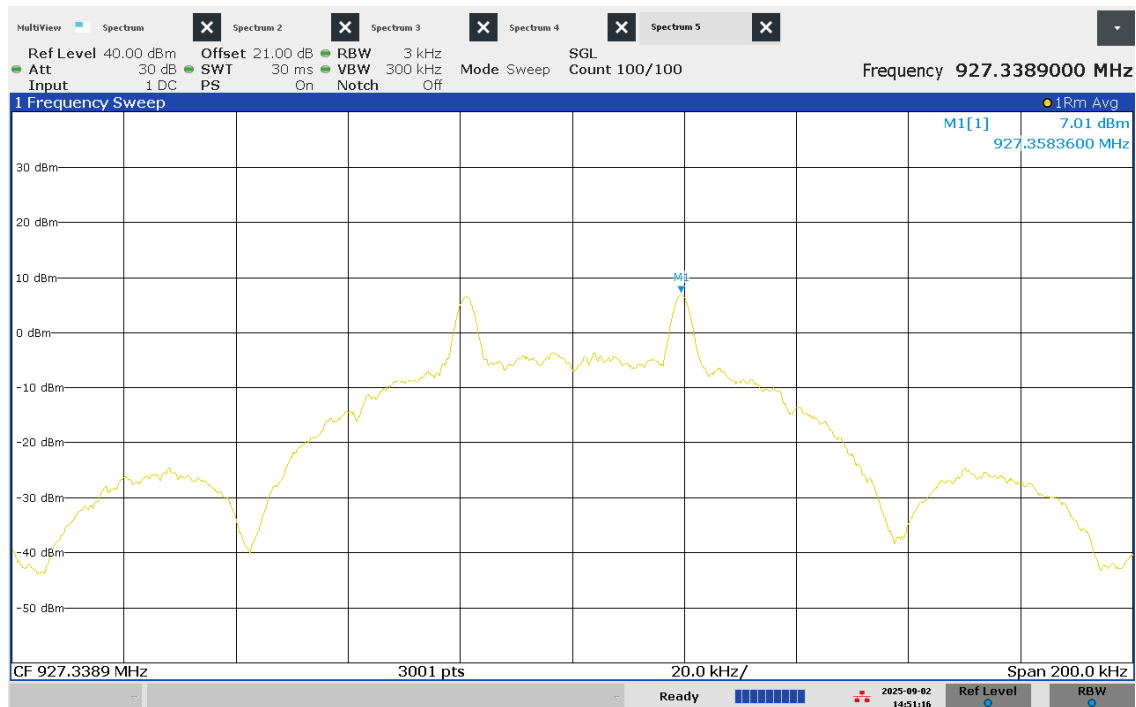

02:51:17 PM 09/02/2025

Figure 12 – PSD - High Channel

3.5.4 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_58	EMI Receiver	Rohde & Schwarz	ESW 44	Mar 1, 2024	Mar 1, 2026
EQ_EMC_116	20 dB Attenuator SMA	Fairview Microwave	SA18E-20	NCR	NCR

3.6 Conducted Spurious Emissions (-30dBc)

Test Date:	September 2, 2025	Initials:	MX
Temperature (°C)	25.4		
Relative Humidity (%)	36.3		
Barometric Pressure (kPa)	97.9		

3.6.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30dB instead of 20dB.

3.6.2 Test Procedure

Tested according to ANSI C63.10 Section 7.8.7

Conducted Band-edge testing is performed with hopping disabled and enabled.

For the reference level measurement:

- Set RBW = 100kHz and VBW $\geq [3 \times \text{RBW}]$.
- Detector = Peak and Trace Mode = Max Hold.
- Sweep = Auto Couple.
- Span set to ≥ 1.5 20 dB emission bandwidth.
- Use the peak marker function to determine the maximum level.

For the out of band emission measurement


- Set the start and stop frequency to encompass the frequency range to be measured.
- Set RBW = 100kHz and VBW $\geq [3 \times \text{RBW}]$.
- Detector = Peak and Trace Mode = Max Hold.
- Sweep = Auto Couple.
- Use the peak marker function to determine the maximum level.

The RF output of the DUT was connected to the spectrum analyzer with sufficient attenuation in front and the total path loss was set as reference offset to correct the final reading.

3.6.3 Test Results

The DUT met the 30dB below carrier requirement for out of band emissions.

Channel	Frequency (MHz)	Peak PSD w/ RBW=100 kHz (dBm)	30 dBc Limit (dBm)
Low	920.0	12.67	-17.33
High	927.35	12.76	-17.24

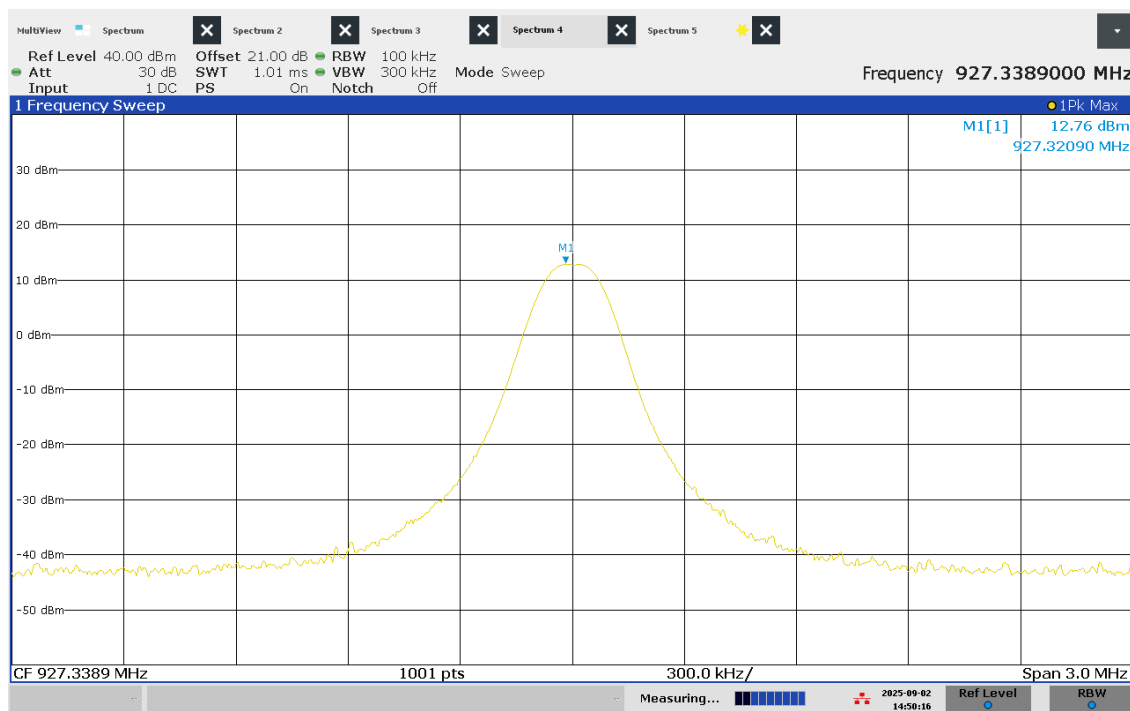

02:50:17 PM 09/02/2025

Figure 13 – -20dBc Reference Level - High Channel

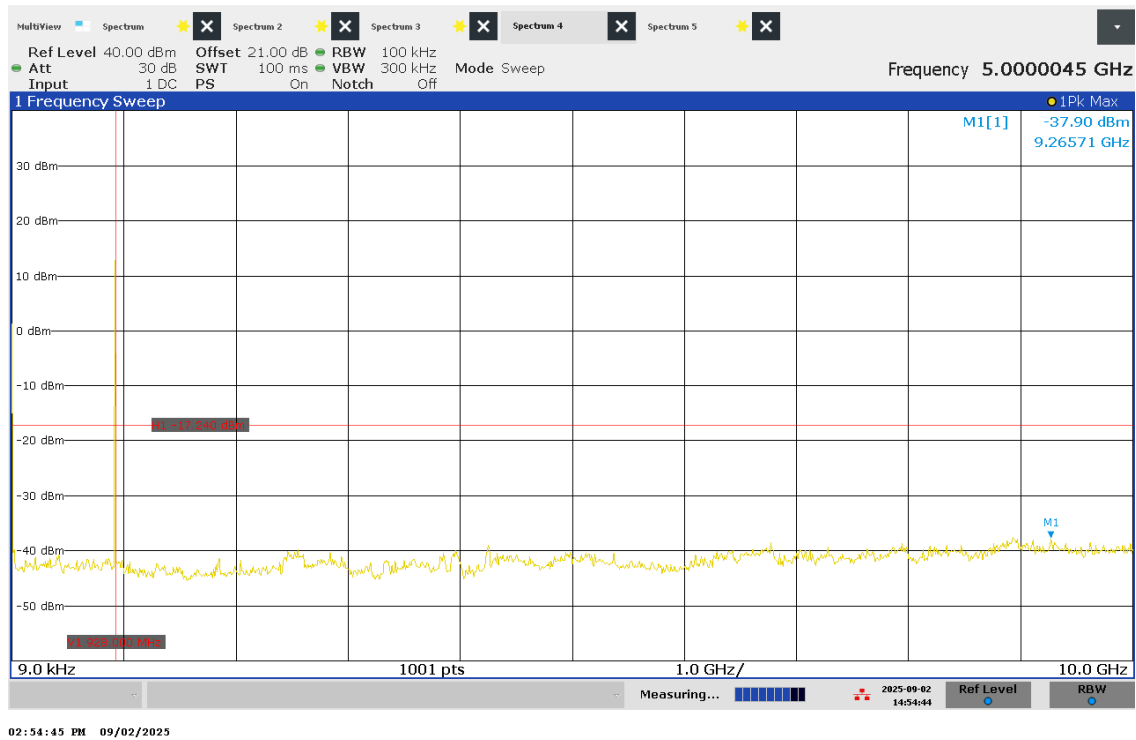


Figure 14 – -30dBc with High Channel

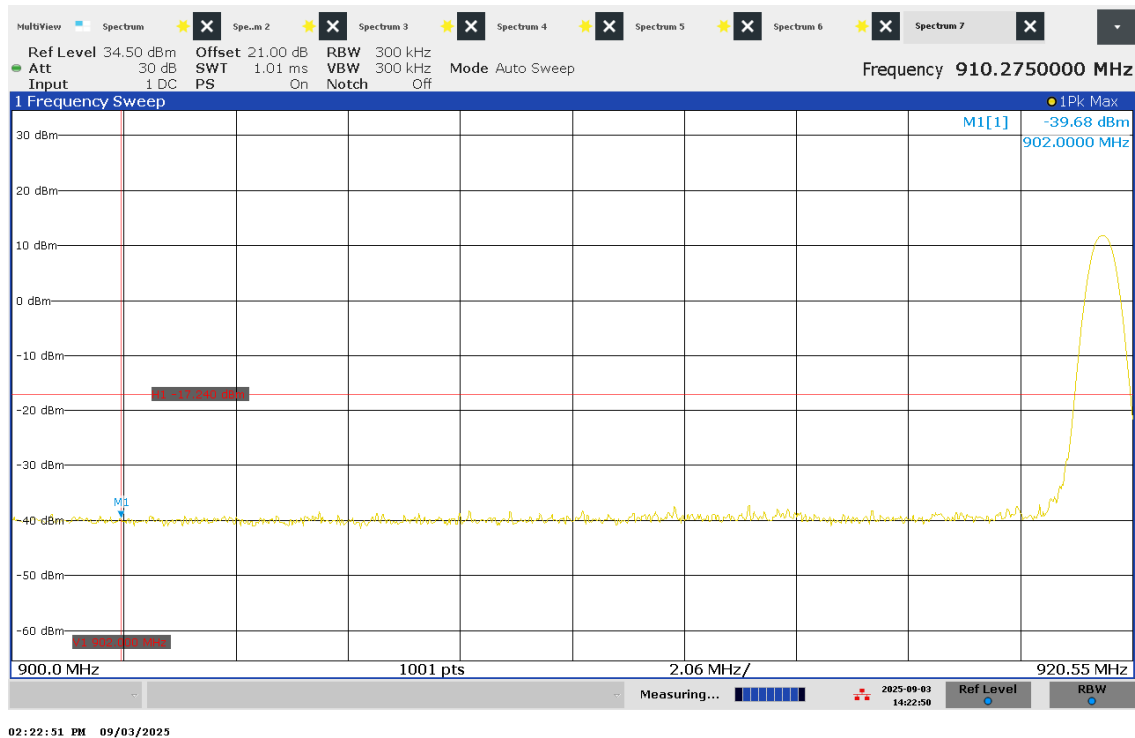


Figure 15 – -30dBc Band Edge - Low Channel (Hoping Disabled)

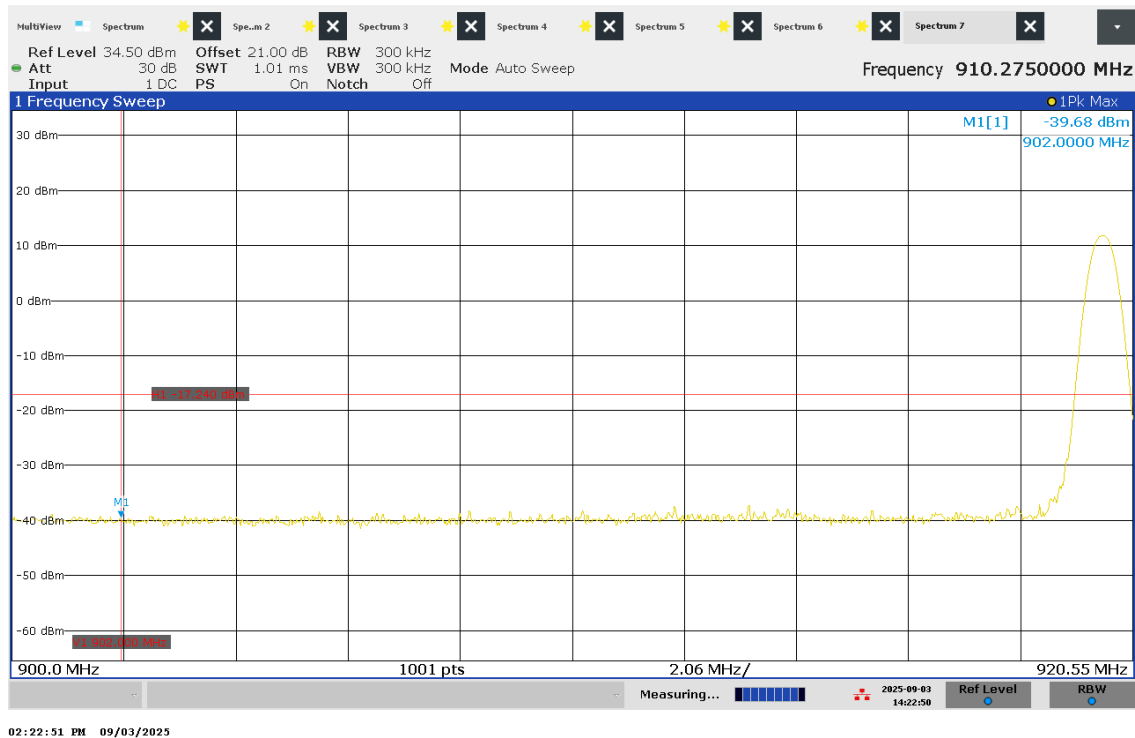


Figure 16 – -30dBc Band Edge - Low Channel (Hoping Enabled)

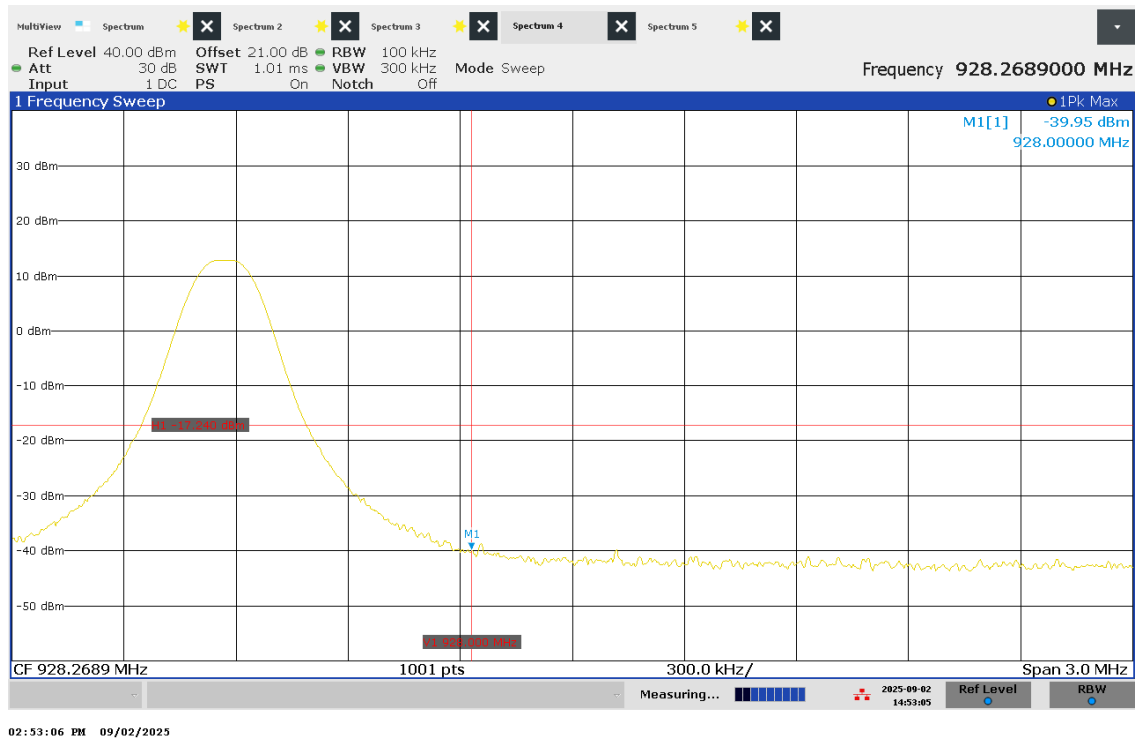


Figure 17 – -30dBc Band Edge - High Channel (Hoping Disabled)

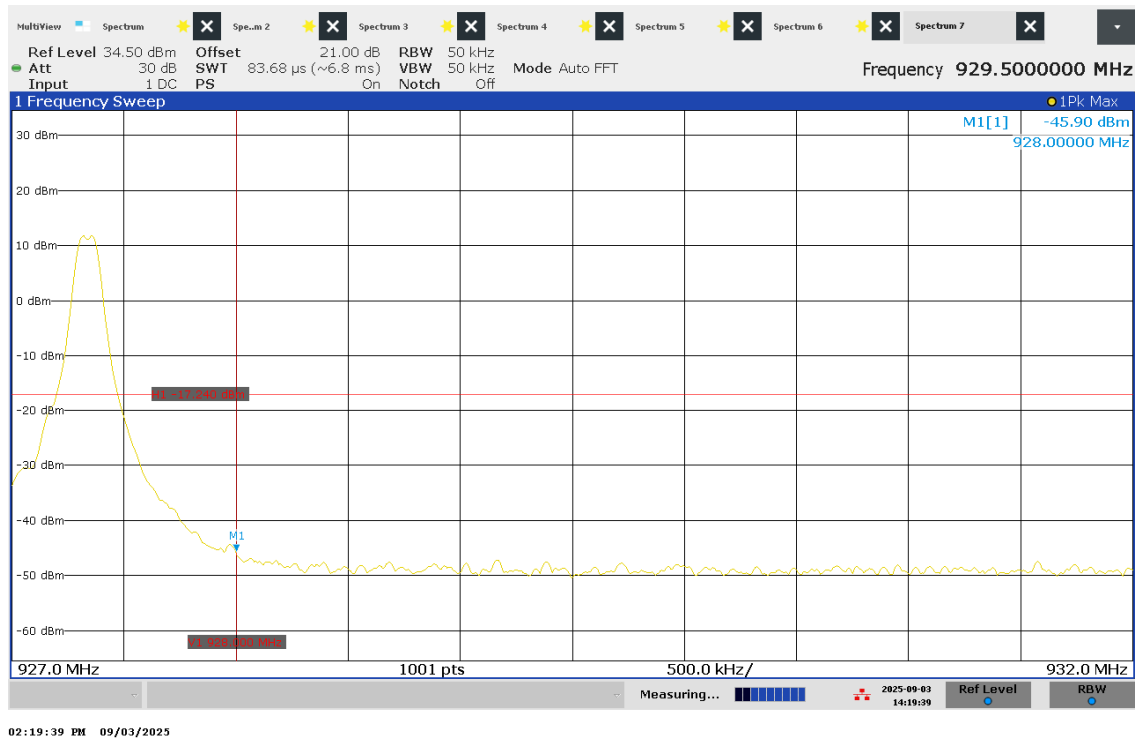


Figure 18 – -30dBc Band Edge - High Channel (Hoping Enabled)

3.6.4 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_58	EMI Receiver	Rohde & Schwarz	ESW 44	Mar 1, 2024	Mar 1, 2026
EQ_EMC_116	20 dB Attenuator SMA	Fairview Microwave	SA18E-20	NCR	NCR

3.7 Transmitter Spurious Radiated Emissions

Test Date: August 20, 2025
Temperature (°C) 25.8
Relative Humidity (%) 50.5
Barometric Pressure (kPa) 97.9

Initials: MX

3.7.1 Limits

Any radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the general radiated emission limits specified in FCC 15.209(a). Other emissions shall be at least 20dB below the highest level of the intentional transmitter.

Base Standard(s): FCC Subpart C 15.209 and RSS-Gen Section 8.9.

Frequency Range (MHz)	Field Strength Limit		Field Strength at 3m (dBμV/m)	Detector Type / Measurement Bandwidth
	μV/m	Distance		
0.009 – 0.150	2400/F(kHz)	300	128.5 – 104.1	Quasi-Peak‡ / 200Hz
0.150 – 0.490	2400/F(kHz)	300	104.1 – 93.8	Quasi-Peak‡ / 9kHz
0.490 – 1.705	24000/F(kHz)	30	73.8 – 63.0	Quasi-Peak / 9kHz
1.705 – 30	30	30	69.5	Quasi-Peak / 9kHz
30 – 88	100	3	40.0	Quasi-Peak / 120kHz
88 – 216	150	3	43.5	Quasi-Peak / 120kHz
216 – 960	200	3	46.0	Quasi-Peak / 120kHz
960 – 1000	500	3	54.0	Quasi-Peak / 120kHz
Above 1000	500	3	54.0	Average / 1MHz
Above 1000	5000	3	74.0	Peak / 1MHz

‡The emission limits below 1GHz shown in the above table are based on measurements employing a CISPR Quasi-Peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

As per ANSI C63.4 Section 4.2, if the Peak detector measurements do not exceed the Quasi-Peak limits, or Average limits where defined, then the DUT is considered to have passed the requirements.

3.7.2 Test Procedure

Tested according to ANSI C63.10 Section 6.3.

The device under test was setup inside a semi-anechoic chamber with remotely controlled turntable and antenna positioner at a 3m test distance. The DUT was placed on top of a 0.8m high non-conductive table above the reference ground plane for frequencies below 1GHz and 1.5m high for frequencies above 1GHz.

To determine the emission characteristics of the DUT, exploratory radiated emission scans were made while rotating the turntable 0° to 360° and using a Peak detector. The results were recorded in graphical form.

For each suspected emission, final measurements of the DUT radiated emissions with the Quasi-Peak, Average or Peak detector, as defined in the limit tables above, were made with the turntable azimuth rotated 0° to 360° and antenna height varied from 1m to 4m. The antenna was positioned to receive emissions in the vertical and horizontal polarizations such that the maximum radiated emission levels were detected.


As per FCC Part 15.33(a), the DUT was scanned to the 10th harmonic of the highest fundamental frequency.

3.7.3 Duty Cycle Correction Factor.

The transmitter has a maximum of 2 hops in every 100 ms (see Section 3.3 for details). Each hop occupies 15.5 ms. Duty Cycle Correction Factor (DCCF) for harmonics which falls in restricted bands is $20 \cdot \log((2 \cdot 15.5)/100) = -10.2 \text{ dB}$.


3.7.4 Test Results

Range:	9kHz to 30 MHz	Tx Frequency	927.35 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	XZ-Plane

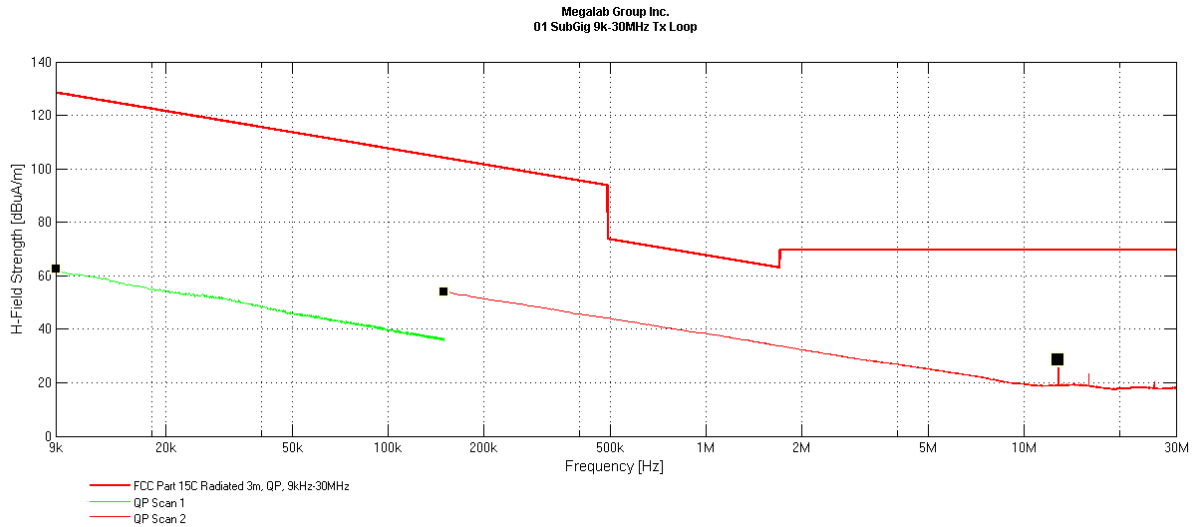


Remark: Quasi-Peak Emission Plot

Range:	30MHz to 1GHz	Tx Frequency	927.35 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Horizontal

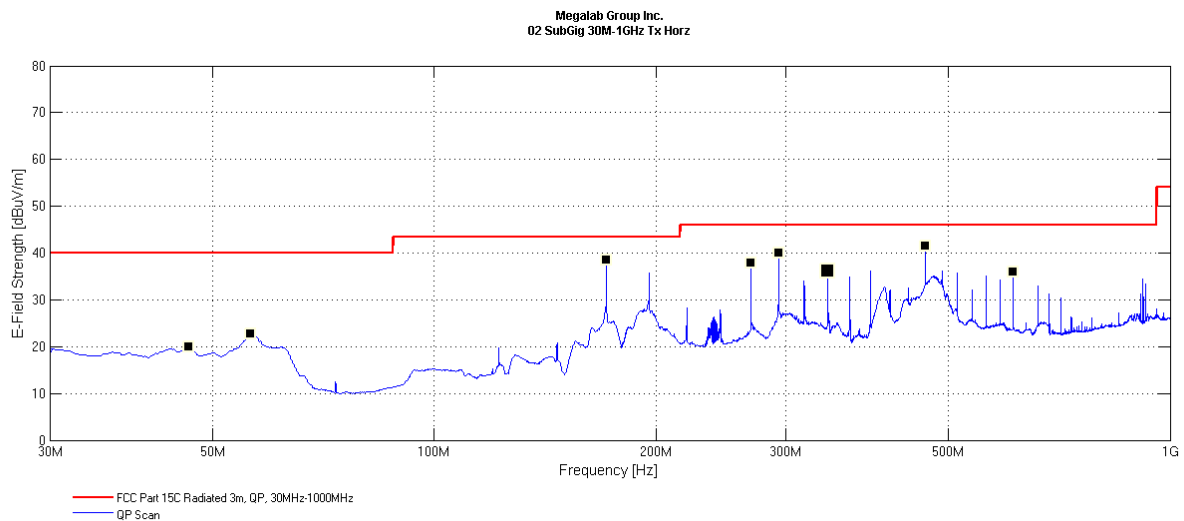

Remark: - Quasi-Peak Emission Plot
- A notch filter was used to filter out the fundamental

Range:	1GHz to 10GHz	Tx Frequency	927.35 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Horizontal

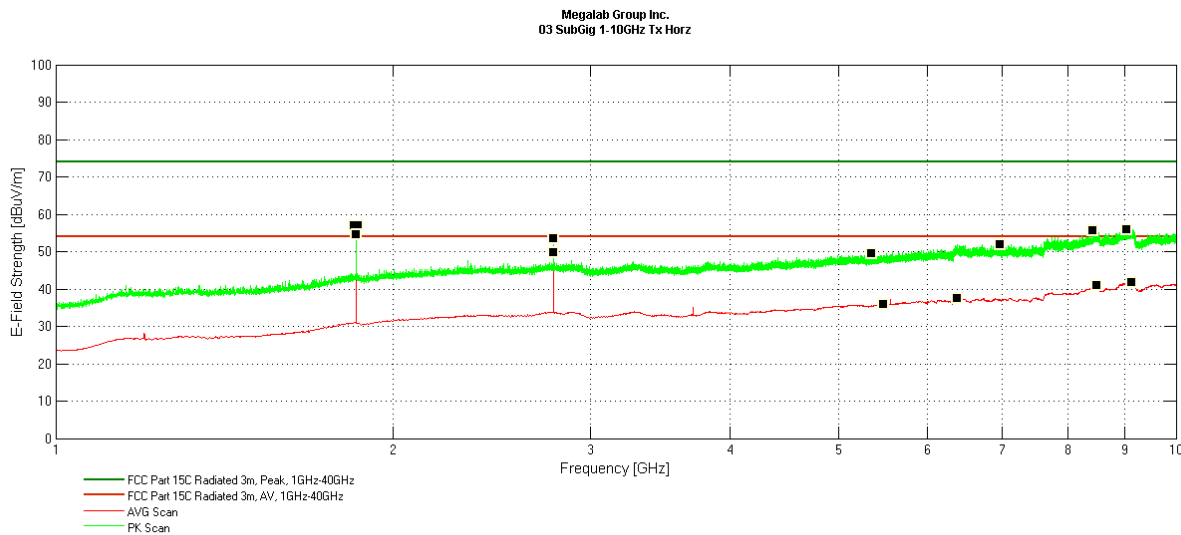

Remark: - **Peak** and **Average** Emission Plot


- A high pass filter was used to filter out the fundamental

Horizontal Antenna Polarization							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
465.10	QP	57.57	-16.02	41.55	46.00	4.45	Pass
171.40	QP	62.23	-23.76	38.47	43.50	5.03	Pass
293.80	QP	60.17	-20.24	39.93	46.00	6.07	Pass
269.25	QP	58.53	-20.71	37.82	46.00	8.18	Pass
342.65	QP	54.81	-18.68	36.13	46.00	9.87	Pass
612.05	QP	49.89	-13.92	35.97	46.00	10.03	Pass
2782.00	AVG	50.59	-0.82	39.57	54.00	14.43	Pass
2782.00	PEAK	54.31	-0.82	53.49	74.00	20.51	Pass

Note: Emissions at 1.855 GHz does not fall within the restricted bands listed in FCC 15.205 and RSS-Gen Tab 7. Thus, the limits are not applicable to this emission. A DCCF of -10.2 dB is applied to 2782.0 MHz emissions to arrive at the above AVG Emission Level.


Worst case position: Angle: 208 Deg
Height: 100 cm

Range:	30MHz to 1GHz	Tx Frequency	927.35 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Vertical

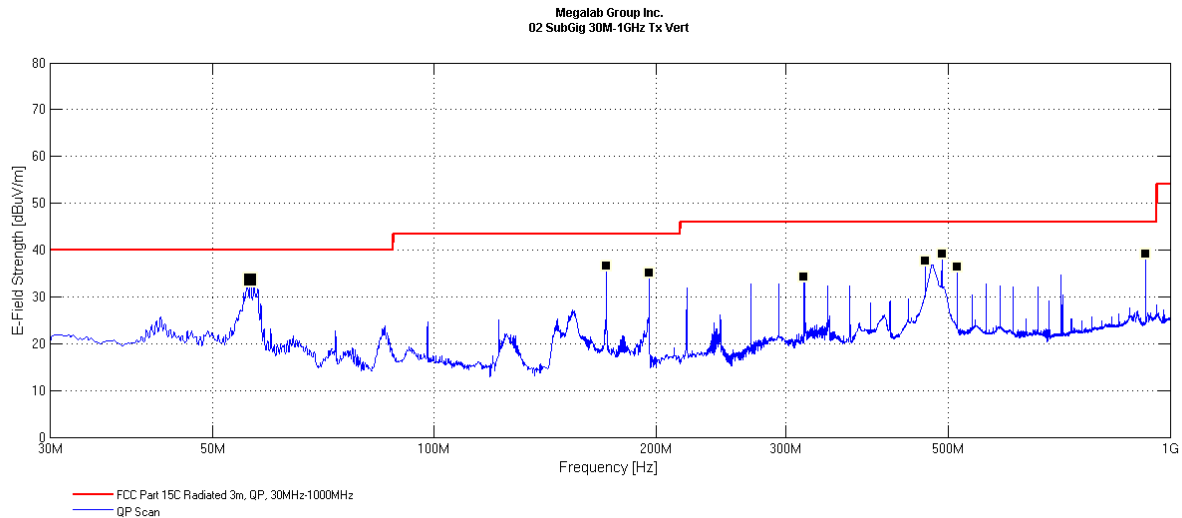

Remark: - Quasi-Peak Emission Plot
- A Notch filter was used to filter out the fundamental

Range:	1GHz to 10GHz	Tx Frequency	927.35 MHz
Test Voltage:	24Vac 60Hz	Antenna Polarization	Vertical

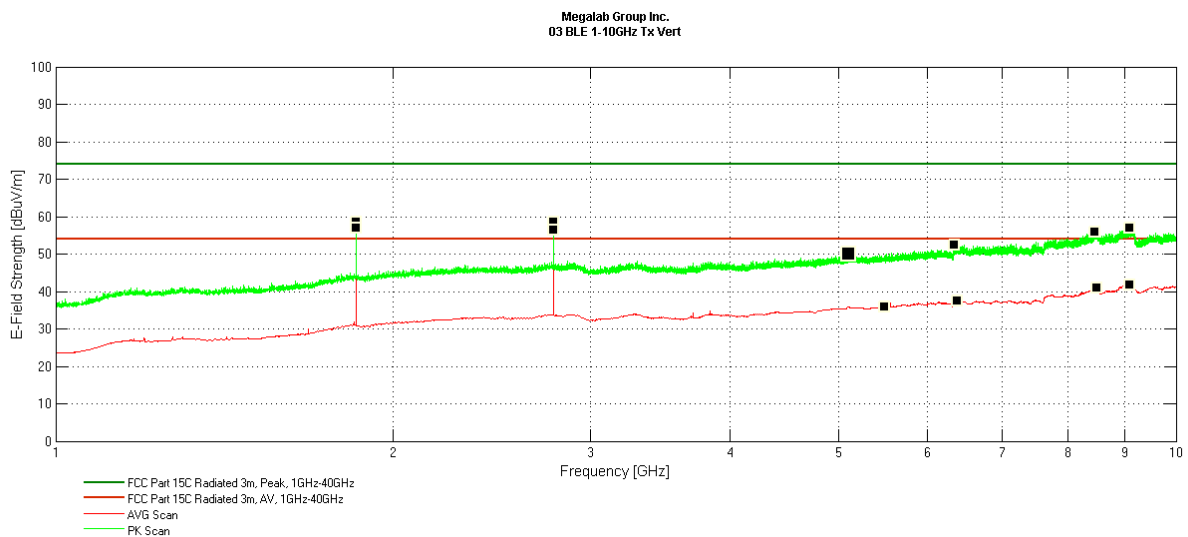

Remark: - **Peak** and **Average** Emission Plot
- A high pass filter was used to filter out the fundamental

Vertical Antenna Polarization							
Frequency (MHz)	Detector	Reading (dBμV)	Correction Factor (dB/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Test Result
56.25	QP	56.44	-22.94	33.50	40.00	6.50	Pass
171.40	QP	60.38	-23.76	36.62	43.50	6.88	Pass
195.80	QP	58.32	-23.23	35.09	43.50	8.41	Pass
489.65	QP	54.85	-15.68	39.17	46.00	6.83	Pass
927.20	QP	48.06	-8.85	39.21	46.00	6.79	Pass
465.10	QP	53.59	-16.02	37.57	46.00	8.43	Pass
318.20	QP	53.75	-19.56	34.19	46.00	11.81	Pass
514.05	QP	51.57	-15.21	36.36	46.00	9.64	Pass
2782.00	AVG	57.33	-0.82	46.31	54.00	7.69	Pass
2782.00	PEAK	59.41	-0.82	58.59	74.00	15.41	Pass

Note: Emissions at 1.855 GHz does not fall within the restricted bands listed in FCC 15.205 and RSS-Gen Tab 7. Thus, the limits are not applicable to this emission. A DCCF of -10.2 dB is applied to 2782.0 MHz emissions to arrive at the above AVG Emission Level.

Worst case position: Angle: 30 Deg
 Height: 150 cm

3.7.5 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration Date	Calibration Due
EQ_EMC_132	EMI Test Receiver (v6.91.2)	Gauss Instruments	TDEMI X40	Nov 29, 2023	Nov 29, 2025
EQ_EMC_48	Loop Antenna	Com-Power	AL-130R	Apr 9, 2024	Apr 9, 2026
EQ_EMC_59	BiLog Antenna	ETS Lindgren	3142E	Apr 19, 2024	Apr 19, 2026
EQ_EMC_60	Horn Antenna	ETS Lindgren	3117	Apr 9, 2024	Apr 9, 2026
EQ_EMC_68	6dB Attenuator	Fairview Microwave	SA3NS-06	Apr 19, 2024	Apr 19, 2026
EQ_EMC_85	RF Cable <1GHz	Times Microwave	LMR-400	NCR	NCR
EQ_EMC_75	RF Cable >1GHz	MegaPhase	EMC2	NCR	NCR
EQ_EMC_123	Preamplifier 30MHz-9GHz	RF Bay	EPA-250T	Jan 23, 2024	Jan 23, 2026
EQ_EMC_42	Preamplifier 1GHz-18GHz	Com-Power	PAM-118A	Jan 17, 2024	Jan 17, 2026
EQ_EMC_107	902MHz-928MHz Notch Filter	Micro-Tronics	BRC50722	NCR	NCR
EQ_EMC_110	1 GHz HPF Filter	Micro-Tronics	HPM50108	NCR	NCR
EQ_EMC_149	Emission Software RE/CE	Gauss Instruments	EMI64k v6.31.2	NCR	NCR

3.8 Power Line Conducted Emissions

Test Date:	September 24, 2025	Initials: MX
Temperature (°C)	25.1	
Relative Humidity (%)	54.1	
Barometric Pressure (kPa)	98.0	

The conducted emission test is to measure radio-frequency (RF) signals and noise emitted from electrical and electronic devices in the frequency range of 150kHz to 30MHz.

3.8.1 Limits

Base Standard(s): FCC Subpart C 15.207 and RSS-GEN Section 8.8.

Frequency Range (MHz)	Coupling Device	Detector Type / Bandwidth	Limit (dBμV)
0.15 to 0.50	LISN	Quasi-Peak / 9kHz	66 to 56*
0.50 to 5			56
5 to 30			60
0.15 to 0.50	LISN	Average / 9kHz	56 to 46*
0.50 to 5			46
5 to 30			50

* Decreases linearly with the logarithm of the frequency

As per ANSI C63.4 Section 4.2, if the Peak or Quasi-Peak detector measurements do not exceed the Average limits, then the DUT is considered to have passed the requirements.

3.8.2 Test Procedure

Tested according to ANSI C63.10 Section 6.2.

Conducted emissions were measured on the DUT's power port via an Artificial Mains Network (AMN), also known as Line Impedance Stabilization Network (LISN), and maximum conducted emissions are checked on all the DUT's AC lines in the frequency range of 150kHz to 30MHz. All other support equipment were powered via another LISN. The LISNs provide 50Ω/50μH of coupling impedance for the measuring receiver.

To determine the emission characteristics of the DUT, the conducted emission scans were made using a Peak detector and the results were recorded in graphical form.

For each suspected emission, final measurements of the DUT conducted emissions were made with the Quasi-Peak or Average detector as defined in the limits table above.

For Table-Top Equipment, the device under test is configured on a 0.8m high non-conductive table above the reference ground plane and 0.4m away from the vertical reference ground plane.

3.8.3 Setup Diagram


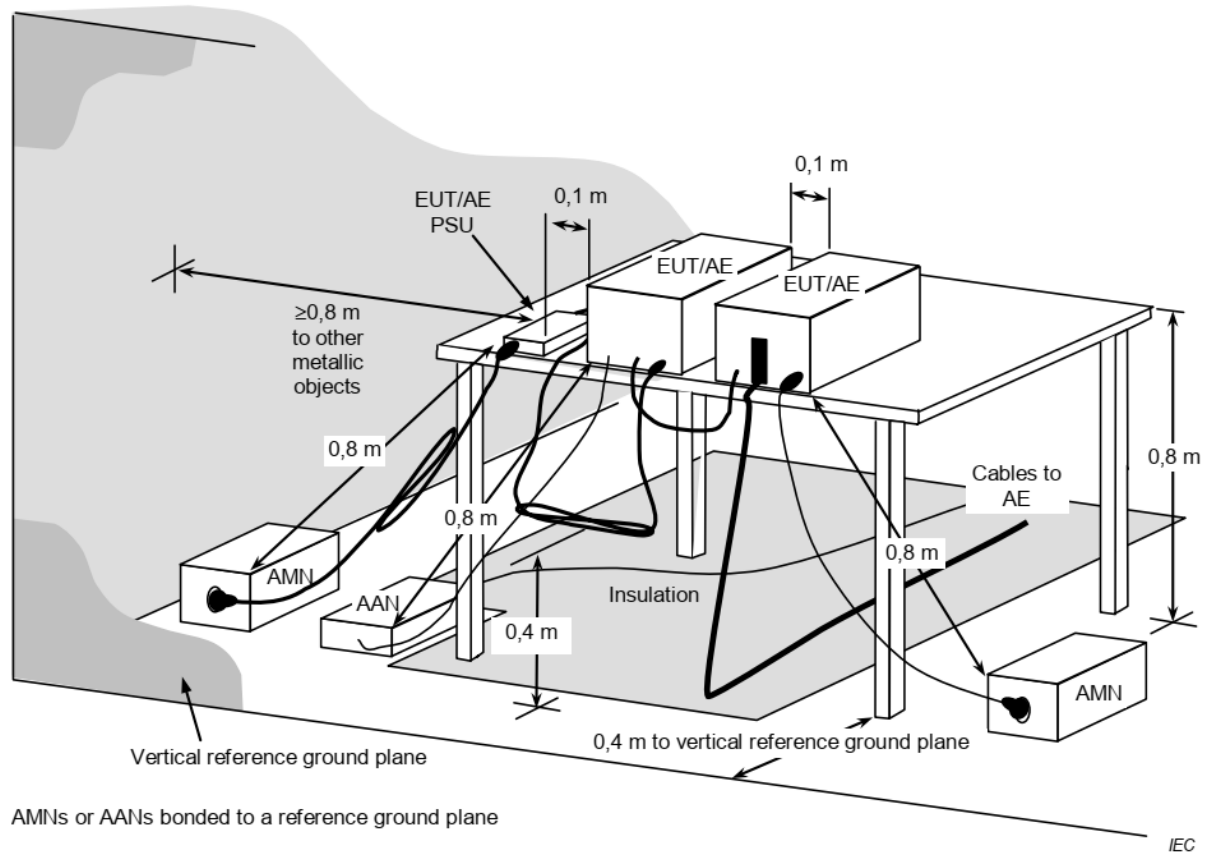


Figure 19 – Sample Measurement Arrangement for DUT

3.8.4 Test Results


Range:	150kHz to 30MHz	DUT	ECB601/WIFI
Test Voltage:	120Vac 60Hz	Phase	Line

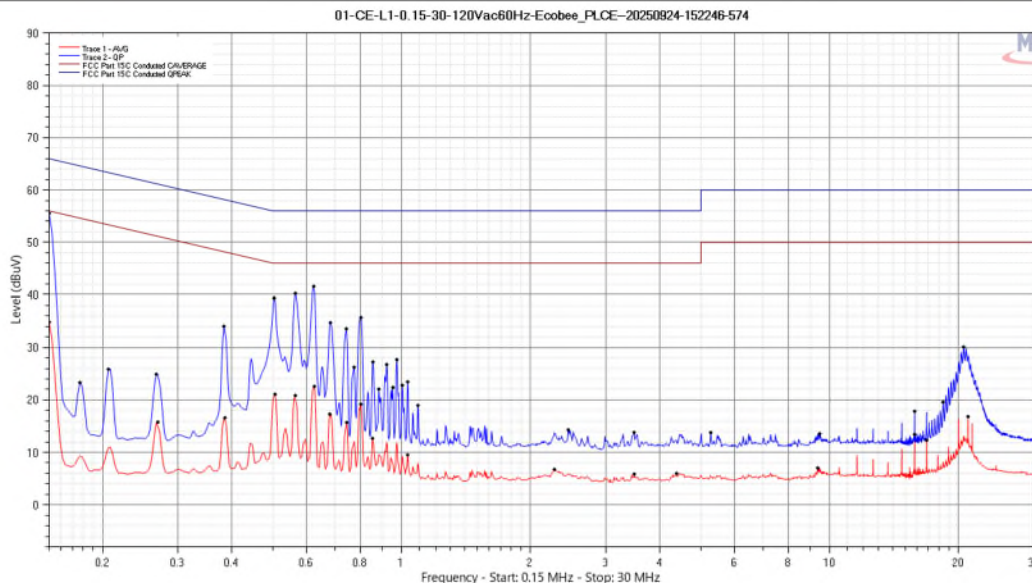

Remark: Quasi-Peak and Average Emission Plot

Line 1							
Frequency (MHz)	Detector	Reading (dBuV)	Correction Factor (dB)	Emissions Level (dBuV)	Limit (dBuV)	Margin (dB)	Test Result
0.15	CAVG	24.74	10.11	34.85	56	21.15	Pass
0.625	CAVG	12.5	10.08	22.58	46	23.42	Pass
0.505	CAVG	11.02	10.08	21.1	46	24.9	Pass
0.15	QP	45.45	10.11	55.56	66	10.44	Pass
0.622	QP	31.48	10.08	41.56	56	14.44	Pass
0.564	QP	30.15	10.08	40.23	56	15.77	Pass

Range:	150kHz to 30MHz	DUT	ECB601/WIFI
Test Voltage:	120Vac 60Hz	Phase	Neutral

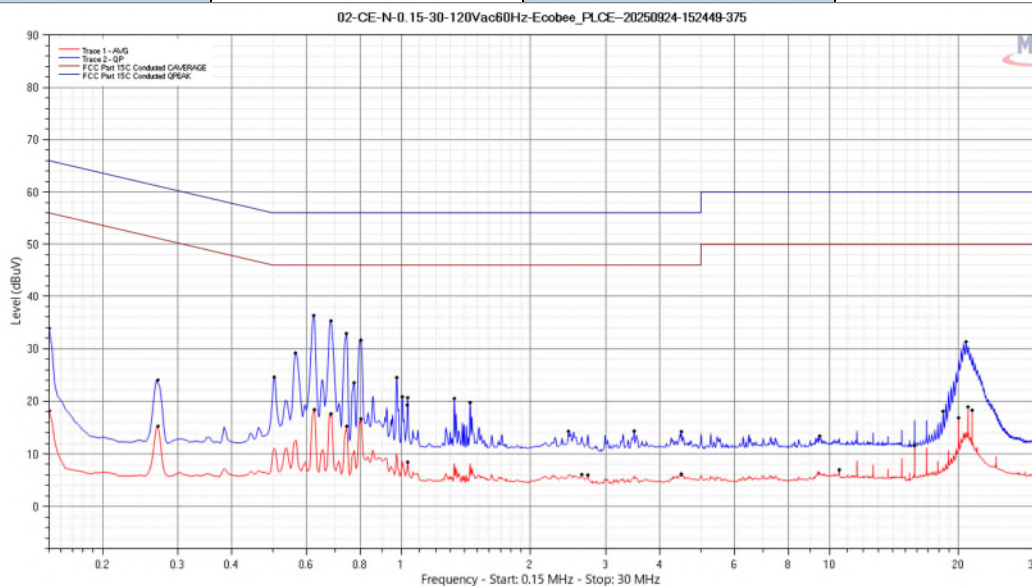

Remark: Peak Emission Plot

Neutral							
Frequency (MHz)	Detector	Reading (dBuV)	Correction Factor (dB)	Emissions Level (dBuV)	Limit (dBuV)	Margin (dB)	Test Result
0.625	CAVG	8.33	10.08	18.41	46	27.59	Pass
0.683	CAVG	7.55	10.08	17.63	46	28.37	Pass
0.802	CAVG	6.55	10.08	16.63	46	29.37	Pass
0.622	QP	26.23	10.08	36.31	56	19.69	Pass
0.683	QP	25.21	10.08	35.29	56	20.71	Pass
0.742	QP	22.79	10.08	32.87	56	23.13	Pass

3.8.5 Test Equipment List

Equipment ID	Description	Manufacturer	Model	Calibration/ (Verification) Date	Calibration/ (Verification) Due
EQ_EMC_58	EMI Receiver	Rohde & Schwarz	ESW 44	Mar 1, 2024	Mar 1, 2026
EQ_EMC_61	LISN	FCC	50/250-16-2-01	Jan 16, 2024	Jan 16, 2026
EQ_EMC_174	10dB Attenuator	Centric RF	C6N10-10	(Apr 2, 2025)	(Apr 2, 2026)
EQ_EMC_84	RF Cable	Times Microwave	LMR-400	(Apr 2, 2025)	(Apr 2, 2026)
EQ_EMC_195	Emissions Software	Megalab Group	Electro V3.1.3	NCR	NCR

----- End of Test Report -----