



FCC EMI TEST REPORT

FCC ID : WR92221123114
Equipment : thermostat
Brand Name : ecobee
Model Name : ECB402
Applicant : ecobee Inc.
207 Queens Quay West, Suite 600, Toronto, ON, Canada
Manufacturer : ecobee Inc.
207 Queens Quay West, Suite 600, Toronto, ON, Canada
Standard : FCC 47 CFR FCC Part 15 Subpart B

The product was received on Jan. 17, 2019 and testing was started from Feb. 27, 2019 and completed on Mar. 05, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1. Product Feature of Equipment Under Test	5
1.2. Modification of EUT	5
1.3. Test Location	5
1.4. Applicable Standards	5
2. Test Configuration of Equipment Under Test	6
2.1. Test Mode	6
2.2. Connection Diagram of Test System	6
2.3. Support Unit used in test configuration and system	7
2.4. EUT Operation Test Setup	7
3. Test Result 8	
3.1. Test of AC Conducted Emission Measurement	8
3.2. Test of Radiated Emission Measurement	10
4. List of Measuring Equipment.....	12
5. Uncertainty of Evaluation	13
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Emission Test Result	



History of this test report

Report No.	Version	Description	Issued Date
FC911708	01	Initial issue of report	Apr. 18, 2019



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.107	AC Conducted Emission	Pass	Under limit 21.76 dB at 3.984 MHz
3.2	15.109	Radiated Emission	Pass	Under limit 7.06 dB at 663.300 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Louis Wu

Report Producer: Polly Tsai

1. General Description

1.1. Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and Proprietary Sensor

Product Specification subjective to this standard	
Antenna Type	WLAN: Ceramic Chip Antenna Bluetooth: FPC Antenna Proprietary Sensor: IFA Meander Printed PCB Type Antenna

1.2. Modification of EUT

No modifications are made to the EUT during all test items.

1.3. Test Location

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH10-HY

FCC Designation No. TW1093 and TW1098

1.4. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + Sub-gigahertz on + Infrared on + PEK with Adapter
	Mode 2: Bluetooth Link + WLAN (5GHz) Link + Sub-gigahertz on + Infrared on + PEK with Adapter
Radiated Emissions	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + Sub-gigahertz on + Infrared on + PEK with Adapter
	Mode 2: Bluetooth Link + WLAN (5GHz) Link + Sub-gigahertz on + Infrared on + PEK with Adapter
Remark: 1. The worst case of AC is mode 2; only the test data of this mode was reported. 2. The worst case of RE is mode 1; only the test data of this mode was reported.	

2.2. Connection Diagram of Test System

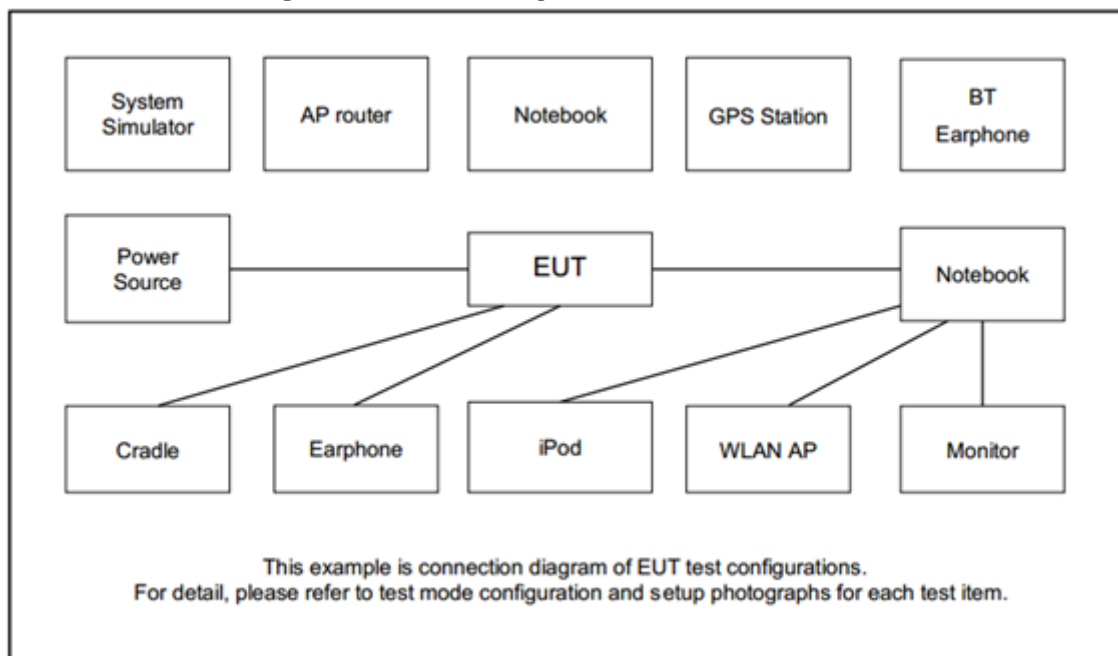

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Adapter	Jameco	ADU240050	FCC DoC	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was attached to the Bluetooth base station and WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Turn on Sub-gigahertz to transmit 920.2 MHz signals continuously.
2. Turn on Infrared function.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

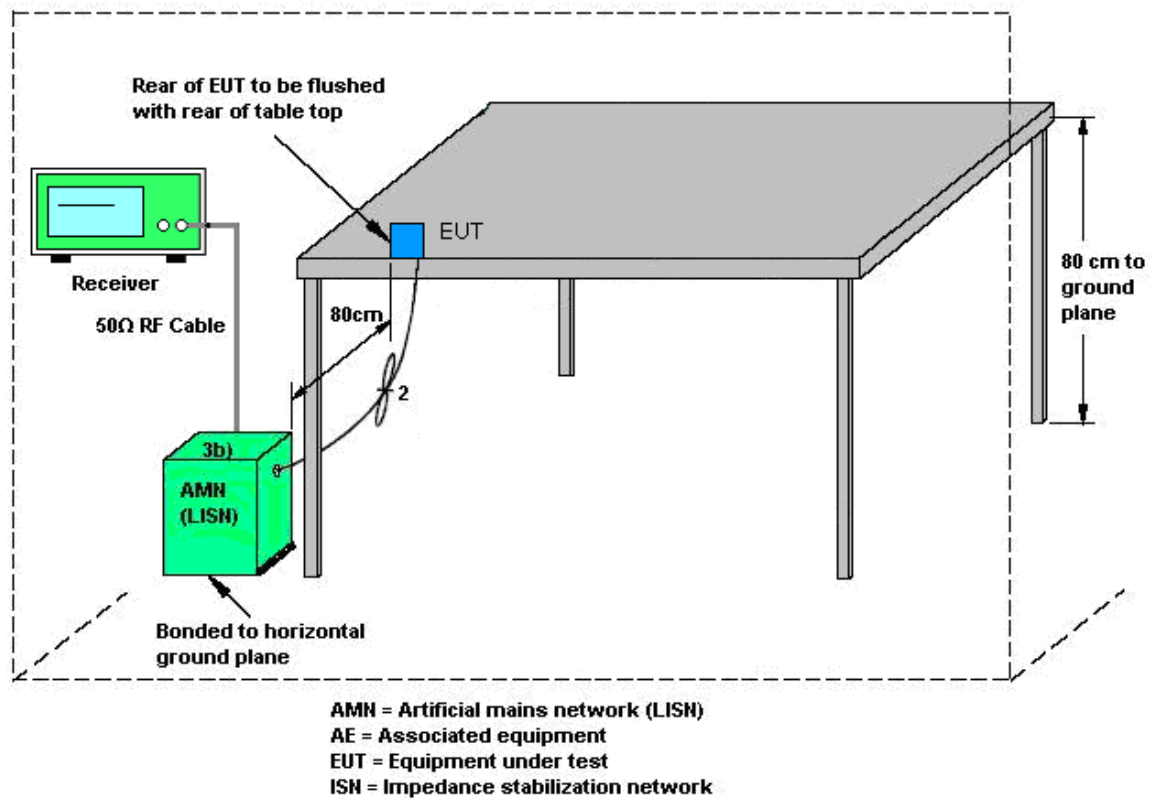

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

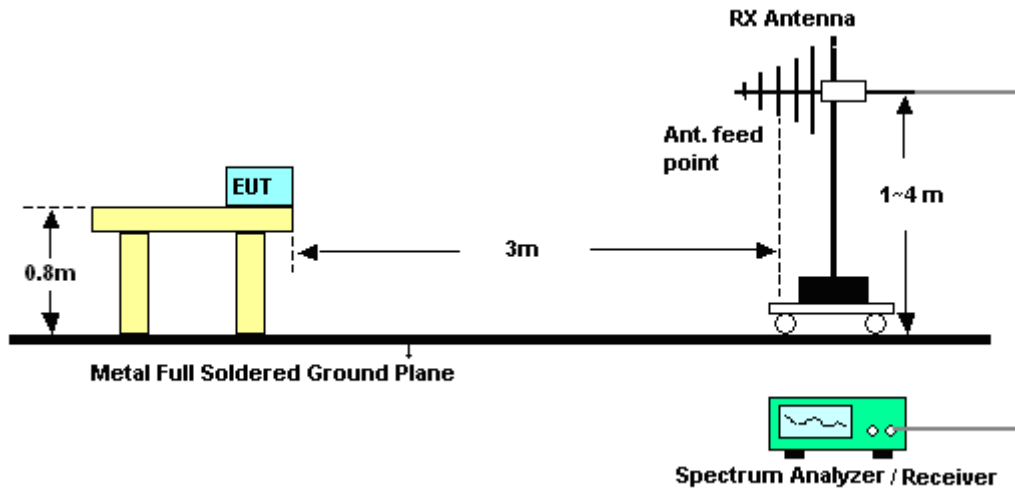

For radiated emissions above 1GHz

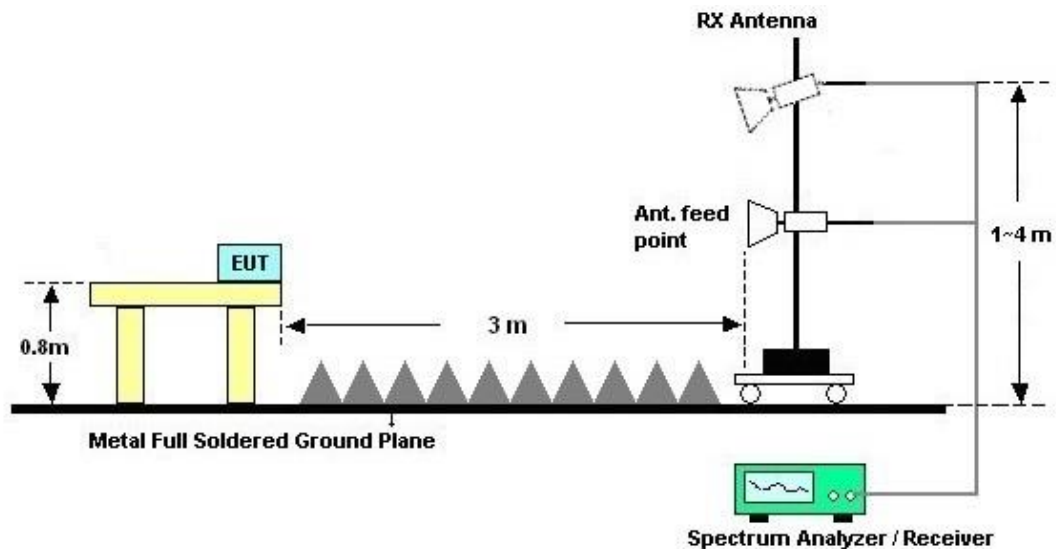

3.2.5. Test Result of Radiated Emission

Please refer to Appendix B.

4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 05, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9KHz~3.6GHz	Nov. 12, 2018	Mar. 05, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Mar. 05, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Mar. 05, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 05, 2019	N/A	Conduction (CO05-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Sep. 14, 2018	Mar. 05, 2019	Sep. 13, 2019	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Nov. 08, 2018	Mar. 05, 2019	Nov. 07, 2019	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 23, 2018	Feb. 27, 2019~ Feb. 28, 2019	Oct. 22, 2019	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35413&02	30MHz~1GHz	Feb. 12, 2019	Feb. 27, 2019~ Feb. 28, 2019	Feb. 11, 2020	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-132 5	1GHz ~ 18GHz	Oct. 02, 2018	Feb. 27, 2019~ Feb. 28, 2019	Oct. 01, 2019	Radiation (03CH10-HY)
Preamplifier	Jet-Power	JAP00101800 -30-10P	160118550 004	1GHz~18GHz	Apr. 17, 2018	Feb. 27, 2019~ Feb. 28, 2019	Apr. 16, 2019	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 85	10Hz ~ 44GHz	Nov. 02, 2018	Feb. 27, 2019~ Feb. 28, 2019	Nov. 01, 2019	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 27, 2019~ Feb. 28, 2019	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Feb. 27, 2019~ Feb. 28, 2019	N/A	Radiation (03CH10-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Feb. 27, 2019~ Feb. 28, 2019	N/A	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY541300 85	20Hz ~ 8.4GHz	Nov. 01, 2018	Feb. 27, 2019~ Feb. 28, 2019	Oct. 31, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/ 4PE, MY11693/ 4PE, MY2855/2	30M-1G	Nov. 08, 2018	Feb. 27, 2019~ Feb. 28, 2019	Nov. 07, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/ 4PE, MY11693/ 4PE, MY2855/2	1G-18G	Nov. 08, 2018	Feb. 27, 2019~ Feb. 28, 2019	Nov. 07, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Oct. 16, 2018	Feb. 27, 2019~ Feb. 28, 2019	Oct. 15, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Oct. 16, 2018	Feb. 27, 2019~ Feb. 28, 2019	Oct. 15, 2019	Radiation (03CH10-HY)

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
--	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.9
--	-----




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Jimmy Chang	Temperature :	24~26℃
		Relative Humidity :	51~53%

EUT Information

Report NO : 911708
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

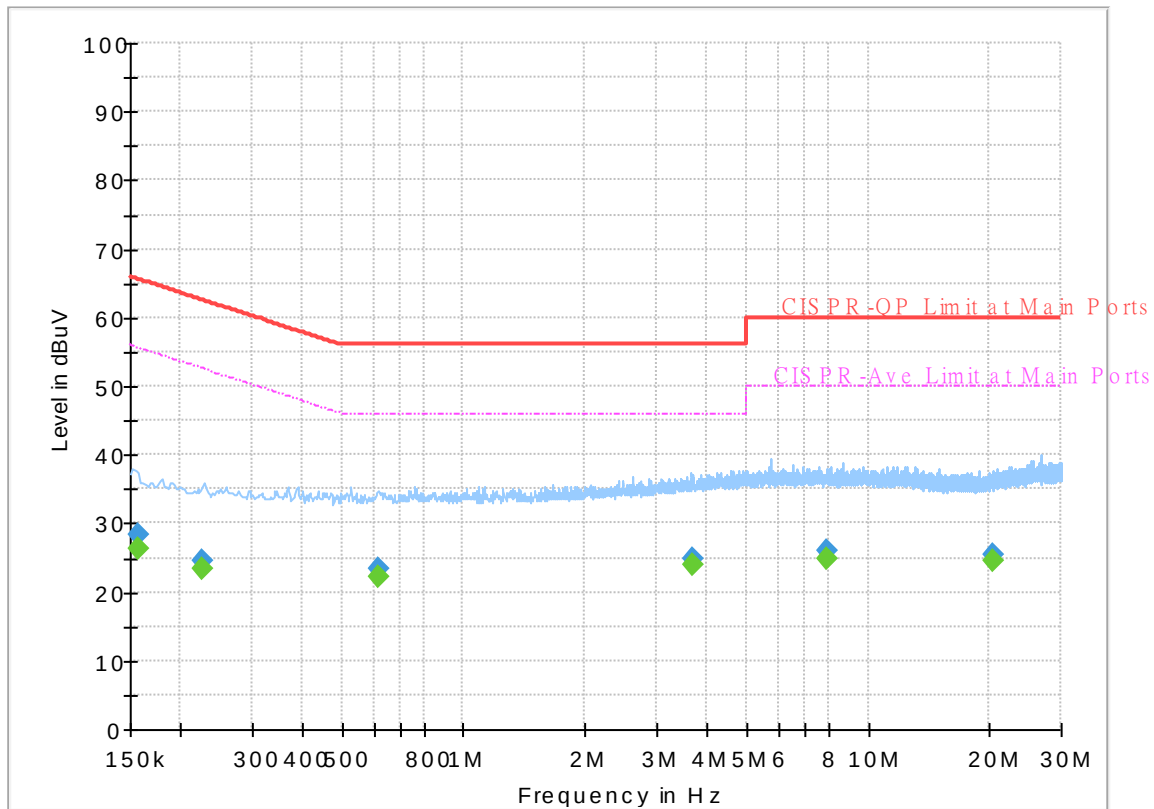


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	26.35	55.63	29.28	L1	OFF	19.5
0.156750	28.22	---	65.63	37.41	L1	OFF	19.5
0.226500	---	23.37	52.58	29.21	L1	OFF	19.5
0.226500	24.46	---	62.58	38.12	L1	OFF	19.5
0.618000	---	22.31	46.00	23.69	L1	OFF	19.6
0.618000	23.46	---	56.00	32.54	L1	OFF	19.6
3.696000	---	24.04	46.00	21.96	L1	OFF	19.7
3.696000	24.91	---	56.00	31.09	L1	OFF	19.7
7.941750	---	24.98	50.00	25.02	L1	OFF	19.8
7.941750	26.09	---	60.00	33.91	L1	OFF	19.8
20.323500	---	24.43	50.00	25.57	L1	OFF	20.3
20.323500	25.40	---	60.00	34.60	L1	OFF	20.3

EUT Information

Report NO : 911708
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

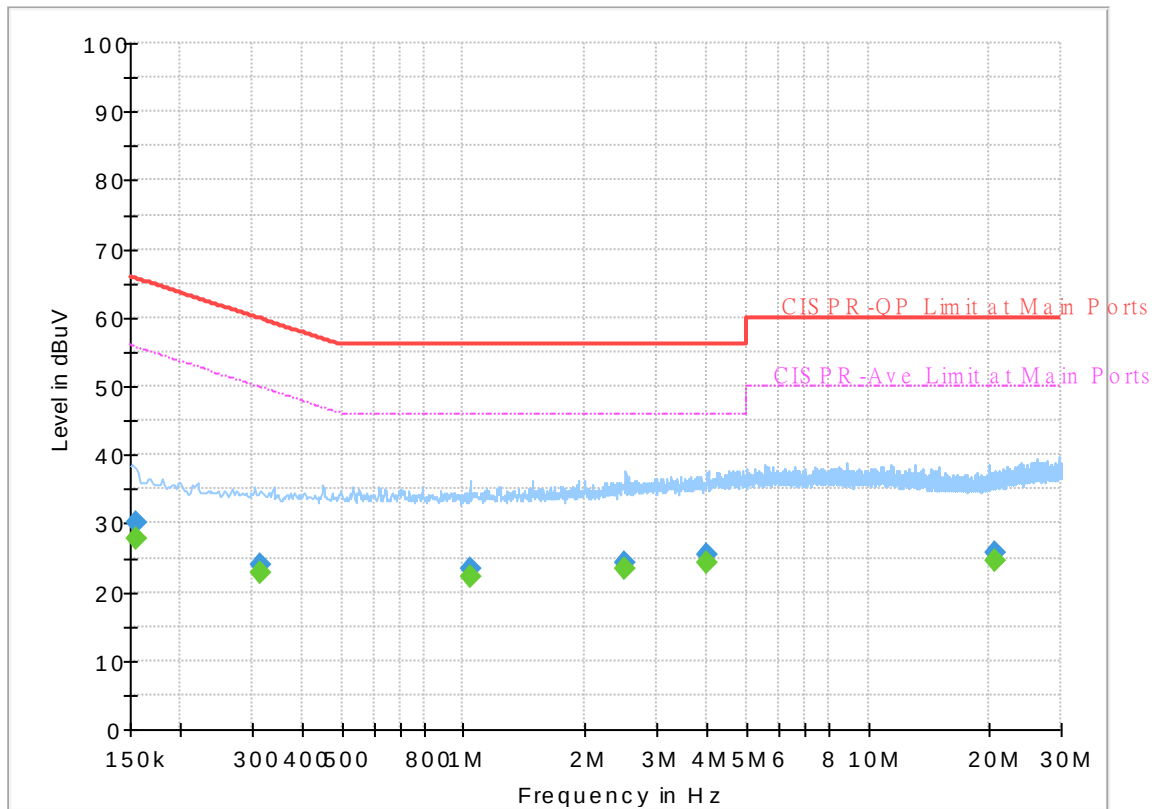


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	27.89	55.75	27.86	N	OFF	19.5
0.154500	30.07	---	65.75	35.68	N	OFF	19.5
0.314250	---	22.75	49.86	27.11	N	OFF	19.5
0.314250	23.99	---	59.86	35.87	N	OFF	19.5
1.041000	---	22.33	46.00	23.67	N	OFF	19.6
1.041000	23.36	---	56.00	32.64	N	OFF	19.6
2.514750	---	23.36	46.00	22.64	N	OFF	19.6
2.514750	24.24	---	56.00	31.76	N	OFF	19.6
3.984000	---	24.24	46.00	21.76	N	OFF	19.7
3.984000	25.43	---	56.00	30.57	N	OFF	19.7
20.481000	---	24.51	50.00	25.49	N	OFF	20.3
20.481000	25.61	---	60.00	34.39	N	OFF	20.3



Appendix B. Radiated Emission Test Result

Test Engineer :	Yu Wang	Temperature :	22~24°C
		Relative Humidity :	53~56%
Test Distance :	3m	Polarization :	Horizontal
Remark:	#7 is fundamental signal which can be ignored.		

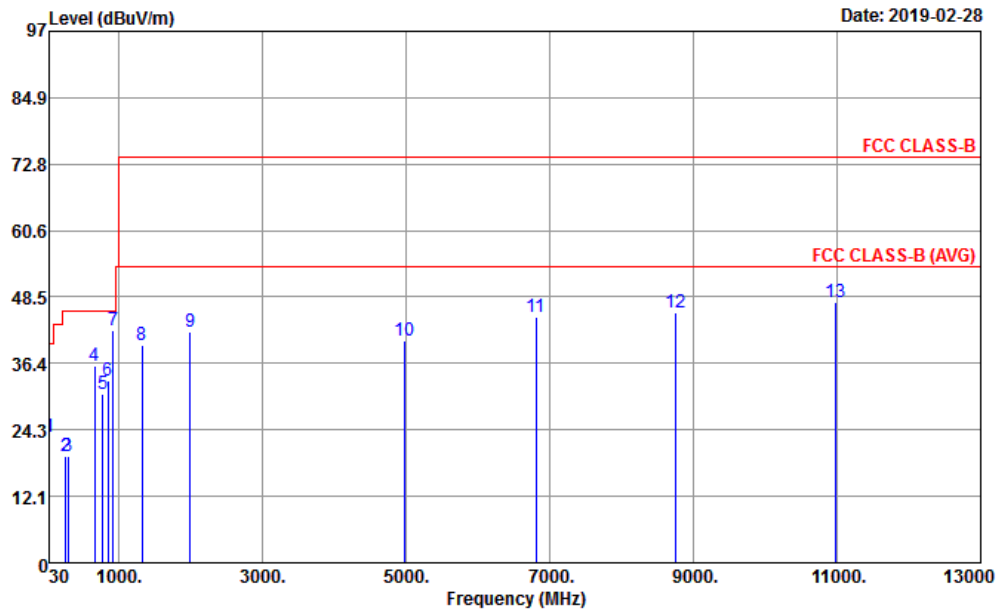


Site : 03CH10-HY
Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL
Project : 911708
Power : 120Vac/60Hz
Mode : 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.27	22.93	-17.07	40.00	30.10	25.16	0.45	32.78	---	---	Peak
2	258.15	19.51	-26.49	46.00	30.62	19.70	1.79	32.60	---	---	Peak
3	289.20	19.42	-26.58	46.00	31.05	19.08	1.90	32.61	---	---	Peak
4	663.30	36.07	-9.93	46.00	39.21	26.50	2.99	32.63	100	0	Peak
5	773.90	30.80	-15.20	46.00	31.64	28.38	3.20	32.42	---	---	Peak
6	848.10	33.24	-12.76	46.00	32.72	29.26	3.37	32.11	---	---	Peak
7	920.20	42.32			41.08	29.40	3.46	31.62	---	---	Peak
8	1326.00	39.62	-34.38	74.00	71.21	25.60	4.44	61.63	---	---	Peak
9	1990.00	42.16	-31.84	74.00	72.00	25.86	6.00	61.70	---	---	Peak
10	4976.00	40.66	-33.34	74.00	62.77	31.20	8.99	62.30	---	---	Peak
11	6806.00	44.89	-29.11	74.00	63.17	34.60	10.49	63.37	---	---	Peak
12	8758.00	45.57	-28.43	74.00	60.64	37.62	11.72	64.41	---	---	Peak
13	10974.00	47.48	-26.52	74.00	58.04	40.07	13.20	63.83	100	0	Peak



Test Engineer :	Yu Wang	Temperature :	22~24°C
		Relative Humidity :	53~56%
Test Distance :	3m	Polarization :	Vertical
Remark:	#7 is fundamental signal which can be ignored.		

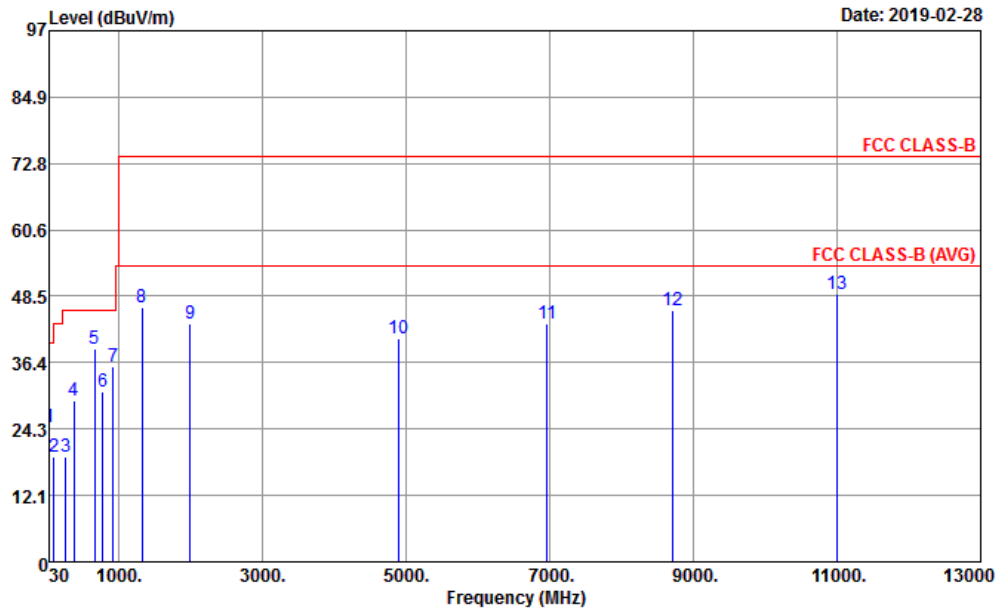

Site : 03CH10-HY
Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL
Project : 911708
Power : 120Vac/60Hz
Mode : 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.54	24.56	-15.44	40.00	31.86	25.03	0.45	32.78	---	---	Peak
2	98.31	19.12	-24.38	43.50	34.87	15.80	1.12	32.67	---	---	Peak
3	257.88	19.29	-26.71	46.00	30.44	19.66	1.79	32.60	---	---	Peak
4	375.60	29.36	-16.64	46.00	38.93	20.92	2.13	32.62	---	---	Peak
5	663.30	38.94	-7.06	46.00	42.08	26.50	2.99	32.63	100	0	Peak
6	773.20	30.94	-15.06	46.00	31.80	28.36	3.20	32.42	---	---	Peak
7	920.20	35.55			34.31	29.40	3.46	31.62	---	---	Peak
8	1326.00	46.37	-27.63	74.00	77.96	25.60	4.44	61.63	---	---	Peak
9	1990.00	43.43	-30.57	74.00	73.27	25.86	6.00	61.70	---	---	Peak
10	4888.00	40.91	-33.09	74.00	63.44	31.02	8.75	62.30	---	---	Peak
11	6966.00	43.45	-30.55	74.00	61.35	35.26	10.40	63.56	---	---	Peak
12	8710.00	46.06	-27.94	74.00	61.33	37.44	11.64	64.35	---	---	Peak
13	11000.00	48.91	-25.09	74.00	59.39	40.10	13.22	63.80	100	0	Peak

—————THE END—————