

---

# FCC Part 90 Test Report

---

Report No.: AGC01570141102FE09

**FCC ID** : WRYHC-5256U  
**PRODUCT DESIGNATION** : Handheld Two Way Radio  
**BRAND NAME** : Havoc  
**MODEL NAME** : HC-5256U, HC-A1, HC-A1U  
**CLIENT** : EKL Imports LLC  
**DATE OF ISSUE** : Nov.12, 2014  
**STANDARD(S)** : FCC Part 90 Rules  
**REPORT VERSION** : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:** This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



### Report Revise Record

| Report Version | Revise Time | Issued Date  | Valid Version | Notes           |
|----------------|-------------|--------------|---------------|-----------------|
| V1.0           | /           | Nov.12, 2014 | Valid         | Original Report |

## VERIFICATION OF COMPLIANCE

|                                |                                                                                               |
|--------------------------------|-----------------------------------------------------------------------------------------------|
| <b>Applicant:</b>              | EKL Imports LLC                                                                               |
|                                | PO Box 1997 Gig Harbor WA 98335 USA                                                           |
| <b>Manufacturer:</b>           | Juston Electronic Equipment Co., Ltd.                                                         |
|                                | No.115-119, Yuntai 3rd Road, Jiangnan Hi-tech Park, Licheng District, Quanzhou, China, 362000 |
| <b>Product Designation:</b>    | Handheld Two Way Radio                                                                        |
| <b>Brand Name:</b>             | Havoc                                                                                         |
| <b>Test Model</b>              | HC-5256U                                                                                      |
| <b>Series Model:</b>           | HC-A1, HC-A1U                                                                                 |
| <b>Difference description:</b> | All the same except for the model name.                                                       |
| <b>Date of Test:</b>           | Nov.05, 2014 to Nov.11, 2014                                                                  |

## WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2009. The sample tested as described in this report is in compliance with the FCC Rules Part 90 requirements

The test results of this report relate only to the tested sample identified in this report.

Tested by




Freddie Duan Nov.12, 2014

Checked By



Kidd Yang Nov.12, 2014

Authorized By



Solger Zhang Nov.12, 2014

## TABLE OF CONTENTS

|                                                                    |           |
|--------------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                                 | <b>6</b>  |
| 1.1 PRODUCT DESCRIPTION .....                                      | 6         |
| 1.2 RELATED SUBMITTAL(S) / GRANT (S) .....                         | 7         |
| 1.3 TEST METHODOLOGY .....                                         | 7         |
| 1.4 TEST FACILITY .....                                            | 7         |
| 1.5 SPECIAL ACCESSORIES .....                                      | 7         |
| 1.6 EQUIPMENT MODIFICATIONS.....                                   | 7         |
| <b>2. SYSTEM TEST CONFIGURATION .....</b>                          | <b>8</b>  |
| 2.1 EUT CONFIGURATION.....                                         | 8         |
| 2.2 EUT EXERCISE .....                                             | 8         |
| 2.3 GENERAL TECHNICAL REQUIREMENTS .....                           | 8         |
| 2.4 CONFIGURATION OF TESTED SYSTEM.....                            | 8         |
| 2.5. SUMMARY OF TEST RESULTS .....                                 | 9         |
| <b>3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION .....</b> | <b>10</b> |
| <b>4. DESCRIPTION OF TEST MODES.....</b>                           | <b>11</b> |
| <b>5. CONDUCTED LIMITS.....</b>                                    | <b>12</b> |
| 5.1 PROVISIONS APPLICABLE .....                                    | 12        |
| 5.2 MEASUREMENT PROCEDURE .....                                    | 12        |
| 5.3 TEST SETUP BLOCK DIAGRAM.....                                  | 13        |
| 5.4 TEST RESULT .....                                              | 14        |
| <b>6. FREQUENCY TOLERANCE.....</b>                                 | <b>16</b> |
| 6.1 PROVISIONS APPLICABLE .....                                    | 16        |
| 6.2 MEASUREMENT PROCEDURE .....                                    | 16        |
| 6.3 TEST SETUP BLOCK DIAGRAM .....                                 | 17        |
| 6.4 TEST RESULT .....                                              | 18        |
| <b>7. EMISSION BANDWIDTH.....</b>                                  | <b>21</b> |
| 7.1 PROVISIONS APPLICABLE .....                                    | 21        |
| 7.2 MEASUREMENT PROCEDURE .....                                    | 21        |
| 7.3 TEST SETUP BLOCK DIAGRAM.....                                  | 21        |
| 7.4 MEASUREMENT RESULT .....                                       | 22        |
| <b>8. UNWANTED RADIATION .....</b>                                 | <b>23</b> |
| 8.1 PROVISIONS APPLICABLE .....                                    | 23        |
| 8.2 MEASUREMENT PROCEDURE .....                                    | 23        |
| 8.3 TEST SETUP BLOCK DIAGRAM.....                                  | 24        |

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| 8.4 MEASUREMENT RESULTS: .....                                      | 26        |
| <b>9. MODULATION CHARACTERISTICS .....</b>                          | <b>29</b> |
| 9.1 PROVISIONS APPLICABLE .....                                     | 29        |
| 9.2 MEASUREMENT METHOD .....                                        | 29        |
| 9.3 MEASUREMENT RESULT .....                                        | 30        |
| <b>10. MAXIMUM TRANSMITTER POWER .....</b>                          | <b>33</b> |
| 10.1 PROVISIONS APPLICABLE .....                                    | 33        |
| 10.2 TEST PROCEDURE .....                                           | 33        |
| 10.3 TEST CONFIGURATION .....                                       | 33        |
| 10.4 TEST RESULT .....                                              | 35        |
| 10.5 CONDUCT SPURIOUS PLOT .....                                    | 36        |
| <b>11. TRANSMITTER FREQUENCY BEHAVIOR .....</b>                     | <b>37</b> |
| 11.1 PROVISIONS APPLICABLE .....                                    | 37        |
| 11.2 TEST METHOD .....                                              | 37        |
| 11.3 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR .....    | 37        |
| 11.4 MEASURE RESULT .....                                           | 39        |
| <b>12. RADIATED EMISSION ON RECEIVING MODE .....</b>                | <b>40</b> |
| 12.1 PROVISIONS APPLICABLE .....                                    | 40        |
| 12.2 TEST METHOD .....                                              | 40        |
| 12.3 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)..... | 41        |
| <b>13. AUDIO LOW PASS FILTER RESPONSE .....</b>                     | <b>45</b> |
| 13.1 LIMITS .....                                                   | 45        |
| 13.2. METHOD OF MEASUREMENTS .....                                  | 45        |
| 13.3 TEST DATA .....                                                | 46        |
| <b>APPENDIX I: PHOTOGRAPHS OF SETUP .....</b>                       | <b>48</b> |
| <b>APPENDIX II: EXTERNAL VIEW OF EUT .....</b>                      | <b>50</b> |

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

The EUT is a Handheld Two Way Radio designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

|                                       |                                                                                       |
|---------------------------------------|---------------------------------------------------------------------------------------|
| Communication Type                    | Voice / Tone only                                                                     |
| Modulation                            | FM                                                                                    |
| Emission Type                         | 10K3F3E                                                                               |
| Emission Bandwidth                    | 10.30KHz                                                                              |
| Peak Frequency Deviation              | 1.86KHz                                                                               |
| Audio Frequency Response              | 10.88dB                                                                               |
| Maximum Transmitter Power             | 36.97dBm                                                                              |
| Output power Modification             | 5W<br>(It was fixed by the manufacturer, any individual can't arbitrarily change it.) |
| Antenna Designation                   | Detachable                                                                            |
| Power Supply                          | DC 7.4V, 1600mAh (by battery)                                                         |
| Adapter Parameter                     | Input: 100-240V, 50/60HZ, 0.3A<br>Output: 12V, 0.5A                                   |
| Limiting Voltage                      | DC 6.29V-DC 8.51V                                                                     |
| Operation Frequency Range and Channel | Frequency Range: 400MHz to 470MHz<br>Channel Separation: 12.5KHz                      |
|                                       | Bottom Channel: 400.025MHz<br>Centre Channel: 435.000MHz<br>Top Channel: 469.975MHz   |
| Frequency Tolerance                   | 0.870ppm                                                                              |

## **1.2 RELATED SUBMITTAL(S) / GRANT (S)**

This submittal(s) (test report) is intended for **FCC ID:** WRYHC-5256U, filing to comply with the FCC Part 90 requirements and the.

## **1.3 TEST METHODOLOGY**

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2009; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

## **1.4 TEST FACILITY**

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance (Shenzhen) Co., Ltd. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and IC requirements in documents RS212.

FCC register No.: 259865

## **1.5 SPECIAL ACCESSORIES**

Not available for this EUT intended for grant.

## **1.6 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

## **2. SYSTEM TEST CONFIGURATION**

### **2.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT EXERCISE**

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### **2.3 GENERAL TECHNICAL REQUIREMENTS**

For FCC Part 90 requirements:

- (1). Section 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area
- (2). Section 90.207: Modulation Characteristic
- (3). Section 90.209: Occupied Bandwidth
- (4). Section 90.210: Emission Mask
- (5). Section 90.213: Frequency Tolerance
- (6). Section 90.214: Transient Frequency Behavior

### **2.4 CONFIGURATION OF TESTED SYSTEM**

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

| Item | Equipment              | Model No. | Identifier          | Note |
|------|------------------------|-----------|---------------------|------|
| 1    | Handheld Two Way Radio | HC-5256U  | FCC ID: WRYHC-5256U | EUT  |

## 2.5. SUMMARY OF TEST RESULTS

| FCC Rules | Description Of Test          | Result    |
|-----------|------------------------------|-----------|
| §90.205   | Maximum Transmitter Power    | Compliant |
| §90.207   | Modulation Characteristic    | Compliant |
| §90.209   | Occupied Bandwidth           | Compliant |
| §90.210   | Emission Mask                | Compliant |
| §90.213   | Frequency Tolerance          | Compliant |
| §90.214   | Transient Frequency Behavior | Compliant |

**3. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION**

|                   |                                                                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Site</b>       | Attestation of Global Compliance (Shenzhen) Co., Ltd                                                                                      |
| <b>Location 1</b> | 2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China          |
| <b>Location 2</b> | B112-B113 , Building 12, Baoan Building Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen, Guangdong, P.R.China |

**LIST OF EQUIPMENTS USED**

| NAME OF EQUIPMENT       | MANUFACTURER      | MODEL       | SERIAL NUMBER | Cal. Date  | Cal. Due   |
|-------------------------|-------------------|-------------|---------------|------------|------------|
| TEST RECEIVER           | R&S               | ESCI        | N/A           | 07/25/2014 | 07/24/2015 |
| LISN                    | R&S               | ESH3-Z5     | N/A           | 09/05/2014 | 09/04/2015 |
| CLIMATE CHAMBER         | EXPERY            | TN-400      | N/A           | 07/25/2014 | 07/24/2015 |
| ATTENUATOR              | WEINSCHEL CORP    | 58-30-33    | ML030         | 07/25/2014 | 07/24/2015 |
| DC POWER SUPPLY         | ZHAOXIN           | RXN-605D    | N/A           | 07/25/2014 | 07/24/2015 |
| SPECTRUM ANALYZER       | AGILENT           | N9010A      | MY53470504    | 10/21/2014 | 10/20/2015 |
| MODULATION ANALYZER     | HP                | 8920B       | 3104A03367    | 07/16/2014 | 07/15/2015 |
| HEADPHONE LINE          | AGC               | N/A         | N/A           | N/A        | N/A        |
| HORN ANT                | ETS               | 3117        | 00034609      | 08/17/2014 | 08/16/2015 |
| BROADBAND ANT           | SCHWARZBECK       | VULB9168    | D69250        | 08/17/2014 | 08/16/2015 |
| AMPLIFIER               | Schwarzbeck       | BBV 9718    | 9718-62       | 07/30/2014 | 07/29/2015 |
| Multi-Device Controller | 2090              | EMCO        | N/A           | 07/30/2014 | 07/29/2015 |
| HORN ANTENNA            | A.H. SYSTEMS INC. | SAS-574     | N/A           | 07/16/2014 | 07/15/2015 |
| SIGNAL GENERATOR        | AGILENT           | E4421B      | 122501288     | 07/25/2014 | 07/24/2015 |
| SIGNAL GENERATOR        | R&S               | SMT03       | A0304261      | 07/25/2014 | 07/24/2015 |
| RF CABLE                | SUIRONG           | 9KHZ-30MHZ  | N/A           | 07/16/2014 | 07/15/2015 |
| RF CABLE                | SUIRONG           | 30MHZ-18GHZ | N/A           | 07/16/2014 | 07/15/2015 |

NOTE: 8920B can generate audio modulation frequency.

#### 4. DESCRIPTION OF TEST MODES

##### RF TEST MODES

The EUT (Handheld Two Way Radio) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

| No. | TEST MODES     | CHANNEL SEPARATION |
|-----|----------------|--------------------|
| 1   | Low Channel    | 12.5 KHz           |
| 2   | Middle Channel | 12.5 KHz           |
| 3   | High Channel   | 12.5 KHz           |

##### EMC TEST MODES

| No. | TEST MODES   |
|-----|--------------|
| 1   | Standby Mode |

**Note:** Only the result of the worst case was recorded in the report.

## 5. CONDUCTED LIMITS

### 5.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.


| Frequency of Emission (MHz) | Conducted Limit(dBuV) |            |
|-----------------------------|-----------------------|------------|
|                             | Quasi-Peak            | Average    |
| 0.15 – 0.5                  | 66 to 56 *            | 56 to 46 * |
| 0.5 – 5                     | 56                    | 46         |
| 5 – 30                      | 60                    | 50         |

\* Decreases with the logarithm of the frequency.

### 5.2 MEASUREMENT PROCEDURE

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received AC power from a second LISN, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.  
During the above scans, the emissions were maximized by cable manipulation.

### 5.3 TEST SETUP BLOCK DIAGRAM

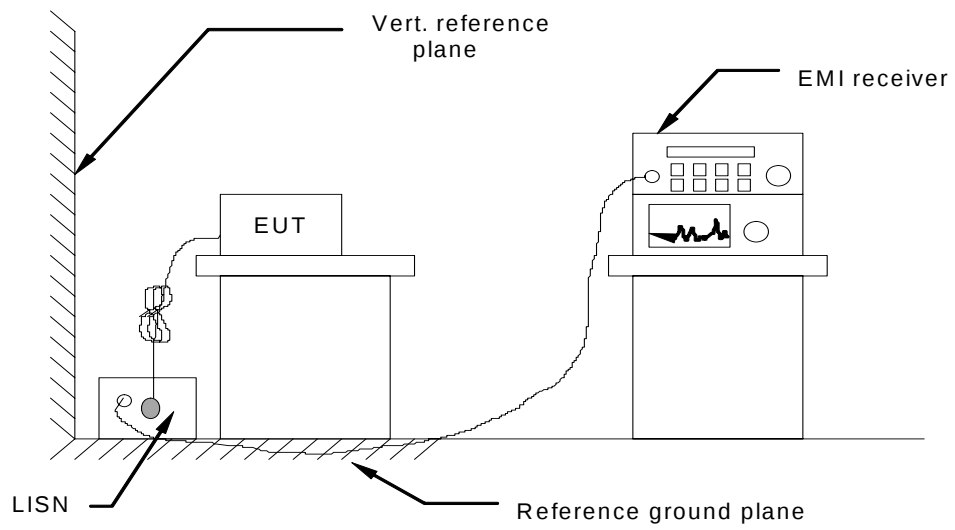


## 5.4 TEST RESULT

### CONDUCTED EMISSION TEST – LINE L1

**SCAN TABLE: "Voltage (150K-30M) FIN"**

Short Description: 9k-30M Voltage

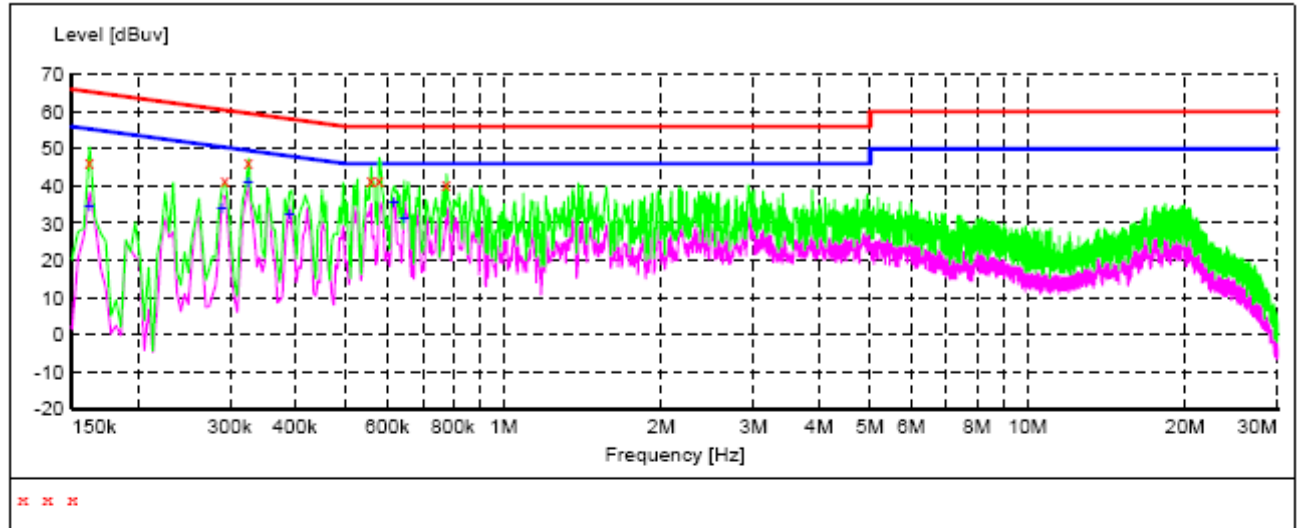

#### MEASUREMENT RESULT:

| Frequency | Level | Transd | Limit | Margin | Detector | Line | PE  | AUX   |
|-----------|-------|--------|-------|--------|----------|------|-----|-------|
| MHz       | dBuV  | dB     | dBuV  | dB     |          |      |     | STATE |
| 0.162000  | 46.30 | 0.2    | 65    | 19.1   | QP       | L1   | FLO | ON    |
| 0.294000  | 41.50 | 0.2    | 60    | 18.9   | QP       | L1   | FLO | ON    |
| 0.326000  | 46.70 | 0.2    | 60    | 12.9   | QP       | L1   | FLO | ON    |
| 0.558000  | 41.60 | 0.2    | 56    | 14.4   | QP       | L1   | FLO | ON    |
| 0.578000  | 41.40 | 0.2    | 56    | 14.6   | QP       | L1   | FLO | ON    |
| 0.778000  | 40.70 | 0.2    | 56    | 15.3   | QP       | L1   | FLO | ON    |


#### MEASUREMENT RESULT:

| Frequency | Level | Transd | Limit | Margin | Detector | Line | PE  | AUX   |
|-----------|-------|--------|-------|--------|----------|------|-----|-------|
| MHz       | dBuV  | dB     | dBuV  | dB     |          |      |     | STATE |
| 0.162000  | 34.50 | 0.2    | 55    | 20.9   | AV       | L1   | FLO | ON    |
| 0.290000  | 34.30 | 0.2    | 51    | 16.2   | AV       | L1   | FLO | ON    |
| 0.326000  | 41.10 | 0.2    | 50    | 8.5    | AV       | L1   | FLO | ON    |
| 0.390000  | 32.60 | 0.2    | 48    | 15.5   | AV       | L1   | FLO | ON    |
| 0.618000  | 35.40 | 0.2    | 46    | 10.6   | AV       | L1   | FLO | ON    |
| 0.646000  | 31.20 | 0.2    | 46    | 14.8   | AV       | L1   | FLO | ON    |

CONDUCTED EMISSION TEST – LINE N

**SCAN TABLE: "Voltage (150K-30M) FIN"**

Short Description: 9k-30M Voltage

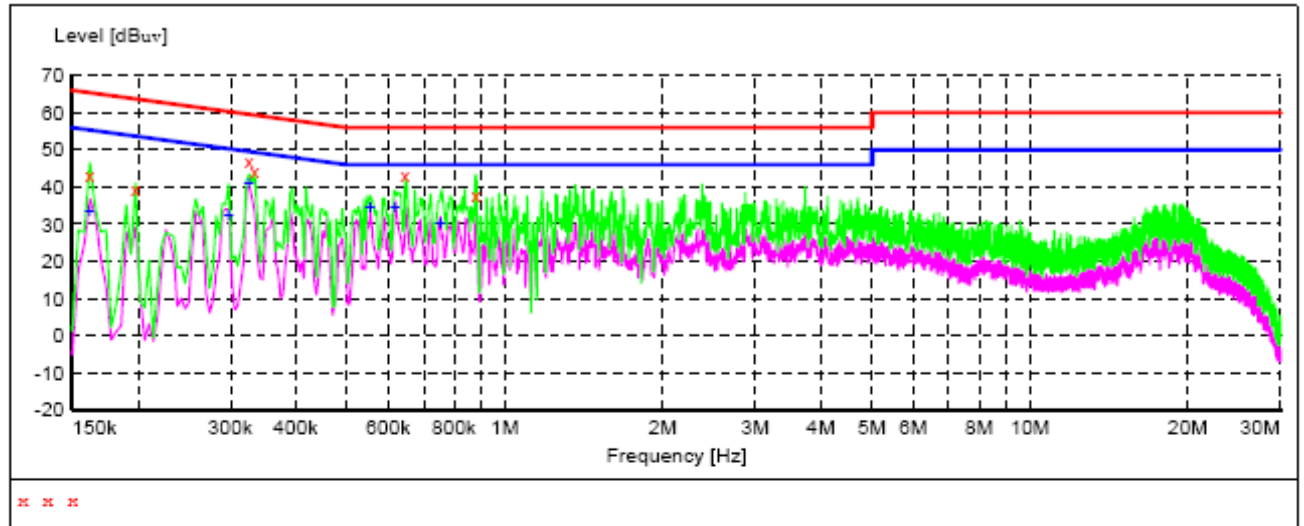

**MEASUREMENT RESULT:**

| Frequency | Level | Transd | Limit | Margin | Detector | Line | PE  | AUX<br>STATE |
|-----------|-------|--------|-------|--------|----------|------|-----|--------------|
| MHz       | dBuV  | dB     | dBuV  | dB     |          |      |     |              |
| 0.162000  | 43.40 | 0.2    | 65    | 22.0   | QP       | N    | FLO | ON           |
| 0.198000  | 39.40 | 0.2    | 64    | 24.3   | QP       | N    | FLO | ON           |
| 0.326000  | 47.00 | 0.2    | 60    | 12.6   | QP       | N    | FLO | ON           |
| 0.334000  | 44.40 | 0.2    | 59    | 15.0   | QP       | N    | FLO | ON           |
| 0.646000  | 43.40 | 0.2    | 56    | 12.6   | QP       | N    | FLO | ON           |
| 0.882000  | 37.90 | 0.2    | 56    | 18.1   | QP       | N    | FLO | ON           |

**MEASUREMENT RESULT:**

| Frequency | Level | Transd | Limit | Margin | Detector | Line | PE  | AUX<br>STATE |
|-----------|-------|--------|-------|--------|----------|------|-----|--------------|
| MHz       | dBuV  | dB     | dBuV  | dB     |          |      |     |              |
| 0.162000  | 33.60 | 0.2    | 55    | 21.8   | AV       | N    | FLO | ON           |
| 0.298000  | 32.30 | 0.2    | 50    | 18.0   | AV       | N    | FLO | ON           |
| 0.326000  | 41.10 | 0.2    | 50    | 8.5    | AV       | N    | FLO | ON           |
| 0.554000  | 34.50 | 0.2    | 46    | 11.5   | AV       | N    | FLO | ON           |
| 0.618000  | 34.80 | 0.2    | 46    | 11.2   | AV       | N    | FLO | ON           |
| 0.754000  | 30.20 | 0.2    | 46    | 15.8   | AV       | N    | FLO | ON           |

## **6. FREQUENCY TOLERANCE**

### **6.1 PROVISIONS APPLICABLE**

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from –30 to +50 centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0001% for 6.25 KHz channel separation.
- d). According to RSS-119 Section 119.5.3, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0005% for 25KHz channel separation.

### **6.2 MEASUREMENT PROCEDURE**


#### **6.2.1 Frequency stability versus environmental temperature**

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50 . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10 decreased per stage until the lowest temperature -30 is measured, record all measured frequencies on each temperature step.

#### **6.2.2 Frequency stability versus input voltage**

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15 to 25 . Otherwise, an environment chamber set for a temperature of 20 shall be used. The EUT shall be powered by DC 7.4V.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 6.3 TEST SETUP BLOCK DIAGRAM

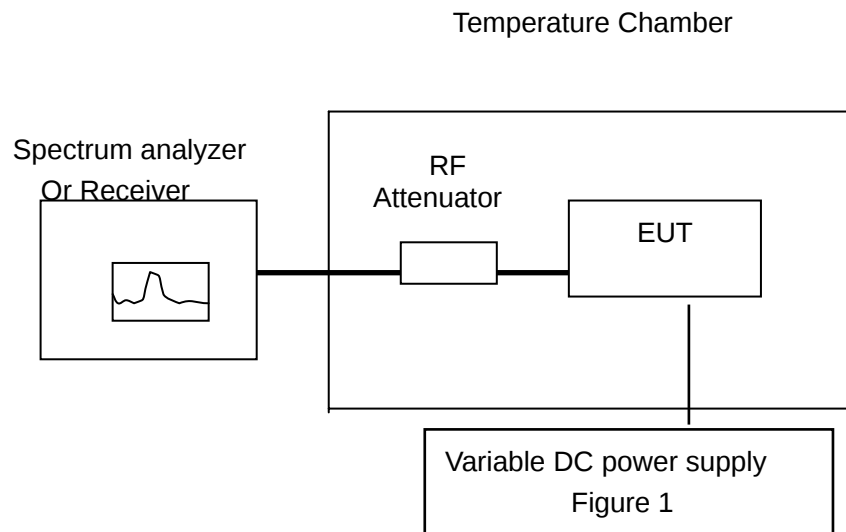

**6.4 TEST RESULT**

Frequency stability versus input voltage (Supply nominal voltage is 7.4V, ambient temperature 20°C)

**Bottom Channel @ 12.5 KHz Channel Separation**

|                         |              |                     |       |
|-------------------------|--------------|---------------------|-------|
| Reference Frequency:    | 400.025 MHz  | Limit:              | 5ppm  |
| Environment Temperature | Power Supply | Frequency Deviation |       |
| ( )                     | (V)          | (MHz)               | ppm   |
| 50                      | 7.4          | 400.025312          | 0.780 |
| 40                      | 7.4          | 400.025315          | 0.787 |
| 30                      | 7.4          | 400.025297          | 0.742 |
| 20                      | 7.4          | 400.025283          | 0.707 |
| 10                      | 7.4          | 400.025285          | 0.712 |
| 0                       | 7.4          | 400.025234          | 0.585 |
| -10                     | 7.4          | 400.025337          | 0.842 |
| -20                     | 7.4          | 400.025348          | 0.870 |
| -30                     | 7.4          | 400.025313          | 0.782 |

**Middle Channel @ 12.5 KHz Channel Separation**

|                         |              |                     |        |
|-------------------------|--------------|---------------------|--------|
| Reference Frequency:    | 440.000 MHz  | Limit:              | 2.5ppm |
| Environment Temperature | Power Supply | Frequency Deviation |        |
| ( )                     | (V)          | (MHz)               | ppm    |
| 50                      | 7.4          | 435.000354          | 0.814  |
| 40                      | 7.4          | 435.000287          | 0.660  |
| 30                      | 7.4          | 435.000275          | 0.632  |
| 20                      | 7.4          | 435.000274          | 0.630  |
| 10                      | 7.4          | 435.000266          | 0.611  |
| 0                       | 7.4          | 435.000249          | 0.572  |
| -10                     | 7.4          | 435.000258          | 0.593  |
| -20                     | 7.4          | 435.000268          | 0.616  |
| -30                     | 7.4          | 435.000274          | 0.630  |

**Top Channel @ 12.5 KHz Channel Separation**

|                         |              |                     |        |
|-------------------------|--------------|---------------------|--------|
| Reference Frequency:    | 479.975 MHz  | Limit:              | 2.5ppm |
| Environment Temperature | Power Supply | Frequency Deviation |        |
| ( )                     | (V)          | (MHz)               | ppm    |
| 50                      | 7.4          | 469.975371          | 0.789  |
| 40                      | 7.4          | 469.975357          | 0.760  |
| 30                      | 7.4          | 469.975349          | 0.743  |
| 20                      | 7.4          | 469.975351          | 0.747  |
| 10                      | 7.4          | 469.975339          | 0.721  |
| 0                       | 7.4          | 469.975337          | 0.717  |
| -10                     | 7.4          | 469.975352          | 0.749  |
| -20                     | 7.4          | 469.975346          | 0.736  |
| -30                     | 7.4          | 469.975363          | 0.772  |

(2) Frequency stability versus input voltage (Battery Limiting voltage is 6.29V)

**Bottom Channel @ 12.5 KHz Channel Separation**

|                         |              |                     |       |
|-------------------------|--------------|---------------------|-------|
| Reference Frequency:    | 400.025 MHz  | Limit:              | 5ppm  |
| Environment Temperature | Power Supply | Frequency Deviation |       |
| ( )                     | (V)          | (MHz)               | ppm   |
| 50                      | DC 6.29 V    | 400.025285          | 0.712 |
| 40                      | DC 6.29 V    | 400.025277          | 0.692 |
| 30                      | DC 6.29 V    | 400.025261          | 0.652 |
| 20                      | DC 6.29 V    | 400.025259          | 0.647 |
| 10                      | DC 6.29 V    | 400.025251          | 0.627 |
| 0                       | DC 6.29 V    | 400.025238          | 0.595 |
| -10                     | DC 6.29 V    | 400.025237          | 0.592 |
| -20                     | DC 6.29 V    | 400.025228          | 0.570 |
| -30                     | DC 6.29 V    | 400.025215          | 0.537 |

**Middle Channel @ 12.5 KHz Channel Separation**

|                         |              |                     |        |
|-------------------------|--------------|---------------------|--------|
| Reference Frequency:    | 435.000 MHz  | Limit:              | 2.5ppm |
| Environment Temperature | Power Supply | Frequency Deviation |        |
| ( )                     | (V)          | (MHz)               | ppm    |
| 50                      | DC 6.29 V    | 435.000292          | 0.671  |
| 40                      | DC 6.29 V    | 435.000277          | 0.637  |
| 30                      | DC 6.29 V    | 435.000266          | 0.611  |
| 20                      | DC 6.29 V    | 435.000248          | 0.570  |
| 10                      | DC 6.29 V    | 435.000252          | 0.579  |
| 0                       | DC 6.29 V    | 435.000253          | 0.582  |
| -10                     | DC 6.29 V    | 435.000239          | 0.549  |
| -20                     | DC 6.29 V    | 435.000227          | 0.522  |
| -30                     | DC 6.29 V    | 435.000225          | 0.517  |

**Top Channel @ 12.5 KHz Channel Separation**

|                         |              |                     |        |
|-------------------------|--------------|---------------------|--------|
| Reference Frequency:    | 469.975 MHz  | Limit:              | 2.5ppm |
| Environment Temperature | Power Supply | Frequency Deviation |        |
| ( )                     | (V)          | (MHz)               | ppm    |
| 50                      | DC 6.29 V    | 469.975297          | 0.632  |
| 40                      | DC 6.29 V    | 469.975288          | 0.613  |
| 30                      | DC 6.29 V    | 469.975279          | 0.594  |
| 20                      | DC 6.29 V    | 469.975242          | 0.515  |
| 10                      | DC 6.29 V    | 469.975231          | 0.492  |
| 0                       | DC 6.29 V    | 469.975223          | 0.474  |
| -10                     | DC 6.29 V    | 469.975228          | 0.485  |
| -20                     | DC 6.29 V    | 469.975234          | 0.498  |
| -30                     | DC 6.29 V    | 469.975251          | 0.534  |

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V)

**Bottom Channel @ 12.5 KHz Channel Separation**

|                         |              |                     |       |
|-------------------------|--------------|---------------------|-------|
| Reference Frequency:    | 400.025 MHz  | Limit:              | 5ppm  |
| Environment Temperature | Power Supply | Frequency Deviation |       |
| ( )                     | (V)          | (MHz)               | ppm   |
| 50                      | DC 8.51 V    | 400.025283          | 0.707 |
| 40                      | DC 8.51 V    | 400.025272          | 0.680 |
| 30                      | DC 8.51 V    | 400.025252          | 0.630 |
| 20                      | DC 8.51 V    | 400.025251          | 0.627 |
| 10                      | DC 8.51 V    | 400.025221          | 0.552 |
| 0                       | DC 8.51 V    | 400.025233          | 0.582 |
| -10                     | DC 8.51 V    | 400.025232          | 0.580 |
| -20                     | DC 8.51 V    | 400.025219          | 0.547 |
| -30                     | DC 8.51 V    | 400.025213          | 0.532 |

**Middle Channel @ 12.5 KHz Channel Separation**

|                         |              |                     |        |
|-------------------------|--------------|---------------------|--------|
| Reference Frequency:    | 435.000 MHz  | Limit:              | 2.5ppm |
| Environment Temperature | Power Supply | Frequency Deviation |        |
| ( )                     | (V)          | (MHz)               | ppm    |
| 50                      | DC 8.51 V    | 435.000294          | 0.676  |
| 40                      | DC 8.51 V    | 435.000272          | 0.625  |
| 30                      | DC 8.51 V    | 435.000265          | 0.609  |
| 20                      | DC 8.51 V    | 435.000257          | 0.591  |
| 10                      | DC 8.51 V    | 435.000244          | 0.561  |
| 0                       | DC 8.51 V    | 435.000246          | 0.566  |
| -10                     | DC 8.51 V    | 435.000232          | 0.533  |
| -20                     | DC 8.51 V    | 435.000228          | 0.524  |
| -30                     | DC 8.51 V    | 435.000224          | 0.515  |

**Top Channel @ 12.5KHz Channel Separation**

|                         |              |                     |        |
|-------------------------|--------------|---------------------|--------|
| Reference Frequency:    | 469.975 MHz  | Limit:              | 2.5ppm |
| Environment Temperature | Power Supply | Frequency Deviation |        |
| ( )                     | (V)          | (MHz)               | ppm    |
| 50                      | DC 8.51 V    | 469.975293          | 0.623  |
| 40                      | DC 8.51 V    | 469.975287          | 0.611  |
| 30                      | DC 8.51 V    | 469.975271          | 0.577  |
| 20                      | DC 8.51 V    | 469.975243          | 0.517  |
| 10                      | DC 8.51 V    | 469.975237          | 0.504  |
| 0                       | DC 8.51 V    | 469.975225          | 0.479  |
| -10                     | DC 8.51 V    | 469.975221          | 0.470  |
| -20                     | DC 8.51 V    | 469.975227          | 0.483  |
| -30                     | DC 8.51 V    | 469.975229          | 0.487  |

## 7. EMISSION BANDWIDTH

### 7.1 PROVISIONS APPLICABLE


According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz channel separation and 6 KHz for 6.25 KHz channel separation.

According to RSS-119 Section 119.5.5: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz

### 7.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
- 3). Set SPA Center Frequency = fundamental frequency, RBW=100 Hz , VBW= 300 Hz, Span =50 KHz.
- 4). Set SPA Max hold. Mark peak, -26 dB.


### 7.3 TEST SETUP BLOCK DIAGRAM

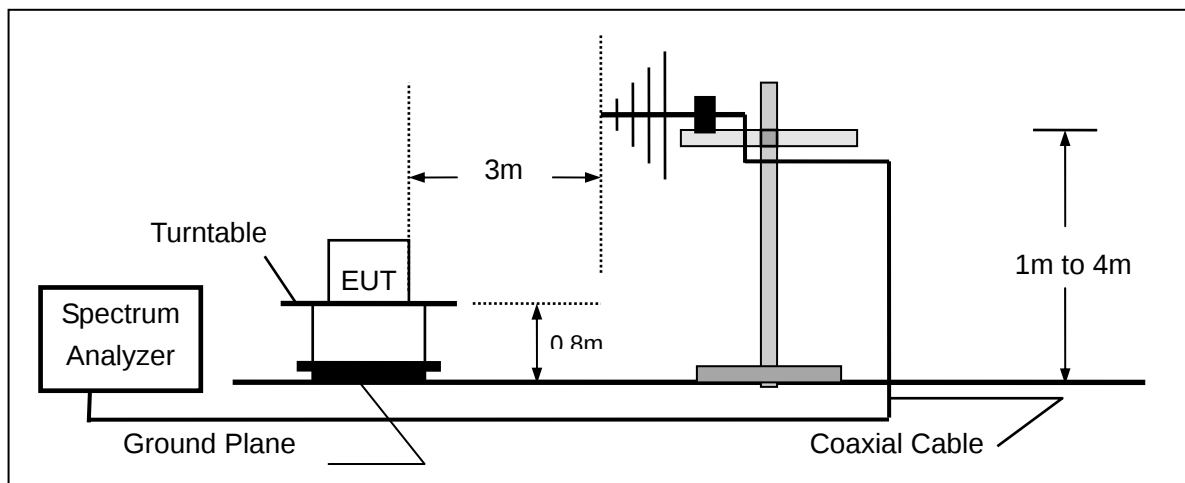

## 7.4 MEASUREMENT RESULT

| 26 DB BANDWIDTH MEASUREMENT RESULT |                             |           |        |
|------------------------------------|-----------------------------|-----------|--------|
| Operating Frequency                | 12.5 KHz Channel Separation |           |        |
|                                    | Test Data                   | Limits    | Result |
| 400.025MHz                         | 10.30KHz                    | 11.25 KHz | Pass   |
| 435.000MHz                         | 10.27KHz                    | 11.25 KHz | Pass   |
| 469.975MHz                         | 10.25KHz                    | 11.25 KHz | Pass   |

### Occupied bandwidth of Low Channel (Maximum)

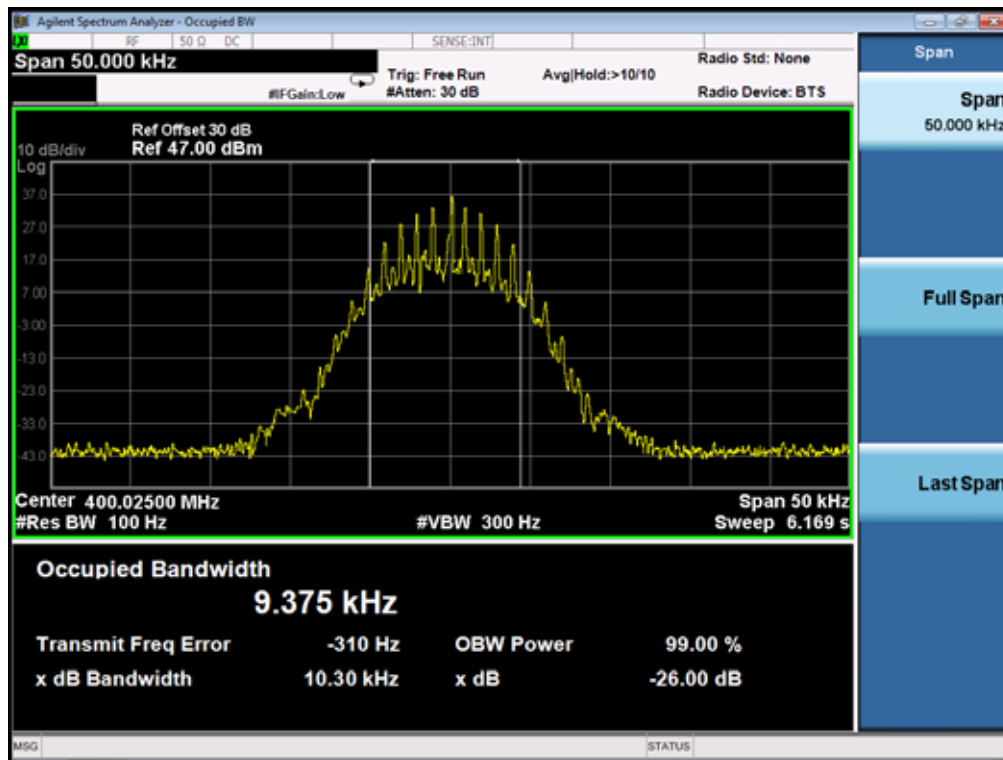

## 8. UNWANTED RADIATION

### 8.1 PROVISIONS APPLICABLE

8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.

According to RSS-119 Section 119.5.8, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters with each channel separation.

For 12.5 KHz Channel Separation:

- (1). On any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 KHz removed from  $f_0$ : Zero dB.
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency ( $f_d$  in KHz)  $f_0$  of more than 5.625 KHz but no more than 12.5 KHz: At least  $7.27(f_d - 2.88 \text{ KHz})$  dB
- (3). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency ( $f_d$  in KHz)  $f_0$  of more than 12.5 KHz: At least  $50 + 10 \log(P)$  dB or 70 dB, whichever is lesser attenuation.

For 6.25 KHz Channel Separation:


- (1). On any frequency from the center of the authorized bandwidth  $f_0$  to 3.0 kHz removed from  $f_0$ : Zero dB.
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67(f_d - 3 \text{ kHz})$  or  $55 + 10 \log(P)$  or 65 dB, whichever is the lesser attenuation.
- (3). On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10 \log(P)$  or 65 dB, whichever is the lesser attenuation.

### 8.2 MEASUREMENT PROCEDURE

- (1) On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through  $360^\circ$  in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.


- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

### 8.3 TEST SETUP BLOCK DIAGRAM

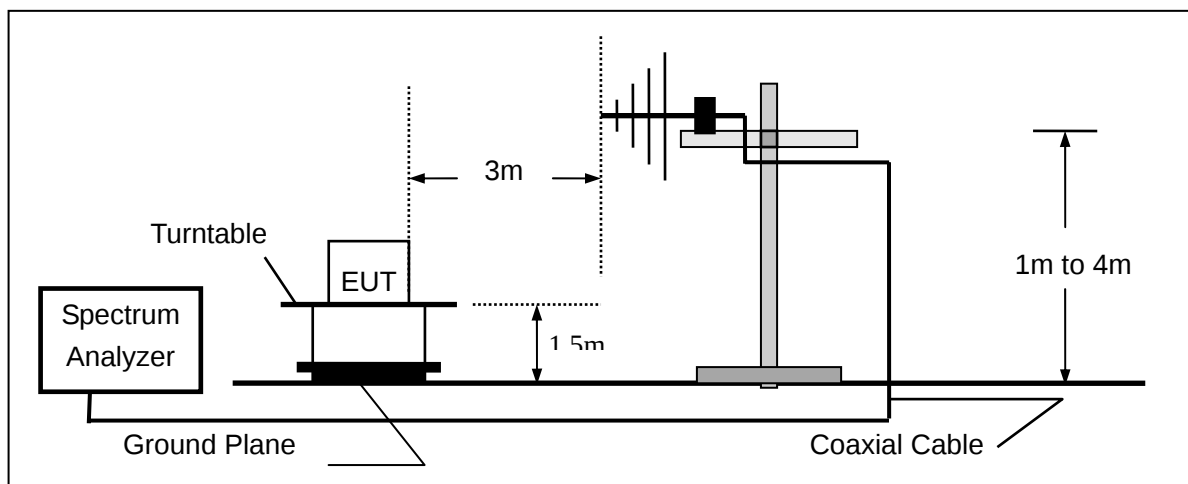


## SUBSTITUTION METHOD: (Radiated Emissions)

### Radiated Below 1GHz

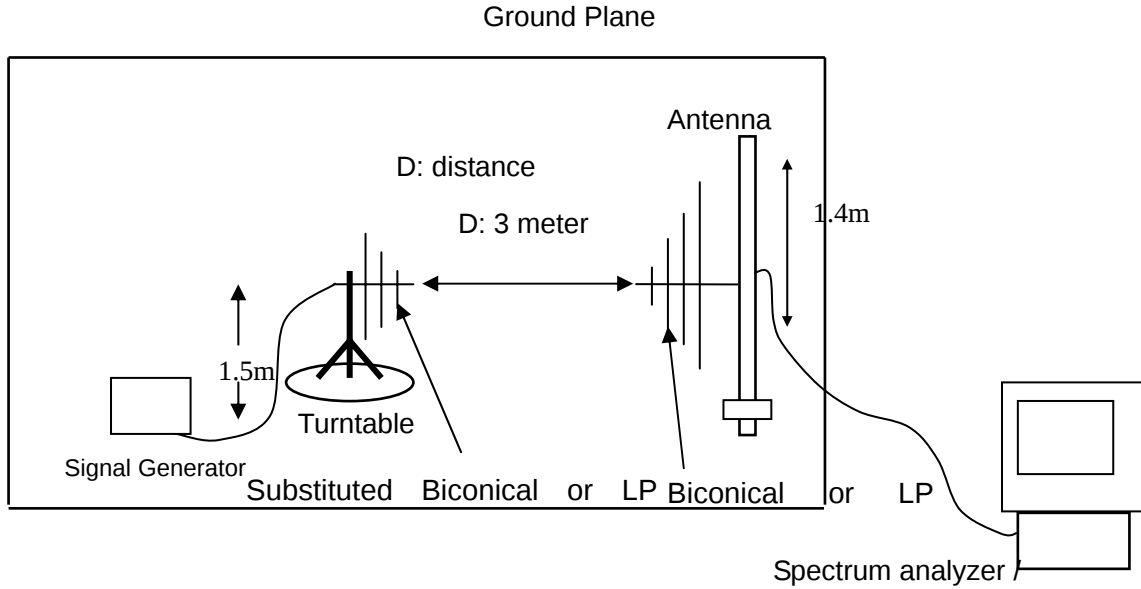

### Radiated Above 1 GHz

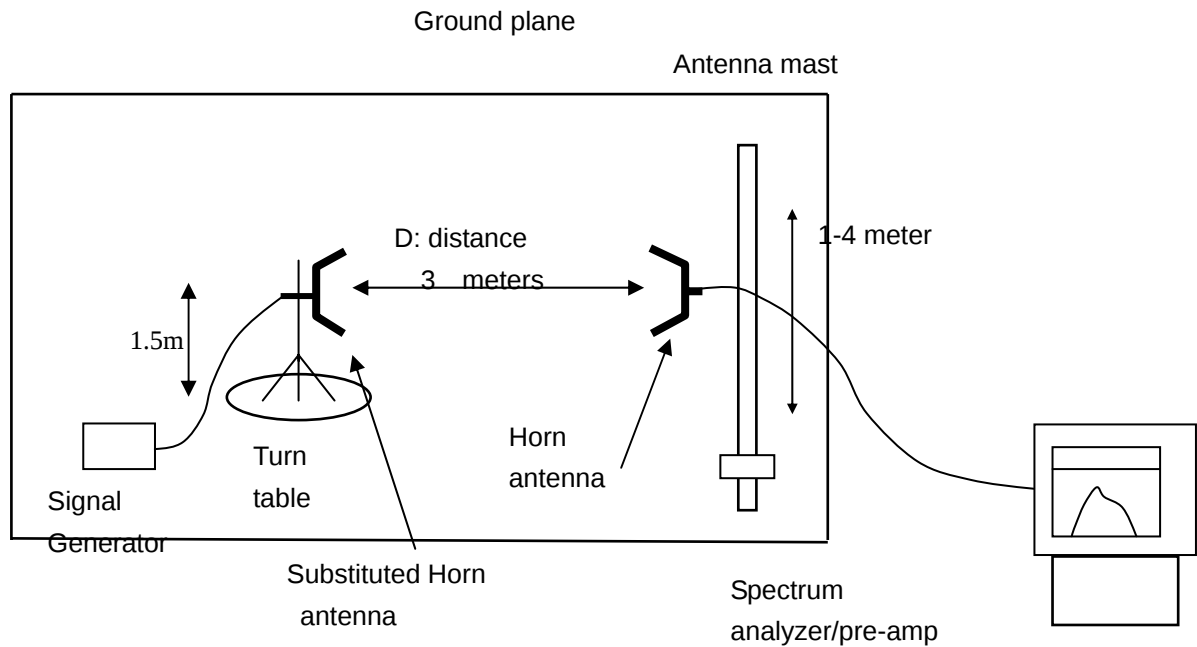

**8.4 MEASUREMENT RESULTS:****Measurement Result for 12.5 KHz Channel Separation**

On any frequency removed from the center of the authorized bandwidth by a displacement

Frequency (fd in KHz)fo of more than 12.5 KHz: At least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

**Limit: At least 50+10 log (P) =50+10log (5) =57 (dB)**

**Measurement Result for 12.5 KHz Channel Separation @ 400.025MHz**

| Emission Frequency (MHz) | Ant. Polarity(H/V) | Measurement Result Below carrier(dBc) | Limit below carrier(dBc) | Result(P/F) |
|--------------------------|--------------------|---------------------------------------|--------------------------|-------------|
| 400.075                  | V                  | 0                                     |                          | pass        |
| 800.150                  | V                  | 69.32(-32.32dBm)                      | 57                       | pass        |
| 1200.23                  | V                  | 70.13                                 | 57                       | pass        |
| 1600.300                 | V                  | 70.37                                 | 57                       | pass        |
| 2000.375                 | V                  | 72.55                                 | 57                       | pass        |
| 2400.450                 | V                  | 74.05                                 | 57                       | pass        |
| 2800.525                 | V                  | 75.84                                 | 57                       | pass        |
| 3200.600                 | V                  | 77.57                                 | 57                       | pass        |
| 3600.675                 | V                  | 79.83                                 | 57                       | pass        |
| 4000.750                 | V                  | 81.37                                 | 57                       | pass        |

**Measurement Result for 12.5 KHz Channel Separation @ 435.000MHz**

| Emission Frequency (MHz) | Ant. Polarity(H/V) | Measurement Result Below carrier(dBc) | Limit below carrier(dBc) | Result(P/F) |
|--------------------------|--------------------|---------------------------------------|--------------------------|-------------|
| 435.000                  | V                  | 0                                     |                          | pass        |
| 870.000                  | V                  | 69.67(-32.67dBm)                      | 57                       | pass        |
| 1305.000                 | V                  | 69.82(-32.84 dBm)                     | 57                       | pass        |
| 1740.000                 | V                  | 72.42                                 | 57                       | pass        |
| 2175.000                 | V                  | 75.75                                 | 57                       | pass        |
| 2610.000                 | V                  | 76.93                                 | 57                       | pass        |
| 3045.000                 | V                  | 78.62                                 | 57                       | pass        |
| 3480.000                 | V                  | 70.15                                 | 57                       | pass        |
| 3915.000                 | V                  | 80.12                                 | 57                       | pass        |
| 4350.000                 | V                  | 81.27                                 | 57                       | pass        |

**Measurement Result for 12.5 KHz Channel Separation @ 469.975MHz**

| Emission Frequency (MHz) | Ant. Polarity(H/V) | Measurement Result Below carrier(dBc) | Limit below carrier(dBc) | Result(P/F) |
|--------------------------|--------------------|---------------------------------------|--------------------------|-------------|
| 469.975                  | V                  | 0                                     |                          | pass        |
| 939.950                  | V                  | 69.82(-32.84dBm)                      | 57                       | pass        |
| 1409.925                 | V                  | 71.57                                 | 57                       | pass        |
| 1879.900                 | V                  | 73.81                                 | 57                       | pass        |
| 2349.875                 | V                  | 74.46                                 | 57                       | pass        |
| 2819.850                 | V                  | 75.85                                 | 57                       | pass        |
| 3289.825                 | V                  | 77.63                                 | 57                       | pass        |
| 3759.800                 | V                  | 79.54                                 | 57                       | pass        |
| 4229.775                 | V                  | 70.41                                 | 57                       | pass        |
| 4699.750                 | V                  | 71.77                                 | 57                       | pass        |


**Notes:** The emissions were scanned from 30 MHz to 10th harmonics.

## 8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz.

### The Worst Emission Mask for 12.5 KHz channel Separation (5W)

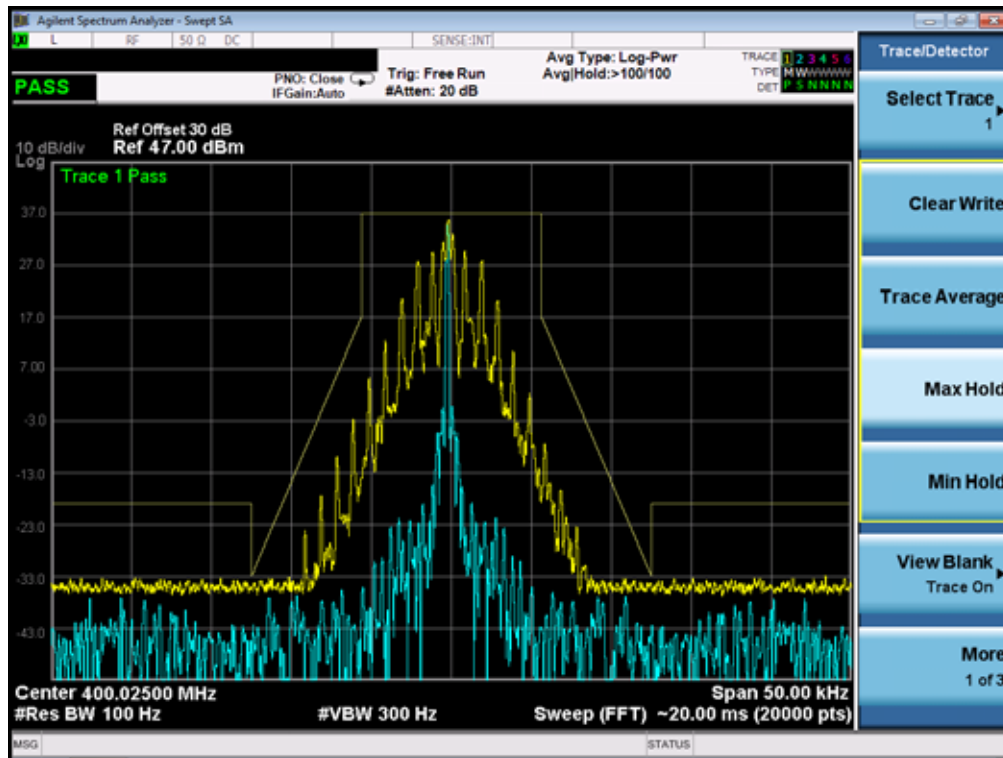

## 9. MODULATION CHARACTERISTICS

### 9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.


### 9.2 MEASUREMENT METHOD

#### 9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

#### 9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response =  $20\log_{10} (\text{Deviation of test frequency} / \text{Deviation of 1 KHz reference})$ .

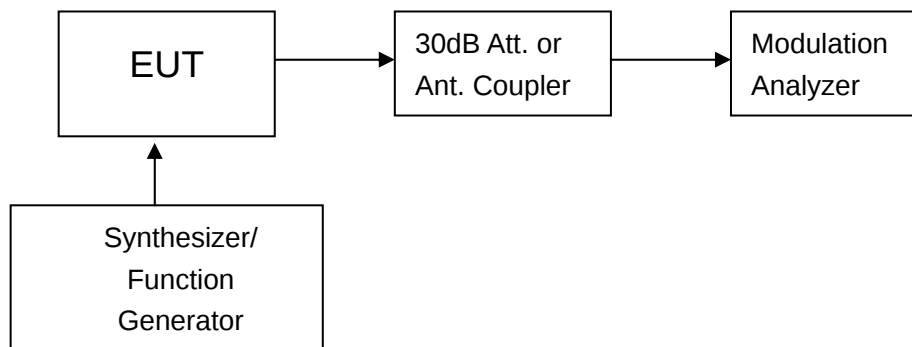


**Figure 1: Modulation characteristic measurement configuration**

### 9.3 MEASUREMENT RESULT

#### (A). MODULATION LIMIT:

##### Middle Channel @ 12.5 KHz Channel Separations

| Modulation Level (dB) | Peak Freq. Deviation At 300 Hz | Peak Freq. Deviation At 1000 Hz | Peak Freq. Deviation At 1500 Hz | Peak Freq. Deviation At 3000 Hz |
|-----------------------|--------------------------------|---------------------------------|---------------------------------|---------------------------------|
| -20                   | 0.27                           | 0.86                            | 0.88                            | 0.9                             |
| -15                   | 0.33                           | 0.96                            | 0.98                            | 1.06                            |
| -10                   | 0.45                           | 1.25                            | 1.29                            | 1.38                            |
| -5                    | 0.53                           | 1.36                            | 1.45                            | 1.49                            |
| 0                     | 0.65                           | 1.5                             | 1.56                            | 1.59                            |
| 5                     | 0.72                           | 1.63                            | 1.74                            | 1.86                            |
| 10                    | 0.87                           | 1.71                            | 1.77                            | 1.84                            |
| 15                    | 0.95                           | 1.63                            | 1.74                            | 1.78                            |
| 20                    | 0.86                           | 1.54                            | 1.65                            | 1.75                            |

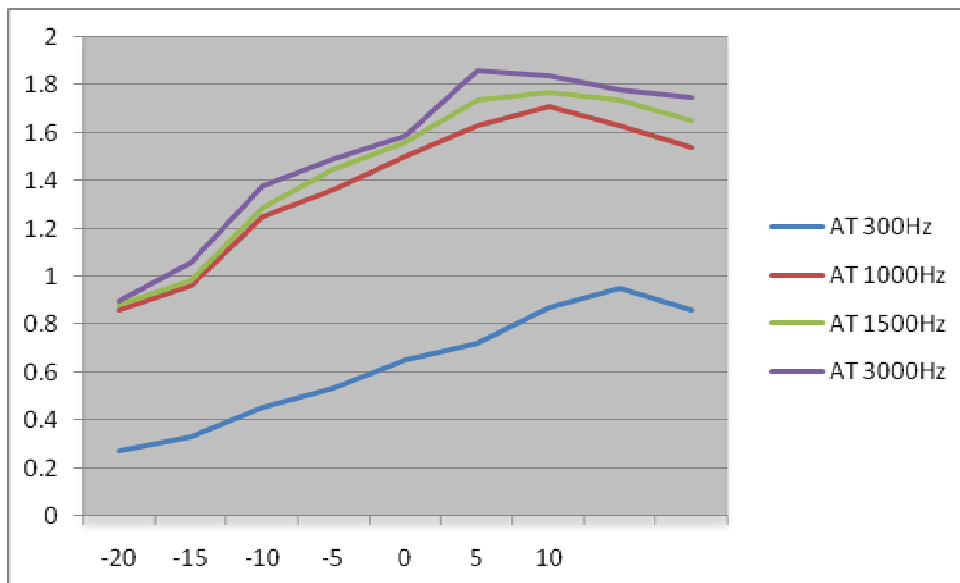


Note: All the modes had been tested, but only the worst data recorded in the report.

**(B). AUDIO FREQUENCY RESPONSE:****Middle Channel @ 12.5 KHz Channel Separations**

| <b>Frequency (Hz)</b> | <b>Deviation (KHz)</b> | <b>Audio Frequency Response(dB)</b> |
|-----------------------|------------------------|-------------------------------------|
| 100                   | --                     | --                                  |
| 200                   | --                     | --                                  |
| 300                   | 0.14                   | -11.06                              |
| 400                   | 0.18                   | -8.87                               |
| 500                   | 0.23                   | -6.74                               |
| 600                   | 0.27                   | -5.35                               |
| 700                   | 0.29                   | -4.73                               |
| 800                   | 0.36                   | -2.85                               |
| 900                   | 0.41                   | -1.72                               |
| 1000                  | 0.5                    | 0.00                                |
| 1200                  | 0.55                   | 0.83                                |
| 1400                  | 0.65                   | 2.28                                |
| 1600                  | 0.75                   | 3.52                                |
| 1800                  | 0.86                   | 4.71                                |
| 2000                  | 0.94                   | 5.48                                |
| 2400                  | 1.22                   | 7.75                                |
| 2500                  | 1.44                   | 9.19                                |
| 2800                  | 1.66                   | 10.42                               |
| 3000                  | 1.75                   | 10.88                               |
| 3200                  | 1.71                   | 10.68                               |
| 3600                  | 1.56                   | 9.88                                |
| 4000                  | 1.05                   | 6.44                                |
| 4500                  | 0.84                   | 4.51                                |
| 5000                  | 0.74                   | 3.41                                |
| 5500                  | 0.56                   | 0.98                                |
| 6000                  | 0.14                   | -11.06                              |
| 6500                  | 0.05                   | -20.00                              |
| 7000                  | 0.04                   | -21.94                              |
| 7500                  | 0.01                   | -33.98                              |
| 9000                  | --                     | --                                  |
| 10000                 | --                     | --                                  |
| 14000                 | --                     | --                                  |
| 18000                 | --                     | --                                  |
| 20000                 | --                     | --                                  |
| 30000                 | --                     | --                                  |

**Frequency Response of Middle Channel (UHF)**

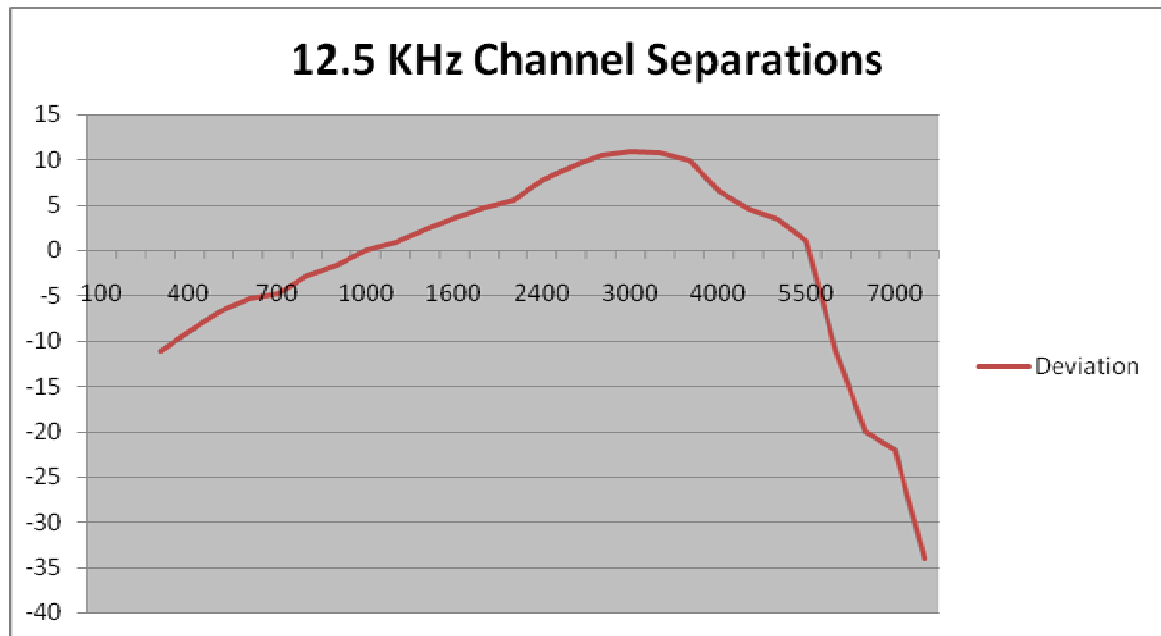

Note: All the modes had been tested, but only the worst data recorded in the report.

## 10. MAXIMUM TRANSMITTER POWER

### 10.1 PROVISIONS APPLICABLE


Per FCC §2.1046 and §90.205 AND RSS 119 Part 4.1: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

### 10.2 TEST PROCEDURE


The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator.


### 10.3 TEST CONFIGURATION

Conducted Output Power:


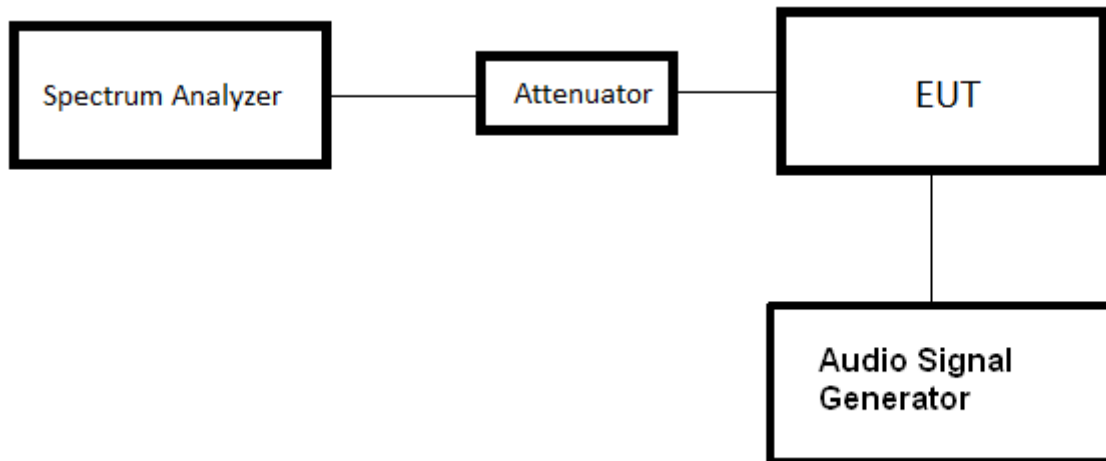


Effective Radiated Power measurement  
Below 1GHz

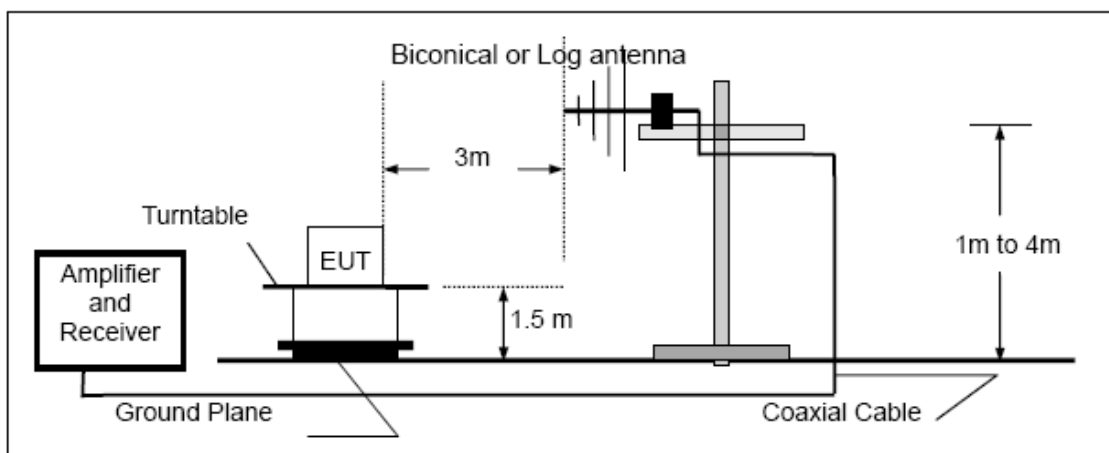

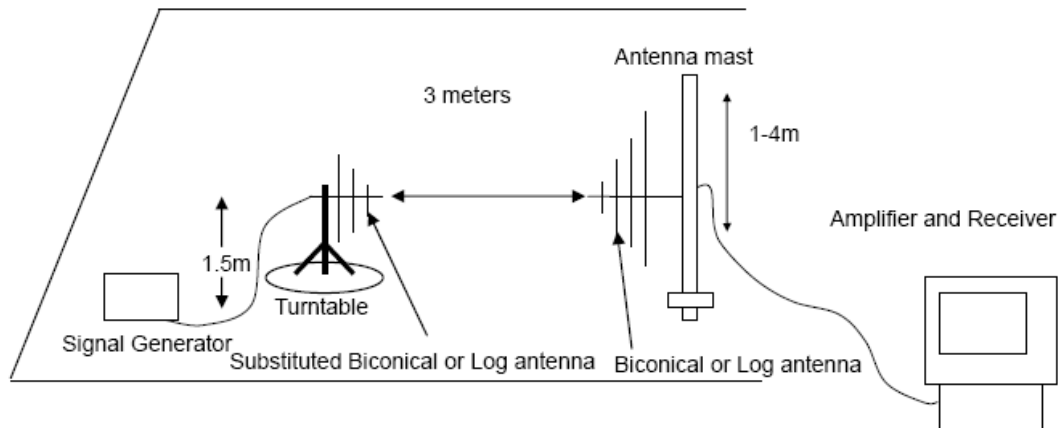

### Above 1GHz

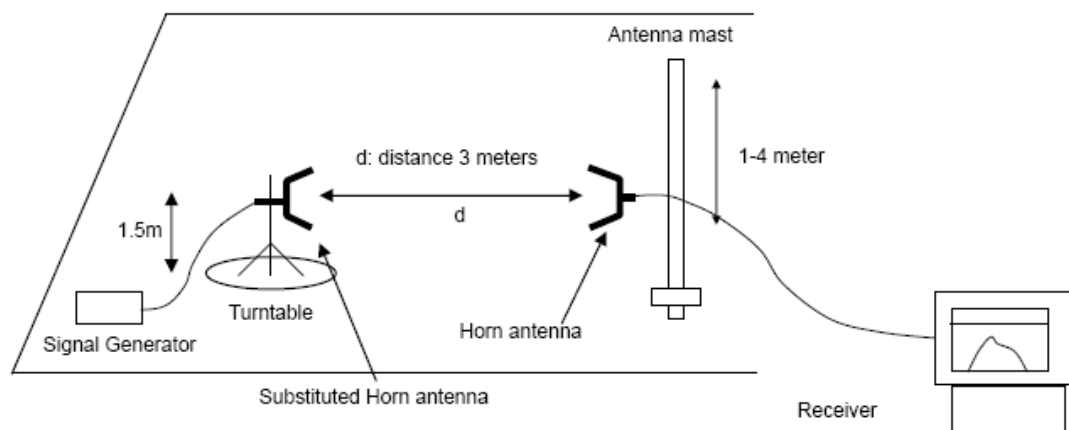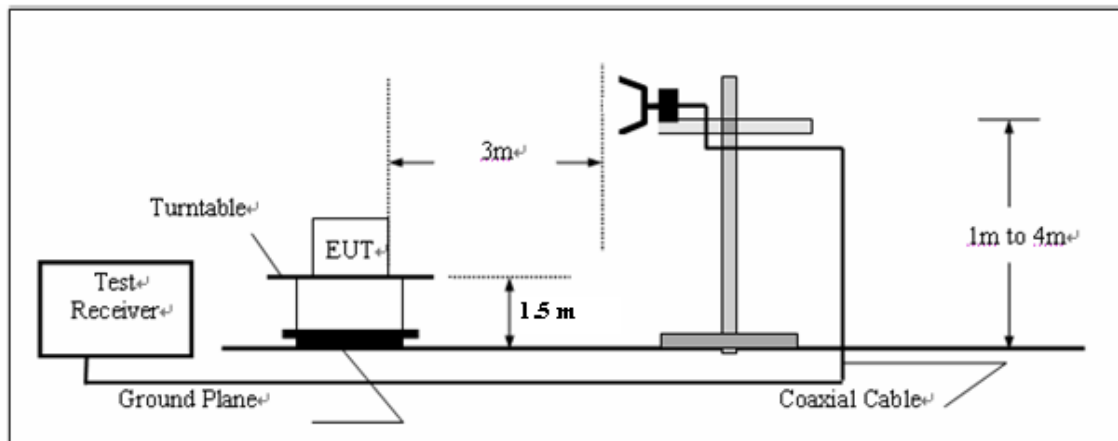

#### 10.4 TEST RESULT

The maximum Conducted Power (CP) is  
5 W for 12.5 KHz Channel Separation

Calculation Formula:  $CP = R + A + L$

\* Note:

CP: The final Conducted Power

R : The reading value from spectrum analyzer

A : The attenuation value of the used attenuator


L : The loss of all connection cables

| Conducted Power Measurement Results |                    |                          |
|-------------------------------------|--------------------|--------------------------|
| Channel Separation                  | Channel            | Measurement Result (dBm) |
|                                     |                    | For 36.99dBm(5W)         |
| 12.5 KHz                            | Bottom(400.025MHz) | 36.90                    |
|                                     | Middle(435.000MHz) | 36.97                    |
|                                     | Top (469.975MHz)   | 36.95                    |

| Radiated Power Measurement Results |                    |                          |
|------------------------------------|--------------------|--------------------------|
| Channel Separation                 | Channel            | Measurement Result (dBm) |
|                                    |                    | For 36.99dBm(5W)         |
| 12.5 KHz                           | Bottom(400.025MHz) | 36.91                    |
|                                    | Middle(435.000MHz) | 36.95                    |
|                                    | Top (469.975MHz)   | 36.92                    |

## 10.5 CONDUCT SPURIOUS PLOT

### Conducted Spurious Emission (worst) @ 435.000MHz With 12.5 KHz Channel Separation 30MHz-1GHz

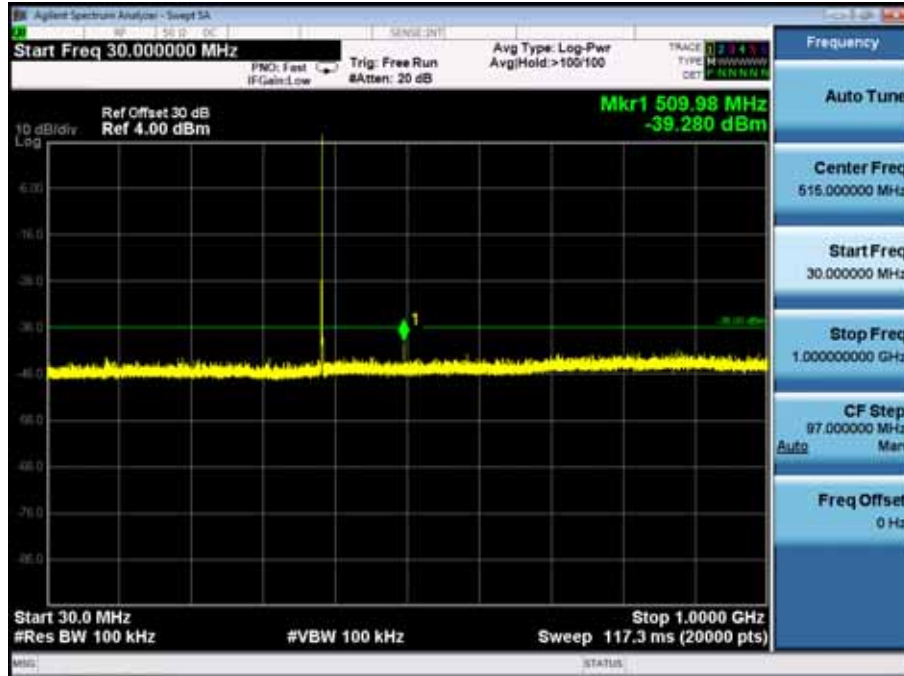

### Conduct Spurious Emission (worst) @ 435.000MHz With 12.5 KHz Channel Separation 1GHz-12.75GHz



## 11. TRANSMITTER FREQUENCY BEHAVIOR

### 11.1 PROVISIONS APPLICABLE

Section 90.214

| Time intervals <sup>1, 2</sup>                                                      | Maximum frequency difference <sup>3</sup> | All equipment  |                |
|-------------------------------------------------------------------------------------|-------------------------------------------|----------------|----------------|
|                                                                                     |                                           | 150 to 174 MHz | 421 to 512 MHz |
| Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels   |                                           |                |                |
| t <sub>1</sub> <sup>4</sup> .....                                                   | ± 25.0 kHz                                | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....                                                                | ± 12.5 kHz                                | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....                                                   | ± 25.0 kHz                                | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels |                                           |                |                |
| t <sub>1</sub> <sup>4</sup> .....                                                   | ± 12.5 kHz                                | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....                                                                | ± 6.25 kHz                                | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....                                                   | ± 12.5 kHz                                | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels |                                           |                |                |
| t <sub>1</sub> <sup>4</sup> .....                                                   | ± 6.25 kHz                                | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....                                                                | ± 3.125 kHz                               | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....                                                   | ± 6.25 kHz                                | 5.0 ms         | 10.0 ms        |

<sup>1</sup> t<sub>on</sub> is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t<sub>1</sub> is the time period immediately following t<sub>on</sub>.

t<sub>2</sub> is the time period immediately following t<sub>1</sub>.

t<sub>3</sub> is the time period from the instant when the transmitter is turned off until t<sub>off</sub>.

t<sub>off</sub> is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub>, the frequency difference must not exceed the limits specified in § 90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

### 11.2 TEST METHOD

TIA/EIA-603 2.2.19

### 11.3 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR



**ton:** The switch-on instant ton of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).

**t1:** period of time starting at ton and finishing according to above 11.1

**t2:** period of time starting at the end of t1 and finishing according to above 11.1


**toff:** switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).

**t3:** period of time that finishing at toff and starting according to above 11.1

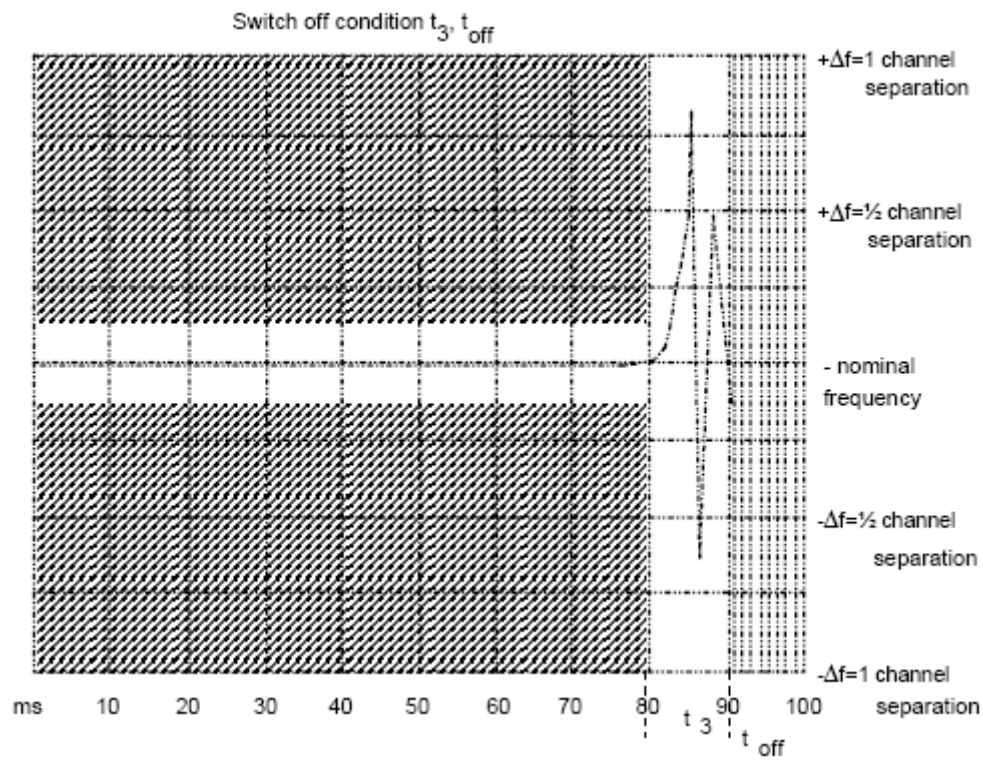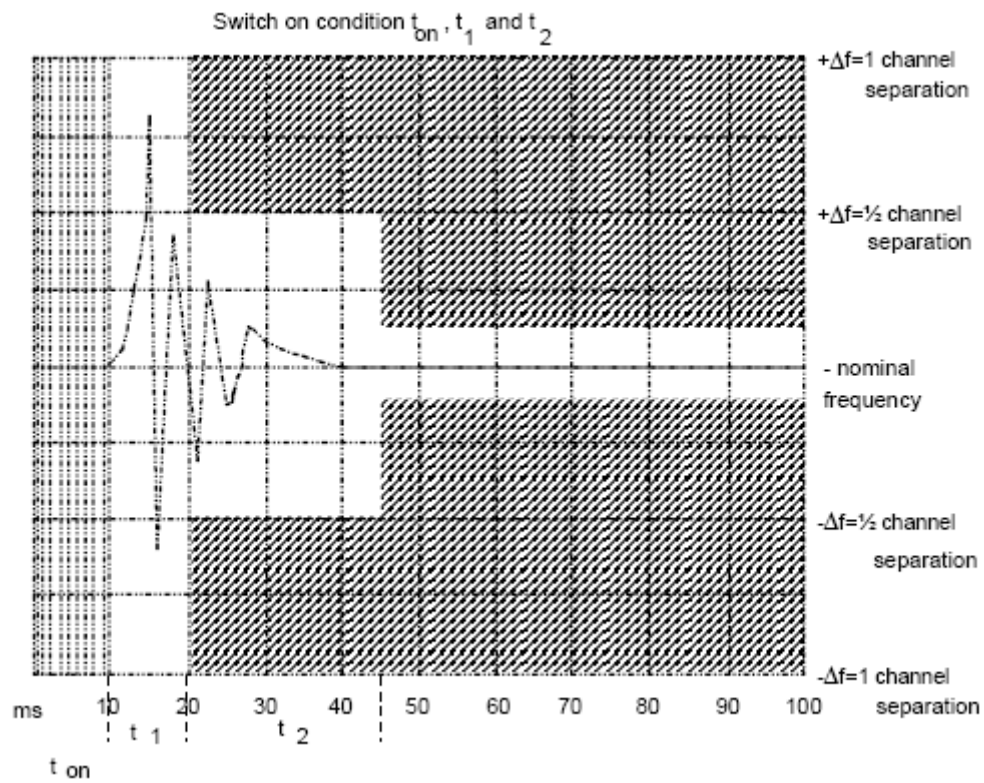


#### 11.4 MEASURE RESULT

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

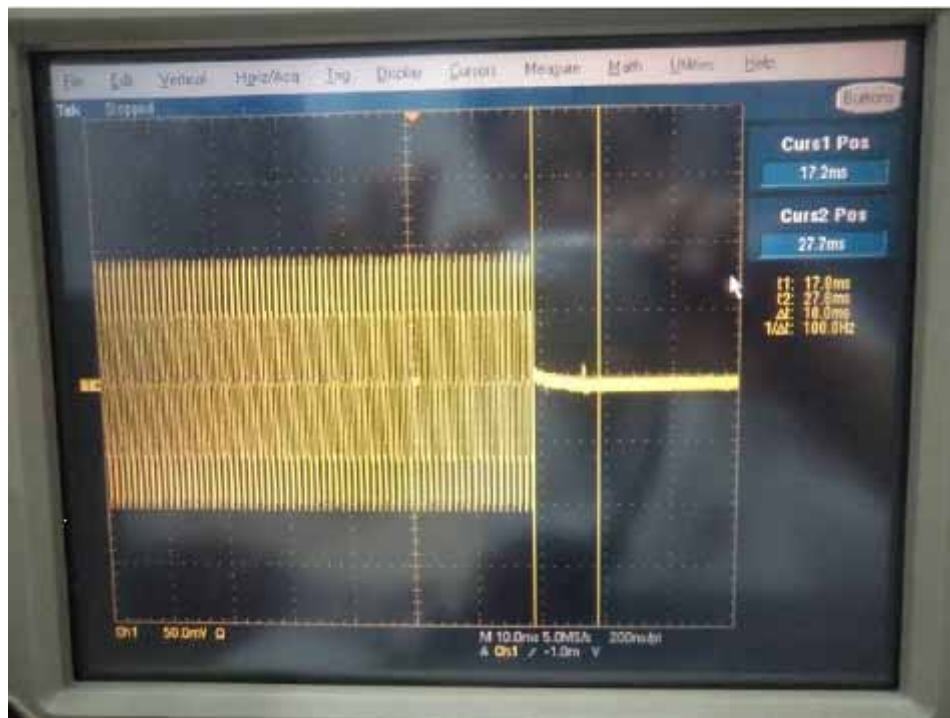

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--On to Off

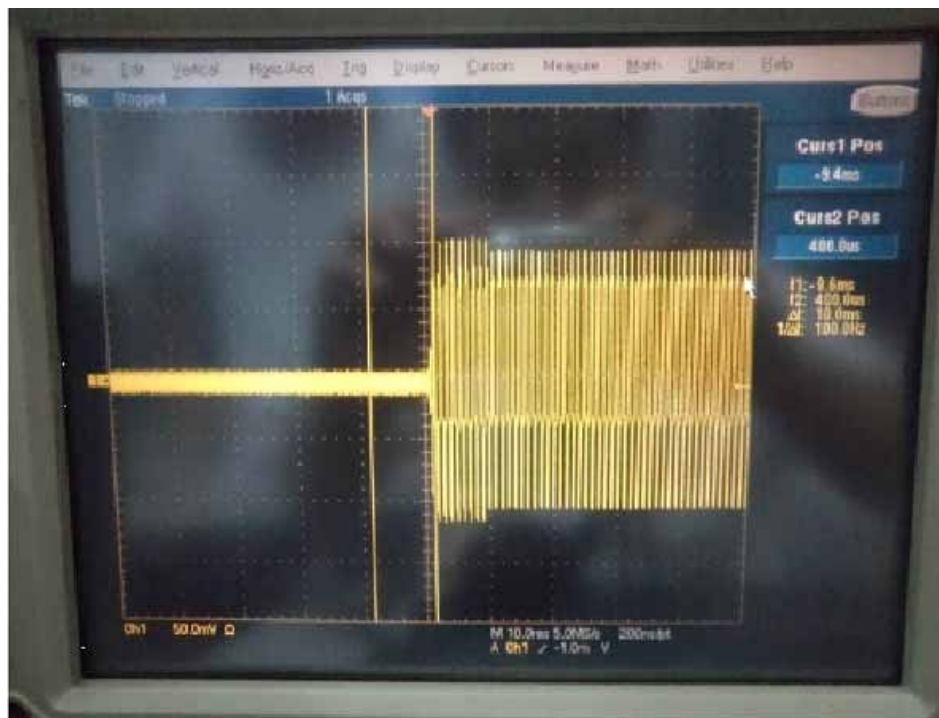

## **12. RADIATED EMISSION ON RECEIVING MODE**

### **12.1 PROVISIONS APPLICABLE**

FCC Part 15 Subpart B Section 15.109


RSS-Gen Subpart B Section RSS-Gen.6.1

### **12.2 TEST METHOD**

ANSI C 63.4: 2003


### 12.3 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)

#### RADIATED EMISSION TEST RESULTS – HORIZONTAL

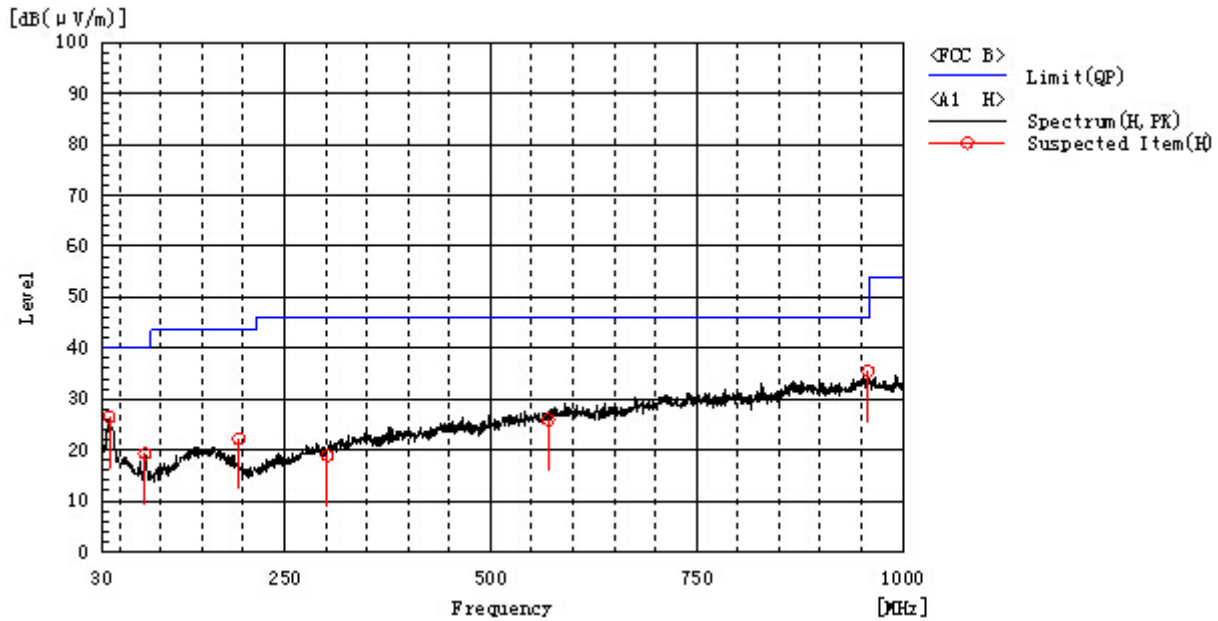


| Frequency<br>MHz | Polarization | Reading<br>dB(uV) | Factor<br>dB<br>(1/m) | Level<br>dB(uV/m)<br>PK | Limit<br>dB(uV/m)<br>QP | Margin<br>dB | Pass/Fail | Height<br>cm | Angle<br>deg |
|------------------|--------------|-------------------|-----------------------|-------------------------|-------------------------|--------------|-----------|--------------|--------------|
| 37.760           | H            | 5.2               | 21.2                  | 26.4                    | 40.0                    | 13.6         | Pass      | 100.0        | 293.8        |
| 957.805          | H            | 6.7               | 28.7                  | 35.4                    | 46.0                    | 10.6         | Pass      | 200.0        | 333.4        |
| 302.085          | H            | 3.7               | 15.2                  | 18.9                    | 46.0                    | 27.1         | Pass      | 100.0        | 262.0        |
| 194.900          | H            | 9.6               | 12.6                  | 22.2                    | 43.5                    | 21.3         | Pass      | 200.0        | 333.4        |
| 81.410           | H            | 9.6               | 9.7                   | 19.3                    | 40.0                    | 20.7         | Pass      | 200.0        | 325.1        |
| 570.290          | H            | 3.8               | 22.1                  | 25.9                    | 46.0                    | 20.1         | Pass      | 100.0        | 267.0        |

# RADIATED EMISSION TEST RESULTS – VERTICAL

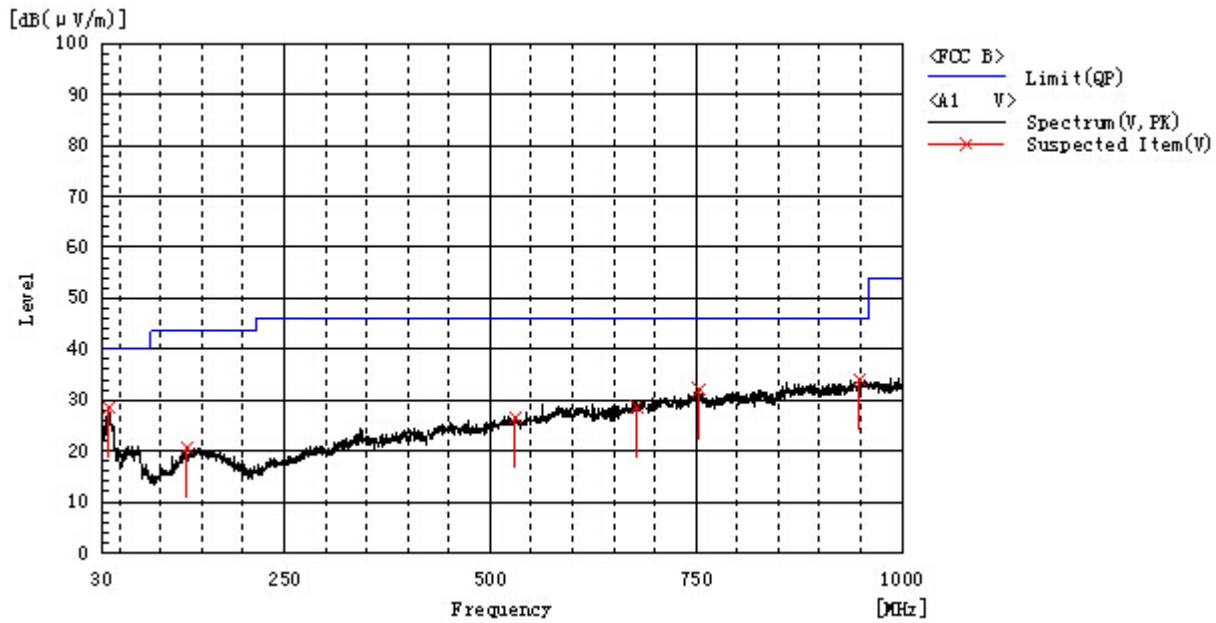


| Frequency<br>MHz | Polarization | Reading<br>dB(uV) | Factor<br>dB<br>(1/m) | Level<br>dB(uV/m)<br>PK | Limit<br>dB(uV/m)<br>QP | Margin<br>dB | Pass/Fail | Height<br>cm | Angle<br>deg |
|------------------|--------------|-------------------|-----------------------|-------------------------|-------------------------|--------------|-----------|--------------|--------------|
| 37.275           | V            | 7.8               | 20.8                  | 28.6                    | 40.0                    | 11.4         | Pass      | 100.0        | 261.1        |
| 948.590          | V            | 5.5               | 28.7                  | 34.2                    | 46.0                    | 11.8         | Pass      | 200.0        | 113.2        |
| 131.850          | V            | 6.3               | 14.3                  | 20.6                    | 43.5                    | 22.9         | Pass      | 200.0        | 193.4        |
| 530.520          | V            | 5.1               | 21.5                  | 26.6                    | 46.0                    | 19.4         | Pass      | 100.0        | 54.5         |
| 678.445          | V            | 4.4               | 24.3                  | 28.7                    | 46.0                    | 17.3         | Pass      | 200.0        | 100.8        |
| 753.135          | V            | 6.5               | 25.6                  | 32.1                    | 46.0                    | 13.9         | Pass      | 100.0        | 314.4        |

# RADIATED EMISSION TEST RESULTS – HORIZONTAL (ABOVE 1G)

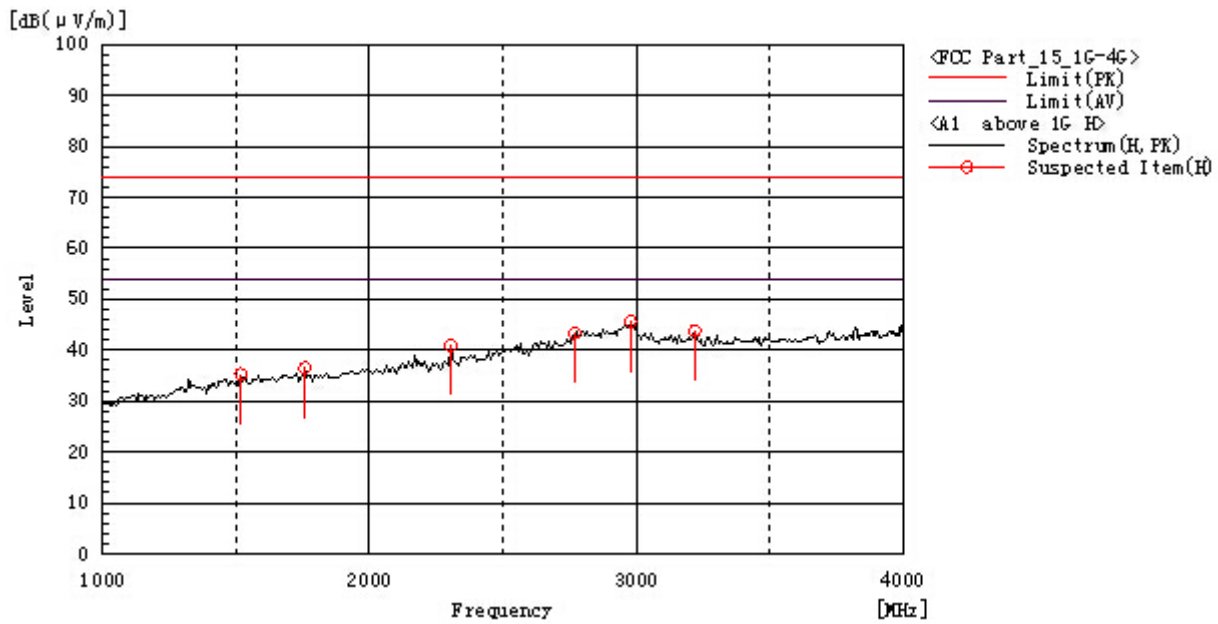

| Frequency<br>MHz | Polarization | Reading<br>dB(uV) | Factor<br>dB<br>(1/m) | Level<br>dB(uV/m)<br>PK | Limit<br>dB(uV/m)<br>PK | Margin<br>dB<br>PK | Pass/Fail | Height<br>cm | Angle<br>deg |
|------------------|--------------|-------------------|-----------------------|-------------------------|-------------------------|--------------------|-----------|--------------|--------------|
| 2305.000         | H            | 42.1              | -1.2                  | 40.9                    | 74.0                    | 33.1               | Pass      | 100.0        | 180.9        |
| 2770.000         | H            | 40.9              | 2.4                   | 43.3                    | 74.0                    | 30.7               | Pass      | 100.0        | 74.6         |
| 2980.000         | H            | 42.2              | 3.4                   | 45.6                    | 74.0                    | 28.4               | Pass      | 100.0        | 145.9        |
| 1517.500         | H            | 39.3              | -4.0                  | 35.3                    | 74.0                    | 38.7               | Pass      | 100.0        | 252.3        |
| 1757.500         | H            | 39.8              | -3.3                  | 36.5                    | 74.0                    | 37.5               | Pass      | 100.0        | 74.6         |
| 3220.000         | H            | 39.9              | 3.9                   | 43.8                    | 74.0                    | 30.2               | Pass      | 200.0        | 30.3         |

# RADIATED EMISSION TEST RESULTS – VERTICAL (ABOVE 1G)

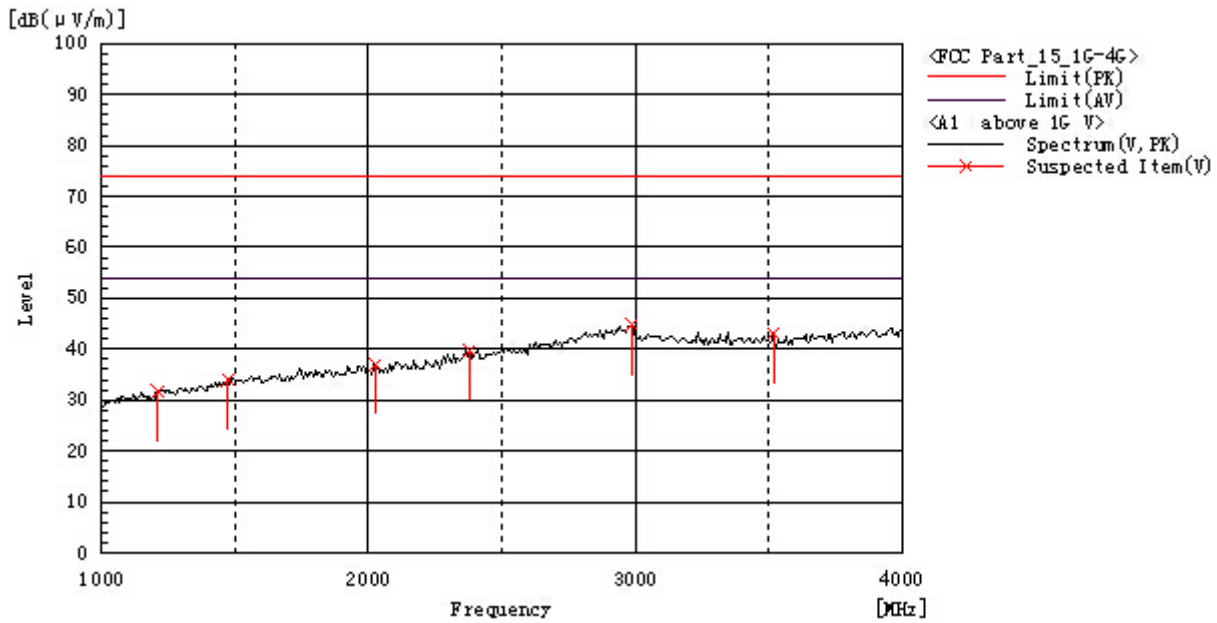

| Frequency<br>MHz | Polarization | Reading<br>dB(uV) | Factor<br>dB<br>(1/m) | Level<br>dB(uV/m)<br>PK | Limit<br>dB(uV/m)<br>PK | Margin<br>dB<br>PK | Pass/Fail | Height<br>cm | Angle<br>deg |
|------------------|--------------|-------------------|-----------------------|-------------------------|-------------------------|--------------------|-----------|--------------|--------------|
| 2987.500         | V            | 41.2              | 3.5                   | 44.7                    | 74.0                    | 29.3               | Pass      | 100.0        | 65.5         |
| 2380.000         | V            | 40.4              | -0.6                  | 39.8                    | 74.0                    | 34.2               | Pass      | 200.0        | 72.4         |
| 2027.500         | V            | 39.6              | -2.6                  | 37.0                    | 74.0                    | 37.0               | Pass      | 200.0        | 251.5        |
| 1210.000         | V            | 38.0              | -6.2                  | 31.8                    | 74.0                    | 42.2               | Pass      | 100.0        | 207.3        |
| 1472.500         | V            | 38.1              | -4.2                  | 33.9                    | 74.0                    | 40.1               | Pass      | 200.0        | 181.0        |
| 3520.000         | V            | 38.7              | 4.3                   | 43.0                    | 74.0                    | 31.0               | Pass      | 200.0        | 36.9         |

## 13. AUDIO LOW PASS FILTER RESPONSE

### 13.1 LIMITS

**2.1047(a):** Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

**90.242(b)(8):** Recommended audio filter attenuation characteristics are given below:

| Audio band               | Minimum Attenuation Rel. to 1 KHz Attenuation    |
|--------------------------|--------------------------------------------------|
| 3 –20 KHz<br>20 – 30 KHz | $60 \log_{10}(f/3)$ dB where f is in KHz<br>50dB |

### 13.2. METHOD OF MEASUREMENTS


The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

### 13.3 TEST DATA


#### 12.5 KHZ CHANNEL SPACING, F3E, FREQUENCY OF ALL MODULATION STATES (TEST RESULT FOR UHF)

| Frequency | Audio In | Audio out | Attenuation | Attenuation  | Recommended Attenuation |
|-----------|----------|-----------|-------------|--------------|-------------------------|
| (KHz)     | (dBV)    | (dBV)     | (Out_In)    | Rel.to 3 KHz | (dB)                    |
|           |          |           | dB          | ( dB)        |                         |
| 0.1       | -76.15   | -31.21    | 46.37       | -36.53       |                         |
| 0.2       | -76.15   | -17.36    | 58.24       | -25.63       |                         |
| 0.4       | -76.15   | -6.27     | 71.64       | -12.83       |                         |
| 0.6       | -76.15   | 0.41      | 74.24       | -6.43        |                         |
| 0.8       | -76.15   | 4.15      | 78.94       | -2.93        |                         |
| 1.0       | -76.15   | 7.16      | 83.64       | -0.03        |                         |
| 1.5       | -76.15   | 8.25      | 84.84       | 2.15         |                         |
| 2.0       | -76.15   | 8.97      | 85.34       | 1.56         |                         |
| 2.5       | -76.15   | 7.52      | 83.84       | 0.66         |                         |
| 3.0       | -76.15   | 6.27      | 82.54       | -1.81        | 0                       |
| 3.5       | -76.15   | 2.63      | 78.44       | -4.92        | -4                      |
| 4.0       | -76.15   | -2.27     | 74.64       | -9.42        | -7                      |
| 4.5       | -76.15   | -9.2      | 68.24       | -16.52       | -12                     |
| 5.0       | -76.15   | -15.16    | 60.64       | -21.72       | -15                     |
| 6.0       | -76.15   | -21.22    | 54.14       | -28.62       | -18                     |
| 7.0       | -76.15   | -31.6     | 46.24       | -36.42       | -22                     |
| 8.0       | -76.15   | -39.21    | 37.94       | -47.62       | -26                     |
| 9.0       | -76.15   | -61.95    | 15.13       | -66.92       | -28                     |
| 10.0      | -76.15   | -61.95    | 15.13       | -66.44       | -31                     |
| 12.0      | -76.15   | -61.95    | 15.13       | -66.44       | -37                     |
| 14.0      | -76.15   | -61.95    | 15.13       | -66.44       | -40                     |
| 16.0      | -76.15   | -61.95    | 15.13       | -66.44       | -44                     |
| 18.0      | -76.15   | -61.95    | 15.13       | -66.44       | -47                     |
| 20.0      | -76.15   | -61.95    | 15.13       | -66.44       | -49                     |
| 25.0      | -76.15   | -61.95    | 15.13       | -66.44       | -49                     |
| 30.0      | -76.15   | -61.95    | 15.13       | -66.44       | -49                     |
| 35.0      | -76.15   | -61.95    | 15.13       | -66.44       | -49                     |
| 40.0      | -76.15   | -61.95    | 15.13       | -66.44       | -49                     |
| 45.0      | -76.15   | -61.95    | 15.13       | -66.44       | -49                     |
| 50.0      | -76.15   | -61.95    | 15.13       | -66.44       | -49                     |

**Note:** Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

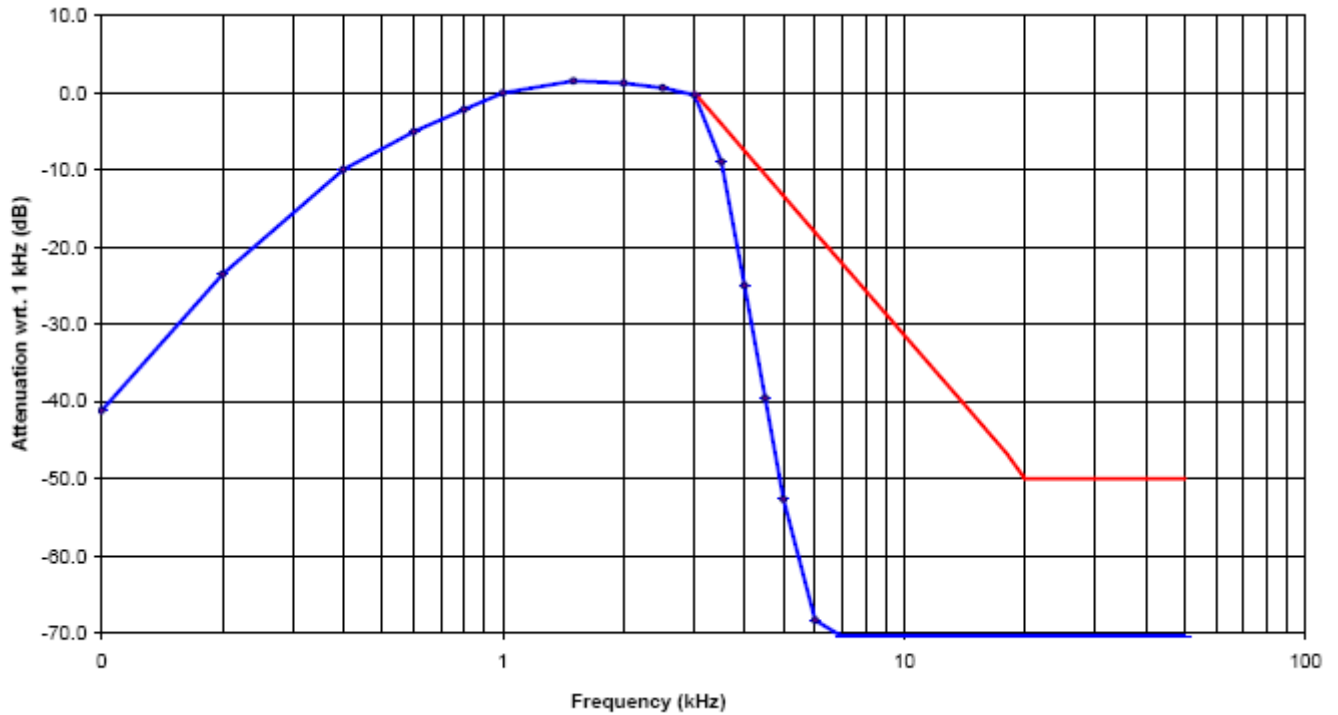

**APPENDIX I: PHOTOGRAPHS OF SETUP**  
RADIATED EMISSION TEST SETUP

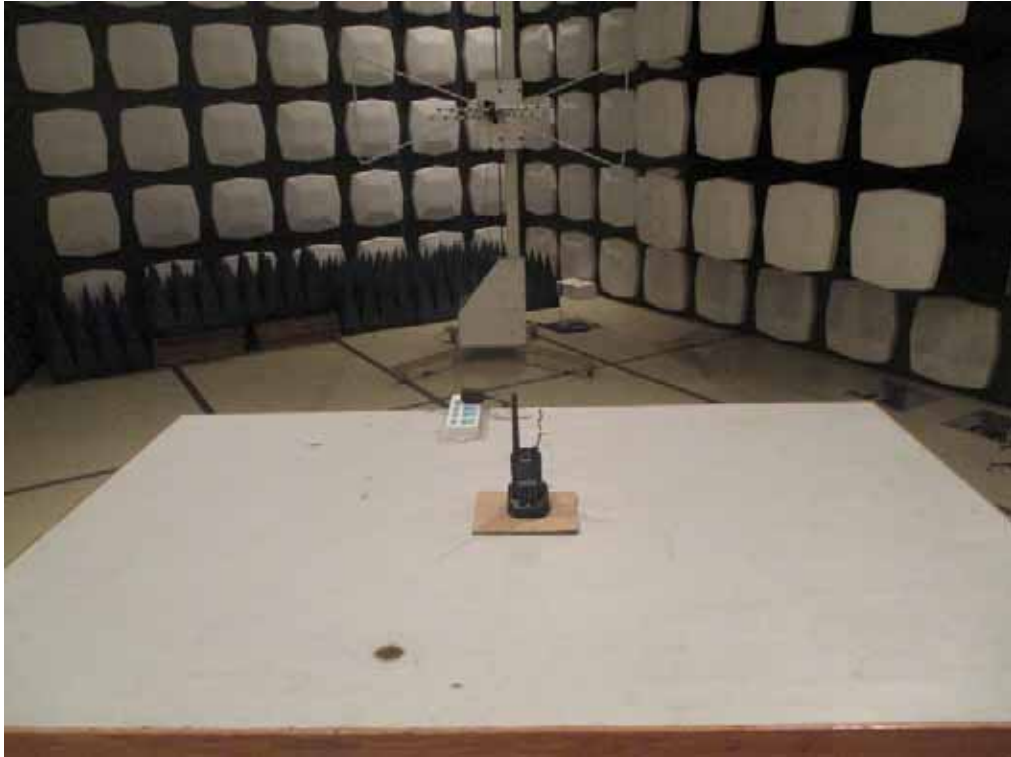

### CONDUCTED EMISSION TEST SETUP



**APPENDIX II: EXTERNAL VIEW OF EUT**  
TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW-1 OF EUT



OPEN VIEW-2 OF EUT




INTERNAL VIEW-1 OF EUT




INTERNAL VIEW-2 OF EUT



INTERNAL VIEW-3 OF EUT

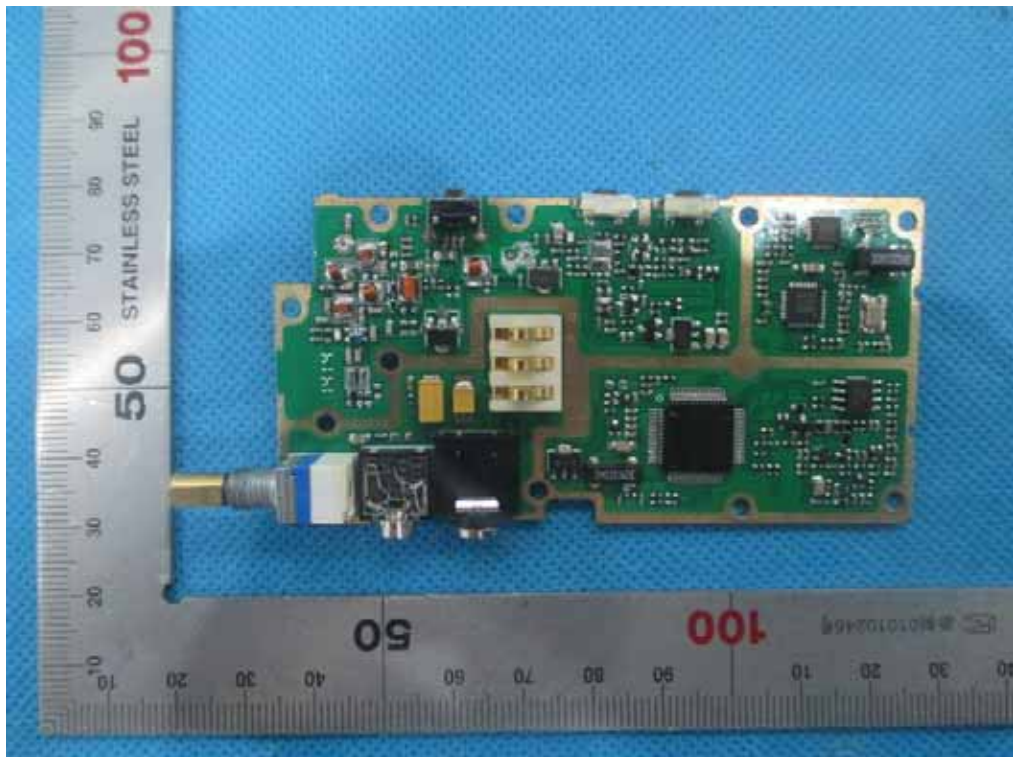

INTERNAL VIEW-4 OF EUT

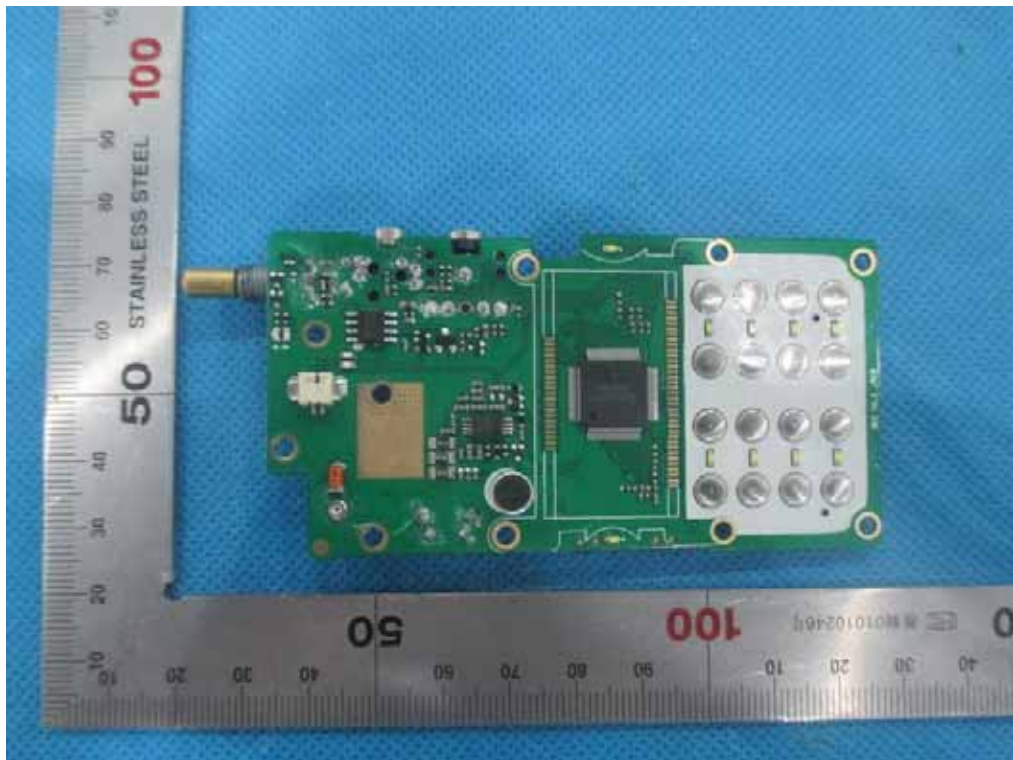

-----END OF REPORT-----