



TEST REPORT

No. I19D00050-EMC01

For

Client : Doro AB

Production : Clamshell Phone

Model Name : DFC-0260

Brand Name: Doro

FCC ID: WS5DFC0260

Hardware Version: V01A(HW 2011)

Software Version: DFC0260_NF05_N_S01A_V05_M20190627_MP

Issued date: 2019-07-16

NOTE

1. The test results in this test report relate only to the devices specified in this report.
2. This report shall not be reproduced except in full without the written approval of East China Institute of Telecommunications
3. The measurement uncertainty is not taken into account when deciding conformity, and the results of measurement (or the average of measurement results) are directly used as the criterion for the stating conformity.

Test Laboratory:

East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: +862163843300

FAX: +862163843301

E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I19D00050-EMC01	00	2019-07-10	Initial creation of test report
I19D00050-EMC01	01	2019-07-16	Second creation of test report

CONTENTS

1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT DATA.....	6
1.4. SIGNATURE.....	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION.....	7
2.2. MANUFACTURER INFORMATION.....	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT.....	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4. REFERENCE DOCUMENTS.....	9
4.1 REFERENCE DOCUMENTS FOR TESTING.....	9
5. TEST RESULTS.....	10
5.1 SUMMARY OF TEST RESULTS	10
5.2 STATEMENTS.....	10
6. TEST EQUIPMENT UTILIZED	11
6.1 RADIATED EMISSION EQUIPMENT LIST	11
6.1 AC CONDUCTED EMISSION EQUIPMENT LIST	11
7. SYSTEM CONFIGURATION DURING TEST.....	12
7.1 TEST MODE.....	12
7.2 CONNECTION DIAGRAM OF TEST SYSTEM.....	13
8. MEASUREMENT RESULTS.....	14
8.1 RADIATED EMISSION 30MHZ-18GHZ.....	14

8.2 AC CONDUCTED EMISSION.....	18
--------------------------------	----

1. Test Laboratory

1.1. Testing Location

Company Name: ECIT Shanghai, East China Institute of Telecommunications
Address: 7F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai,
P. R. China
Postal Code: 200001
Telephone: 86-21-63843300
Fax: 86-21-63843301
FCC registration No: 958356


1.2. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 30-60%RH

1.3. Project data

Project Leader: Yu Anlu
Testing Start Date: 2019-05-09
Testing End Date: 2019-07-15


1.4. Signature



Lu Huifang
(Prepared this test report)



You Jinjun
(Reviewed this test report)



Zheng Zhongbin
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Doro AB
Address : Doro AB, JörgenKocksgatan 1B, SE 211 20 MALMÖ, SWEDEN
Telephone: +46 46 280 50 76
Post Code: 315500

2.2. Manufacturer Information

Company Name: Doro AB
Address : Doro AB, JörgenKocksgatan 1B, SE 211 20 MALMÖ, SWEDEN
Telephone: +46 46 280 50 76
Post Code: 315500

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Clamshell Phone
Model name	DFC-0260
GSM Frequency Band	GSM900/GSM1800/GSM1900
WCDMA Frequency Band	Band I / Band VIII
Additional Communication Function	BT2.1,EDR; GPS;FM;MP3;

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N62	356756100006623	V01A(HW 2011)	DFC0260_NF05_N_S01 A_V05_M20190627_MP	2019-05-05

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	SN
CA17	Adapter	A31A-050055U-EU1	NA
CB05	Adapter	S003ATB0500055	NA
CC01	Adapter	A2-501000	NA
CD03	Adapter	A806A-050100U-UK1	NA
CE02	Adapter Cradle	DFC-0260	NA
UA01	USB Cable	M039B0800150	NA
AA02	Earphone	JWEP0782-M01	NA
AB09	Earphone	JWEP0944-M01R	NA
BA43	Battery	DBC-800D	08762V9021302521
AE1	Desktop PC	OptiPlex 790 DT	X8RP1 A01 APCC
AE2	Notebook PC	DELL E5250	7HXWF72
AE3	LAN Cable	NA	NA
AE4	VGA Cable	NA	NA
AE5	RS232 Cable	NA	NA
AE6	Keyboard	KB212-B	CN-0Y88XT-65890-12I-005Q-A00
AE7	Mouse	MS111-P	CN-011D3V-71581-19J-1A64
AE8	Monitor	Dell E1709Wc	NA
AE9	USB Cable	NA	NA
AE10	SanDisk Ultra32GB	microSDHC UHS-I	NA

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1 Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	2019/6/21
ANSI C63.4	Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

5. Test Results

5.1 Summary of Test Results

Items	Test List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	Pass
2	AC Conducted Emission	15.107(a)	Pass

5.2 Statements

The DFC-0260 manufactured by Doro AB is a parent model for testing. ECIT only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

ECIT has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

6. Test Equipment Utilized

6.1 Radiated Emission Equipment list

Item	Instrument Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communicatio	CMU200	123126	R&S	2018-05-11	1 year
					2019-05-10	
2	Test Receiver	ESU40	100307	R&S	2018-05-11	1 year
					2019-05-10	
3	Trilog Antenna	VULB9163	VULB9163-515	Schwarzbeck	2017-02-25	3 years
4	Double Ridged Guide	ETS-3117	00135885	ETS	2017-01-11	3 years
5	EMI Test Software	EMC32 V9.15	NA	R&S	NA	NA
6	Signal Generator	SMF 100A	102314	R&S	2018-05-11	1 year
					2019-05-10	
7	GPS Simulator	GSS 4200	1182	SPIRENT	2018-12-17	1 year

6.1 AC Conducted Emission Equipment list


Item	Instrument Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communicatio	CMU200	123123	R&S	2018-05-11	1 year
					2019-05-10	
2	Test Receiver	ESCI	101235	R&S	2018-05-11	1 year
					2019-05-10	
3	2-Line V-Network	ENV216	101380	R&S	2018-05-11	1 year
					2019-05-10	
4	EMI Test Software	EMC32 V10.35.02	NA	R&S	NA	NA
5	Signal Generator	SMF 100A	102314	R&S	2018-05-11	1 year
					2019-05-10	
6	GPS Simulator	GSS 4200	1182	SPIRENT	2018-12-17	1 year

7. System Configuration during Test


7.1 Test Mode

Test Item	Function Type
AC Conducted Emission	Mode 1:GSM1900 idle mode+Camera+CA17+UA01+AA02<Figure 2> Mode 2:Charging mode+Camera+CB05+UA01+AB09<Figure 2> Mode 3:Charging mode+Camera+CC01+UA01+AA02<Figure 2> Mode 4:Charging mode+Camera+CD03+UA01+AB09<Figure 2> Mode 5:Charging mode+Camera+CD03+UA01+AA02+CE02<Figure 2> Mode 6: USB cable (Data Link with PC) <Figure 1> Mode 7:FM mode + AA02<Figure 2> Mode 8:FM mode + AB09<Figure 2> Mode 9:GPS mode<Figure 2>
Radiated Emission	Mode 1:GSM1900 idle mode+Camera+CA17+UA01+AA02<Figure 2> Mode 2:Charging mode+Camera+CB05+UA01+AB09<Figure 2> Mode 3:Charging mode+Camera+CC01+UA01+AA02<Figure 2> Mode 4:Charging mode+Camera+CD03+UA01+AB09<Figure 2> Mode 5:Charging mode+Camera+CD03+UA01+AA02+CE02<Figure 2> Mode 6: USB cable (Data Link with PC) <Figure 1> Mode 7:FM mode + AA02<Figure 2> Mode 8:FM mode + AB09<Figure 2> Mode 9:GPS mode<Figure 2>
Remark: 1. All test modes are performed, only the worst cases test data are recorded in this report. 2. Data Link with PC means data application transferred mode between EUT and PC. 3. The test specification for FM function: the EUT is synchronized to a FM signal generator. The EUT is keeping on demodulating the FM signal and outputting the audio signal through the headset. 4. EUT and GPS simulator (GSS4200) connection is established.	

7.2 Connection Diagram of Test System

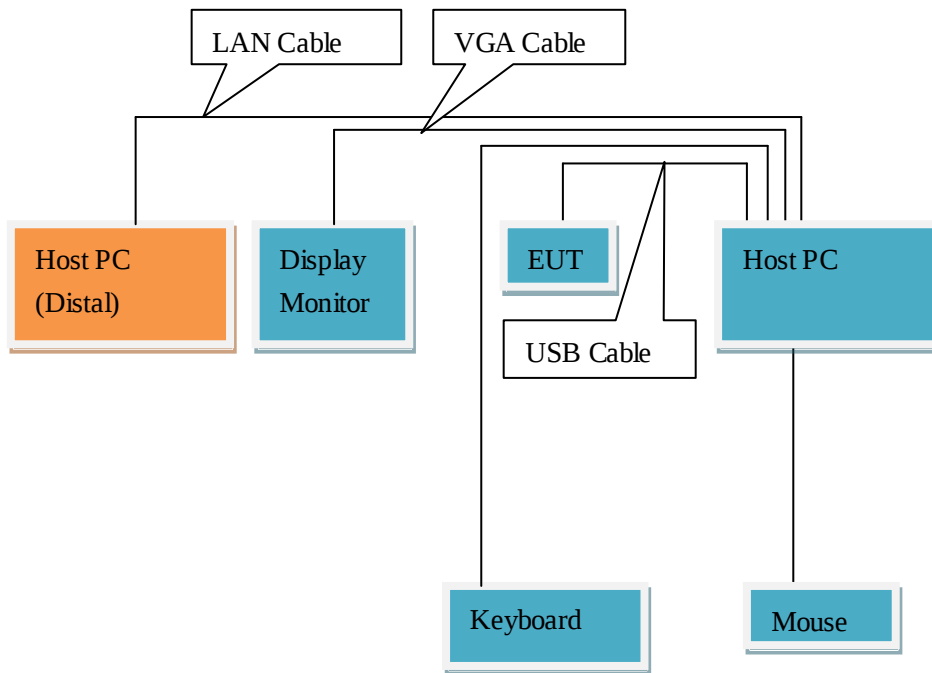

<Figure 1>

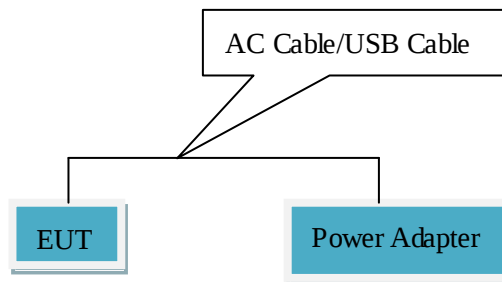

<Figure 2>

8. Measurement Results

Only the worst test result was shown in this report.

8.1 Radiated Emission 30MHz-18GHz

Method of Measurement

For 30MHz -1000MHz, the EUT was placed on the top of a rotating 0.8m table above the ground at a semi-anechoic chamber. The distance between the EUT and the received antenna was 3 meters. The table was rotated 360 degree and the received antenna mounted on a variable-height antenna tower was varied from 1m to 4m to find the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna were set during the measurement. Tested in accordance with the procedures of ANSI C63.4-2014, section 8.3.

For 1000MHz -18000MHz, The maximal emission value was acquired by adjusting the antenna height, The table was rotated 360 degree to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna were set during the measurement.

Limits for Radiated Emission at a measuring distance of 3m

Frequency Range (MHz)	Quasi-Peak (dBuV/m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Frequency Range (MHz)	Peak (dBuV/m)	Average (dBuV/m)
Above 1000	74	54

Test conditions

Frequency Range (MHz)	RBW/VBW	Sweep Time (s)
30-1000	120kHz/300kHz	Auto
1000-18000	1MHz/3MHz	Auto

Uncertainty Measurement


The measurement uncertainty (30MHz-1000MHz) is 4.98 dB (k=2).

The measurement uncertainty (1000MHz-18000MHz) is 5.06 dB (k=2).


Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier, the Emissions in the frequency band 18GHz-40GHz is more than 20dB below the limit are not report.

Mode 5:Charging mode+Camera+CD03+UA01+AA02+CE02<Figure 2>

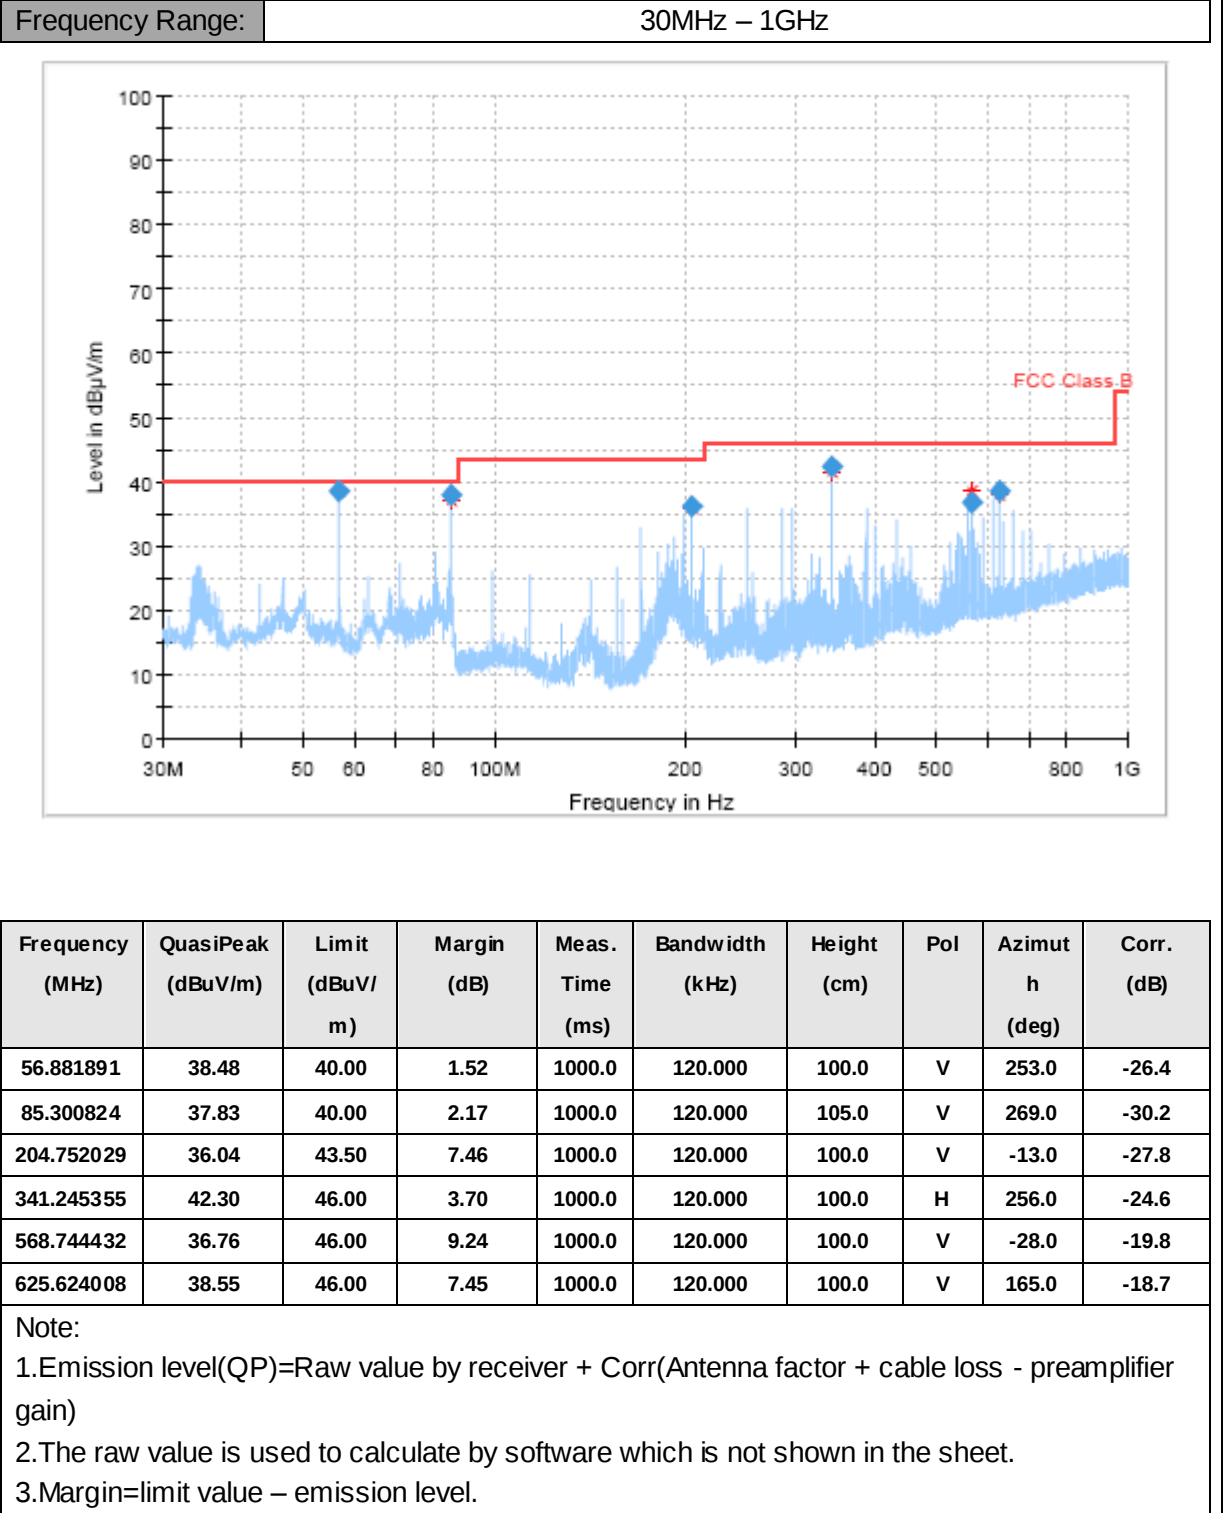

Mode 6: USB cable (Data Link with PC) <Figure 1>

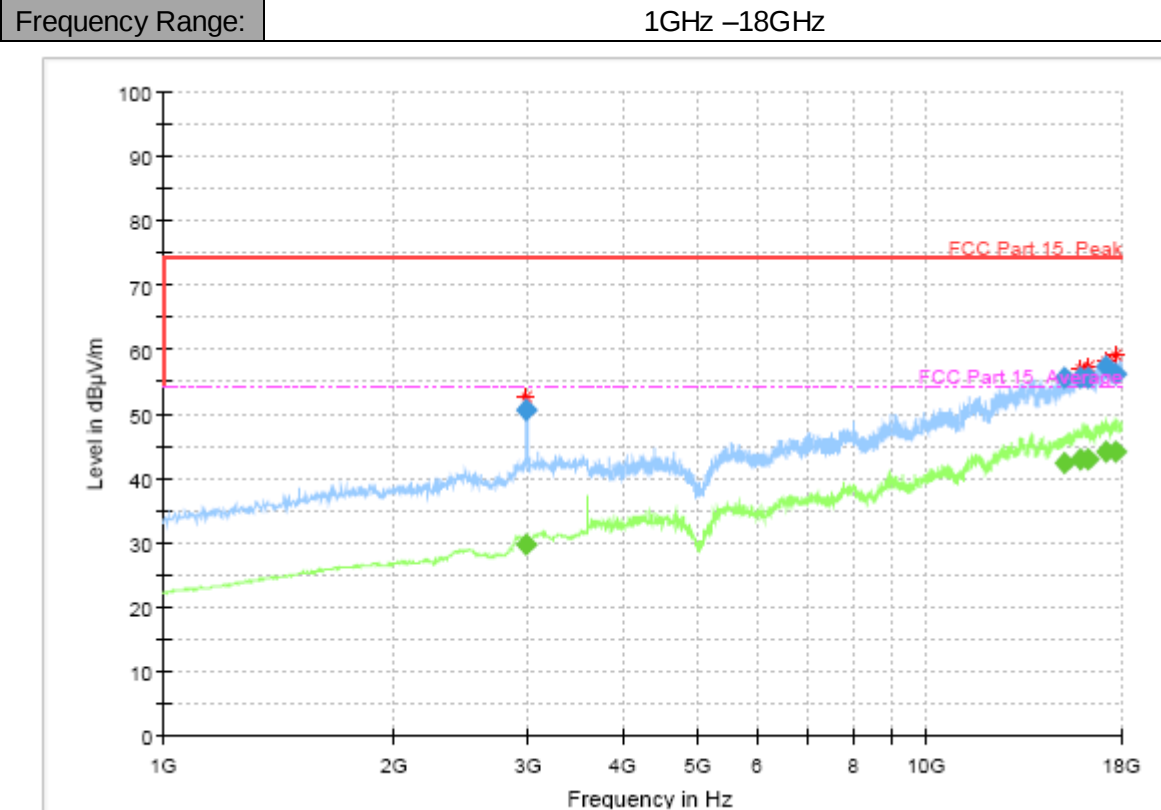


Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2986.600000	50.47	---	74.00	23.53	100.0	1000.000	100.0	V	17.0
2986.600000	---	29.76	54.00	24.24	100.0	1000.000	100.0	V	17.0
15147.400000	---	42.35	54.00	11.65	100.0	1000.000	200.0	V	0.0
15147.400000	55.49	---	74.00	18.51	100.0	1000.000	200.0	V	0.0
15919.800000	---	43.04	54.00	10.96	100.0	1000.000	200.0	V	225.0
15919.800000	55.54	---	74.00	18.46	100.0	1000.000	200.0	V	225.0
16286.200000	---	42.88	54.00	11.12	100.0	1000.000	100.0	V	131.0
16286.200000	55.52	---	74.00	18.48	100.0	1000.000	100.0	V	131.0
17201.400000	---	44.23	54.00	9.77	100.0	1000.000	100.0	V	152.0
17201.400000	57.22	---	74.00	16.78	100.0	1000.000	100.0	V	152.0
17701.000000	56.06	---	74.00	17.94	100.0	1000.000	200.0	V	0.0
17701.000000	---	44.08	54.00	9.92	100.0	1000.000	200.0	V	0.0

Note:

- 1.Emission level(peak or average)=Raw value by receiver + Corr(Antenna factor+ cable loss - preamplifier gain)
- 2.The raw value is used to calculate by software which is not shown in the sheet.
- 3.Margin=limit value – emission level.

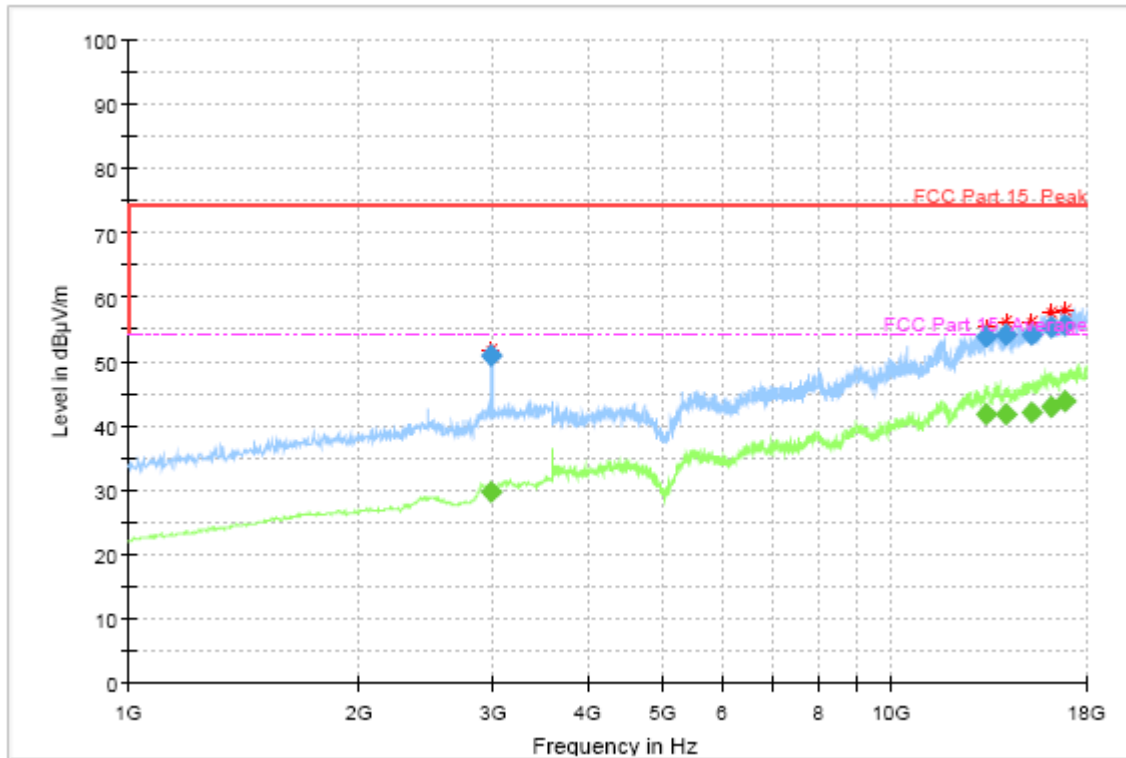

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2988.000000	50.76	---	74.00	23.24	100.0	1000.000	200.0	H	339.0
2988.000000	---	29.67	54.00	24.33	100.0	1000.000	200.0	H	339.0
13321.600000	---	41.75	54.00	12.25	100.0	1000.000	100.0	H	34.0
13321.600000	53.91	---	74.00	20.09	100.0	1000.000	100.0	H	34.0
14074.000000	---	41.72	54.00	12.28	100.0	1000.000	200.0	H	97.0
14074.000000	54.01	---	74.00	19.99	100.0	1000.000	200.0	H	97.0
15195.200000	---	42.12	54.00	11.88	100.0	1000.000	100.0	H	3.0
15195.200000	54.17	---	74.00	19.83	100.0	1000.000	100.0	H	3.0
16197.200000	---	42.95	54.00	11.05	100.0	1000.000	200.0	H	286.0
16197.200000	55.20	---	74.00	18.80	100.0	1000.000	200.0	H	286.0
16823.000000	55.65	---	74.00	18.35	100.0	1000.000	100.0	H	146.0
16823.000000	---	43.69	54.00	10.31	100.0	1000.000	100.0	H	146.0

Note:

- 1.Emission level(peak or average)=Raw value by receiver + Corr(Antenna factor+ cable loss - preamplifier gain)
- 2.The raw value is used to calculate by software which is not shown in the sheet.
- 3.Margin=limit value – emission level.

8.2 AC Conducted Emission

Method of Measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies with the band 150 kHz to 30MHz shall not exceed the limits. Both lines of the power mains connected to the EUT were checked for maximum conducted interference. Tested in accordance with the procedures of ANSI C63.4-2014, section 7.3

Limit of Conducted Emission

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

Test Condition in Charging Mode

Voltage (V)	Frequency (Hz)	RBW	Sweep Time (s)
120	60	9 kHz	Auto

Uncertainty Measurement


The measurement uncertainty is 3.66dB (k=2).

Test Results

Mode 4: Charging mode+Camera+CD03+UA01+AB09<Figure 2>

Frequency Range:

150kHz – 30MHz

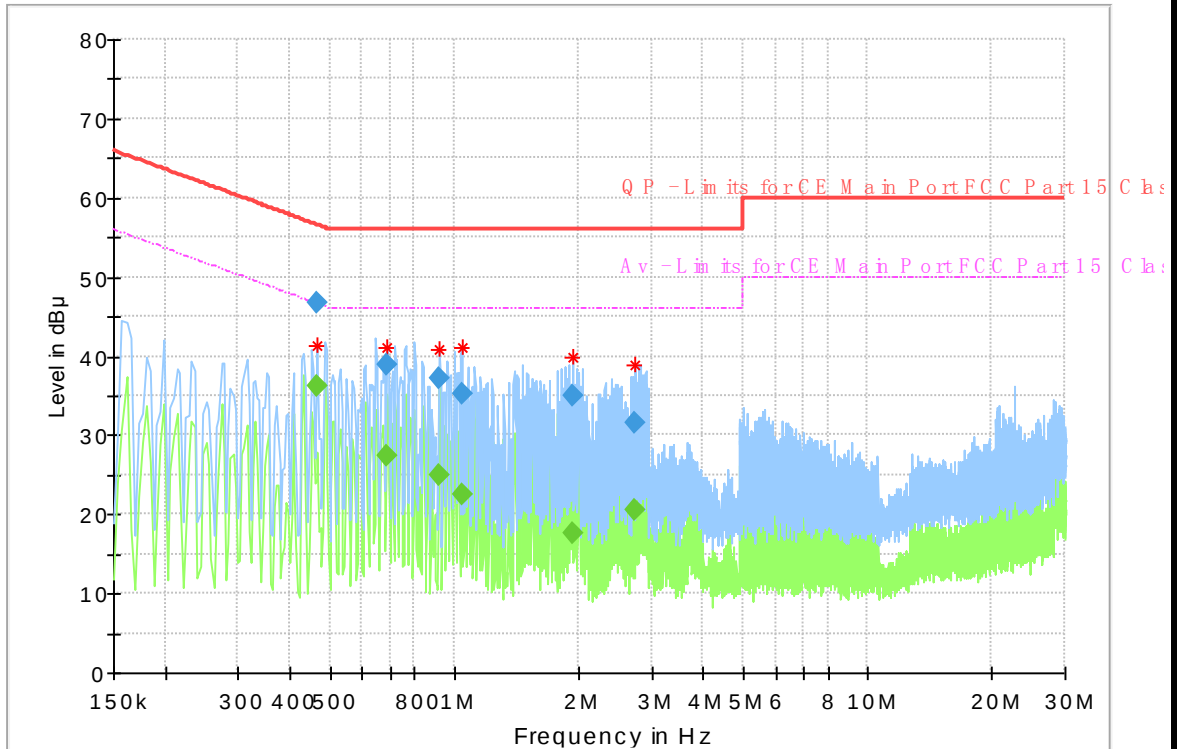

Frequency (MHz)	QuasiPeak (dBμ V)	Average (dBμ V)	Limit (dBμ V)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.463425	---	36.22	46.63	10.41	15000.	9.000	L1	ON	9.8
0.463425	46.70	---	56.63	9.94	15000.	9.000	L1	ON	9.8
0.687300	---	27.30	46.00	18.70	15000.	9.000	L1	ON	9.8
0.687300	38.99	---	56.00	17.01	15000.	9.000	L1	ON	9.8
0.922369	---	24.84	46.00	21.16	15000.	9.000	L1	ON	9.9
0.922369	37.11	---	56.00	18.89	15000.	9.000	L1	ON	9.9
1.041769	---	22.59	46.00	23.41	15000.	9.000	L1	ON	9.9
1.041769	35.30	---	56.00	20.70	15000.	9.000	L1	ON	9.9
1.933538	---	17.73	46.00	28.27	15000.	9.000	L1	ON	10.0
1.933538	34.99	---	56.00	21.01	15000.	9.000	L1	ON	10.0
2.746950	---	20.45	46.00	25.55	15000.	9.000	L1	ON	10.1
2.746950	31.65	---	56.00	24.35	15000.	9.000	L1	ON	10.1

Note:

- 1.Emission level(quasi-peak or Average peak)=Raw value by receiver + Corr(Insertion loss+ cable loss)
- 2.The raw value is used to calculate by software which is not shown in the sheet.
- 3.Margin=limit value – emission level.
- 4.L1 and N line is all have been tested, the result of them is synthesized in the above data diagram.

*****END OF REPORT*****