

FCC RF Test Report


APPLICANT : Doro AB
EQUIPMENT : GSM/GPRS WCDMA Mobile Telephone
BRAND NAME : doro
MODEL NAME : Doro PhoneEasy 626
MARKETING NAME : Doro PhoneEasy 626
FCC ID : WS5DORO626
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Jan. 09, 2014 and testing was completed on Feb. 26, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Testing Site	6
1.7 Applied Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Descriptions of Test Mode	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example	10
3 TEST RESULT	11
3.1 Number of Channel Measurement	11
3.2 Hopping Channel Separation Measurement	13
3.3 Dwell Time Measurement	20
3.4 20dB and 99% Bandwidth Measurement	22
3.5 Peak Output Power Measurement	35
3.6 Conducted Band Edges Measurement	37
3.7 Conducted Spurious Emission Measurement	44
3.8 Radiated Band Edges and Spurious Emission Measurement	54
3.9 AC Conducted Emission Measurement	68
3.10 Antenna Requirements	72
4 LIST OF MEASURING EQUIPMENT	73
5 UNCERTAINTY OF EVALUATION	74
APPENDIX A. SETUP PHOTOGRAPHS	
APPENDIX B. PHOTOGRAPHS OF EUT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR312203-01	Rev. 01	Initial issue of report	Mar. 18, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	RSS-210 A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	RSS-210 A8.1(b)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	RSS-210 A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	RSS-210 A8.1(a)	20dB Bandwidth	NA	Pass	-
3.4	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	RSS-210 A8.5	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 14.73 dB at 42.610 MHz
3.9	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 4.50 dB at 0.560 MHz
3.10	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Doro AB

Magistratsvägen 10 SE-226 43 Lund Sweden

1.2 Manufacturer

CK TELECOM LTD.

Technology Road. High-Tech Development Zone. Heyuan, Guangdong, P.R.China.

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	GSM/GPRS WCDMA Mobile Telephone
Brand Name	doro
Model Name	Doro PhoneEasy 626
Marketing Name	Doro PhoneEasy 626
FCC ID	WS5DORO626
EUT supports Radios application	GSM/GPRS/WCDMA/HSPA/Bluetooth v2.1 + EDR
HW Version	SHUTTLE-V2.0
SW Version	SHUTTLE-S13A_DORO626_L3EN_111_140224
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 8.29 dBm (0.0067 W) Bluetooth EDR (2Mbps) : 8.06 dBm (0.0064 W) Bluetooth EDR (3Mbps) : 8.43 dBm (0.0070 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.888MHz Bluetooth EDR (2Mbps) : 1.176MHz Bluetooth EDR (3Mbps) : 1.168MHz
Antenna Type	PIFA Antenna with gain -2.00 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.			
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-SZ	03CH01-SZ	CO01-SZ	831040/4086F-1

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, "Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	6.45 dBm	6.36 dBm	6.61 dBm
Ch39	2441MHz	8.29 dBm	8.06 dBm	8.43 dBm
Ch78	2480MHz	8.23 dBm	7.99 dBm	8.38 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (X plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz for Sample 1 Mode 2: CH39_2441 MHz for Sample 1 Mode 3: CH78_2480 MHz for Sample 1 Mode 4: CH78_2480 MHz for Sample 2 Mode 5: CH78_2480 MHz for Sample 3		
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + Earphone + USB Cable (Charging from Adapter) for Sample 1		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performance with adapter, earphone, and USB cable.			
3. All the conducted test cases were performance with Sample 1.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

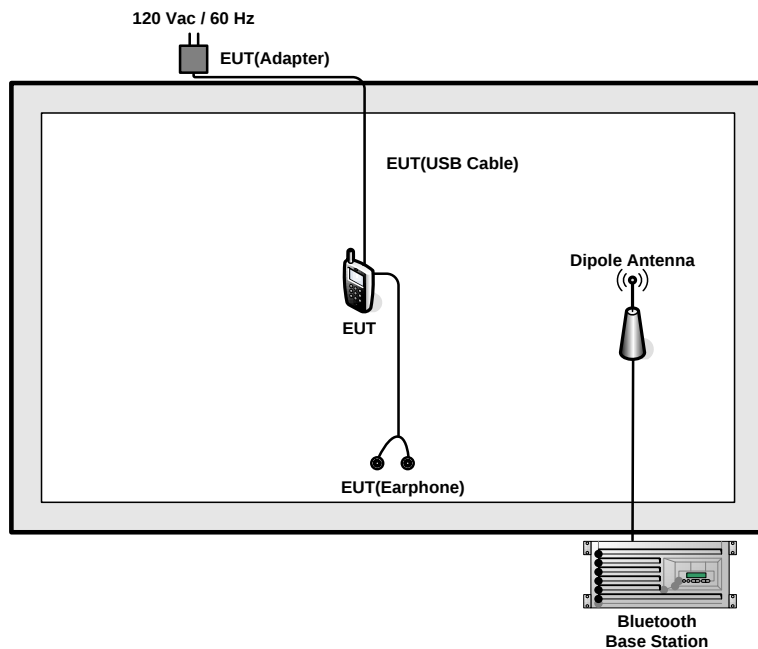

<AC Conducted Emission Mode>

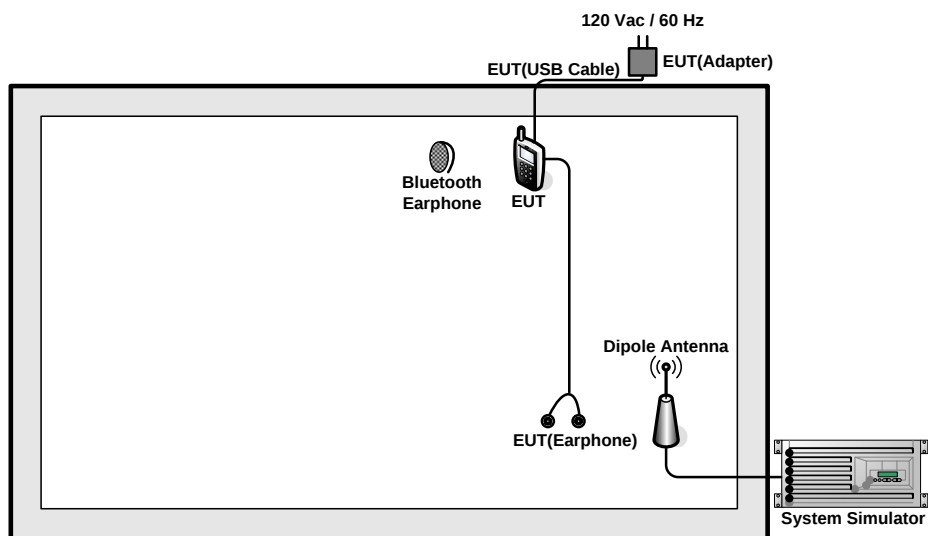

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
3.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.5 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 7.5 + 10 = 17.5 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.


3.1.4 Test Setup

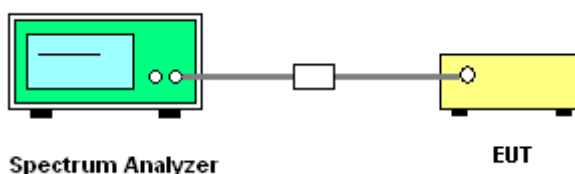


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

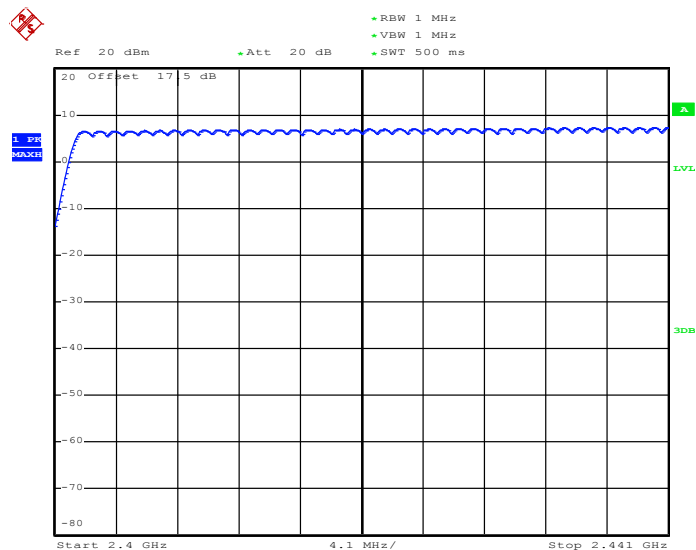

Date: 26.FEB.2014 14:45:46

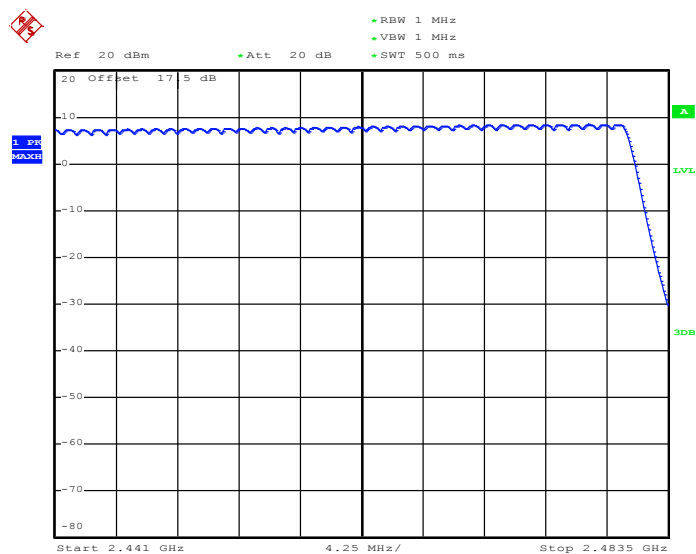

Date: 26.FEB.2014 14:50:21

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

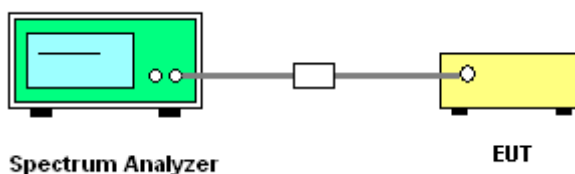


3.2.5 Test Result of Hopping Channel Separation


Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.6453	Pass
39	2441	0.996	0.6453	Pass
78	2480	1.002	0.6400	Pass


Channel Separation Plot on Channel 00 - 01

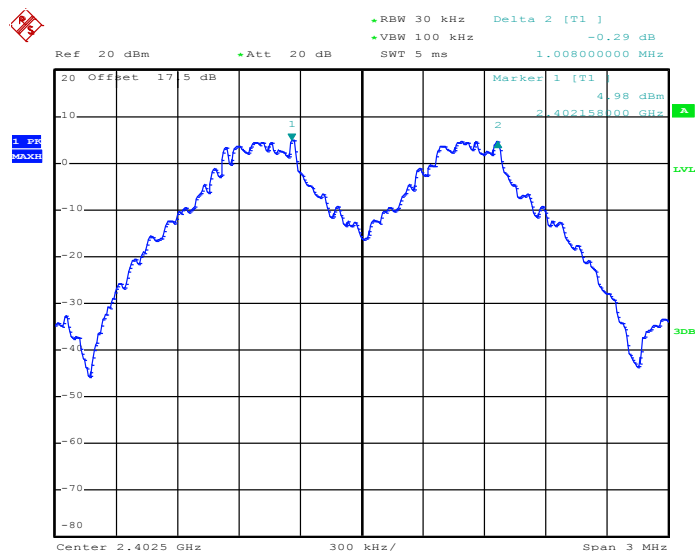

Date: 26.FEB.2014 13:04:13

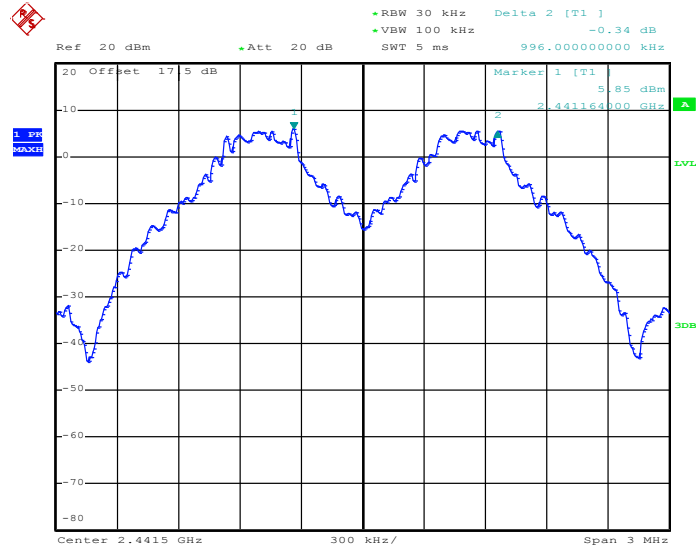Channel Separation Plot on Channel 39 - 40


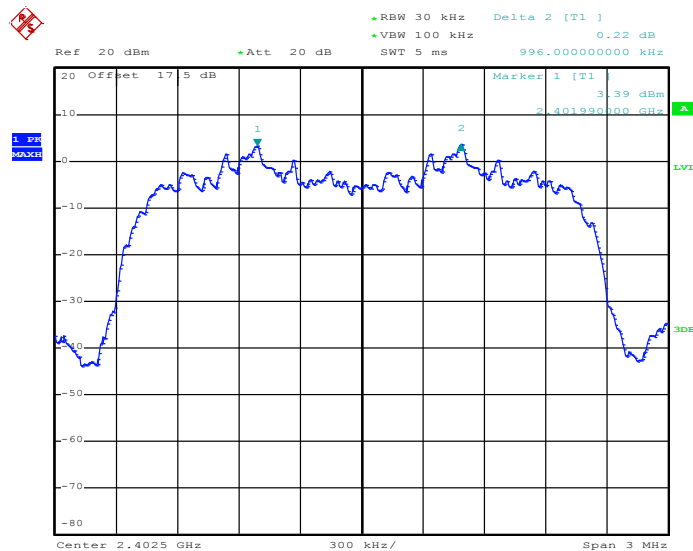
Date: 26.FEB.2014 14:36:33

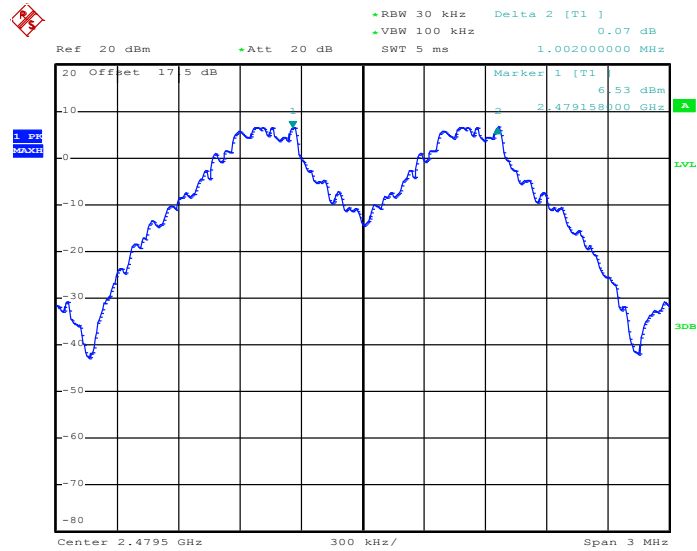Channel Separation Plot on Channel 77 - 78


Date: 26.FEB.2014 13:06:23


Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	0.996	0.8600	Pass
39	2441	1.008	0.8600	Pass
78	2480	1.002	0.8520	Pass

Channel Separation Plot on Channel 00 - 01


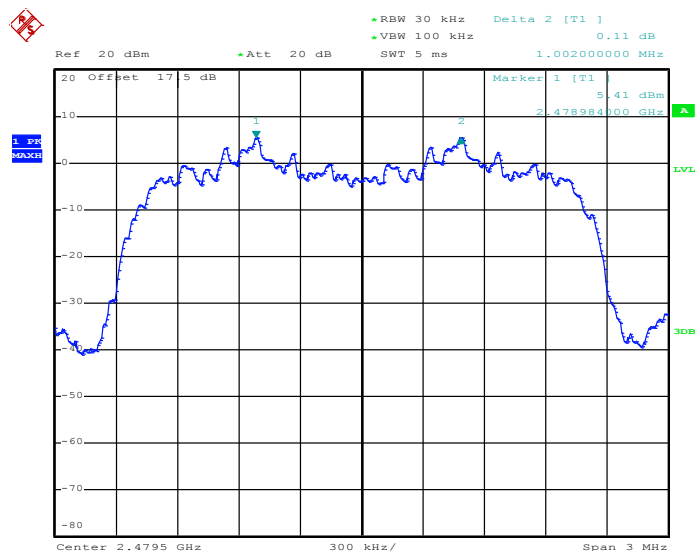
Date: 26.FEB.2014 14:39:05

Channel Separation Plot on Channel 39 - 40

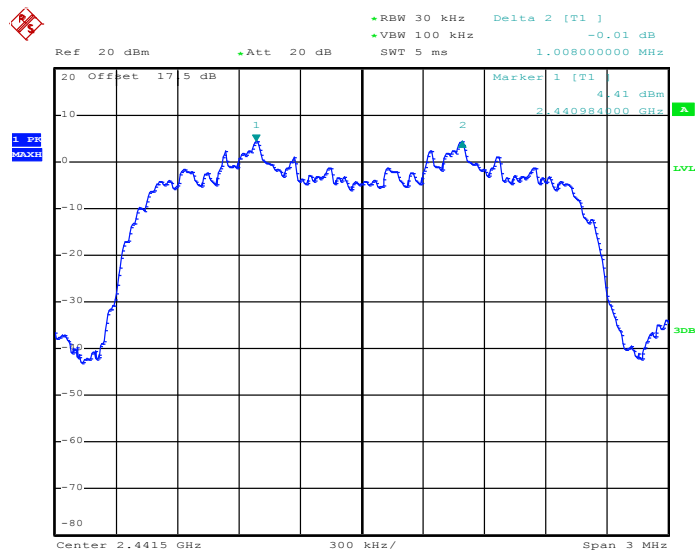

Date: 26.FEB.2014 13:08:08

Channel Separation Plot on Channel 77 - 78




Date: 26.FEB.2014 13:31:44



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8640	Pass
39	2441	1.002	0.8640	Pass
78	2480	1.002	0.8640	Pass


Channel Separation Plot on Channel 00 - 01

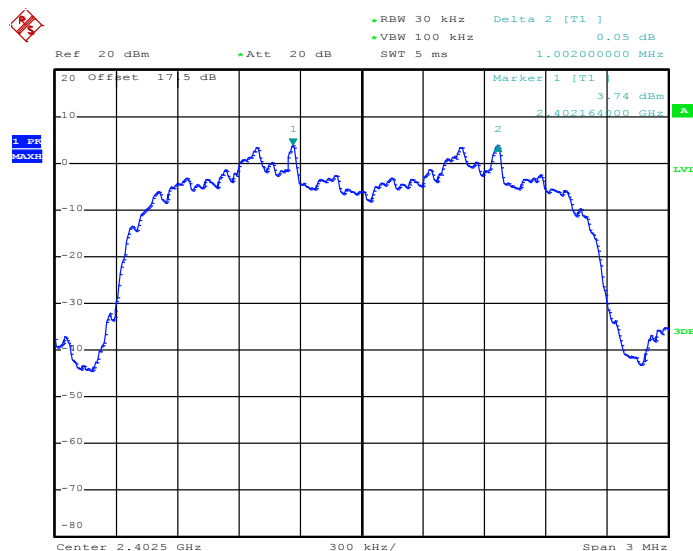

Date: 26.FEB.2014 14:52:03




Channel Separation Plot on Channel 39 - 40

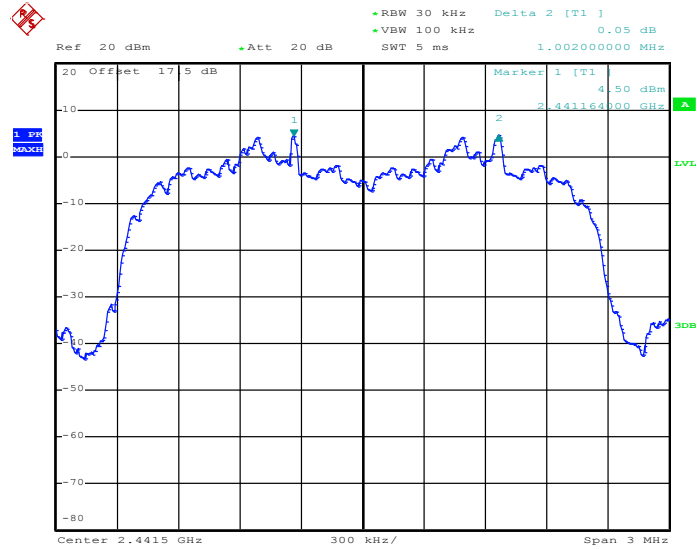

Date: 26.FEB.2014 15:03:04

Channel Separation Plot on Channel 77 - 78

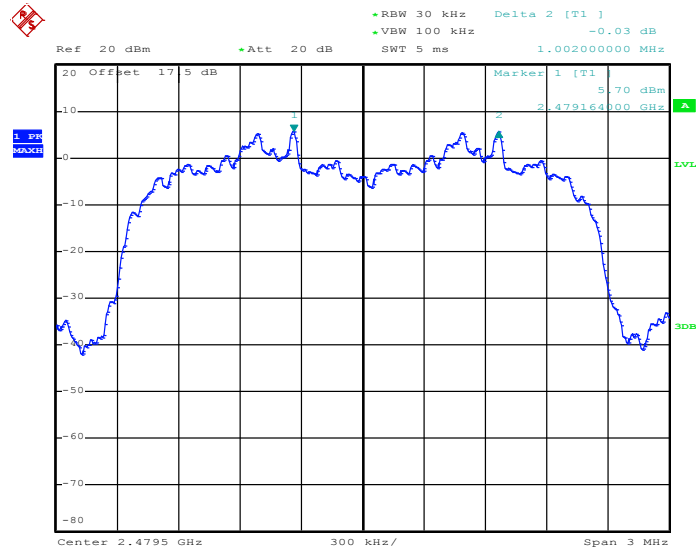

Date: 26.FEB.2014 15:05:04

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

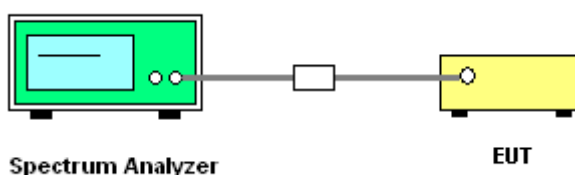


3.3.5 Test Result of Dwell Time

Test Mode :	3DH5	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.870	0.31	0.4	Pass
AFH	20	53.33	2.870	0.15	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

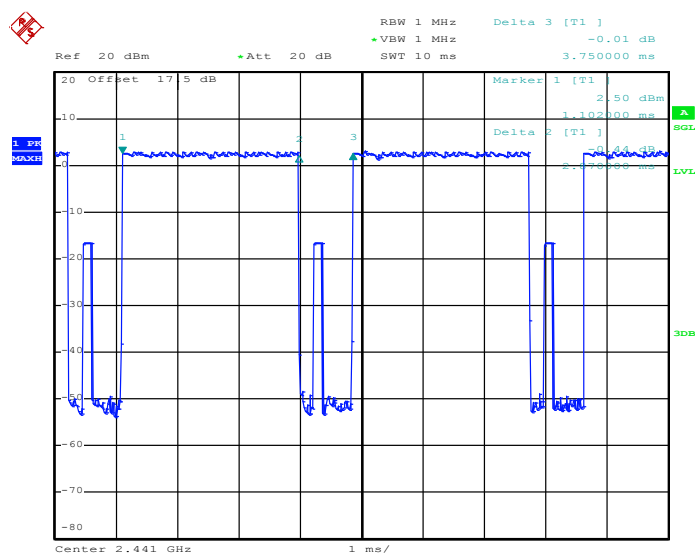Package Transfer Time Plot


Date: 21.JAN.2014 21:08:35

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
For 99% Bandwidth measurement, the RBW=30kHz, and VBW = 100kHz. Sweep = auto ;
Detector function = sample. Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

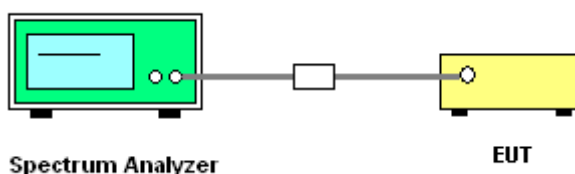


3.4.5 Test Result of 20dB Bandwidth


Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.968
39	2441	0.968
78	2480	0.960


20 dB Bandwidth Plot on Channel 00

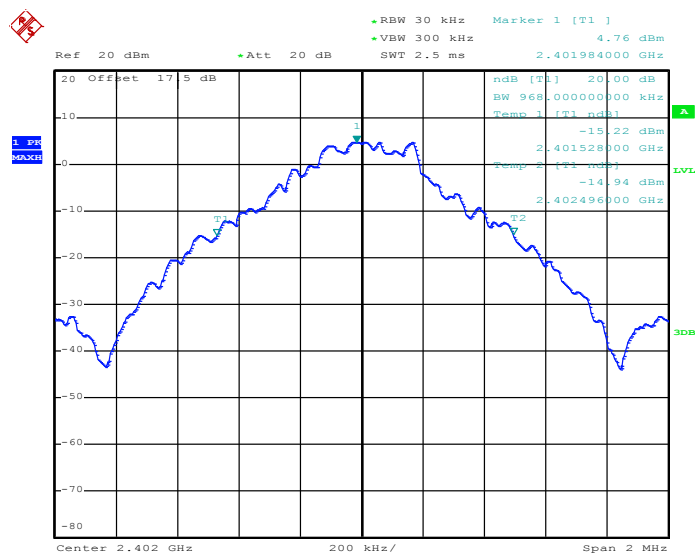

Date: 26.FEB.2014 13:58:45

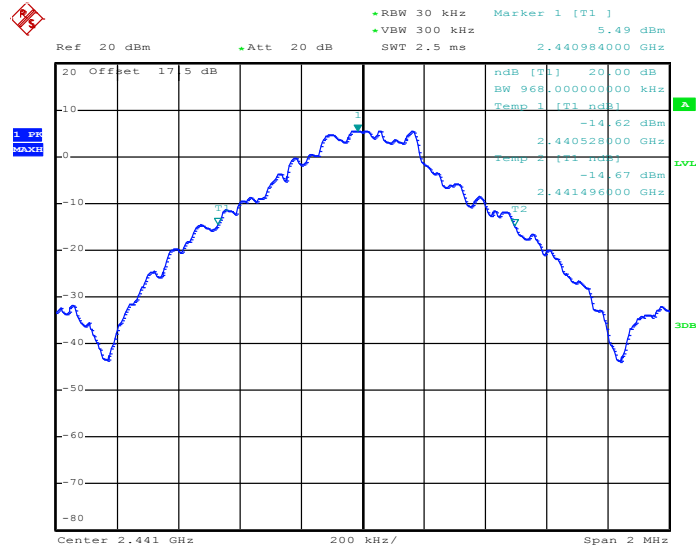20 dB Bandwidth Plot on Channel 39


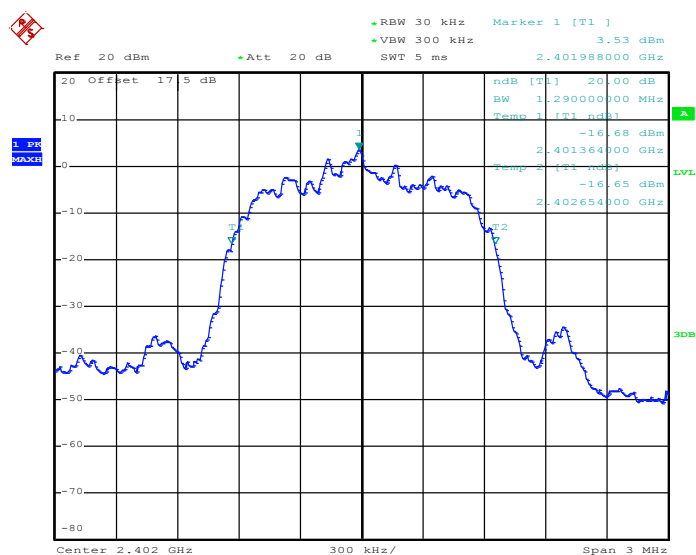
Date: 26.FEB.2014 13:59:53

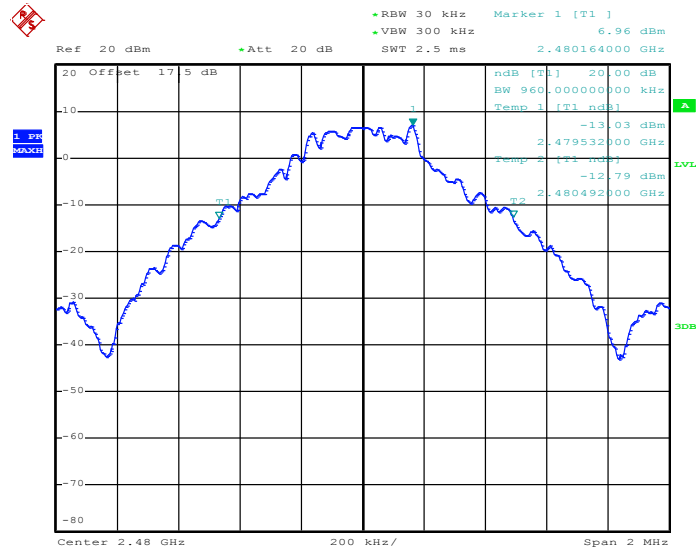20 dB Bandwidth Plot on Channel 78


Date: 26.FEB.2014 14:00:24


Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.290
39	2441	1.290
78	2480	1.278

20 dB Bandwidth Plot on Channel 00


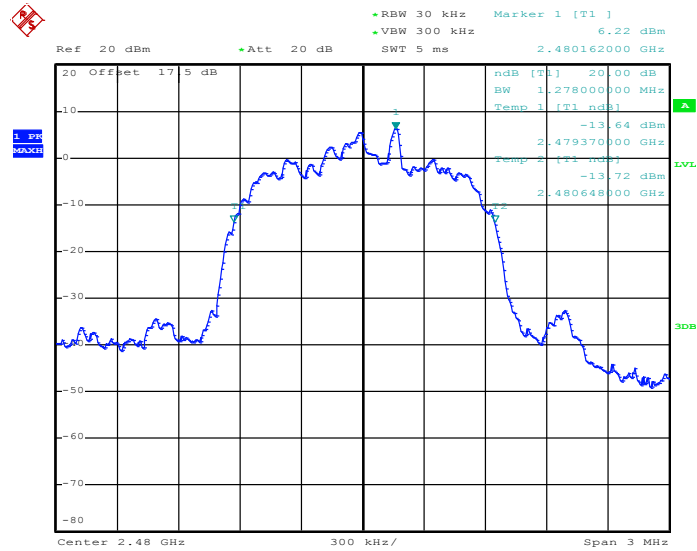
Date: 26.FEB.2014 14:02:29

20 dB Bandwidth Plot on Channel 39

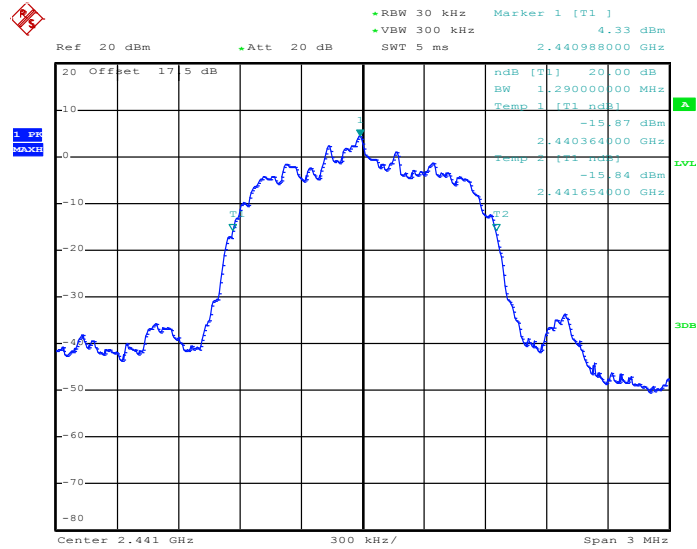

Date: 26.FEB.2014 14:04:36


20 dB Bandwidth Plot on Channel 78



Date: 26.FEB.2014 14:07:17


Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.296
39	2441	1.296
78	2480	1.296

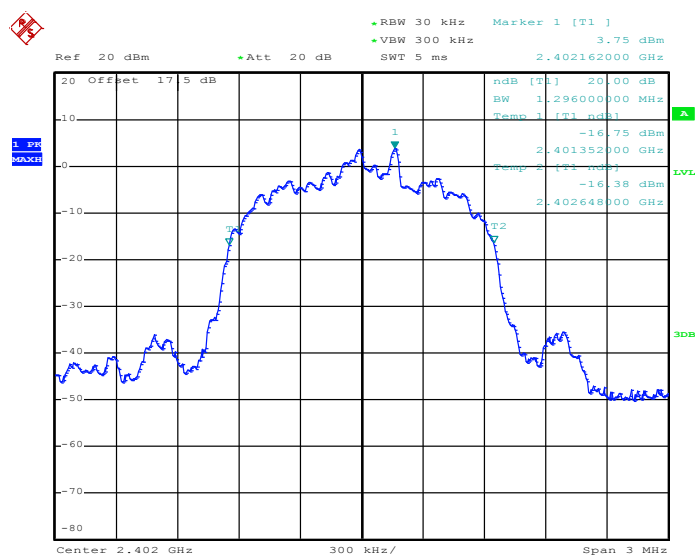20 dB Bandwidth Plot on Channel 00


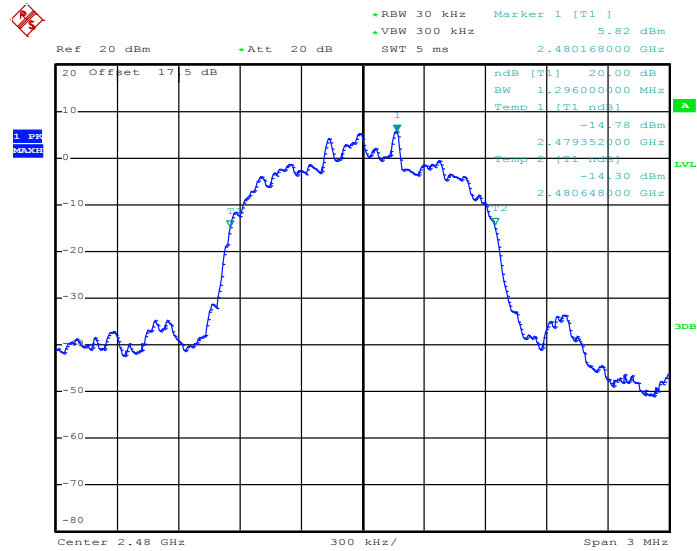
Date: 26.FEB.2014 14:08:17

20 dB Bandwidth Plot on Channel 39

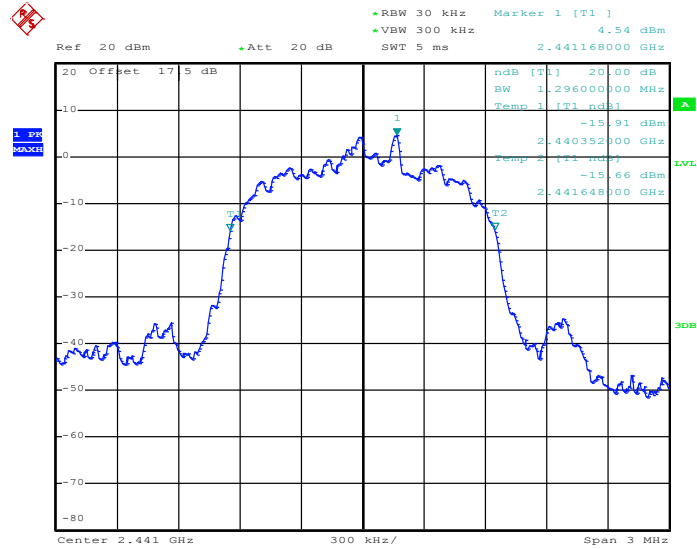

Date: 26.FEB.2014 14:08:34

20 dB Bandwidth Plot on Channel 78




Date: 26.FEB.2014 14:09:15

3.4.6 Test Result of 99% Occupied Bandwidth


Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.880
39	2441	0.888
78	2480	0.888


99% Occupied Bandwidth Plot on Channel 00

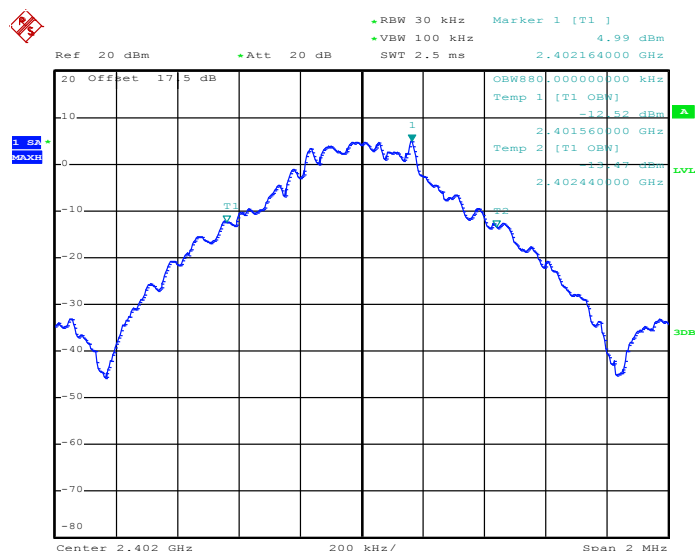

Date: 26.FEB.2014 14:09:53

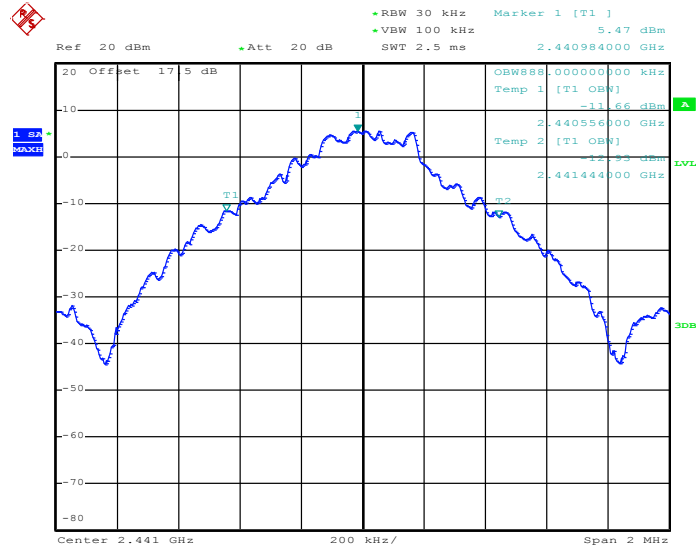99% Occupied Bandwidth Plot on Channel 39


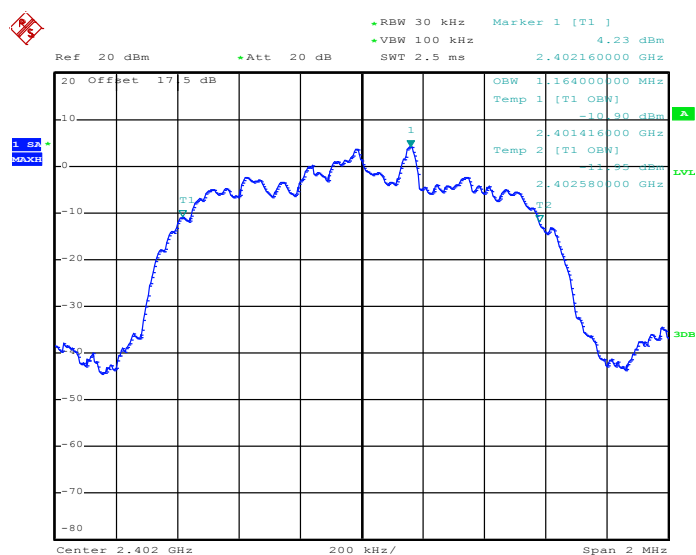
Date: 26.FEB.2014 14:10:29

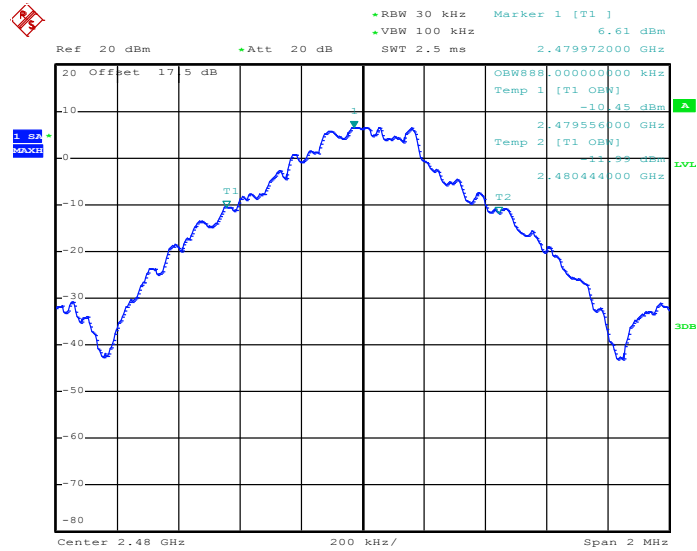99% Occupied Bandwidth Plot on Channel 78


Date: 26.FEB.2014 14:11:05


Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.164
39	2441	1.172
78	2480	1.176

99% Occupied Bandwidth Plot on Channel 00


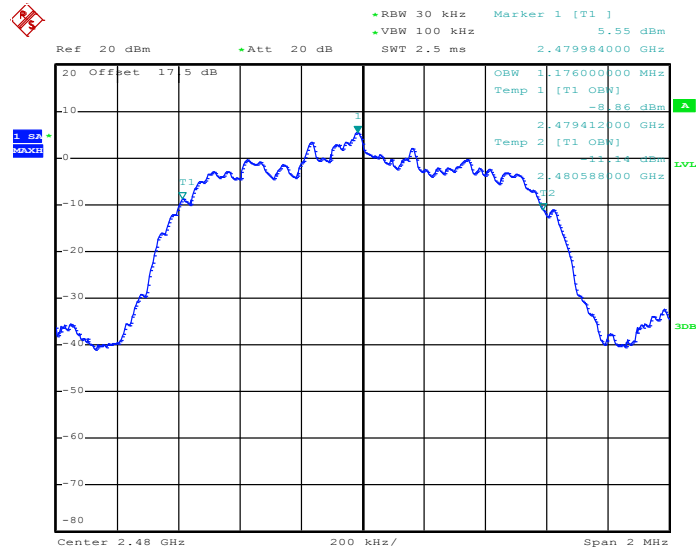
Date: 26.FEB.2014 14:11:41

99% Occupied Bandwidth Plot on Channel 39

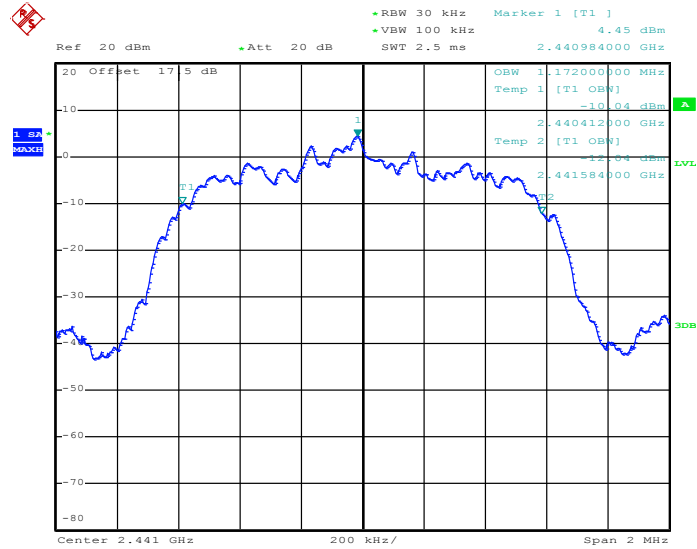

Date: 26.FEB.2014 14:12:18


99% Occupied Bandwidth Plot on Channel 78




Date: 26.FEB.2014 14:12:54

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.164
39	2441	1.168
78	2480	1.168

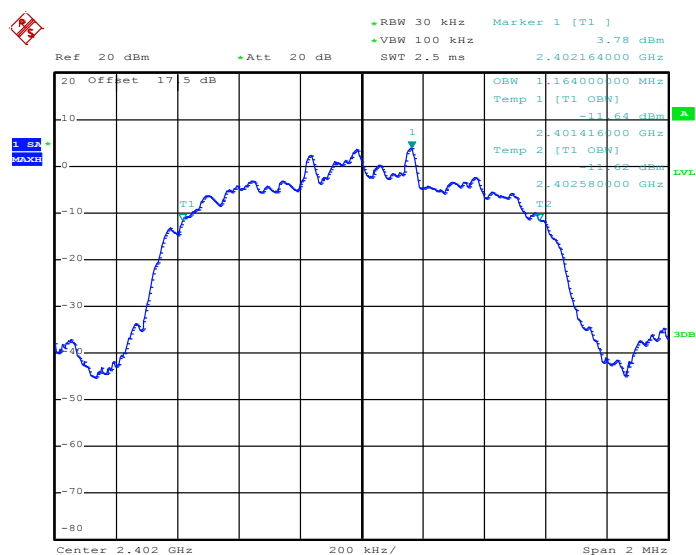99% Occupied Bandwidth Plot on Channel 00


Date: 26.FEB.2014 14:13:31

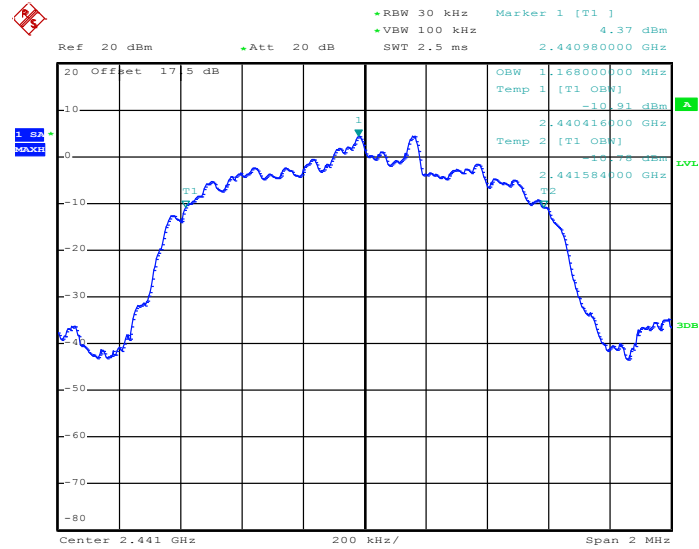99% Occupied Bandwidth Plot on Channel 39


Date: 26.FEB.2014 14:14:07

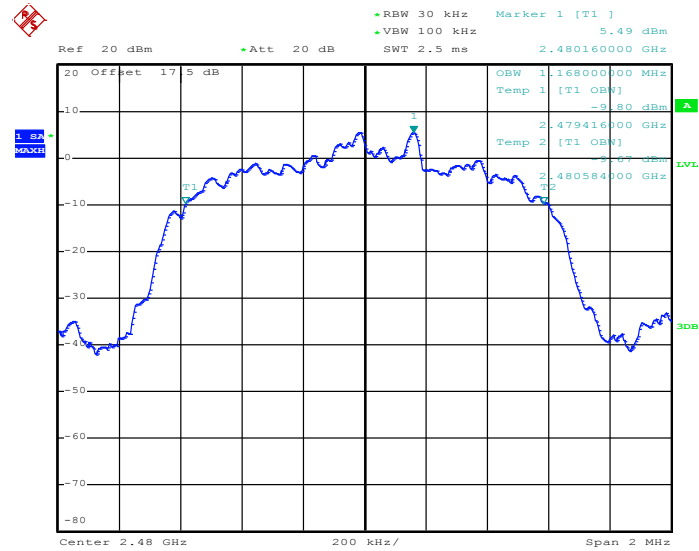99% Occupied Bandwidth Plot on Channel 78


Date: 26.FEB.2014 14:14:43

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

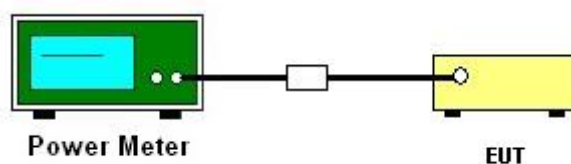

3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	6.45	20.97	Pass
39	2441	8.29	20.97	Pass
78	2480	8.23	20.97	Pass

Test Mode :	2Mbps	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	6.36	20.97	Pass
39	2441	8.06	20.97	Pass
78	2480	7.99	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26℃
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	6.61	20.97	Pass
39	2441	8.43	20.97	Pass
78	2480	8.38	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ($\geq 1\%$ span=10MHz), VBW = 300kHz ($\geq$ RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

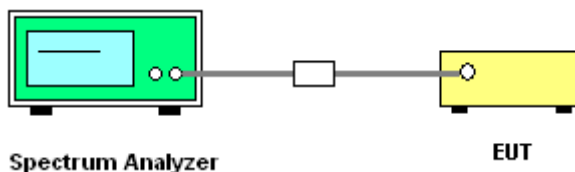



Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

Ref 20 dBm Att 20 dB SWT 2.5 ms 2.399960000 GHz

RBW 100 kHz VBW 300 kHz Marker 1 [T1] -46.32 dBm

20 Offset 17.5 dB

P1 -7.19 dBm

P2 -12.81 dBm


Start 2.395 GHz 1 MHz/ Stop 2.405 GHz

[illegible]

Date: 26.FEB.2014 15:28:28


Test Mode :	2Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

Low Band Edge Plot on Channel 00

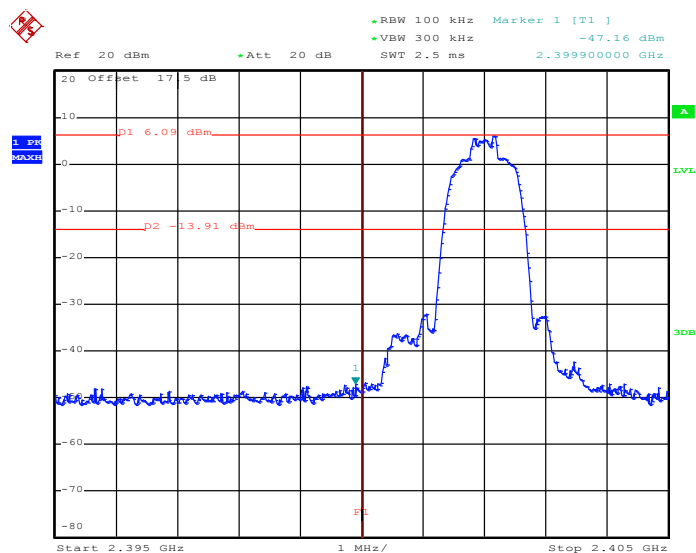

Date: 26.FEB.2014 15:30:26

High Band Edge Plot on Channel 78

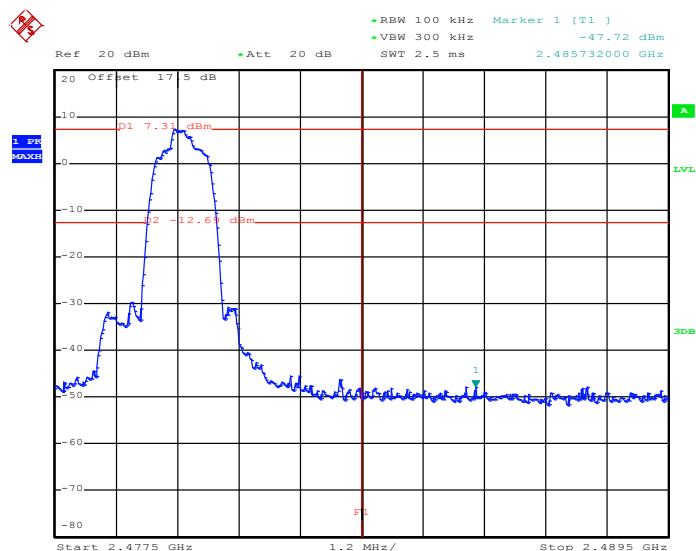

Date: 26.FEB.2014 15:34:07



Low Band Edge Plot on Channel 00




High Band Edge Plot on Channel 78




3.6.7 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

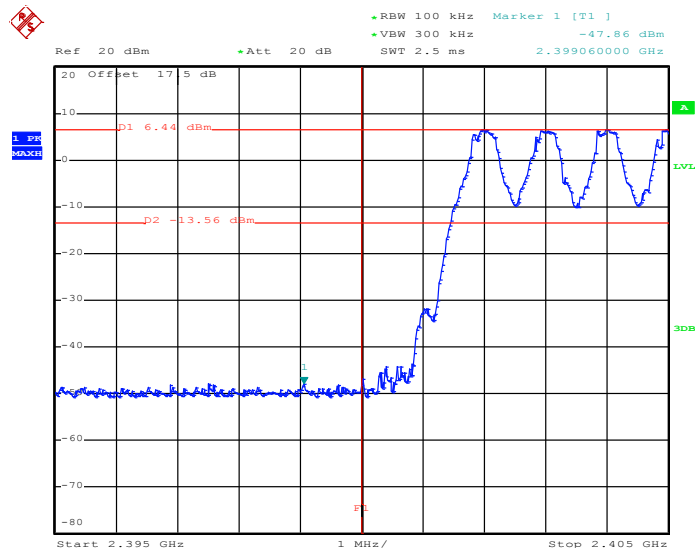1Mbps Hopping Mode Low Band Edge Plot


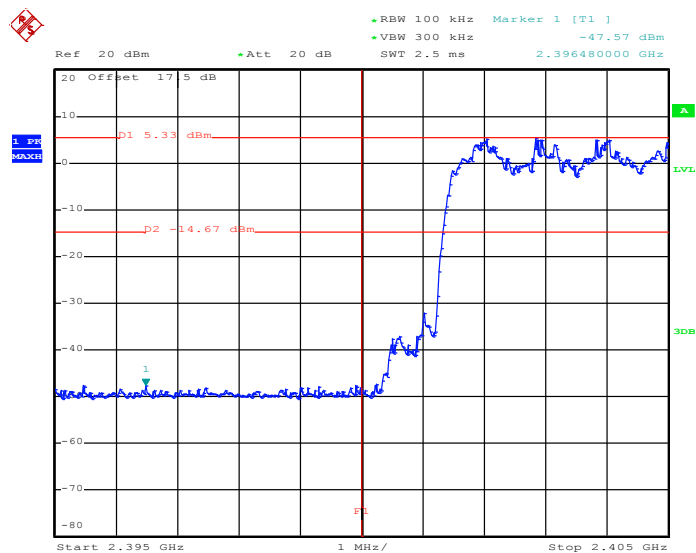
Date: 26.FEB.2014 15:27:56

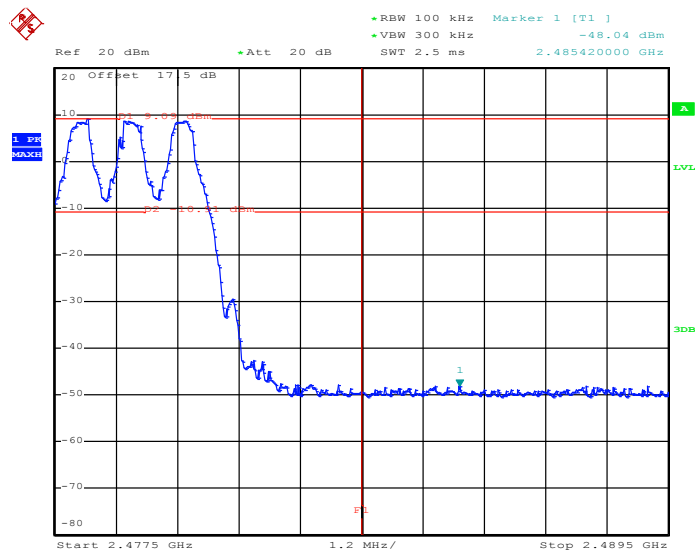1Mbps Hopping Mode High Band Edge Plot


Date: 26.FEB.2014 15:29:43


Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

2Mbps Hopping Mode Low Band Edge Plot



Date: 26.FEB.2014 15:33:37


2Mbps Hopping Mode High Band Edge Plot

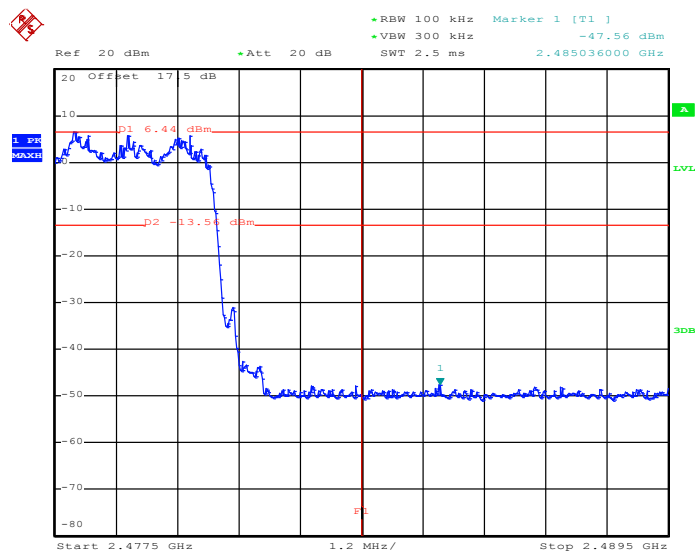

Date: 26.FEB.2014 15:35:02


Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Fly Liang	Relative Humidity :	50~53%

3Mbps Hopping Mode Low Band Edge Plot

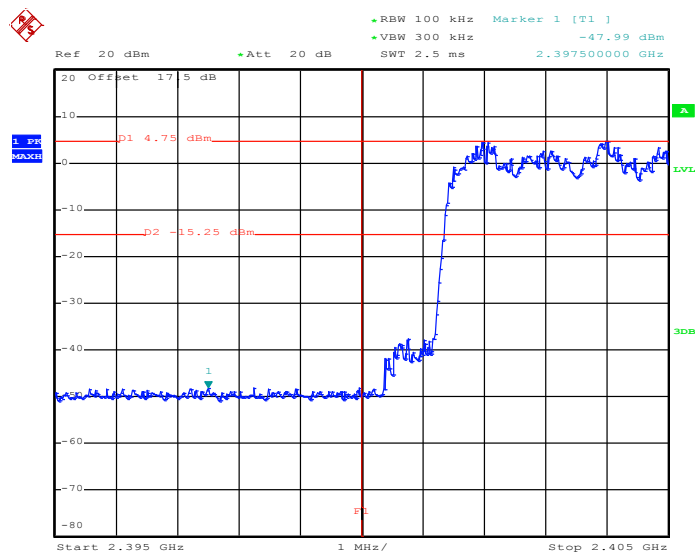

Date: 26.FEB.2014 15:36:54

3Mbps Hopping Mode High Band Edge Plot

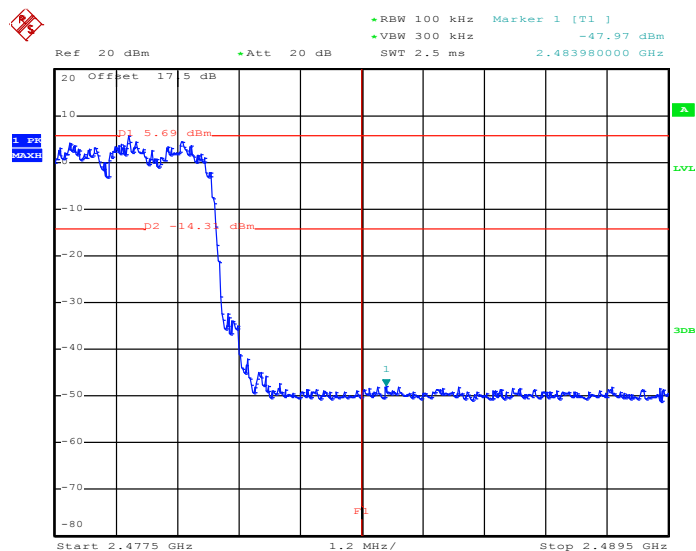

Date: 26.FEB.2014 15:38:08

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

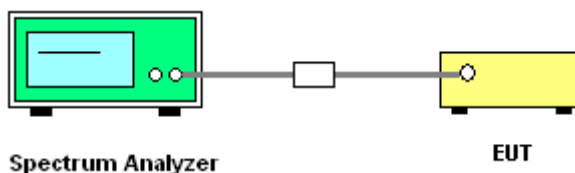

3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

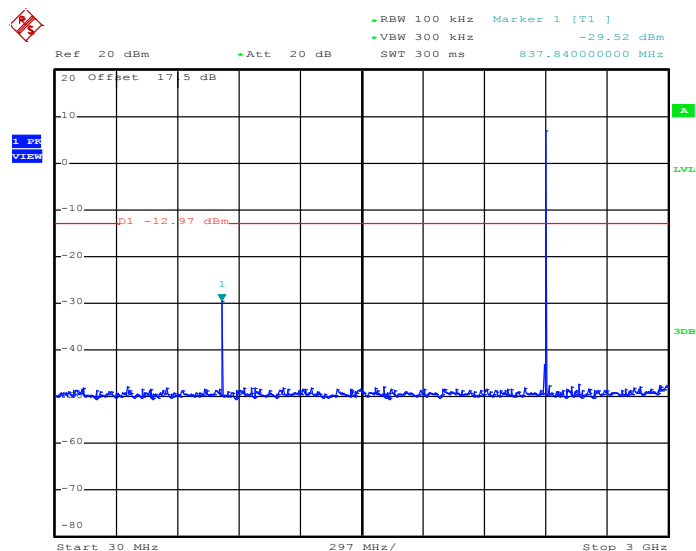

Date: 26.FEB.2014 15:13:01

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

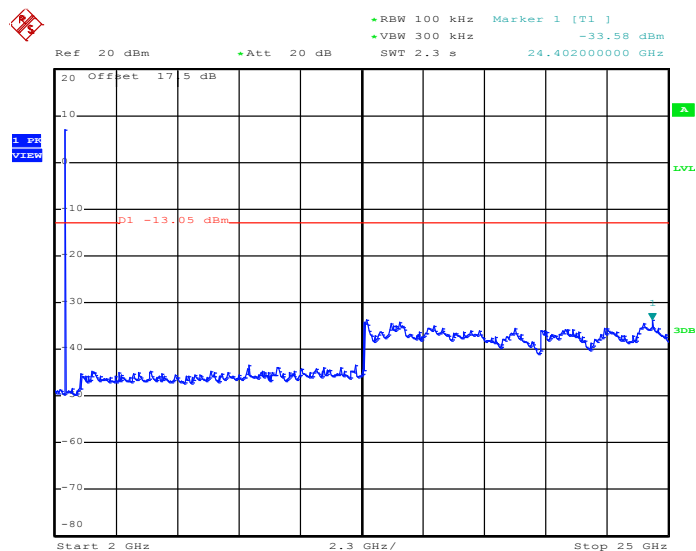


Date: 26.FEB.2014 15:13:52




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

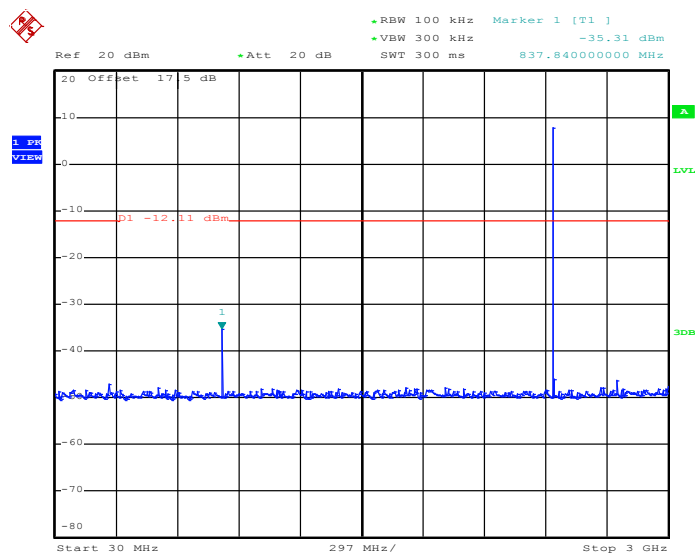


Date: 26.FEB.2014 15:14:45

1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

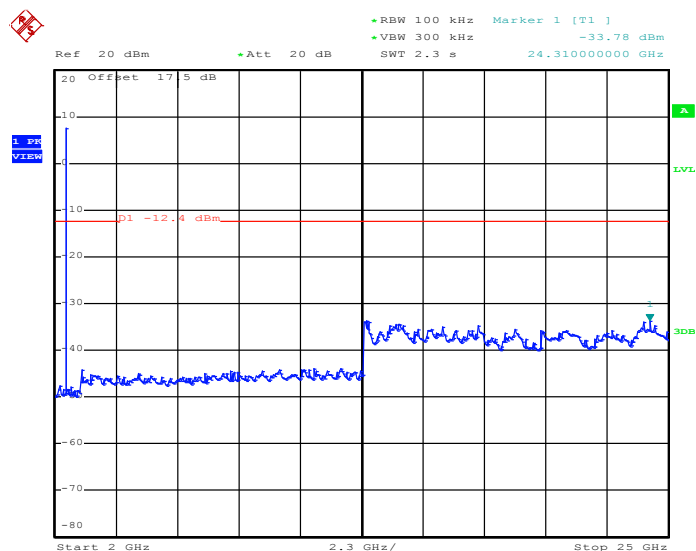


Date: 26.FEB.2014 15:15:37

Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

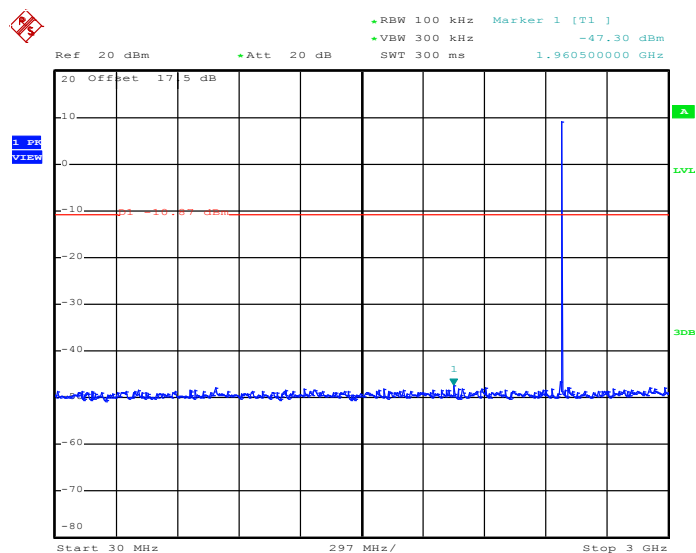1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz


Date: 26.FEB.2014 15:16:29

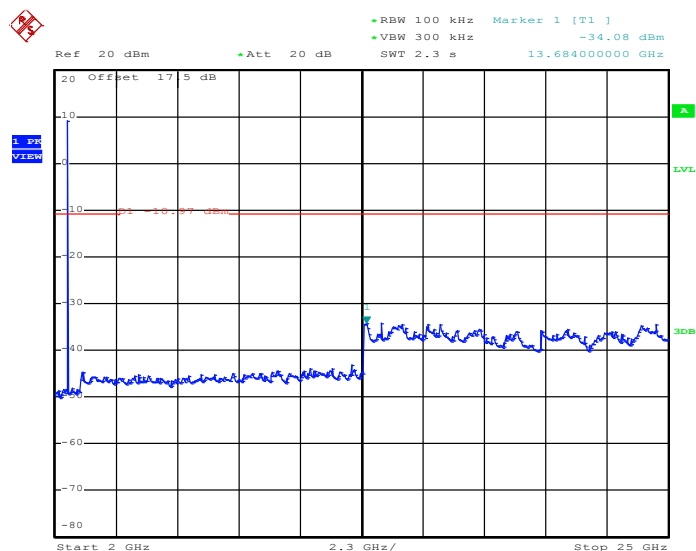
1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 26.FEB.2014 15:17:21




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

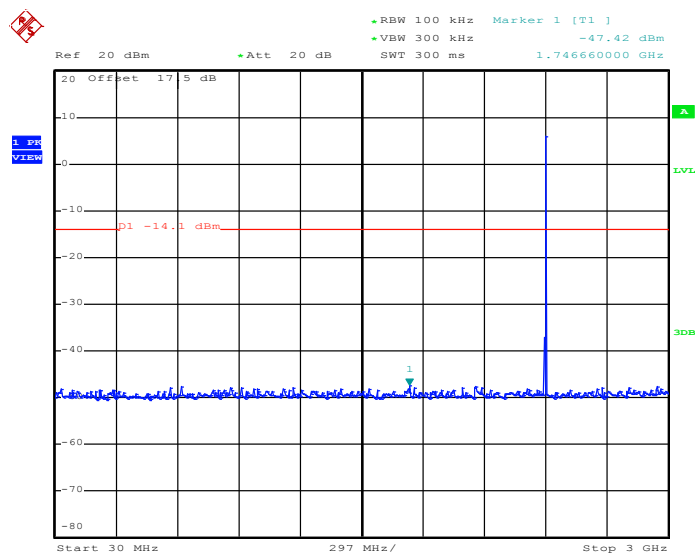


Date: 26.FEB.2014 15:18:34

2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

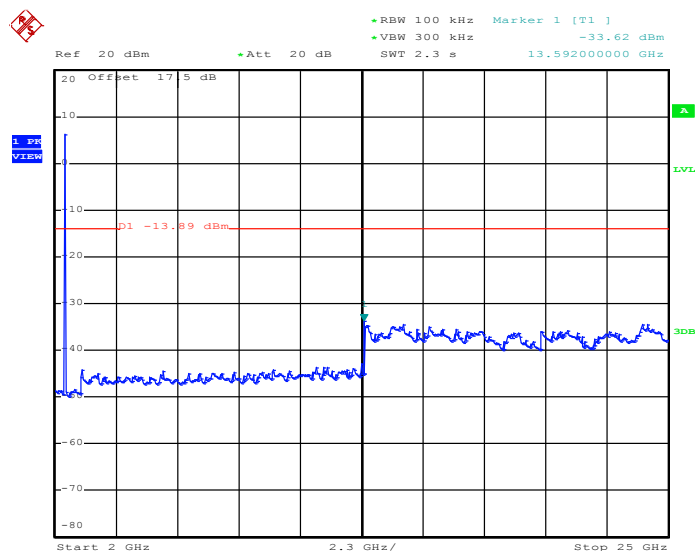


Date: 26.FEB.2014 15:19:26

Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

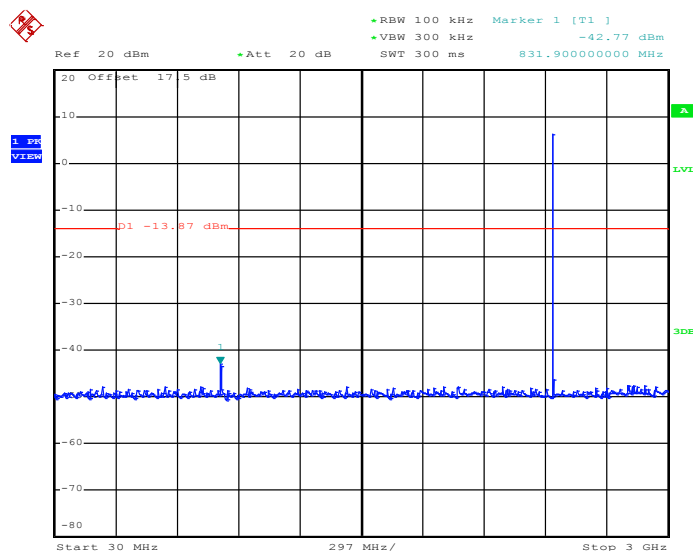
2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


Date: 26.FEB.2014 15:20:18

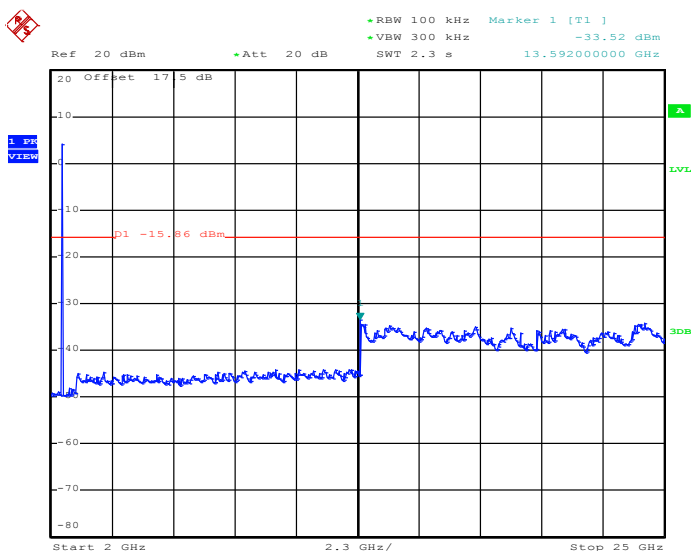
2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


Date: 26.FEB.2014 15:21:10

Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

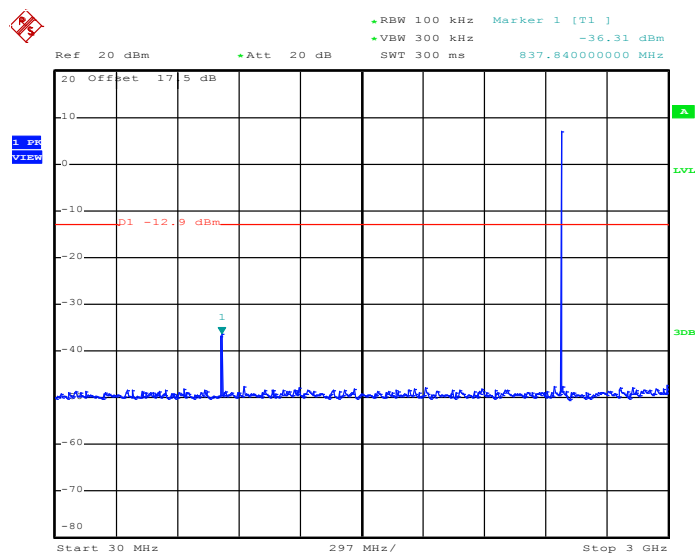
2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz


Date: 26.FEB.2014 15:22:02

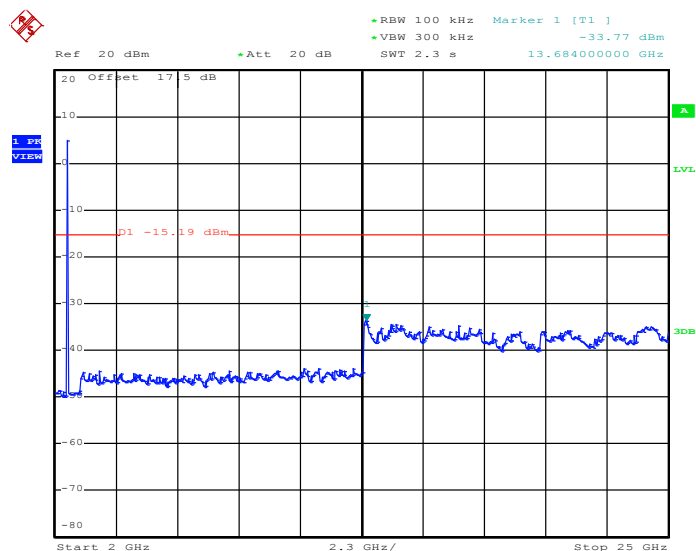
2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 26.FEB.2014 15:22:54

Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

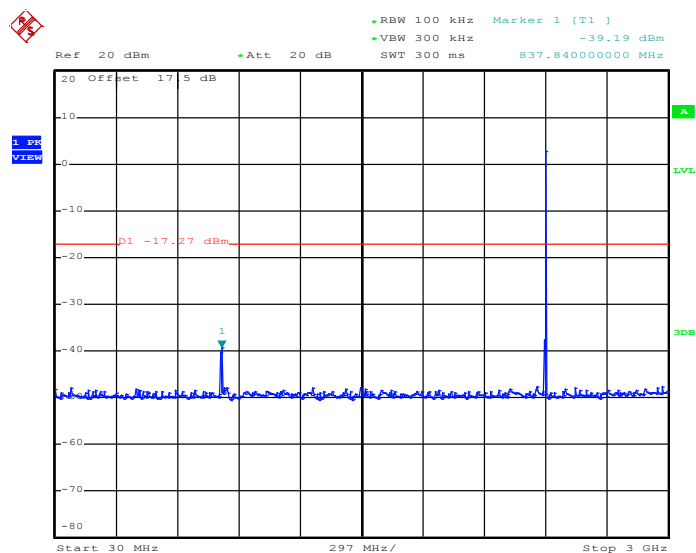3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz


Date: 26.FEB.2014 14:15:37

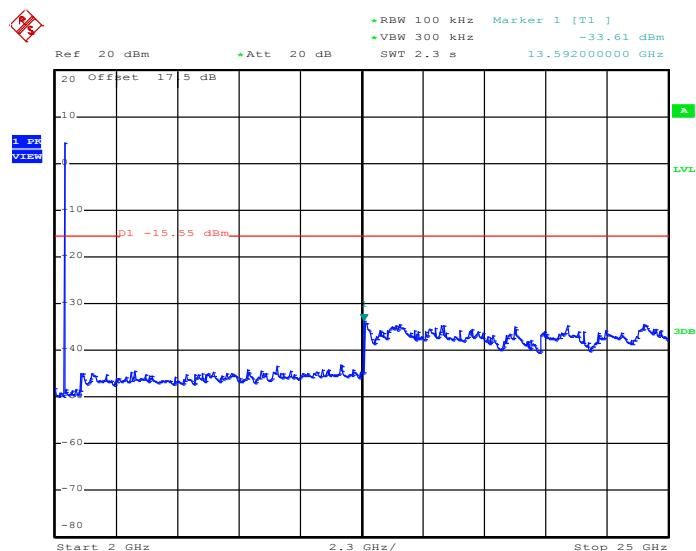
3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


Date: 26.FEB.2014 14:16:29




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

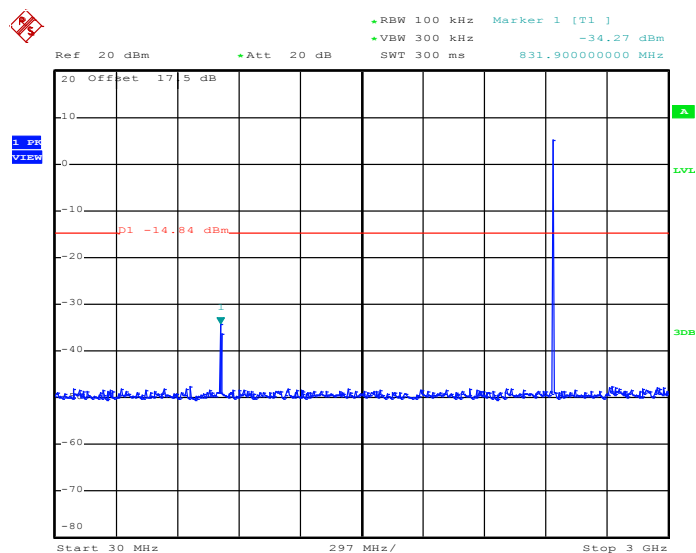


Date: 26.FEB.2014 14:17:21

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

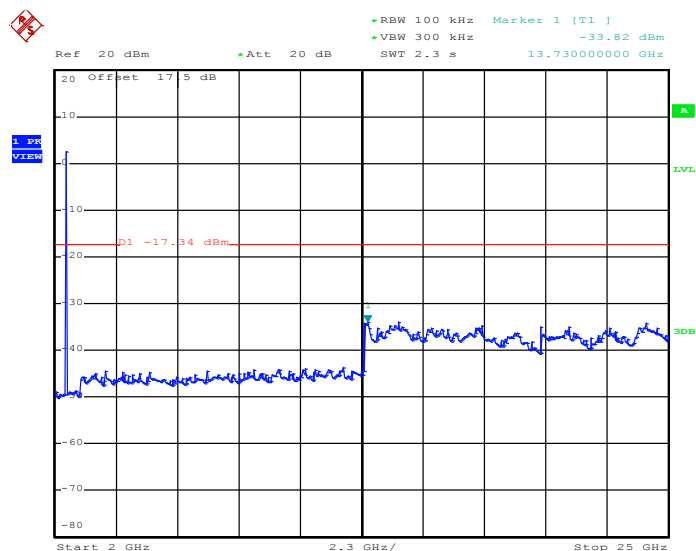


Date: 26.FEB.2014 14:18:13

Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Fly Liang

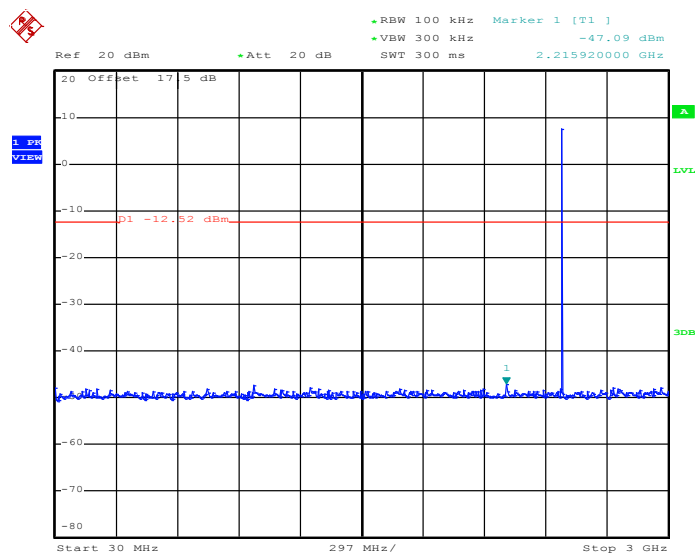3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz


Date: 26.FEB.2014 14:19:05

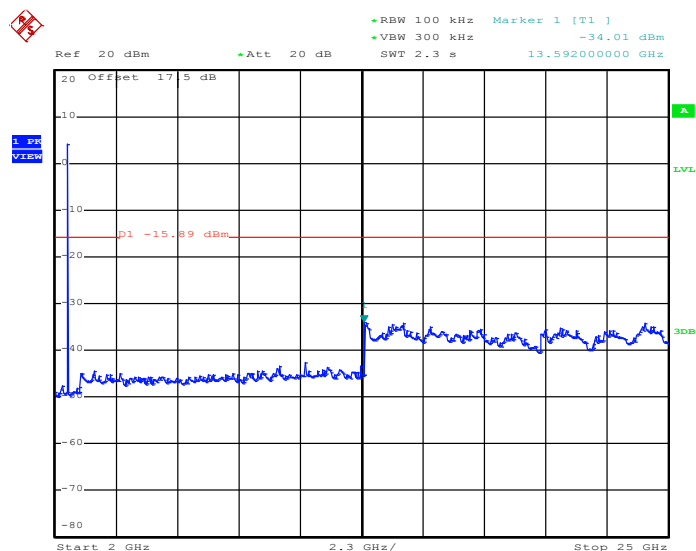3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 26.FEB.2014 14:19:57

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.8.3 Test Procedures


1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

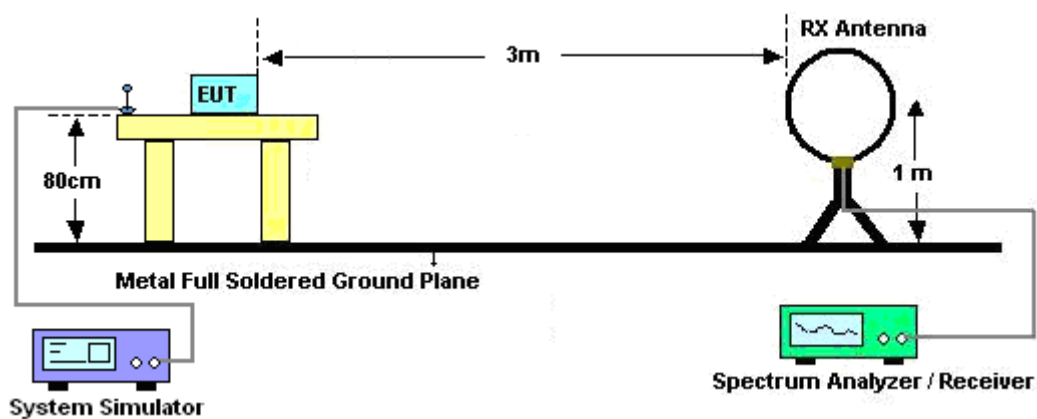

For radiated emissions from 30MHz to 1GHz

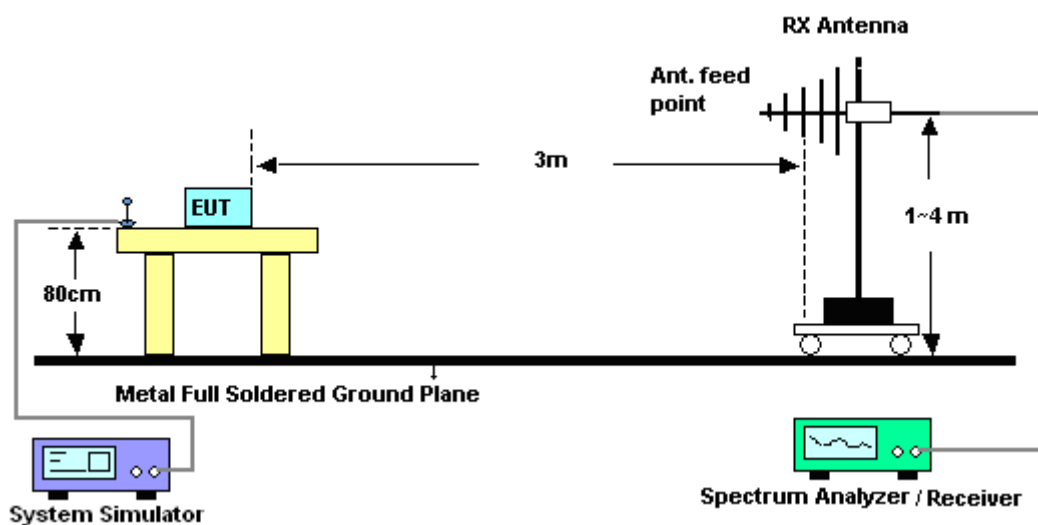

For radiated emissions above 1GHz

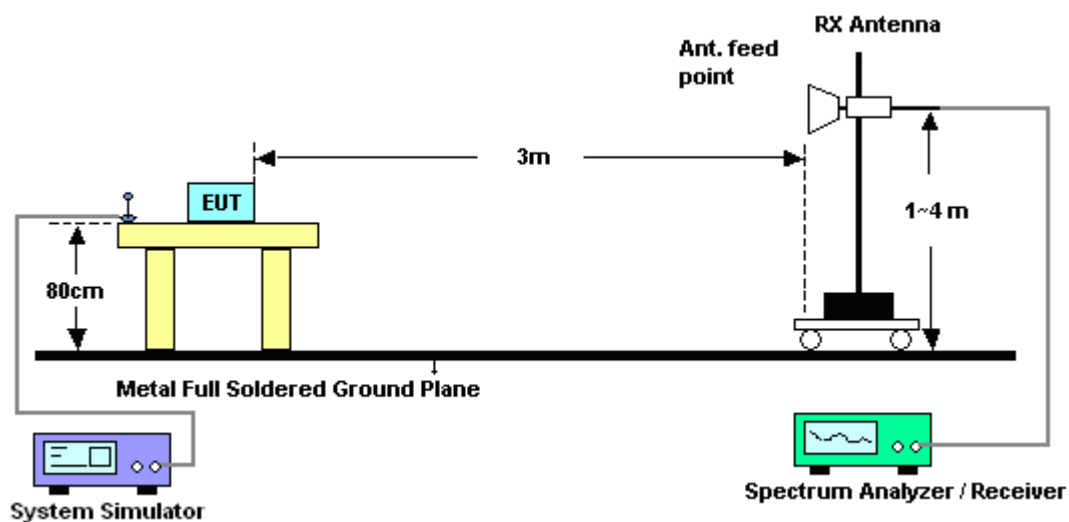


3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.8.6 Duty cycle correction factor for average measurement

3DH5 on time (One Pulse) Plot on Channel 39

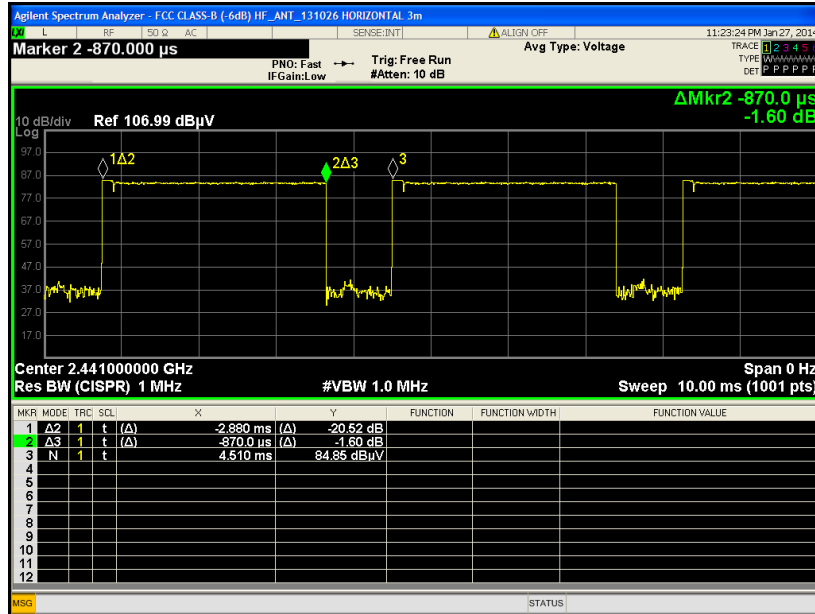

3DH5 on time (Count Pulses) Plot on Channel 39

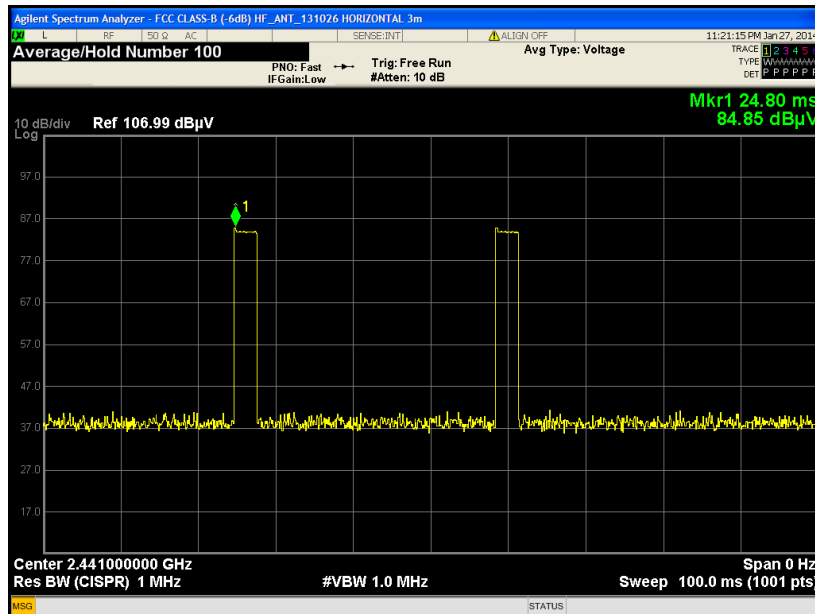

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2$ hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$

3.8.7 Test Result of Radiated Spurious at Band Edges

For Sample 1

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	48~49%
		Test Engineer :	Leo Liao

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386.32	48.74	-25.26	74	41.76	31.98	5.59	30.59	200	158	Peak
2386.32	23.95	-30.05	54	-	-	-	-	200	158	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2312.79	48.27	-25.73	74	41.9	31.55	5.5	30.68	100	108	Peak
2312.79	23.48	-30.52	54	-	-	-	-	100	108	Average

Note: Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79dB)

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	48~49%
		Test Engineer :	Leo Liao

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2492.08	49.06	-24.94	74	41.26	32.50	5.74	30.44	137	321	Peak
2492.08	24.27	-29.73	54	-	-	-	-	137	321	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2499.52	49.31	-24.69	74	41.51	32.50	5.74	30.44	169	79	Peak
2499.52	24.52	-29.48	54	-	-	-	-	169	79	Average

Note: Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79dB)

For Sample 2

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	48~49%
		Test Engineer :	Leo Liao

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2495.96	49.59	-24.41	74	41.79	32.50	5.74	30.44	102	78	Peak
2495.96	24.80	-29.20	54	-	-	-	-	102	78	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2498.24	49.3	-24.70	74	41.50	32.50	5.74	30.44	155	303	Peak
2498.24	24.51	-29.49	54	-	-	-	-	155	303	Average

Note: Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79dB)

For Sample 3

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	48~49%
		Test Engineer :	Leo Liao

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2499.32	50.51	-23.49	74	42.71	32.5	5.74	30.44	101	332	Peak
2499.32	25.72	-28.28	54	-	-	-	-	101	332	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.54	49.87	-24.13	74	42.22	32.41	5.71	30.47	189	253	Peak
2485.54	25.08	-28.92	54	-	-	-	-	189	253	Average

Note: Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79dB)

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

For Sample 1

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	88.43	-	-	81.39	31.98	5.62	30.56	200	158	Peak
2402	63.64	-	-	-	-	-	-	200	158	Average
4804	37.68	-36.32	74	52.86	33.78	8.33	57.29	158	262	Peak
4804	12.89	-41.11	54	-	-	-	-	158	262	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Vertical
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	84.97	-	-	77.93	31.98	5.62	30.56	100	108	Peak
2402	60.18	-	-	-	-	-	-	100	108	Average
4804	37.59	-36.41	74	52.77	33.78	8.33	57.29	132	259	Peak
4804	12.8	-41.20	54	-	-	-	-	132	259	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Horizontal
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	89.36	-	-	81.94	32.24	5.68	30.5	200	188	Peak
2441	64.57	-	-	-	-	-	-	200	188	Average
4882	37.58	-36.42	74	52.41	33.93	8.41	57.17	118	236	Peak
4882	12.79	-41.21	54	-	-	-	-	118	236	Average
7323	38.59	-35.41	74	51.83	33.9	10	57.14	152	309	Peak
7323	13.8	-40.20	54	-	-	-	-	152	309	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Vertical
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	85.92	-	-	78.5	32.24	5.68	30.5	100	230	Peak
2441	61.13	-	-	-	-	-	-	100	230	Average
4882	36.64	-37.36	74	51.47	33.93	8.41	57.17	132	254	Peak
4882	11.85	-42.15	54	-	-	-	-	132	254	Average
7323	37.04	-36.96	74	50.28	33.9	10	57.14	148	254	Peak
7323	12.25	-41.75	54	-	-	-	-	148	254	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	90.74	-	-	83.09	32.41	5.71	30.47	137	321	Peak
2480	65.95	-	-	-	-	-	-	137	321	Average
4960	37.68	-36.32	74	52.09	34.12	8.49	57.02	156	209	Peak
4960	12.89	-41.11	54	-	-	-	-	156	209	Average
7440	37.5	-36.50	74	50.48	33.97	10.04	56.99	158	273	Peak
7440	12.71	-41.29	54	-	-	-	-	158	273	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	88.3	-	-	80.65	32.41	5.71	30.47	169	79	Peak
2480	63.51	-	-	-	-	-	-	169	79	Average
4960	37.59	-36.41	74	52	34.12	8.49	57.02	132	265	Peak
4960	12.8	-41.20	54	-	-	-	-	132	265	Average
7440	37.9	-36.10	74	50.88	33.97	10.04	56.99	158	259	Peak
7440	13.11	-40.89	54	-	-	-	-	158	259	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

For Sample 2

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	98.41	-	-	90.76	32.41	5.71	30.47	102	78	Peak
2480	73.62	-	-	-	-	-	-	102	78	Average
4960	36.76	-37.24	74	51.17	34.12	8.49	57.02	105	285	Peak
4960	11.97	-42.03	54	-	-	-	-	105	285	Average
7440	37.7	-36.30	74	50.68	33.97	10.04	56.99	110	220	Peak
7440	12.91	-41.09	54	-	-	-	-	110	220	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	90.76	-	-	83.11	32.41	5.71	30.47	155	302	Peak
2480	65.97	-	-	-	-	-	-	155	302	Average
4960	37.21	-36.79	74	51.62	34.12	8.49	57.02	156	274	Peak
4960	12.42	-41.58	54	-	-	-	-	156	274	Average
7440	36.87	-37.13	74	49.85	33.97	10.04	56.99	110	220	Peak
7440	12.08	-41.92	54	-	-	-	-	110	220	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

For Sample 3

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
42.61	25.27	-14.73	40	43.64	11.3	0.87	30.54	178	245	Peak
199.75	24.28	-19.22	43.5	42.57	10.34	1.7	30.33	-	-	Peak
289.96	23.44	-22.56	46	38.69	12.8	1.98	30.03	-	-	Peak
560.59	23.07	-22.93	46	31.12	18.52	2.68	29.25	-	-	Peak
734.22	26.01	-19.99	46	32.08	19.91	3.04	29.02	-	-	Peak
854.5	26.09	-19.91	46	31.13	20.55	3.27	28.86	-	-	Peak
2480	94.89	-	-	87.24	32.41	5.71	30.47	101	332	Peak
2480	70.1	-	-	-	-	-	-	101	332	Average
4960	37.01	-36.99	74	51.42	34.12	8.49	57.02	107	214	Peak
4960	12.22	-41.78	54	-	-	-	-	107	214	Average
7440	37.62	-36.38	74	50.6	33.97	10.04	56.99	162	252	Peak
7440	12.83	-41.17	54	-	-	-	-	162	252	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	48~49%
Test Engineer :	Leo Liao	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
43.58	23.73	-16.27	40	42.37	11	0.88	30.52	132	205	Peak
283.17	19.78	-26.22	46	35.22	12.66	1.96	30.06	-	-	Peak
521.79	21.89	-24.11	46	31.07	17.52	2.6	29.3	-	-	Peak
767.2	25.5	-20.50	46	31.38	20.01	3.09	28.98	-	-	Peak
889.42	26.87	-19.13	46	31.55	20.82	3.32	28.82	-	-	Peak
959.26	26.54	-19.46	46	30.53	21.3	3.43	28.72	-	-	Peak
2480	89.44	-	-	81.79	32.41	5.71	30.47	189	253	Peak
2480	64.65	-	-	-	-	-	-	189	253	Average
4960	37.06	-36.94	74	51.47	34.12	8.49	57.02	107	214	Peak
4960	12.27	-41.73	54	-	-	-	-	107	214	Average
7440	37.36	-36.64	74	50.34	33.97	10.04	56.99	162	252	Peak
7440	12.57	-41.43	54	-	-	-	-	162	252	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.9.4 Test Setup

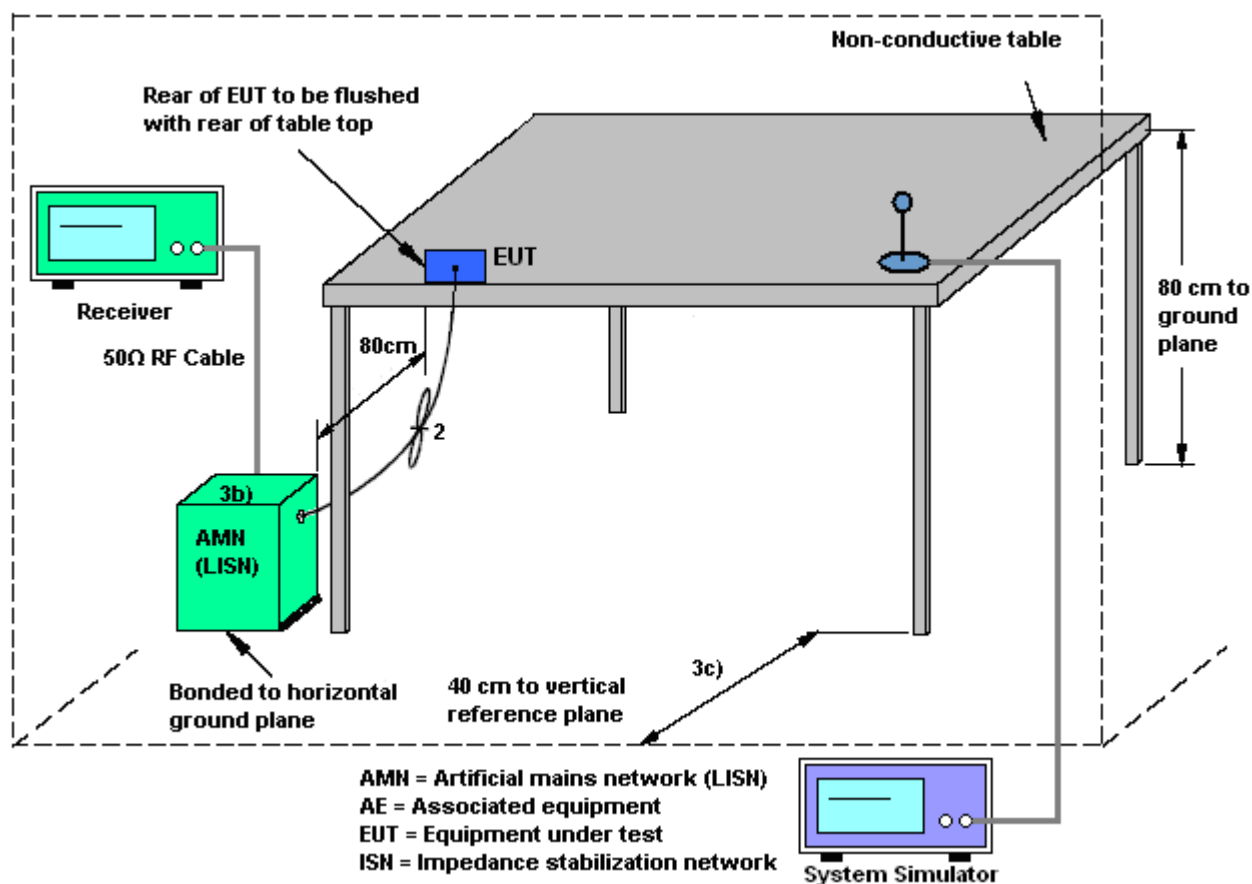

3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Jack Tian	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + Earphone + USB Cable (Charging from Adapter) for Sample 1		

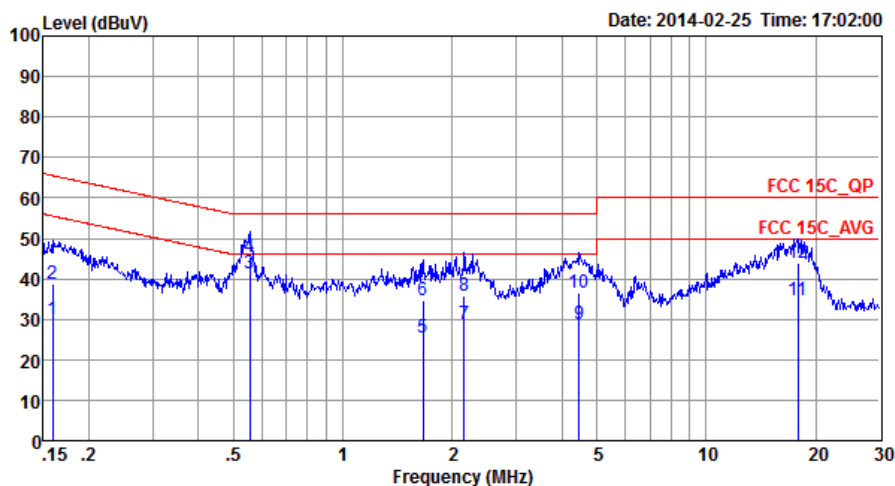


Site : CO01-SZ
Condition: FCC 15C_QP LISN_L_20130328 LINE
Project : (FR)312203-01
Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	30.01	-25.51	55.52	19.60	0.06	10.35	Average
2	0.16	38.81	-26.71	65.52	28.40	0.06	10.35	QP
3 *	0.56	41.50	-4.50	46.00	31.20	0.15	10.15	Average
4	0.56	45.50	-10.50	56.00	35.20	0.15	10.15	QP
5	1.66	25.40	-20.60	46.00	15.00	0.22	10.18	Average
6	1.66	34.80	-21.20	56.00	24.40	0.22	10.18	QP
7	2.16	28.73	-17.27	46.00	18.30	0.24	10.19	Average
8	2.16	35.83	-20.17	56.00	25.40	0.24	10.19	QP
9	4.48	28.73	-17.27	46.00	18.20	0.30	10.23	Average
10	4.48	36.63	-19.37	56.00	26.10	0.30	10.23	QP
11	17.85	34.74	-15.26	50.00	23.01	1.14	10.59	Average
12	17.85	43.74	-16.26	60.00	32.01	1.14	10.59	QP



Test Mode :	Mode 1	Temperature :	21~22℃
Test Engineer :	Jack Tian	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + Earphone + USB Cable (Charging from Adapter) for Sample 1		

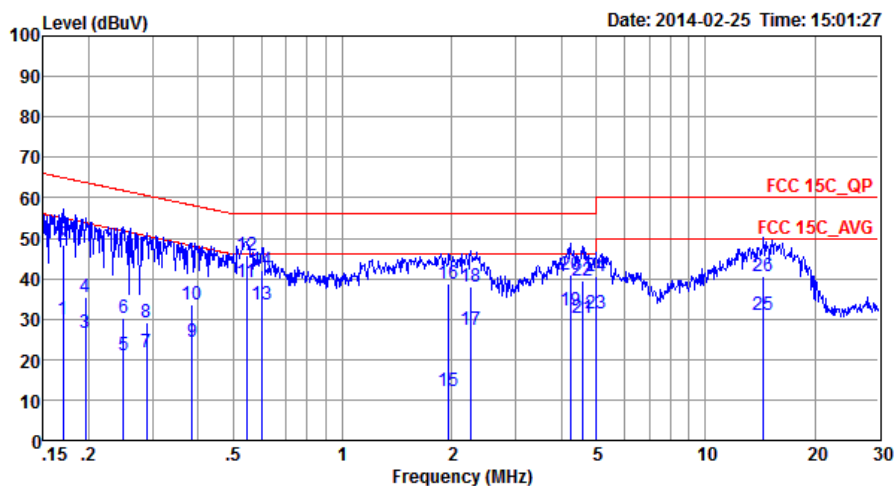

Site : C001-SZ
Condition: FCC 15C_QP LISN_N_20130328 NEUTRAL
Project : (FR)312203-01
Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	29.97	-24.97	54.94	19.60	0.04	10.33	Average
2	0.17	48.37	-16.57	64.94	38.00	0.04	10.33	QP
3	0.20	26.74	-27.06	53.80	16.40	0.04	10.30	Average
4	0.20	35.54	-28.26	63.80	25.20	0.04	10.30	QP
5	0.25	20.88	-30.90	51.78	10.60	0.04	10.24	Average
6	0.25	30.38	-31.40	61.78	20.10	0.04	10.24	QP
7	0.29	21.95	-28.59	50.54	11.70	0.04	10.21	Average
8	0.29	29.25	-31.29	60.54	19.00	0.04	10.21	QP
9	0.39	24.52	-23.65	48.17	14.30	0.04	10.18	Average
10	0.39	33.42	-24.75	58.17	23.20	0.04	10.18	QP
11 *	0.54	39.09	-6.91	46.00	28.90	0.04	10.15	Average
12	0.54	45.69	-10.31	56.00	35.50	0.04	10.15	QP
13	0.60	33.49	-12.51	46.00	23.30	0.04	10.15	Average
14	0.60	41.89	-14.11	56.00	31.70	0.04	10.15	QP
15	1.96	12.05	-33.95	46.00	1.80	0.06	10.19	Average
16	1.96	38.85	-17.15	56.00	28.60	0.06	10.19	QP
17	2.26	27.46	-18.54	46.00	17.19	0.07	10.20	Average
18	2.26	37.96	-18.04	56.00	27.69	0.07	10.20	QP
19	4.25	32.13	-13.87	46.00	21.80	0.10	10.23	Average
20	4.25	41.02	-14.98	56.00	30.69	0.10	10.23	QP
21	4.60	30.34	-15.66	46.00	19.99	0.11	10.24	Average
22	4.60	39.34	-16.66	56.00	28.99	0.11	10.24	QP
23	4.98	31.35	-14.65	46.00	21.00	0.11	10.24	Average
24	4.98	40.55	-15.45	56.00	30.20	0.11	10.24	QP
25	14.44	31.01	-18.99	50.00	20.00	0.50	10.51	Average
26	14.44	40.61	-19.39	60.00	29.60	0.50	10.51	QP

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 28, 2013	Feb. 21, 2014~ Feb. 26, 2014	Mar. 27, 2014	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	13dBm~-20dBm	Mar. 28, 2013	Feb. 21, 2014~ Feb. 26, 2014	Mar. 27, 2014	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	0.3GHz~40GHz	Mar. 28, 2013	Feb. 21, 2014~ Feb. 26, 2014	Mar. 27, 2014	Conducted (TH01-SZ)
Spectrum Analyzer	Agilent Technologies	N9038A	MY522601 85	20Hz~26.5GHz	Apr. 04, 2013	Jan. 27, 2014	Apr. 03, 2014	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 29, 2013	Jan. 27, 2014	May 28, 2014	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30MHz~2GHz	Dec. 23, 2013	Jan. 27, 2014	Dec. 22, 2014	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 26, 2013	Jan. 27, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
SHF-EHF-Horn	Schwarzbeck	BBHA9170	BBHA9170 249	14GHz~40GHz	Nov. 22, 2013	Jan. 27, 2014	Nov. 21, 2014	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz	Mar. 29, 2013	Jan. 27, 2014	Mar. 28, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 29, 2013	Jan. 27, 2014	Mar. 28, 2014	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0~360 degree	NCR	Jan. 27, 2014	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m~4 m	NCR	Jan. 27, 2014	NCR	Radiation (03CH01-SZ)
ESCIO Test Receiver	R&S	ESCI	100724	9kHz~3GHz	Mar. 29, 2013	Feb. 25, 2014	Mar. 28, 2014	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Mar. 28, 2013	Feb. 25, 2014	Mar. 27, 2014	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Mar. 28, 2013	Feb. 25, 2014	Mar. 27, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Dec. 17, 2013	Feb. 25, 2014	Dec. 16, 2014	Conduction (CO01-SZ)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.31
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.90
---	------



Appendix B. Photographs of EUT

Please refer to Sporton report number EP312203-01 which is issued separately.