


Variant FCC RF Test Report

APPLICANT : Doro AB
EQUIPMENT : Mobile Telephone
BRAND NAME : doro
MODEL NAME : Doro PhoneEasy 632
MARKETING NAME : Doro PhoneEasy 632
FCC ID : WS5DORO632
STANDARD : FCC 47 CFR Part 2, 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

This is a variant report which is only valid together with the original test report. The product was received on Sep. 26, 2015 and testing was completed on Oct. 13, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	8
3 TEST RESULT	9
3.1 Conducted Output Power Measurement.....	9
3.2 Field Strength of Spurious Radiation Measurement	11
4 LIST OF MEASURING EQUIPMENT	14
5 UNCERTAINTY OF EVALUATION	15
APPENDIX A. SETUP PHOTOGRAPHS	
APPENDIX B. PRODUCT EQUALITY DECLARATION	
APPENDIX C. PHOTOGRAPHS OF EUT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG451707-04	Rev. 01	This is a variant report for Doro PhoneEasy 632. The product equality declaration could be referred to Appendix B. Based on the similarity between two models, only the conducted power and the worst case of Radiated Spurious Emission from original test report (Sporton Report Number FG451707) were verified for the differences.	Oct. 28, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.2	§2.1053 §24.238(a)	Field Strength of Spurious Radiation	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	Under limit 27.89 dB at 5640.000 MHz



1 General Description

1.1 Applicant

Doro AB

Magistratsvägen 10 SE-226 43 Lund Sweden

1.2 Manufacturer

CK TELECOM LTD.

Technology Road.High-Tech Development Zone. Heyuan, Guangdong, P.R.China.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Telephone
Brand Name	doro
Model Name	Doro PhoneEasy 632
Marketing Name	Doro PhoneEasy 632
FCC ID	WS5DORO632
EUT supports Radios application	GSM/GPRS/EGPRS(Downlink Only) Bluetooth v2.1 + EDR
IMEI Code	Conducted: 353195060899458 Radiation: 352427061138169
HW Version	SHUTTLE-V2.0
SW Version	SHUTTLE02A-S01A_DORO632_L17EN_211_150701
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM1900: 1850.2 MHz ~ 1909.8MHz
Rx Frequency	GSM1900: 1930.2 MHz ~ 1989.8 MHz
Maximum Output Power to Antenna	GSM1900 : 30.24 dBm
Antenna Type	Fixed Internal Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK (Downlink Only)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH01-SZ	831040

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM1900.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 1900	GSM Link	GSM Link


Note:

1. The maximum power levels are chosen to test as the worst case configuration as follows:
GSM mode for GMSK modulation, only this mode was used for all tests.
2. Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations.

Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)			
Band	GSM1900		
Channel	512	661	810
Frequency	1850.2	1880.0	1909.8
GSM	30.18	30.24	30.08
GPRS class 8	30.14	30.22	30.04
GPRS class 10	29.37	29.34	29.20
GPRS class 11	27.31	27.50	27.26
GPRS class 12	26.19	26.50	26.11

2.2 Connection Diagram of Test System

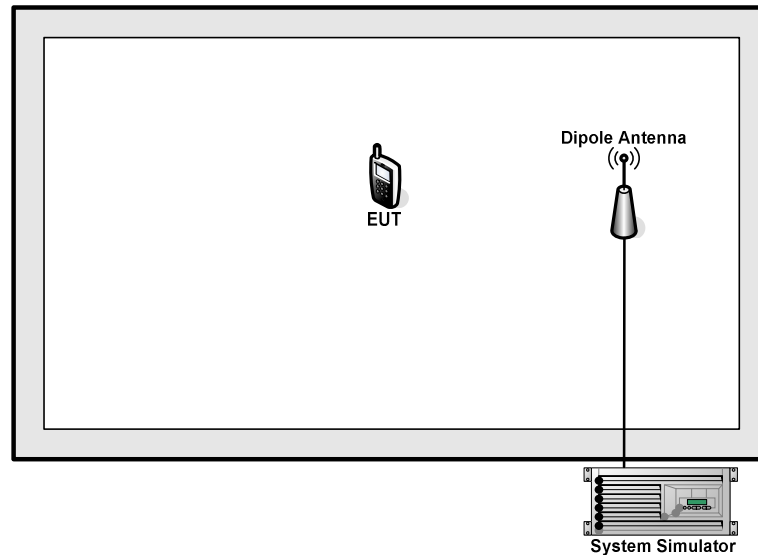

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM.

3.1.4 Test Setup

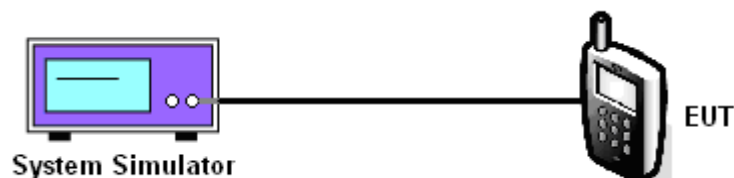

3.1.5 Test Result of Conducted Output Power

PCS Band			
Modes	GSM1900 (GSM Link)		
Channel	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8
Conducted Power (dBm)	30.18	30.24	30.08

Note: maximum burst average power for GSM.

3.2 Field Strength of Spurious Radiation Measurement

3.2.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.2.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.2.4 Test Setup

For radiated emissions from 30MHz to 1GHz

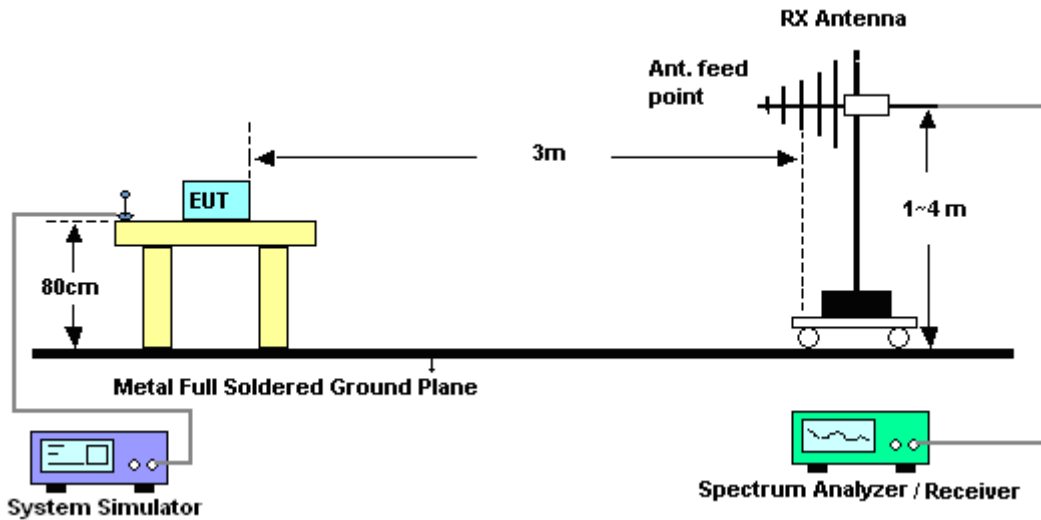

For radiated emissions above 1GHz

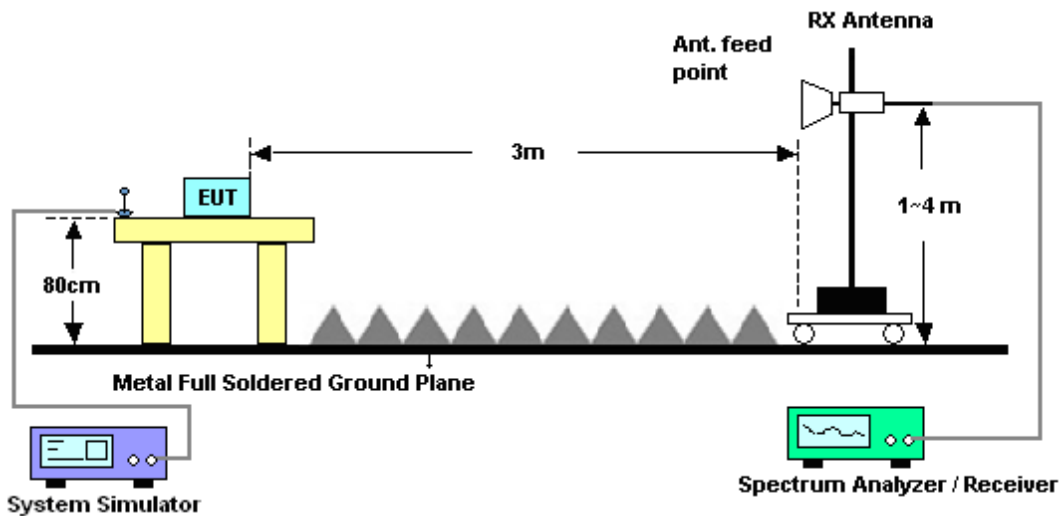

3.2.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM1900	Temperature :	23~25℃						
Test Mode :	GSM Link (GMSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit	Reading	Power	loss	Gain	(H/V)	
(dB)			(dB)	(dBm)	(dBm)	(dB)	(dBi)		
3760	-48.77	-13	-35.77	-69.10	-60.50	0.87	12.60	H	Pass
5640	-44.11	-13	-31.11	-66.98	-56.14	1.07	13.10	H	Pass
7520	-50.08	-13	-37.08	-75.21	-59.69	1.69	11.30	H	Pass

Band :	GSM1900	Temperature :	23~25°C						
Test Mode :	GSM Link (GMSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over Limit	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	loss	Gain	(H/V)	
3760	-48.99	-13	-35.99	-70.55	-60.72	0.87	12.6	V	Pass
5640	-40.89	-13	-27.89	-63.64	-52.92	1.07	13.1	V	Pass
7520	-49.54	-13	-36.54	-74.45	-58.97	1.87	11.3	V	Pass



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 05, 2015	Oct. 13, 2015	May 04, 2016	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2015	Oct. 13, 2015	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz;Max 30dBm	Jun. 07, 2015	Oct. 13, 2015	Jun. 06, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz-2GHz	Nov. 07, 2014	Oct. 13, 2015	Nov. 06, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Oct. 13, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Aug.19, 2015	Oct. 13, 2015	Aug. 18, 2016	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz ~3000MHz / 30 dB	Jan. 28, 2015	Oct. 13, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 28, 2015	Oct. 13, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 05, 2015	Oct. 13, 2015	May 04, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Oct. 13, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 13, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 13, 2015	NCR	Radiation (03CH01-SZ)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9dB
---	-------



Appendix B. Product Equality Declaration

CK TELECOM LTD.

Technology Road.High-Tech Development Zone. Heyuan, Guangdong,P.R.China.

Tel: +86-755-26739633; Fax: +86-755-26739500

Date: October 28, 2015

Product Equality Declaration

We, **CK TELECOM LTD**, declare on our sole responsibility for the product of Doro PhoneEasy 632 (Band1&Band8)as below:


The difference between current Doro PhoneEasy 632 and previous Doro PhoneEasy 632:

- ◆ S.W. is changed from SHUTTLE02A-S01A_DORO632_L17EN_118_140616 to SHUTTLE02A-S01A_DORO632_L17EN_211_150701
- ◆ Add four new adapters: HKC0035050-9B, A85-501000, A2-501000, A31-500550
- ◆ Add new USB cable 9148-0300014RIIHW
- ◆ Change microphone, receiver and speaker

Except Listings above, the others are the same as previous version.

Should you have any questions or comments regarding this matter, please have my best attention.

Sincerely yours,



Contact Person: Xin Li

Applicant: CK TELECOM LTD.

Tel: +86-755-26739633

Fax: +86-755-26739500

E-Mail: xin.li@ck-telecom.com



Appendix C. Photographs of EUT

Please refer to Sporton report number EP451707-04 which is issued separately.