



RF TEST REPORT

Product Name: LED LINKABLE SHOPLIGHT

Model Name: LM030630

FCC ID: WUI-RD030630

IC: 7297A-RD030630

Issued For : Winplus Co., Ltd.

Suites 6-11, 7th Floor, Corporation Park, 11 On La Shatin Hong Kong

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT24J058RF01

Sample Received Date: Oct. 18, 2024

Date of Test: Oct. 18, 2024 – Nov. 04, 2024

Date of Issue: Nov. 04, 2024

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Winplus Co., Ltd.

Address: Suites 6-11, 7th Floor, Corporation Park, 11 On La Shatin Hong Kong

Manufacturer: Winplus Co., Ltd.

Address: Suites 6-11, 7th Floor, Corporation Park, 11 On La Shatin Hong Kong

Product Name: LED LINKABLE SHOPLIGHT

Trademark: KODA, HORIZON BRANDS

Model Name: LM030630

Sample Status: Normal

Serial Number: LGT2410065-1-2-3

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.249, Subpart C RSS 210 Issue 10, December 2019 ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 TEST SOFTWARE AND POWER LEVEL	8
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
2.5 EQUIPMENTS LIST	10
3. EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	12
3.4 EUT OPERATING CONDITIONS	12
3.5 TEST RESULTS	13
4. RADIATED EMISSION MEASUREMENT	15
4.1 RADIATED EMISSION LIMITS	15
4.2 TEST PROCEDURE	16
4.3 TEST SETUP	17
4.4 EUT OPERATING CONDITIONS	17
4.5 FIELD STRENGTH CALCULATION	18
4.6 TEST RESULTS	19
4.7 TEST RESULTS (BAND EDGE REQUIREMENTS)	23
4.8 TEST RESULTS (EIRP REQUIREMENTS)	24
5. BANDWIDTH TEST	25
5.1 TEST PROCEDURE	25
5.2 TEST SETUP	25
5.3 EUT OPERATION CONDITIONS	25
5.4 TEST RESULTS	25
6. ANTENNA REQUIREMENT	27
6.1 STANDARD REQUIREMENT	27
6.2 EUT ANTENNA	27
APPENDIX I - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	28



Revision History

Rev.	Issue Date	Contents
00	Nov. 04, 2024	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249, Subpart C & RSS 210 Issue 10			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-Gen	Conducted Emission	PASS	--
15.249 RSS 210	Radiated Spurious Emission	PASS	--
15.205 RSS-Gen	Restricted Band Edge Emission	PASS	--
15.249 RSS-Gen	20dB Bandwidth	Pass	--
15.203 RSS-Gen	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated >6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	LED LINKABLE SHOPLIGHT	
Trademark:	KODA, HORIZON BRANDS	
Model Name:	LM030630	
Series Model:	N/A	
Model Difference:	N/A	
Product Description:	Operation Frequency:	5730~5870MHz
	Modulation Type:	FMCW
	Antenna Type:	Integrated Antenna
	Antenna Gain(dBi):	5.42
Rating:	Input: AC 120V/60Hz	
Hardware Version:	CSL-5627	
Software Version:	B0E7D5	
Connecting I/O Port(s):	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Modulation
Mode 1	5730MHz	FMCW
Mode 2	5800MHz	FMCW
Mode 3	5870MHz	FMCW

Note:

(1) All above mode has been measurement, only worst data was reported.

(2) We have be tested for all available U.S. voltage and frequency (For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.

(3) The battery is fully-charged during the radited and RF conducted test.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4: Keeping TX

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 5.8G	
Engineering Mode	Mode Or Modulation type	Power setting
	FMCW	Default



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2024.03.09	2025.03.08
LISN	COM-POWER	LI-115	02032	2024.03.09	2025.03.08
LISN	SCHWARZBECK	NNLK 8122	00160	2024.03.09	2025.03.08
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2024.03.09	2025.03.08
Temperature & Humidity	KTJ	TA218B	N.A	2024.03.09	2025.03.08
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2024.03.09	2025.03.08
Active loop Antenna	ETS	6502	00049544	2023.10.13	2025.10.12
Spectrum Analyzer	Keysight	N9010B	MY60242508	2024.08.05	2025.08.04
Bilog Antenna(30M-1G)	SCHWARZBECK	VULB 9168	2705	2022.12.12	2025.12.11
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Horn Antenna(18-40G)	A-INFO	LB-180400-KF	J211060273	2022.06.08	2025.06.07
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2024.03.09	2025.03.08
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2024.03.09	2025.03.08
Pre-amplifier(18-40G)	com-mw	LNPA_18-40-01	18050003	2024.03.09	2025.03.08
Wireless Communications Test Set	R&S	CMW 500	137737	2024.03.09	2025.03.08
Antenna Tower	SAEMC	BK-4AT-BS-D	SK2021093008	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2024.03.11	2025.03.10
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2024.08.05	2025.08.04
Signal Analyzer	Keysight	N9020A	MY50530994	2024.03.09	2025.03.08
RF Automatic Test system	MW	MW100-RFCB	MW220322LG-033	2024.03.09	2025.03.08
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2024.03.09	2025.03.08
Temperature & Humidity test chamber	AISRY	LX-1000L	171200018	2024.03.09	2025.03.08
Attenuator	eastsheep	90db	N.A	2024.03.09	2025.03.08
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2024.03.11	2025.03.10
Digital multimeter	MASTECH	MS8261	MBGBC83053	2024.03.09	2025.03.08
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

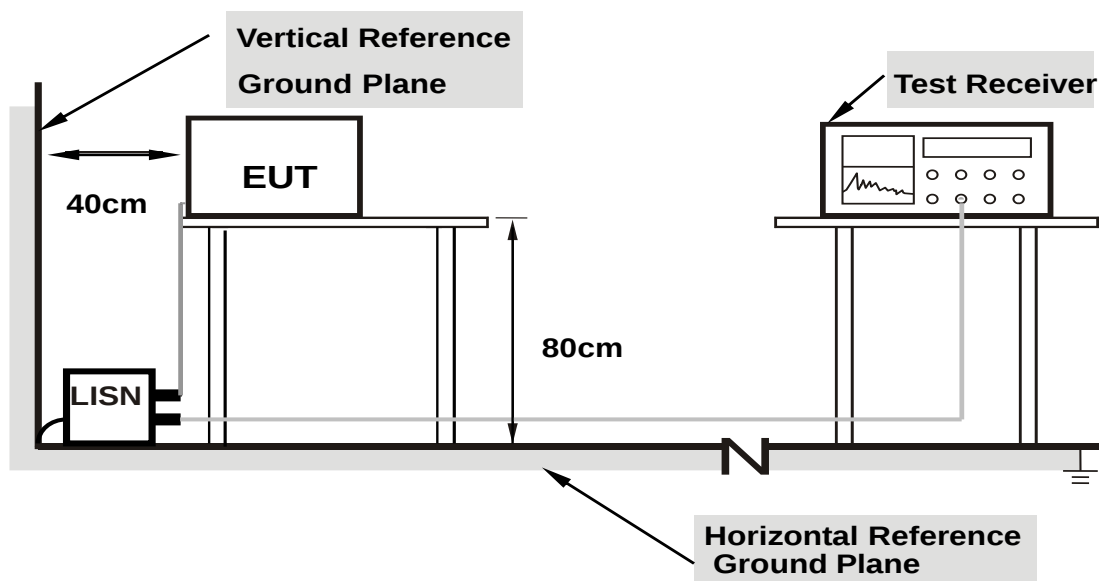

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.5 TEST RESULTS


Project: LGT24J058	Test Engineer: LiuH
EUT: LED LINKABLE SHOPLIGHT	Temperature: 24.5°C
M/N: LM030630	Humidity: 42%RH
Test Voltage: AC 120V/60Hz	Test Data: 2024-10-29
Test Mode: TX	
Note:	

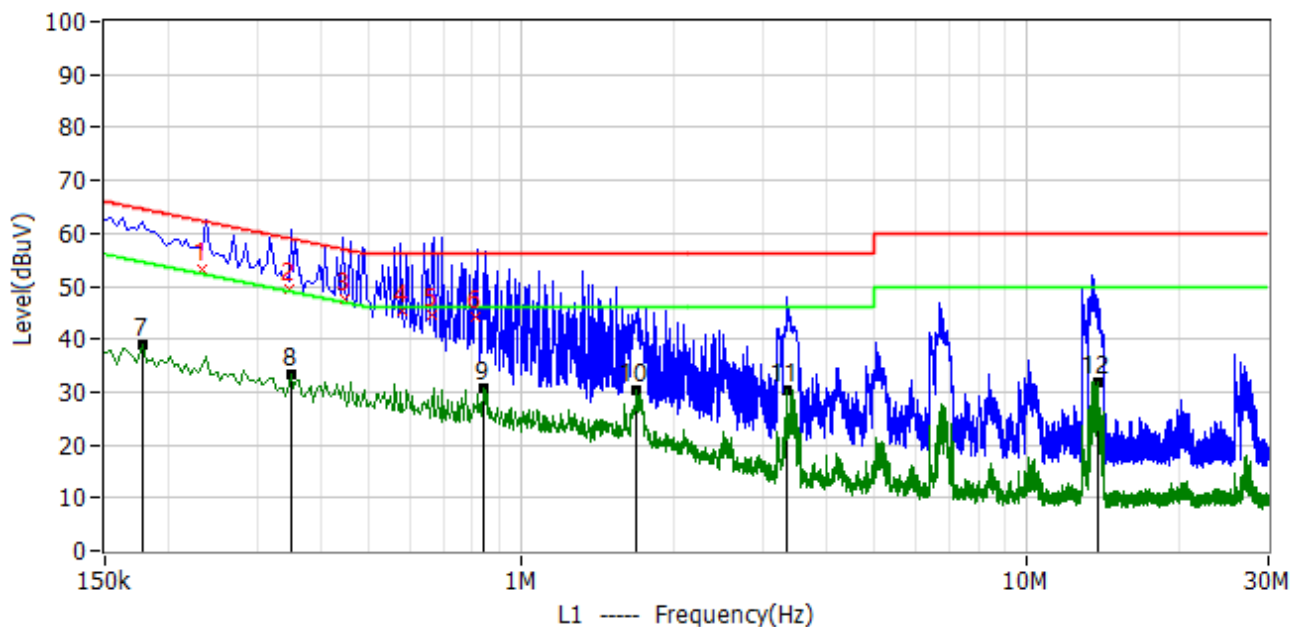

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	0.234	42.65	10.60	53.25	62.31	-9.05	QP	L1
2	0.346	38.68	10.60	49.28	59.06	-9.78	QP	L1
3	0.446	36.81	10.60	47.41	56.95	-9.54	QP	L1
4	0.582	34.56	10.60	45.16	56.00	-10.84	QP	L1
5	0.666	33.96	10.60	44.56	56.00	-11.44	QP	L1
6	0.814	33.66	10.60	44.26	56.00	-11.74	QP	L1
7*	0.178	28.50	10.60	39.10	54.58	-15.48	AV	L1
8*	0.350	22.76	10.57	33.33	48.96	-15.63	AV	L1
9*	0.842	20.18	10.62	30.80	46.00	-15.20	AV	L1
10*	1.682	19.45	10.89	30.34	46.00	-15.66	AV	L1
11*	3.354	19.27	11.17	30.44	46.00	-15.56	AV	L1
12*	13.746	20.70	11.30	32.00	50.00	-18.00	AV	L1



Project: LGT24J058	Test Engineer: LiuH
EUT: LED LINKABLE SHOPLIGHT	Temperature: 24.5°C
M/N: LM030630	Humidity: 42%RH
Test Voltage: AC 120V/60Hz	Test Data: 2024-10-29
Test Mode: TX	
Note:	

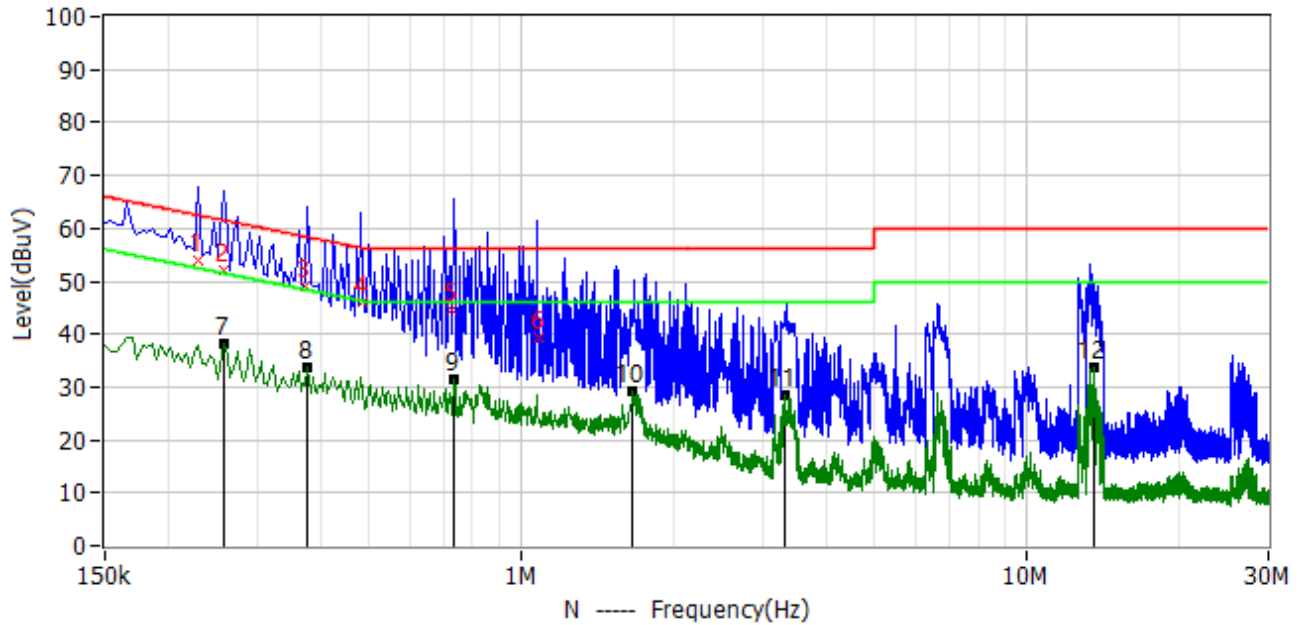

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	0.230	43.38	10.60	53.98	62.45	-8.47	QP	N
2	0.258	41.43	10.60	52.03	61.50	-9.47	QP	N
3	0.374	38.37	10.60	48.97	58.41	-9.45	QP	N
4	0.486	35.53	10.50	46.03	56.24	-10.20	QP	N
5	0.730	33.94	10.60	44.54	56.00	-11.46	QP	N
6	1.078	28.69	10.60	39.29	56.00	-16.71	QP	N
7*	0.258	27.69	10.58	38.27	51.50	-13.23	AV	N
8*	0.378	22.98	10.59	33.57	48.32	-14.76	AV	N
9*	0.734	20.72	10.56	31.28	46.00	-14.72	AV	N
10*	1.658	18.67	10.68	29.35	46.00	-16.65	AV	N
11*	3.314	17.67	10.79	28.46	46.00	-17.54	AV	N
12*	13.586	22.42	11.27	33.69	50.00	-16.31	AV	N



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249, Part 15.209(a) & RSS Gen and RSS 210 limit in the table below has to be followed.

Standard FCC 15.209& RSS Gen

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	3

Standard FCC 15.209& RSS Gen

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

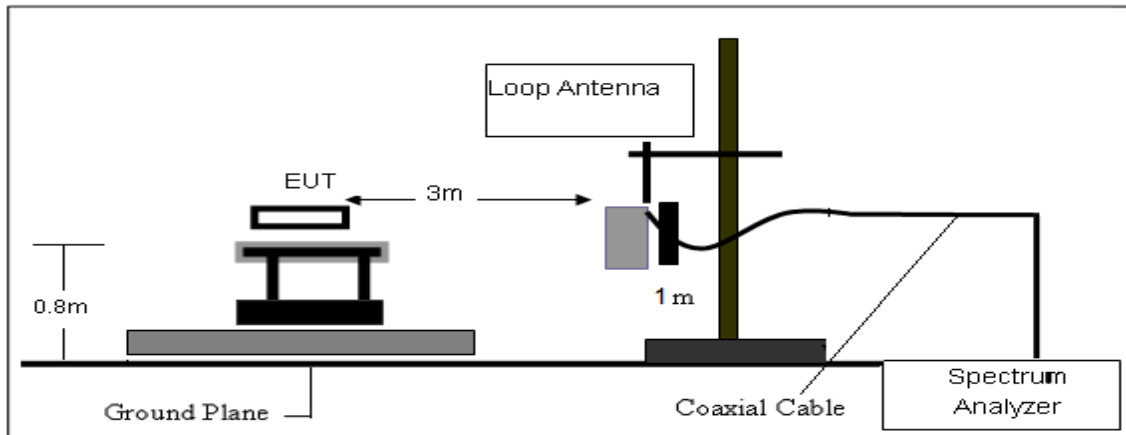

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

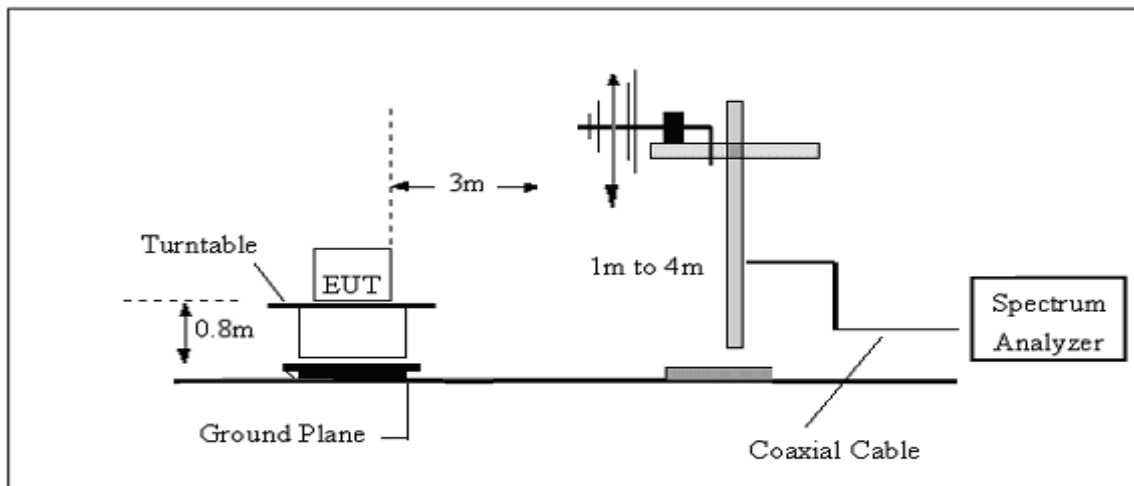

(C) Radiated Emission Test-Up Frequency Above 1GHz

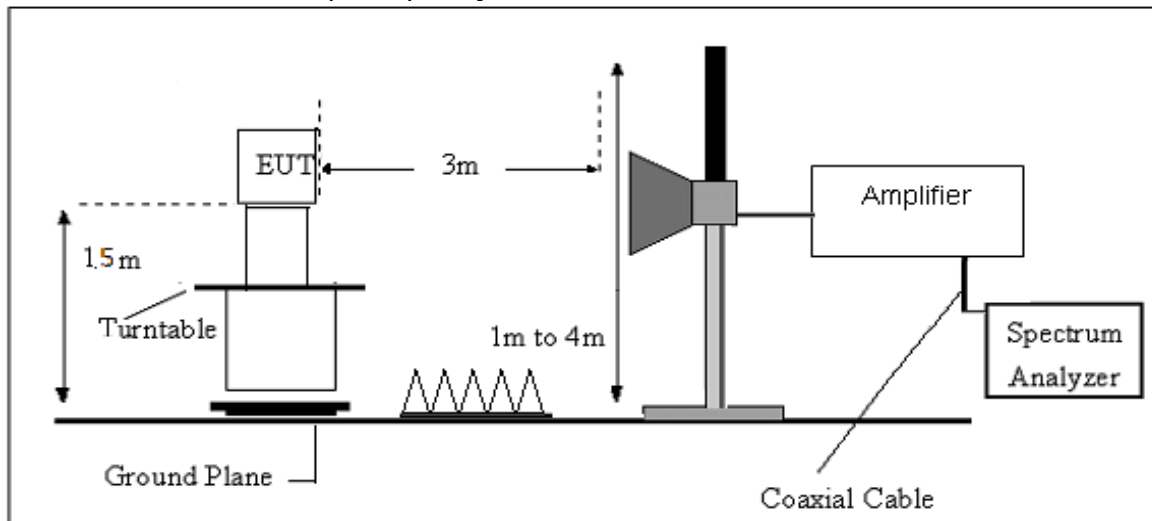

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example


Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$




4.6 TEST RESULTS

Project: LGT24J058	Test Engineer: LiuH
EUT: LED LINKABLE SHOPLIGHT	Temperature: 26°C
M/N: LM030630	Humidity: 50%RH
Test Voltage: AC 120V/60Hz	Test Data: 2024-10-30
Test Mode: TX	
Note:	

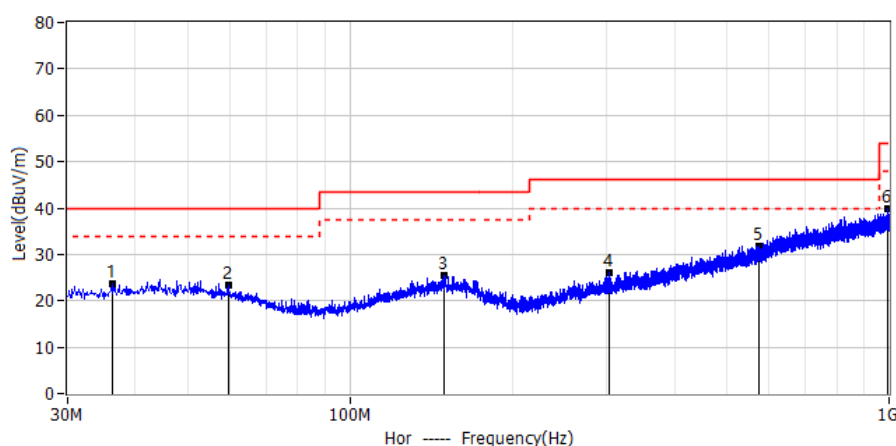

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	36.426	3.89	19.91	23.80	40.00	-16.20	QP	Hor
2*	59.585	3.97	19.42	23.39	40.00	-16.61	QP	Hor
3*	149.916	4.12	21.41	25.53	43.50	-17.97	QP	Hor
4*	303.661	4.65	21.50	26.15	46.00	-19.85	QP	Hor
5*	573.321	3.77	28.08	31.85	46.00	-14.15	QP	Hor
6*	996.848	6.02	33.84	39.86	54.00	-14.14	QP	Hor

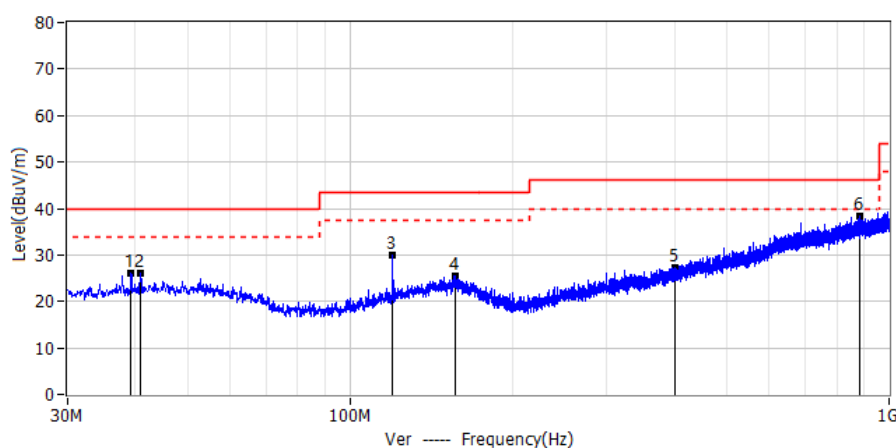

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	39.336	6.17	19.91	26.08	40.00	-13.92	QP	Ver
2*	41.034	5.70	20.39	26.09	40.00	-13.91	QP	Ver
3*	120.210	10.71	19.32	30.03	43.50	-13.47	QP	Ver
4*	156.585	3.63	21.84	25.47	43.50	-18.03	QP	Ver
5*	401.874	3.01	24.35	27.36	46.00	-18.64	QP	Ver
6*	883.721	5.21	33.01	38.22	46.00	-7.78	QP	Ver



Above 1G Radiation Spurious

Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (5730 MHz)							
3996.30	53.37	-6.89	46.48	74.00	-27.52	PK	Vertical
3996.30	42.92	-6.89	36.03	54.00	-17.97	AV	Vertical
3984.67	52.25	-6.89	45.36	74.00	-28.64	PK	Horizontal
3984.67	43.30	-6.89	36.41	54.00	-17.59	AV	Horizontal
8924.82	53.19	-3.80	49.39	74.00	-24.61	PK	Vertical
8924.82	43.44	-3.80	39.64	54.00	-14.36	AV	Vertical
8921.07	53.94	-3.80	50.14	74.00	-23.86	PK	Horizontal
8921.07	43.94	-3.80	40.14	54.00	-13.86	AV	Horizontal
11460.84	55.77	-2.92	52.85	74.00	-21.15	PK	Vertical
11460.84	44.12	-2.92	41.20	54.00	-12.80	AV	Vertical
11460.01	55.41	-2.92	52.49	74.00	-21.51	PK	Horizontal
11460.01	44.70	-2.92	41.78	54.00	-12.22	AV	Horizontal
13295.07	54.47	-0.35	54.12	74.00	-19.88	PK	Vertical
13295.07	44.67	-0.35	44.32	54.00	-9.68	AV	Vertical
13293.58	54.94	-0.35	54.59	74.00	-19.41	PK	Horizontal
13293.58	44.22	-0.35	43.87	54.00	-10.13	AV	Horizontal
Mid Channel (5800 MHz)							
3996.17	53.09	-6.89	46.20	74.00	-27.80	PK	Vertical
3996.17	43.28	-6.89	36.39	54.00	-17.61	AV	Vertical
3983.02	52.58	-6.89	45.69	74.00	-28.31	PK	Horizontal
3983.02	42.73	-6.89	35.84	54.00	-18.16	AV	Horizontal
8924.71	53.83	-3.80	50.03	74.00	-23.97	PK	Vertical
8924.71	43.76	-3.80	39.96	54.00	-14.04	AV	Vertical
8921.67	53.98	-3.80	50.18	74.00	-23.82	PK	Horizontal
8921.67	44.19	-3.80	40.39	54.00	-13.61	AV	Horizontal
11599.43	55.53	-2.92	52.61	74.00	-21.39	PK	Vertical
11599.43	45.38	-2.92	42.46	54.00	-11.54	AV	Vertical
11599.64	55.72	-2.92	52.80	74.00	-21.20	PK	Horizontal
11599.64	44.79	-2.92	41.87	54.00	-12.13	AV	Horizontal
13290.65	54.22	-0.35	53.87	74.00	-20.13	PK	Vertical
13290.65	44.59	-0.35	44.24	54.00	-9.76	AV	Vertical
13299.55	53.61	-0.35	53.26	74.00	-20.74	PK	Horizontal
13299.55	44.72	-0.35	44.37	54.00	-9.63	AV	Horizontal
High Channel (5870 MHz)							
3997.61	52.82	-6.89	45.93	74.00	-28.07	PK	Vertical



3997.61	42.44	-6.89	35.55	54.00	-18.45	AV	Vertical
3985.15	53.19	-6.89	46.30	74.00	-27.70	PK	Horizontal
3985.15	43.47	-6.89	36.58	54.00	-17.42	AV	Horizontal
8911.02	53.48	-3.80	49.68	74.00	-24.32	PK	Vertical
8911.02	43.55	-3.80	39.75	54.00	-14.25	AV	Vertical
8918.56	53.50	-3.80	49.70	74.00	-24.30	PK	Horizontal
8918.56	43.34	-3.80	39.54	54.00	-14.46	AV	Horizontal
11740.45	56.35	-2.92	53.43	74.00	-20.57	PK	Vertical
11740.45	44.71	-2.92	41.79	54.00	-12.21	AV	Vertical
11739.38	55.19	-2.92	52.27	74.00	-21.73	PK	Horizontal
11739.38	45.21	-2.92	42.29	54.00	-11.71	AV	Horizontal
13294.10	54.30	-0.35	53.95	74.00	-20.05	PK	Vertical
13294.10	44.07	-0.35	43.72	54.00	-10.28	AV	Vertical
13288.92	53.54	-0.35	53.19	74.00	-20.81	PK	Horizontal
13288.92	44.44	-0.35	44.09	54.00	-9.91	AV	Horizontal

Remark:

In frequency ranges 18~40GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.



Duty Cycle



Frequency (MHz)	Ton(ms)	Tp(ms)	Duty cycle (%)	Duty cycle factor (dB)
5730	100	100	100	0

Note: Duty Factor= $20 \cdot \log(\text{Ton}/\text{Tp})$



4.7 TEST RESULTS (BAND EDGE REQUIREMENTS)

Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
5725	53.56	-8.27	45.29	74	-28.71	PK	Vertical
5725	43.61	-8.27	35.34	54	-18.66	AV	Vertical
5725	53.74	-8.27	45.47	74	-28.53	PK	Horizontal
5725	42.73	-8.27	34.46	54	-19.54	AV	Horizontal
5875	55.48	-6.33	49.15	74	-24.85	PK	Vertical
5875	44.92	-6.33	38.59	54	-15.41	AV	Vertical
5875	54.98	-6.33	48.65	74	-25.35	PK	Horizontal
5875	44.14	-6.33	37.81	54	-16.19	AV	Horizontal



4.8 TEST RESULTS (EIRP REQUIREMENTS)

Frequency (MHz)	Meter Reading (dBμV/m)	Detector	Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polar
5730.00	87.14	PK	-8.15	78.99	114.00	-35.01	H
5730.00	96.09	PK	-8.15	87.94	114.00	-26.06	V
5800.00	88.23	PK	-7.27	80.96	114.00	-33.04	H
5800.00	93.31	PK	-7.27	86.04	114.00	-27.96	V
5870.00	95.97	PK	-6.58	89.39	114.00	-24.61	H
5870.00	96.18	PK	-6.58	89.60	114.00	-24.40	V

AV = Peak +20Log10(duty cycle factor) =PK+(0)

Frequency (MHz)	PK Reading (dBμV/m)	Duty cycle factor (dB)	AV Reading (dBμV/m)	Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polar
5730.00	87.14	0	87.14	-8.15	78.99	94.00	-15.01	H
5730.00	96.09	0	96.09	-8.15	87.94	94.00	-6.06	V
5800.00	88.23	0	88.23	-7.27	80.96	94.00	-13.04	H
5800.00	93.31	0	93.31	-7.27	86.04	94.00	-7.96	V
5870.00	95.97	0	95.97	-6.58	89.39	94.00	-4.61	H
5870.00	96.18	0	96.18	-6.58	89.60	94.00	-4.40	V



5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting : RBW= 100KHz, VBW $\geq$ RBW, Sweep time = Auto.

5.2 TEST SETUP




5.3 EUT OPERATION CONDITIONS

TX mode.

5.4 TEST RESULTS


Mode	Frequency (MHz)	99% OBW (MHz)	-20 dB Bandwidth (MHz)
5.8G	5730	0.28338	0.2797
5.8G	5800	0.27424	0.3
5.8G	5870	0.24448	0.2705

Lowest Channel

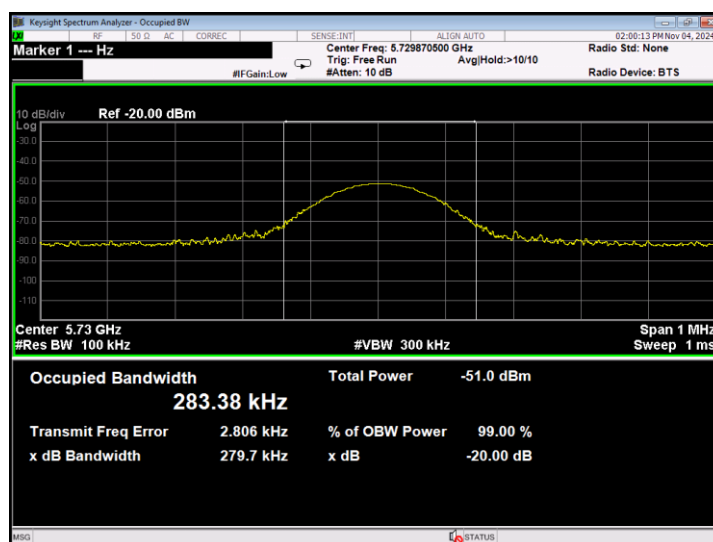




Middle Channel

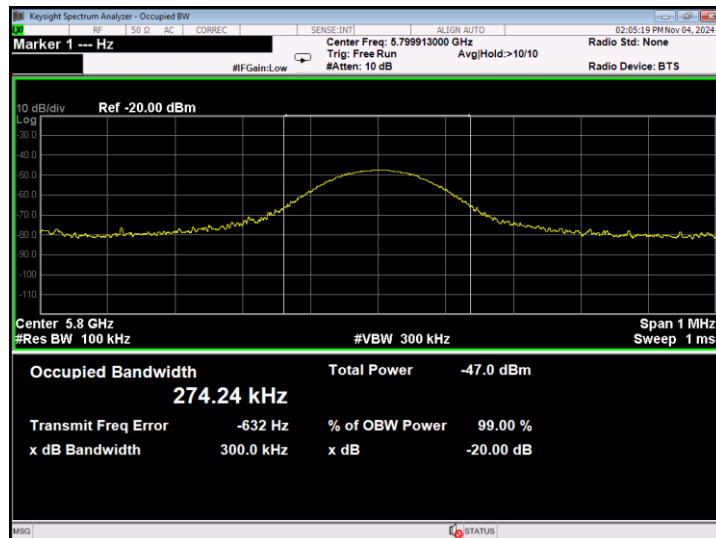

High Channel

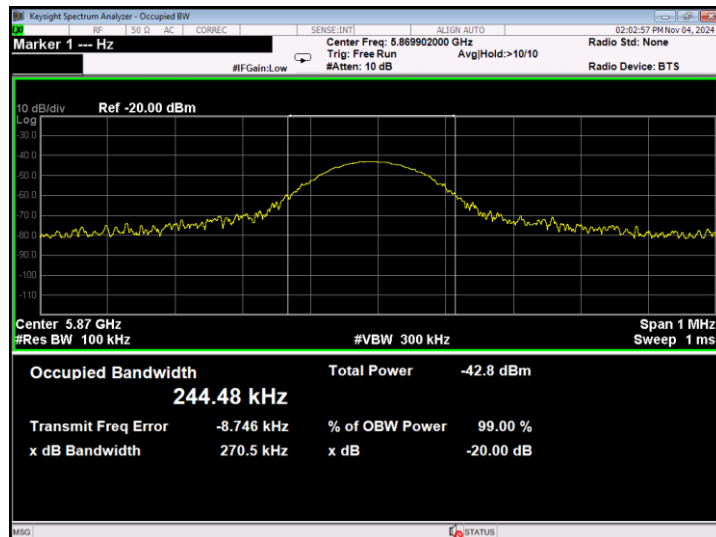



6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The EUT antenna is Integrated Antenna. It comply with the standard requirement.



APPENDIX I - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Note: Please see the attached LM030630_EUT Photos.

※※※※※END OF THE REPORT※※※※※