

FCC RF Test Report

APPLICANT : Brightstar Corporation
EQUIPMENT : Mobile Phone
BRAND NAME : Avvio
MODEL NAME : Avvio 765S/Avvio 765
FCC ID : WVBA765X
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Aug. 16, 2013 and testing was completed on Aug. 29, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL L (SHENZHEN) INC.

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Site.....	6
1.7 Applied Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency Channel	7
2.2 Pre-Scanned RF Power.....	8
2.3 Test Mode.....	9
2.4 Connection Diagram of Test System.....	10
2.5 Support Unit used in test configuration and system	11
2.6 EUT Operation Test Setup	11
2.7 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB Bandwidth Measurement	13
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement	18
3.4 Conducted Band Edges and Spurious Emission Measurement	20
3.5 Radiated Band Edges and Spurious Emission Measurement	33
3.6 AC Conducted Emission Measurement.....	59
3.7 Antenna Requirements.....	63
4 LIST OF MEASURING EQUIPMENT	64
5 UNCERTAINTY OF EVALUATION	65
APPENDIX A. SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR381603C	Rev. 01	Initial issue of report	Sep. 12, 2013
FR381603C	Rev. 02	Remove the Model Name: MEU AN351	Sep. 13, 2013

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.64 dB at 2389.740 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.92 dB at 0.180 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Brightstar Corporation

9725 NW 117th Ave., Miami, Florida, FL 33178, United States

1.2 Manufacturer

Tinno Mobile Technology Corp.

4/F., H-3 Building, OCT Eastern Industrial Park. No.1 XiangShan East Road, Nan Shan District, Shenzhen, P. R. China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Avvio
Model Name	Avvio 765S/Avvio 765
FCC ID	WVBA765X
EUT supports Radios application	GSM/GPRS/EDGE/WCDMA/HSPA/HSPA+(Downlink Only)/ WLAN 2.4GHz 802.11bgn/Bluetooth v3.0 + EDR/Bluetooth v4.0
HW Version	V1.0
SW Version	MEU_AN351_Brazil_V1.04
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two different types of EUT. They are single SIM card mobile (Model Name: Avvio 765) and dual SIM card mobile (Model Name: Avvio 765S). The others are the same including circuit design, PCB board, structure and all components. It is special to declare. After pre-scan two types of EUT, we found test result of the sample that dual SIM (Model Name: Avvio 765S) was the worst, so we choose dual SIM card mobile to perform all test.
3. There are two SIM cards for dual SIM card mobile. SIM1 supports GSM and WCDMA functions, and SIM2 only supports GSM function.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz

Maximum Output Power to Antenna	802.11b : 18.30 dBm (0.0676 W) 802.11g : 21.32 dBm (0.1355 W) 802.11n HT20 : 21.48 dBm (0.1406 W) 802.11n HT40 : 17.83 dBm (0.0607 W)
Antenna Type	802.11b/g/n : PIFA Antenna with gain 2.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.			
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755- 3320-2398			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-SZ	CO01-SZ	03CH01-SZ	831040

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and the highest data rates of peak power were chosen for full test shown in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	17.84	17.81	17.75	17.61
CH 06	2437 MHz	17.71	17.65	17.63	17.57
CH 11	2462 MHz	18.30	18.26	18.21	18.13

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	21.14	21.05	20.89	20.78	20.71	20.69	20.63	20.52
CH 06	2437 MHz	21.21	21.12	21.05	20.92	20.87	20.79	20.72	20.67
CH 11	2462 MHz	21.32	21.27	21.12	21.05	20.94	20.89	20.82	20.74

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	21.45	21.19	21.11	21.09	21.04	20.95	20.78	20.61
CH 06	2437 MHz	21.10	20.97	20.89	20.75	20.67	20.55	20.48	20.34
CH 11	2462 MHz	21.48	21.35	21.23	21.18	21.03	20.96	20.85	20.72

Channel	Frequency	2.4GHz 802.11n HT40 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	17.72	16.99	16.77	16.55	16.35	16.29	16.10	15.91
CH 06	2437 MHz	17.66	17.18	16.96	16.75	16.54	16.41	16.29	16.10
CH 09	2452 MHz	17.83	17.09	16.84	16.68	16.46	16.31	16.25	16.06


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

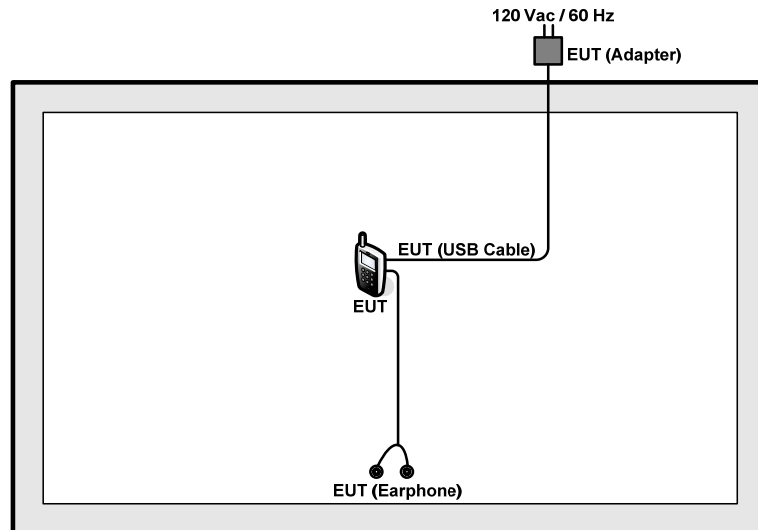

<AC Conducted Emission Mode>

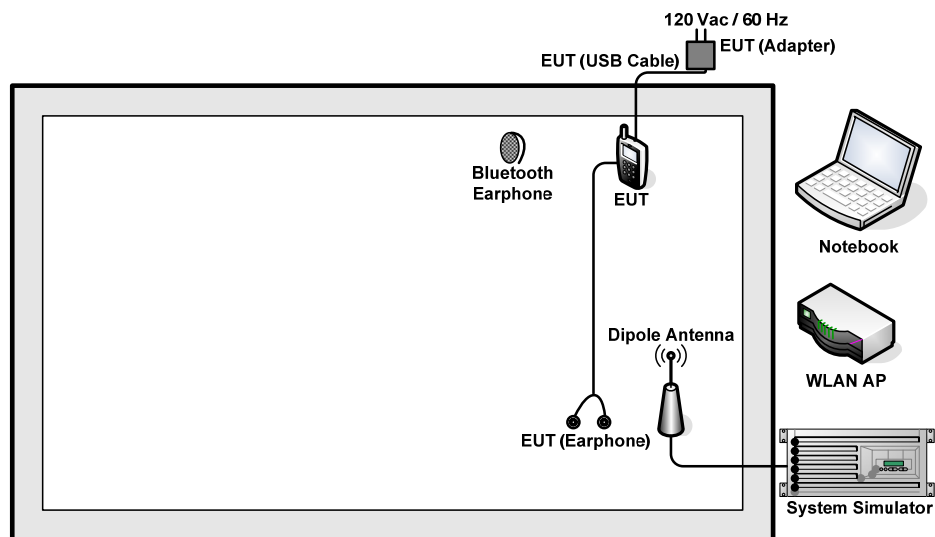

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Agilent	E5515C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-612	N/A	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-108	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.5 + 10 = 17.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

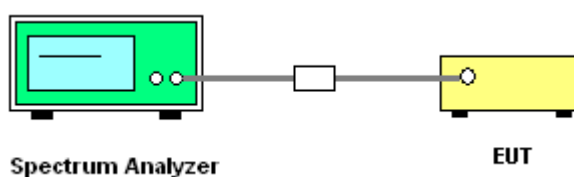

3.1.5 Test Result of 6dB Bandwidth

Test Band :	2.4GHz	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	10.00	0.5	Pass
11b	1Mbps	1	6	2437	9.08	0.5	Pass
11b	1Mbps	1	11	2462	9.08	0.5	Pass
11g	6Mbps	1	1	2412	16.36	0.5	Pass
11g	6Mbps	1	6	2437	16.36	0.5	Pass
11g	6Mbps	1	11	2462	16.32	0.5	Pass
HT20	MCS0	1	1	2412	17.60	0.5	Pass
HT20	MCS0	1	6	2437	17.60	0.5	Pass
HT20	MCS0	1	11	2462	17.60	0.5	Pass
HT40	MCS0	1	3	2422	36.00	0.5	Pass
HT40	MCS0	1	6	2437	36.08	0.5	Pass
HT40	MCS0	1	9	2452	36.00	0.5	Pass

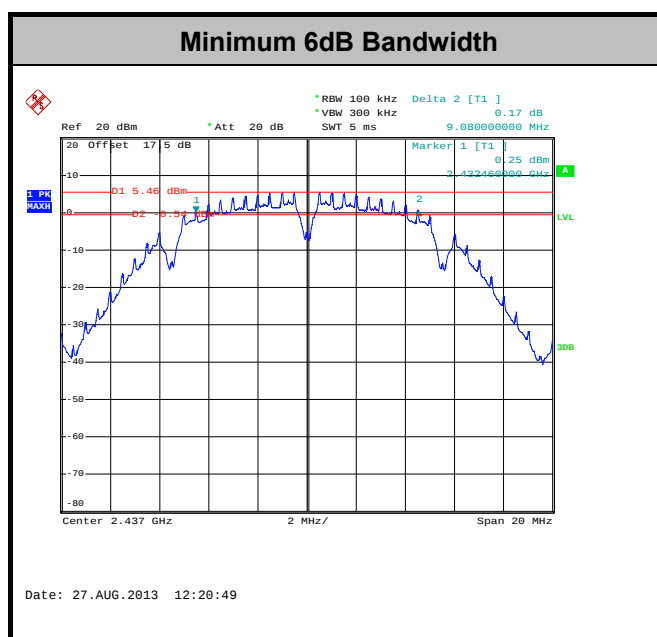

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

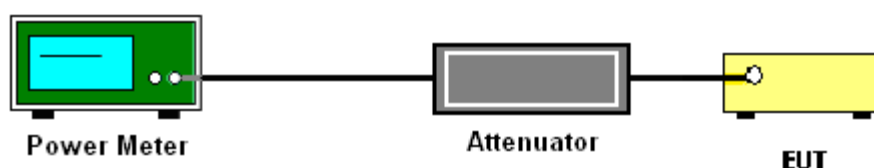

3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	17.84	30	2.50	Pass
11b	1Mbps	1	6	2437	17.71	30	2.50	Pass
11b	1Mbps	1	11	2462	18.30	30	2.50	Pass
11g	6Mbps	1	1	2412	21.14	30	2.50	Pass
11g	6Mbps	1	6	2437	21.21	30	2.50	Pass
11g	6Mbps	1	11	2462	21.32	30	2.50	Pass
HT20	MCS0	1	1	2412	21.45	30	2.50	Pass
HT20	MCS0	1	6	2437	21.10	30	2.50	Pass
HT20	MCS0	1	11	2462	21.48	30	2.50	Pass
HT40	MCS0	1	3	2422	17.72	30	2.50	Pass
HT40	MCS0	1	6	2437	17.66	30	2.50	Pass
HT40	MCS0	1	9	2452	17.83	30	2.50	Pass

Note: Measured power (dBm) has offset with cable loss.

3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.09	14.94	30	2.50	Pass
11b	1Mbps	1	6	2437	0.09	14.86	30	2.50	Pass
11b	1Mbps	1	11	2462	0.09	15.35	30	2.50	Pass
11g	6Mbps	1	1	2412	0.50	10.19	30	2.50	Pass
11g	6Mbps	1	6	2437	0.50	10.28	30	2.50	Pass
11g	6Mbps	1	11	2462	0.50	10.77	30	2.50	Pass
HT20	MCS0	1	1	2412	0.53	10.79	30	2.50	Pass
HT20	MCS0	1	6	2437	0.53	10.20	30	2.50	Pass
HT20	MCS0	1	11	2462	0.53	10.85	30	2.50	Pass
HT40	MCS0	1	3	2422	1.03	6.09	30	2.50	Pass
HT40	MCS0	1	6	2437	1.03	6.10	30	2.50	Pass
HT40	MCS0	1	9	2452	1.03	6.24	30	2.50	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

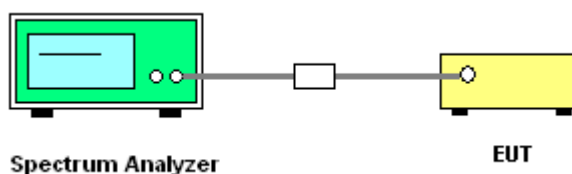


3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	24~26℃
Test Engineer :	Fly Chen	Relative Humidity :	50~53%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-9.20	8	2.50	Pass
11b	1Mbps	1	6	2437	-9.01	8	2.50	Pass
11b	1Mbps	1	11	2462	-8.87	8	2.50	Pass
11g	6Mbps	1	1	2412	-14.04	8	2.50	Pass
11g	6Mbps	1	6	2437	-15.07	8	2.50	Pass
11g	6Mbps	1	11	2462	-14.38	8	2.50	Pass
HT20	MCS0	1	1	2412	-15.78	8	2.50	Pass
HT20	MCS0	1	6	2437	-14.90	8	2.50	Pass
HT20	MCS0	1	11	2462	-14.09	8	2.50	Pass
HT40	MCS0	1	3	2422	-21.84	8	2.50	Pass
HT40	MCS0	1	6	2437	-21.83	8	2.50	Pass
HT40	MCS0	1	9	2452	-21.80	8	2.50	Pass

Note: Measured power density (dBm) has offset with cable loss.

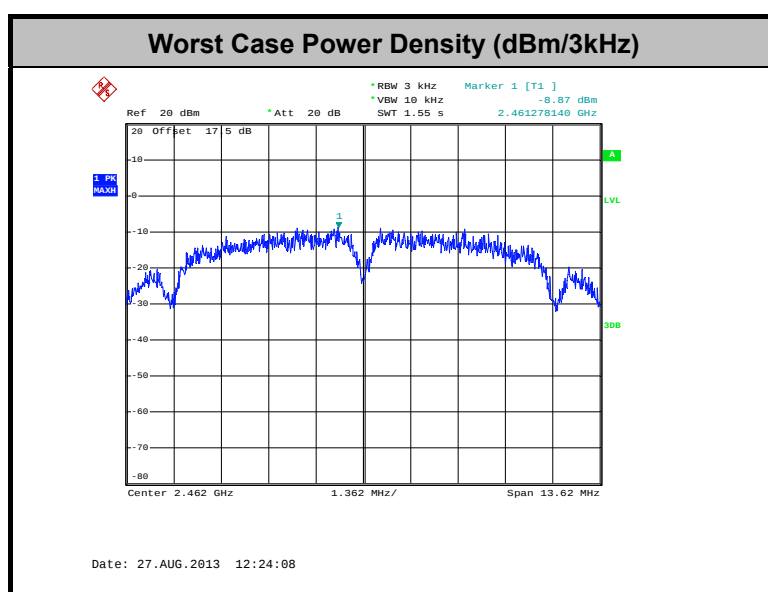

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

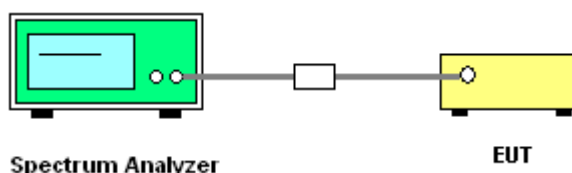


3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Mode :	802.11b	Temperature :	24~26℃
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Chen

WLAN 802.11b Channel 01


100kHz PSD reference Level

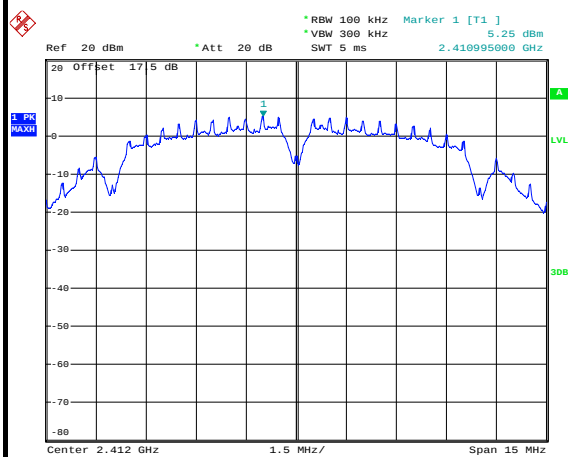


Low Channel Plot

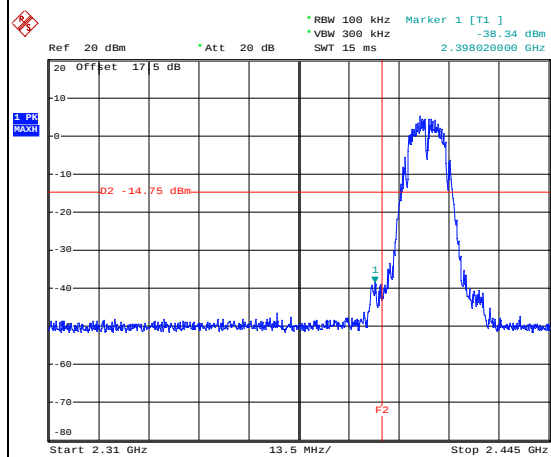

Spurious Emission 30MHz~3GHz

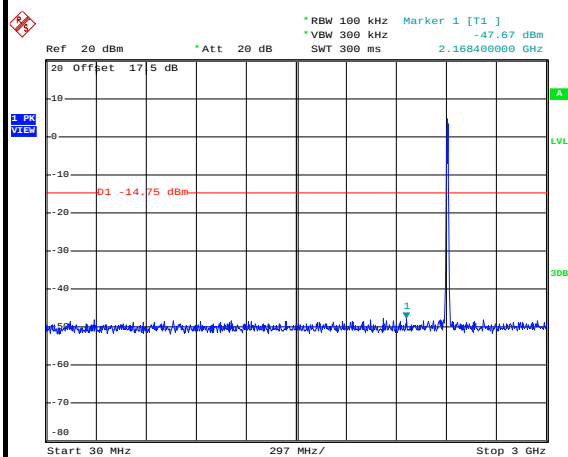

Spurious Emission 2GHz~25GHz

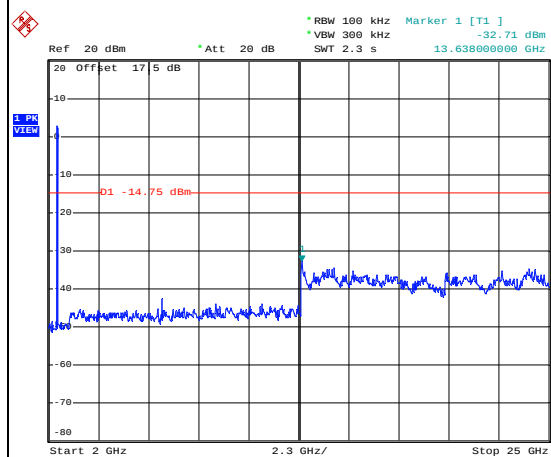




Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Chen

WLAN 802.11b Channel 06


100kHz PSD reference Level

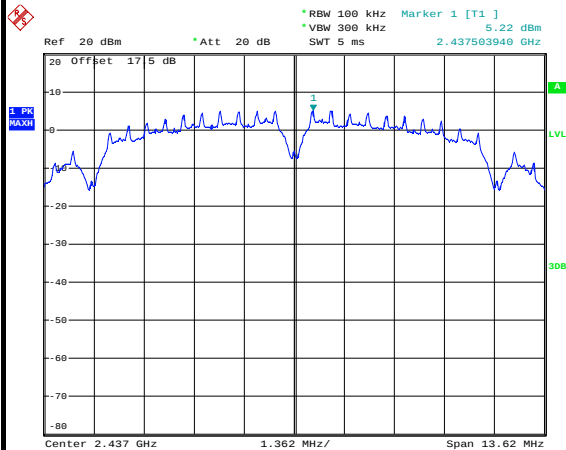

Date: 27.AUG.2013 12:21:19


Mid Channel Plot

Spurious Emission 30MHz~3GHz

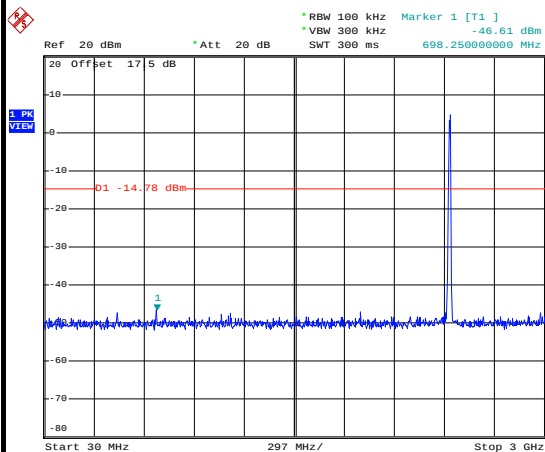

Date: 27.AUG.2013 12:21:39

Spurious Emission 2GHz~25GHz

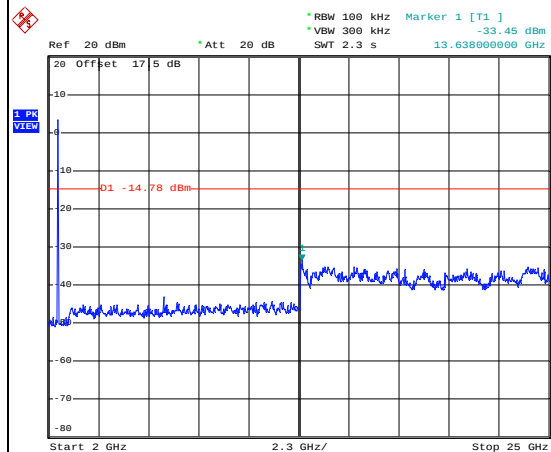


Date: 27.AUG.2013 12:21:57



Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Chen


WLAN 802.11b Channel 11

100kHz PSD reference Level

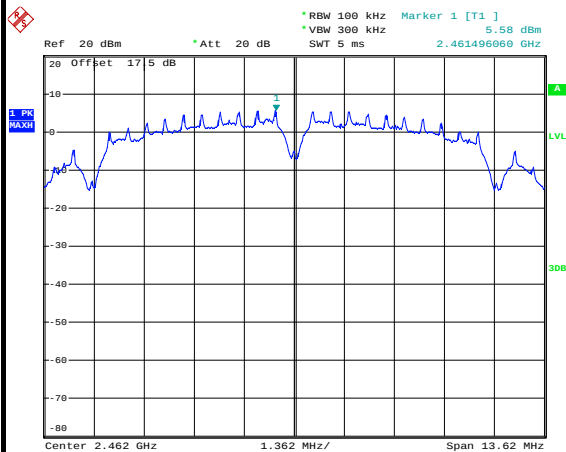


Date: 27.AUG.2013 12:24:17

High Channel Plot

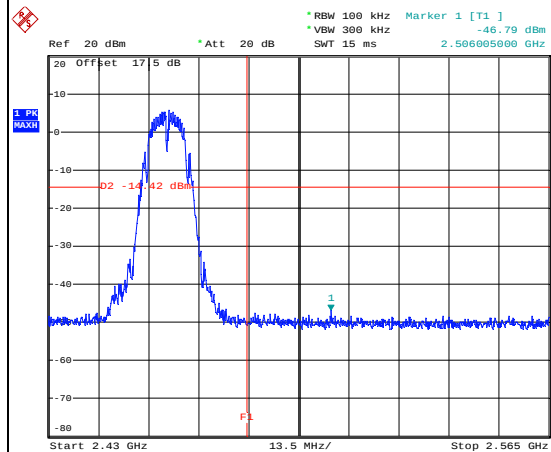


Date: 27.AUG.2013 12:24:31

Spurious Emission 30MHz~3GHz

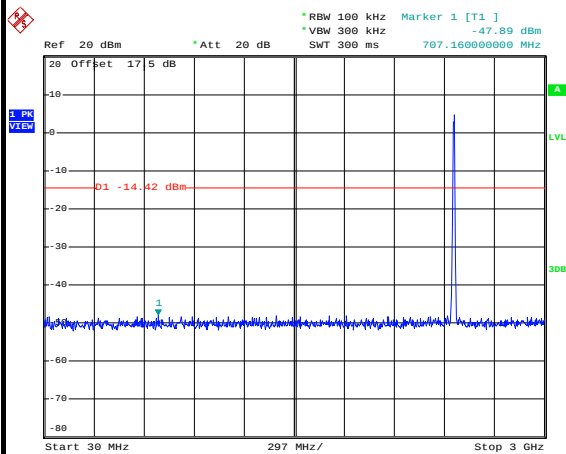

Date: 27.AUG.2013 12:24:50

Spurious Emission 2GHz~25GHz

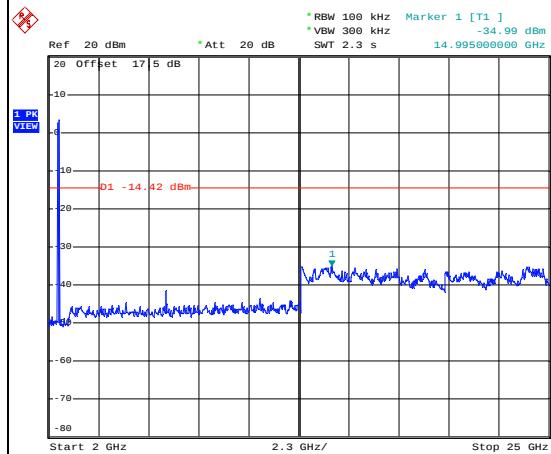


Date: 27.AUG.2013 12:25:09



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Chen


WLAN 802.11g Channel 01

100kHz PSD reference Level

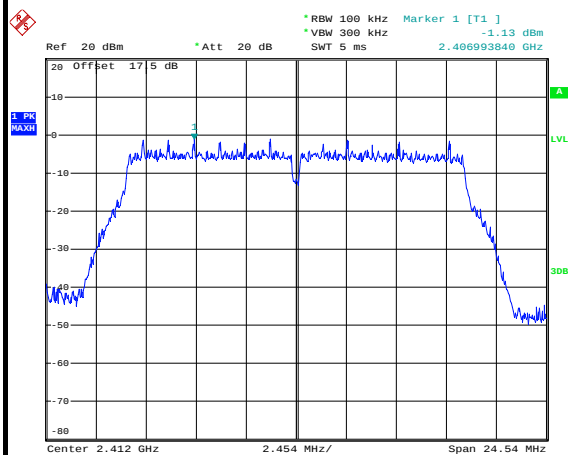


Date: 28.AUG.2013 02:31:46

Low Channel Plot

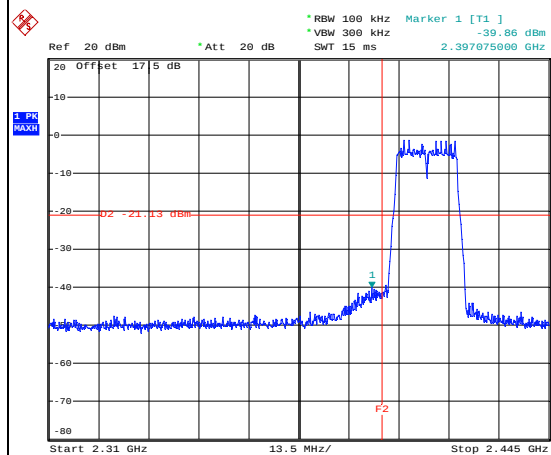


Date: 28.AUG.2013 02:32:00

Spurious Emission 30MHz~3GHz

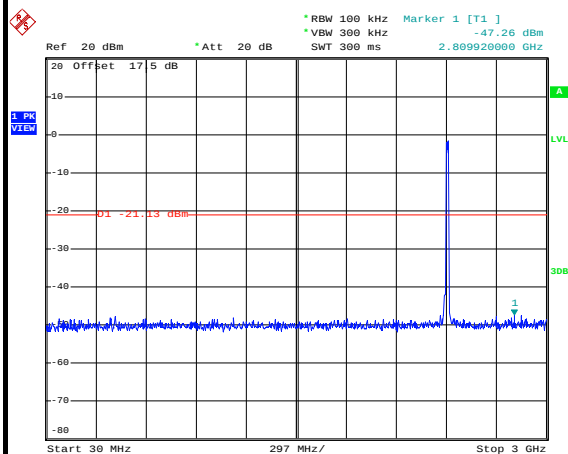

Date: 28.AUG.2013 02:32:19

Spurious Emission 2GHz~25GHz

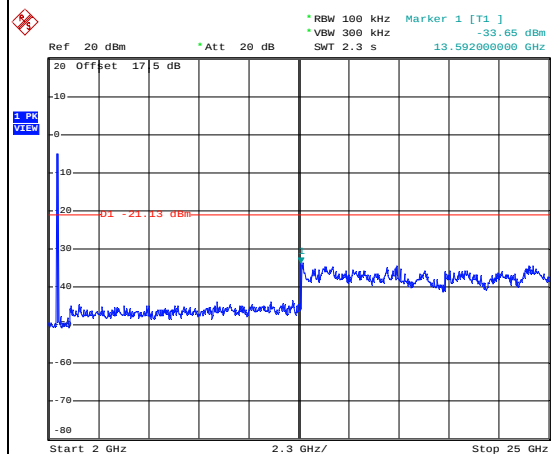


Date: 28.AUG.2013 02:32:38



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Chen

WLAN 802.11g Channel 06


100kHz PSD reference Level

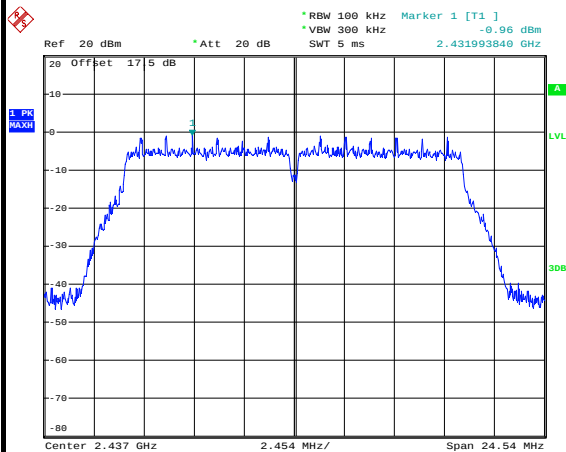

Date: 28.AUG.2013 02:38:32


Mid Channel Plot

Spurious Emission 30MHz~3GHz

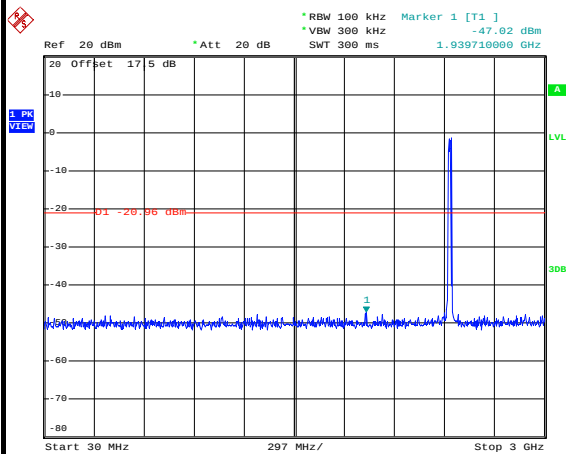

Date: 28.AUG.2013 02:38:52

Spurious Emission 2GHz~25GHz

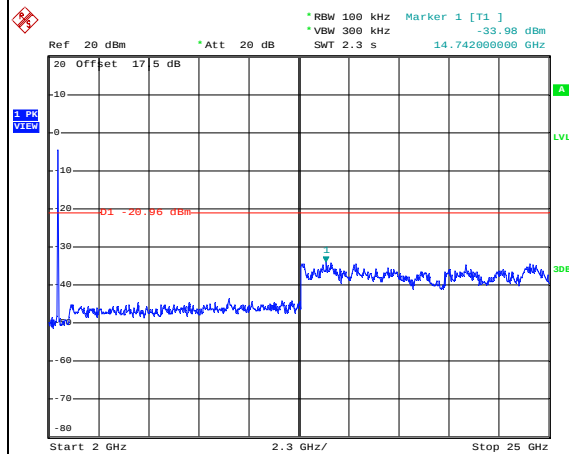


Date: 28.AUG.2013 02:39:11



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Chen


WLAN 802.11g Channel 11

100kHz PSD reference Level

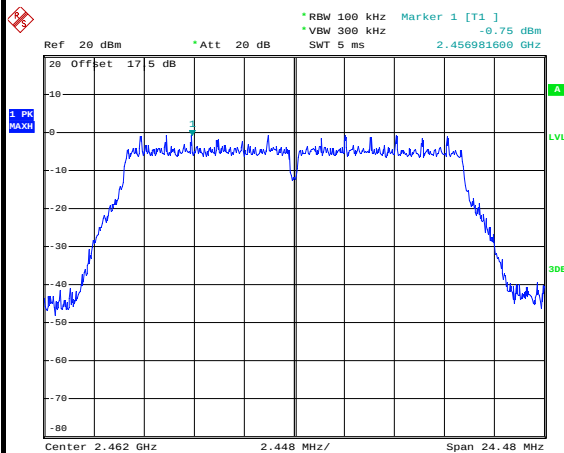


Date: 28.AUG.2013 02:44:09

High Channel Plot

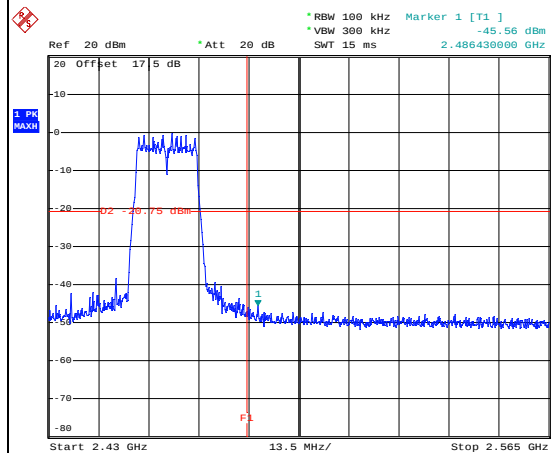


Date: 28.AUG.2013 02:44:23

Spurious Emission 30MHz~3GHz

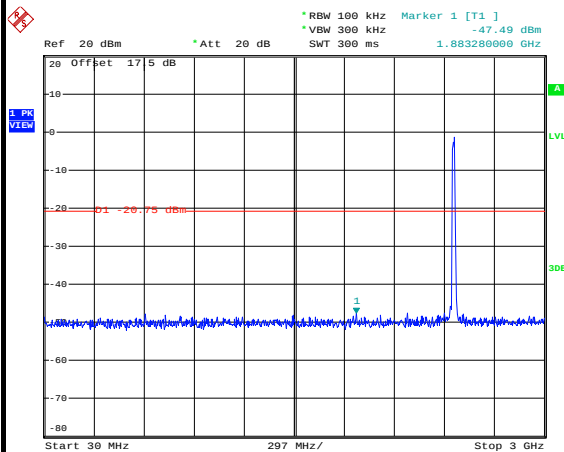

Date: 28.AUG.2013 02:44:43

Spurious Emission 2GHz~25GHz

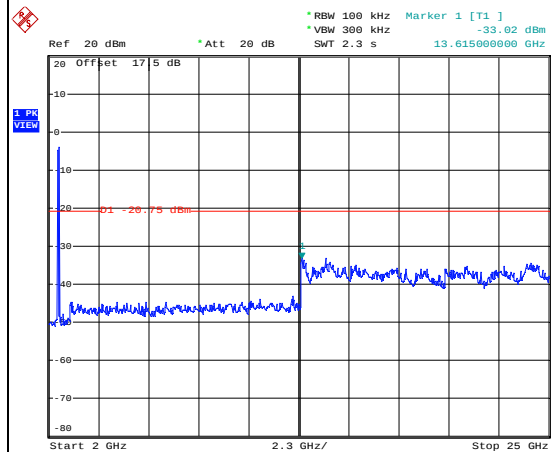


Date: 28.AUG.2013 02:45:01



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	01	Test Engineer :	Fly Chen


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

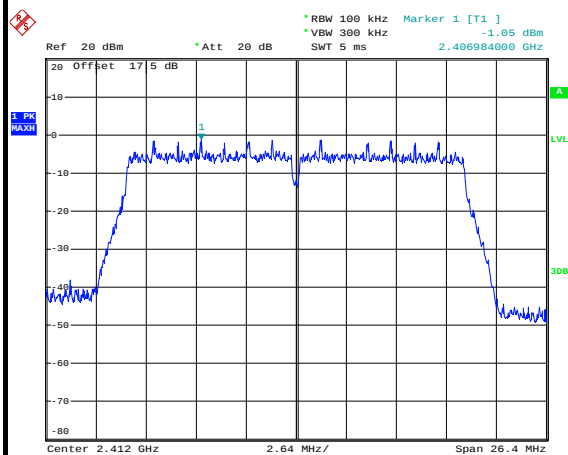


Date: 28.AUG.2013 02:52:04

Low Channel Plot

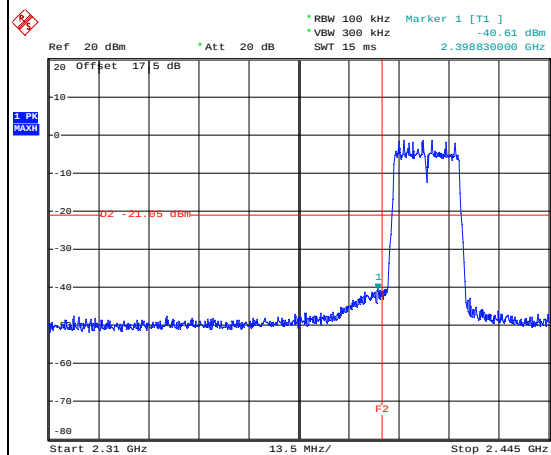


Date: 28.AUG.2013 02:52:18

Spurious Emission 30MHz~3GHz

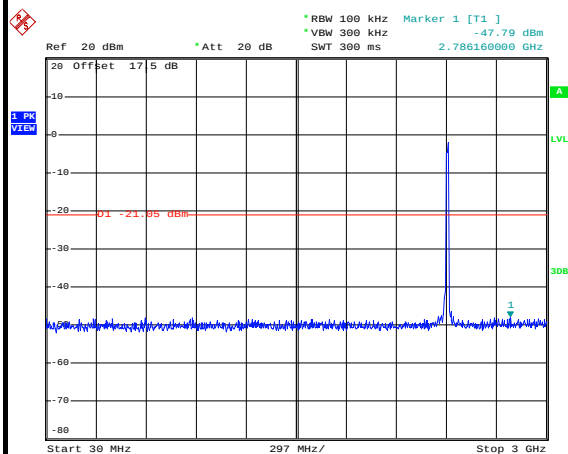

Date: 28.AUG.2013 02:54:33


Spurious Emission 2GHz~25GHz

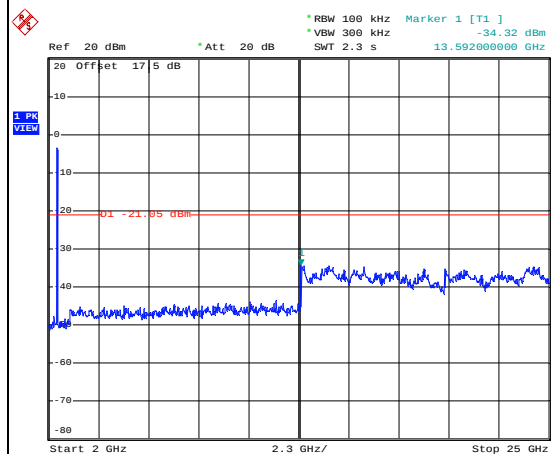


Date: 28.AUG.2013 02:54:52




Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Chen

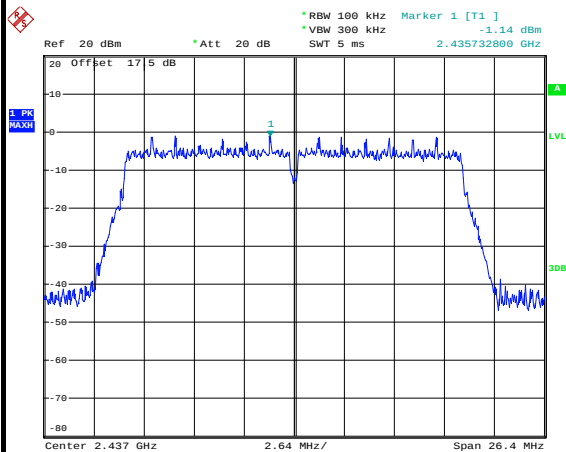WLAN 802.11n HT20 Channel 06**100kHz PSD reference Level**

Date: 28.AUG.2013 02:59:24

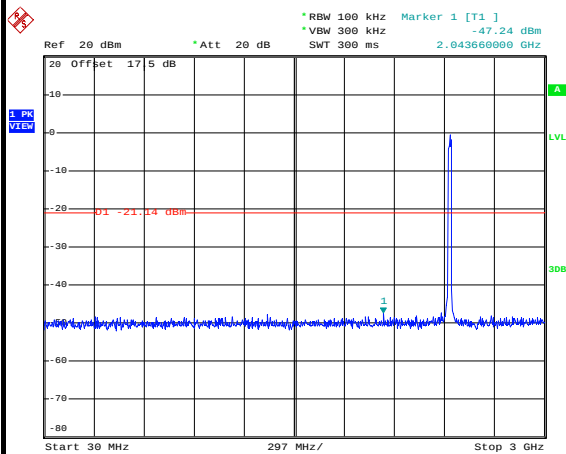Mid Channel Plot**Spurious Emission 30MHz~3GHz**

Date: 28.AUG.2013 02:59:44

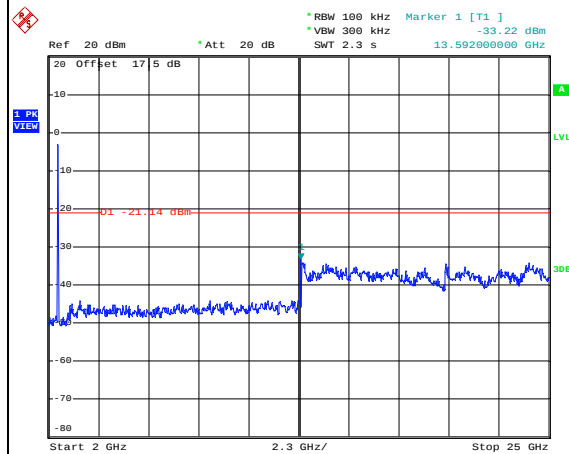Spurious Emission 2GHz~25GHz


Date: 28.AUG.2013 03:00:02



Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fly Chen


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

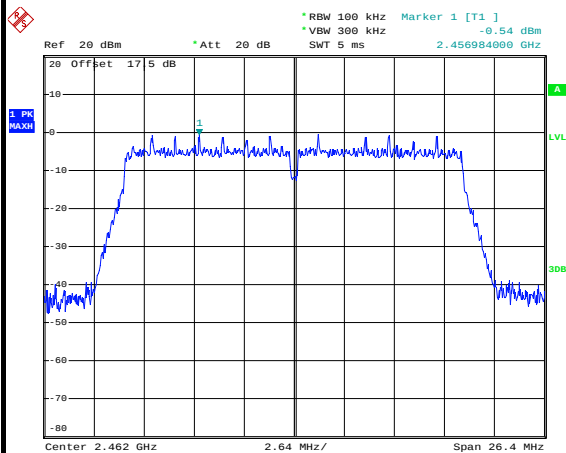


Date: 28.AUG.2013 03:04:18

High Channel Plot

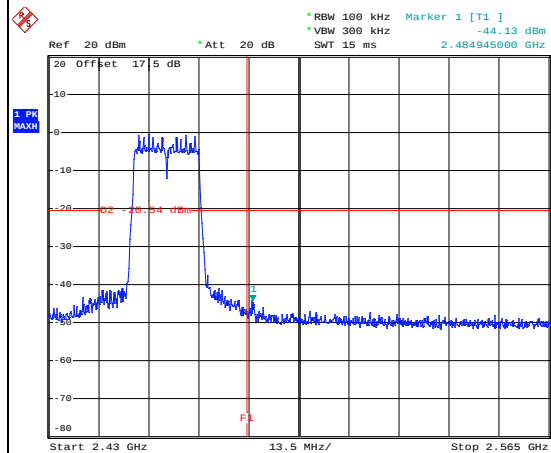


Date: 28.AUG.2013 03:04:32

Spurious Emission 30MHz~3GHz

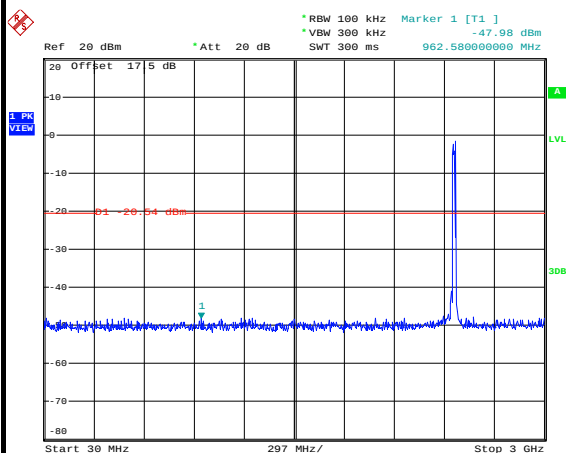

Date: 28.AUG.2013 03:04:52

Spurious Emission 2GHz~25GHz

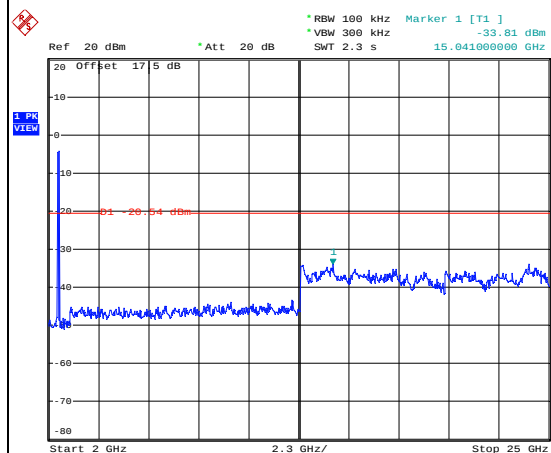


Date: 28.AUG.2013 03:05:10



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	50~53%
Test Channel :	03	Test Engineer :	Fly Chen


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

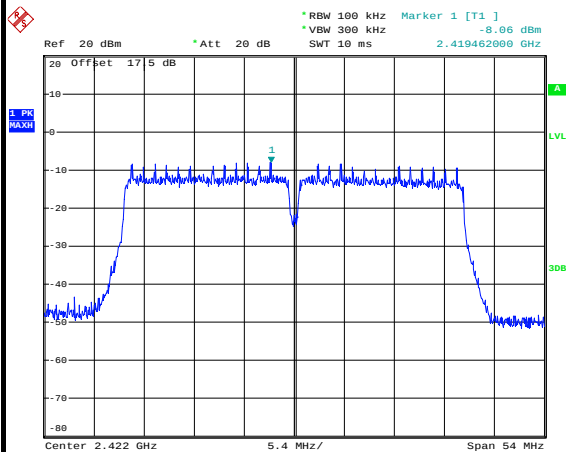


Date: 28.AUG.2013 03:12:48

Low Channel Plot

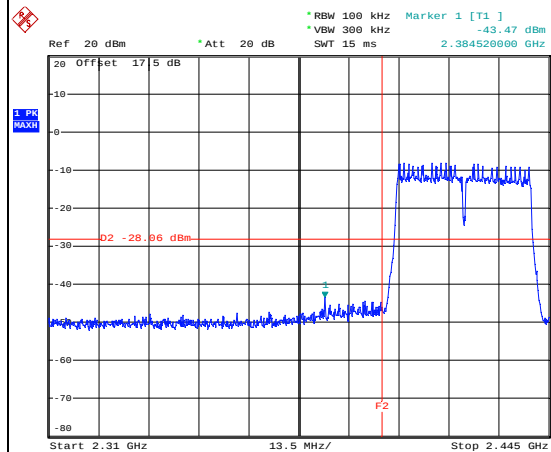


Date: 28.AUG.2013 03:13:02

Spurious Emission 30MHz~3GHz

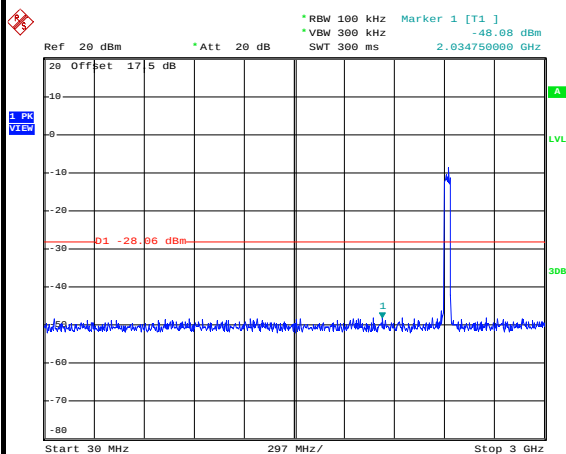

Date: 28.AUG.2013 03:18:52


Spurious Emission 2GHz~25GHz

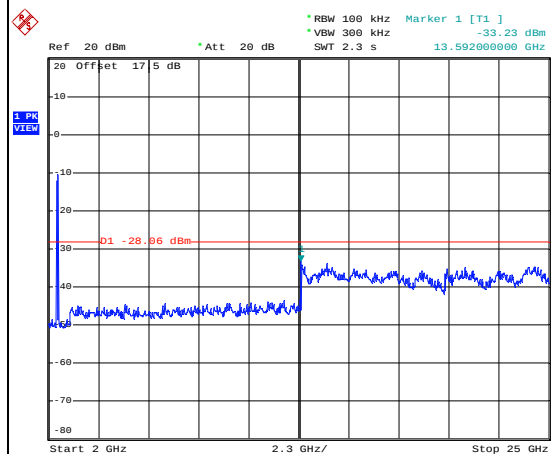


Date: 28.AUG.2013 03:19:10




Test Mode :	802.11n HT40	Temperature :	24~26℃
Test Band :	2.4GHz Mid	Relative Humidity :	50~53%
Test Channel :	06	Test Engineer :	Fly Chen

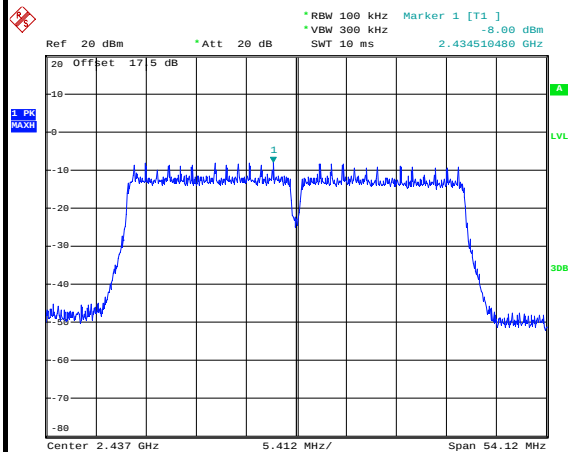WLAN 802.11n HT40 Channel 06**100kHz PSD reference Level**

Date: 28.AUG.2013 03:24:56

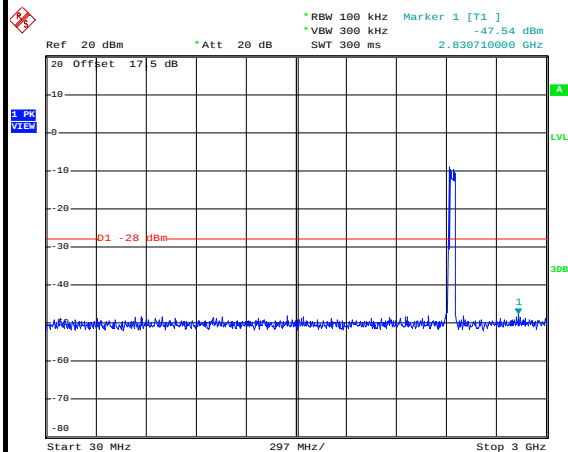Mid Channel Plot**Spurious Emission 30MHz~3GHz**

Date: 28.AUG.2013 03:39:08

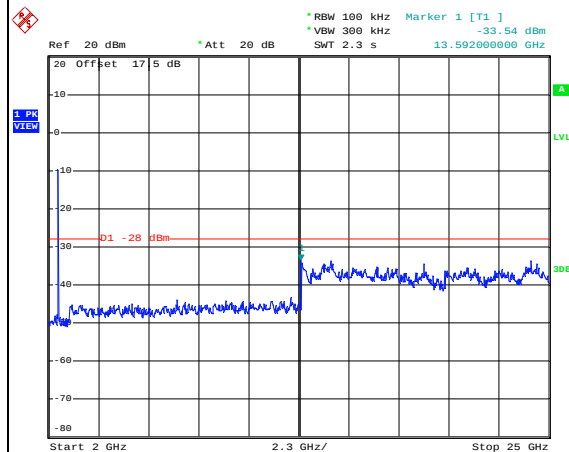Spurious Emission 2GHz~25GHz


Date: 28.AUG.2013 03:39:26



Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	09	Test Engineer :	Fly Chen


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

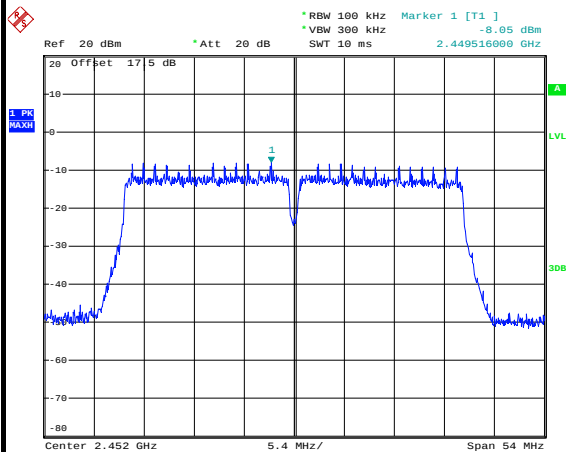


Date: 28.AUG.2013 03:44:22

High Channel Plot

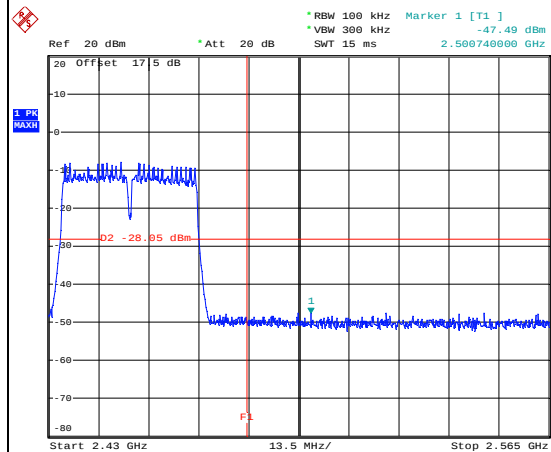


Date: 28.AUG.2013 03:45:59

Spurious Emission 30MHz~3GHz

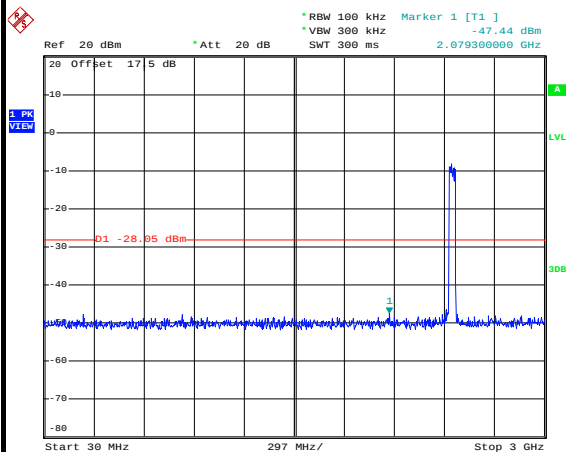

Date: 28.AUG.2013 03:52:29

Spurious Emission 2GHz~25GHz

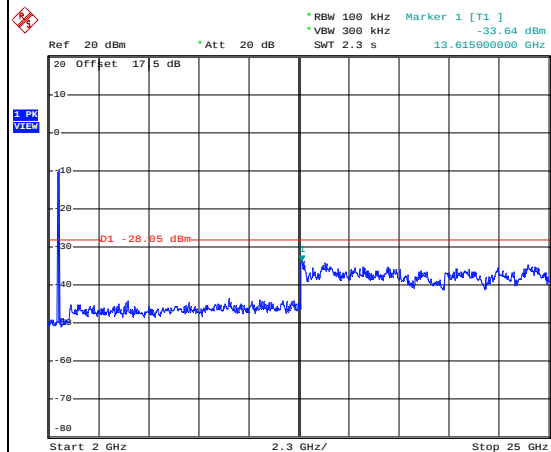

Date: 28.AUG.2013 03:52:47

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:

 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.99	8.380	0.119	300Hz
802.11g	89.14	1.396	0.716	1kHz
2.4GHz 802.11n HT20	88.44	1.300	0.769	1kHz
2.4GHz 802.11n HT40	78.92	0.644	1.553	3kHz


802.11b Duty Cycle

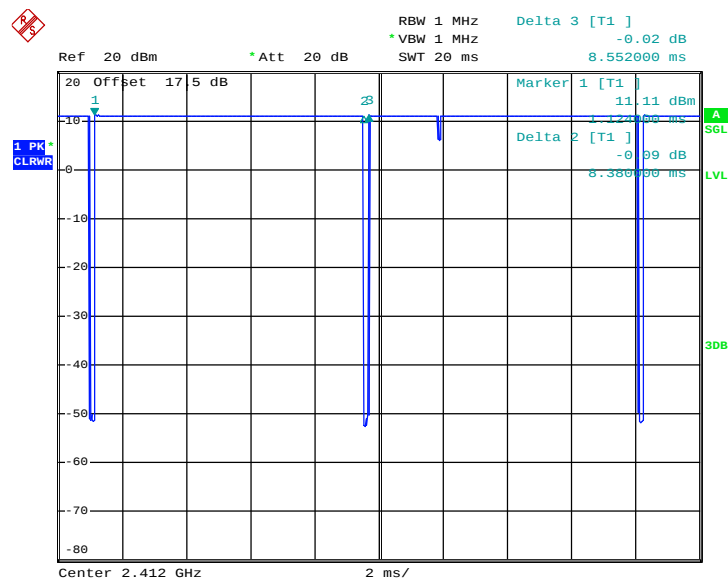


Date: 24.AUG.2013 16:46:42

Note:

The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.




The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

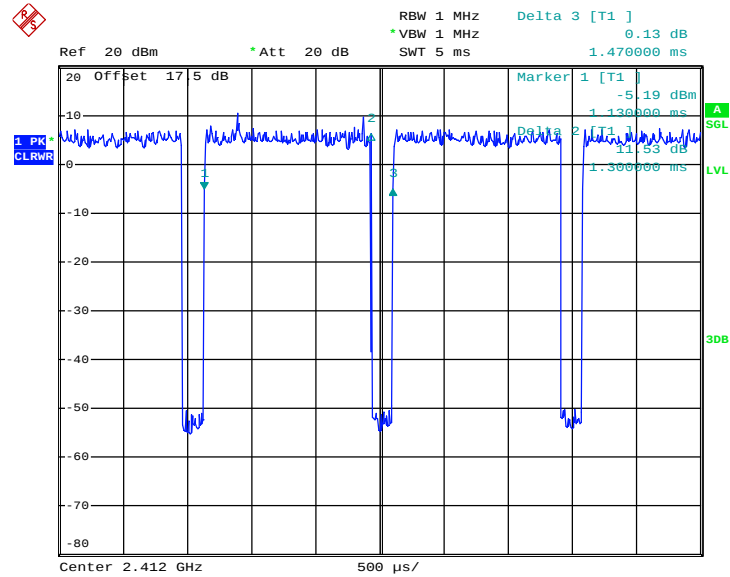802.11n HT20 Duty Cycle


Date: 24.AUG.2013 16:53:11

Note:


The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.




The total loss is 17.5dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer by setting into the amplitude level offset. That means the measured result shown on the spectrum analyzer has added the total loss and been compliance with the limit line.

3.5.4 Test Setup


For radiated emissions below 30MHz

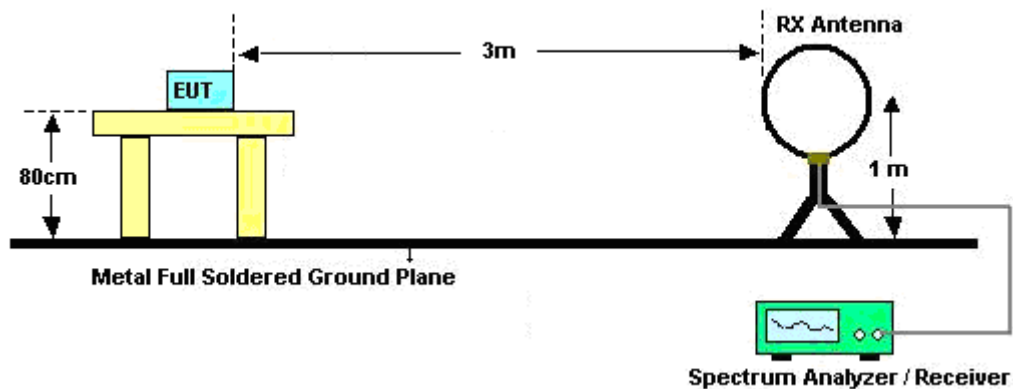

For radiated emissions from 30MHz to 1GHz

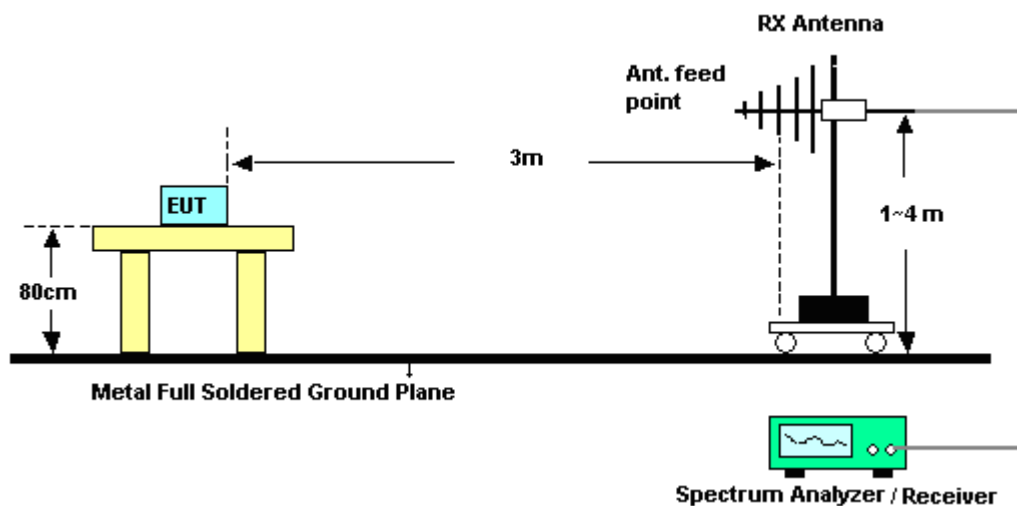

For radiated emissions above 1GHz

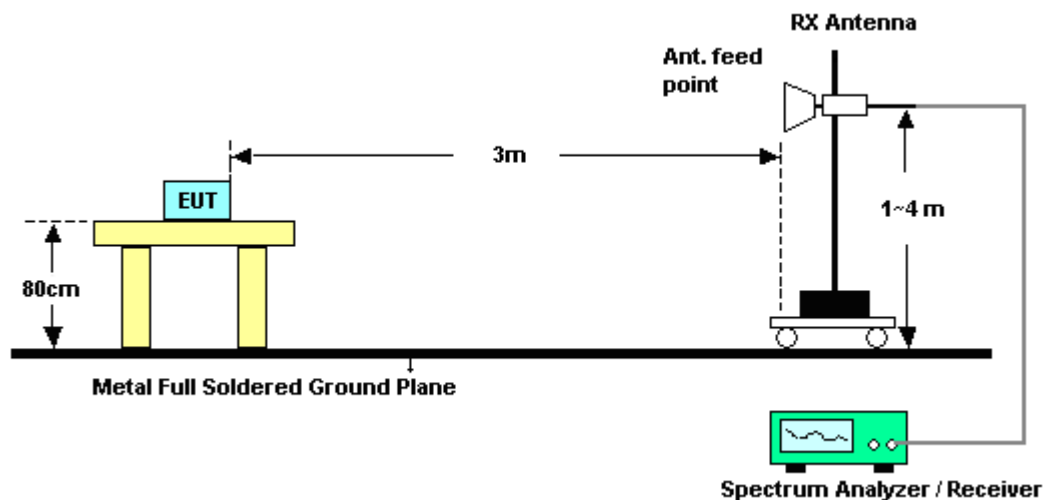

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	48~50%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2385.96	54.58	-19.42	74	46.64	32.14	5.59	29.79	150	0	Peak
2387.13	43.55	-10.45	54	35.61	32.14	5.59	29.79	150	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.65	52.57	-21.43	74	44.63	32.14	5.59	29.79	131	7	Peak
2387.04	40.33	-13.67	54	32.39	32.14	5.59	29.79	131	7	Average

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	48~50%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2486.77	56.93	-17.07	74	48.71	32.27	5.71	29.76	122	0	Peak
2487.94	45.62	-8.38	54	37.38	32.29	5.71	29.76	122	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2488.42	51.15	-22.85	74	42.91	32.29	5.71	29.76	126	0	Peak
2487.91	40.38	-13.62	54	32.14	32.29	5.71	29.76	126	0	Average

Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	48~50%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.29	62.31	-11.69	74	54.37	32.14	5.59	29.79	100	0	Peak
2389.92	50.61	-3.39	54	42.63	32.14	5.62	29.78	100	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.11	65.18	-8.82	74	57.24	32.14	5.59	29.79	129	0	Peak
2389.92	49.11	-4.89	54	41.13	32.14	5.62	29.78	129	0	Average

Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	48~50%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2486.08	71.83	-2.17	74	63.61	32.27	5.71	29.76	124	0	Peak
2483.5	51.42	-2.58	54	43.2	32.27	5.71	29.76	124	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2486.62	63.32	-10.68	74	55.1	32.27	5.71	29.76	100	0	Peak
2484.1	43.69	-10.31	54	35.47	32.27	5.71	29.76	100	0	Average



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	48~50%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.47	65.04	-8.96	74	57.1	32.14	5.59	29.79	100	0	Peak
2389.74	52.36	-1.64	54	44.42	32.14	5.59	29.79	100	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390.01	56.49	-17.51	74	48.51	32.14	5.62	29.78	129	0	Peak
2389.92	44.05	-9.95	54	36.07	32.14	5.62	29.78	129	0	Average

Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	48~50%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.33	63.88	-10.12	74	55.66	32.27	5.71	29.76	100	0	Peak
2483.53	50.72	-3.28	54	42.5	32.27	5.71	29.76	100	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.64	57.2	-16.8	74	48.98	32.27	5.71	29.76	100	0	Peak
2483.74	43.72	-10.28	54	35.5	32.27	5.71	29.76	100	0	Average



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	Low	Relative Humidity :	48~50%
Test Channel :	03	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.3	62.36	-11.64	74	54.42	32.14	5.59	29.79	100	360	Peak
2388.75	51.23	-2.77	54	43.29	32.14	5.59	29.79	100	360	Average
2484.43	51.69	-22.31	74	43.47	32.27	5.71	29.76	100	360	Peak
2483.83	40.58	-13.42	54	32.36	32.27	5.71	29.76	100	360	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.94	59.51	-14.49	74	51.57	32.14	5.59	29.79	127	0	Peak
2388.3	46.78	-7.22	54	38.84	32.14	5.59	29.79	127	0	Average
2483.68	51.82	-22.18	74	43.6	32.27	5.71	29.76	127	0	Peak
2485.78	40.23	-13.77	54	32.01	32.27	5.71	29.76	127	0	Average



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	High	Relative Humidity :	48~50%
Test Channel :	09	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2384.43	49.98	-24.02	74	42.06	32.12	5.59	29.79	100	360	Peak
2388.84	40.33	-13.67	54	32.39	32.14	5.59	29.79	100	360	Average
2484.25	60.33	-13.67	74	52.11	32.27	5.71	29.76	100	360	Peak
2484.04	49.23	-4.77	54	41.01	32.27	5.71	29.76	100	360	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.58	47.74	-26.26	74	39.8	32.14	5.59	29.79	106	0	Peak
2384.43	37.13	-16.87	54	29.21	32.12	5.59	29.79	106	0	Average
2484.16	55.56	-18.44	74	47.34	32.27	5.71	29.76	106	0	Peak
2483.8	44.57	-9.43	54	36.35	32.27	5.71	29.76	106	0	Average

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 108.81dBμV/m - 20dB = 88.81dBμV/m. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	108.81	-	-	100.8	32.17	5.62	29.78	149	0	Peak
2412	106.36	-	-	98.35	32.17	5.62	29.78	149	0	Average
4824	44	-30	74	59.22	33.68	8.36	57.26	106	0	Peak
7236	40.97	-47.84	88.81	52.95	35.29	9.97	57.24	189	185	Peak

Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	104.32	-	-	96.31	32.17	5.62	29.78	131	7	Peak
2412	102.06	-	-	94.05	32.17	5.62	29.78	131	7	Average
4824	45.82	-28.18	74	61.04	33.68	8.36	57.26	105	360	Peak
7236	39.69	-44.63	84.32	51.67	35.29	9.97	57.24	200	300	Peak

Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	109.4	-	-	101.3	32.22	5.65	29.77	121	0	Peak
2437	106.83	-	-	98.73	32.22	5.65	29.77	121	0	Average
4874	43.53	-30.47	74	58.49	33.8	8.41	57.17	100	0	Peak
7311	41.32	-32.68	74	53.18	35.31	9.99	57.16	174	321	Peak

Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	104.44	-	-	96.34	32.22	5.65	29.77	103	54	Peak
2437	102.19	-	-	94.09	32.22	5.65	29.77	103	54	Average
4874	43.75	-30.25	74	58.71	33.8	8.41	57.17	100	0	Peak
7311	41.11	-32.89	74	52.97	35.31	9.99	57.16	200	360	Peak

Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	109.84	-	-	101.68	32.24	5.68	29.76	122	0	Peak
2462	107.06	-	-	98.9	32.24	5.68	29.76	122	0	Average
4924	39.05	-34.95	74	53.75	33.92	8.46	57.08	146	347	Peak
7386	42.02	-31.98	74	53.7	35.35	10.02	57.05	145	274	Peak

Test Mode :	802.11b	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	105.24	-	-	97.08	32.24	5.68	29.76	126	0	Peak
2462	103.14	-	-	94.98	32.24	5.68	29.76	126	0	Average
4924	39.5	-34.5	74	54.2	33.92	8.46	57.08	155	360	Peak
7386	40.16	-33.84	74	51.84	35.35	10.02	57.05	154	183	Peak

Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	110.89	-	-	102.88	32.17	5.62	29.78	100	0	Peak
2412	102.68	-	-	94.67	32.17	5.62	29.78	100	0	Average
4824	38.21	-35.79	74	53.43	33.68	8.36	57.26	105	198	Peak
7236	38.98	-51.91	90.89	50.96	35.29	9.97	57.24	189	185	Peak

Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	107.8	-	-	99.79	32.17	5.62	29.78	129	0	Peak
2412	99.04	-	-	91.03	32.17	5.62	29.78	129	0	Average
4824	41.78	-32.22	74	57	33.68	8.36	57.26	103	205	Peak
7236	39.62	-48.18	87.8	51.6	35.29	9.97	57.24	165	180	Peak

Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	107.78	-	-	99.68	32.22	5.65	29.77	100	0	Peak
2437	98.96	-	-	90.86	32.22	5.65	29.77	100	0	Average
4874	38.49	-35.51	74	53.45	33.8	8.41	57.17	145	265	Peak
7311	40.02	-33.98	74	51.88	35.31	9.99	57.16	174	321	Peak

Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	101.18	-	-	93.08	32.22	5.65	29.77	130	0	Peak
2437	92.42	-	-	84.32	32.22	5.65	29.77	130	0	Average
4874	38.93	-35.07	74	53.89	33.8	8.41	57.17	145	265	Peak
7311	40.49	-33.51	74	52.35	35.31	9.99	57.16	174	321	Peak

Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	108.62	-	-	100.46	32.24	5.68	29.76	123	0	Peak
2462	99.63	-	-	91.47	32.24	5.68	29.76	123	0	Average
4924	38.87	-35.13	74	53.57	33.92	8.46	57.08	146	347	Peak
7386	39.61	-34.39	74	51.29	35.35	10.02	57.05	145	274	Peak

Test Mode :	802.11g	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	102.55	-	-	94.39	32.24	5.68	29.76	100	0	Peak
2462	93.41	-	-	85.25	32.24	5.68	29.76	100	0	Average
4924	38.1	-35.9	74	52.8	33.92	8.46	57.08	150	360	Peak
7386	39.75	-34.25	74	51.43	35.35	10.02	57.05	160	280	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
111.54	16.54	-26.96	43.5	33.64	12.2	1.33	30.63	-	-	Peak
171.75	25.4	-18.1	43.5	44.62	9.63	1.58	30.43	100	360	Peak
237.09	23.75	-22.25	46	40.58	11.57	1.81	30.21	-	-	Peak
478.5	27.71	-18.29	46	37.45	17.2	2.47	29.41	-	-	Peak
741.7	26.26	-19.74	46	31.66	20.56	3.05	29.01	-	-	Peak
942.6	27.07	-18.93	46	30.28	22.1	3.44	28.75	-	-	Peak
2412	106.2	-	-	98.19	32.17	5.62	29.78	100	0	Peak
2412	97.49	-	-	89.48	32.17	5.62	29.78	100	0	Average
4824	40.1	-33.9	74	55.32	33.68	8.36	57.26	105	198	Peak
7236	41.56	-44.64	86.2	53.54	35.29	9.97	57.24	189	185	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	24~25°C
Test Channel :	01	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
112.35	18.47	-25.03	43.5	35.62	12.15	1.33	30.63	-	-	Peak
177.15	18.8	-24.7	43.5	38.55	9.05	1.61	30.41	-	-	Peak
274.89	22.37	-23.63	46	37.72	12.8	1.93	30.08	-	-	Peak
418.3	27.85	-18.15	46	38.38	16.74	2.34	29.61	-	-	Peak
743.1	26.18	-19.82	46	31.52	20.62	3.05	29.01	-	-	Peak
934.9	28.41	-17.59	46	31.82	21.92	3.42	28.75	200	360	Peak
2412	100.7	-	-	92.69	32.17	5.62	29.78	128	0	Peak
2412	91.47	-	-	83.46	32.17	5.62	29.78	128	0	Average
4824	39.89	-34.11	74	55.11	33.68	8.36	57.26	108	205	Peak
7236	39.92	-40.78	80.7	51.9	35.29	9.97	57.24	190	200	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	107.09	-	-	98.99	32.22	5.65	29.77	100	0	Peak
2437	97.94	-	-	89.84	32.22	5.65	29.77	100	0	Average
4874	38.49	-35.51	74	53.45	33.8	8.41	57.17	145	265	Peak
7311	40.02	-33.98	74	51.88	35.31	9.99	57.16	174	321	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	100.97	-	-	92.87	32.22	5.65	29.77	127	0	Peak
2437	91.97	-	-	83.87	32.22	5.65	29.77	127	0	Average
4874	38.93	-35.07	74	53.89	33.8	8.41	57.17	145	265	Peak
7311	40.49	-33.51	74	52.35	35.31	9.99	57.16	174	321	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	106.64	-	-	98.48	32.24	5.68	29.76	100	0	Peak
2462	97.43	-	-	89.27	32.24	5.68	29.76	100	0	Average
4924	38.87	-35.13	74	53.57	33.92	8.46	57.08	146	347	Peak
7386	39.61	-34.39	74	51.29	35.35	10.02	57.05	145	274	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	24~25°C
Test Channel :	11	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	101.68	-	-	93.52	32.24	5.68	29.76	100	0	Peak
2462	92.66	-	-	84.5	32.24	5.68	29.76	100	0	Average
4924	38.1	-35.9	74	52.8	33.92	8.46	57.08	106	350	Peak
7386	39.75	-34.25	74	51.43	35.35	10.02	57.05	100	300	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	24~25°C
Test Channel :	03	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	104.65	-	-	96.58	32.19	5.65	29.77	100	360	Peak
2422	95.24	-	-	87.17	32.19	5.65	29.77	100	360	Average
4844	38.86	-35.14	74	53.99	33.72	8.38	57.23	126	248	Peak
7266	40.24	-33.76	74	52.16	35.3	9.98	57.2	164	305	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	24~25°C
Test Channel :	03	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2422	98.22	-	-	90.15	32.19	5.65	29.77	127	0	Peak
2422	89.11	-	-	81.04	32.19	5.65	29.77	127	0	Average
4844	37.93	-36.07	74	53.06	33.72	8.38	57.23	100	250	Peak
7266	40.44	-33.56	74	52.36	35.3	9.98	57.2	200	360	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	100.15	-	-	92.05	32.22	5.65	29.77	100	360	Peak
2437	91.78	-	-	83.68	32.22	5.65	29.77	100	360	Average
4874	38.9	-35.1	74	53.86	33.8	8.41	57.17	132	224	Peak
7311	40.15	-33.85	74	52.01	35.31	9.99	57.16	119	347	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	24~25°C
Test Channel :	06	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	94.09	-	-	85.99	32.22	5.65	29.77	130	0	Peak
2437	85.21	-	-	77.11	32.22	5.65	29.77	130	0	Average
4904	38.46	-35.54	74	53.25	33.88	8.44	57.11	100	214	Peak
7356	39.31	-34.69	74	51.07	35.33	10.01	57.1	200	360	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	24~25°C
Test Channel :	09	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	100.35	-	-	92.21	32.22	5.68	29.76	100	360	Peak
2452	91.49	-	-	83.35	32.22	5.68	29.76	100	360	Average
4904	38.42	-35.58	74	53.21	33.88	8.44	57.11	125	214	Peak
7356	39.66	-34.34	74	51.42	35.33	10.01	57.1	127	315	Peak

Test Mode :	2.4GHz 802.11n HT40	Temperature :	24~25°C
Test Channel :	09	Relative Humidity :	48~50%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2452	95.63	-	-	87.49	32.22	5.68	29.76	106	0	Peak
2452	87.06	-	-	78.92	32.22	5.68	29.76	106	0	Average
4904	38.46	-35.54	74	53.25	33.88	8.44	57.11	100	200	Peak
7356	39.31	-34.69	74	51.07	35.33	10.01	57.1	200	360	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

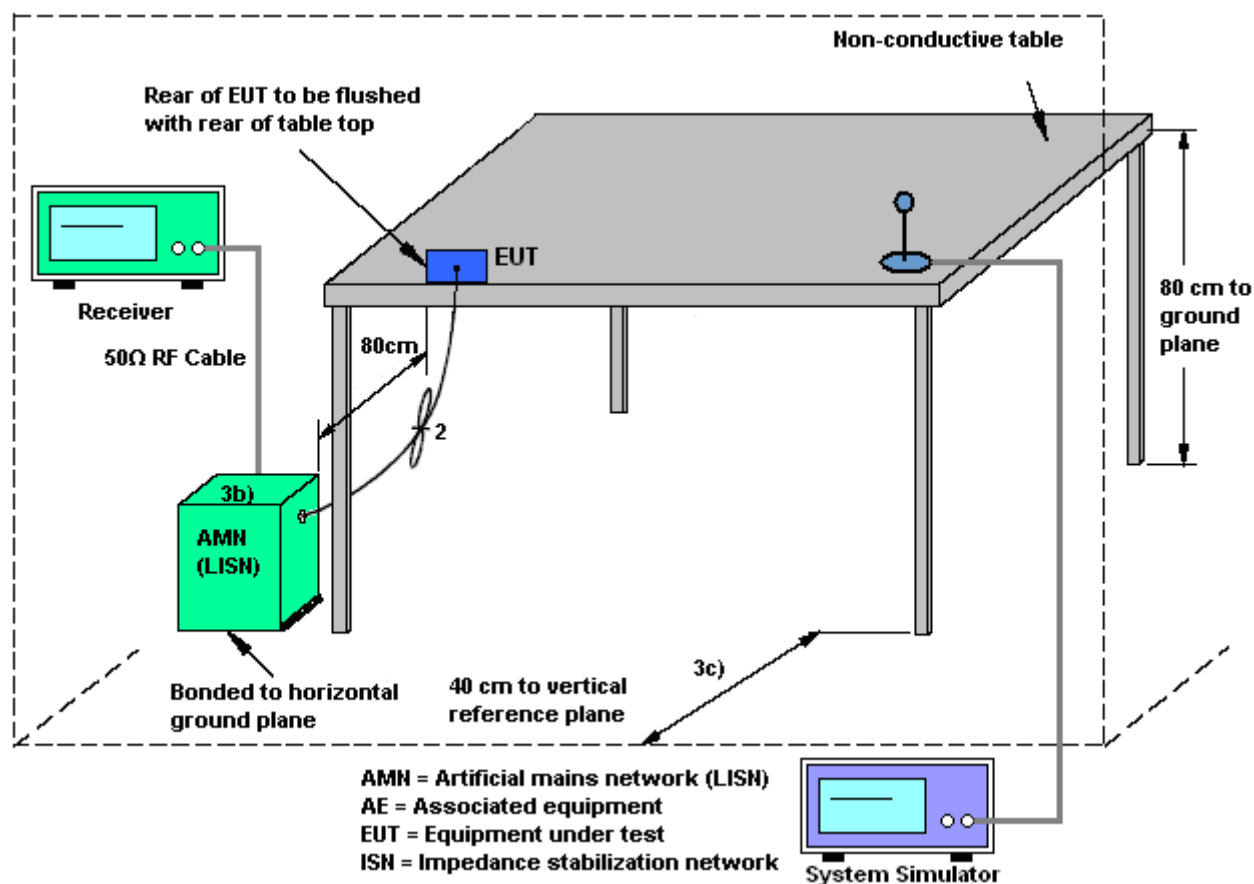

3.6.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	23~24℃
Test Engineer :	Henry Chen	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

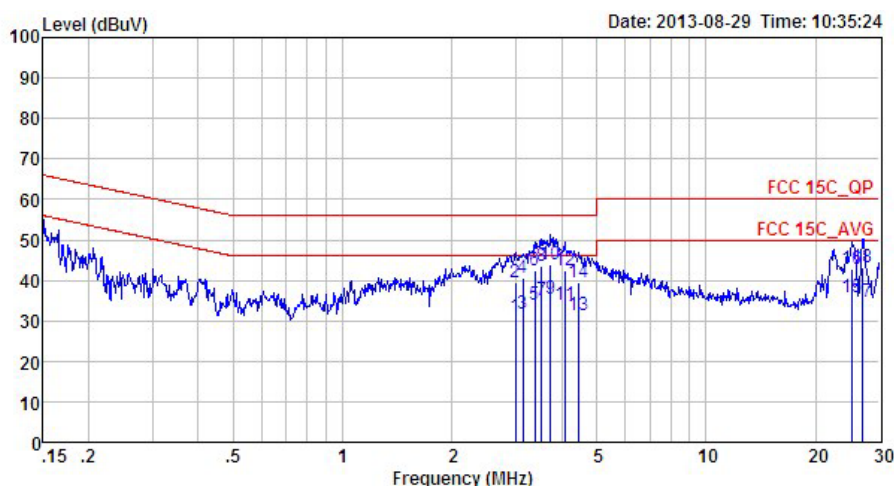

Site : CO01-SZ
Condition: FCC 15C_QP LISN_L_20130328 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	2.99	31.07	-14.93	46.00	20.59	0.27	10.21	Average
2	2.99	39.47	-16.53	56.00	28.99	0.27	10.21	QP
3	3.14	31.78	-14.22	46.00	21.30	0.27	10.21	Average
4	3.14	40.48	-15.52	56.00	30.00	0.27	10.21	QP
5	3.38	33.99	-12.01	46.00	23.50	0.28	10.21	Average
6	3.38	42.49	-13.51	56.00	32.00	0.28	10.21	QP
7	3.53	34.89	-11.11	46.00	24.40	0.28	10.21	Average
8	3.53	43.49	-12.51	56.00	33.00	0.28	10.21	QP
9 *	3.74	35.30	-10.70	46.00	24.80	0.28	10.22	Average
10	3.74	43.80	-12.20	56.00	33.30	0.28	10.22	QP
11	4.09	33.81	-12.19	46.00	23.30	0.29	10.22	Average
12	4.09	42.31	-13.69	56.00	31.80	0.29	10.22	QP
13	4.48	31.23	-14.77	46.00	20.70	0.30	10.23	Average
14	4.48	39.33	-16.67	56.00	28.80	0.30	10.23	QP
15	25.19	35.92	-14.08	50.00	23.30	2.07	10.55	Average
16	25.19	42.92	-17.08	60.00	30.30	2.07	10.55	QP
17	26.84	34.76	-15.24	50.00	22.30	1.90	10.56	Average
18	26.84	43.16	-16.84	60.00	30.70	1.90	10.56	QP

Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	Henry Chen	Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

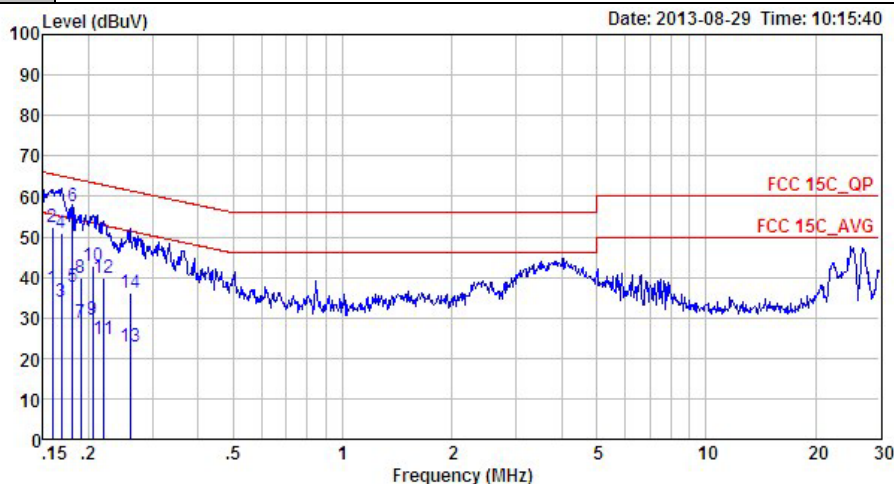

Site : CO01-SZ
Condition: FCC 15C_QP LISN_N_20130328 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	37.38	-18.14	55.52	27.00	0.04	10.34	Average
2	0.16	52.48	-13.04	65.52	42.10	0.04	10.34	QP
3	0.17	33.86	-21.17	55.03	23.50	0.04	10.32	Average
4	0.17	51.06	-13.97	65.03	40.70	0.04	10.32	QP
5	0.18	37.54	-16.92	54.46	27.20	0.04	10.30	Average
6 *	0.18	57.54	-6.92	64.46	47.20	0.04	10.30	QP
7	0.19	28.73	-25.29	54.02	18.41	0.04	10.28	Average
8	0.19	39.92	-24.10	64.02	29.60	0.04	10.28	QP
9	0.21	29.40	-24.00	53.40	19.10	0.04	10.26	Average
10	0.21	42.70	-20.70	63.40	32.40	0.04	10.26	QP
11	0.22	24.69	-28.14	52.83	14.40	0.04	10.25	Average
12	0.22	39.89	-22.94	62.83	29.60	0.04	10.25	QP
13	0.26	23.06	-28.36	51.42	12.80	0.04	10.22	Average
14	0.26	36.06	-25.36	61.42	25.80	0.04	10.22	QP

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 28, 2013	Aug. 24, 2013~ Aug. 28, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	N/A	Mar. 28, 2013	Aug. 24, 2013~ Aug. 28, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	N/A	Mar. 28, 2013	Aug. 24, 2013~ Aug. 28, 2013	Mar. 27, 2014	Conducted (TH01-SZ)
AC LISN	ETS-LINDGREN	3816/2SH	00103912	0.1MHz~108MHz	Feb. 28, 2013	Aug. 29, 2013	Feb. 27, 2014	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	ETS-LINDGREN	3816/2SH	00103892	0.1MHz~108MHz	Feb. 28, 2013	Aug. 29, 2013	Feb. 27, 2014	Conduction (CO01-SZ)
ESCIO TEST Receiver	R&S	1142.8007.03	100724	9kHz-3GHz	Mar. 08, 2013	Aug. 29, 2013	Mar. 07, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891N/A	N/A	Oct. 12, 2012	Aug. 29, 2013	Oct. 11, 2013	Conduction (CO01-SZ)
Spectrum Analyzer	Agilent Technologies	N9038A	MY522601 85	20Hz~26.5GHz	Apr. 04, 2013	Aug. 24, 2013	Apr. 03, 2014	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 12, 2012	Aug. 24, 2013	Oct. 11, 2013	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30MHz~2GHz	Nov. 03, 2012	Aug. 24, 2013	Nov. 02, 2013	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz-3000MHz GAIN 30db	Mar. 28, 2013	Aug. 24, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 28, 2013	Aug. 24, 2013	Mar. 27, 2014	Radiation (03CH01-SZ)
SHF-EHF-Horn	Schwarzbeck	BBHA9170	BBHA9170 249	14GHz~40GHz	Nov. 23, 2012	Aug. 24, 2013	Nov. 22, 2013	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz-30MHz	Oct. 22, 2012	Aug. 24, 2013	Oct. 21, 2013	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0 ~ 360 degree	N/A	Aug. 24, 2013	N/A	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m - 4 m	N/A	Aug. 24, 2013	N/A	Radiation (03CH01-SZ)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26
--	------

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54
--	------

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72
--	------