

Product Specifications sheet



Specification No.	20260303001
Effective date	2026/3/30

Customer Name:	鑫东声
Product Model	Transparent - Type Coil
DZ Part No.	TX-DZ43.505.3006-K6.5-L60 (double-slotting)
Frequency Bands	110.5-205KHz

【 ☒ New issue, ☐ version revision 】

【 This specification includes contents and 4 pages in total 】 【 RoHS Compliant Parts 】

organize	Check	Approval
Li ping hui	/	Ma xiangping

Guang Dong Top Wiser Electronic Technology Co., Ltd

Factory address:Address; 1F, 1231 Yingbin Avenue, Longmen County
, Huizhou City, Guangdong Province

Tel: 13147097490

【Within 30 days after the customer receives this acknowledgement, please return it with your signature and seal. If it is overdue, it will be deemed that the production will be carried out according to the standards of this acknowledgement】.

【customer approval】

Date:

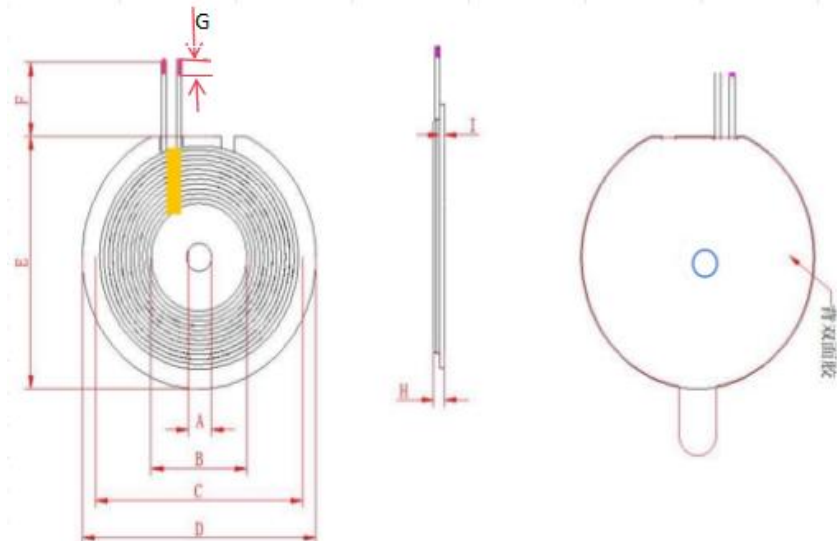
Recognition status: ☐ full recognition ☐ conditional recognition ☐ refusal

Approval	Review	Recheck	Check

remark:

Customer Name:		Xindongsheng		item			
DZ Part No.		TX-DZ43.505.3006-K6.5-L60		Specification No.		20250905001	
Issue/Revision History							
Version	Effective date	Change content / reason				Approval	
01	2026/3/30	New specification release				Ma XiangPing	
organize		check			approval		
Li ping hui		/			Ma XiangPing		

Product Specifications sheet

Customer Name:		Xindongsheng		Customer item No																																																				
DZ Part No		TX-DZ43.505.3008-K6.5-L35		Specification No		20250905001	Version	01																																																
◆、Overall dimensions  (unit: mm) <table><tr><td>A</td><td>5.3 ±1.5</td></tr><tr><td>B</td><td>20.5 ±1.5</td></tr><tr><td>C</td><td>39.0 ±1.5</td></tr><tr><td>D</td><td>43.5 ±1.0</td></tr><tr><td>E</td><td>43.5 ±1.0</td></tr><tr><td>F</td><td>60.0 ±3.0</td></tr><tr><td>G</td><td>3.0 ±2.0</td></tr><tr><td>H</td><td>1.6 ±0.3</td></tr><tr><td>I</td><td>0.60 ±0.2(Magnetic sheet thickness)</td></tr></table> (1)Wire diameter: 0.08 * 24P*2P enameled wire (2)Number of windings: 10TS (3)Whether the starting and ending lines cross: Yes (4) Not packaged with high - temperature adhesive (5) Apply a white adhesive with a 40- round large hole on the coil surface. (6) ove the lead to the left								A	5.3 ±1.5	B	20.5 ±1.5	C	39.0 ±1.5	D	43.5 ±1.0	E	43.5 ±1.0	F	60.0 ±3.0	G	3.0 ±2.0	H	1.6 ±0.3	I	0.60 ±0.2(Magnetic sheet thickness)																															
A	5.3 ±1.5																																																							
B	20.5 ±1.5																																																							
C	39.0 ±1.5																																																							
D	43.5 ±1.0																																																							
E	43.5 ±1.0																																																							
F	60.0 ±3.0																																																							
G	3.0 ±2.0																																																							
H	1.6 ±0.3																																																							
I	0.60 ±0.2(Magnetic sheet thickness)																																																							
◆、Electrical characteristics:: <table><tr><td>parameter</td><td colspan="2">specification</td><td>Test conditions</td><td colspan="4">Test instrument</td></tr><tr><td>L0</td><td>6.5 ±10%</td><td>μH</td><td>100KHz/1V</td><td colspan="4">■TH1816B</td></tr><tr><td>Q</td><td>>30</td><td>min</td><td>100KHz/1V</td><td colspan="4">■TH1816B</td></tr><tr><td>DCR</td><td><90</td><td>mΩ</td><td>@ 25℃</td><td colspan="4">■CH-502BC</td></tr></table>								parameter	specification		Test conditions	Test instrument				L0	6.5 ±10%	μH	100KHz/1V	■TH1816B				Q	>30	min	100KHz/1V	■TH1816B				DCR	<90	mΩ	@ 25℃	■CH-502BC																				
parameter	specification		Test conditions	Test instrument																																																				
L0	6.5 ±10%	μH	100KHz/1V	■TH1816B																																																				
Q	>30	min	100KHz/1V	■TH1816B																																																				
DCR	<90	mΩ	@ 25℃	■CH-502BC																																																				
◆、Temperature class: <table><tr><td>operating temperatur</td><td colspan="7">-40℃~ 125℃</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>								operating temperatur	-40℃~ 125℃																																															
operating temperatur	-40℃~ 125℃																																																							
◆、list of materials: <table><tr><td>Item</td><td>Product Name</td><td>Material specification</td><td>Supplier</td><td>Remark</td><td></td><td></td></tr><tr><td>1</td><td>Magnetic sheet</td><td>43.5*5.3*0.6T开双槽 (double-slotting)</td><td></td><td>PC40</td><td></td><td></td></tr><tr><td>2</td><td>Copper wire</td><td>0.08*24*2P</td><td></td><td>enameled wire</td><td></td><td></td></tr><tr><td>3</td><td>tin</td><td>107H</td><td></td><td>ROHS</td><td></td><td></td></tr><tr><td>4</td><td>Double-sided tape</td><td>40White adhesive with a large round hole</td><td></td><td>ROHS</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>								Item	Product Name	Material specification	Supplier	Remark			1	Magnetic sheet	43.5*5.3*0.6T开双槽 (double-slotting)		PC40			2	Copper wire	0.08*24*2P		enameled wire			3	tin	107H		ROHS			4	Double-sided tape	40White adhesive with a large round hole		ROHS																
Item	Product Name	Material specification	Supplier	Remark																																																				
1	Magnetic sheet	43.5*5.3*0.6T开双槽 (double-slotting)		PC40																																																				
2	Copper wire	0.08*24*2P		enameled wire																																																				
3	tin	107H		ROHS																																																				
4	Double-sided tape	40White adhesive with a large round hole		ROHS																																																				
organize			check			approval																																																		
Lipinghui			/			Ma Xiangping																																																		