



Radio Test Report

Report No.: STS2603238W02

Issued for

LIFEWORKS TECHNOLOGY GROUP LLC.

530 7th Ave. 21st Fl. New York, NY 10018, USA

Product Name: LUX WIRELESS CHARGING SPEAKER
WITH WHITE NOISE & LED LIGHT

Brand Name: iHome

Model Name: 2IHSK1015

Series Model(s): 2IHSK1015-BLK-R2

FCC ID: WWE-2IHSK1015

Test Standards: FCC Part 15 Subpart C

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: LIFEWORKS TECHNOLOGY GROUP LLC.
Address: 530 7th Ave. 21st Fl. New York, NY 10018, USA
Manufacturer's Name: LIFEWORKS TECHNOLOGY GROUP LLC.
Address: 530 7th Ave. 21st Fl. New York, NY 10018, USA

Product Description

Product Name: LUX WIRELESS CHARGING SPEAKER WITH WHITE NOISE & LED LIGHT
Brand.....: iHome
Model Number.....: 2IHSK1015
Series Model(s): 2IHSK1015-BLK-R2

Test Standards.....: FCC Part 15 Subpart C

Test Procedure: ANSI C63.10-2020+Cor 1-2023

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test.....:

Date of receipt of test item.....: 30 Mar. 2026
Date (s) of performance of tests.: 30 Mar. 2026~23 Apr. 2026
Date of Issue: 23 Apr. 2026
Test Result: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF THE EUT	6
2.2 DESCRIPTION OF THE TEST MODES	7
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3. CONDUCTED EMISSION TEST RESULT (SECTION 15.207)	11
3.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	12
3.4 EUT OPERATING CONDITIONS	12
3.5 TEST RESULTS	13
4. RADIATED& FIELD EMISSION TEST RESULT (SECTION 15.209)	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	15
4.3 TEST SETUP	16
4.4 TEST RESULTS	17
5. 20 DB BANDWIDTH TEST	23
5.1 LIMIT	23
5.2 TEST SETUP	23
5.3 TEST RESULTS	23
APPENDIX-PHOTOS OF TEST SETUP	24



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	23 Apr. 2026	STS2603238W02	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.209(a)	Radiated emission, Spurious Emission	PASS	
2.1049	20 dB Bandwidth	PASS	

1.1 TEST FACTORY

Shenzhen CTA Testing Technology Co., Ltd.
Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
FCC test Firm Registration Number: 517856
IC test Firm Registration Number: 27890
A2LA Certificate No.: 6534.01
IC CAB ID: CN0127

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	LUX WIRELESS CHARGING SPEAKER WITH WHITE NOISE & LED LIGHT
Brand	iHome
Model Number	2IHSK1015
Series Model(s)	2IHSK1015-BLK-R2
Model Difference	The colors are different, but everything else is the same
Channel List	Please refer to the Note 2.
Antenna Type	Please refer to the Note 3.
Equipemnt Category	Non-ISM frequency
Operating frequency	110.5-205KHz
Modulation Type	FSK
Rating:	Input: DC5V/3A, DC9V/3A Output: Wireless Charger Output: 5W, 7.5W, 15W Max.
Adapter	N/A
Battery	Rated Voltage: 3.7V Charge Limit Voltage: 4.2V
Hardware version number	S219-V4.1
Software version number	5.4
Connecting I/O Port(s)	Please refer to the Note 1.
Sample number	260327007-1

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	NOTE
1	iHome	2IHSK1015	Coil	N/A	Antenna



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Type-c input+Wireless charging

For Conducted Emission	
Final Test Mode	Description
Mode 1	Type-c input+ Wireless charging


For Radiated Emission	
Final Test Mode	Description
Mode 1	Type-c input+ Wireless charging




2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Radiated Emission Test

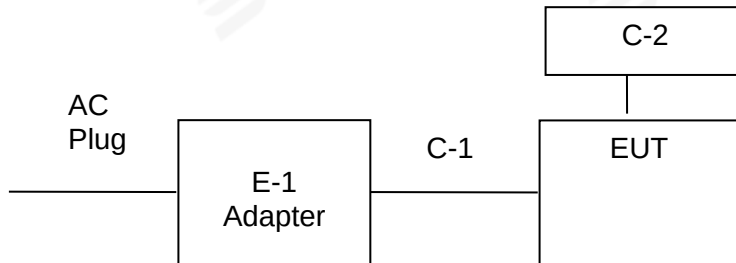

Conducted Emission Test

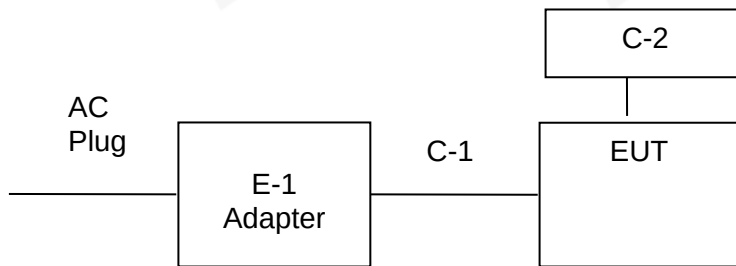



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Adapter	ZTC	NB-A515A	E-1
C-1	USB Cable	ZTC	NB-A515A	C-1
C-2	Wireless Charging test module	YBZ	N/A	C-2

Item	Shielded Type	Ferrite Core	Length	Note
C-1	Shielded	NO	100cm	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2026.02.04	2027.02.03
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2026.02.04	2027.02.03
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2026.03.04	2027.03.03
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Band 2.4G-2.5G Filter	HX MICROWAVE	HXLBQ-DZA61	N/A	2025.09.23	2026.09.22
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFE NG	DPS-305AF	17064939	2025.09.22	2026.09.21
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	2025.09.26	2026.09.25
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	2025.09.26	2026.09.25
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	2025.09.26	2026.09.25
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	2025.09.26	2026.09.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.26	2026.09.25
Limiter	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2026.02.04	2027.02.03
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			



3. CONDUCTED EMISSION TEST RESULT (SECTION 15.207)

3.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of "*" marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

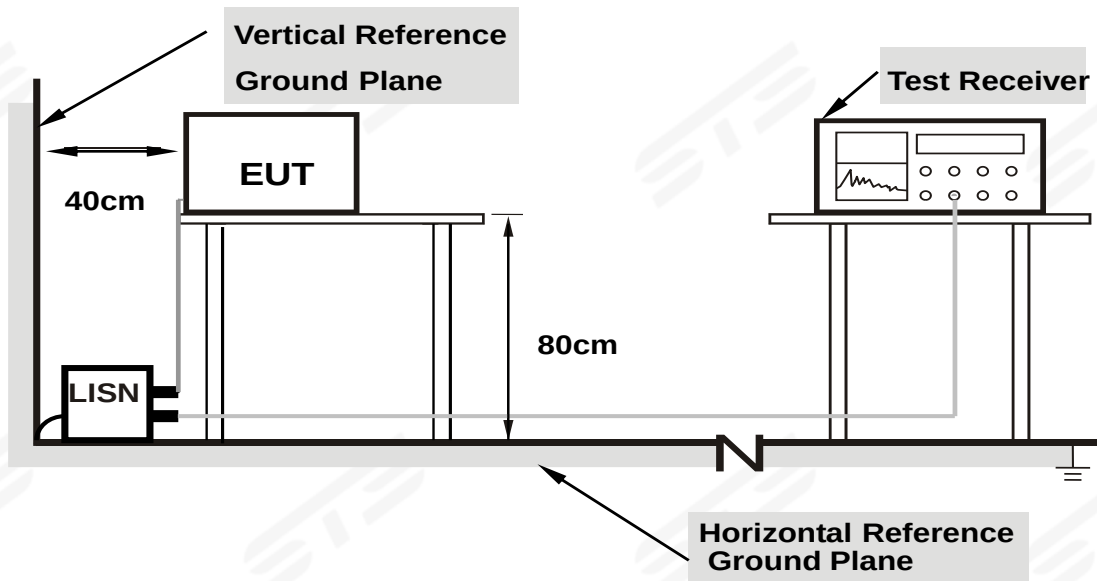

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.5 TEST RESULTS


Temperature:	24.9°C	Relative Humidity:	57.3%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.7060	28.87	19.41	48.28	56.00	-7.72	QP
2	0.7060	23.10	19.41	42.51	46.00	-3.49	AVG
3	2.1140	28.91	19.39	48.30	56.00	-7.70	QP
4	2.1140	23.43	19.39	42.82	46.00	-3.18	AVG
5	3.0500	24.57	19.46	44.03	56.00	-11.97	QP
6	3.0500	20.31	19.46	39.77	46.00	-6.23	AVG
7	3.5260	28.41	19.46	47.87	56.00	-8.13	QP
8	3.5260	22.76	19.46	42.22	46.00	-3.78	AVG
9	9.1700	30.83	19.62	50.45	60.00	-9.55	QP
10	9.1700	22.74	19.62	42.36	50.00	-7.64	AVG
11	27.4860	31.73	19.66	51.39	60.00	-8.61	QP
12	27.4860	23.27	19.66	42.93	50.00	-7.07	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

100.0 dBuV

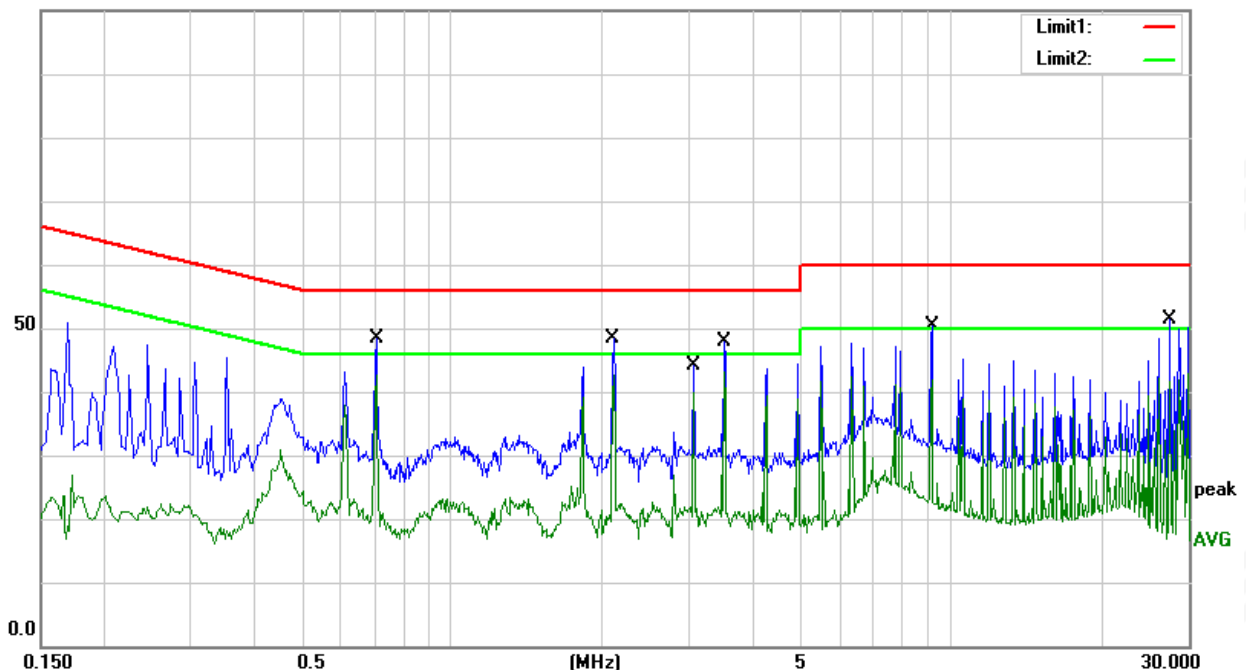




Temperature:	24.9°C	Relative Humidity:	57.3%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3500	28.32	19.36	47.68	58.96	-11.28	QP
2	0.3500	17.73	19.36	37.09	48.96	-11.87	AVG
3	0.7060	24.82	19.41	44.23	56.00	-11.77	QP
4	0.7060	17.09	19.41	36.50	46.00	-9.50	AVG
5	1.8380	24.94	19.38	44.32	56.00	-11.68	QP
6	1.8380	18.90	19.38	38.28	46.00	-7.72	AVG
7	3.0620	25.13	19.46	44.59	56.00	-11.41	QP
8	3.0620	19.30	19.46	38.76	46.00	-7.24	AVG
9	9.1820	25.98	19.62	45.60	60.00	-14.40	QP
10	9.1820	18.05	19.62	37.67	50.00	-12.33	AVG
11	28.8020	30.83	19.62	50.45	60.00	-9.55	QP
12	28.8020	21.38	19.62	41.00	50.00	-9.00	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor)–Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

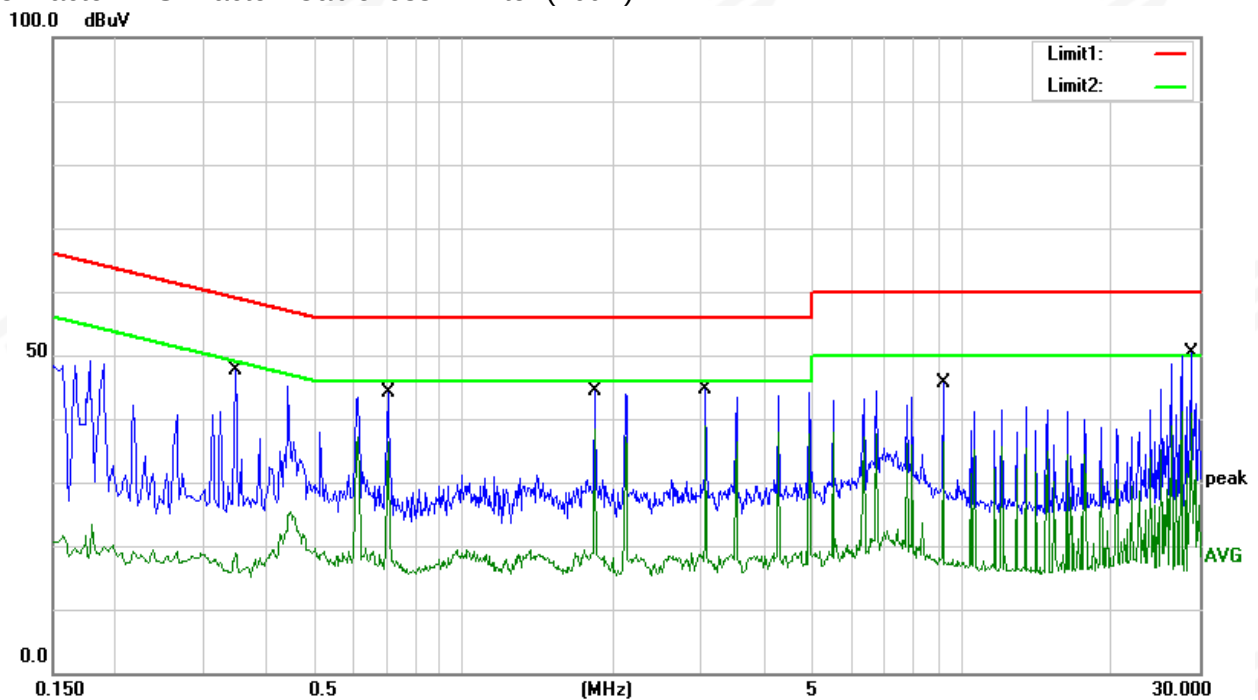



4. RADIATED& FIELD EMISSION TEST RESULT (SECTION 15.209)

4.1 LIMIT

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

§15.209(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

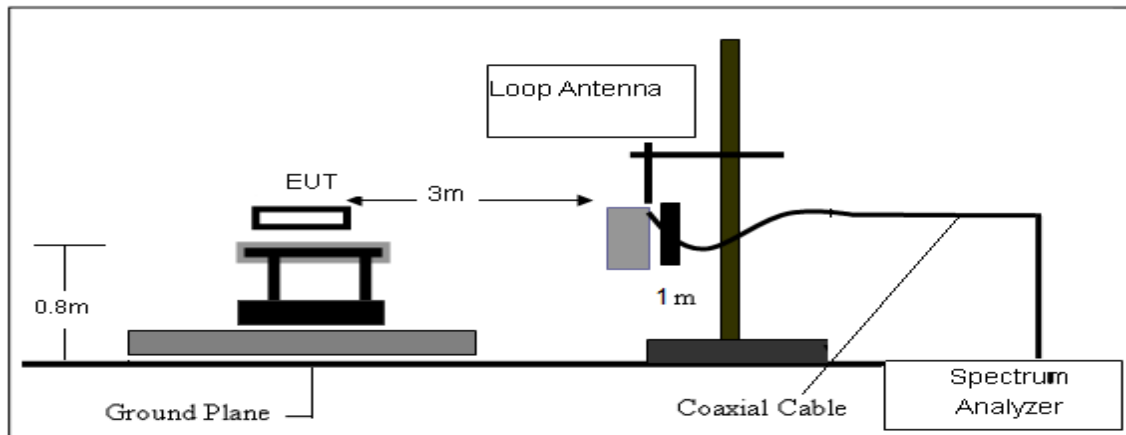

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

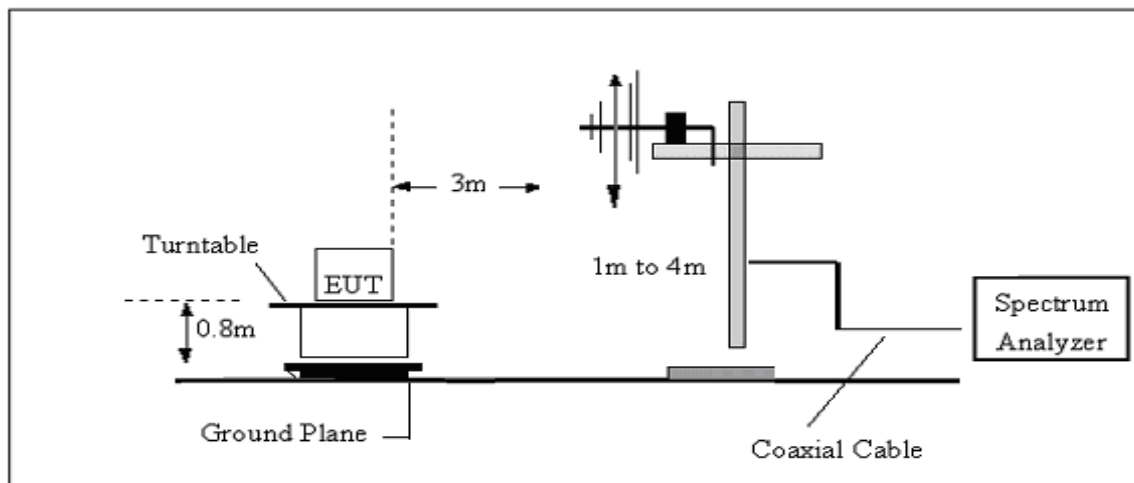




4.4 TEST RESULTS

Temperature :	23.4℃	Relative Humidity :	60%
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 1

4.4.1 Spurious Radiated Emission Below 30 MHz

Coxial


9KHz-150KHz

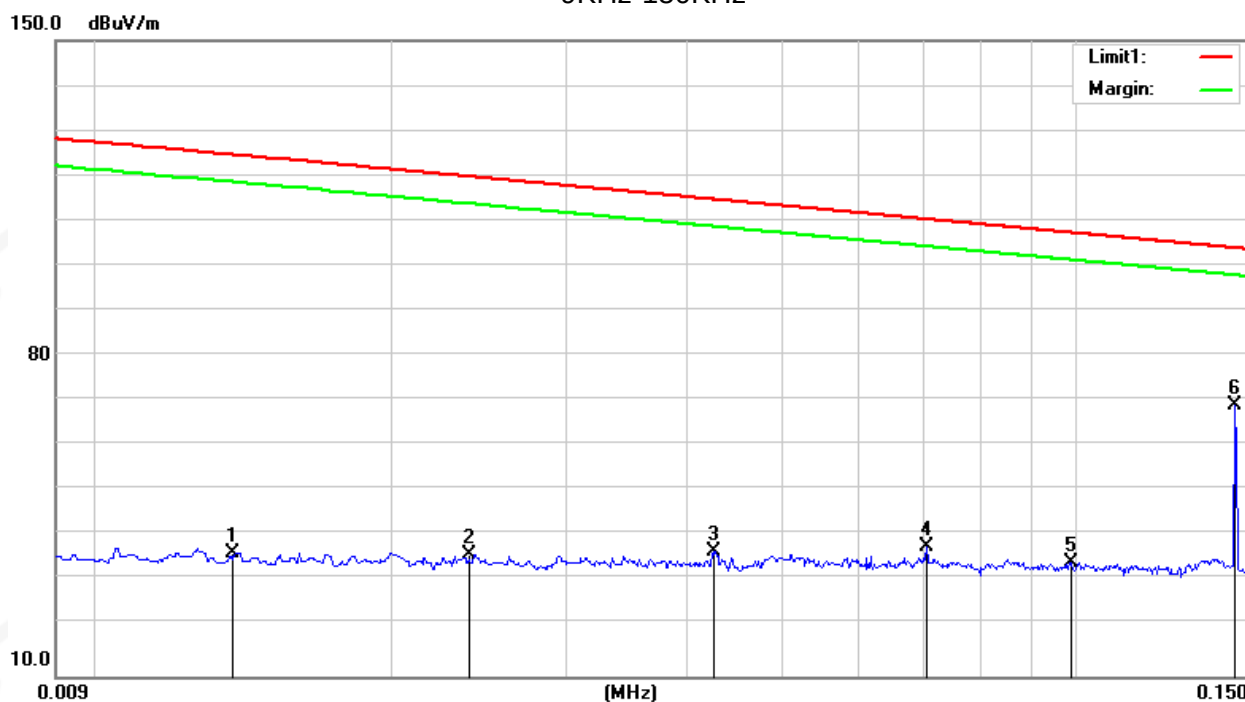


No.	Frequency (KHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0137	17.48	19.64	37.12	124.87	-87.75	AVG
2	0.0240	16.73	20.02	36.75	120.00	-83.25	AVG
3	0.0427	17.75	19.65	37.40	115.00	-77.60	AVG
4	0.0704	19.48	18.93	38.41	110.65	-72.24	AVG
5	0.0990	17.54	17.65	35.19	107.69	-72.50	QP
6	0.1461	52.27	17.51	69.78	104.31	-34.53	AVG



150KHz-30MHz

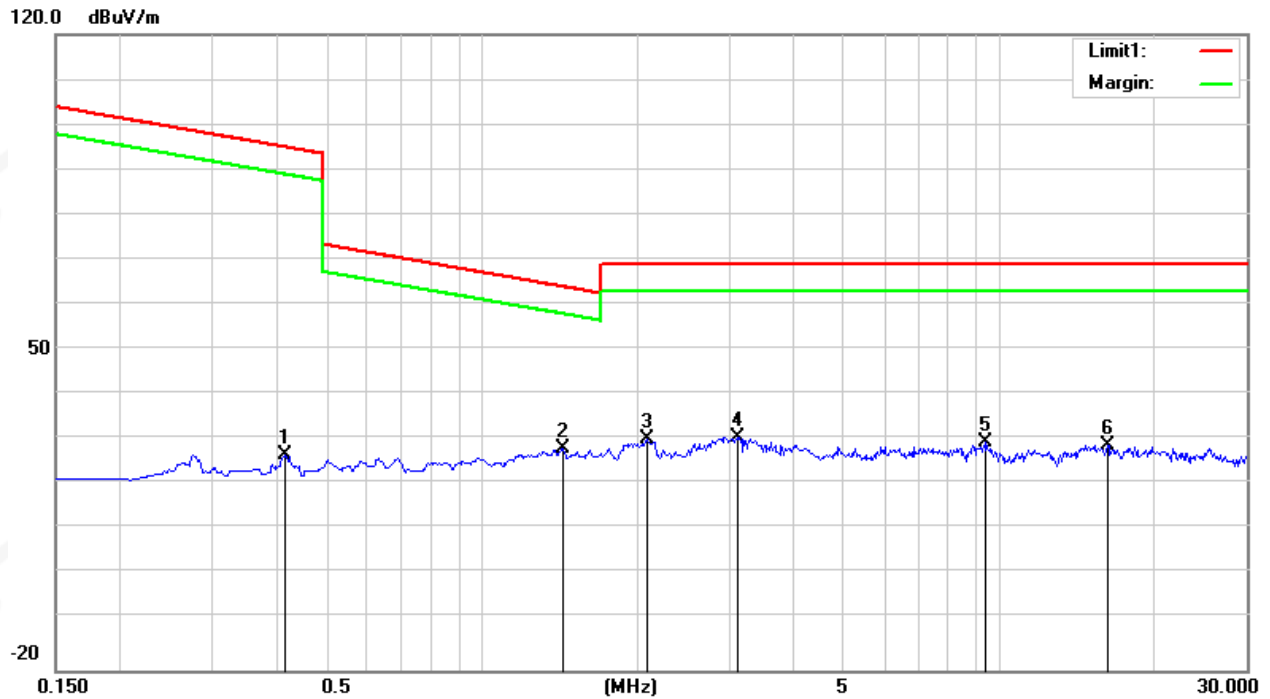


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.4148	7.27	20.17	27.44	95.25	-67.81	AVG
2	1.4334	8.71	20.29	29.00	64.48	-35.48	QP
3	2.0767	10.43	20.38	30.81	69.50	-38.69	QP
4	3.1350	11.11	20.14	31.25	69.50	-38.25	QP
5	9.4334	9.93	20.23	30.16	69.50	-39.34	QP
6	16.1794	8.04	21.58	29.62	69.50	-39.88	QP

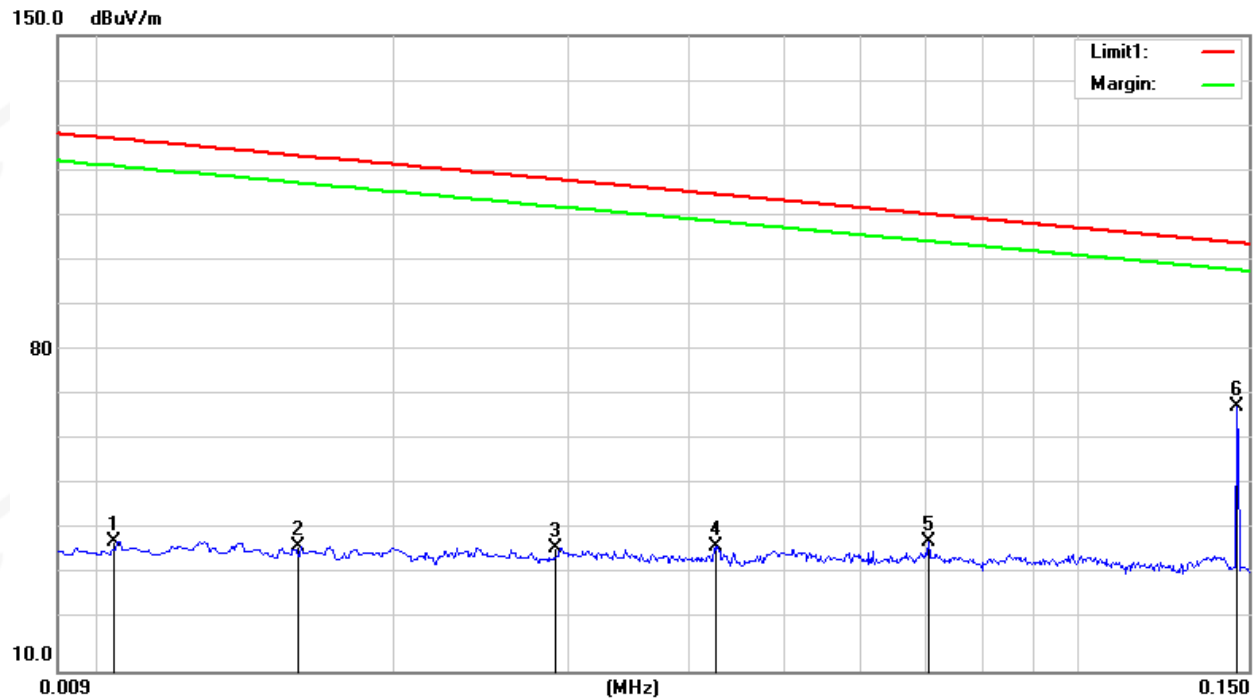Coplanar
9KHz-150KHz

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0103	19.22	19.39	38.61	127.35	-88.74	AVG
2	0.0160	17.68	19.81	37.49	123.52	-86.03	AVG
3	0.0292	17.06	19.92	36.98	118.30	-81.32	AVG
4	0.0427	17.75	19.65	37.40	115.00	-77.60	AVG
5	0.0704	19.48	18.93	38.41	110.65	-72.24	AVG
6	0.1461	50.77	17.51	68.28	104.31	-36.03	Peak



150KHz-30MHz

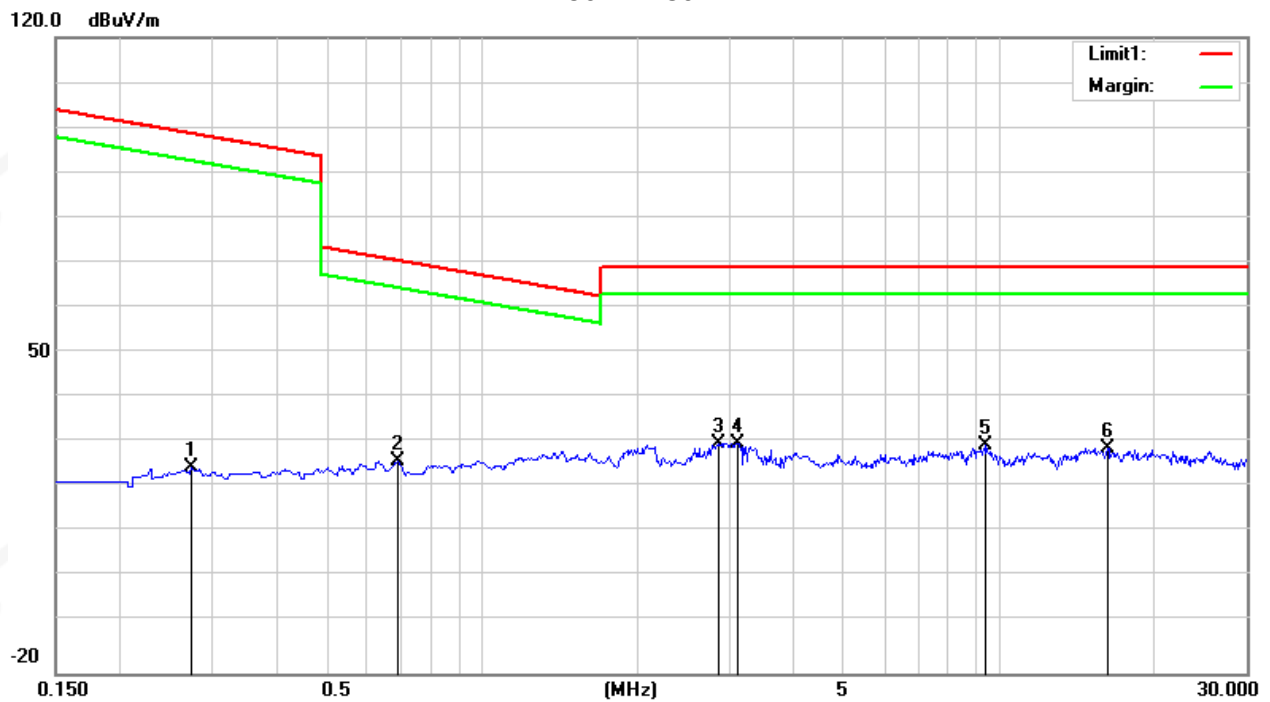


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.2741	5.33	20.11	25.44	98.85	-73.41	AVG
2	0.6873	6.45	20.27	26.72	70.86	-44.14	QP
3	2.8664	10.43	20.14	30.57	69.50	-38.93	QP
4	3.1350	10.61	20.14	30.75	69.50	-38.75	QP
5	9.4334	9.93	20.23	30.16	69.50	-39.34	QP
6	16.1794	8.04	21.58	29.62	69.50	-39.88	QP



4.4.2 Spurious Radiated Emission below 1 GHz

Temperature:	23.1℃	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	Mode 1		

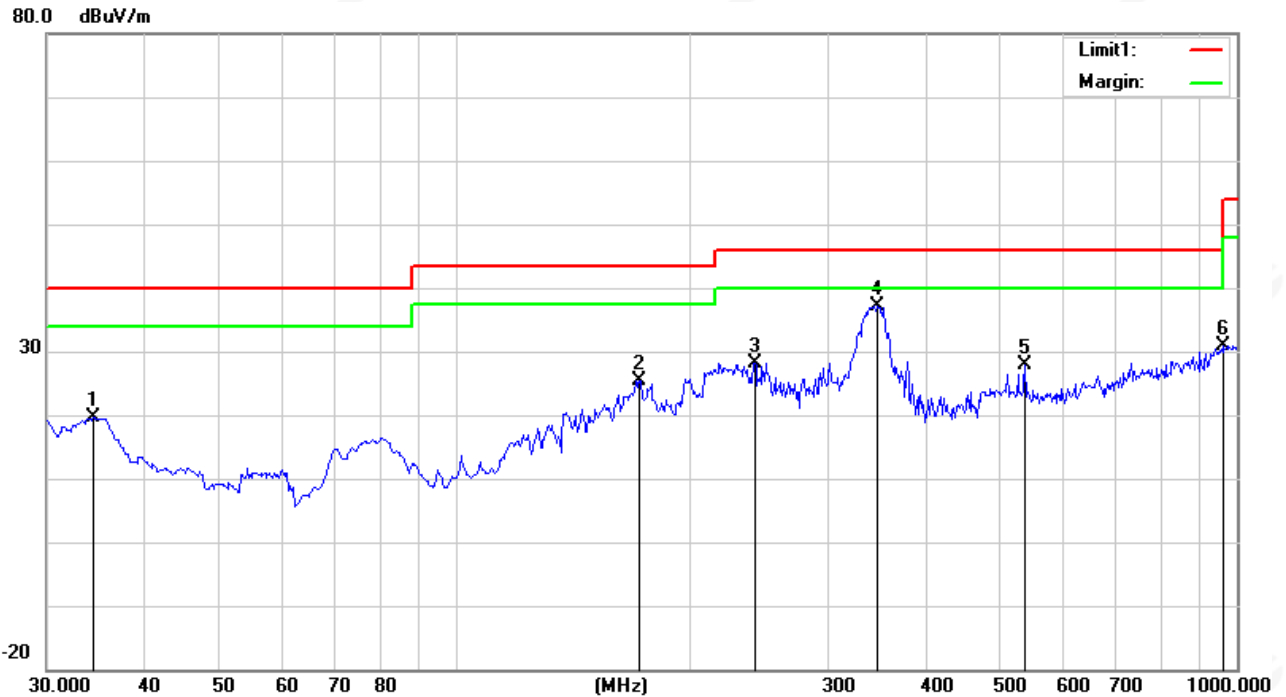

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.3962	34.73	-15.09	19.64	40.00	-20.36	QP
2	172.5900	45.38	-19.93	25.45	43.50	-18.05	QP
3	242.4300	45.73	-17.52	28.21	46.00	-17.79	QP
4	347.1900	50.35	-13.16	37.19	46.00	-8.81	QP
5	537.3100	34.81	-7.02	27.79	46.00	-18.21	QP
6	964.1100	29.09	1.86	30.95	54.00	-23.05	QP

Note:1).Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)


2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

4). All modes have been tested, only show the worst case.



Temperature:	23.1℃	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	Mode 1		

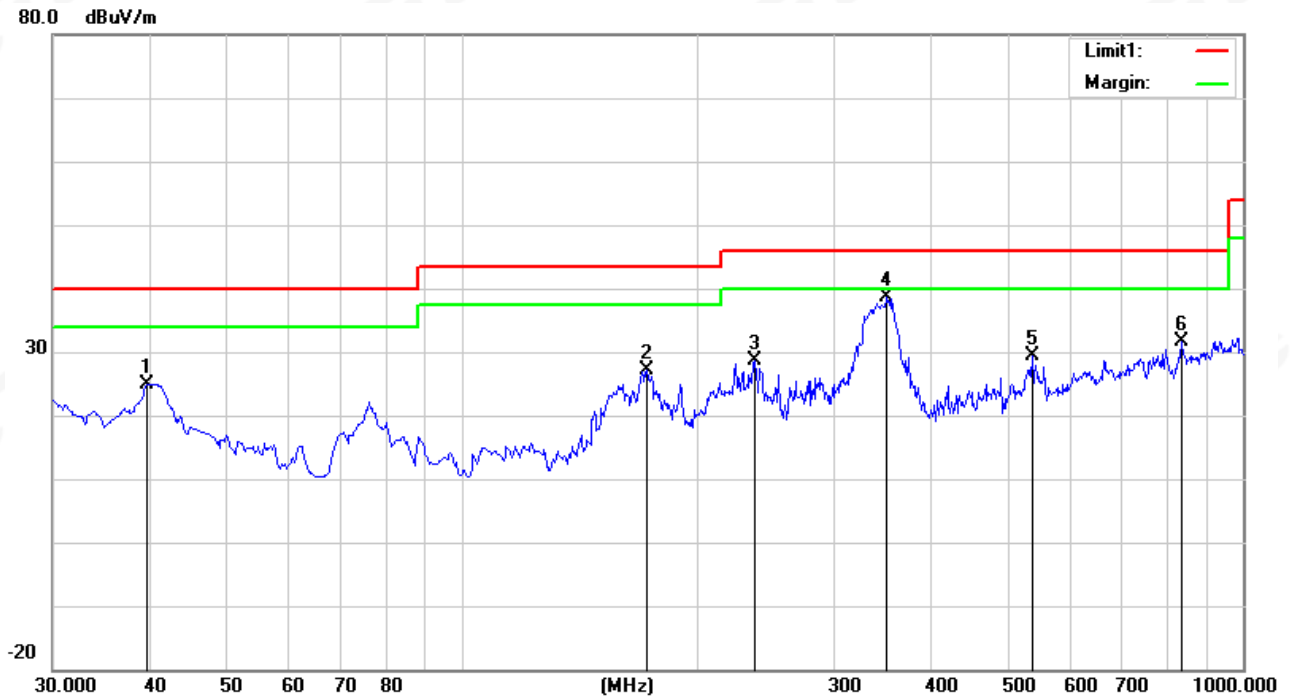

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	42.84	-17.88	24.96	40.00	-15.04	QP
2	172.5988	47.12	-19.93	27.19	43.50	-16.31	QP
3	237.5800	46.91	-18.35	28.56	46.00	-17.44	QP
4	351.0700	51.65	-13.04	38.61	46.00	-7.39	QP
5	538.2800	36.41	-6.96	29.45	46.00	-16.55	QP
6	836.0700	32.24	-0.50	31.74	46.00	-14.26	QP

Note:1).Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

4). All modes have been tested, only show the worst case.



5. 20 DB BANDWIDTH TEST

5.1 Limit

FCC Part 2.1049, Only applicable to report.


5.2 TEST SETUP

Spectrum Parameter	Setting
Span Frequency	approximately 2 to 3 times the 20 dB bandwidth
RB	greater than 1 % of the 20 dB bandwidth,
VB	equal to the RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

Note: The measured signal is Cw-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 100Hz and VBW is set to 300Hz to perform the occupied bandwidth test.

5.3 TEST RESULTS

OperatingFrequency (kHz)	20 dB Bandwidth (Kz)
146.1	0.259

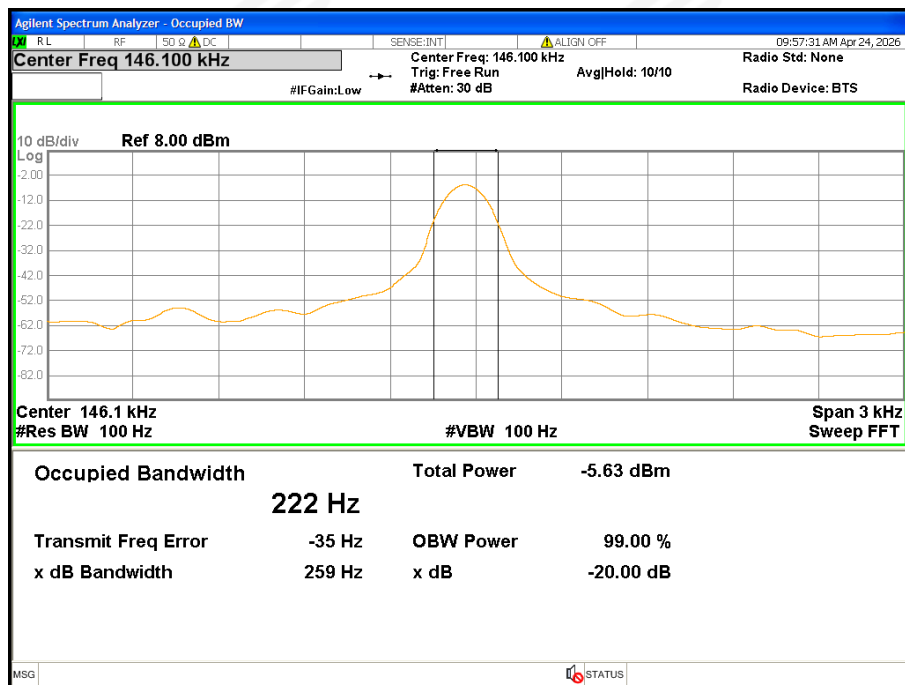



APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※