


SPECIFICATION



Shenzhen Daxian Technology Co., Ltd.

L70A LDS Antenna Assembly

Product Specification

connection		frequency range	GPS: L1/L5 WIFI:2.4G/5G
entry name	L70A	edition	V1.0
Material No	1L-70AXX-060	Color	Black
Antenna type	PIFA Antenna (8 antennas)	Test Engineer	
R F Design	YuanQing.Zhu	Structural Design	RuiBin.Zhou
Quality Manager	ZiYin.Hu	Technical Director	Lei.Zhang
Date	2025-04-25		

Customer confirmation:

Whether the assembly meets your company's requirements: ☐OK ☐NG

Shenzhen Topant Technology Co., Ltd.

Buji Town, Longgang District, Shenzhen, China Jihua Road 513, Shangshuijing Village (opposite the national defense training base) Dacheng Industrial Park, Building 7.

TEL:0755-28576002

FAX:0755-84276383

Room201,Building8,LongDongRoad3000#,Semiconductor Industry Park,ZhangJiang Hitech Zone,ShangHai

TEL:021-61630552

FAX:755-84276383

Revision history

[illegible]

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

Indexes

一、 Project Description.....	4
二、 LDS Antenna Assembly.....	4
1、 specifications.....	4
1.1 Electrical specifications and standards.....	4
1.1.1 Electrical performance index.....	5
1.2 Structural specifications and standards.....	5
1.2.1 Antenna composition.. ..	5
2、 Testing environment.....	6
3、 Test.	7
3.1 Test of standing wave (VSWR).....	7
3.1.1 Test connection.....	7
3.2 Testing of efficiency, power (TRP), sensitivity (TIS).....	7
3.2.1 Test site.....	7
3.2.2 Tested Instruments.....	7
3.2.3 Test data.....	7-10
4、 VSWR Parameter diagram.....	10-11
5、 2D&3DPassive field type diagram.....	12-14
6、 Conclusion.....	14
7、 Test instruments and their calibration dates.....	15
三、 Schedule drawing.....	16

— Project Description

Customer Name:	
Type of complete machine:	MIFI
Antenna band:	GPS: L1/L5 WIFI:2.4G/5G
Antenna form:	LDS
Feed form:	Springfoot
Number of feed legs:	Main: Three、DIV: Three、WiFi-1: Three、WiFi-2: Three、ANT2: Three、ANT3: Three、B14: Three、GPS: Three
Test Software Name:	Radstation v1.4.2

二 LDS Antenna Assembly

1 specifications

This report mainly provides the testing status of various electrical and structural performance parameters of the antenna for the L70A project. The following image shows an antenna with a large display design.

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

1.1 Electrical specifications and standards

1.1.1 Electrical performance index

The operating frequency band of the antenna is between 1150 ~1190MHz、1550 ~1600MHz、2400~2500 MHz、 5150~5850MHz. The following table shows the electrical performance indicators of large display design and mass production antennas.

Frequency Range	Frequency (MHz)	VSWR
WiFi	2400 ~ 2500, 5150~ 5850	≤ 2
GPS	1575MHz	≤ 2

2 Structural specifications and standards

1.2.1 Antenna composition

The antenna is mainly composed of LDS.

2、 The Equipment of Active Test

Satimo 3D Chamber $6 \times 4 \times 4$ (m)

Agilent 8960 E5515c

Network analyzer-R&S ZVL

[**www.Topant.com.cn**](http://www.Topant.com.cn)

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

3 test

3.1 Test of standing wave (VSWR)

3.1.1 Test connection: The VSWR test device is sequentially connected as follows: R&S ZVL network analyzer → test line → Test fixture

Actual measurement (attached drawing)

3.2 Gain and efficiency, power (TRP), sensitivity (TIS) testing

3.2.1 Test site:

Large display microwave anechoic chamber. The test frequency range is 400MHz - 6GHz, the static zone range is 50cm circumferential, and the reflectivity is less than - 50dB.

3.2.2 Tested Instruments:

R&S ZVL network analyzer, Agilent 8960 E5515C, standard horn antenna, French SATIMO-SG24SYSTEM system, printer, etc.

3.2.3 Test data: In a microwave anechoic chamber, the values related to the power and sensitivity tested are shown in the table below

Passive efficiency&gain-GPS Antenna:

L5:

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
1150	-2.3	-5.98	25.21
1160	-2.08	-5.67	27.1
1170	-2.39	-5.51	28.15
1180	-3.04	-5.84	26.04
1190	-4.02	-6.4	22.93

L1:

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
1550	-0.6	-5.66	27.15
1560	-0.57	-5.34	29.25
1570	-0.48	-4.41	36.2
1580	-0.37	-4.74	33.56
1590	-0.41	-5.73	26.71
1600	-1.4	-6.29	23.52

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

WIFI-1 Antenna:**2.4G:**

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	0.31	-3.95	40.31
2410	0.34	-3.84	41.32
2420	0.14	-4.08	39.05
2430	-0.12	-3.54	44.23
2440	-0.12	-4.11	38.81
2450	0.14	-3.8	41.65
2460	0.22	-3.88	40.94
2470	0.19	-3.85	41.24
2480	0.11	-3.83	41.41
2490	-0.11	-3.67	42.98
2500	-0.03	-3.91	40.66

5G:

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
5100	2.72	-3.53	44.36	5480	3.42	-4.39	36.37
5110	2.9	-3.59	43.75	5490	3.41	-4.5	35.5
5120	3.08	-3.45	45.17	5500	3.42	-4.39	36.37
5130	2.69	-3.64	43.22	5510	3.40	-4.33	36.94
5140	2.83	-3.73	42.38	5520	3.41	-4.36	36.68
5150	2.7	-3.79	41.76	5530	3.42	-4.13	38.67
5160	2.77	-3.82	41.45	5540	3.42	-4.21	37.97
5170	2.66	-3.96	40.18	5550	3.41	-3.96	40.14
5180	2.52	-3.99	39.88	5560	3.83	-3.86	41.09
5190	2.96	-3.87	41	5570	3.73	-3.79	41.82
5200	2.34	-4.15	38.42	5580	3.55	-3.81	41.6
5210	3.14	-3.85	41.26	5590	3.68	-3.71	42.58
5220	2.4	-4.12	38.7	5600	3.39	-3.85	41.22
5230	3.35	-3.87	41.02	5610	3.42	-3.58	43.84
5240	2.5	-4.25	37.61	5620	3.40	-3.74	42.29
5250	3.31	-3.94	40.34	5630	3.40	-3.57	44
5260	2.57	-4.35	36.73	5640	3.42	-3.58	43.87
5270	3.33	-4.04	39.42	5650	3.42	-3.51	44.59
5280	2.82	-4.31	37.08	5660	3.40	-3.53	44.34
5290	3.66	-4	39.84	5670	3.42	-3.46	45.11

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

Confidential Information

5300	3.04	-4.32	37.02	5680	3.40	-3.47	45.01
5310	3.83	-4.03	39.55	5690	3.41	-3.43	45.44
5320	3.32	-4.18	38.21	5700	3.40	-3.48	44.89
5330	3.65	-4.08	39.05	5710	3.42	-3.53	44.34
5340	3.48	-4.14	38.53	5720	3.42	-3.53	44.41
5350	3.66	-4.12	38.71	5730	3.14	-3.42	45.5
5360	3.45	-4.25	37.56	5740	3.12	-3.37	46.05
5370	3.68	-4.19	38.1	5750	3.14	-3.39	45.79
5380	3.58	-4.28	37.35	5760	3.12	-3.37	46.03
5390	3.42	-4.31	37.1	5770	3.14	-3.37	46.01
5400	3.56	-4.09	38.99	5780	3.14	-3.4	45.7
5410	3.36	-4.19	38.09	5790	3.13	-3.31	46.63
5420	3.3	-4.29	37.2	5800	3.11	-3.32	46.52
5430	3.03	-4.46	35.77	5810	3.12	-3.16	48.33
5440	2.83	-4.5	35.45	5820	3.14	-3.08	49.23
5450	3.1	-4.45	35.93	5830	3.14	-3	50.15
5460	2.83	-4.52	35.35	5840	3.11	-2.98	50.38
5470	3.42	-4.43	36.04	5850	3.14	-2.92	51.06

WIFI-2 Antenna:

2.4G:

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	0.1	-3.74	42.27
2410	-0.1	-3.79	41.75
2420	-0.28	-3.89	40.82
2430	-0.32	-3.94	40.39
2440	-0.14	-3.84	41.34
2450	0.02	-3.65	43.15
2460	-0.01	-3.94	40.37
2470	0	-3.96	40.17
2480	-0.18	-3.79	41.83
2490	-0.3	-3.69	42.77
2500	-0.25	-4.04	39.44

5G:

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
5100	2.09	-4.33	36.93	5500	4.05	-5.1	30.91

www.Topant.com.cn

Confidentiality requirements


Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

Confidential Information

5120	2.18	-4.27	37.45	5520	4.04	-5.18	30.34
5140	1.67	-4.54	35.16	5540	4.01	-5.08	31.03
5160	1.49	-4.63	34.42	5560	4.06	-4.86	32.63
5180	1.23	-4.79	33.15	5580	4.01	-4.83	32.86
5200	1.12	-4.92	32.22	5600	4.02	-4.82	32.96
5220	1.12	-4.81	33.01	5620	4.10	-4.62	34.53
5240	1.12	-4.85	32.7	5640	4.02	-4.4	36.3
5260	0.95	-4.88	32.54	5660	4.02	-4.3	37.17
5280	0.89	-4.75	33.51	5680	4.01	-4.21	37.97
5300	0.98	-4.69	33.99	5700	4.04	-4.16	38.36
5320	1.24	-4.49	35.55	5720	4.06	-4.17	38.25
5340	1.38	-4.44	35.99	5740	2.79	-4.03	39.57
5360	1.42	-4.51	35.4	5760	2.75	-4.05	39.31
5380	1.68	-4.5	35.45	5780	2.76	-4.08	39.06
5400	1.95	-4.29	37.27	5800	2.75	-4.01	39.71
5420	1.82	-4.52	35.3	5820	2.79	-3.75	42.16
5440	1.61	-4.77	33.36	5840	2.76	-3.66	43.02
5460	4.06	-4.89	32.4	5860	2.79	-3.3	46.78
5480	4.04	-4.93	32.16				

4、VSWR 参数图 VSWR parameter diagram


WIFI-1 Antenna:

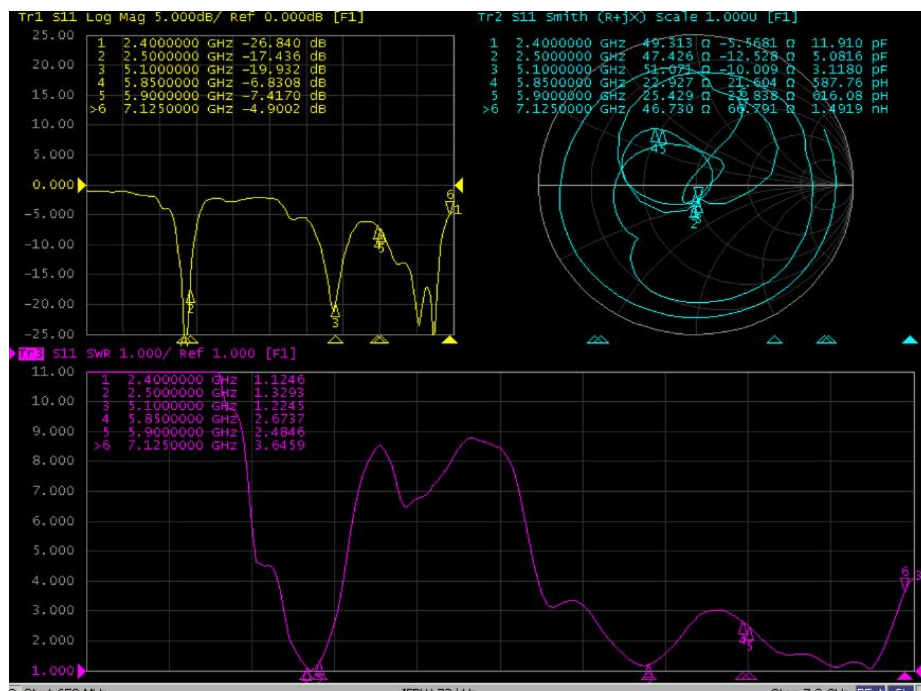


www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

WiFi-2 Antenna:

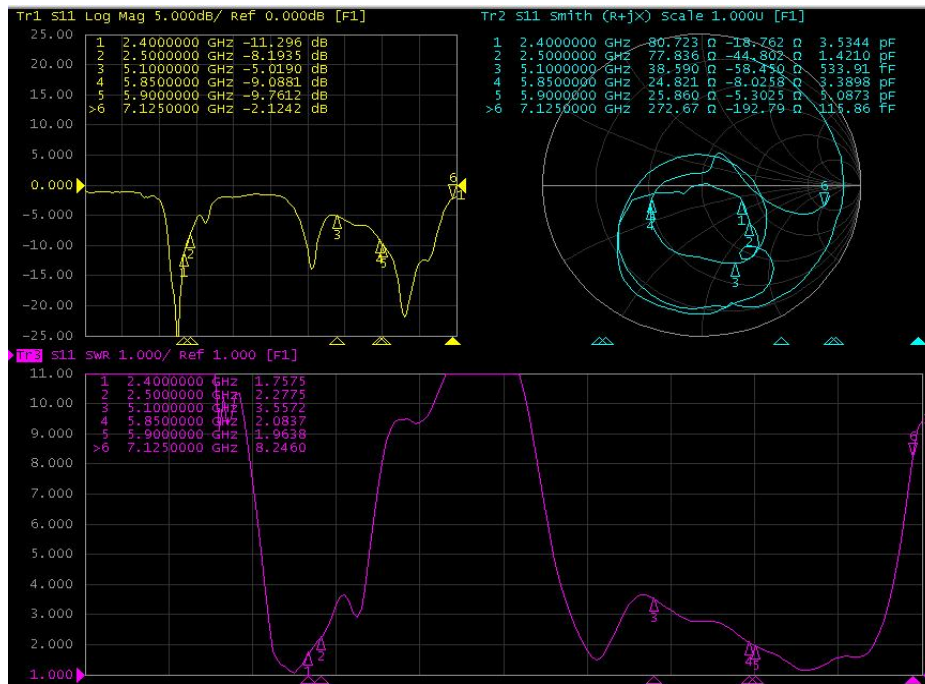

GPS Antenna:

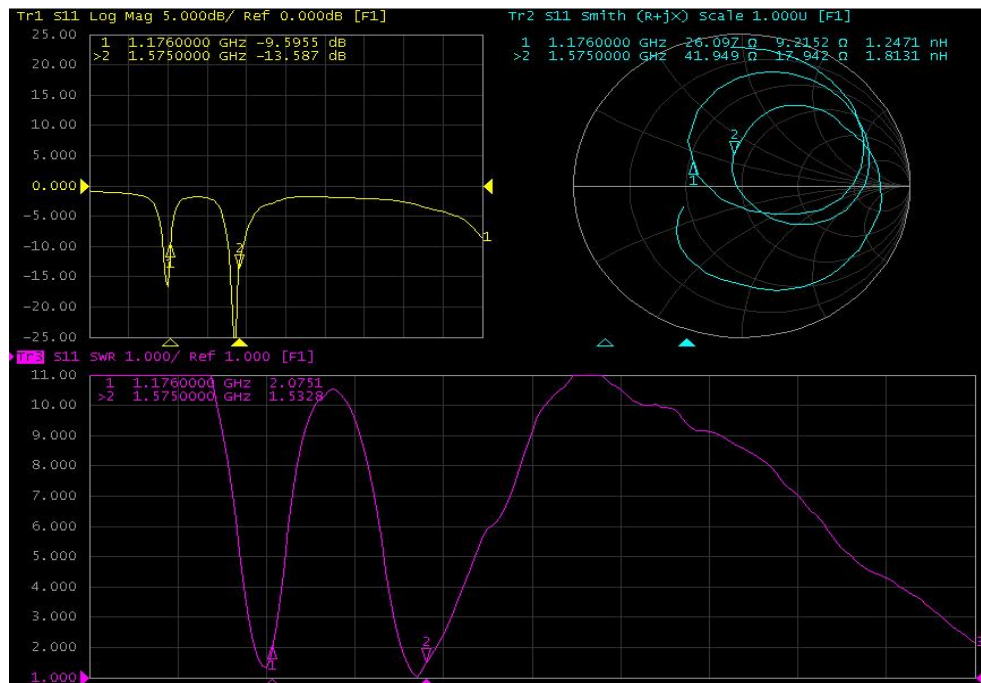


www.Topant.com.cn
Confidentiality requirements


Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

5、2D&3DPassive field type diagram

WIFI-1 Antenna-2.4G

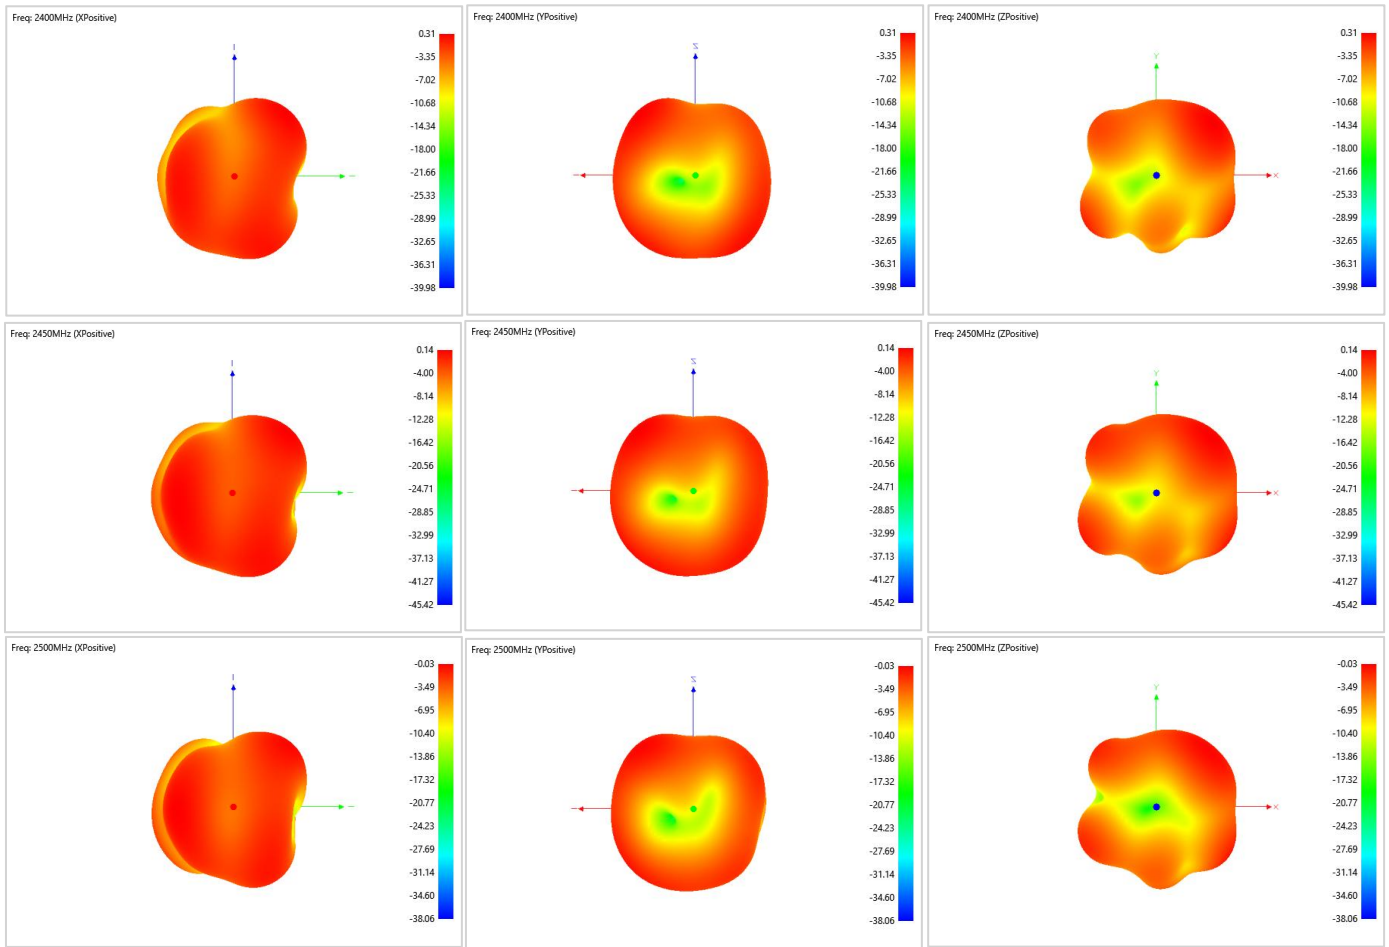


WIFI-1 Antenna-5G

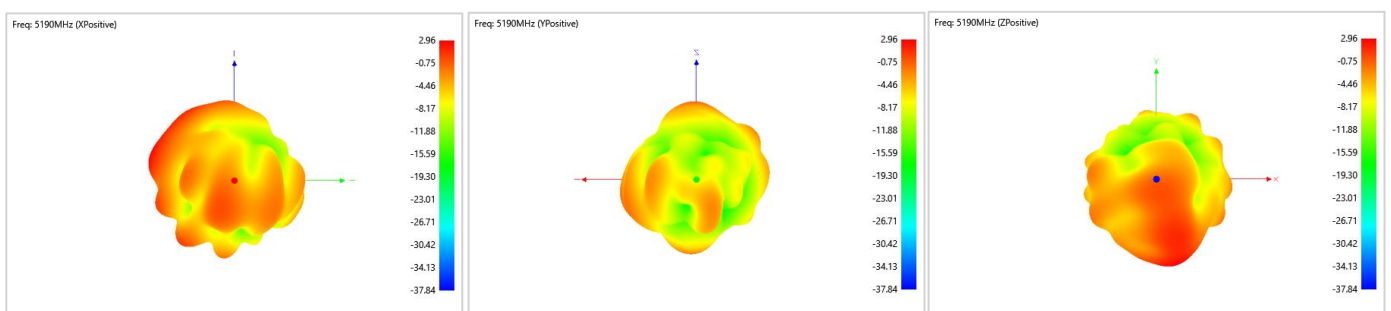


www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

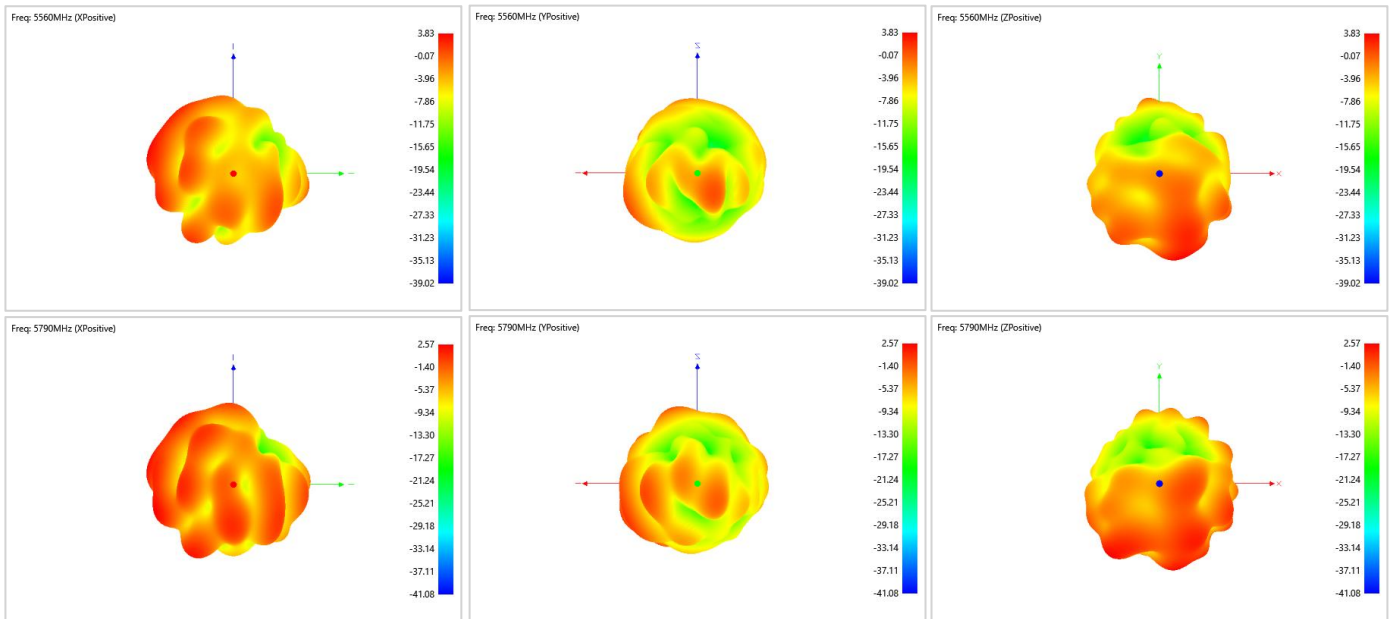


WIFI-2 Antenna-2.4G

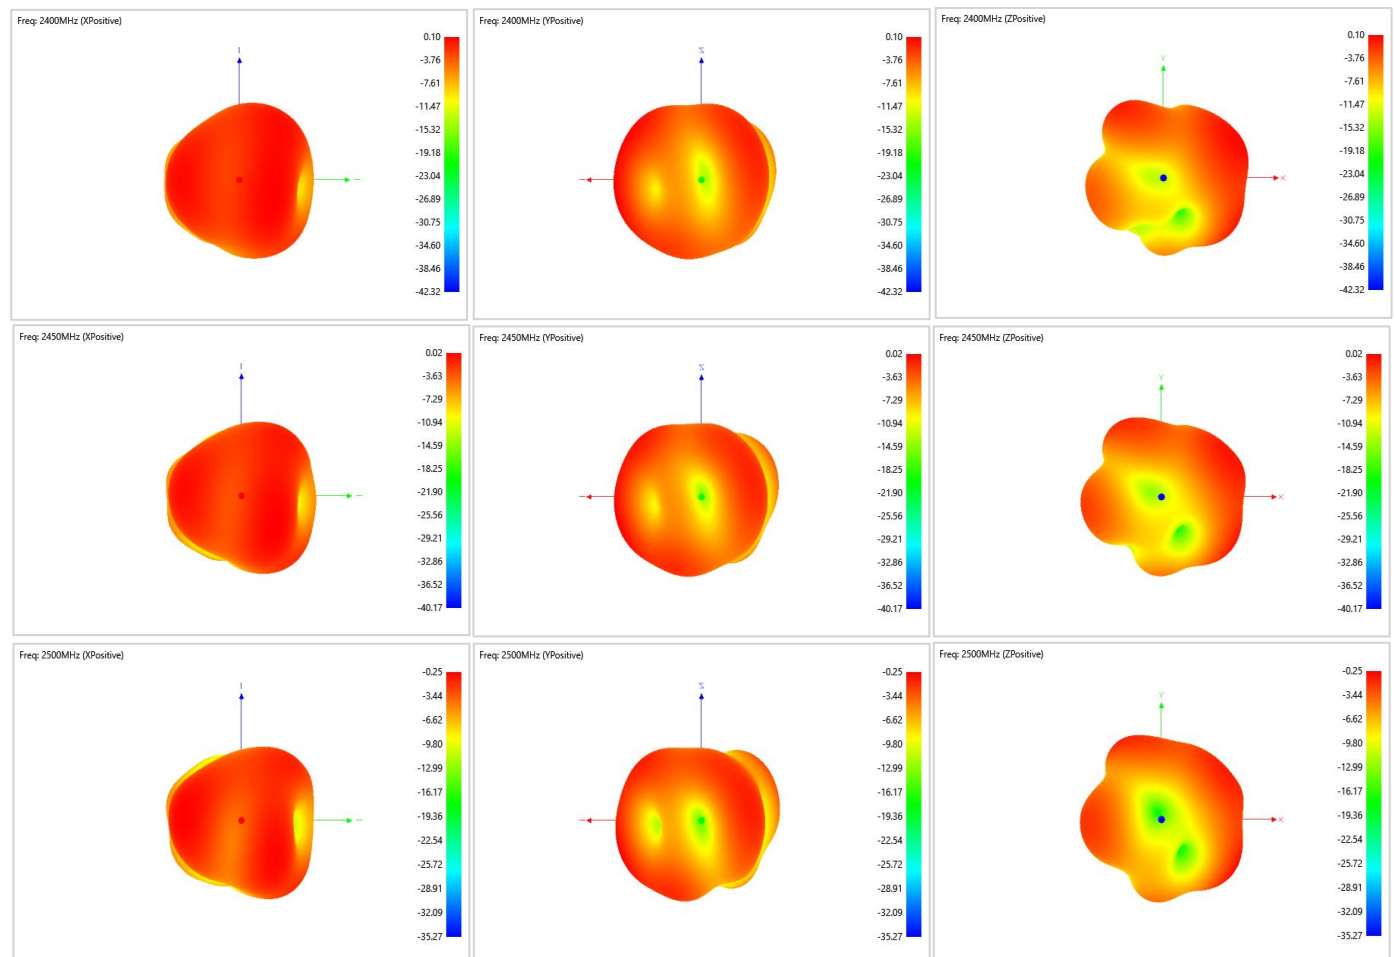


www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

WIFI-2 Antenna-5G

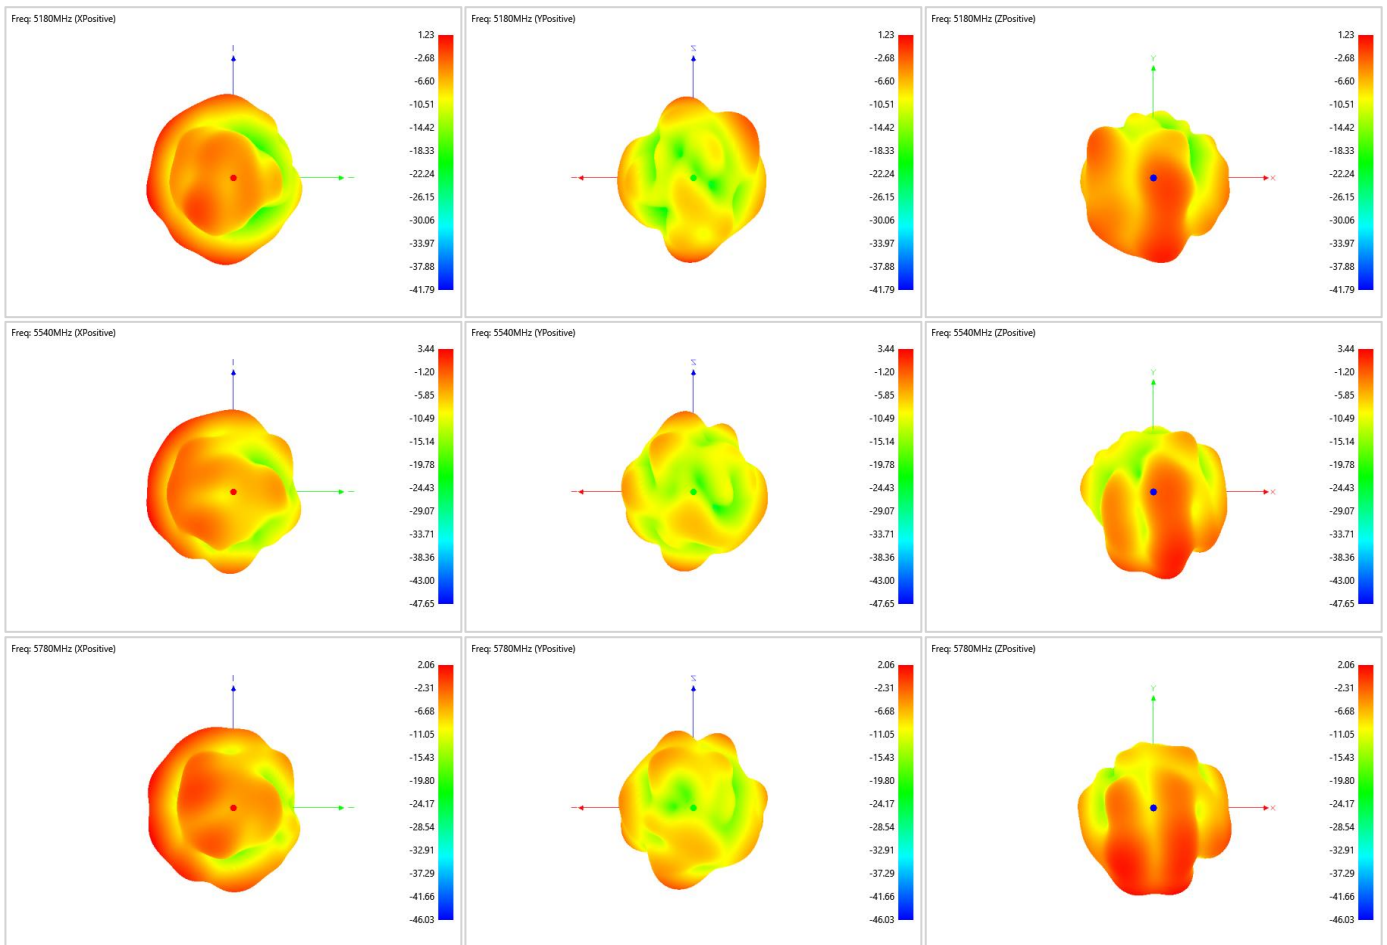

GPS Antenna

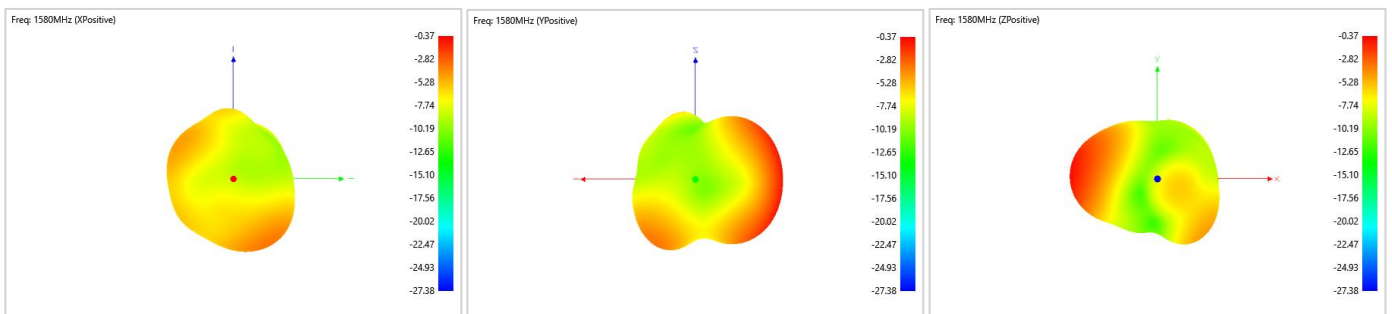


6、 conclusion

This antenna is designed based on the prototype provided by the customer. The electrical parameters and structural performance have met the technical requirements, please confirm!

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

7、 Test instruments and their calibration dates:

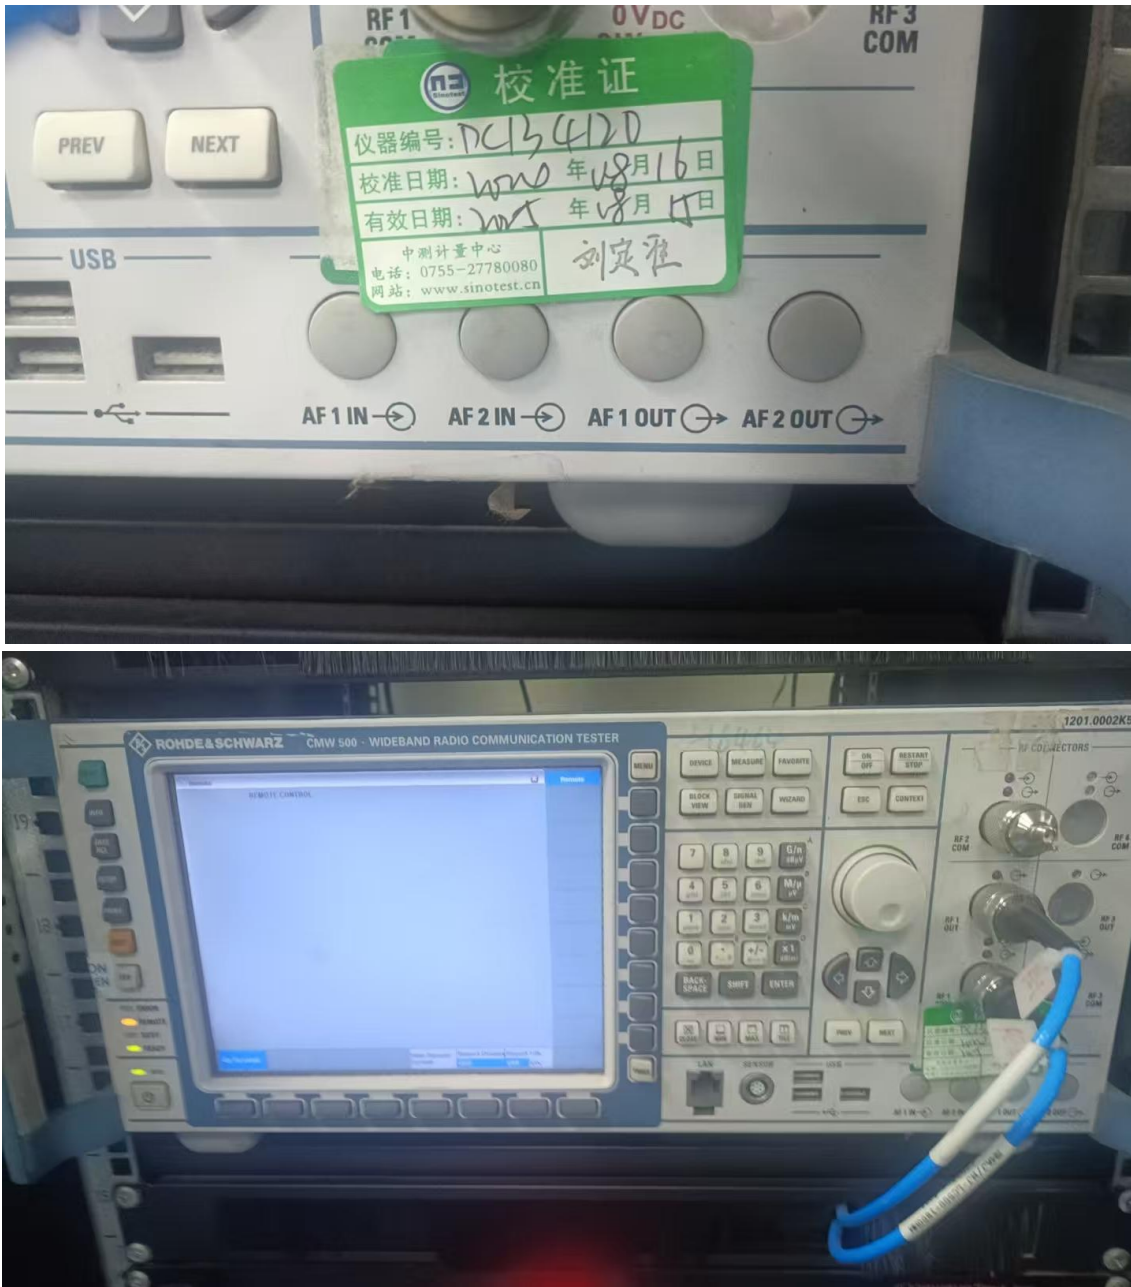

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd