






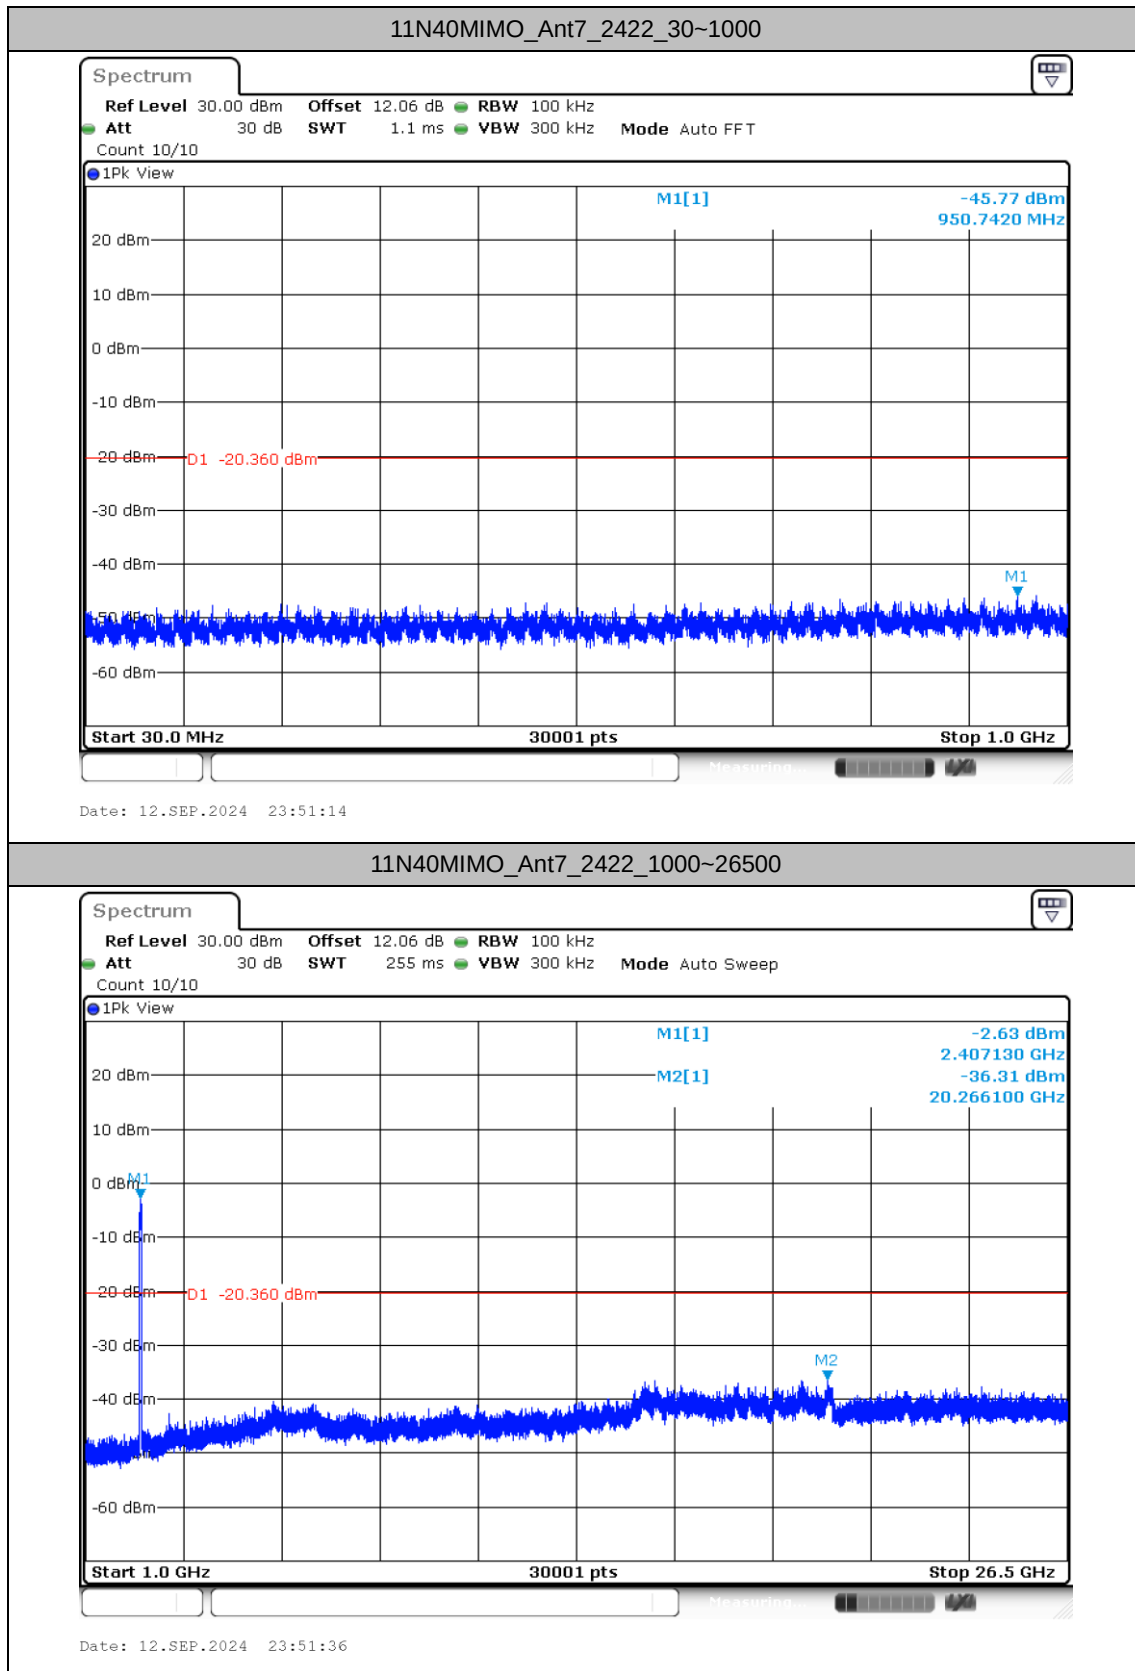


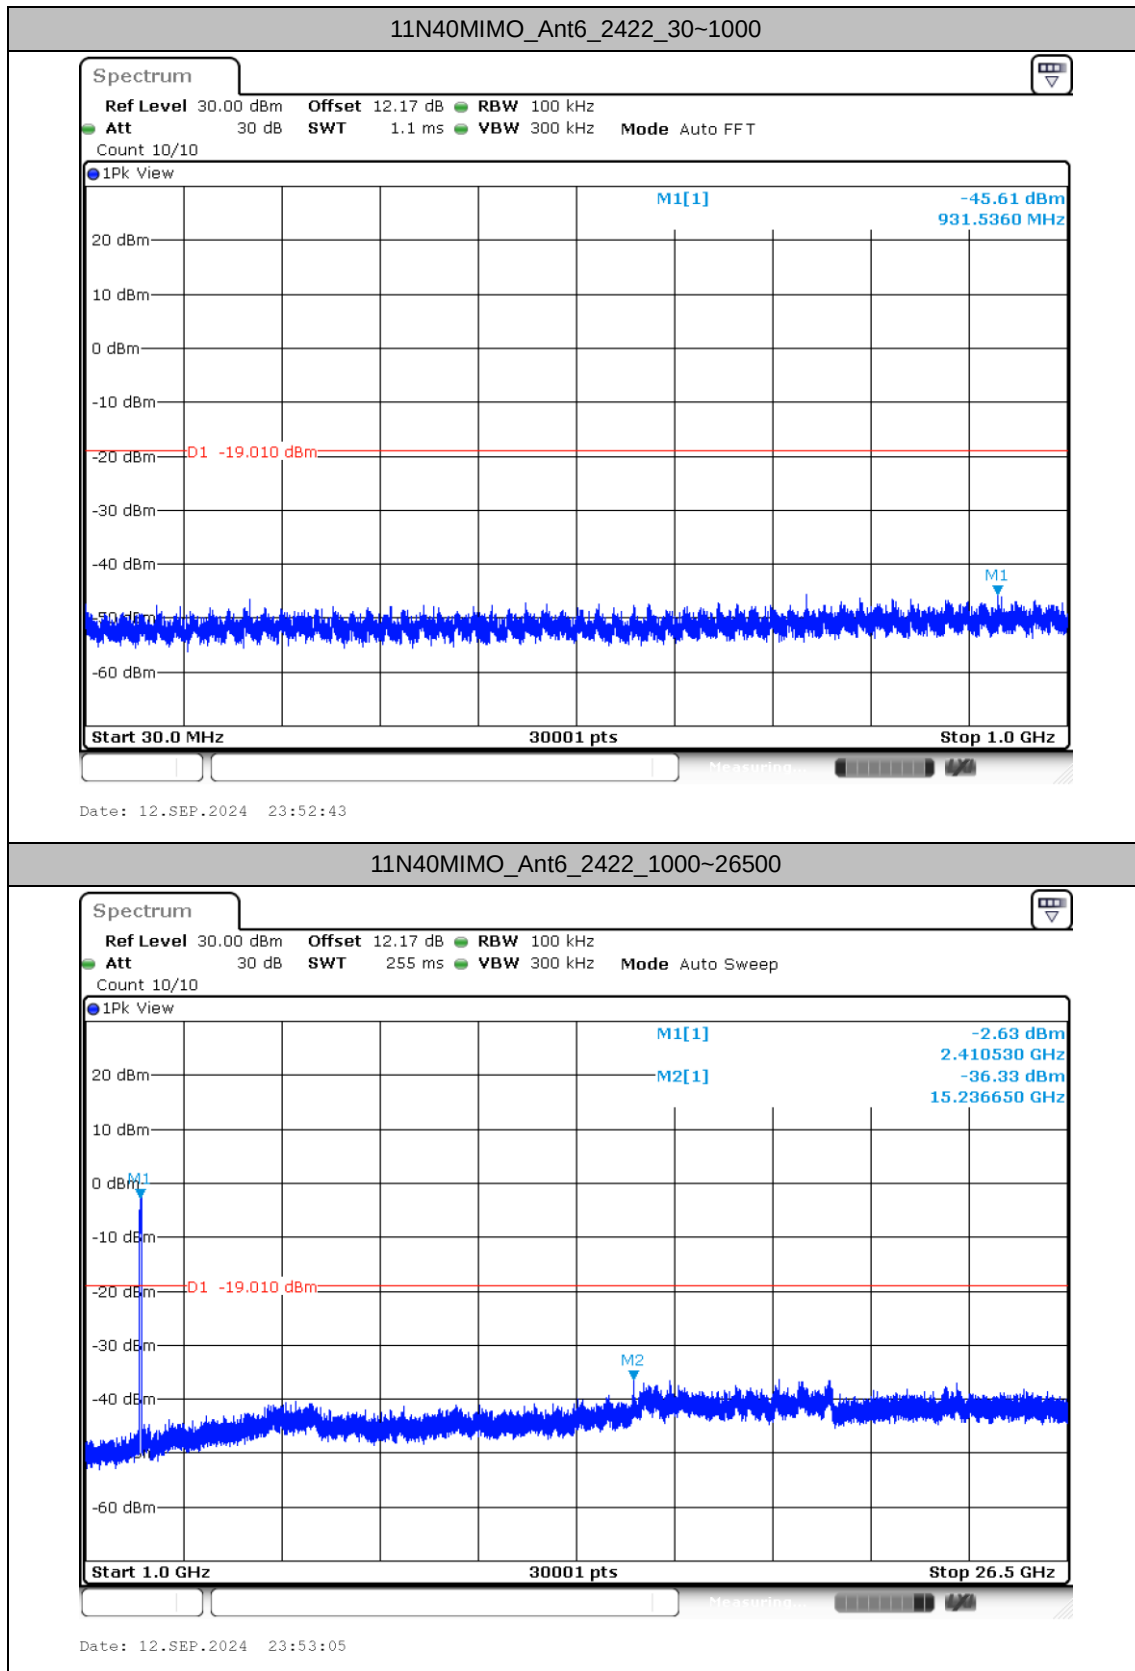


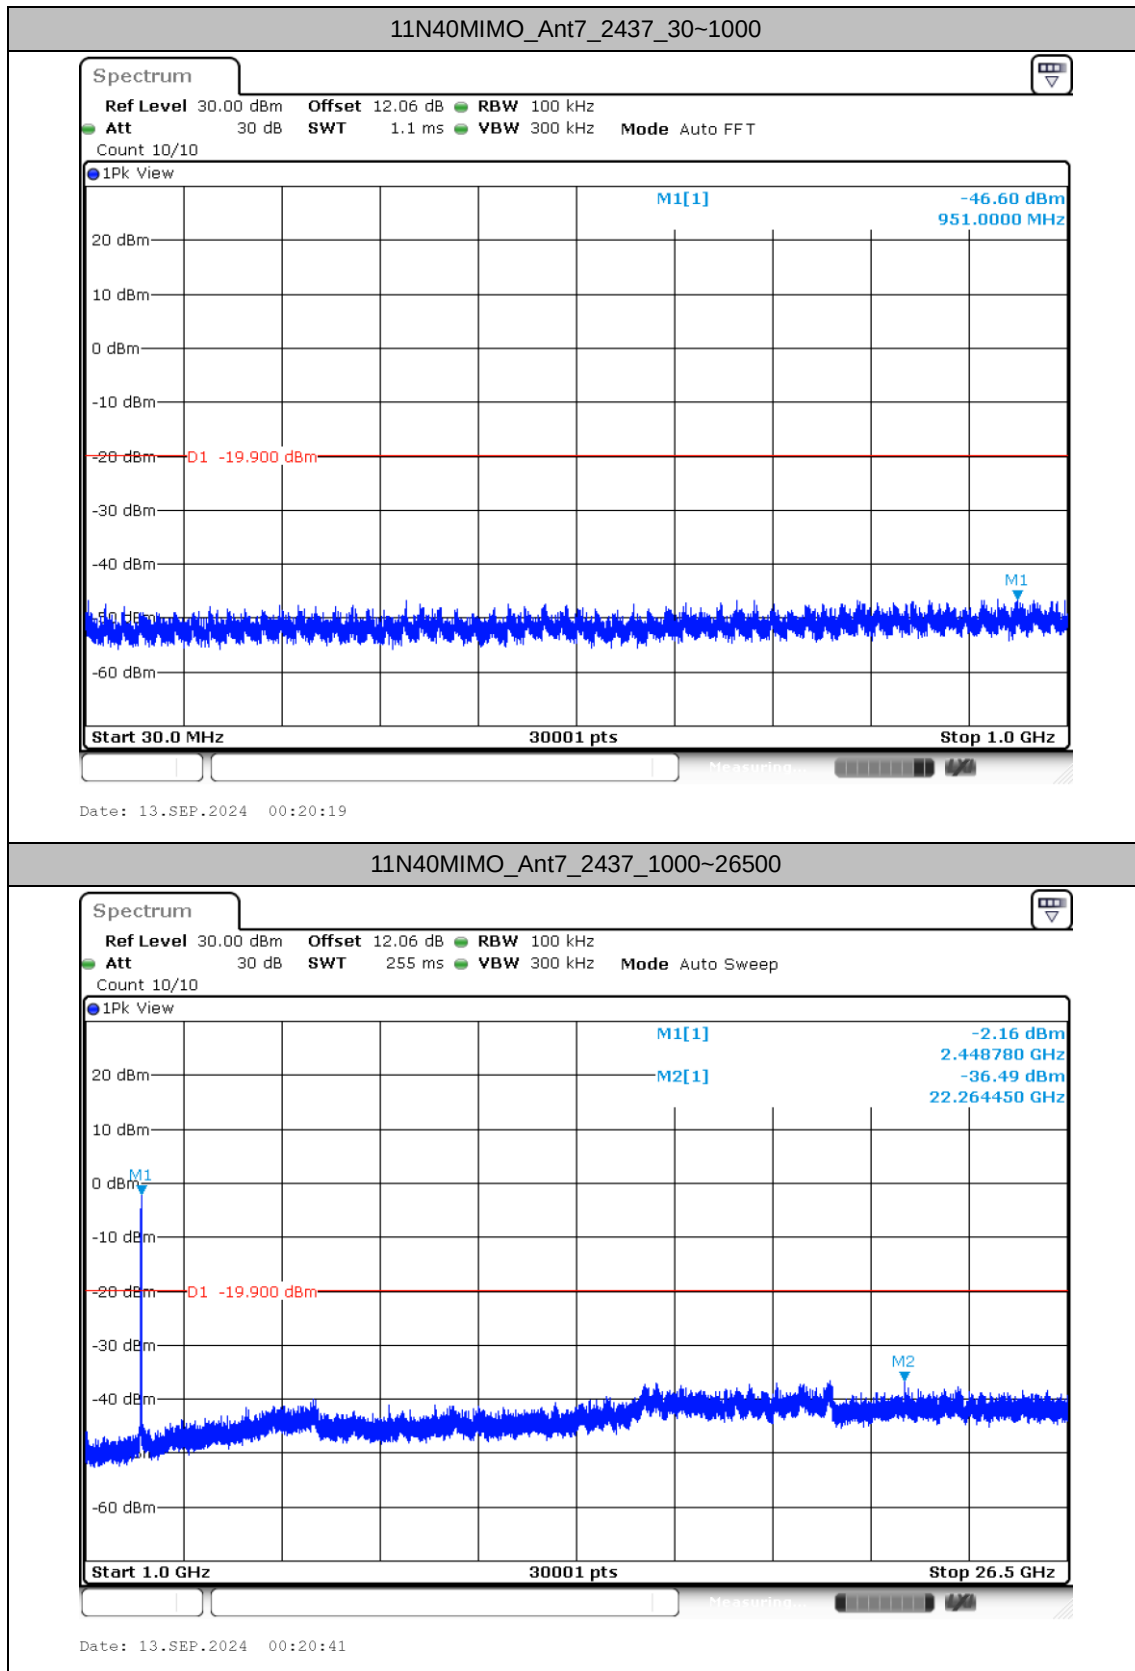


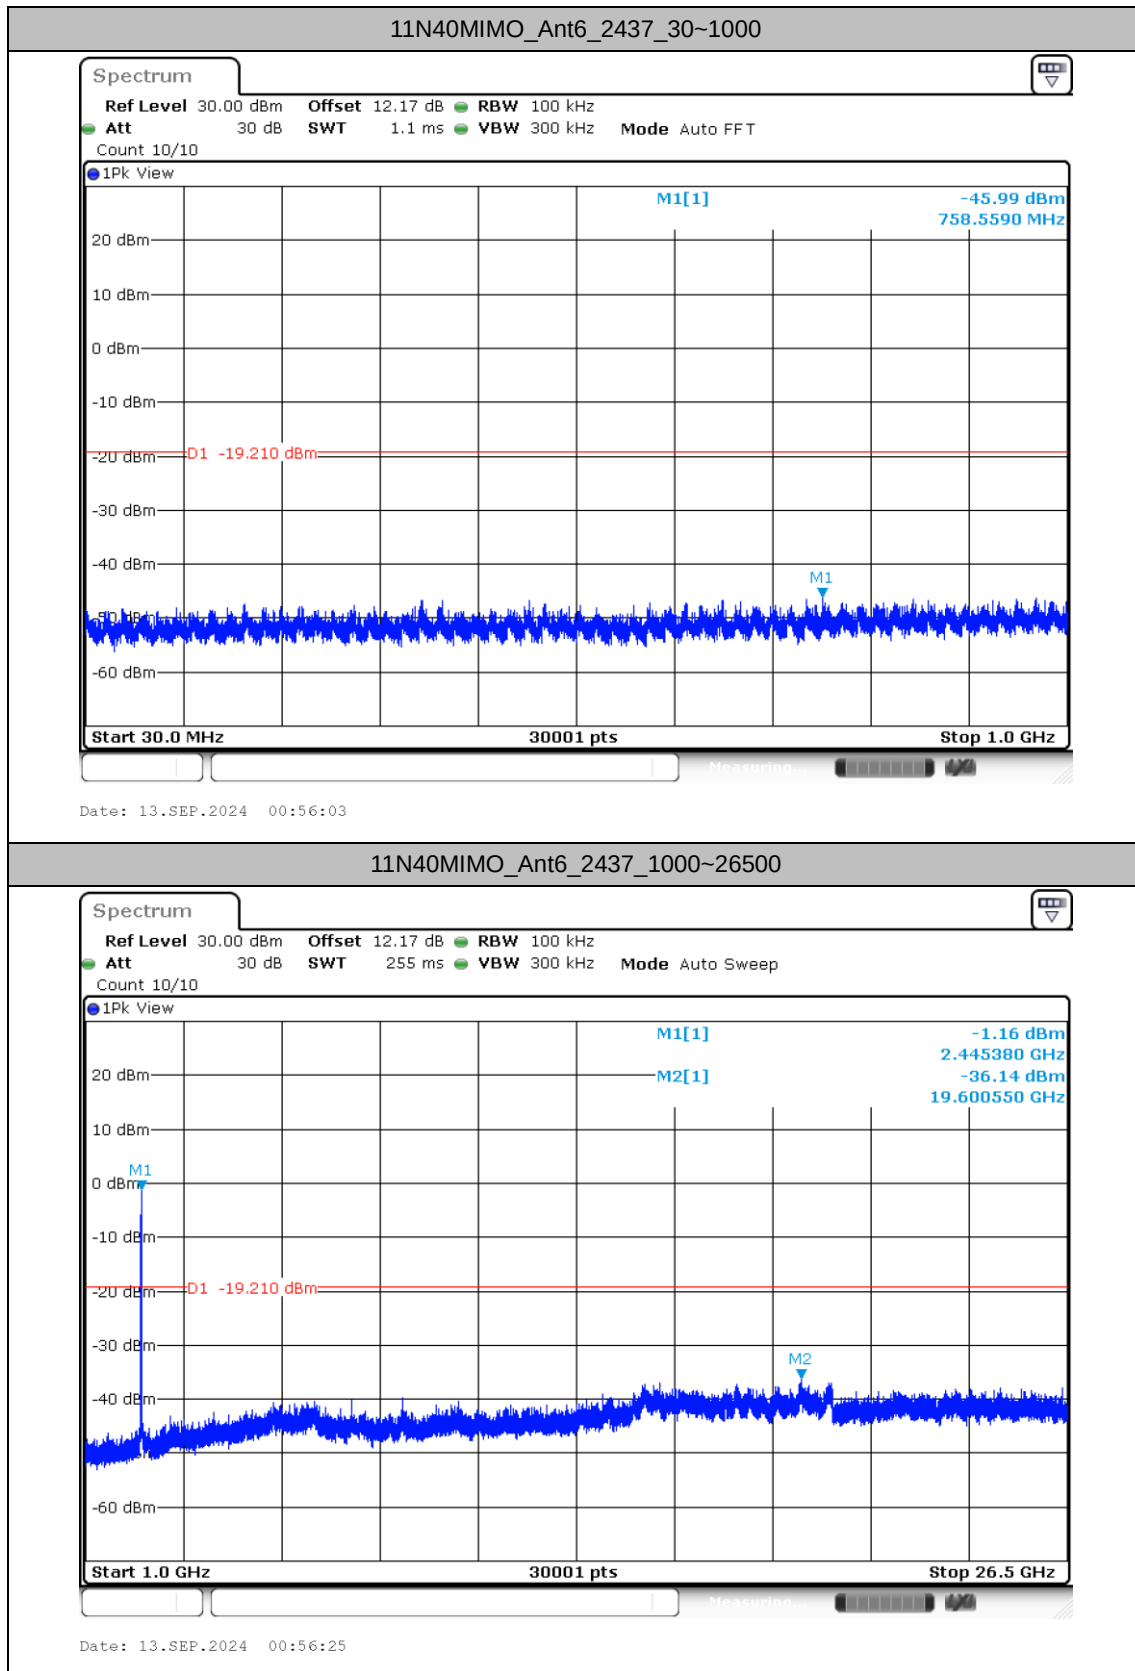


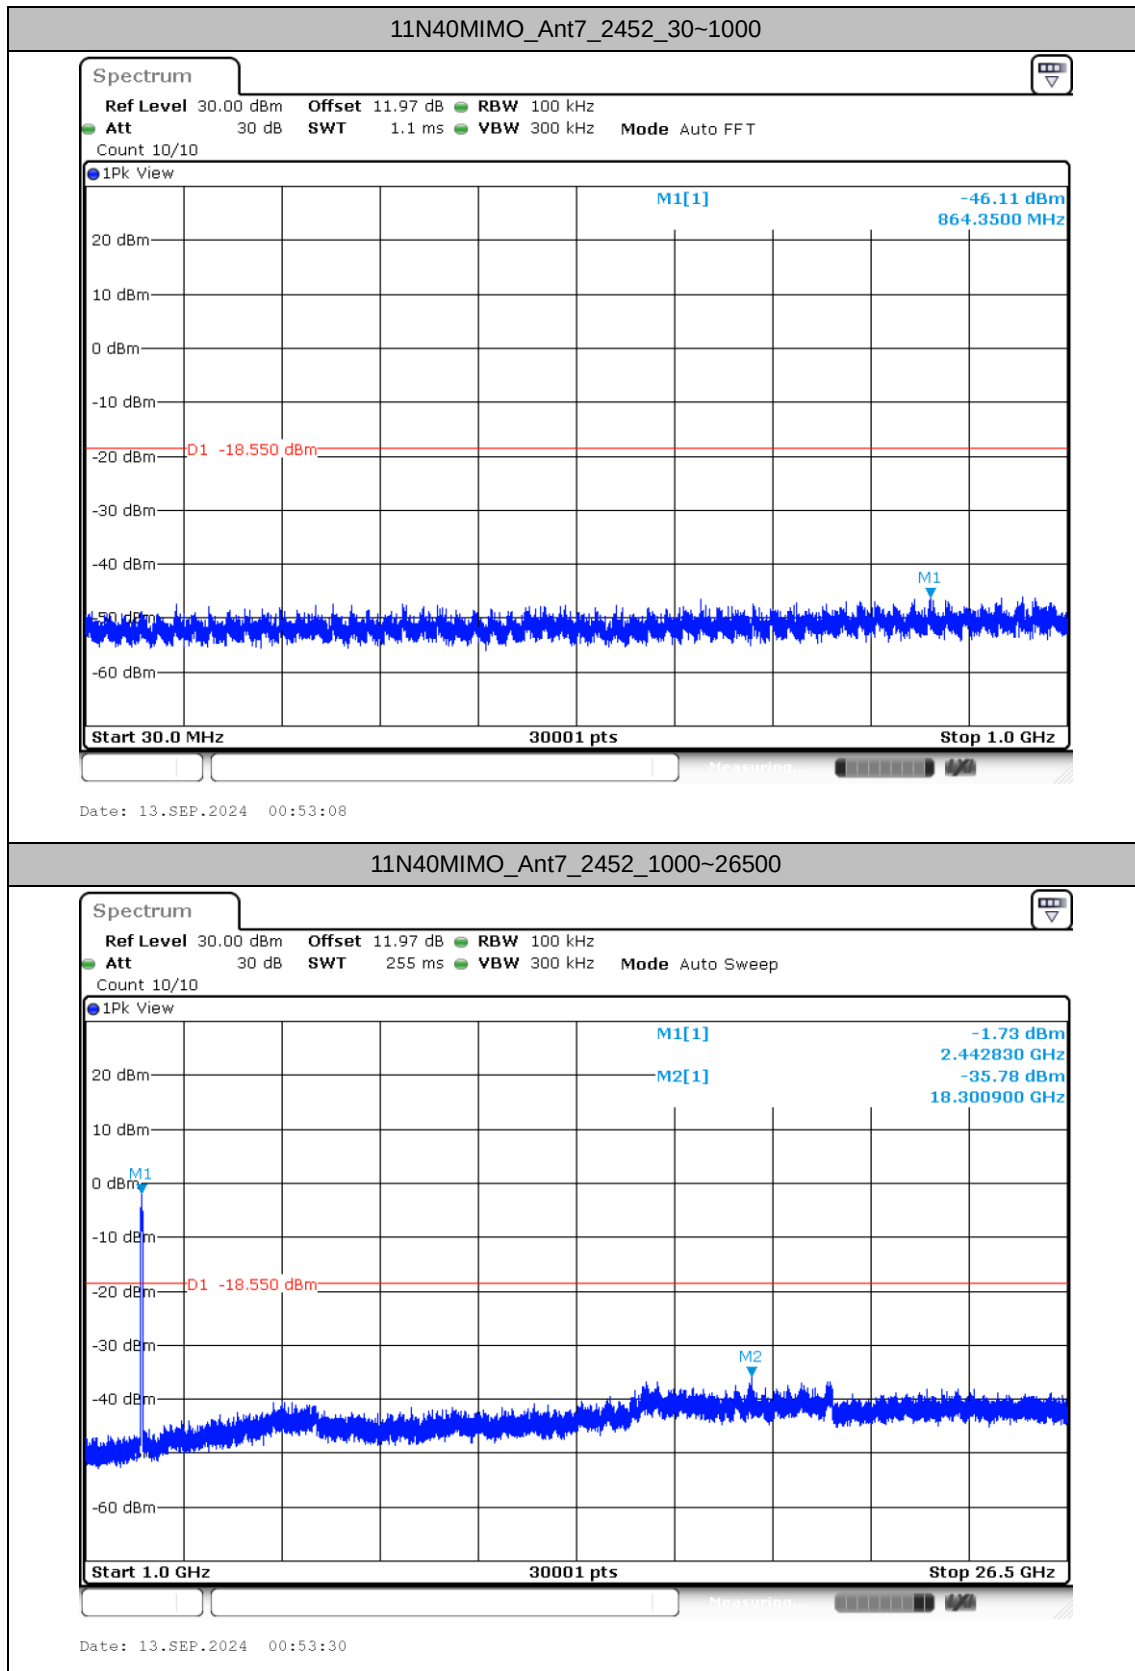


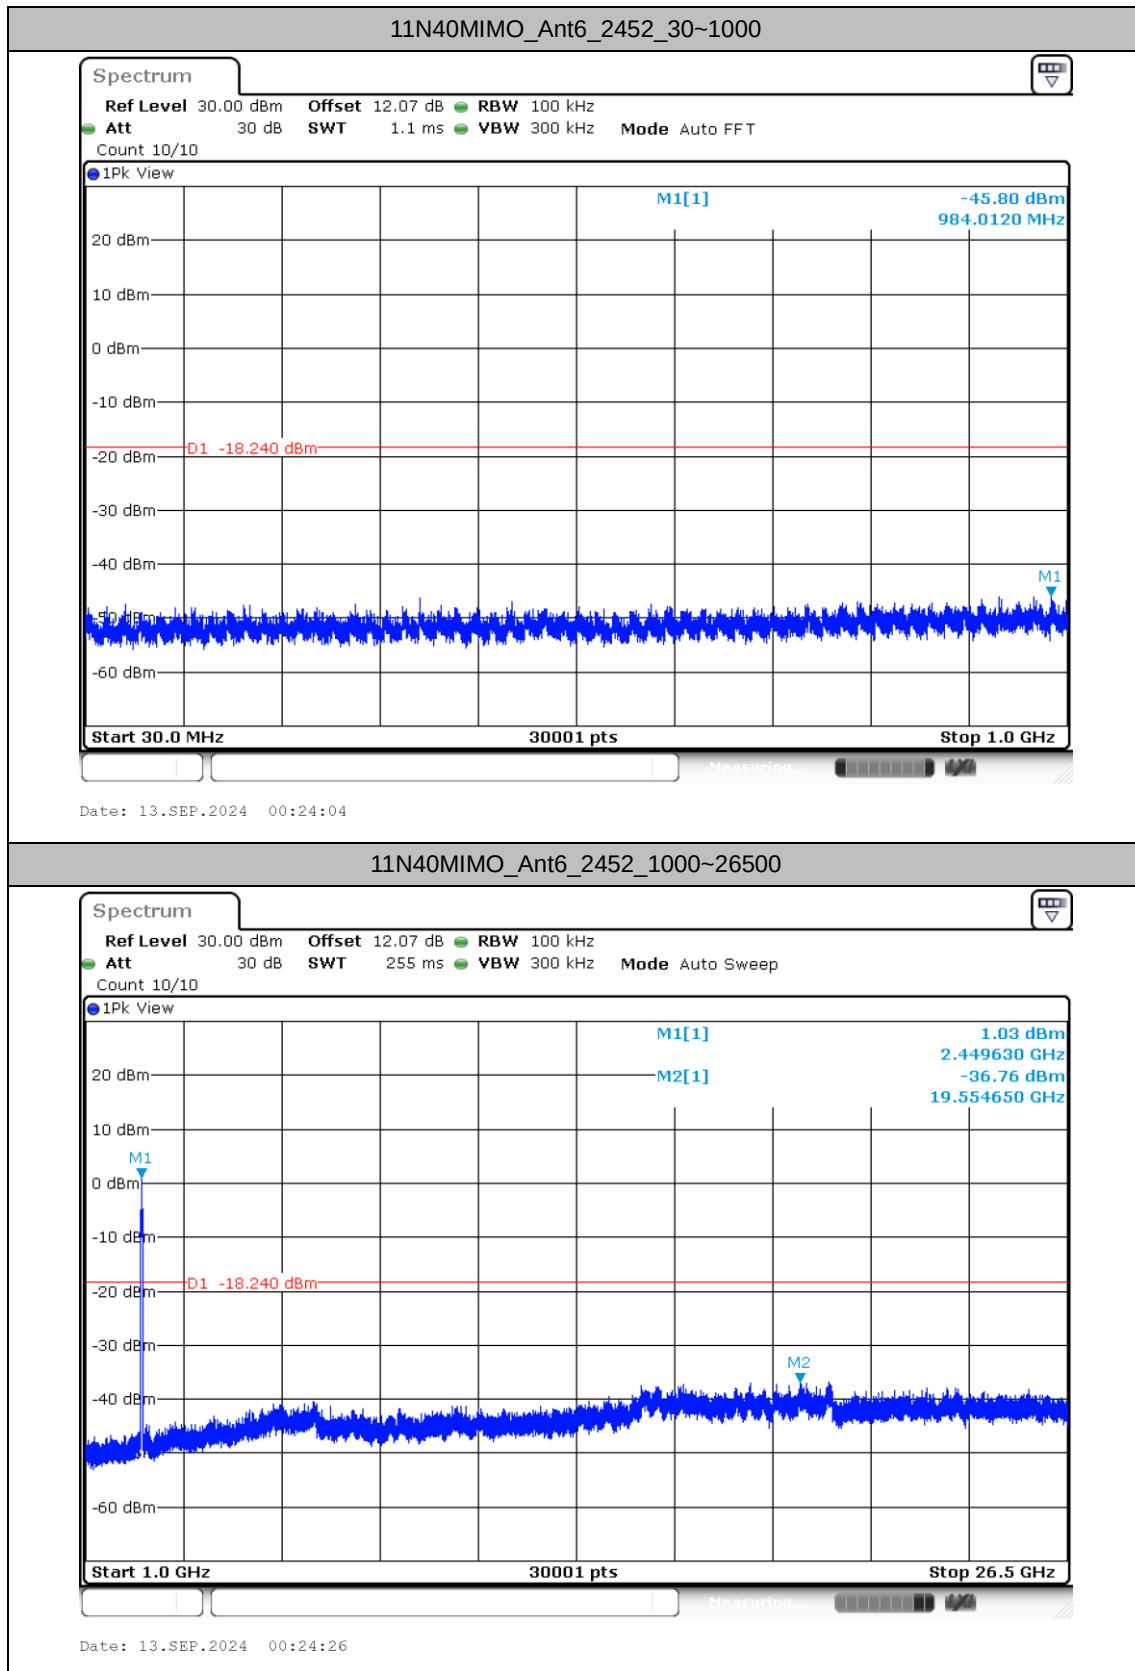


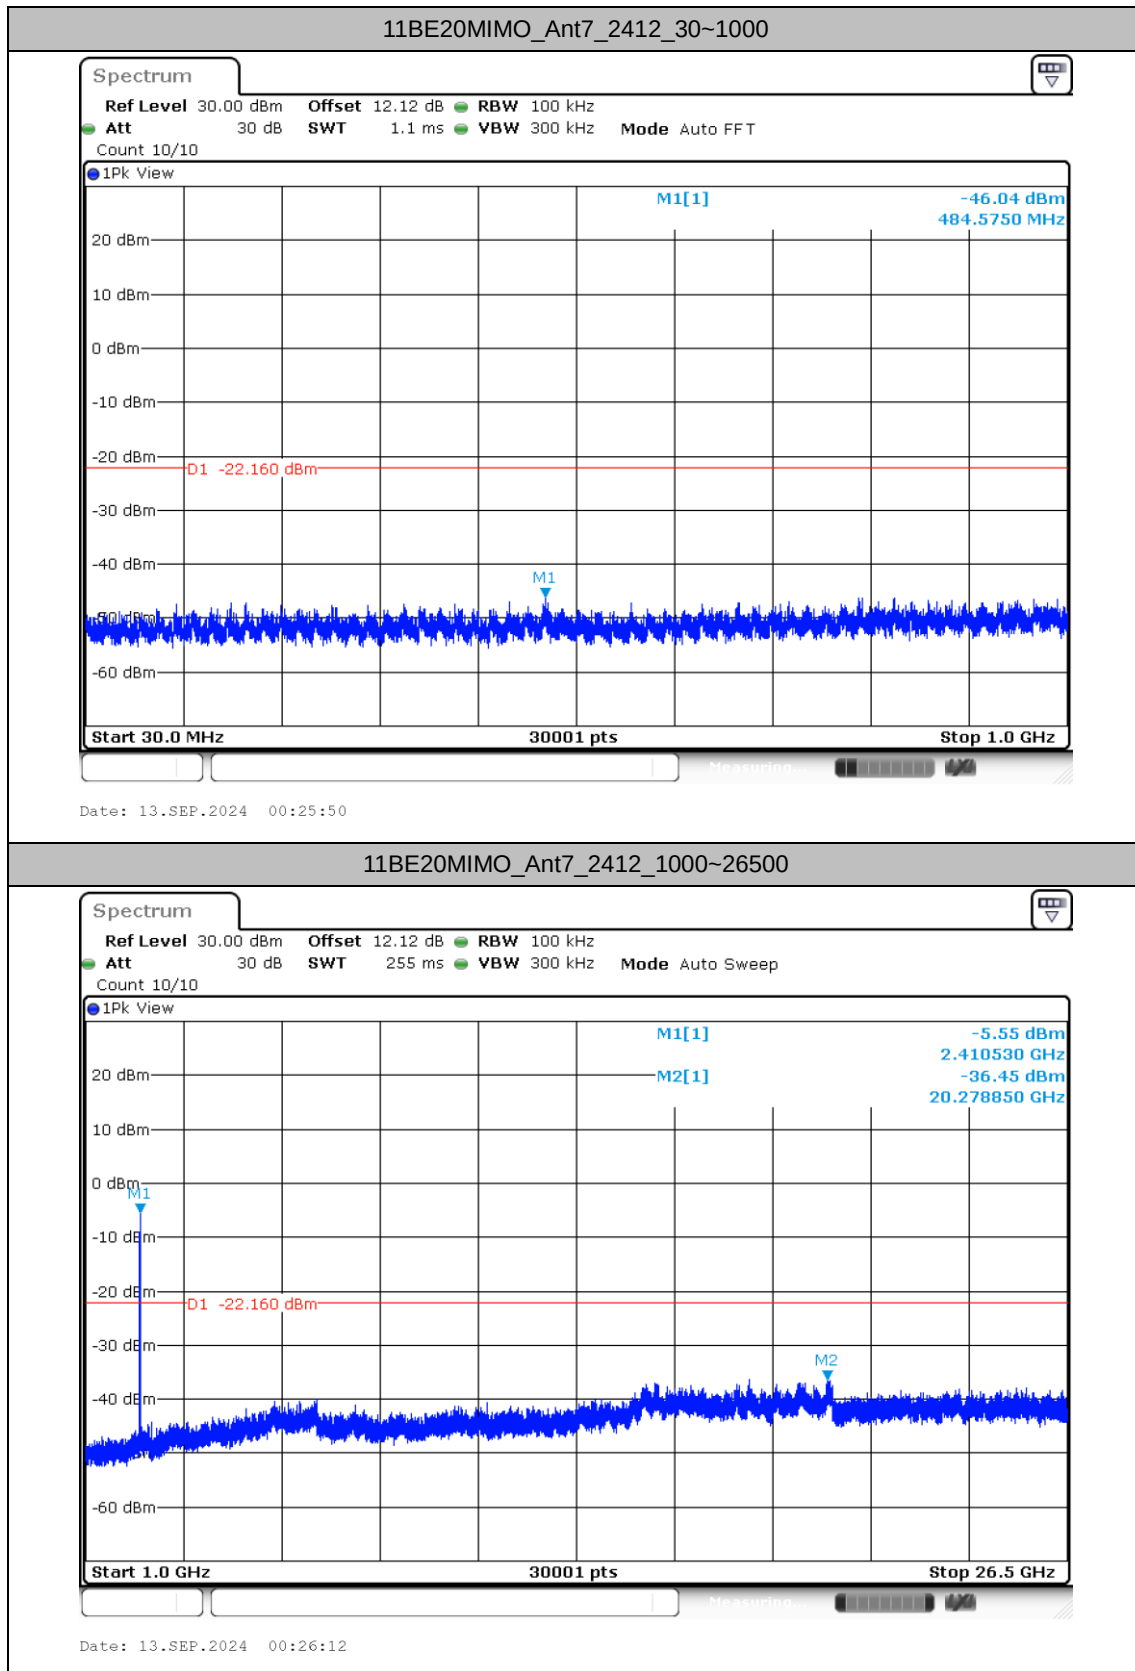


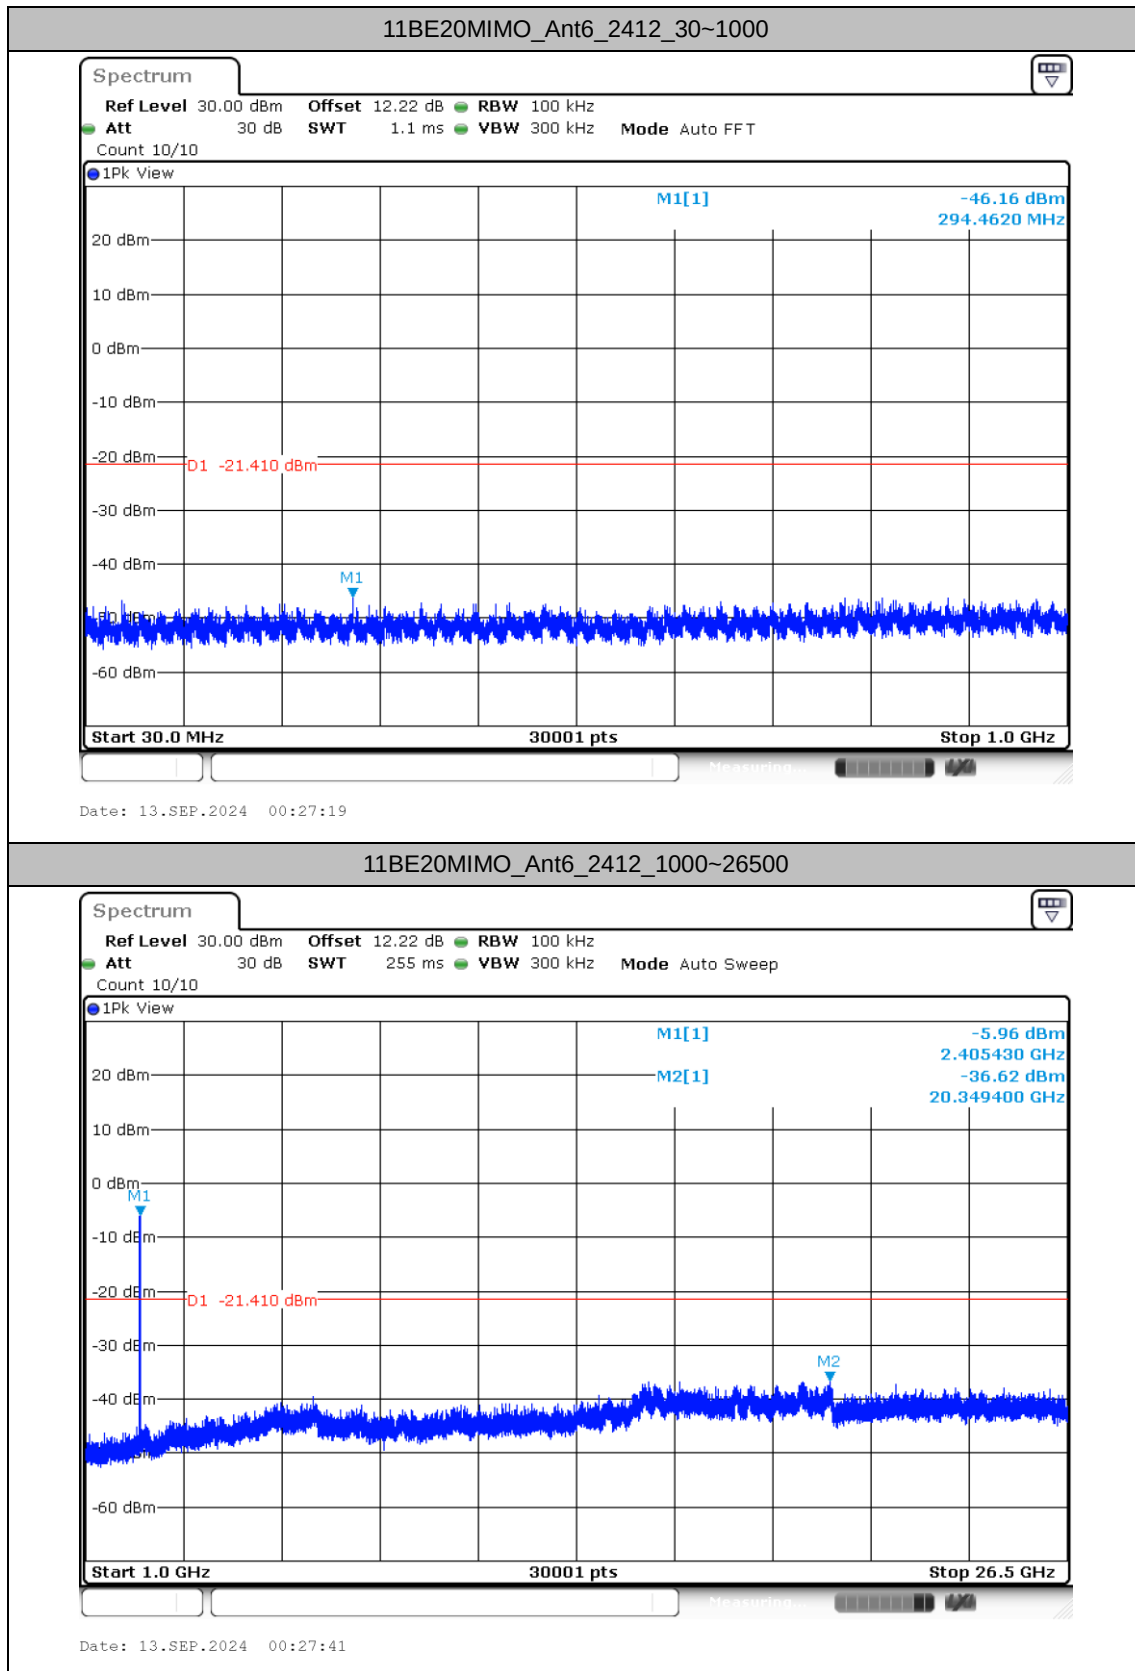


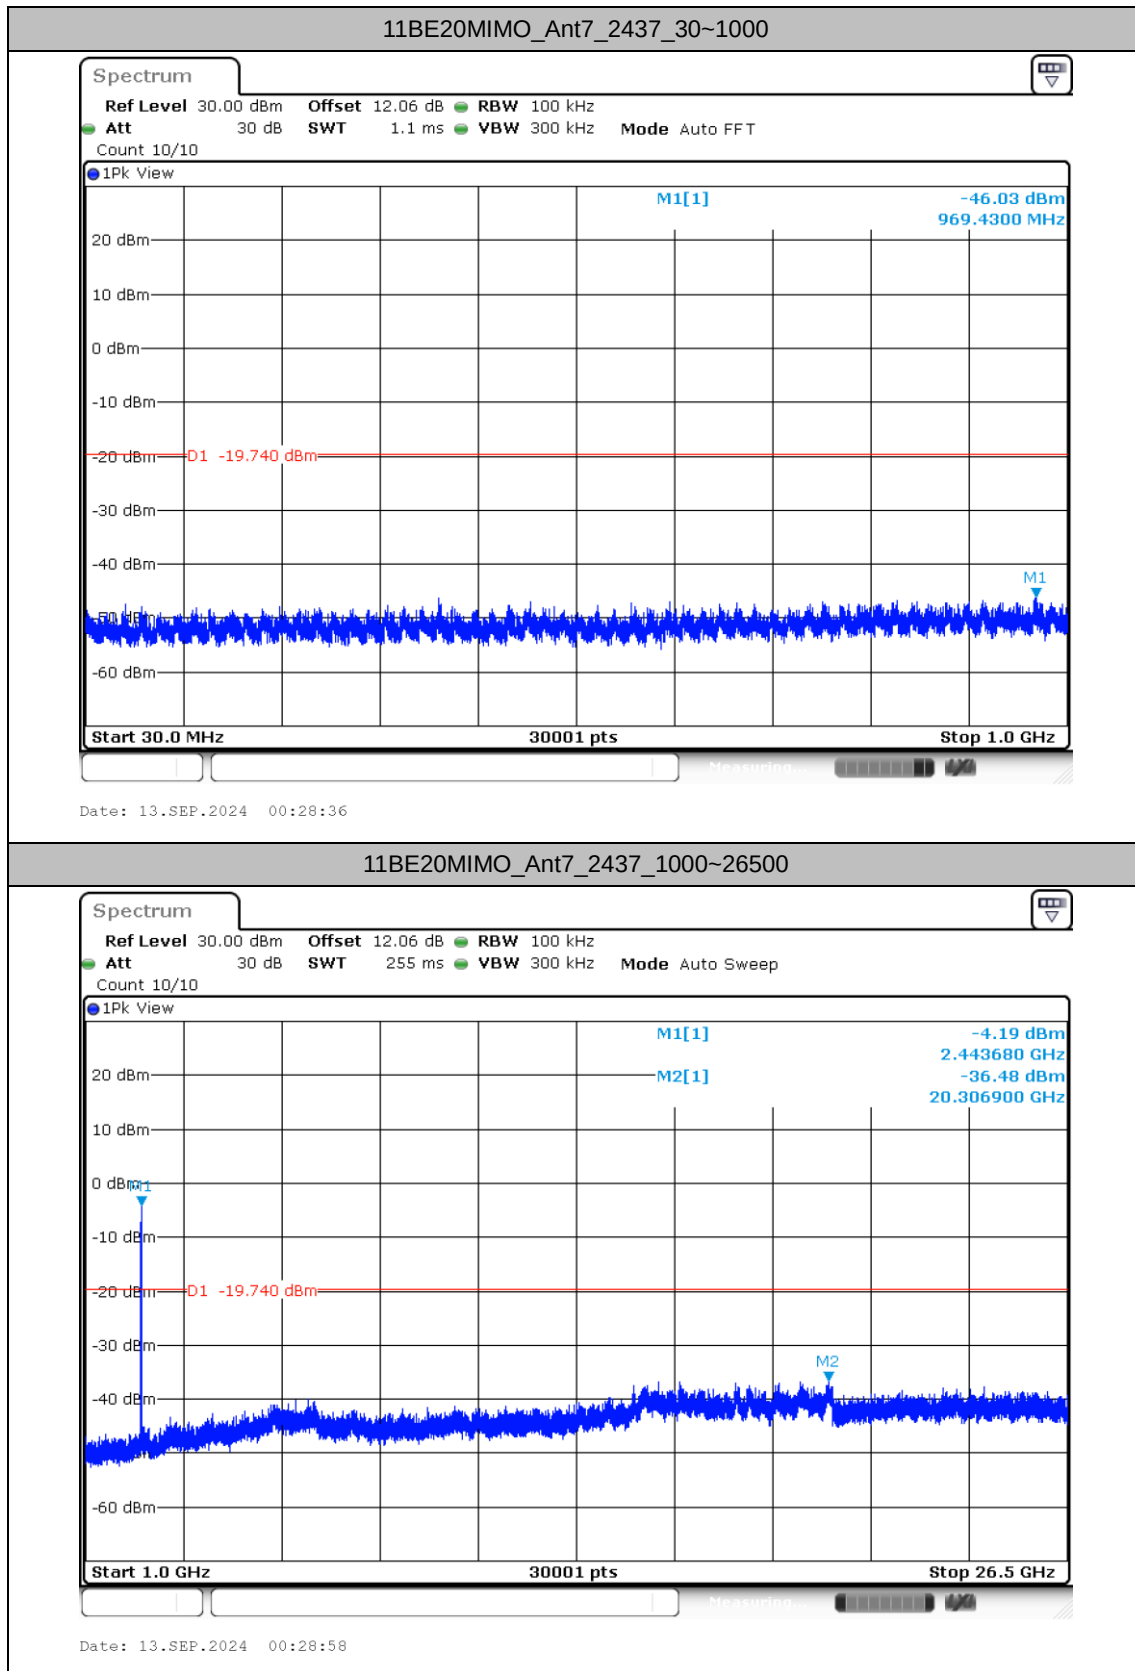


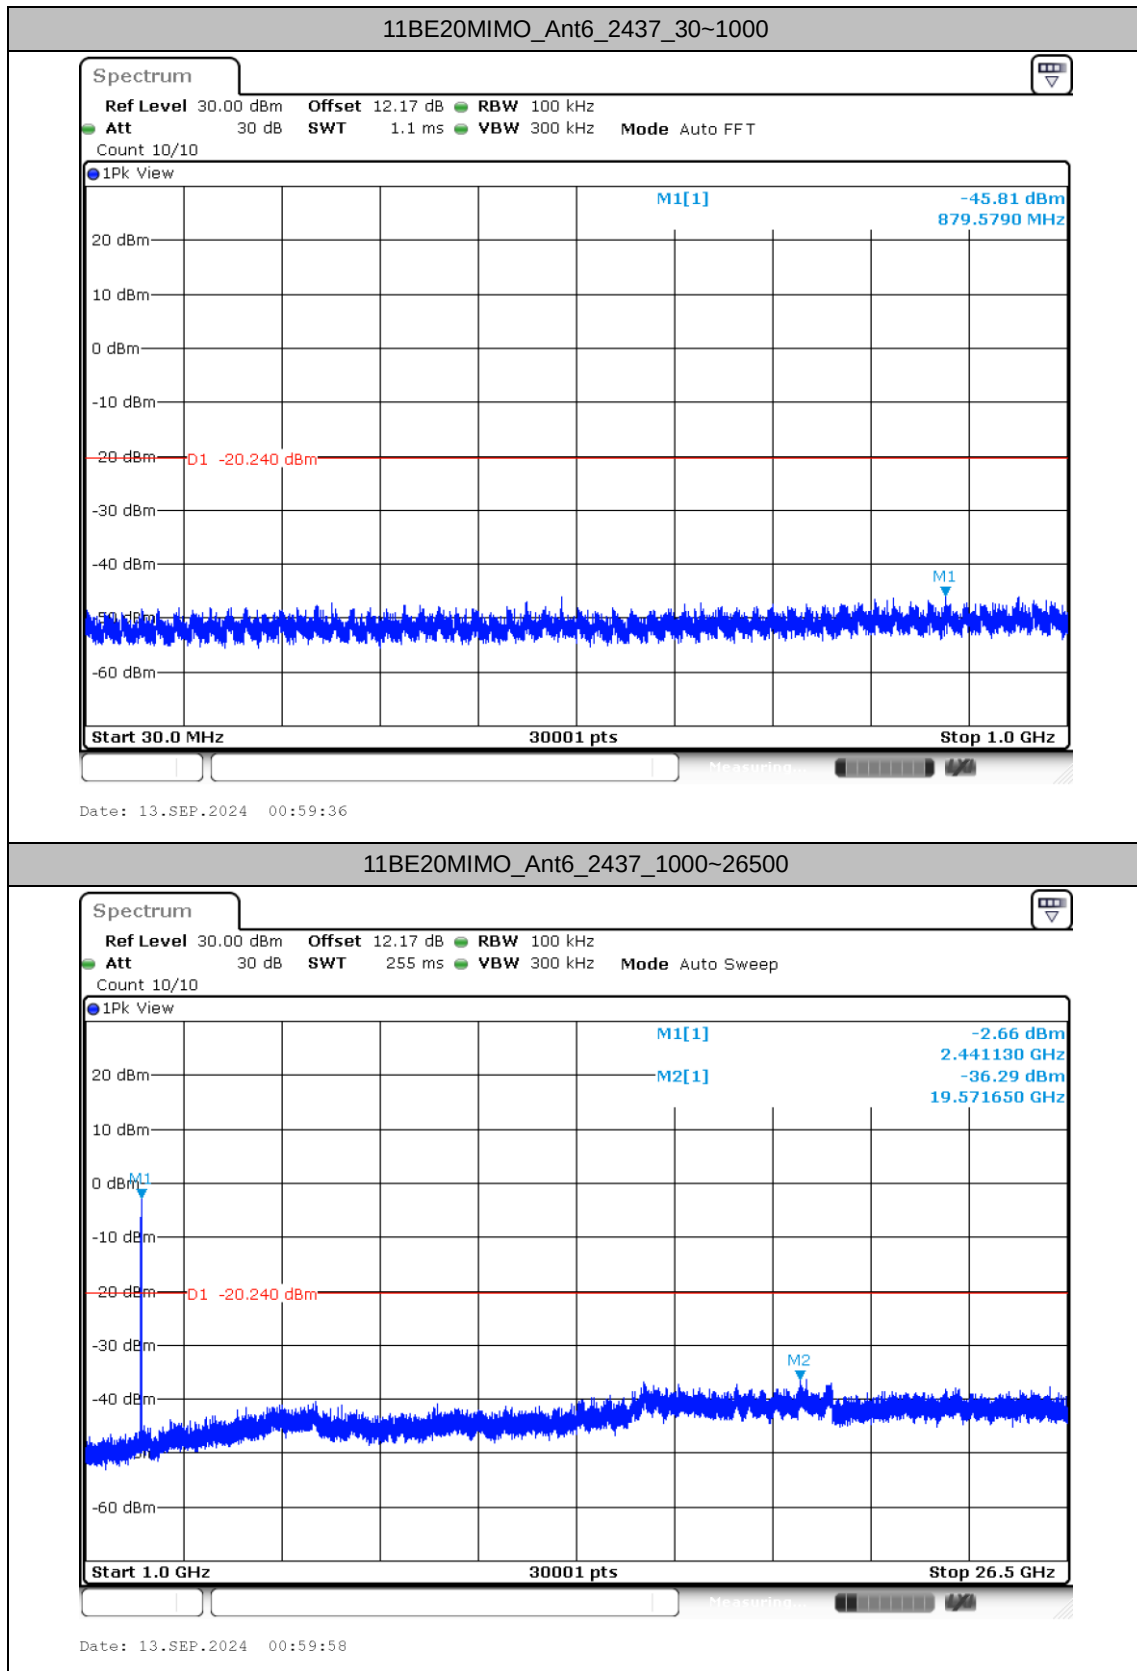


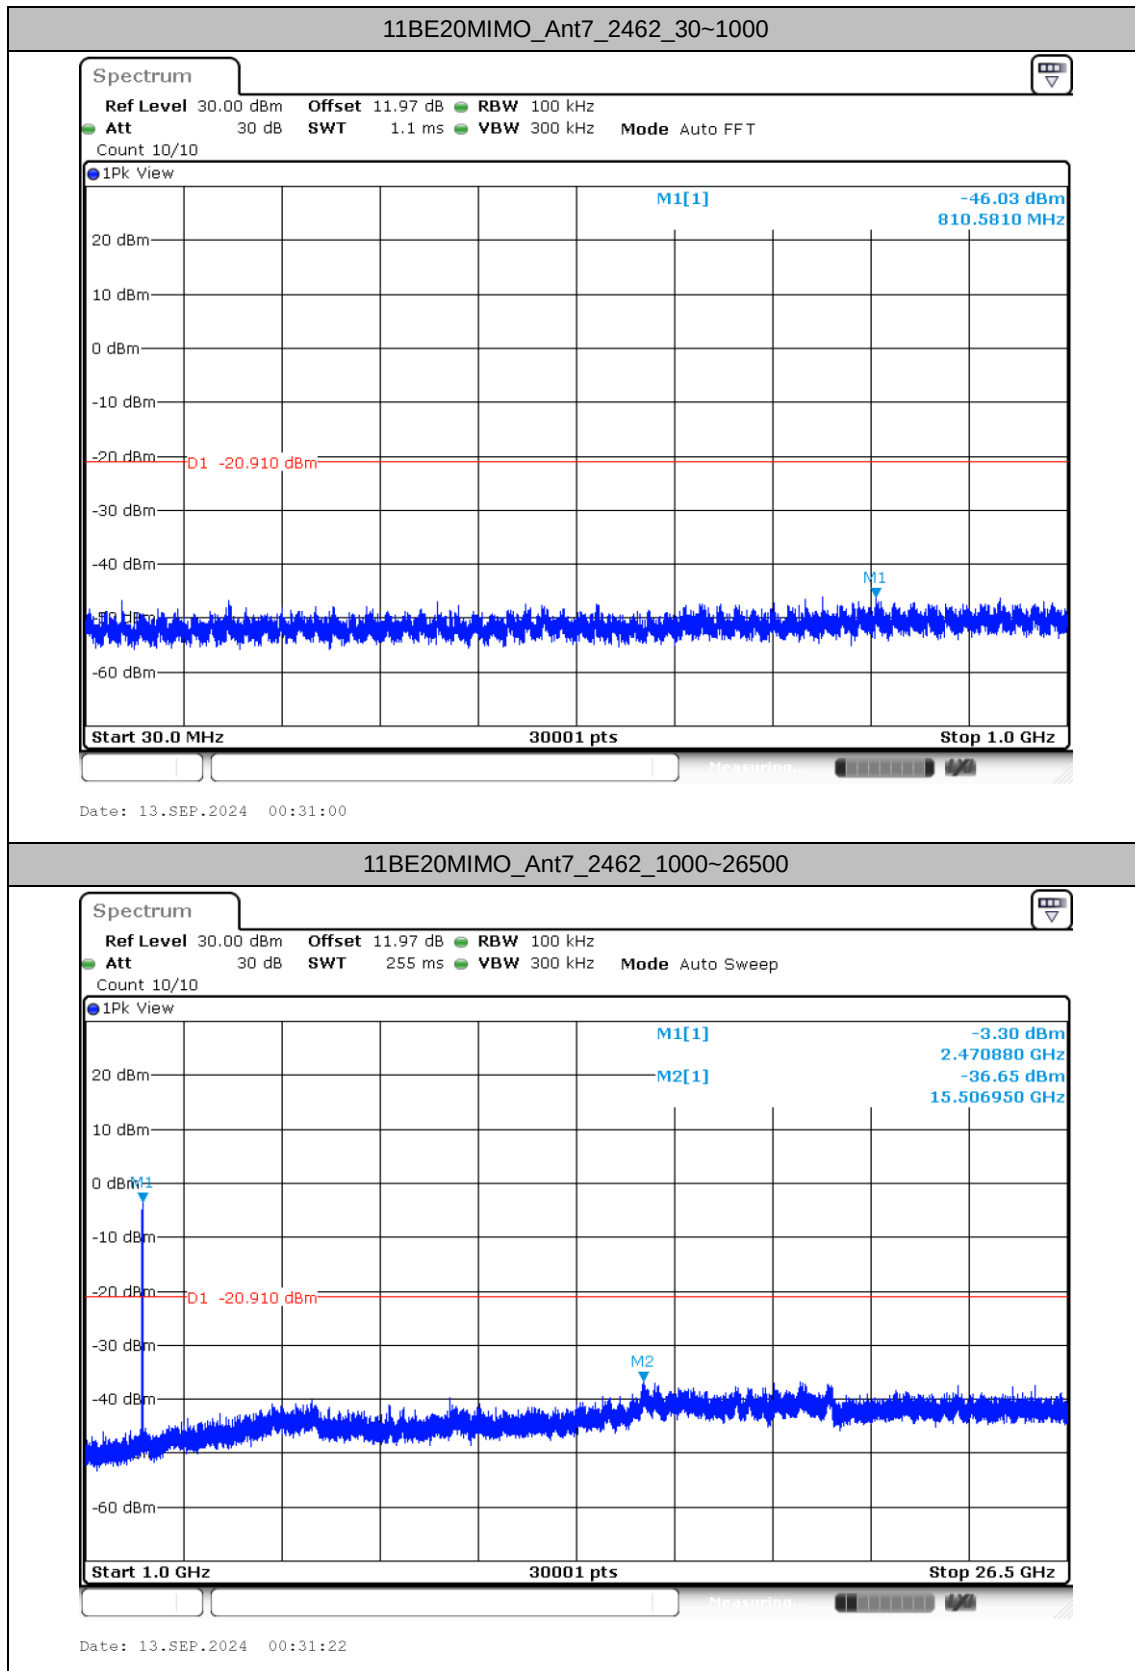


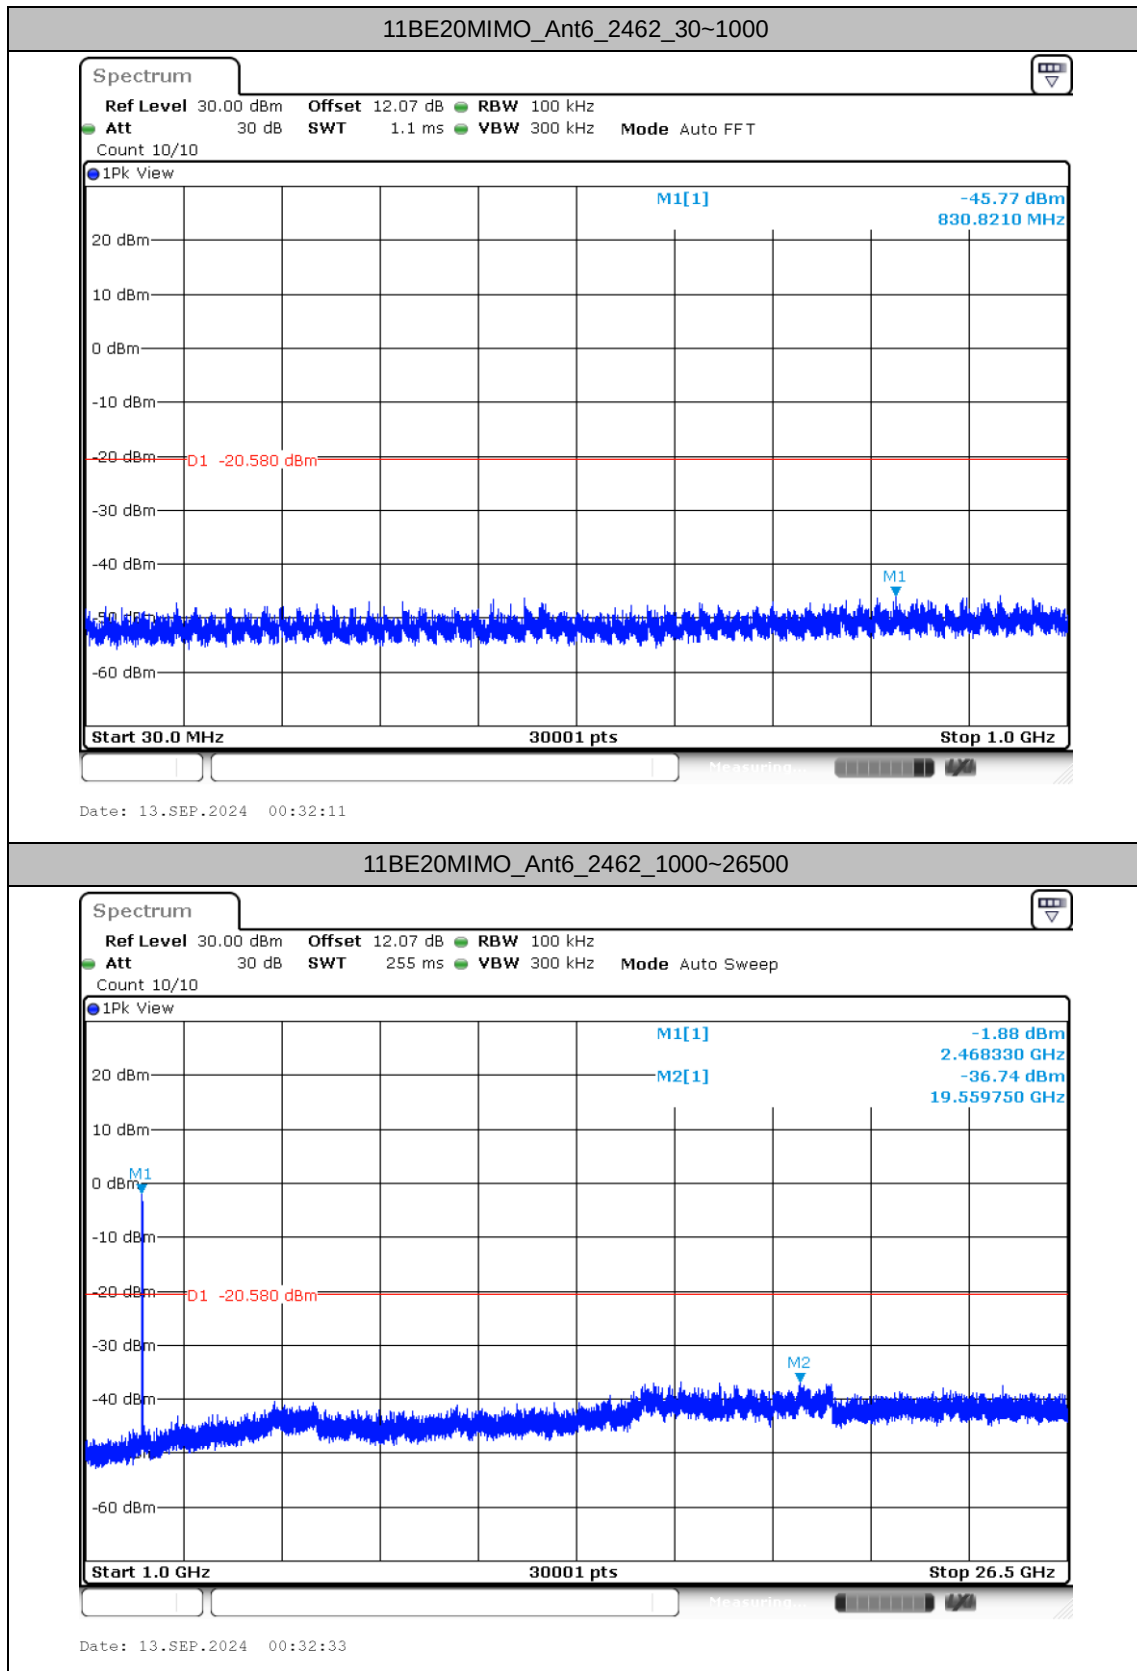


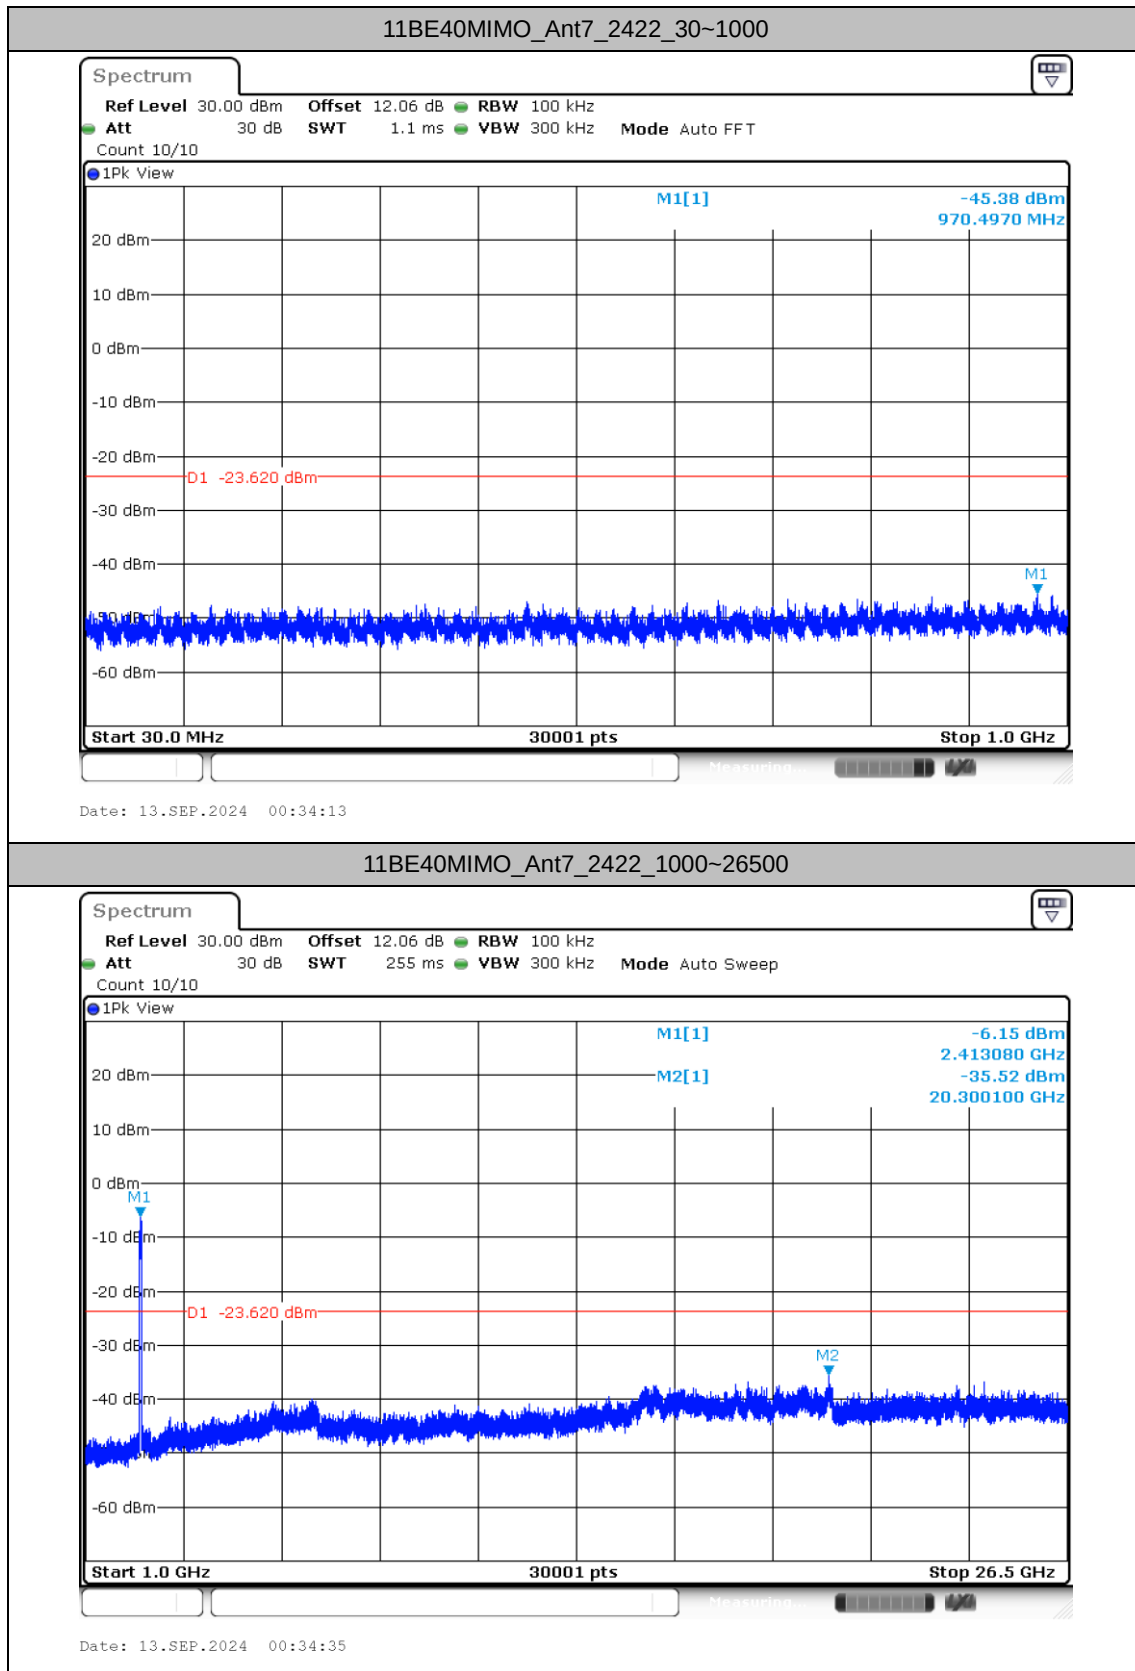


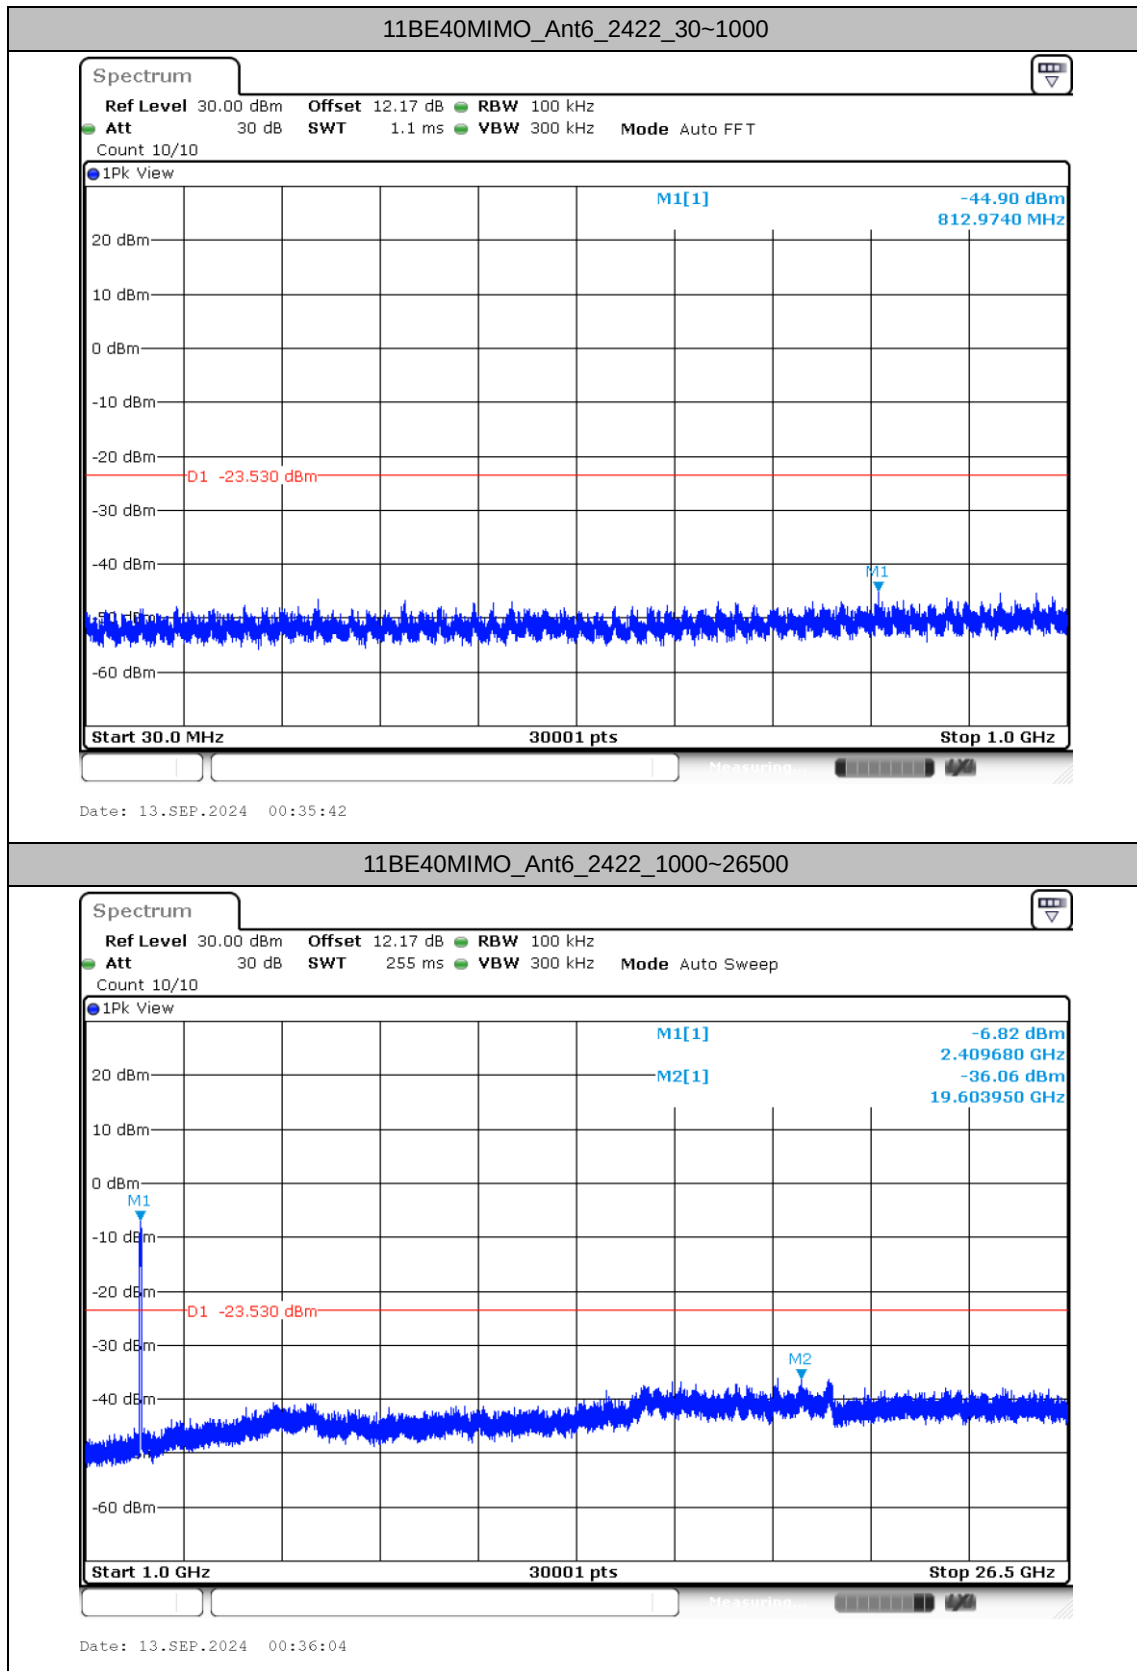

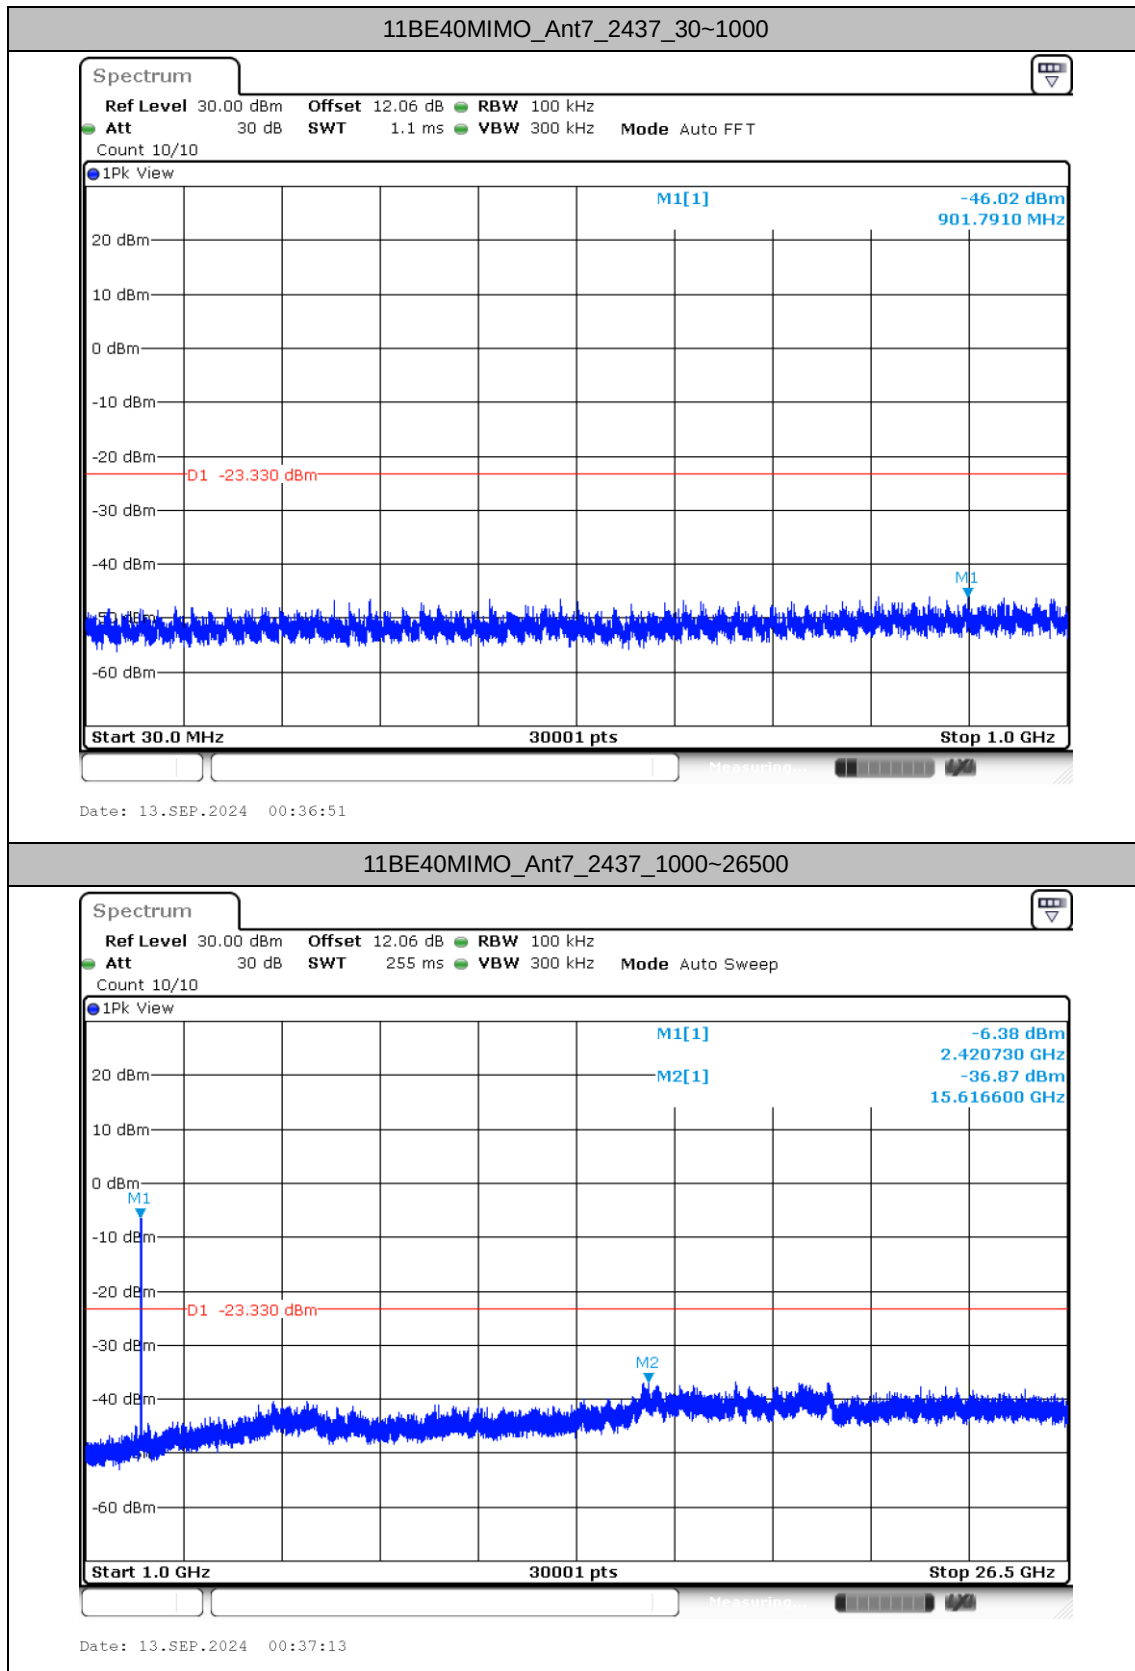

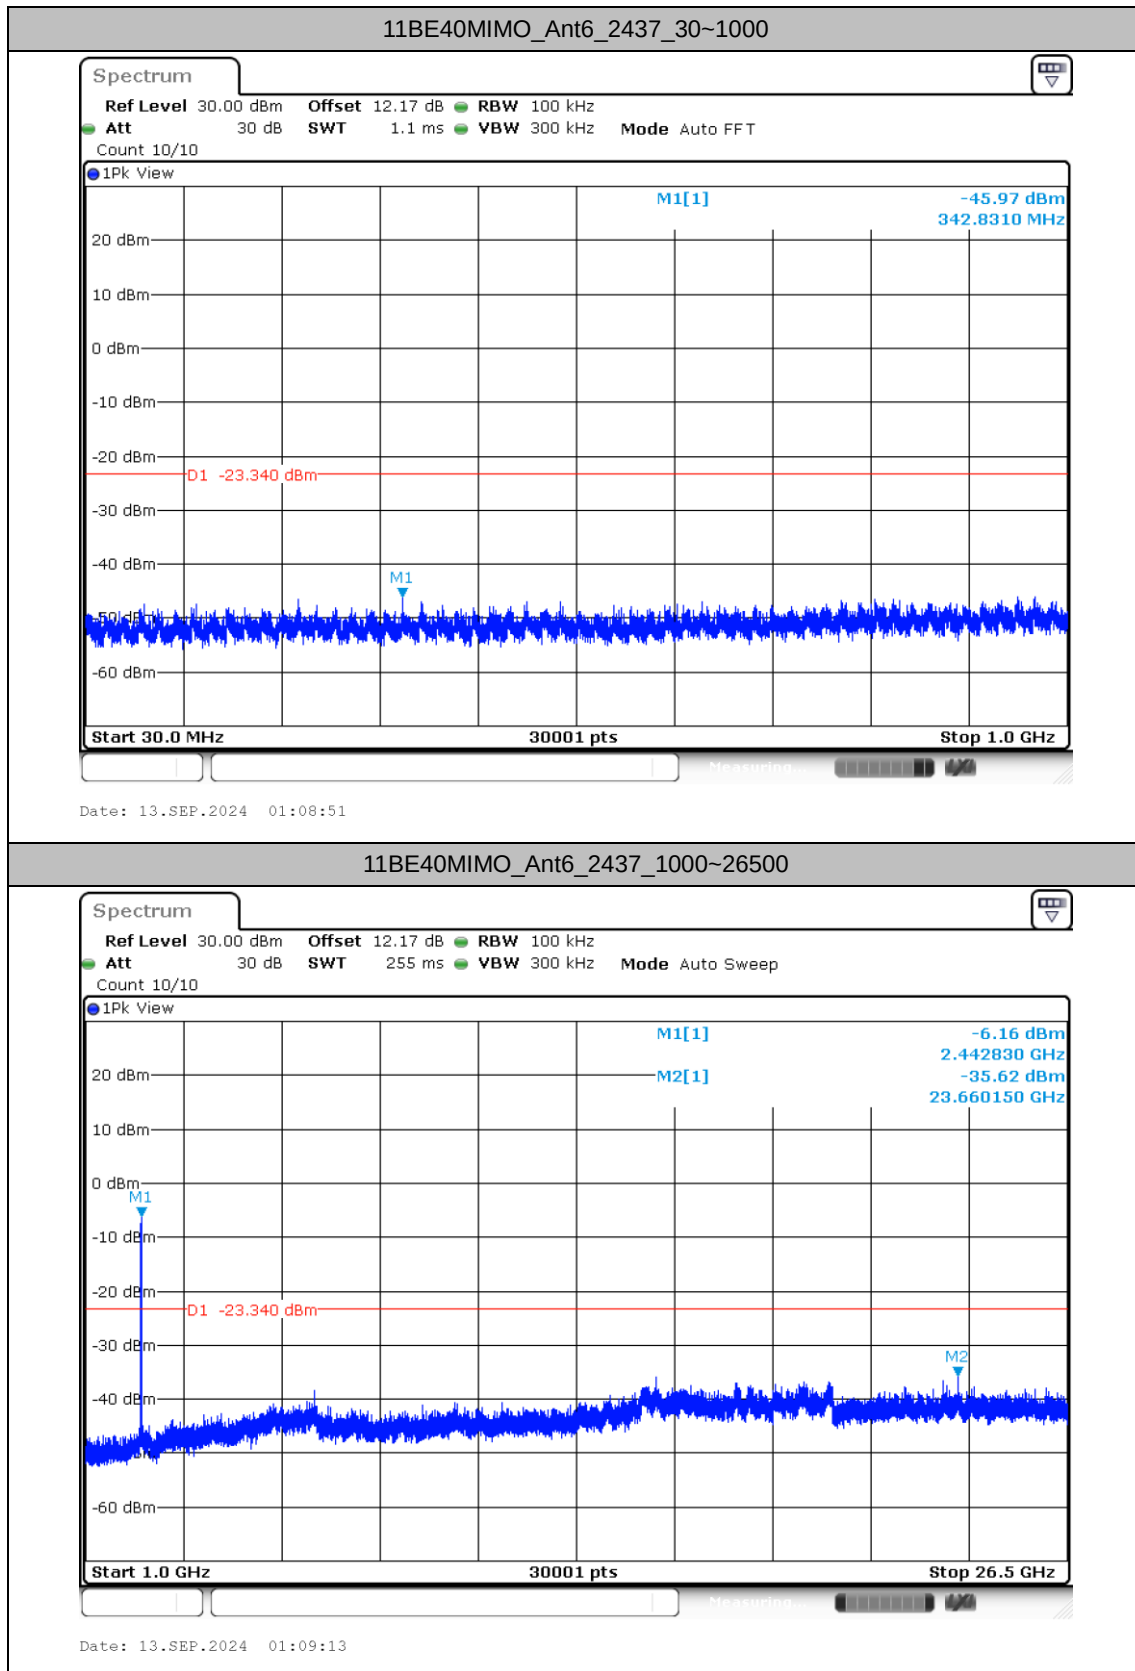

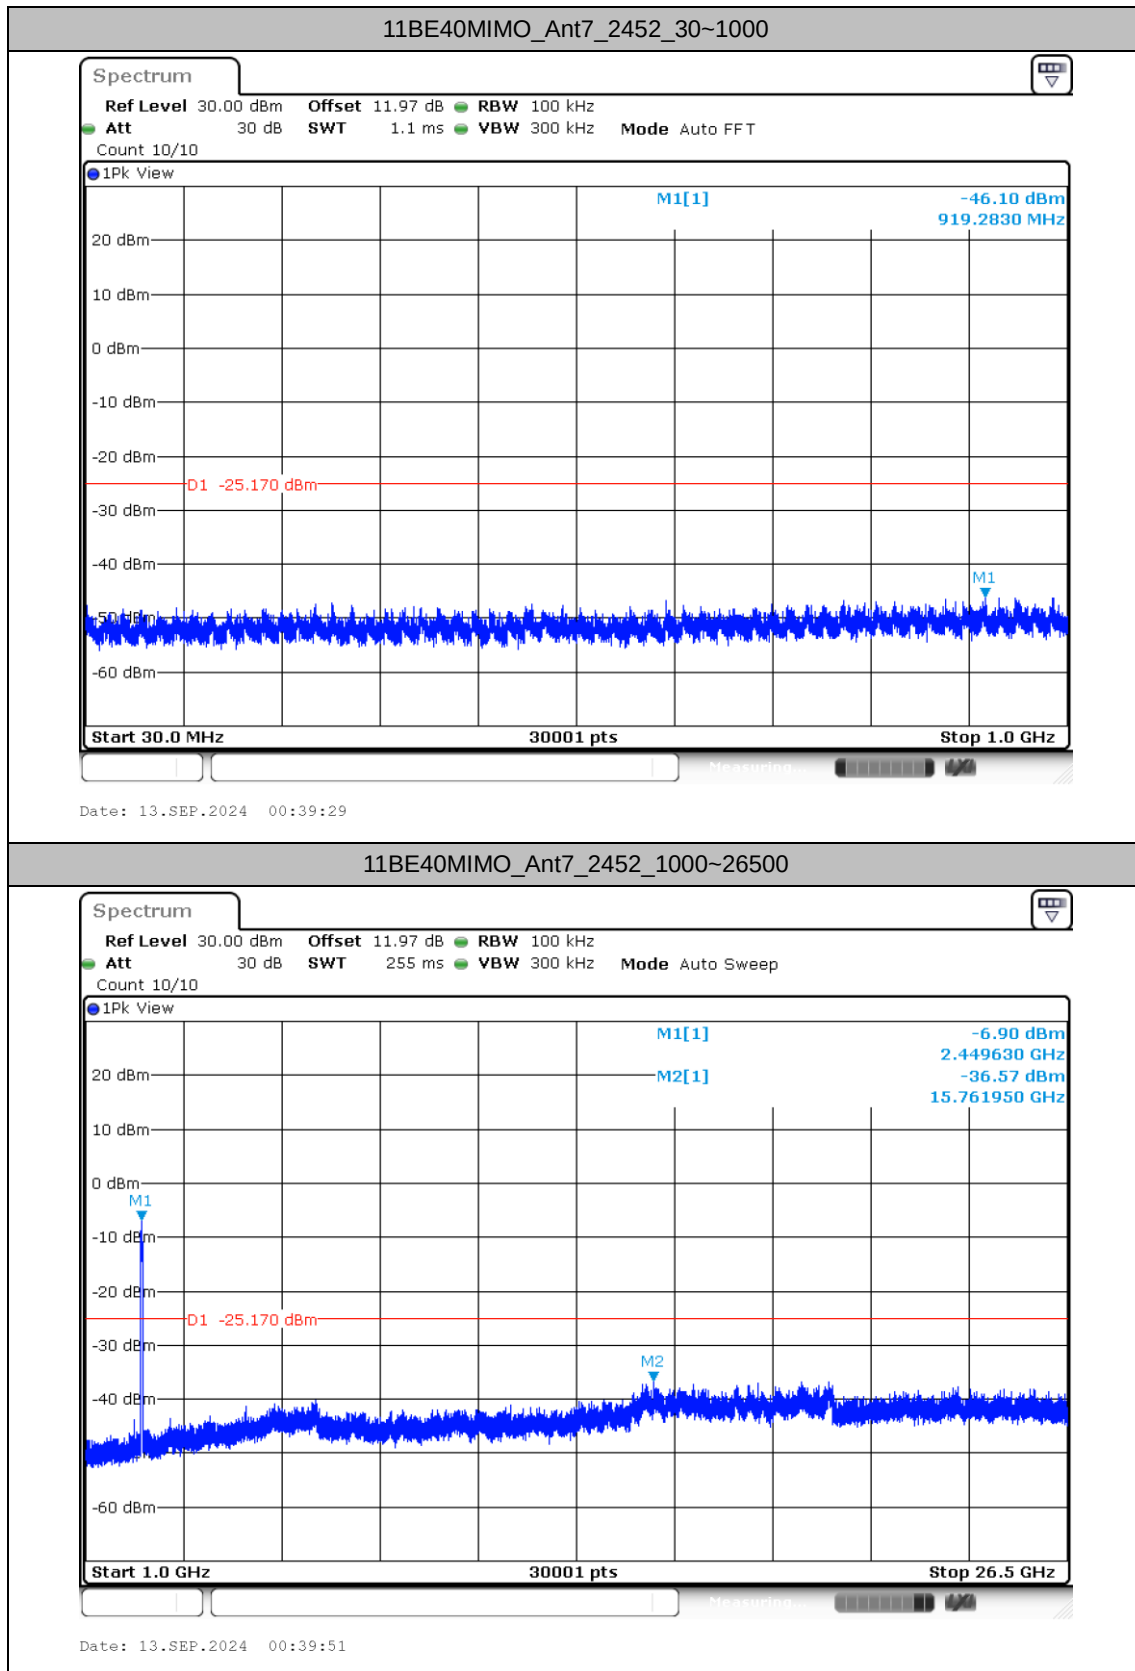

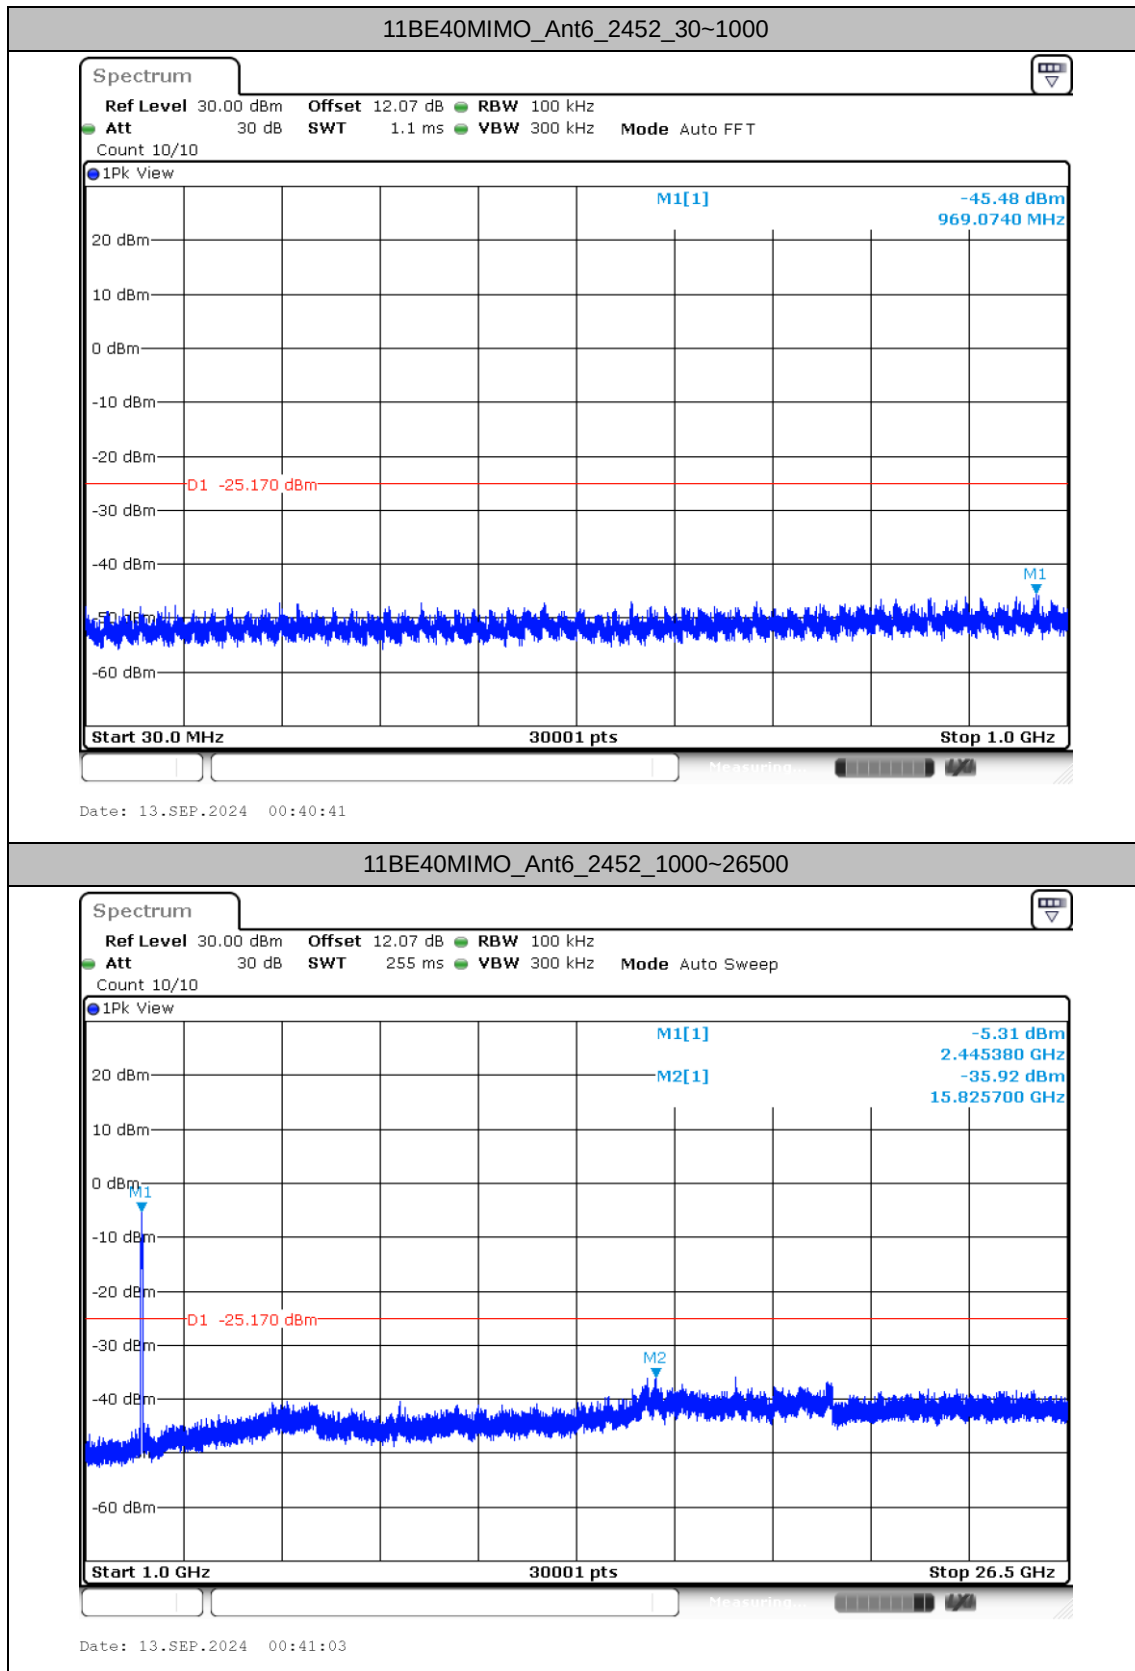

**MRU****Maximum conducted output power****Test Result Peak**

Test Mode	Antenna	Channel	Mru Type	Mru Index	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11BE20MIMO	Ant7	2412	52+26_OFDMA	1	4.5	11.92	≤30.00	11.92	≤36.00	PASS
			106+26_OFDMA	1	6	13.94	≤30.00	13.94	≤36.00	PASS
	Ant6	2412	52+26_OFDMA	1	4.5	12.88	≤30.00	13.22	≤36.00	PASS
			106+26_OFDMA	1	6	14.19	≤30.00	14.53	≤36.00	PASS
	total	2412	52+26_OFDMA	1	---	15.44	≤30.00	15.78	≤36.00	PASS
			106+26_OFDMA	1	---	17.08	≤30.00	17.42	≤36.00	PASS
	Ant7	2462	52+26_OFDMA	3	6.5	14.01	≤30.00	14.01	≤36.00	PASS
			106+26_OFDMA	2	8	16.28	≤30.00	16.28	≤36.00	PASS
	Ant6	2462	52+26_OFDMA	3	6.5	13.52	≤30.00	13.86	≤36.00	PASS
			106+26_OFDMA	2	8	16.02	≤30.00	16.36	≤36.00	PASS
	total	2462	52+26_OFDMA	3	---	16.78	≤30.00	17.12	≤36.00	PASS
			106+26_OFDMA	2	---	19.16	≤30.00	19.50	≤36.00	PASS



Test Result Average

Test Mode	Antenna	Channel	Mru Type	Mru Index	Set Power	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11BE20MIMO	Ant7	2412	52+26_OFDMA	1	4.5	3.65	99.56	0.02	3.67	≤30.00	0.00	3.67	≤36.00	PASS
			106+26_OFDMA	1	6	5.42	98.97	0.04	5.46	≤30.00	0.00	5.46	≤36.00	PASS
	Ant6	2412	52+26_OFDMA	1	4.5	4.87	99.56	0.02	4.89	≤30.00	0.34	5.23	≤36.00	PASS
			106+26_OFDMA	1	6	6.18	98.97	0.04	6.22	≤30.00	0.34	6.56	≤36.00	PASS
	total	2412	52+26_OFDMA	1	---	---	---	---	7.33	≤30.00	0.34	7.67	≤36.00	PASS
			106+26_OFDMA	1	---	---	---	---	8.87	≤30.00	0.34	9.21	≤36.00	PASS
	Ant7	2462	52+26_OFDMA	3	6.5	4.96	99.56	0.02	4.98	≤30.00	0.00	4.98	≤36.00	PASS
			106+26_OFDMA	2	8	7.22	98.98	0.04	7.26	≤30.00	0.00	7.26	≤36.00	PASS
	Ant6	2462	52+26_OFDMA	3	6.5	5.36	99.56	0.02	5.38	≤30.00	0.34	5.72	≤36.00	PASS
			106+26_OFDMA	2	8	7.33	99.32	0.03	7.36	≤30.00	0.34	7.70	≤36.00	PASS
	total	2462	52+26_OFDMA	3	---	---	---	---	8.19	≤30.00	0.34	8.53	≤36.00	PASS
			106+26_OFDMA	2	---	---	---	---	10.32	≤30.00	0.34	10.66	≤36.00	PASS




Maximum power spectral density



Test Result



TestMode	Antenna	Channel	Mru Type	Mru Index	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11BE20MIMO	Ant7	2412	52+26_OFDMA	1	-17.81	≤8.00	PASS
			106+26_OFDMA	1	-16.65	≤8.00	PASS
	Ant6	2412	52+26_OFDMA	1	-16.56	≤8.00	PASS
			106+26_OFDMA	1	-16.69	≤8.00	PASS
	total	2412	52+26_OFDMA	1	-14.13	≤8.00	PASS
			106+26_OFDMA	1	-13.66	≤8.00	PASS
	Ant7	2462	52+26_OFDMA	3	-15.48	≤8.00	PASS
			106+26_OFDMA	2	-14.99	≤8.00	PASS
	Ant6	2462	52+26_OFDMA	3	-15.00	≤8.00	PASS
			106+26_OFDMA	2	-14.88	≤8.00	PASS
	total	2462	52+26_OFDMA	3	-12.22	≤8.00	PASS
			106+26_OFDMA	2	-11.92	≤8.00	PASS





Test Graphs

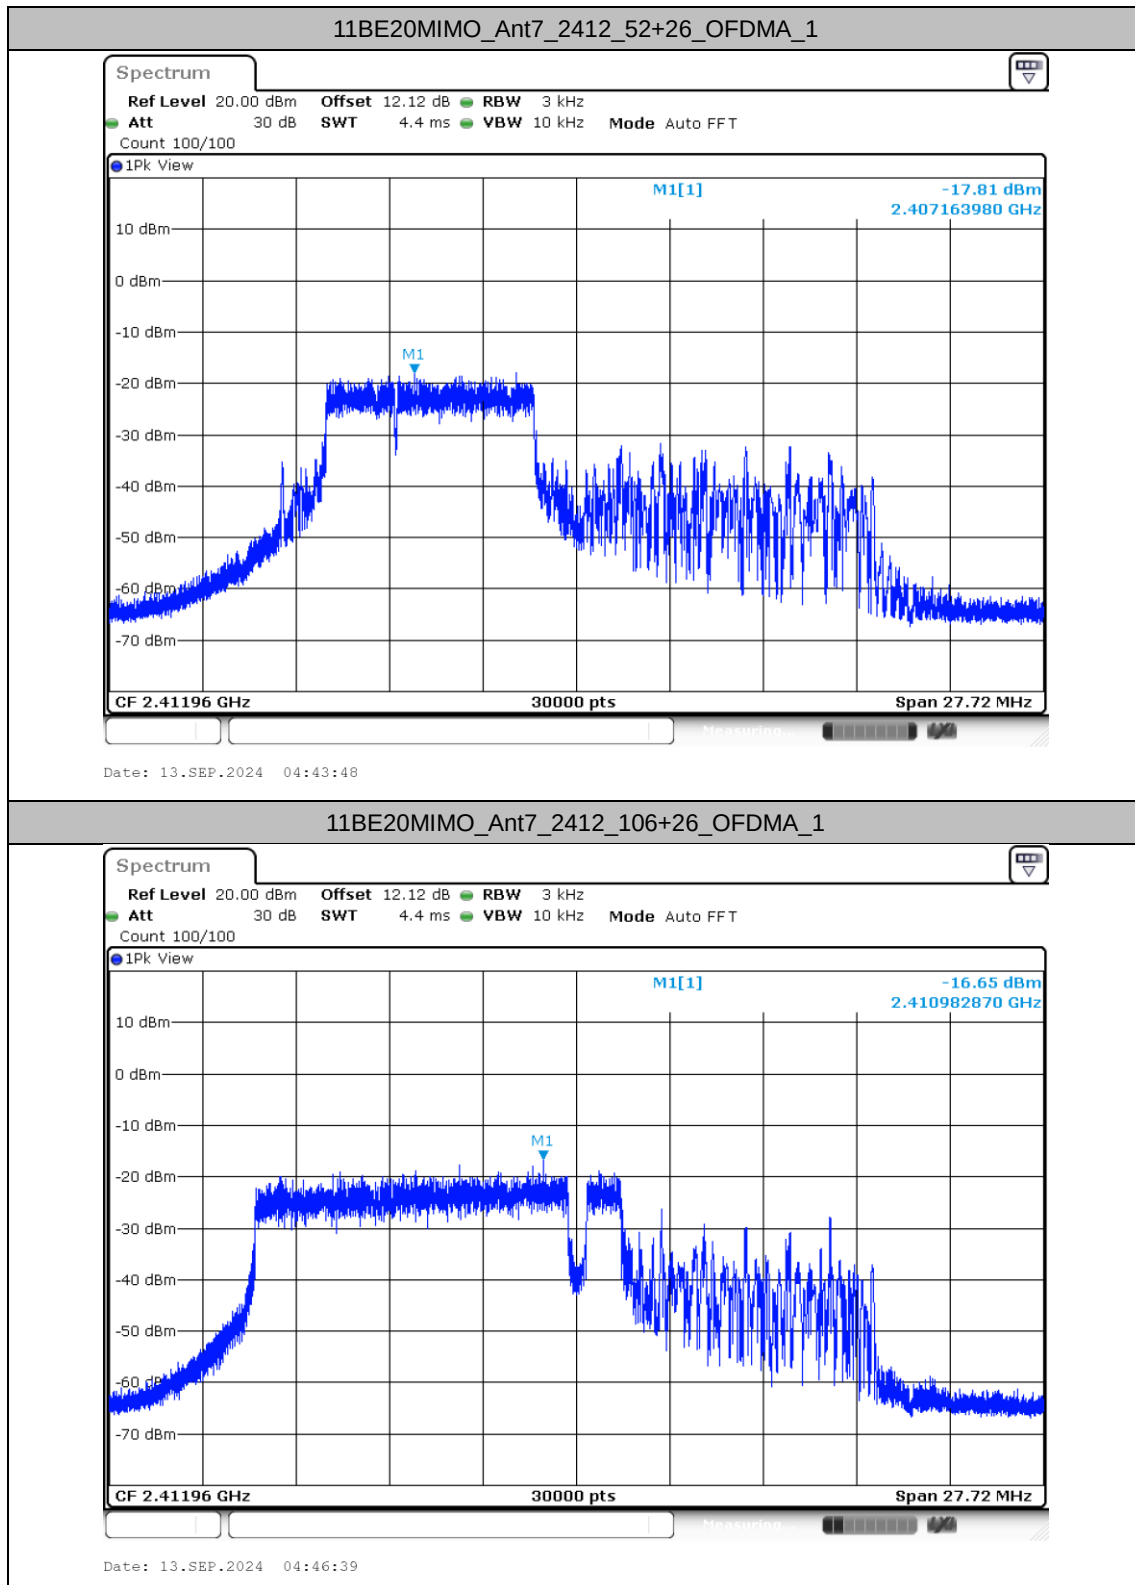

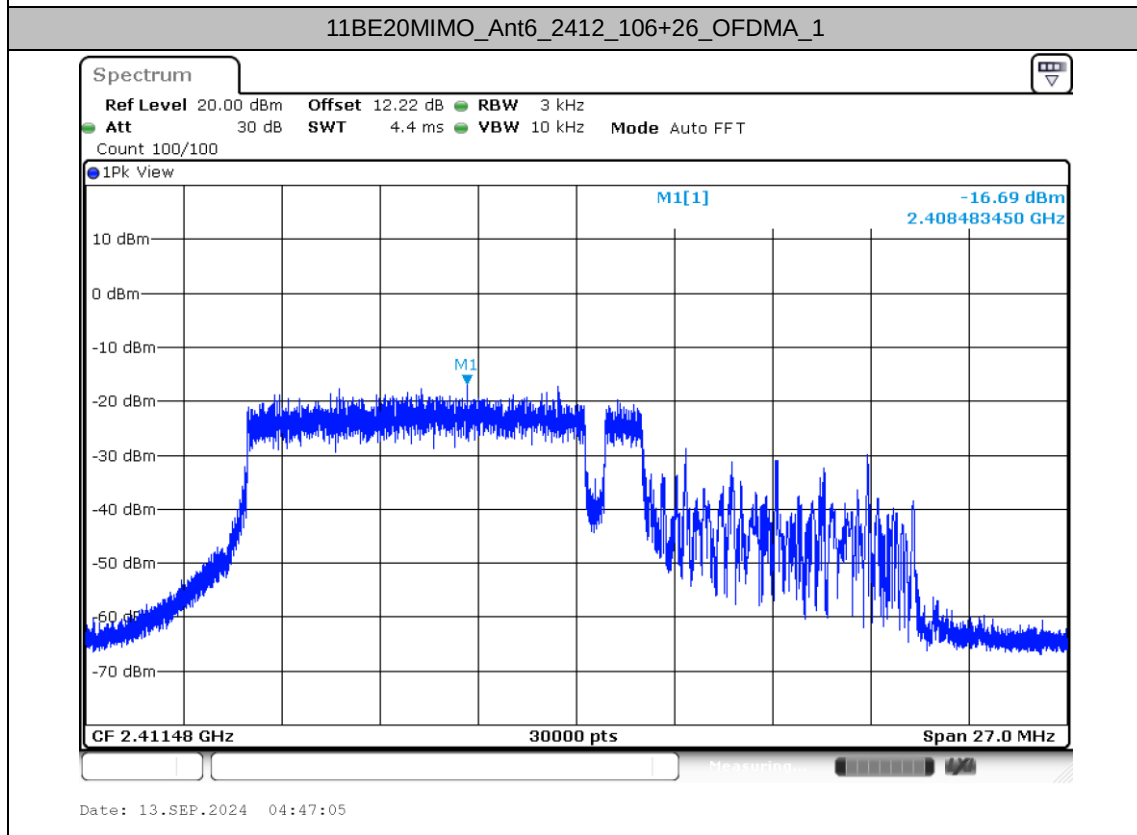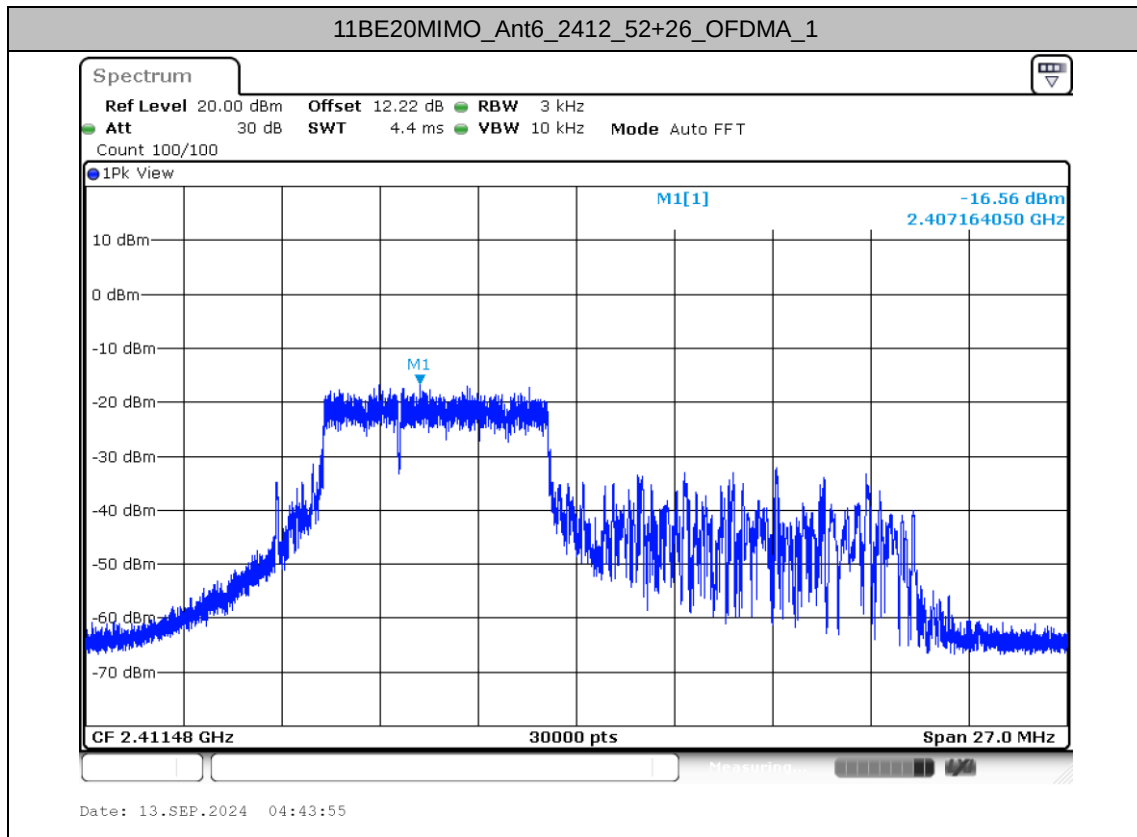

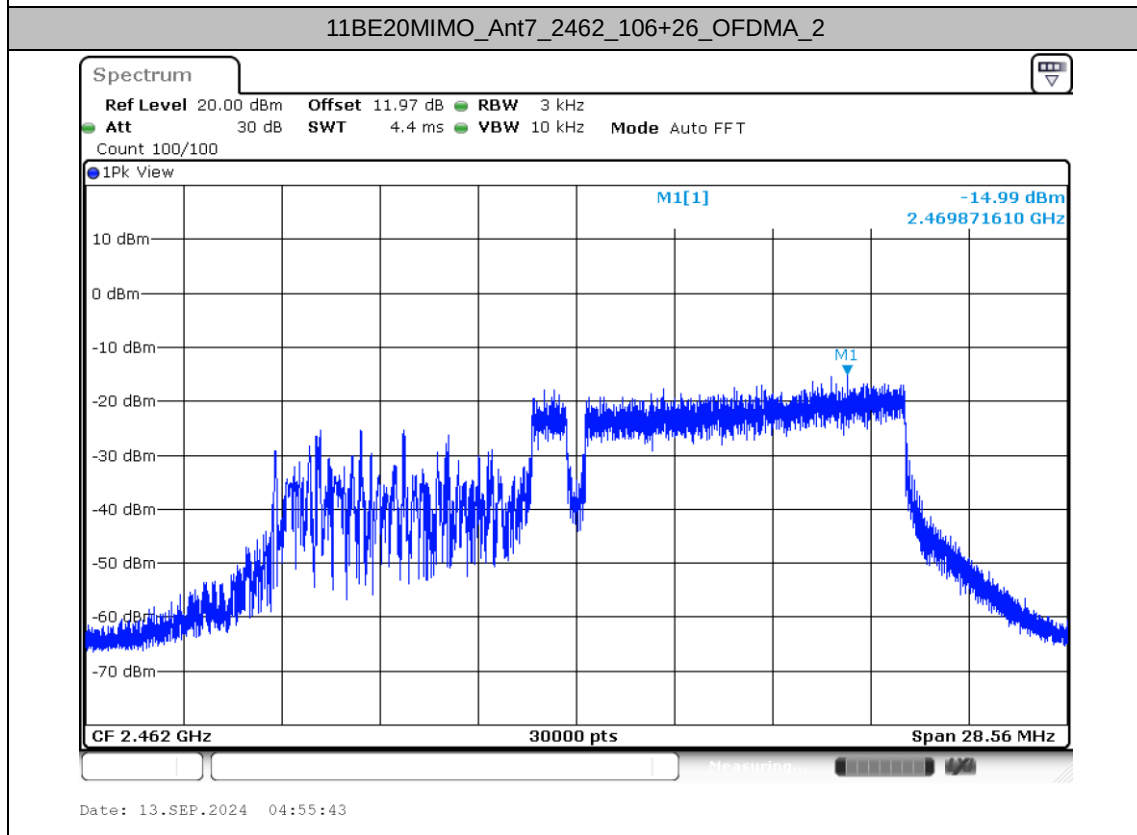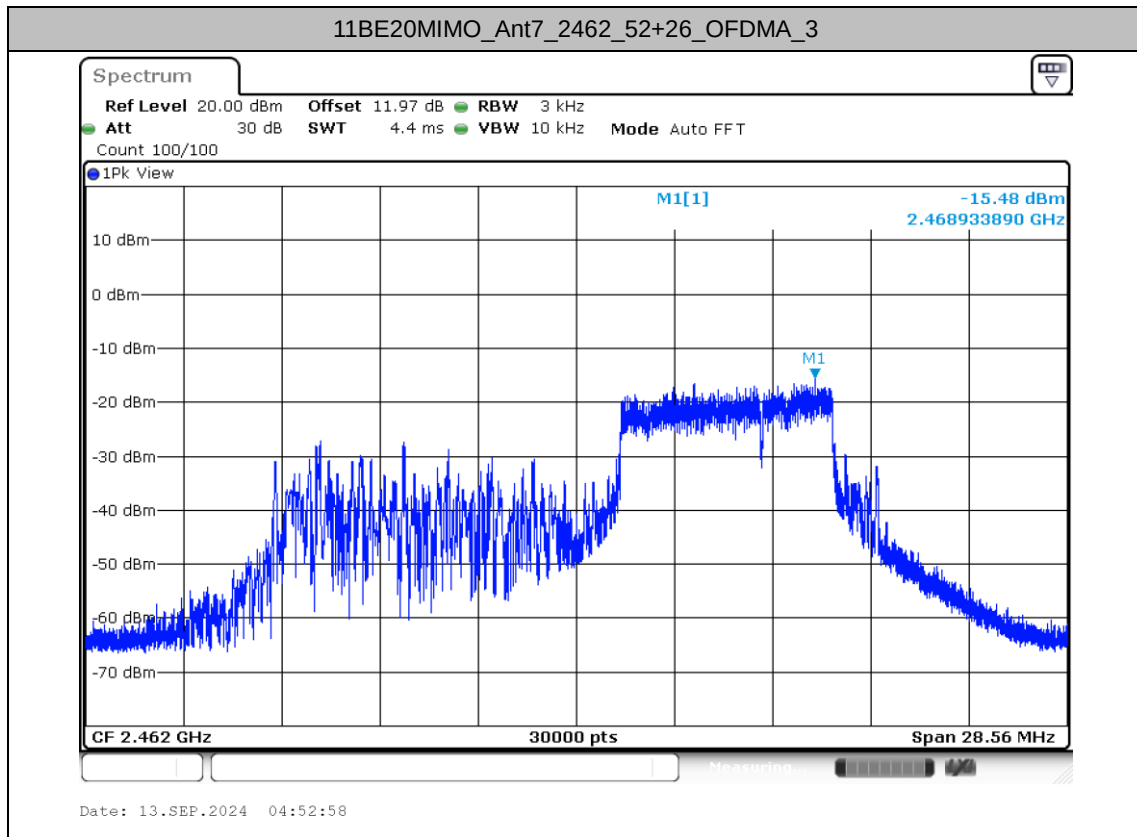

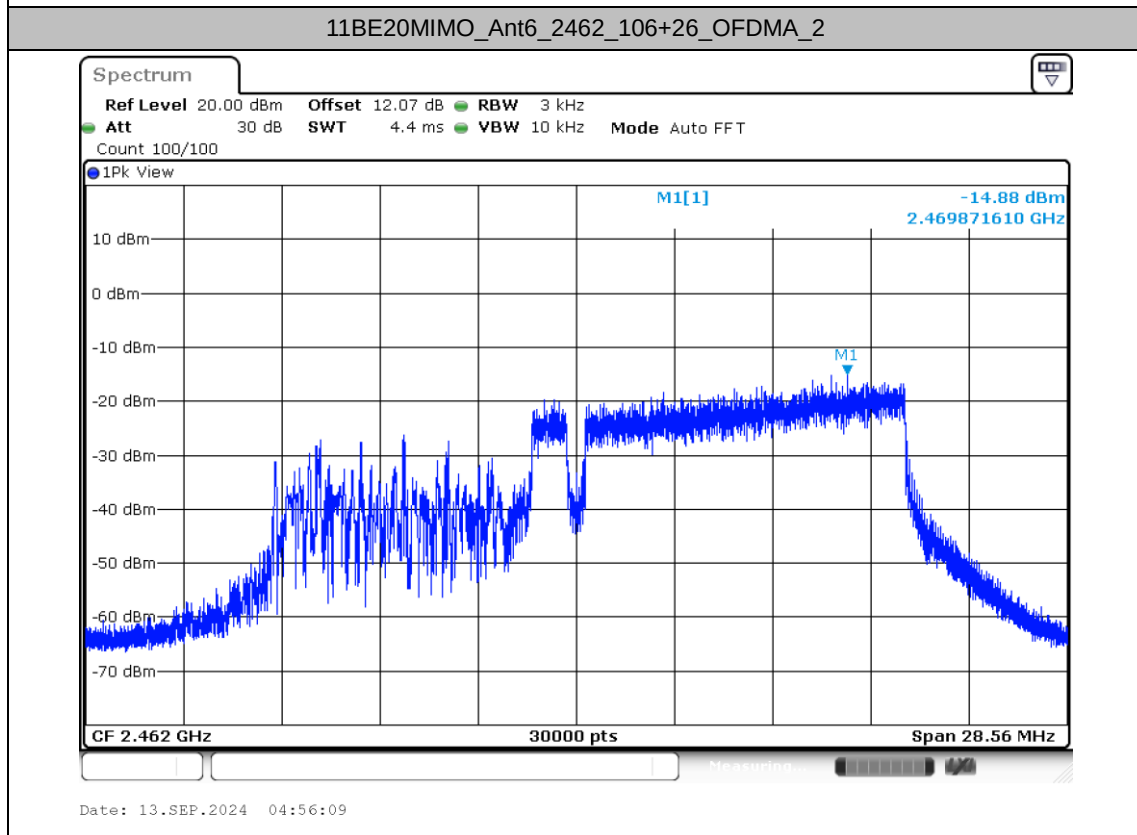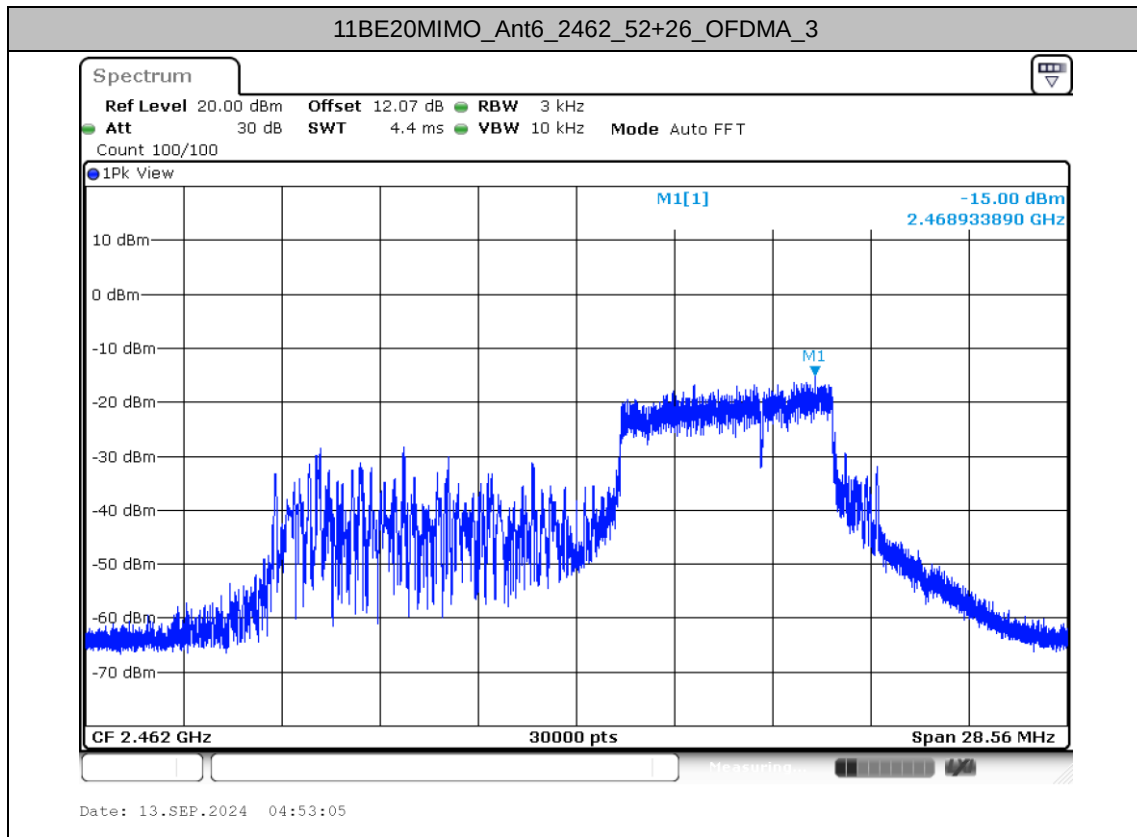




Duty Cycle


Test Result


TestMode	Antenna	Channel	Mru Type	Mru Index	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11BE20MIMO	Ant7	2412	52+26_OFDMA	1	4.56	4.58	99.56
			106+26_OFDMA	1	2.89	2.92	98.97
	Ant6	2412	52+26_OFDMA	1	4.55	4.57	99.56
			106+26_OFDMA	1	2.89	2.92	98.97
	Ant7	2462	52+26_OFDMA	3	4.55	4.57	99.56
			106+26_OFDMA	2	2.90	2.93	98.98
	Ant6	2462	52+26_OFDMA	3	4.55	4.57	99.56
			106+26_OFDMA	2	2.90	2.92	99.32





Test Graphs

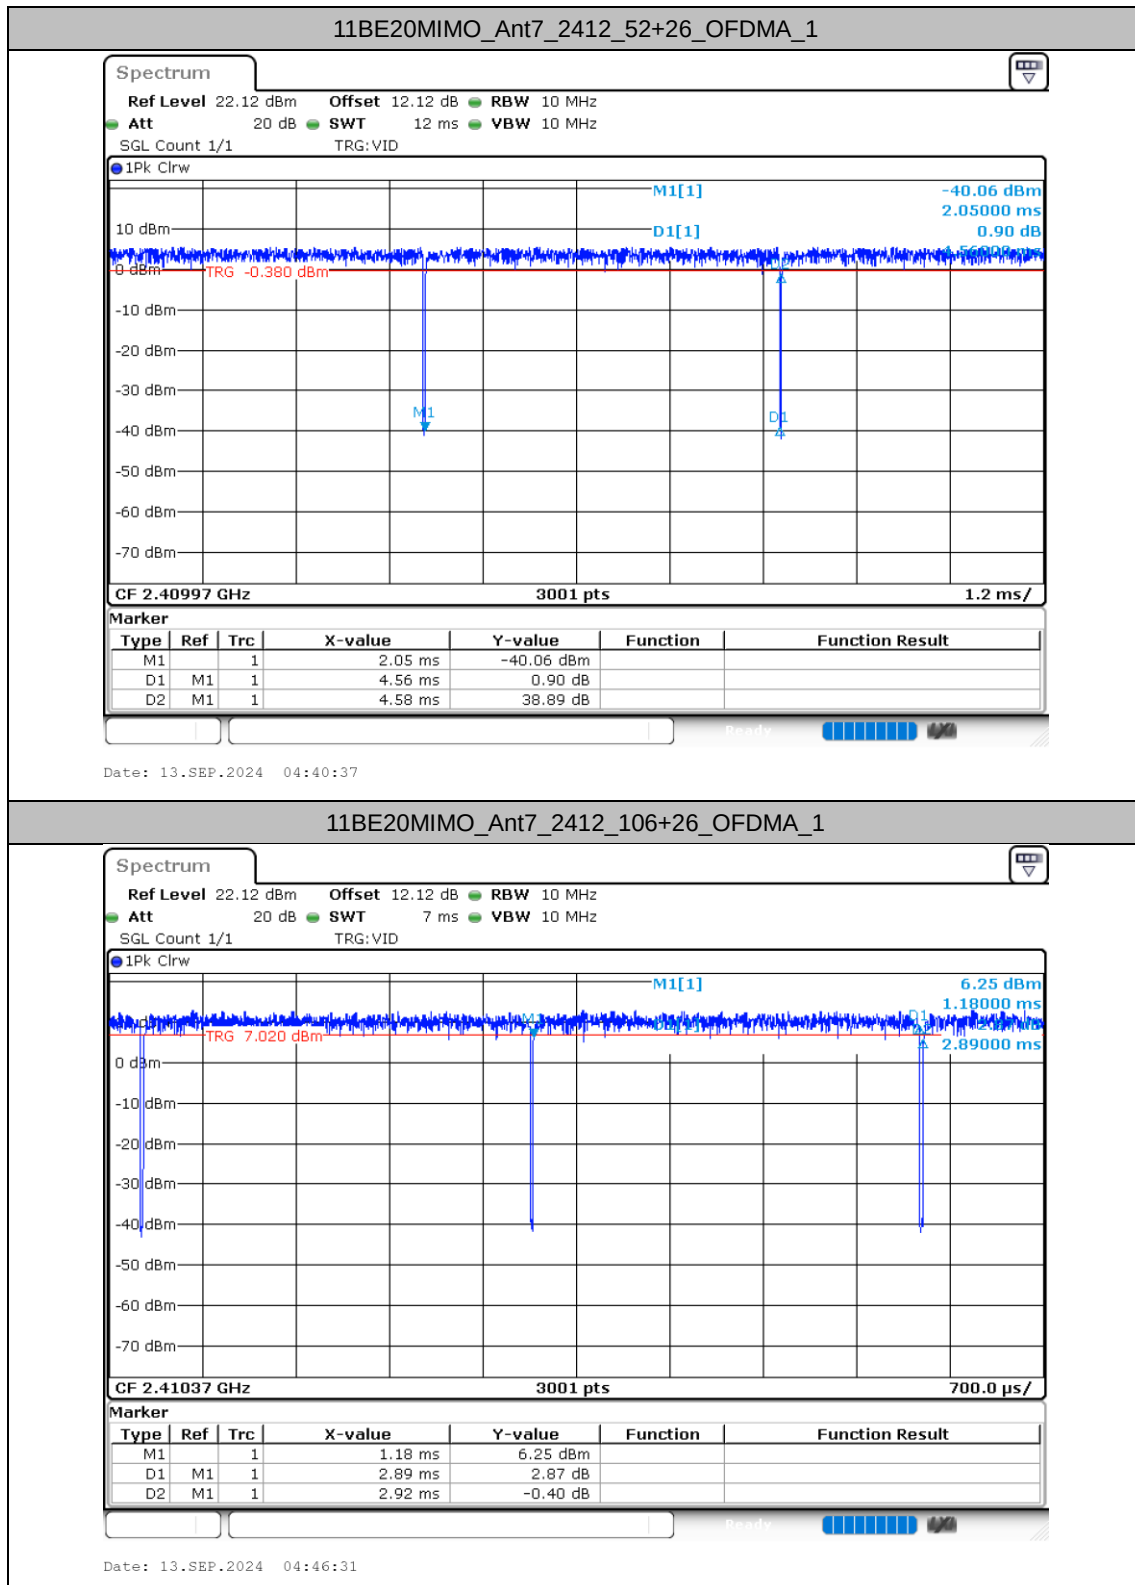

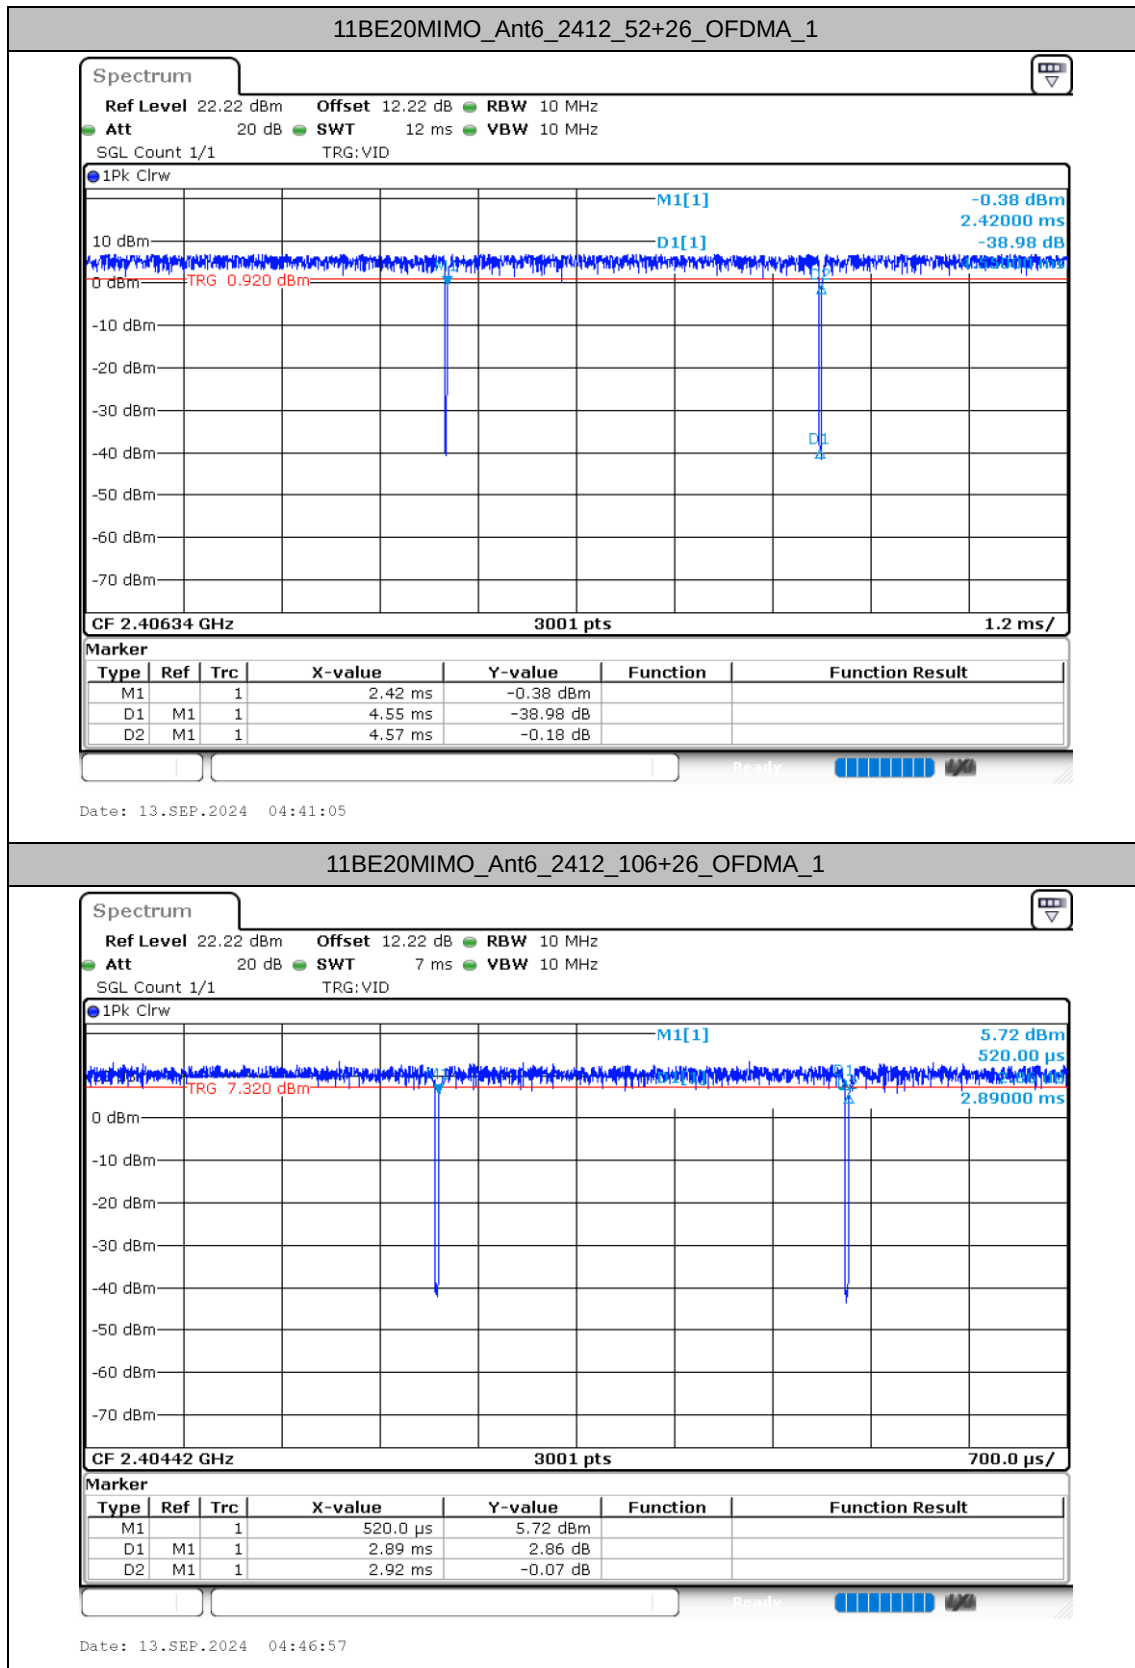

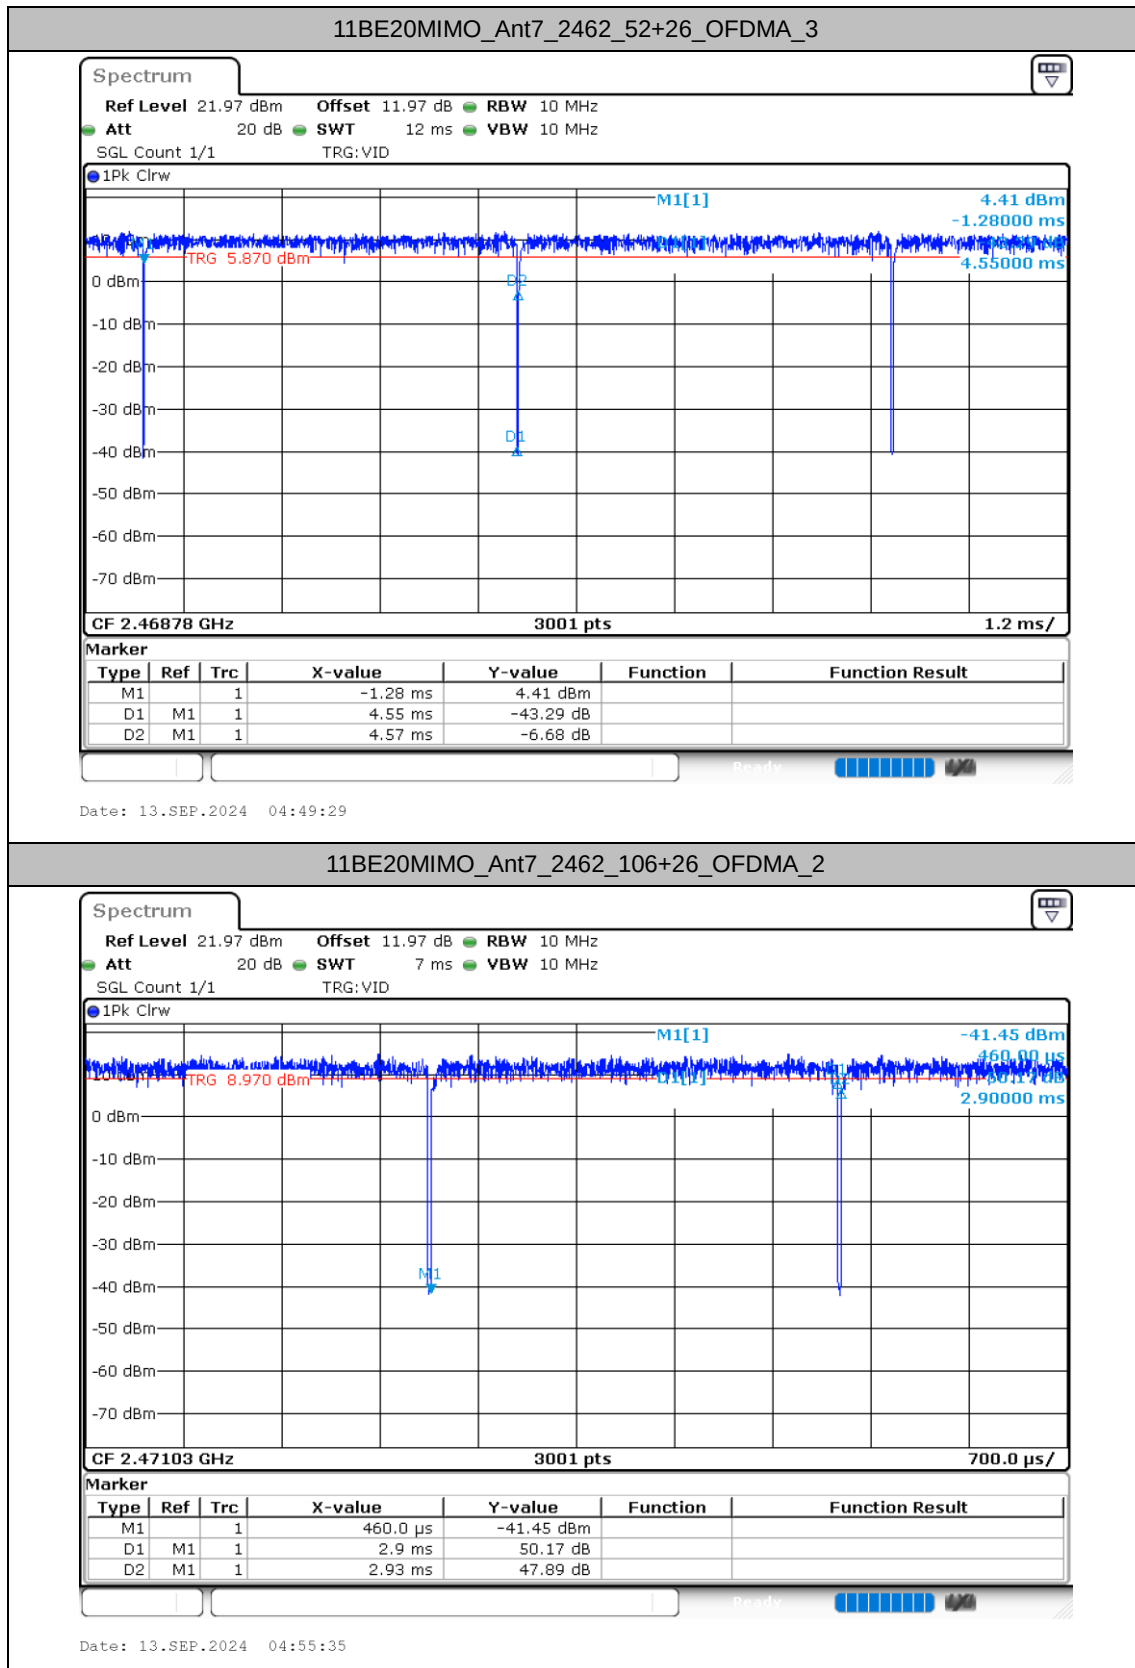

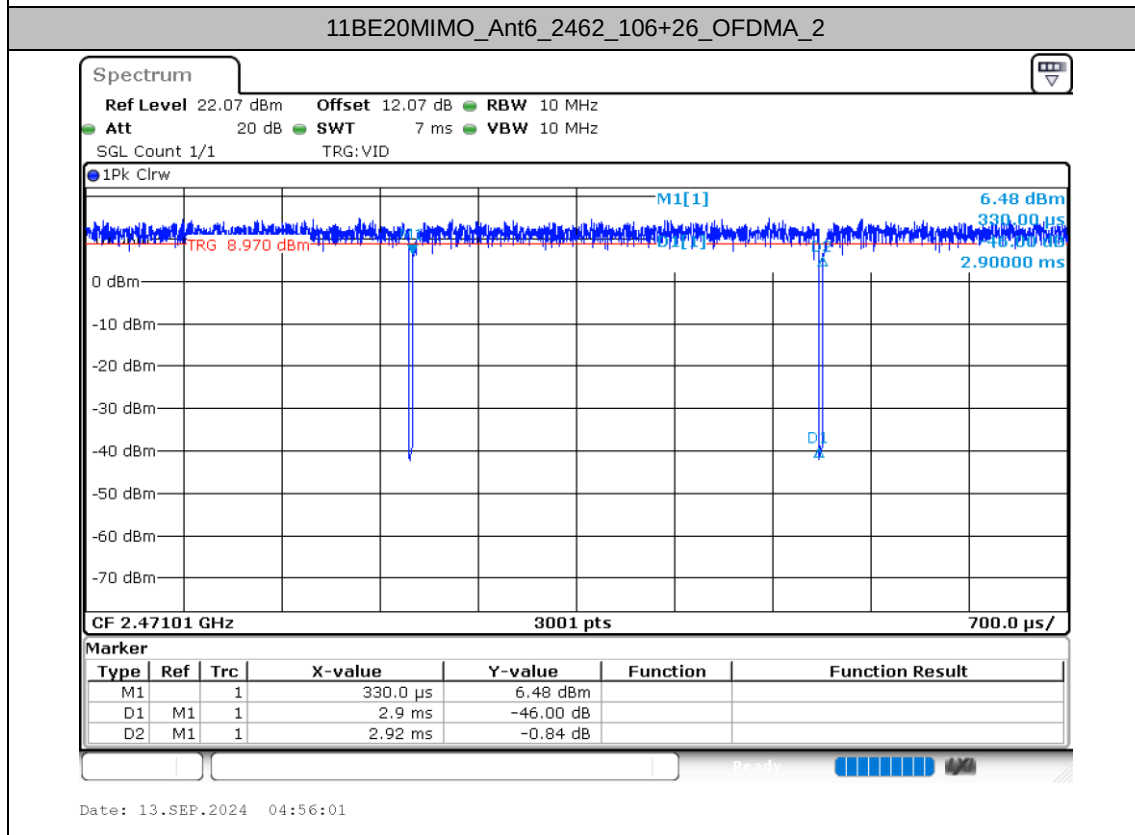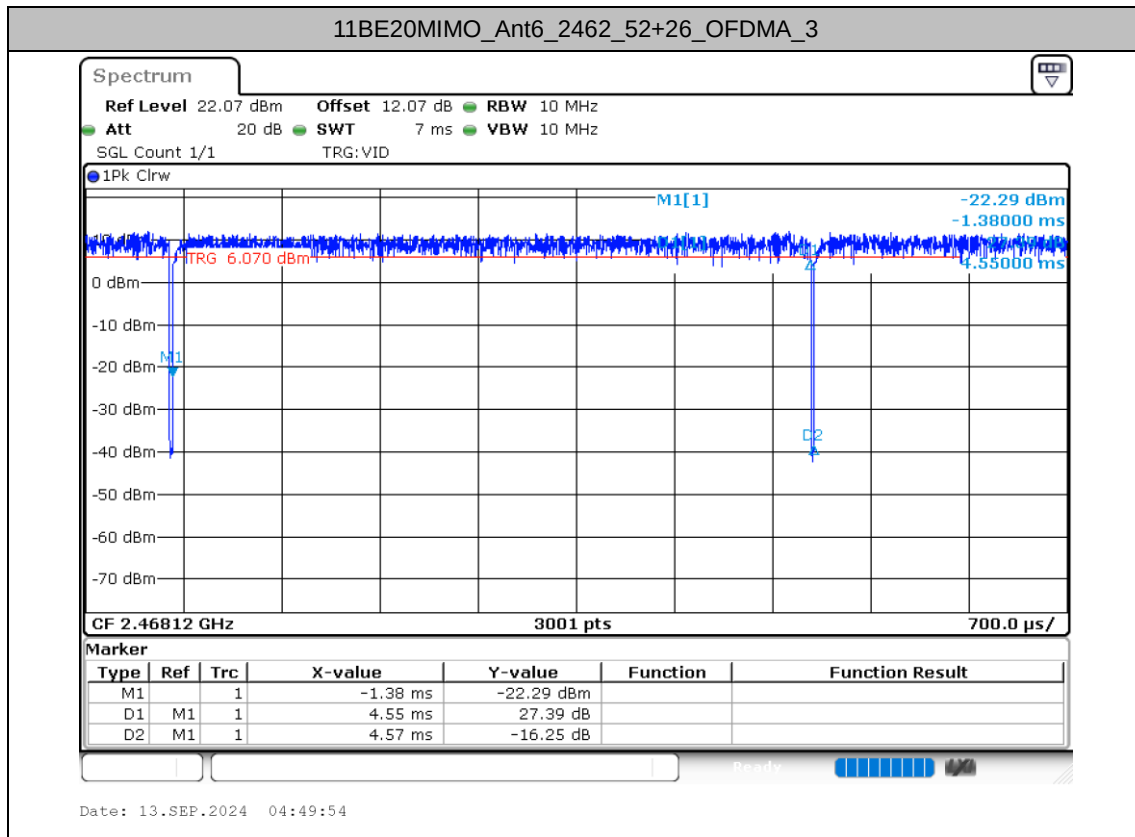



Single RU


DTS Bandwidth


Test Result

Test Mode	Antenna	Freq (MHz)	Ru Size	Ru Index	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11BE20MIMO	Ant7	2412	26Tone	RU0	2.08	2402.44	2404.52	0.5	PASS
	Ant6	2412	26Tone	RU0	2.08	2402.48	2404.56	0.5	PASS
	Ant7	2462	26Tone	RU8	2.08	2469.44	2471.52	0.5	PASS
	Ant6	2462	26Tone	RU8	2.04	2469.48	2471.52	0.5	PASS



Test Graphs

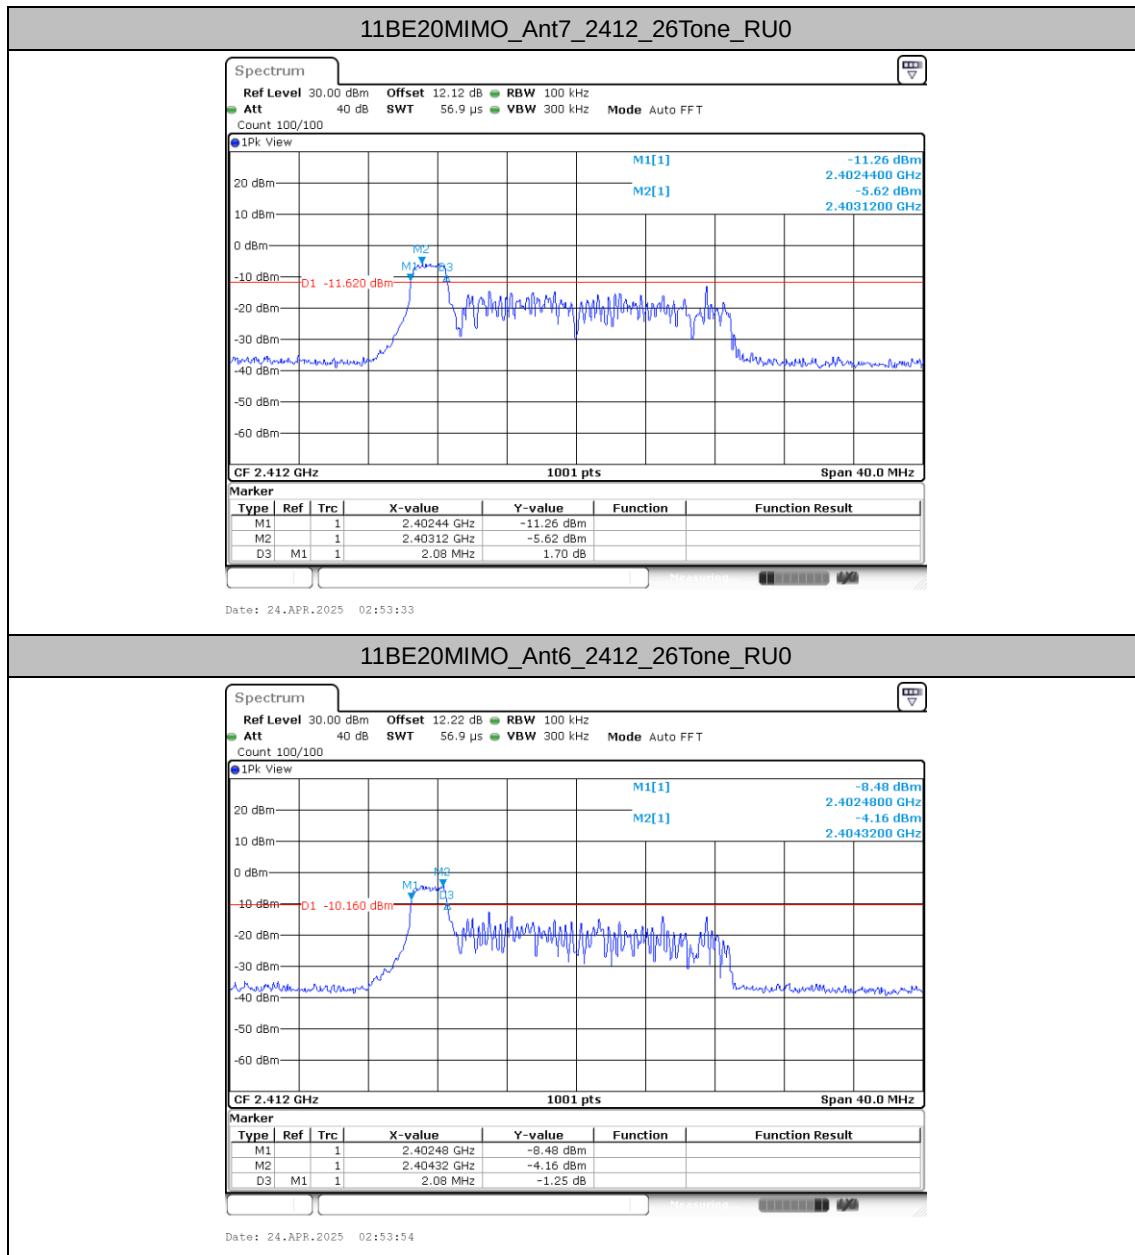

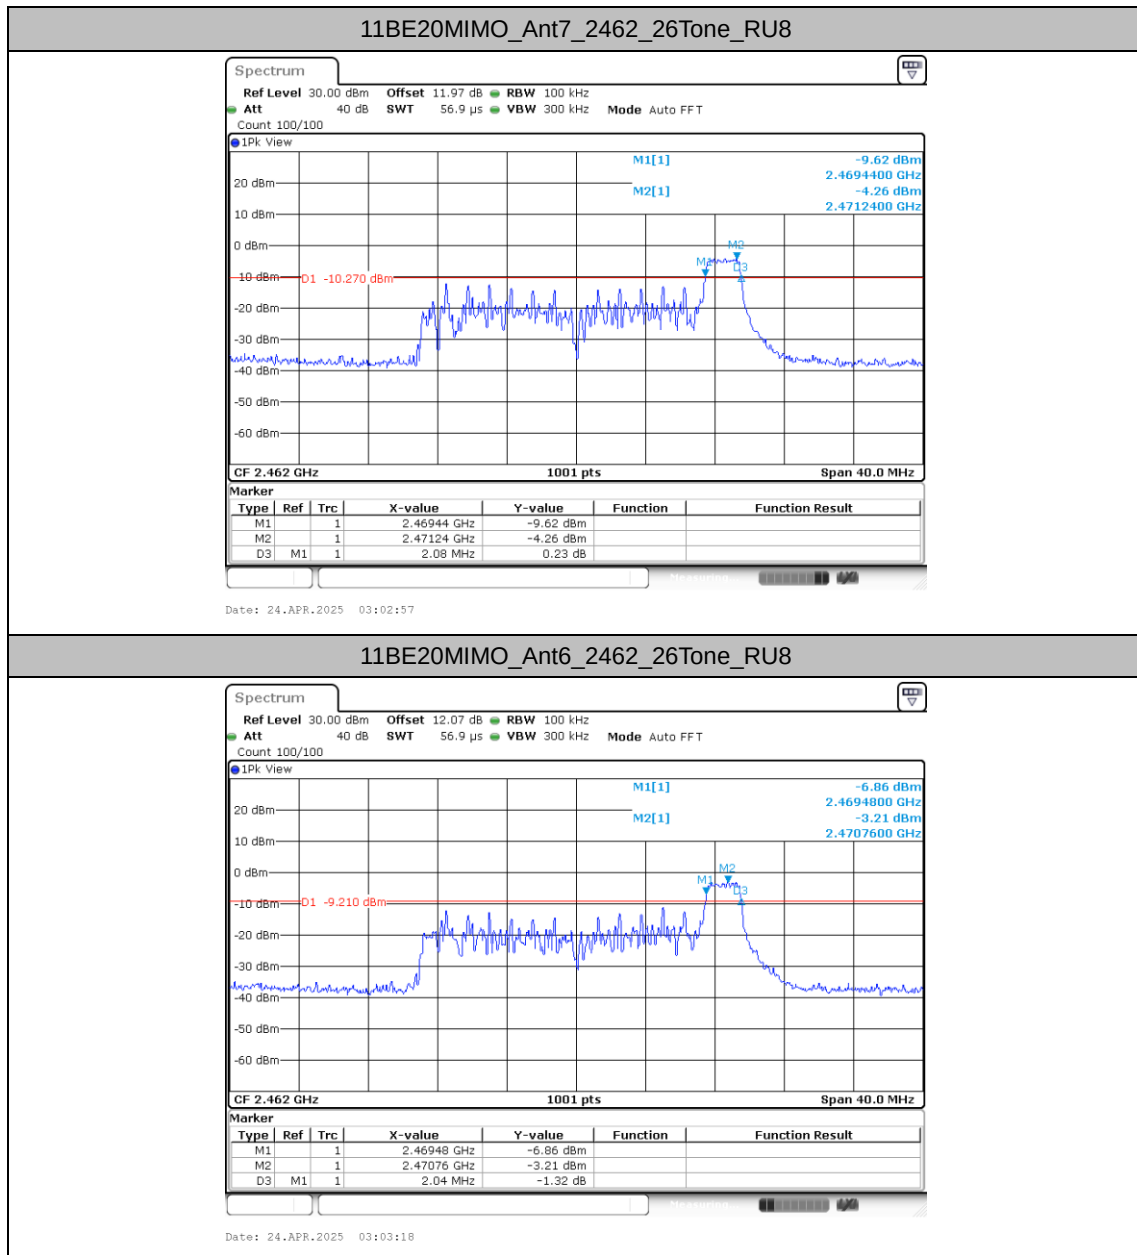



Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Freq(MHz)	Ru Size	Ru Index	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11BE20MIMO	Ant7	2412	26Tone	RU0	0	7.03	≤30.00	7.03	≤36.00	PASS
			52Tone	RU37	3	10.13	≤30.00	10.13	≤36.00	PASS
			106Tone	RU53	4.5	11.99	≤30.00	11.99	≤36.00	PASS
	Ant6	2412	26Tone	RU0	0	7.81	≤30.00	8.15	≤36.00	PASS
			52Tone	RU37	3	11.11	≤30.00	11.45	≤36.00	PASS
			106Tone	RU53	4.5	13.09	≤30.00	13.43	≤36.00	PASS
	total	2412	26Tone	RU0	---	10.45	≤30.00	10.79	≤36.00	PASS
			52Tone	RU37	---	13.66	≤30.00	14.00	≤36.00	PASS
			106Tone	RU53	---	15.59	≤30.00	15.93	≤36.00	PASS
	Ant7	2462	26Tone	RU8	1	8.24	≤30.00	8.24	≤36.00	PASS
			52Tone	RU40	3.5	10.52	≤30.00	10.52	≤36.00	PASS
			106Tone	RU54	6	13.95	≤30.00	13.95	≤36.00	PASS
	Ant6	2462	26Tone	RU8	1	8.85	≤30.00	9.19	≤36.00	PASS
			52Tone	RU40	3.5	11.37	≤30.00	11.71	≤36.00	PASS
			106Tone	RU54	6	13.95	≤30.00	14.29	≤36.00	PASS
	total	2462	26Tone	RU8	---	11.57	≤30.00	11.91	≤36.00	PASS
			52Tone	RU40	---	13.98	≤30.00	14.32	≤36.00	PASS
			106Tone	RU54	---	16.96	≤30.00	17.30	≤36.00	PASS



Test Result Average

Test Mode	Antenna	Freq (MHz)	Ru Size	Ru Index	Set Power	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11BE20MIMO	Ant7	2412	26Tone	RU0	0	-1.43	99.82	0.01	-1.42	≤30.00	0.00	-1.42	≤36.00	PASS
			52Tone	RU37	3	1.82	99.82	0.01	1.83	≤30.00	0.00	1.83	≤36.00	PASS
			106Tone	RU53	4.5	3.65	99.82	0.01	3.66	≤30.00	0.00	3.66	≤36.00	PASS
	Ant6	2412	26Tone	RU0	0	-0.02	99.63	0.02	0.00	≤30.00	0.34	0.34	≤36.00	PASS
			52Tone	RU37	3	3.47	99.63	0.02	3.49	≤30.00	0.34	3.83	≤36.00	PASS
			106Tone	RU53	4.5	5.09	99.63	0.02	5.11	≤30.00	0.34	5.45	≤36.00	PASS
	total	2412	26Tone	RU0	---	---	---	---	2.36	≤30.00	0.34	2.70	≤36.00	PASS
			52Tone	RU37	---	---	---	---	5.75	≤30.00	0.34	6.09	≤36.00	PASS
			106Tone	RU53	---	---	---	---	7.46	≤30.00	0.34	7.80	≤36.00	PASS
	Ant7	2462	26Tone	RU8	1	0.12	99.82	0.01	0.13	≤30.00	0.00	0.13	≤36.00	PASS
			52Tone	RU40	3.5	2.10	99.82	0.01	2.11	≤30.00	0.00	2.11	≤36.00	PASS
			106Tone	RU54	6	5.12	99.82	0.01	5.13	≤30.00	0.00	5.13	≤36.00	PASS
	Ant6	2462	26Tone	RU8	1	1.03	99.63	0.02	1.05	≤30.00	0.34	1.39	≤36.00	PASS
			52Tone	RU40	3.5	3.51	99.63	0.02	3.53	≤30.00	0.34	3.87	≤36.00	PASS
			106Tone	RU54	6	5.67	99.63	0.02	5.69	≤30.00	0.34	6.03	≤36.00	PASS
	total	2462	26Tone	RU8	---	---	---	---	3.62	≤30.00	0.34	3.96	≤36.00	PASS
			52Tone	RU40	---	---	---	---	5.89	≤30.00	0.34	6.23	≤36.00	PASS
			106Tone	RU54	---	---	---	---	8.43	≤30.00	0.34	8.77	≤36.00	PASS




Maximum power spectral density


Test Result



TestMode	Antenna	Freq(MHz)	RuSize	RuIndex	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11BE20MIMO	Ant7	2412	26Tone	RU0	-16.80	≤8.00	PASS
			52Tone	RU37	-17.61	≤8.00	PASS
			106Tone	RU53	-17.44	≤8.00	PASS
	Ant6	2412	26Tone	RU0	-15.49	≤8.00	PASS
			52Tone	RU37	-16.10	≤8.00	PASS
			106Tone	RU53	-16.21	≤8.00	PASS
	total	2412	26Tone	RU0	-13.09	≤8.00	PASS
			52Tone	RU37	-13.78	≤8.00	PASS
			106Tone	RU53	-13.77	≤8.00	PASS
	Ant7	2462	26Tone	RU8	-14.48	≤8.00	PASS
			52Tone	RU40	-16.18	≤8.00	PASS
			106Tone	RU54	-15.38	≤8.00	PASS
	Ant6	2462	26Tone	RU8	-13.53	≤8.00	PASS
			52Tone	RU40	-14.85	≤8.00	PASS
			106Tone	RU54	-14.92	≤8.00	PASS
	total	2462	26Tone	RU8	-10.97	≤8.00	PASS
			52Tone	RU40	-12.45	≤8.00	PASS
			106Tone	RU54	-12.13	≤8.00	PASS






Test Graphs


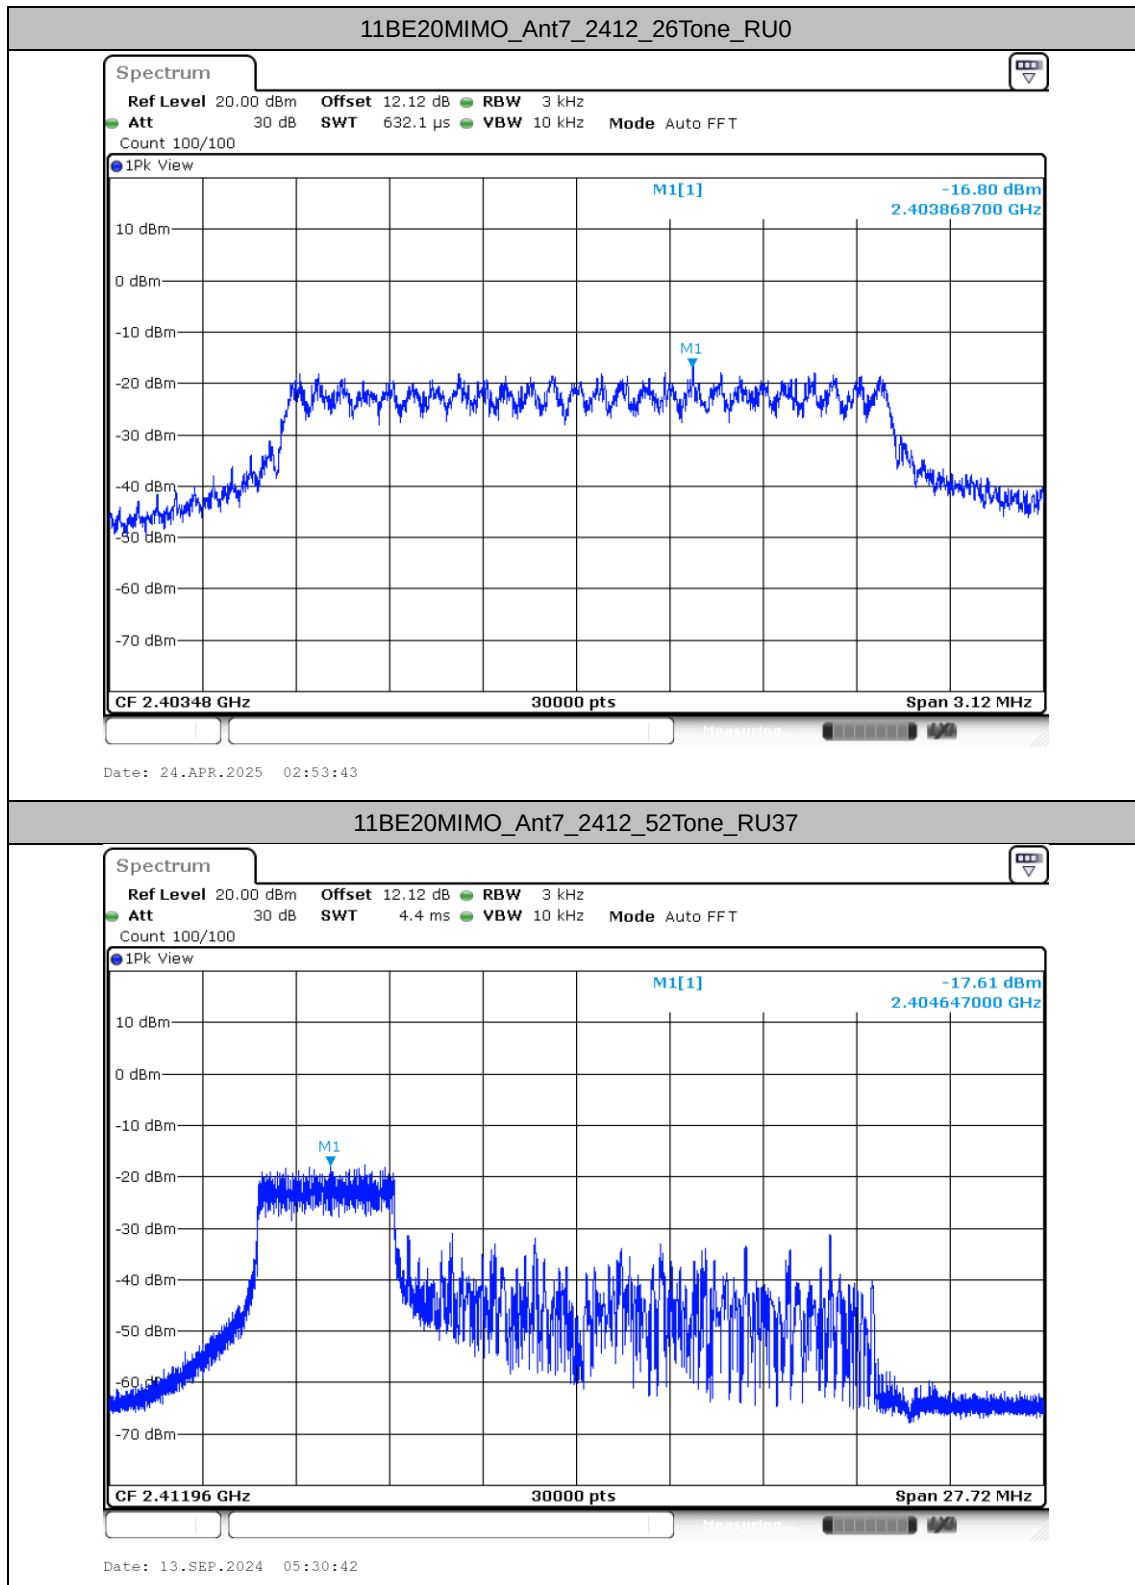


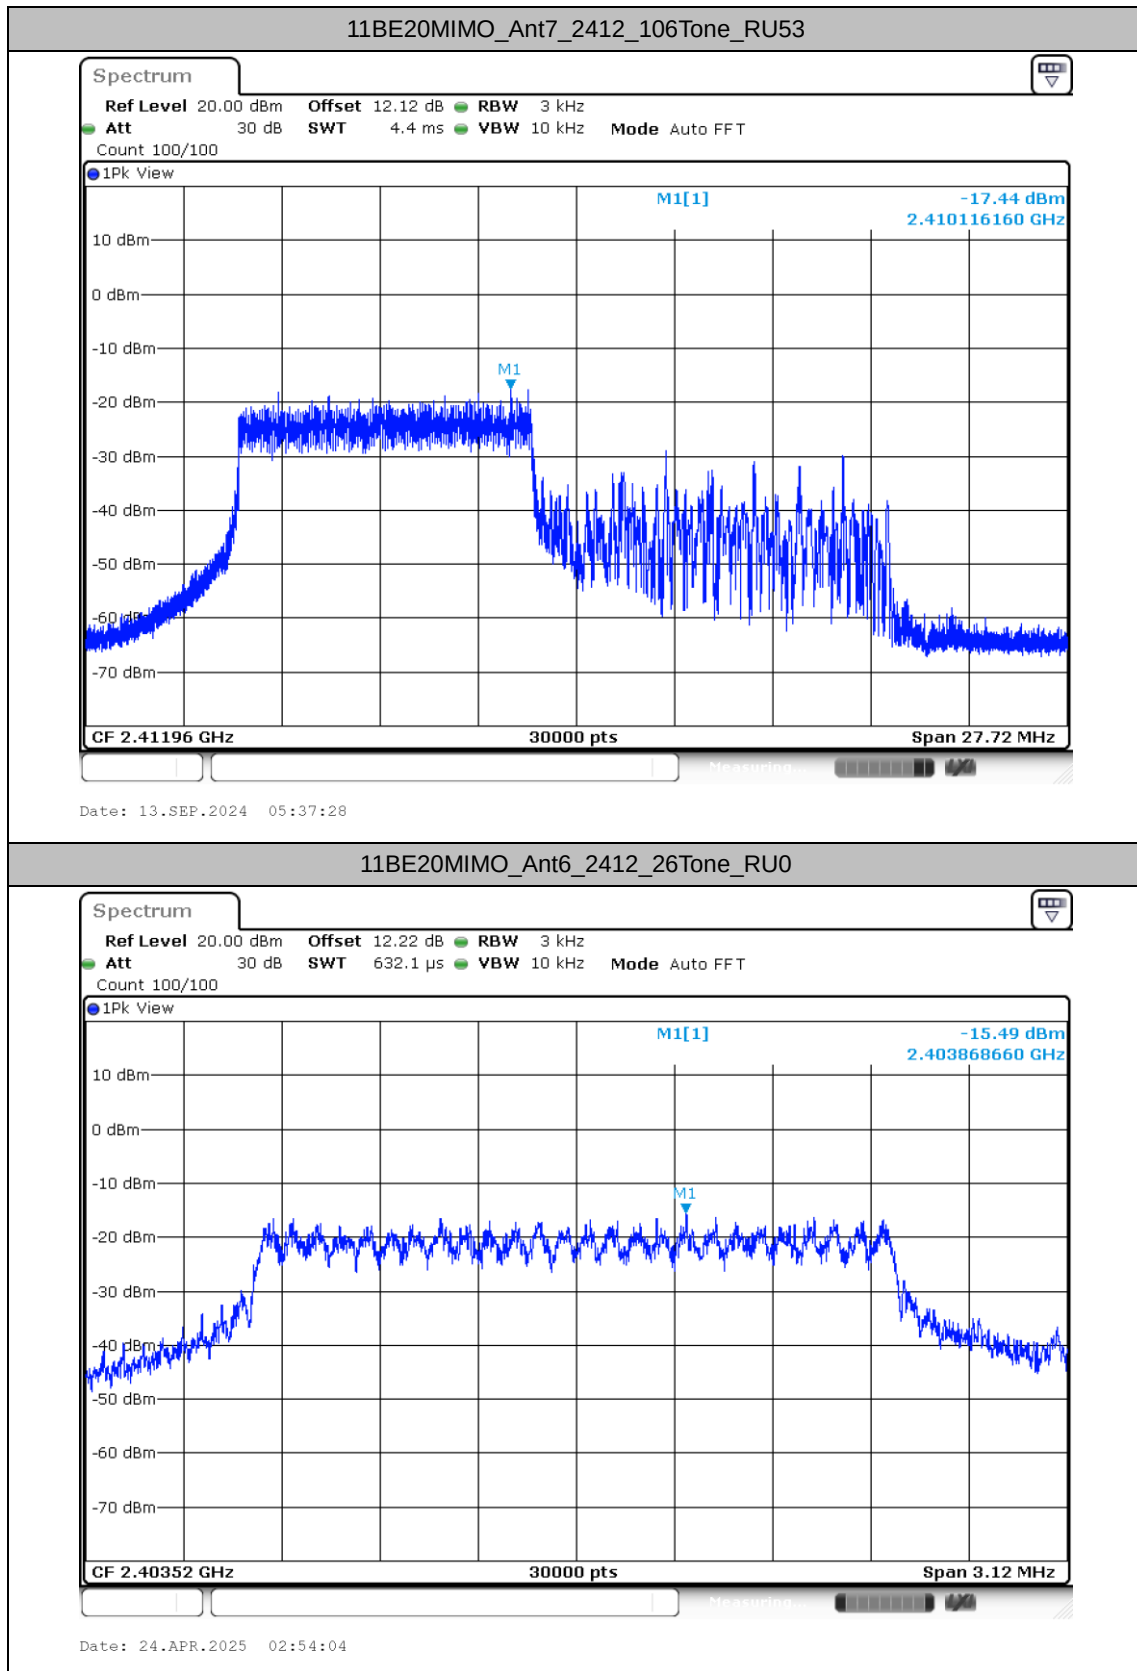

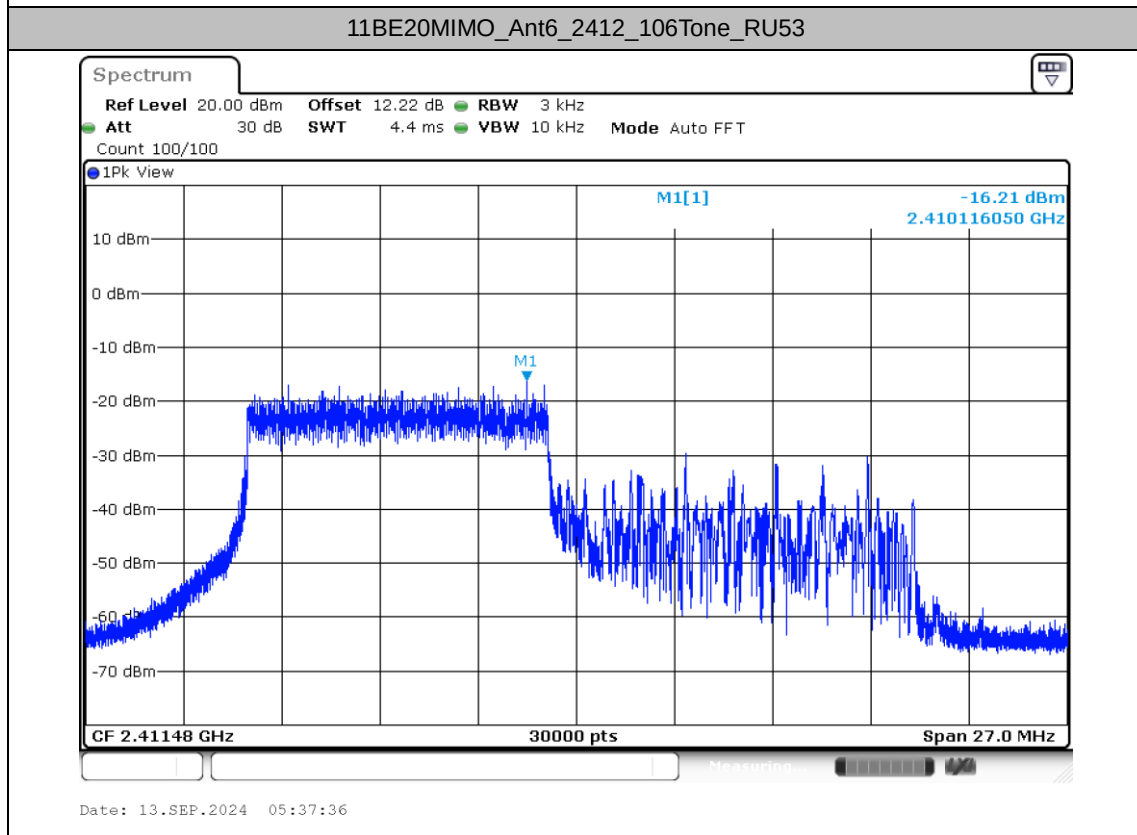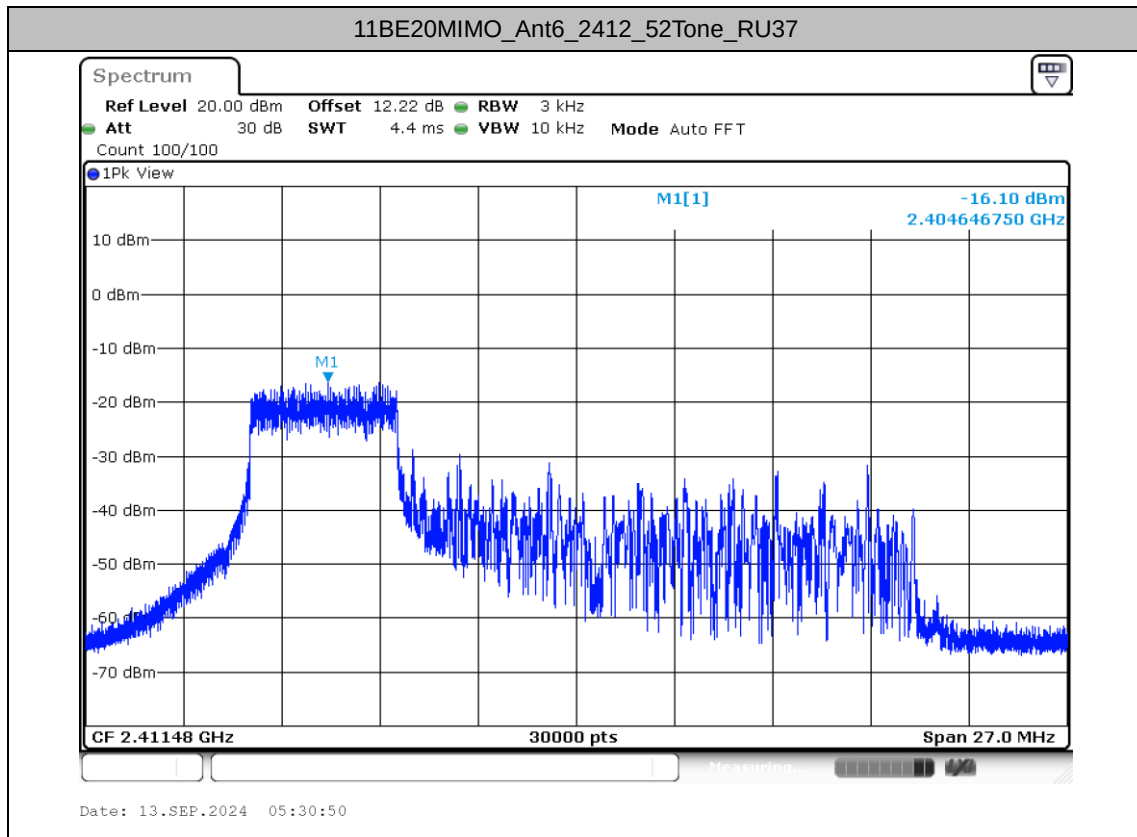

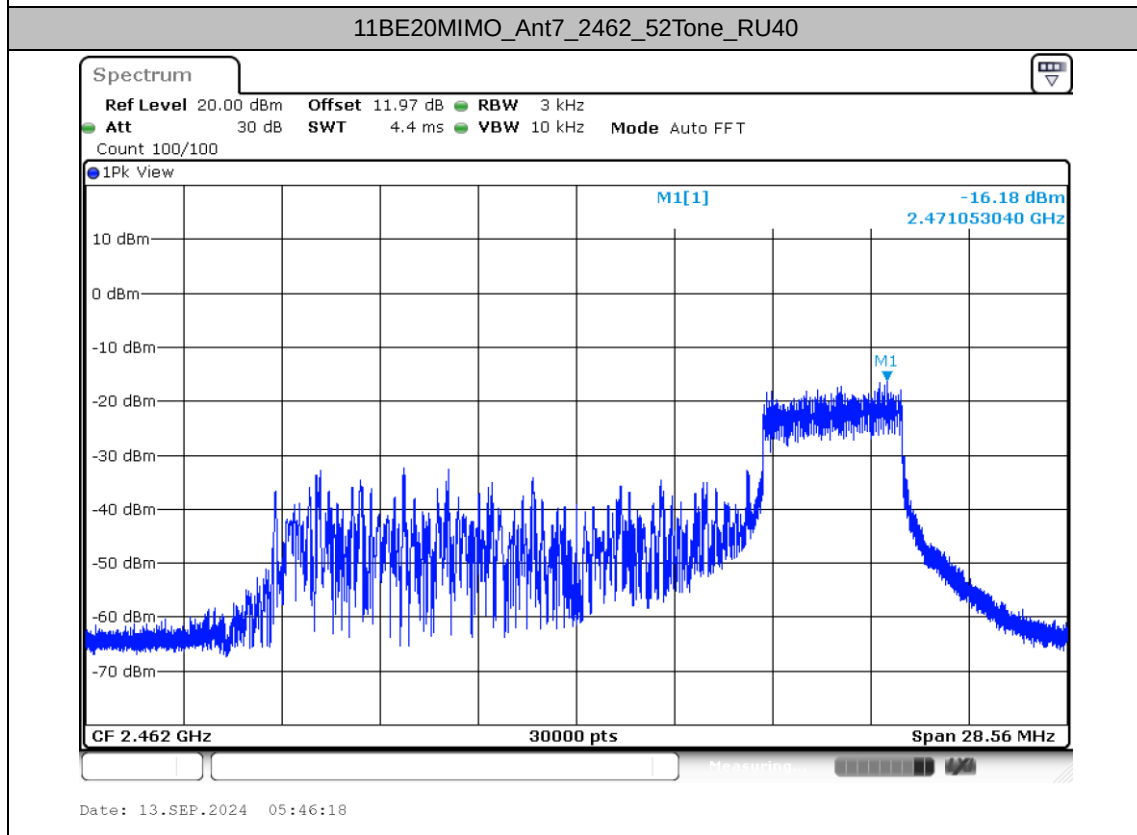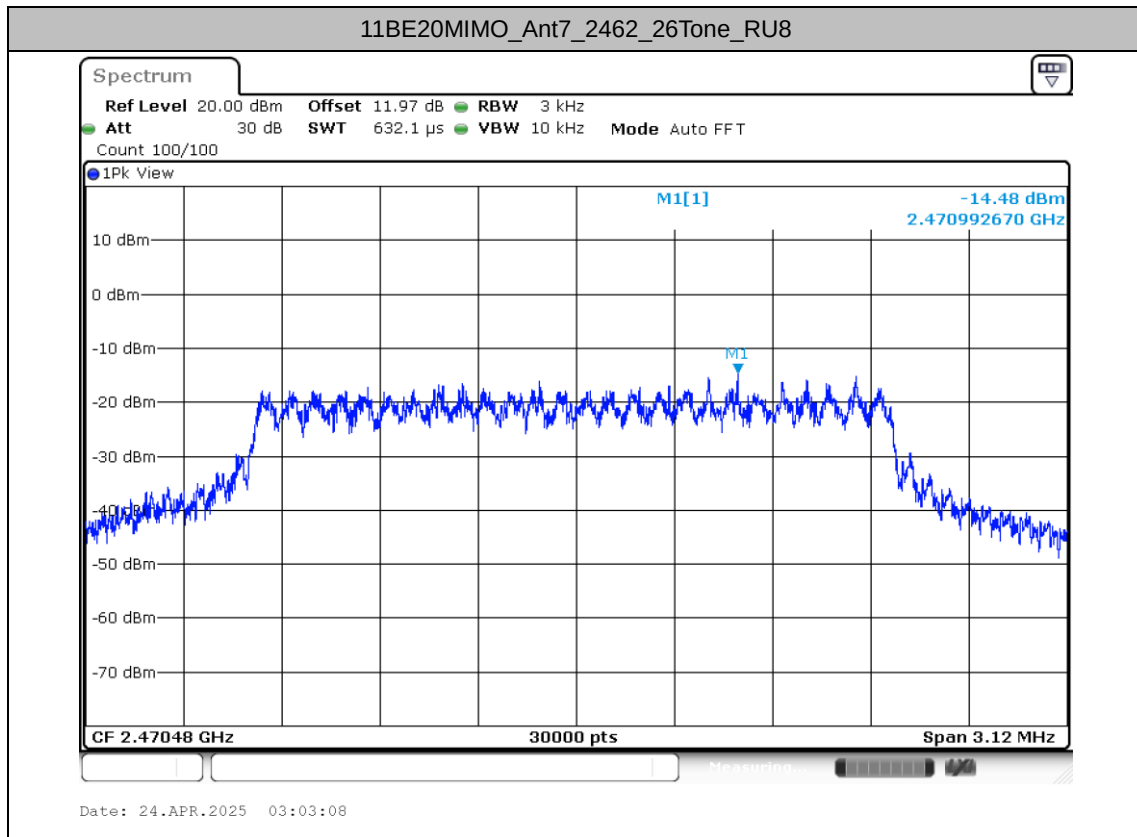


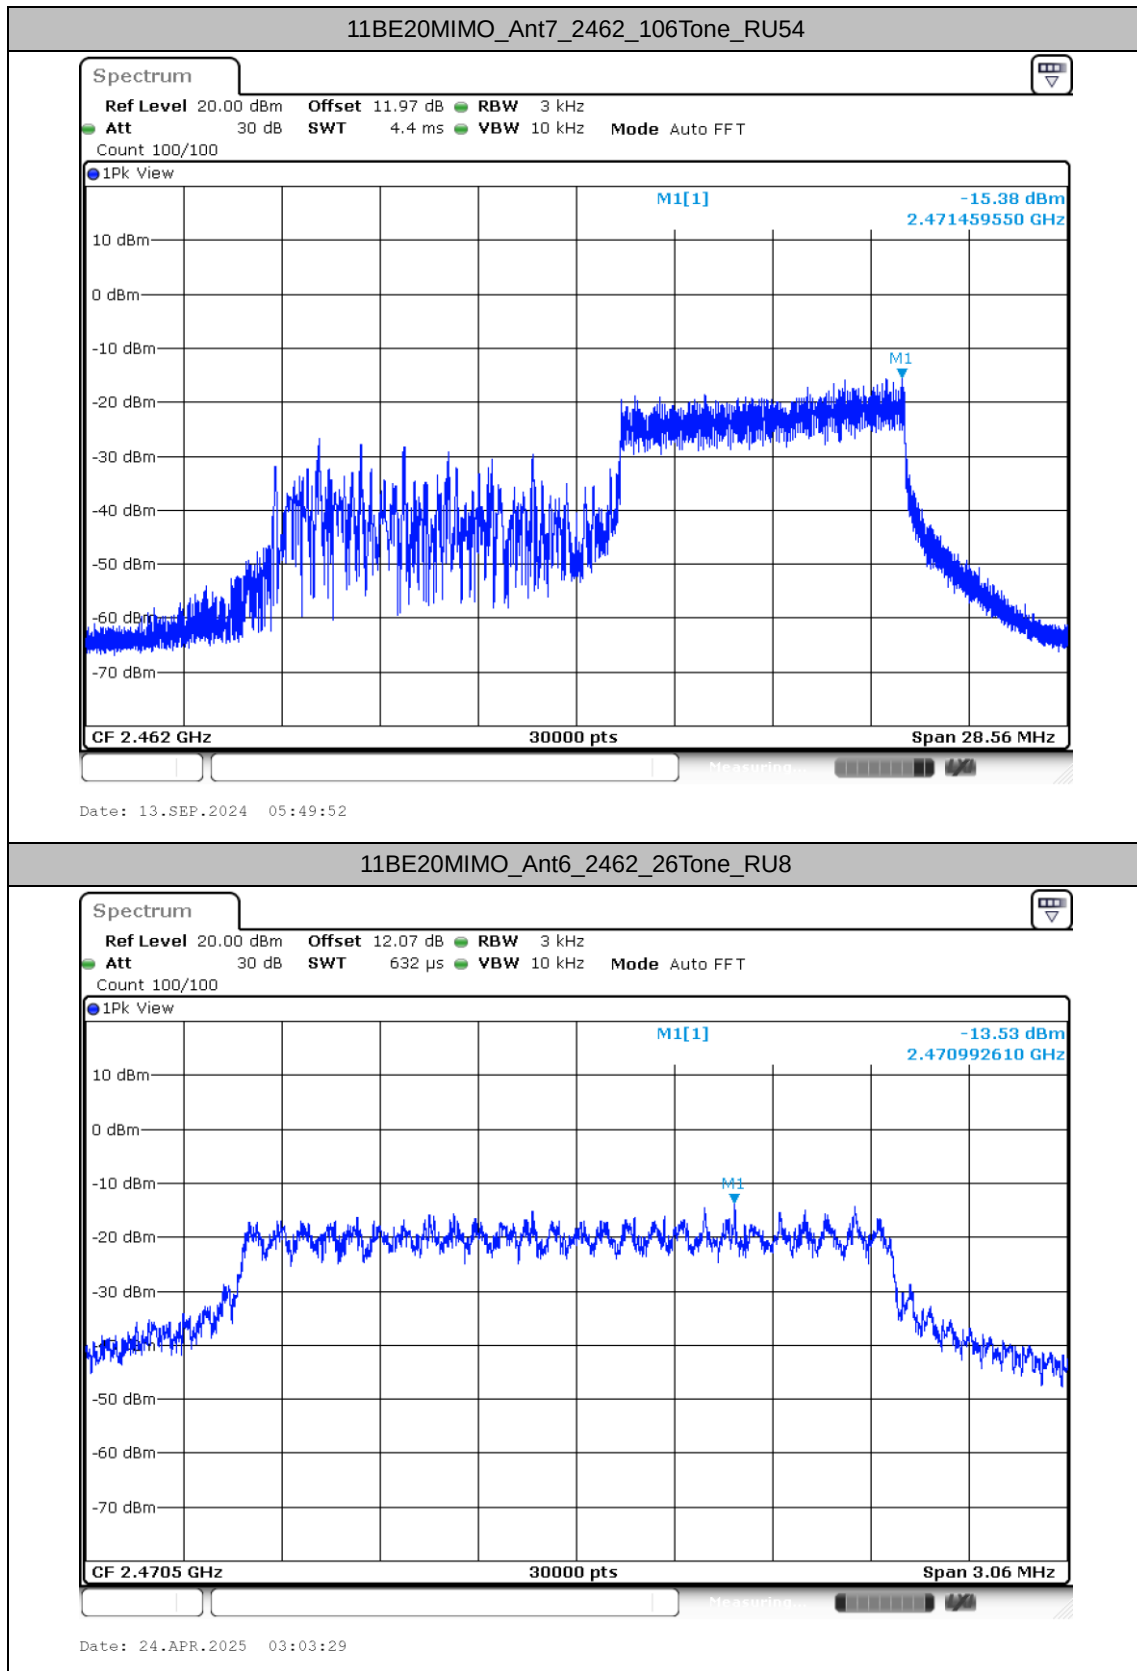

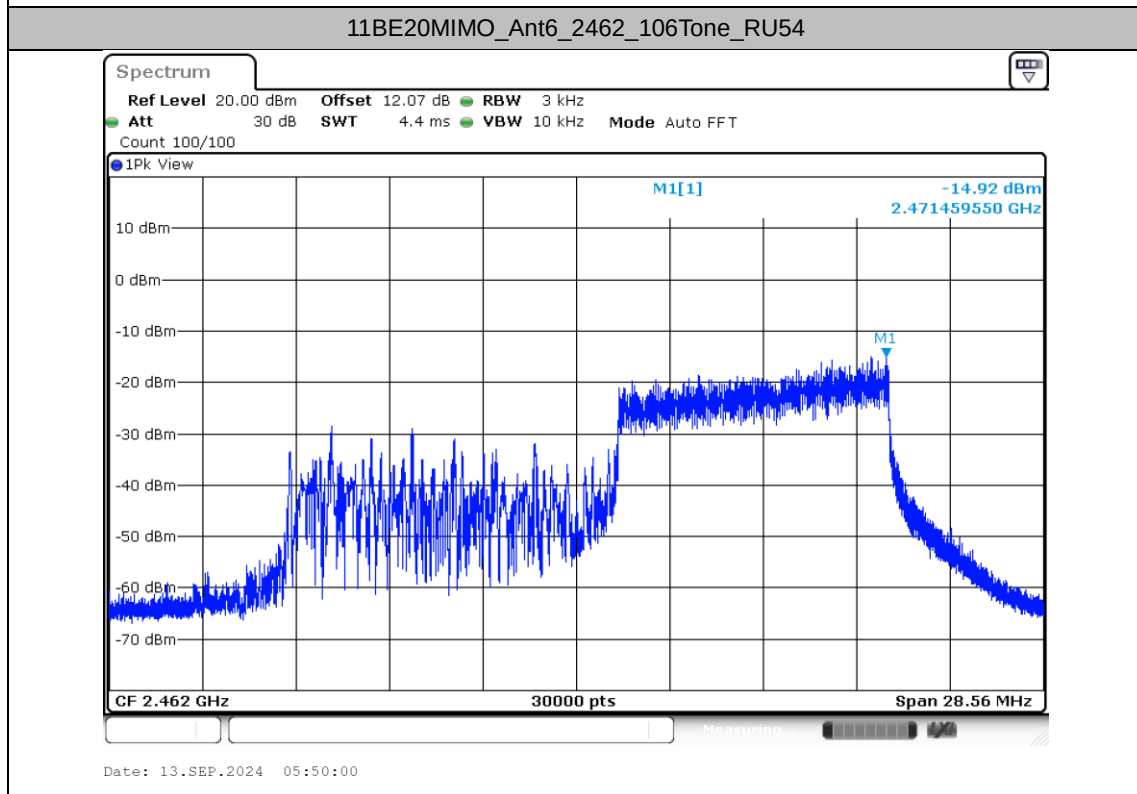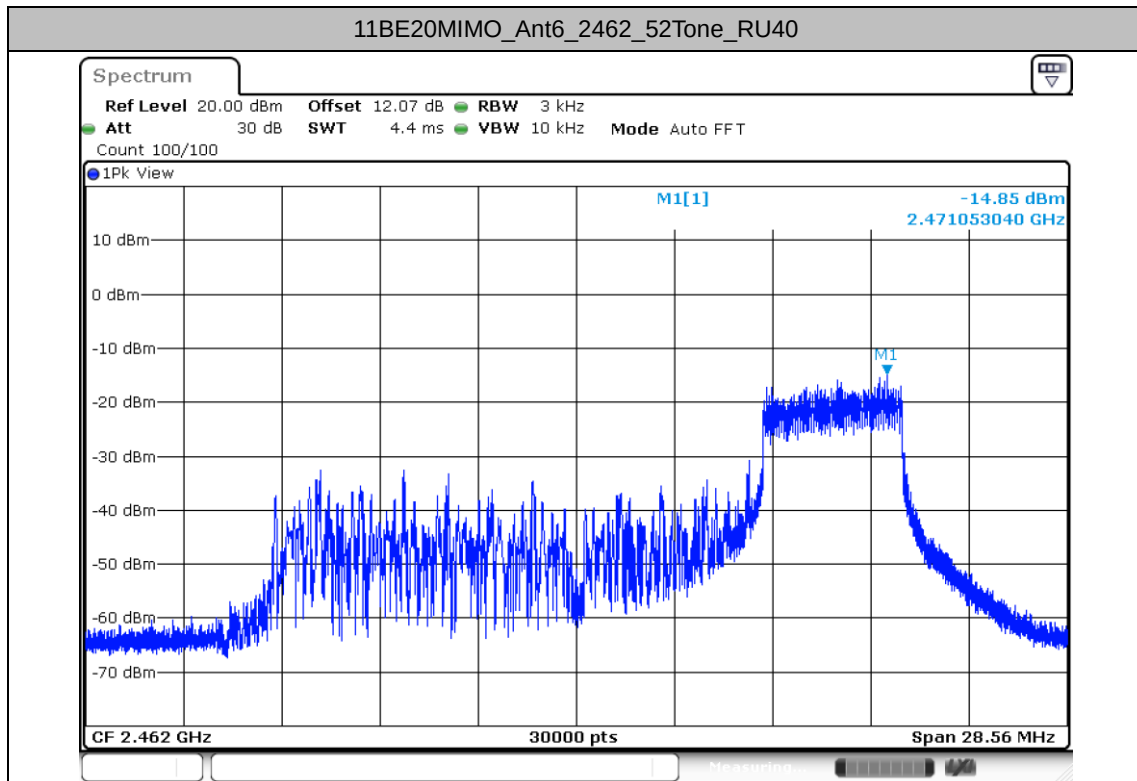




Appendix B. AC Conducted Emission Test Results

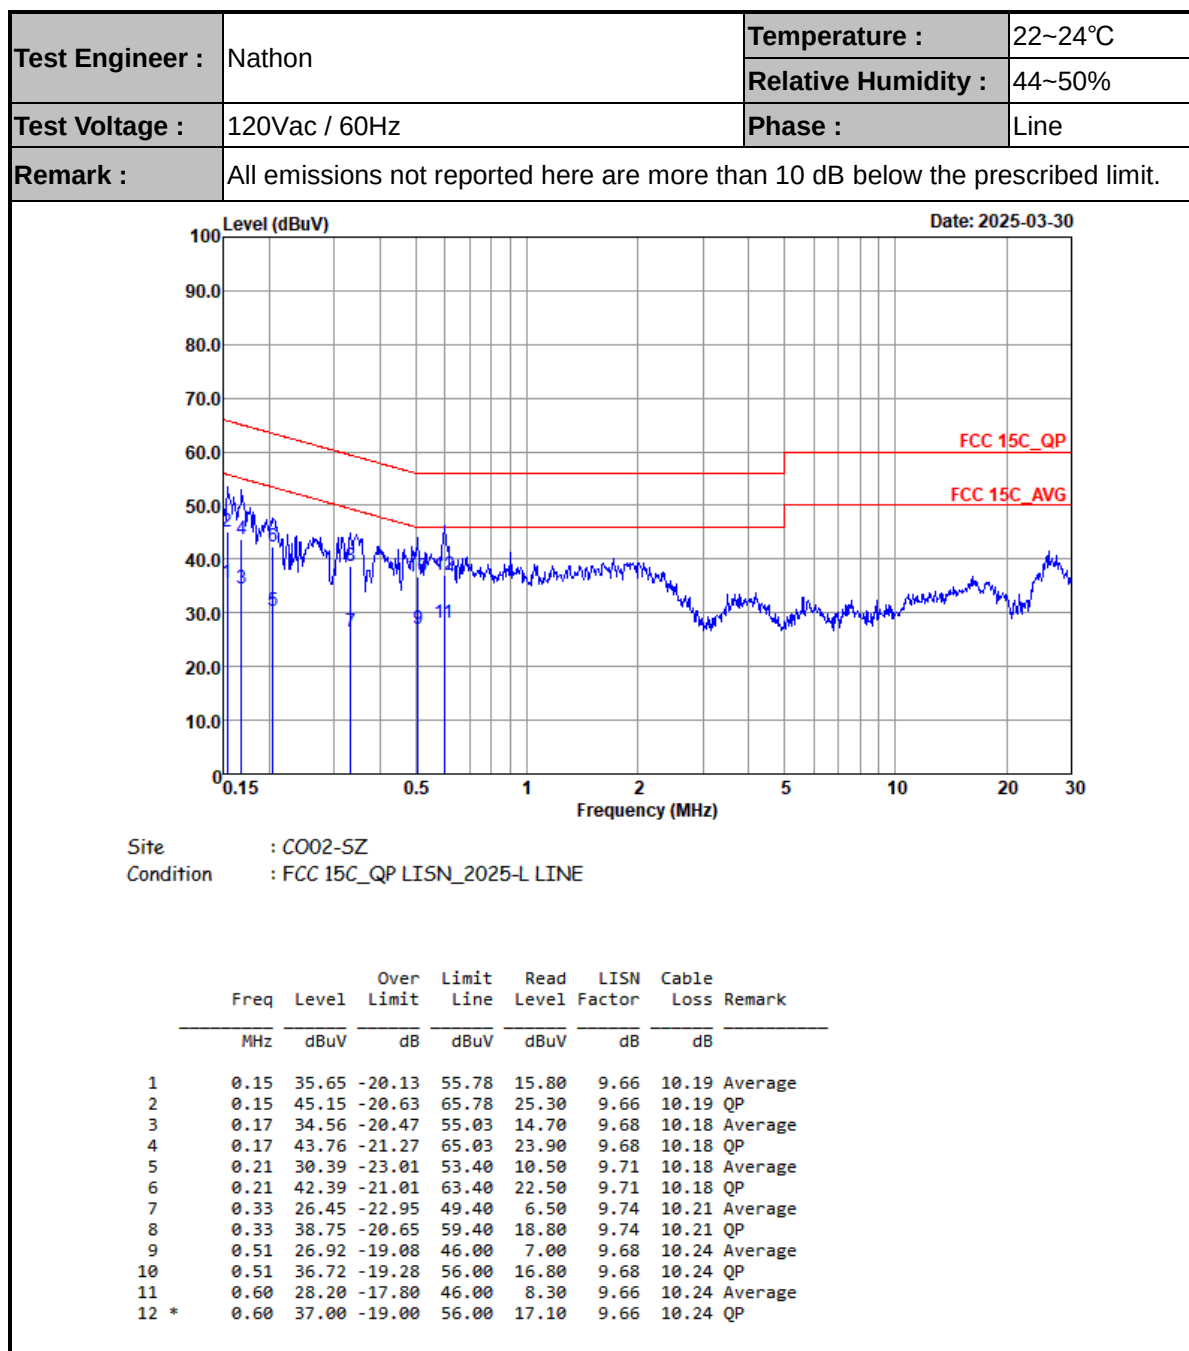



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

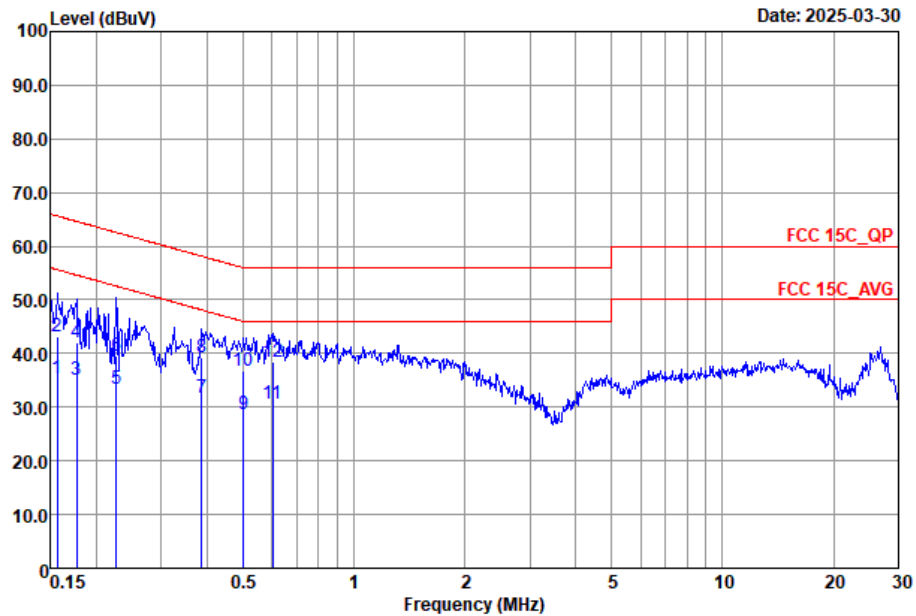

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	35.30	-20.35	55.65	15.49	9.62	10.19	Average
2	0.16	43.30	-22.35	65.65	23.49	9.62	10.19	QP
3	0.18	35.06	-19.58	54.64	15.10	9.78	10.18	Average
4	0.18	42.06	-22.58	64.64	22.10	9.78	10.18	QP
5	0.23	33.35	-19.22	52.57	13.49	9.67	10.19	Average
6	0.23	39.65	-22.92	62.57	19.79	9.67	10.19	QP
7	0.39	31.70	-16.42	48.12	11.70	9.78	10.22	Average
8	0.39	39.30	-18.82	58.12	19.30	9.78	10.22	QP
9	0.50	28.75	-17.25	46.00	8.90	9.61	10.24	Average
10	0.50	36.85	-19.15	56.00	17.00	9.61	10.24	QP
11	0.60	30.68	-15.32	46.00	10.80	9.64	10.24	Average
12 *	0.60	38.38	-17.62	56.00	18.50	9.64	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	HuaCong Liang	Relative Humidity :	50%
		Temperature :	20-22°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	CDD 7+6	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	CDD 7+6	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	CDD 7+6	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	CDD 7+6	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	CDD 7+6	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	CDD 7+6	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	CDD 7+6	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	CDD 7+6	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	CDD 7+6	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	CDD 7+6	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	CDD 7+6	802.11n HT40	09	2452	MCS0	-	-
Mode 12	2400-2483.5	CDD 7+6	802.11be EHT20	01	2412	MCS0	Full RU	-
Mode 13	2400-2483.5	CDD 7+6	802.11be EHT20	06	2437	MCS0	Full RU	-
Mode 14	2400-2483.5	CDD 7+6	802.11be EHT20	11	2462	MCS0	Full RU	-
Mode 15	2400-2483.5	CDD 7+6	802.11be EHT40	03	2422	MCS0	Full RU	-
Mode 16	2400-2483.5	CDD 7+6	802.11be EHT40	09	2452	MCS0	Full RU	-
Mode 17	2400-2483.5	CDD 7+6	802.11be EHT20	01	2412	MCS0	Single RU	106/53
Mode 18	2400-2483.5	CDD 7+6	802.11be EHT20	11	2462	MCS0	Single RU	106/54
Mode 19	2400-2483.5	CDD 7+6	802.11be EHT20	01	2412	MCS0	Small RU	106+26
Mode 20	2400-2483.5	CDD 7+6	802.11be EHT20	11	2462	MCS0	Small RU	106+26
Mode 21	2400-2483.5	CDD 7+6	802.11b	01	2412	1Mbps	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2385.66	38.07	54.00	-15.93	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	50.28	54.00	-3.72	V	Average	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	50.23	54.00	-3.77	V	Average	Pass	Harmonic
3	802.11b	11	2483.81	37.54	54.00	-16.46	H	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	50.10	54.00	-3.90	V	Average	Pass	Harmonic
4	802.11g	01	2387.74	41.17	54.00	-12.83	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	42.02	54.00	-11.98	H	Average	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	4874.00	40.05	54.00	-13.95	H	Average	Pass	Harmonic
6	802.11g	11	2483.62	42.35	54.00	-11.65	H	Average	Pass	Band Edge
6	802.11g	11	4924.00	39.67	54.00	-14.33	H	Average	Pass	Harmonic
7	802.11n HT20	01	2389.82	41.00	54.00	-13.00	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	40.01	54.00	-13.99	H	Average	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	7311.00	46.19	74.00	-27.81	H	Peak	Pass	Harmonic
9	802.11n HT20	11	2485.71	40.78	54.00	-13.22	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	4924.00	39.14	54.00	-14.86	H	Average	Pass	Harmonic
10	802.11n HT40	03	2387.56	49.23	54.00	-4.77	H	Average	Pass	Band Edge
10	802.11n HT40	03	-	-	-	-	-	-	-	Harmonic
11	802.11n HT40	09	2485.65	37.94	54.00	-16.06	H	AVERAGE	Pass	Band Edge
11	802.11n HT40	09	-	-	-	-	-	-	-	Harmonic
12	802.11be EHT20	01	2389.69	36.36	54.00	-17.64	V	AVERAGE	Pass	Band Edge
12	802.11be EHT20	01	4824.00	45.82	74.00	-28.18	H	Peak	Pass	Harmonic
13	802.11be EHT20	06	-	-	-	-	-	-	-	Band Edge
13	802.11be EHT20	06	7311.00	46.50	74.00	-27.50	H	Peak	Pass	Harmonic
14	802.11be EHT20	11	2484.53	36.92	54.00	-17.08	H	AVERAGE	Pass	Band Edge
14	802.11be EHT20	11	7386.00	46.38	74.00	-27.62	H	Peak	Pass	Harmonic
15	802.11be EHT40	03	2389.52	37.16	54.00	-16.84	V	AVERAGE	Pass	Band Edge
15	802.11be EHT40	03	-	-	-	-	-	-	-	Harmonic
16	802.11be EHT40	09	2389.66	37.04	54.00	-16.96	V	AVERAGE	Pass	Band Edge
16	802.11be EHT40	09	-	-	-	-	-	-	-	Harmonic
17	802.11be EHT20	01	2389.04	36.71	54.00	-17.29	V	AVERAGE	Pass	Band Edge
17	802.11be EHT20	01	-	-	-	-	-	-	-	Harmonic
18	802.11be EHT20	11	2486.51	36.44	54.00	-17.56	H	AVERAGE	Pass	Band Edge
18	802.11be EHT20	11	-	-	-	-	-	-	-	Harmonic
19	802.11be EHT20	01	2389.17	37.51	54.00	-16.49	V	AVERAGE	Pass	Band Edge
19	802.11be EHT20	01	-	-	-	-	-	-	-	Harmonic
20	802.11be EHT20	11	2484.00	36.71	54.00	-17.29	H	AVERAGE	Pass	Band Edge
20	802.11be EHT20	11	-	-	-	-	-	-	-	Harmonic
21	802.11b	01	688.63	28.70	46.00	-17.30	H	Peak	Pass	LF





**Co-location****Radiated Spurious Emission Test Modes**

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 22	CO-TX	CDD 7+6	802.11b	01	2412	1Mbps	-	-
		4	LTE	Bnad14	-	-	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
22	802.11b	01	2389.82	37.40	54.00	-16.60	V	AVERAGE	Pass	Band Edge
	802.11b	01	4824.00	48.65	54.00	-5.35	V	Average	Pass	Harmonic

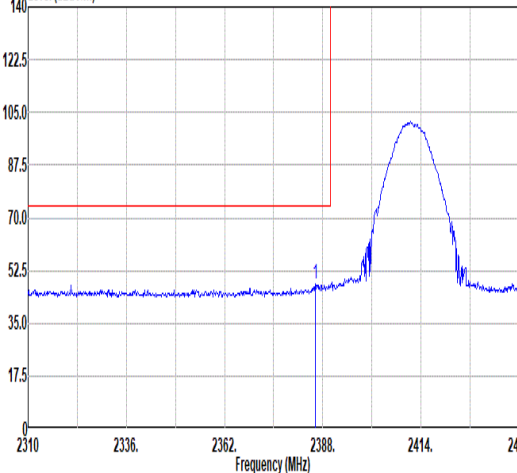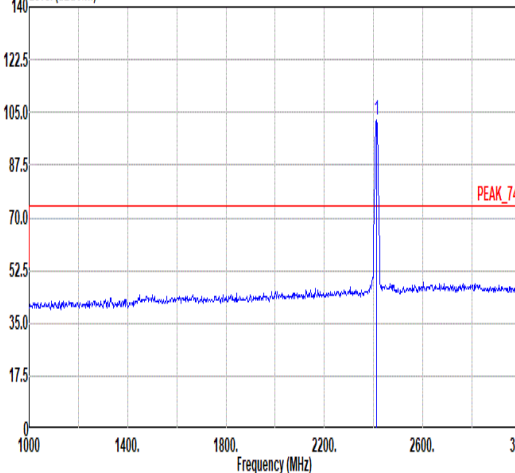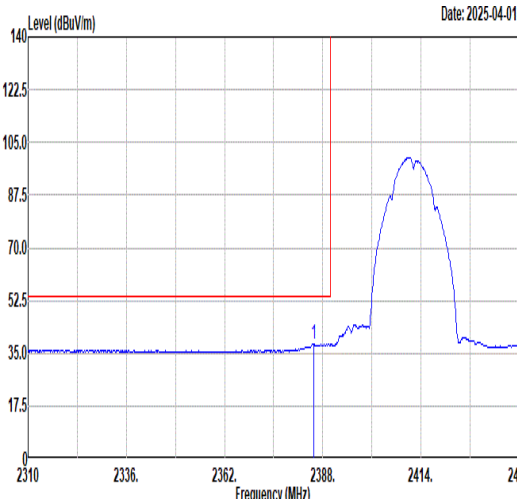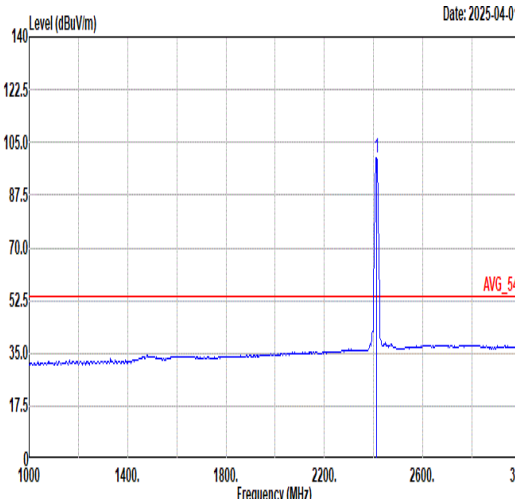

Mode	1																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																																															
ANT	CDD 7+6																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2025-04-01  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.05</td><td>48.05</td><td>74.00</td><td>-25.95</td><td>42.35</td><td>30.60</td><td>7.75</td><td>32.65</td><td>359</td><td>73 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2386.05	48.05	74.00	-25.95	42.35	30.60	7.75	32.65	359	73 PEAK	Level (dBuV/m) Date: 2025-04-01  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>102.47</td><td>-----</td><td>-----</td><td>96.68</td><td>30.62</td><td>7.81</td><td>32.64</td><td>359</td><td>73 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	102.47	-----	-----	96.68	30.62	7.81	32.64	359	73 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2386.05	48.05	74.00	-25.95	42.35	30.60	7.75	32.65	359	73 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	102.47	-----	-----	96.68	30.62	7.81	32.64	359	73 PEAK																																																																						
Avg	Level (dBuV/m) Date: 2025-04-01  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.66</td><td>38.07</td><td>54.00</td><td>-15.93</td><td>32.37</td><td>30.60</td><td>7.75</td><td>32.65</td><td>359</td><td>73 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2385.66	38.07	54.00	-15.93	32.37	30.60	7.75	32.65	359	73 AVERAGE	Level (dBuV/m) Date: 2025-04-01  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>99.95</td><td>-----</td><td>-----</td><td>94.16</td><td>30.62</td><td>7.81</td><td>32.64</td><td>359</td><td>73 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	99.95	-----	-----	94.16	30.62	7.81	32.64	359	73 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2385.66	38.07	54.00	-15.93	32.37	30.60	7.75	32.65	359	73 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2412.00	99.95	-----	-----	94.16	30.62	7.81	32.64	359	73 AVERAGE																																																																						





		1																																																	
Mode		Band Edge																																																	
		2400-2483.5_802.11b_CH01_2412MHz																																																	
ANT		CDD 7+6																																																	
Pol.		Fundamental																																																	
Peak	Vertical	Fundamental																																																	
	Level (dBuV/m) Date: 2025-04-01 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.26</td><td>47.42</td><td>74.00</td><td>-26.58</td><td>41.70</td><td>30.60</td><td>7.76</td><td>32.64</td><td>375</td><td>226</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2388.26	47.42	74.00	-26.58	41.70	30.60	7.76	32.64	375	226
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2388.26	47.42	74.00	-26.58	41.70	30.60	7.76	32.64	375	226	PEAK																																								
Avg	Vertical	Fundamental																																																	
	Level (dBuV/m) Date: 2025-04-01 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>37.33</td><td>54.00</td><td>-16.67</td><td>31.61</td><td>30.60</td><td>7.76</td><td>32.64</td><td>375</td><td>226</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.30	37.33	54.00	-16.67	31.61	30.60	7.76	32.64	375	226
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2389.30	37.33	54.00	-16.67	31.61	30.60	7.76	32.64	375	226	AVERAGE																																								



Mode	1																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																			
ANT	CDD 7+6																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>52.02</td><td>74.00</td><td>-21.98</td><td>58.23</td><td>35.30</td><td>11.08</td><td>52.59</td><td>396</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>45.65</td><td>54.00</td><td>-8.35</td><td>51.86</td><td>35.30</td><td>11.08</td><td>52.59</td><td>396</td><td>360</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	52.02	74.00	-21.98	58.23	35.30	11.08	52.59	396	360	Peak	2	4824.00	45.65	54.00	-8.35	51.86	35.30	11.08	52.59	396	360	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>54.31</td><td>74.00</td><td>-19.69</td><td>60.52</td><td>35.30</td><td>11.08</td><td>52.59</td><td>260</td><td>165</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>50.28</td><td>54.00</td><td>-3.72</td><td>56.49</td><td>35.30</td><td>11.08</td><td>52.59</td><td>260</td><td>165</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	54.31	74.00	-19.69	60.52	35.30	11.08	52.59	260	165	Peak	2	4824.00	50.28	54.00	-3.72	56.49	35.30	11.08	52.59	260	165	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4824.00	52.02	74.00	-21.98	58.23	35.30	11.08	52.59	396	360	Peak																																																																																																									
2	4824.00	45.65	54.00	-8.35	51.86	35.30	11.08	52.59	396	360	Average																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4824.00	54.31	74.00	-19.69	60.52	35.30	11.08	52.59	260	165	Peak																																																																																																									
2	4824.00	50.28	54.00	-3.72	56.49	35.30	11.08	52.59	260	165	Average																																																																																																									

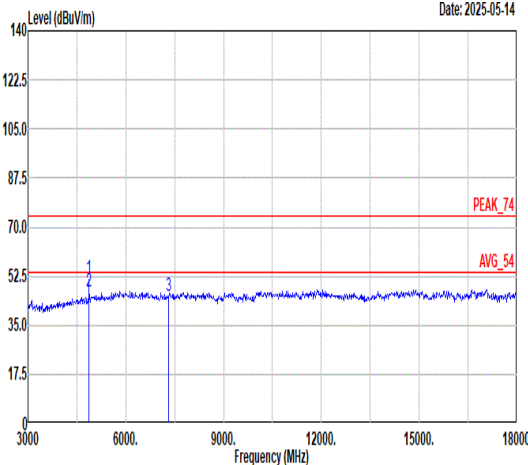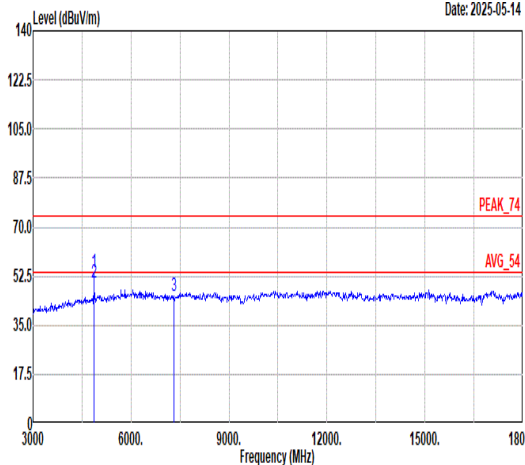

Mode	2																																																																																																																																										
	Harmonic																																																																																																																																										
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																										
ANT	CDD 7+6																																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																																				
Peak Avg																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>51.85</td><td>74.00</td><td>-22.15</td><td>58.85</td><td>35.35</td><td>10.27</td><td>52.62</td><td>255</td><td>227</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>47.22</td><td>54.00</td><td>-6.78</td><td>54.22</td><td>35.35</td><td>10.27</td><td>52.62</td><td>255</td><td>227</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.27</td><td>74.00</td><td>-28.73</td><td>48.90</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	51.85	74.00	-22.15	58.85	35.35	10.27	52.62	255	227	Peak	2	4874.00	47.22	54.00	-6.78	54.22	35.35	10.27	52.62	255	227	Average	3	7311.00	45.27	74.00	-28.73	48.90	36.58	12.01	52.22	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>53.85</td><td>74.00</td><td>-20.15</td><td>60.85</td><td>35.35</td><td>10.27</td><td>52.62</td><td>304</td><td>155</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>50.23</td><td>54.00</td><td>-3.77</td><td>57.23</td><td>35.35</td><td>10.27</td><td>52.62</td><td>304</td><td>155</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.17</td><td>74.00</td><td>-28.83</td><td>48.80</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	53.85	74.00	-20.15	60.85	35.35	10.27	52.62	304	155	Peak	2	4874.00	50.23	54.00	-3.77	57.23	35.35	10.27	52.62	304	155	Average	3	7311.00	45.17	74.00	-28.83	48.80	36.58	12.01	52.22	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	4874.00	51.85	74.00	-22.15	58.85	35.35	10.27	52.62	255	227	Peak																																																																																																																																
2	4874.00	47.22	54.00	-6.78	54.22	35.35	10.27	52.62	255	227	Average																																																																																																																																
3	7311.00	45.27	74.00	-28.73	48.90	36.58	12.01	52.22	---	---	Peak																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	4874.00	53.85	74.00	-20.15	60.85	35.35	10.27	52.62	304	155	Peak																																																																																																																																
2	4874.00	50.23	54.00	-3.77	57.23	35.35	10.27	52.62	304	155	Average																																																																																																																																
3	7311.00	45.17	74.00	-28.83	48.80	36.58	12.01	52.22	---	---	Peak																																																																																																																																