

Appendix D. SAR Test Setup Photos


Head Exposure Condition




Right Cheek, Test Separation 0 mm



Right Tilted, Test Separation 0 mm

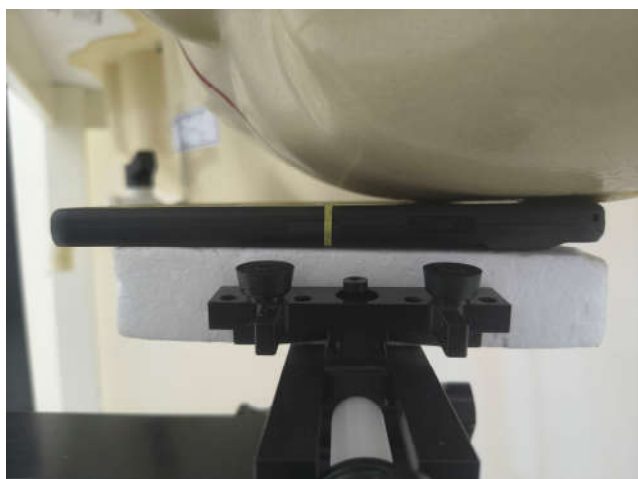

Left Cheek, Test Separation 0mm

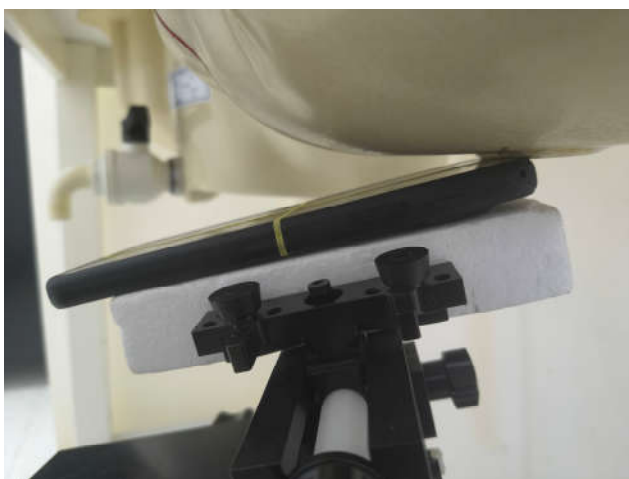

Left Tilted, Test Separation 0 mm

Hotspot Exposure Condition



Front, Test Separation 10 mm



Back, Test Separation 10 mm




Left Side, Test Separation 10 mm



Right Side, Test Separation 10 mm



Top Side, Test Separation 10 mm

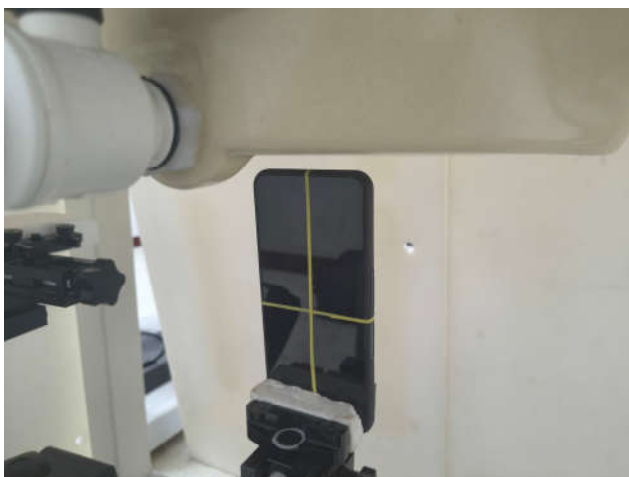

Bottom Side, Test Separation 10 mm

Sensor off



Front, Test Separation 16 mm



Back, Test Separation 22 mm



Top Side, Test Separation 11 mm



Left Side, Test Separation 19 mm



Right Side, Test Separation 24 mm



Back, Test Separation 17 mm

Body-worn Exposure Condition



Front, Test Separation 10 mm



Back, Test Separation 10 mm

Sensor off



Front, Test Separation 16 mm



Back, Test Separation 22 mm



Back, Test Separation 17 mm


Product Specific 10g SAR



Front, Test Separation 0 mm



Back, Test Separation 0 mm

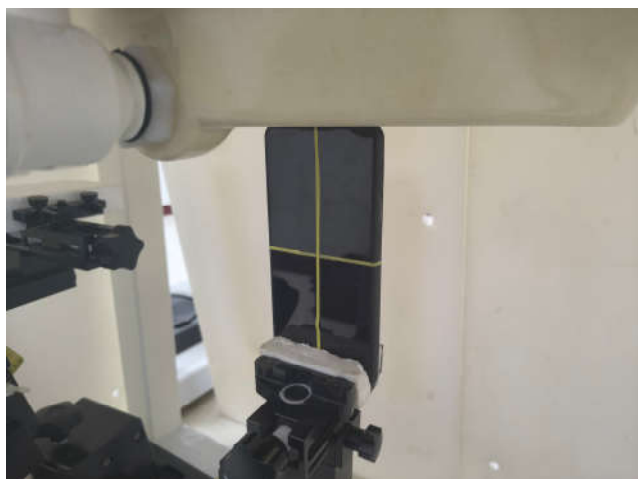


Top Side, Test Separation 0 mm



Right Side, Test Separation 0 mm

Antenna Location

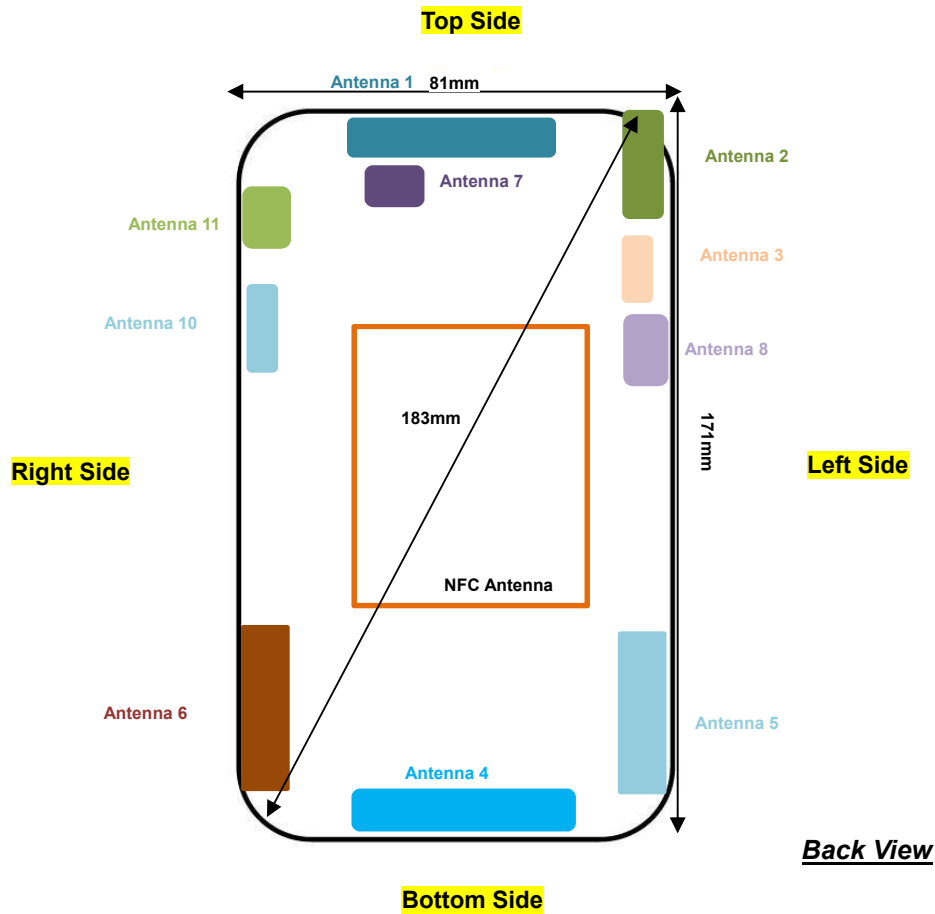

Antenna	Support Band
Antenna 1	UMTS: B5<TX/RX> LTE: B5/12/13/14/26/71<TX/RX> 5G NR: n5 / n14 /n26 /n71 <TX/RX>
Antenna 2	UMTS: B2/4<TX/RX> LTE: B2/4/7/25/30/38/41/66<TX/RX> 5G NR: n2 /n7 /n25 / n30/n38/n41/n66 <TX/RX>
Antenna 3	LTE: B42/43/48<TX/RX> 5G NR: n48/n77/n78 <TX/RX>
Antenna 4	5G NR: n77/n78 <RX>
Antenna 5	LTE: B2/4/7/25/66<TX/RX> 5G NR: n2 /n7 / n70 <TX/RX> 5G NR: n38/n41 <RX>
Antenna 6	LTE: B7/38/41<TX/RX> 5G NR: n38/n41/ n77/n78 <RX>
Antenna 7	LTE: B48<TX/RX> 5G NR: n77/n78 <TX/RX>
Antenna 8	LTE: B7<TX/RX> 5G NR: n38/n41 <RX>
Antenna 10	WLAN 5GHz/6GHz <TX/RX> WLAN 2.4GHz <TX/RX> Bluetooth <TX/RX>
Antenna 11	WLAN 5GHz/6GHz <TX/RX> WLAN 2.4GHz <TX/RX> Bluetooth <TX/RX>
NFC Antenna	NFC<TX/RX>

Note: 5G NR n38/n41 at Ant 5/6/8 and n77/n78 at Ant4/6 support SRS(Sounding Reference Signal) functionality.

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
Antenna 1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
Antenna 2	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
Antenna 3	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
Antenna 4	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
Antenna 5	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
Antenna 6	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	>25mm
Antenna 7	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
Antenna 8	≤ 25mm	≤ 25mm	>25mm	>25mm	>25mm	≤ 25mm
Antenna 10	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm	>25mm
Antenna 11	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
NFC Antenna	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
Antenna 1	Yes	Yes	Yes	No	Yes	Yes
Antenna 2	Yes	Yes	Yes	No	No	Yes
Antenna 3	Yes	Yes	Yes	No	No	Yes
Antenna 4	Yes	Yes	No	Yes	Yes	Yes
Antenna 5	Yes	Yes	No	Yes	No	Yes
Antenna 6	Yes	Yes	No	Yes	Yes	No
Antenna 7	Yes	Yes	Yes	No	Yes	No
Antenna 8	Yes	Yes	No	No	No	Yes
Antenna 10	Yes	Yes	No	No	Yes	No
Antenna 11	Yes	Yes	Yes	No	Yes	No
NFC Antenna	Yes	Yes	No	No	Yes	Yes

Note: Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.