

ISED CABid: ES1909

Test Report No:

NIE: 70542RRF.014

Test Report

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

(*) Identification of item tested	Charger for wireless hearing aid
(*) Trademark	ReSound, Beltone, Interton, GN Hearing, Jabra
(*) Model and /or type reference	C-4
Other identification of the product	HW version: PCBA,C-4,MAIN BOARD SW version: Trebor 2 v.3.1.0.34 FCC ID: X26C-4 IC: 6941C-C4
(*) Features	Bluetooth is Tx/Rx and WPT at 135.59 kHz
Manufacturer	GN HEARING A/S Lautrupbjerg 7, 2750 Ballerup, Denmark
Test method requested, standard	USA FCC Part 15.247 (10-1-20 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-20 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager  2022.05.24 09:32:03 +02'00'
Date of issue	2022-05-24
Report template No	FDT08_24 (*) "Data provided by the client"

Index

INDEX	2
ACRONYMS	3
COMPETENCES AND GUARANTEES	3
GENERAL CONDITIONS	3
UNCERTAINTY	4
DATA PROVIDED BY THE CLIENT	4
USAGE OF SAMPLES	5
TEST SAMPLE DESCRIPTION	6
IDENTIFICATION OF THE CLIENT	7
TESTING PERIOD AND PLACE	7
DOCUMENT HISTORY	7
ENVIRONMENTAL CONDITIONS	8
REMARKS AND COMMENTS	9
TESTING VERDICTS	10
SUMMARY	10
APPENDIX A: TEST RESULTS. BLUETOOTH LOW ENERGY (1M)	11

Acronyms

Acronym ID	Acronym Description
	Emission Bandwidth
Detector	Detector used
Equipment	Equipment Type
Freq	Frequency
Freq Rng	Frequency Range
Inband Peak Lvl	Inband Peak Level
Lvl	Level
MP	Measurement Point
Mod	Modulation
Occ Ch BW	Occupied Channel Bandwidth
Operation Band	Operation Band
Peak Power	Maximum Peak Conducted Output Power
Pol	Polarization
Unwanted Freq	Unwanted Emissions Frequency
Unwanted Lvl	Unwanted Emissions Level

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.

4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the radiated emissions of EUT from 30 MHz to 1 GHz is:
Measurement uncertainty $\leq \pm 5,35$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 1 GHz to 17 GHz is:
Measurement uncertainty $\leq \pm 4,32$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 17 GHz to 26 GHz is:
Measurement uncertainty $\leq \pm 5,51$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the conducted testing of EUT is:

RF Peak Output Power: Measurement uncertainty $\leq \pm 0,80$ dB

RF Average Output Power: Measurement uncertainty $\leq \pm 0,99$ dB

Power Spectral Density: Measurement uncertainty $\leq \pm 0,99$ dB

6dB Bandwidth: Measurement uncertainty $\leq \pm 2,84$ %

Occupied Channel Bandwidth: Measurement uncertainty $\leq \pm 1,17$ %

Conducted Band-edge spurious emissions: Measurement uncertainty $\leq \pm 1,76$ dB

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a . Charger for rechargeable hearing aid. Power supply through USB-C port, Bluetooth is Tx/Rx and WPT at 135.59 kHz.
3. Testing performed with the information provided in "0437290[B]_RADIO_TEST_PLAN_C-4" document.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	67124D_119.1	USB cable	--	--	2021-09-30	Auxiliary Element
S/01	67124D_85.1	Charger case (Conducted)	C-4	2182318683	2021-09-30	Element Under Test
S/02	67124D_103.1	Charger case	C-4	2182318815	2021-09-30	Element Under Test

Notes referenced to samples during the project:

Id	Type
S/01	Samples used for all Conducted testing
S/02	Samples used for Radiated testing.

Test sample description

Ports..... :	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾		
	AC mains (AC power port)	N/A	x				
	USB cable	1.30 m	x	x			
Supplementary information to the ports..... :							
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	x	AC: 100 to 240 +/- 10 %, 50 to 60 Hz +/- 5 %					
Rated Power	5.0 V						
Clock frequencies.....	2.48GHz and 135.59KHz						
Other parameters							
Software version	Trebor 2 v 3.1.0.34						
Hardware version	PCBA, C-4, MAIN BOARD						
Dimensions in cm (W x H x D)							
Mounting position	x	Table top equipment					
		Wall/Ceiling mounted equipment					
		Floor standing equipment					
		Hand-held equipment					
Modules/parts..... :	Module/parts of test item		Type		Manufacturer		
Accessories (not part of the test item)	Description		Type		Manufacturer		

	Computer	Certified according to IEC 60950-1, IEC 62368-1 or equivalent standard	
Documents as provided by the applicant.....:	Description	File name	Issue date

⁽³⁾ Only for Medical Equipment

Identification of the client

GN HEARING A/S
Lautrupbjerg 7, 2750 Ballerup, Denmark

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-10-18
Date (finish)	2021-10-28

Document history

Report number	Date	Description
70542RRF.014	2022-04-28	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Miguel Manuel López Guzmán and Nicolás Salguero Camarena.

Used instrumentation:

Equipment	Model	Manufacturer	Next Calibration
SEMIANECHOIC ABSORBER LINED CHAMBER	SAC-3	FRANKONIA	N/A
SHIELDED ROOM	---	FRANKONIA	N/A
EMI TEST RECEIVER 2Hz-44GHz	ESW44	ROHDE & SCHWARZ	2023-09-21
EMI TEST RECEIVER 20Hz-40GHz	ESU40	ROHDE & SCHWARZ	2023-11-22
PRE-AMPLIFIER G>40dB 10MHz-6GHz	BLNA 0160-01N	BONN ELEKTRONIK	2022-10-27
HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	EST LINDGREN	2024-09-15
HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK MESS-ELEKTRONIK	2024-07-13
PREAMPLIFIER 30dB 500MHz-18GHz	BBV 9718 C	SCHWARZBECK	2022-06-07
HORN ANTENNA 18-40GHz	BBHA 9170	SCHWARZBECK	2023-05-05
PRE-AMPLIFIER G>30dB 17-40GHz	BLMA 1840-1M	BONN ELEKTRONIK	2023-02-16
DIGITAL MULTIMETER	179	FLUKE	2022-10-19
EXTENSION FOR OPEN SWITCH UNIT UP TO 40GHz	OSP-B157Wx	ROHDE AND SCHWARZ	2024-03-16
OPEN SWITCH UNIT UP TO 7.5 GHz	OSP-B157W8 PLUS	ROHDE & SCHWARZ	2023-08-20
POWER SUPPLY DC 40 V / 40 A	NGPE 40/40	ROHDE AND SCHWARZ	N/A
SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz	FSV40	ROHDE AND SCHWARZ	2023-02-26
SIGNAL GENERATOR 8kHz-6GHz	SMB100B	ROHDE AND SCHWARZ	2023-11-03
SIGNAL GENERATOR 8kHz-6GHz	SMBV100B	ROHDE AND SCHWARZ	2023-11-18
VECTOR SIGNAL GENERATOR 100kHz-7.5GHz	SMW200A	ROHDE AND SCHWARZ	2023-08-20
WMS32	WMS32	ROHDE AND SCHWARZ	N/A

Testing verdicts

Fail	F
Not applicable	N/A
Not measured	N/M
Pass	P

Summary

Bluetooth Low Energy 5.0 (1M)

Requirement – Test case	FCC PART 15 PARAGRAPH / RSS-247	Verdict	Remark
RSS-247 5.2 (a) / FCC 15.247 (a) (2) [6dBw] 6 dB Bandwidth		Pass	
RSS-247 5.4 (d) / FCC 15.247 (b) (3) [Pkcp] Maximum Peak Conducted output power		Pass	
FCC 15.247 (e) / RSS-247 5.2. (b) Power spectral density		Pass	
RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)		Pass	
RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)		Pass	
99dBw Occupied Channel Bandwidth 99%		Pass	
<u>Supplementary information and remarks:</u>			
None			

Appendix A: Test results. Bluetooth Low Energy (1M)

INDEX

TEST CONDITIONS	13
TEST CASES DETAILS	16
<i>99dBw Occupied Channel Bandwidth 99%</i>	16
FCC 47 CFR PART 15.247 / RSS-247	20
<i>RSS-247 5.2 (a) / FCC 15.247 (a) (2) [6dBw] 6 dB Bandwidth</i>	20
<i>RSS-247 5.2 (b) / FCC 15.247 (e) [Psd] Power spectral density</i>	24
<i>RSS-247 5.4 (d) / FCC 15.247 (b) (3) [Pkcp] Maximum Peak Conducted output power</i>	28
<i>RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)</i>	32
<i>RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)</i>	35

TEST CONDITIONS

(*): Data provided by the client.

POWER SUPPLY (*):

Vnominal: 5 V DC
Type of Power Supply: AC/DC adapter

ANTENNA (*):

Type of Antenna: Integral Antenna
Maximum Declared Antenna Gain: -11.86 dBi

TEST FREQUENCIES (*):

Low Channel: 2402 MHz
Middle Channel: 2440 MHz
High Channel: 2480 MHz

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

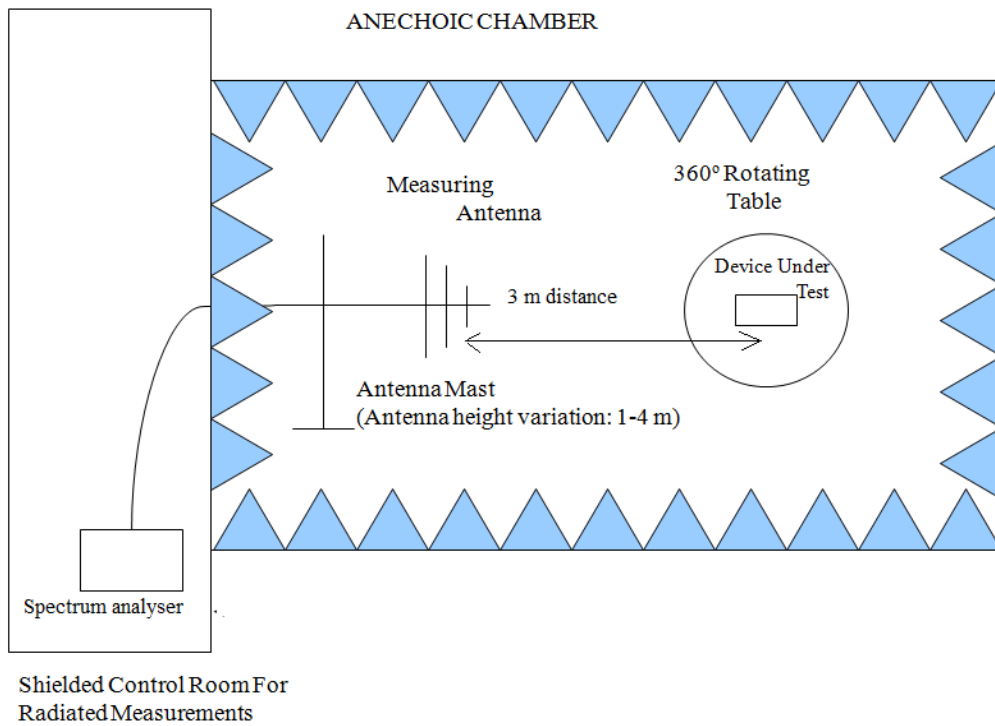

Radiated measurements setup from 1 GHz to 17 GHz:

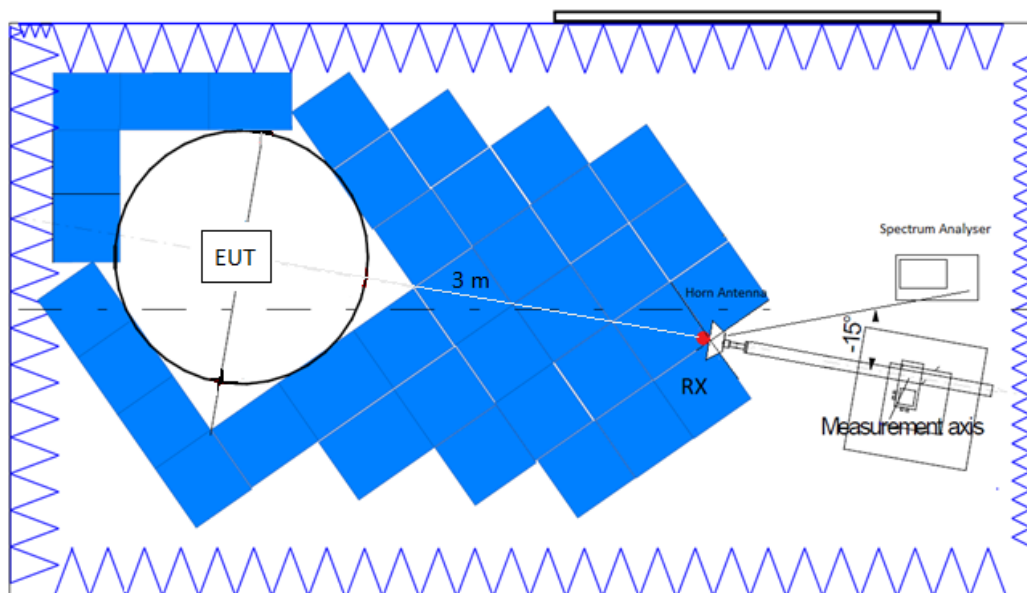

Radiated measurements setup $f > 17$ GHz:

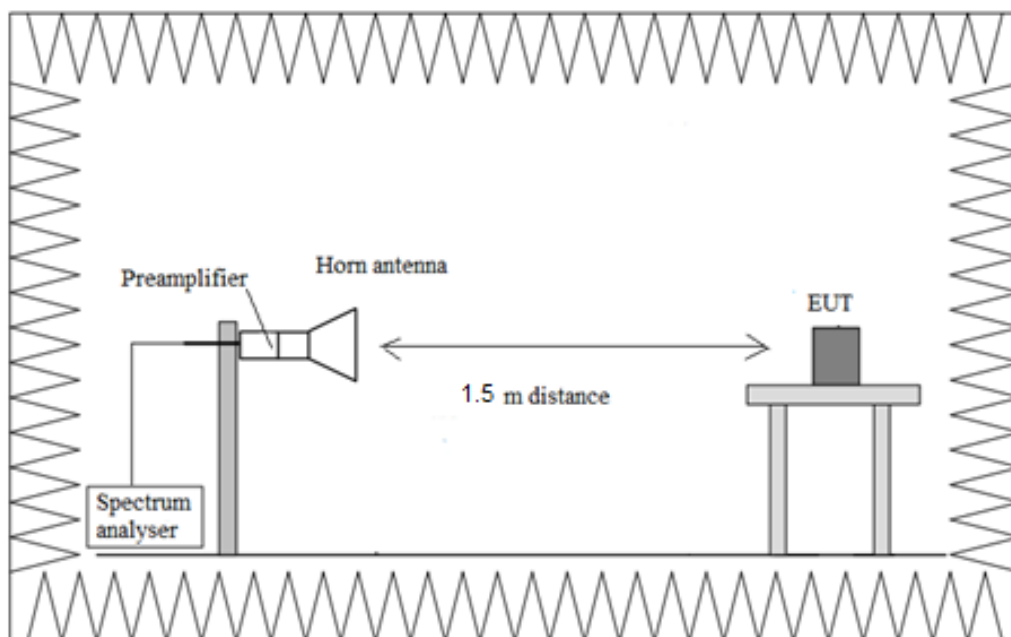

TEST CASES DETAILS

99dBw Occupied Channel Bandwidth 99%

Operation Band: [2400, 2483.5]

Modulation: BTLE 5.0 (GFSK 1 Mbit/s)



Results

Freq (MHz)	Occ Ch BW (MHz)
2402.00000	1.045
2440.00000	1.050
2480.00000	1.055

Attachments


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2402.00000, Equipment Type = Digital
Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

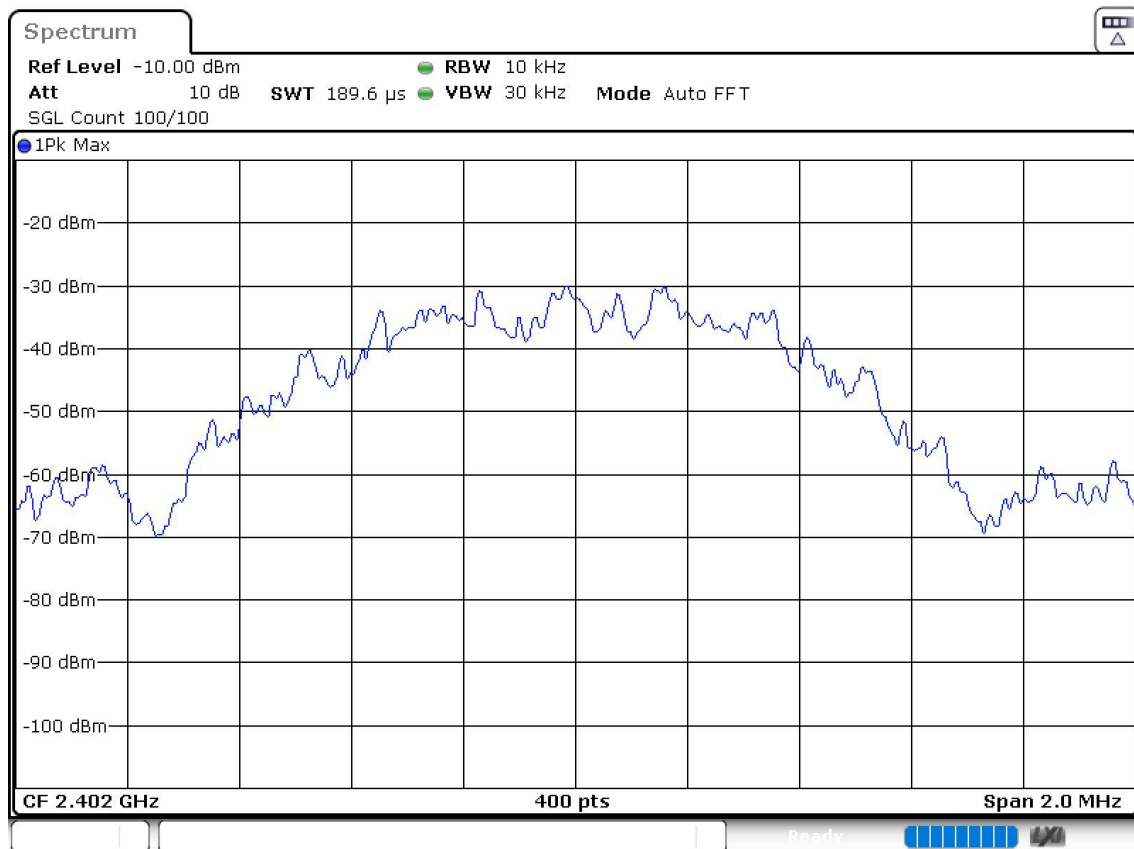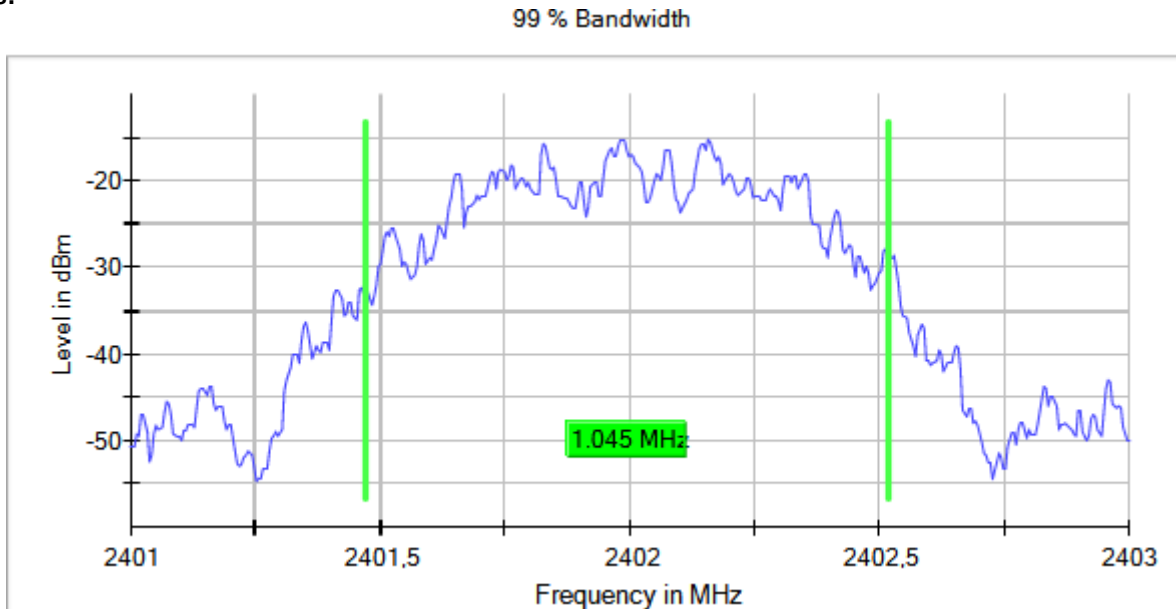


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2440.00000, Equipment Type = Digital
Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

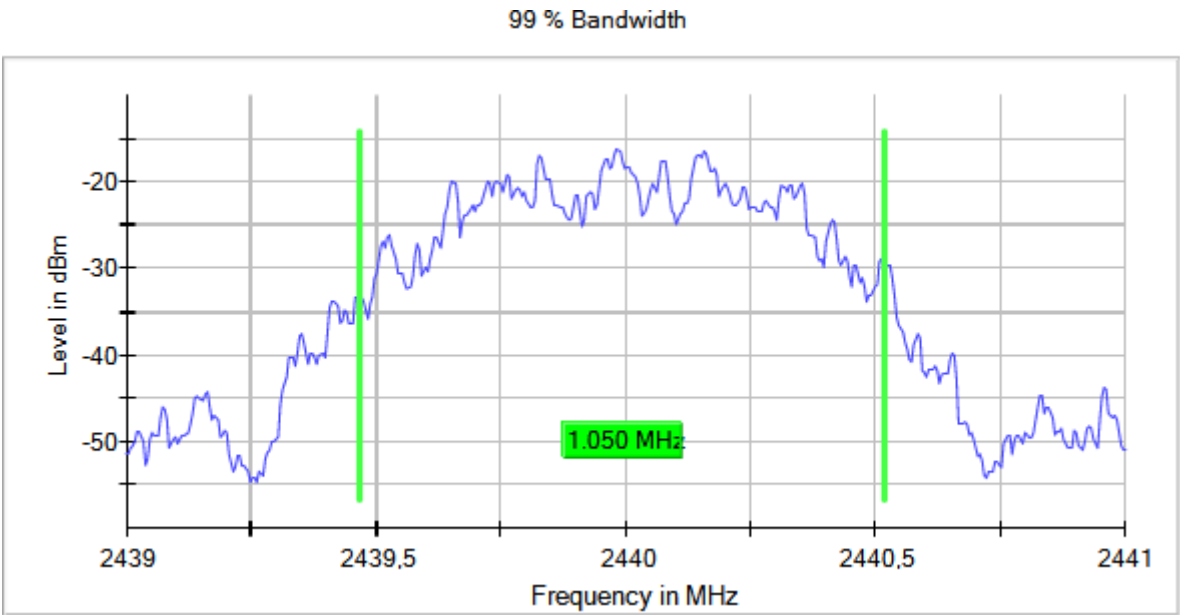

Operation Band MHz = [2400, 2483.5], Frequency MHz = 2480.00000, Equipment Type = Digital
Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

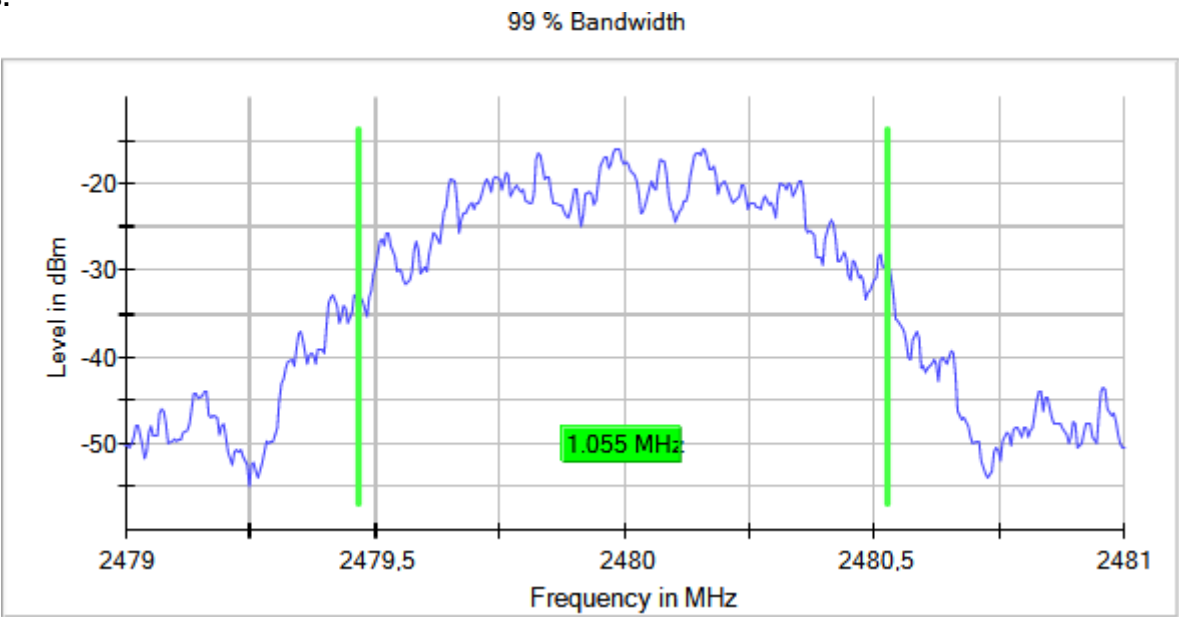

FCC 47 CFR Part 15.247 / RSS-247

RSS-247 5.2 (a) / FCC 15.247 (a) (2) [6dBw] 6 dB Bandwidth

Limits

The minimum 6 dB bandwidth shall be at least 500 kHz.

Modulation: BTLE 5.0 (GFSK 1 Mbit/s)

Results

Freq (MHz)	Emission Bandwidth (MHz)
2402.00000	0.73
2440.00000	0.73
2480.00000	0.73



Verdict

Pass

Attachments



Frequency MHz = 2402.00000, Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

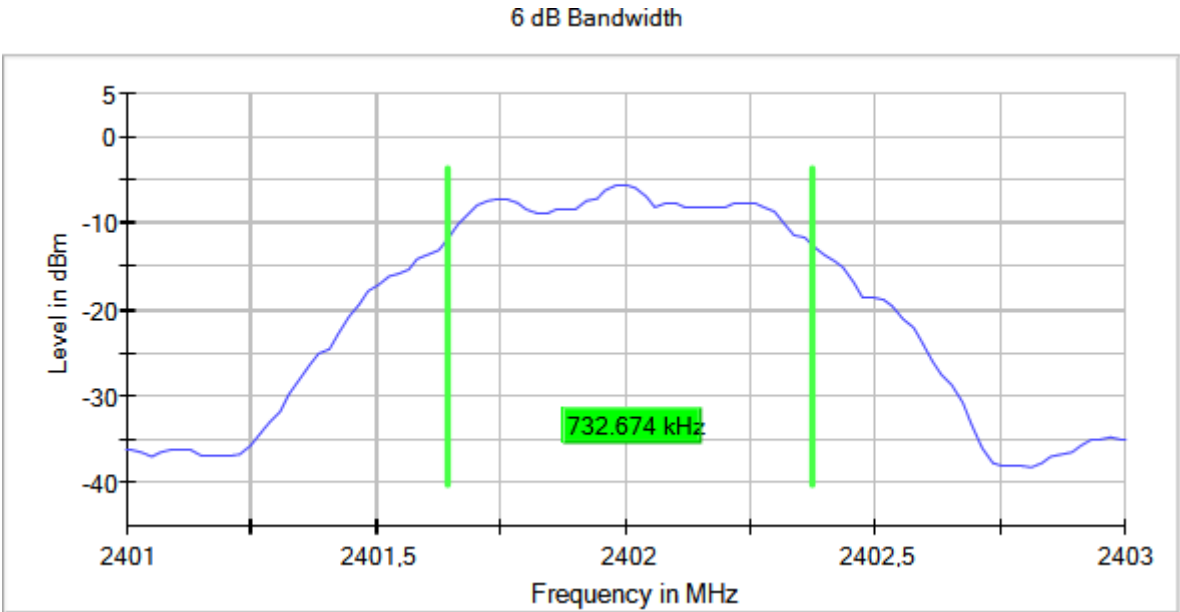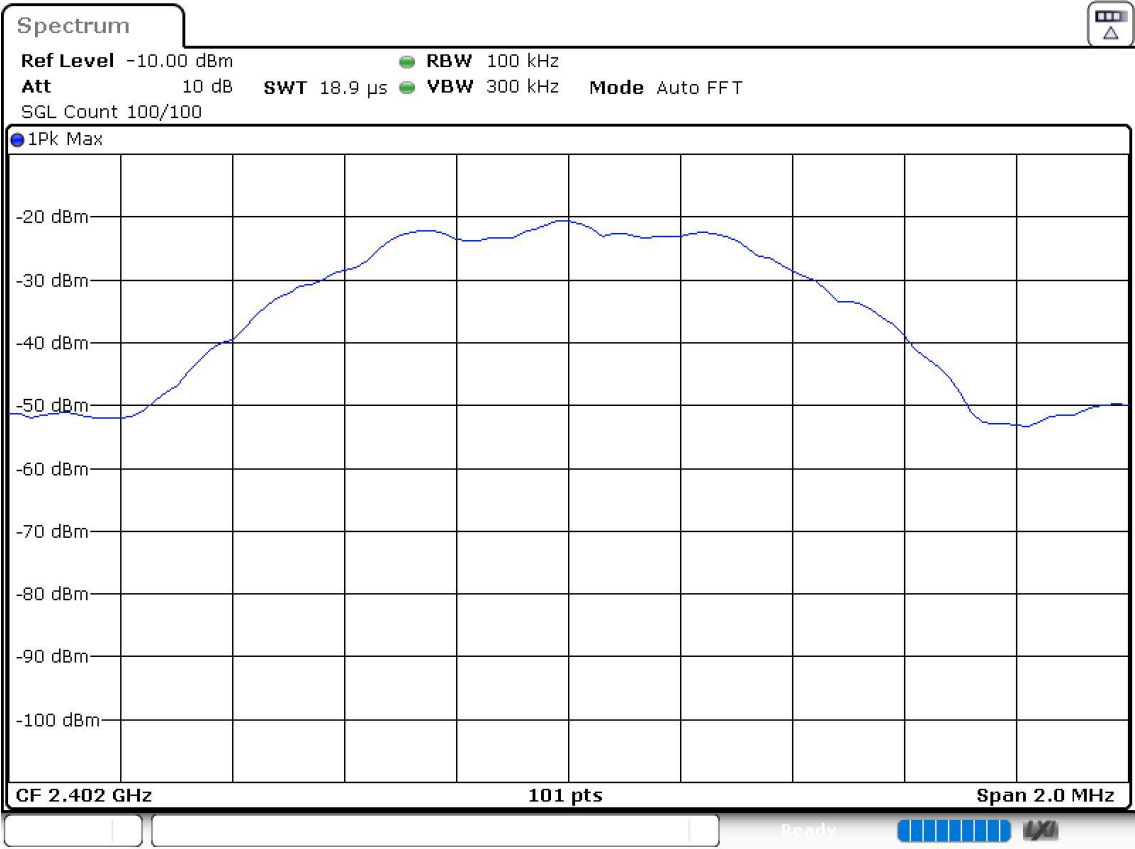


Frequency MHz = 2440.00000, Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

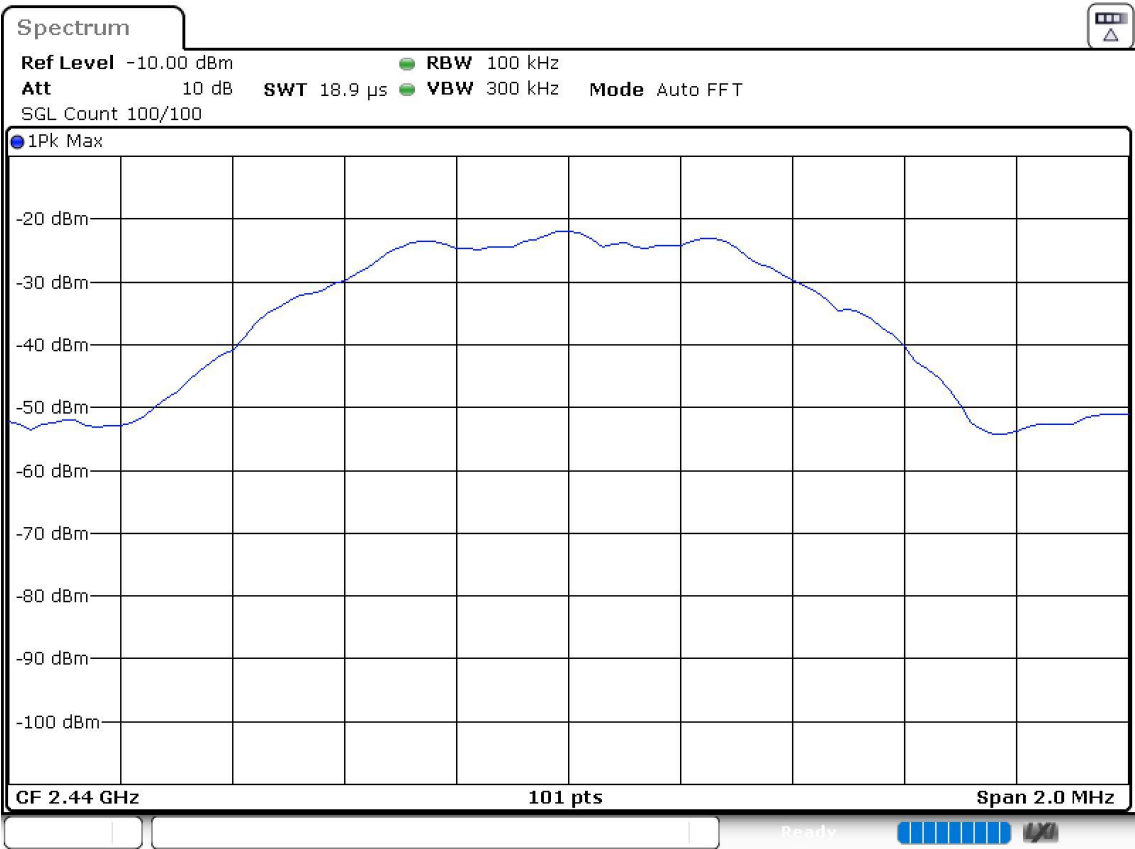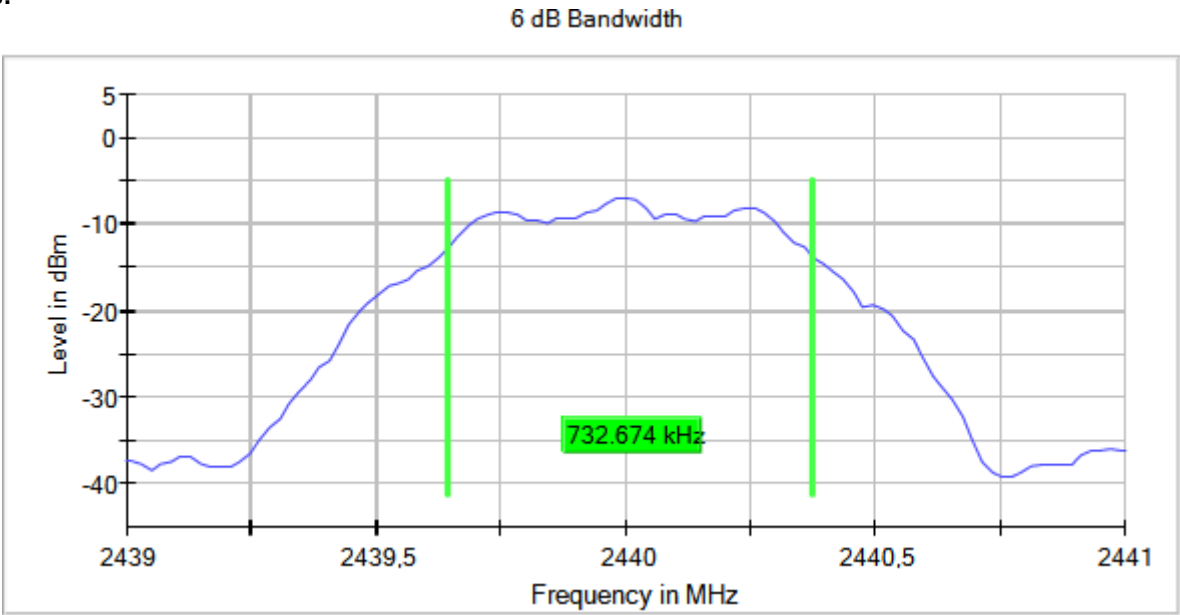

Frequency MHz = 2480.00000, Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

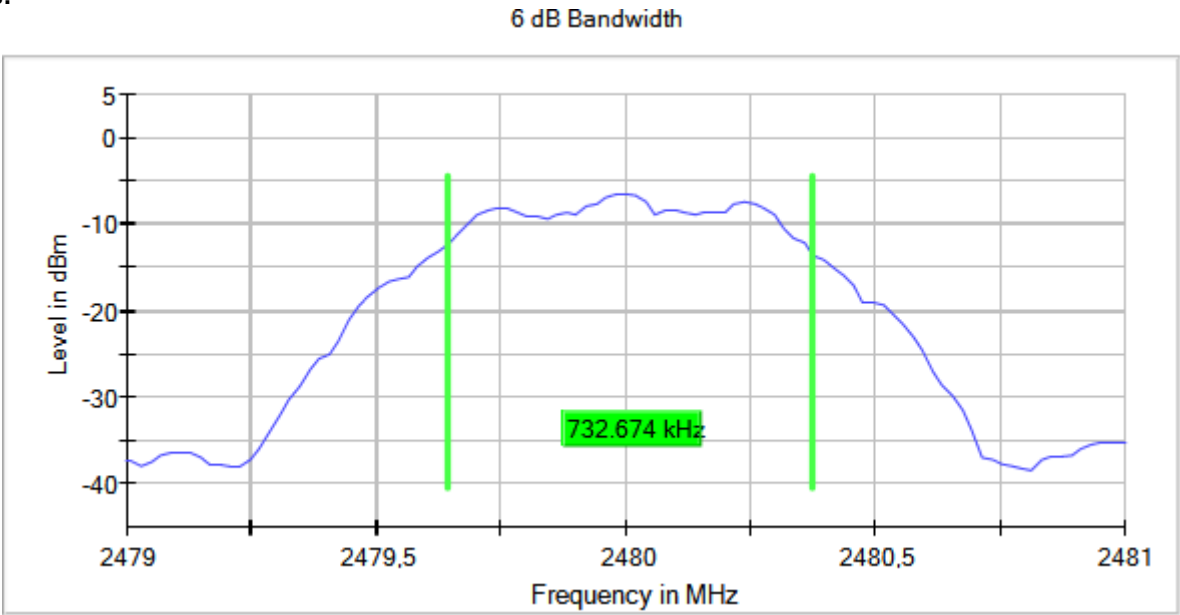

RSS-247 5.2 (b) / FCC 15.247 (e) [Psd] Power spectral density

Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Modulation: BTLE 5.0 (GFSK 1 Mbit/s)

Results

The maximum power spectral density level in the fundamental emission was measured using the method according to point 11.10.2. "Method PKPSD (peak PSD)" of ANSI C.63.10-2013.

Freq (MHz)	PSD (dBm)	Limit Max (dBm)
2402.00000	-15.020	8.00
2440.00000	-16.193	8.00
2480.00000	-15.599	8.00



Verdict

Pass

Attachments



Operation Band MHz = [2400, 2483.5], Frequency MHz = 2402.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

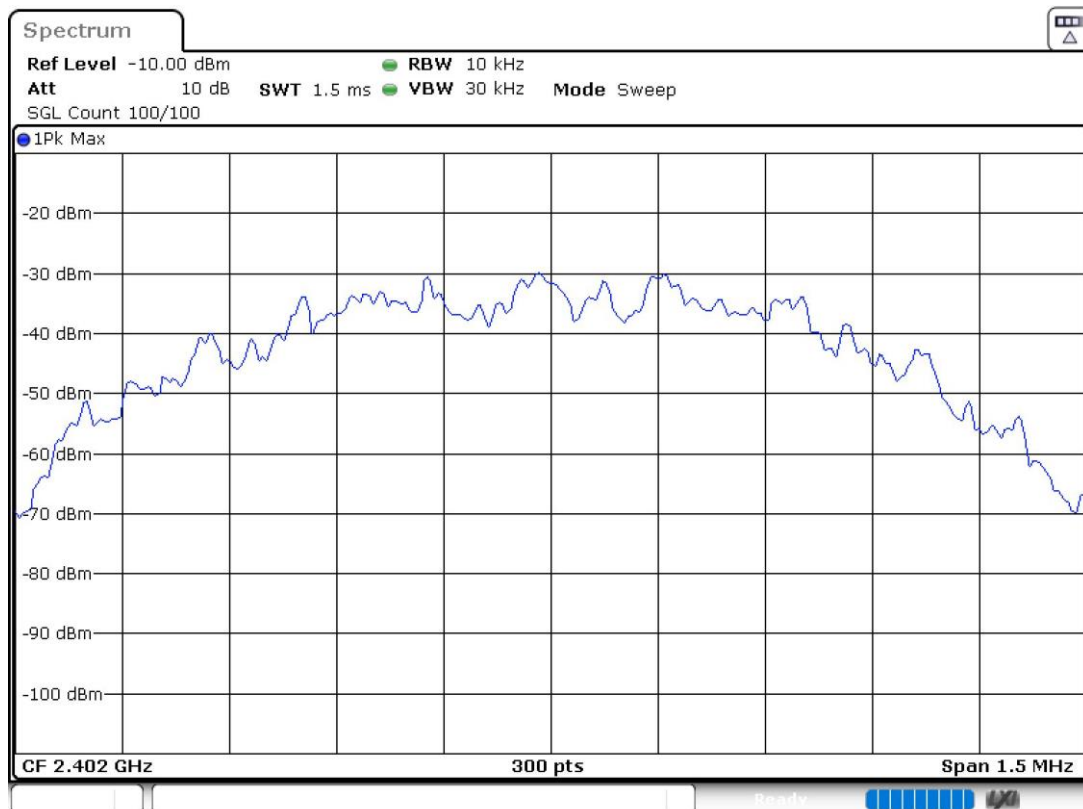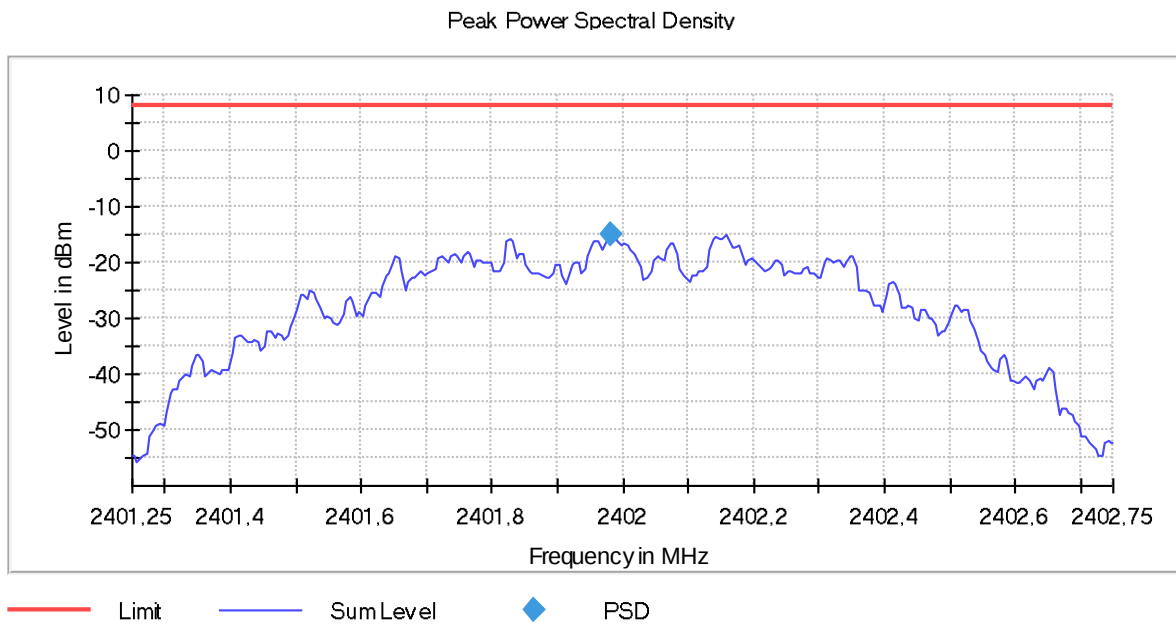



Operation Band MHz = [2400, 2483.5], Frequency MHz = 2440.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

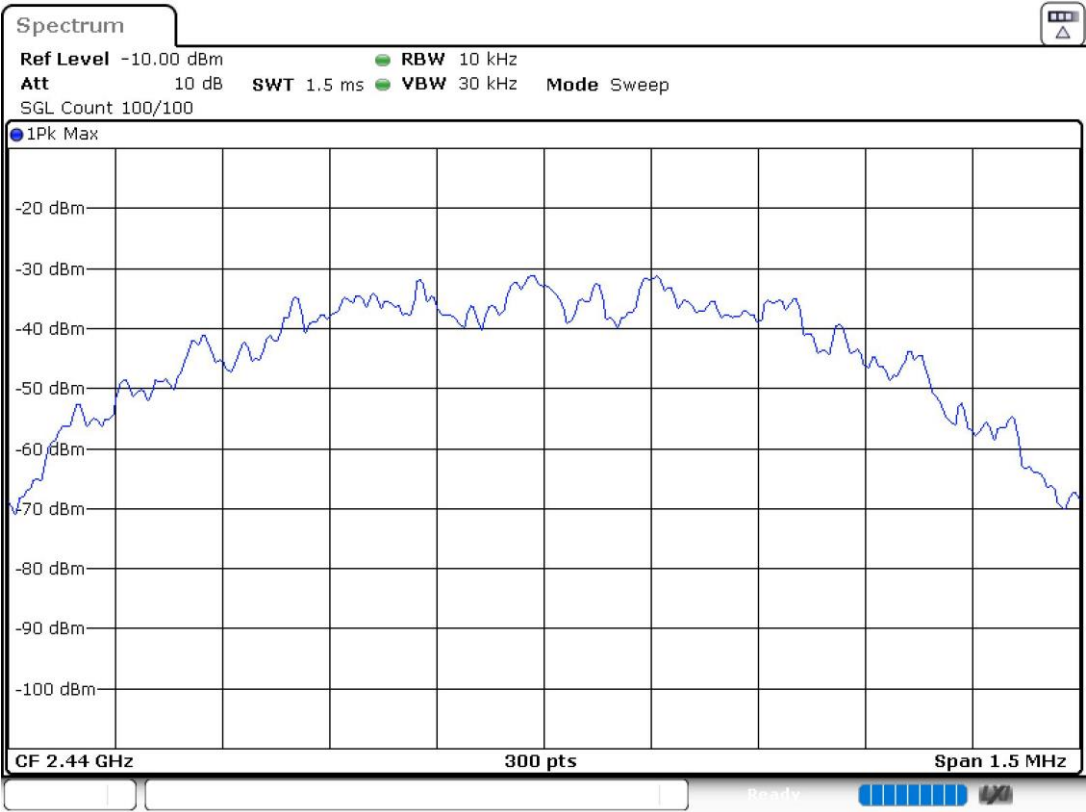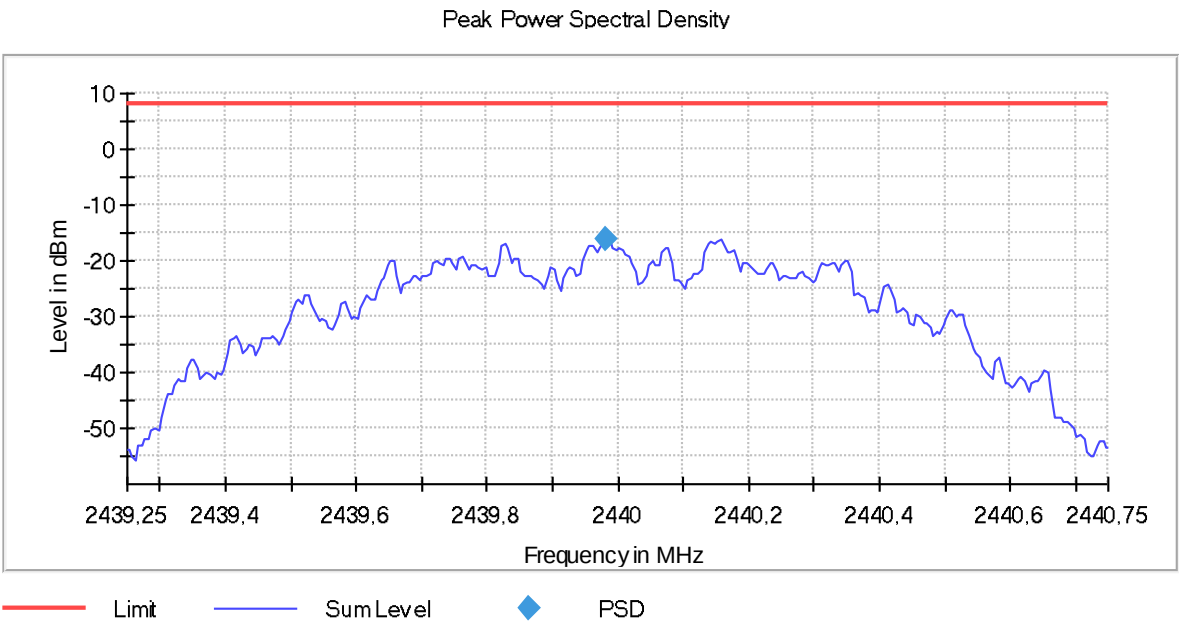

Operation Band MHz = [2400, 2483.5], Frequency MHz = 2480.00000, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

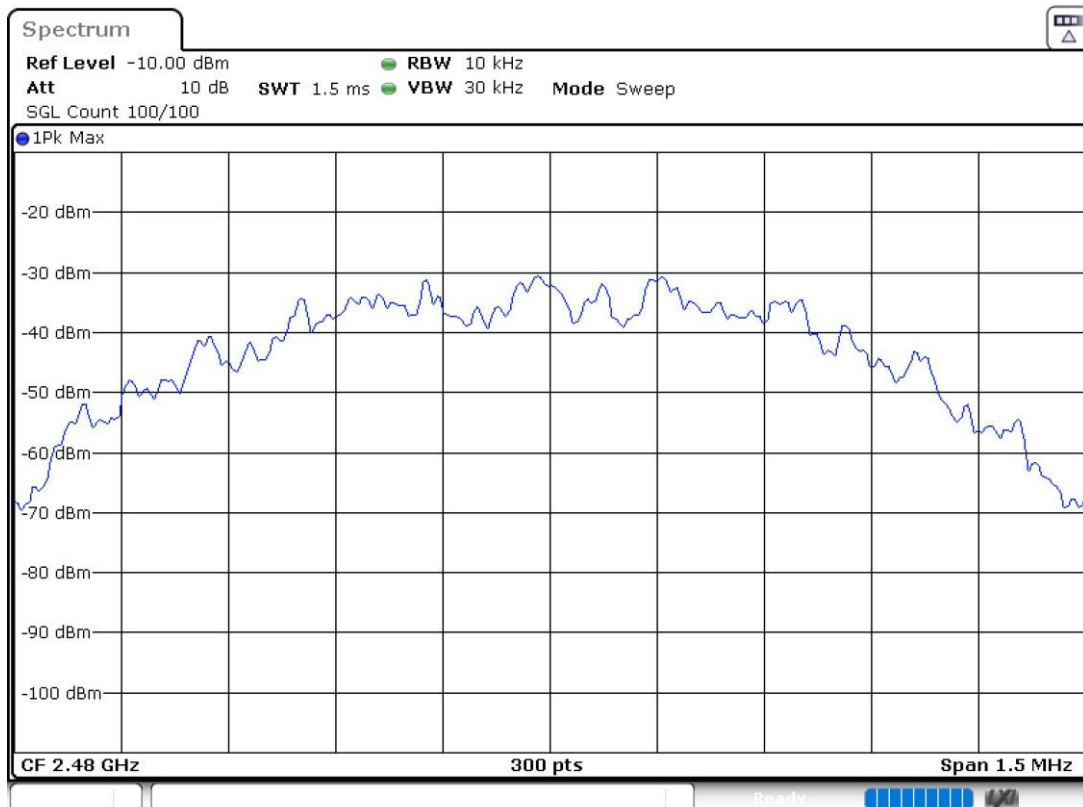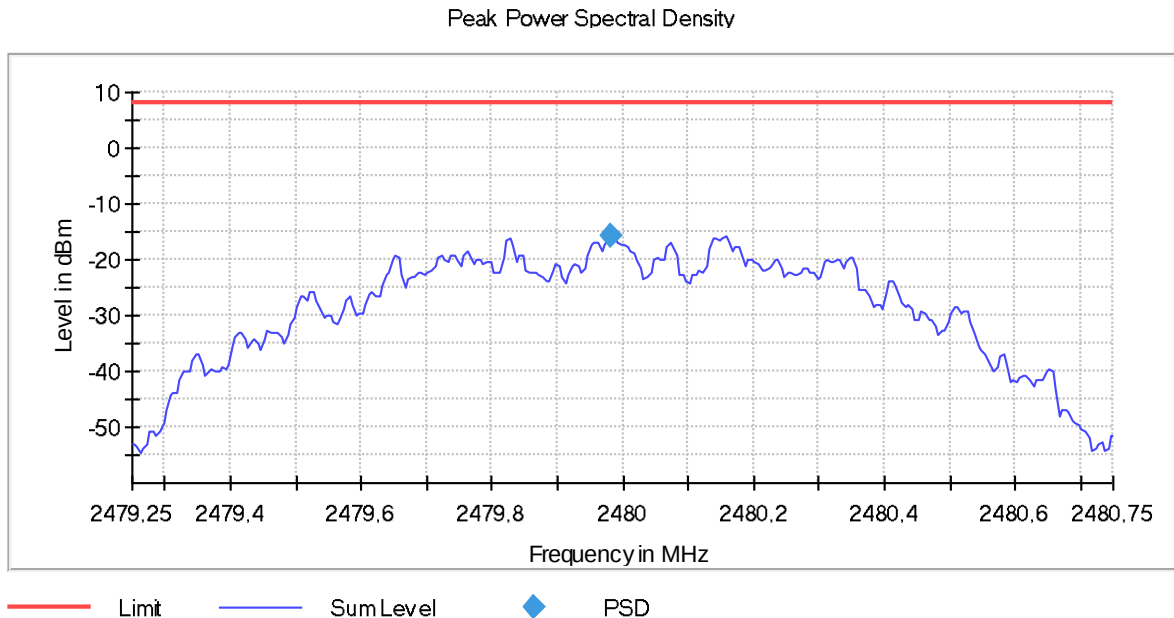

RSS-247 5.4 (d) / FCC 15.247 (b) (3) [Pkcp] Maximum Peak Conducted output power

Limits

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).

The e.i.r.p. shall not exceed 4 W (36 dBm) (Canada).

The maximum peak conducted output power level in the fundamental emission was measured using the method according to point 11.9.1.1 "RBW $\geq$ DTS bandwidth" of ANSI C.63.10-2013.

Operation Band: [2400, 2483.5]

Modulation: BTLE 5.0 (GFSK 1 Mbit/s)

Results

Freq (MHz)	Peak Power (dBm)	Maximum EIRP Power (dBm)
2402.00000	-5.6	-17,46
2440.00000	-6.8	-18,66
2480.00000	-6.3	-18,16


Verdict

Pass

Attachments



Operation Band MHz = [2400, 2483.5], Frequency MHz = 2402.00000, Equipment Type = Digital
Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

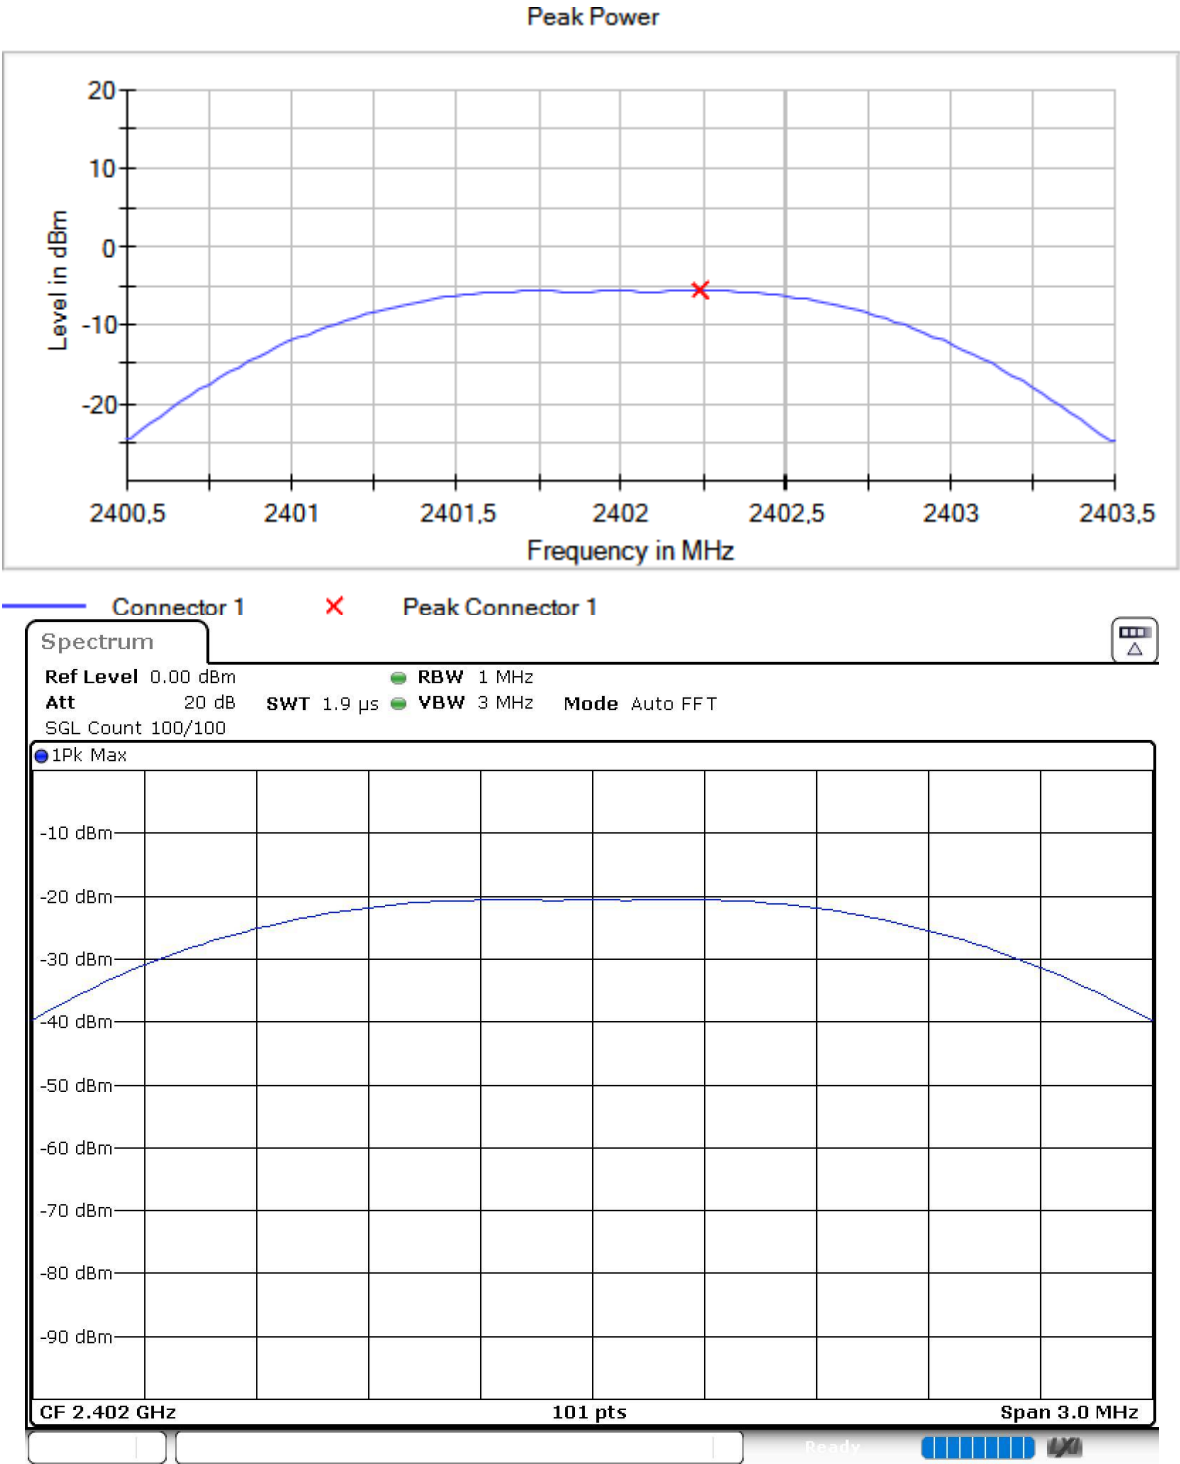



Operation Band MHz = [2400, 2483.5], Frequency MHz = 2440.00000, Equipment Type = Digital
Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

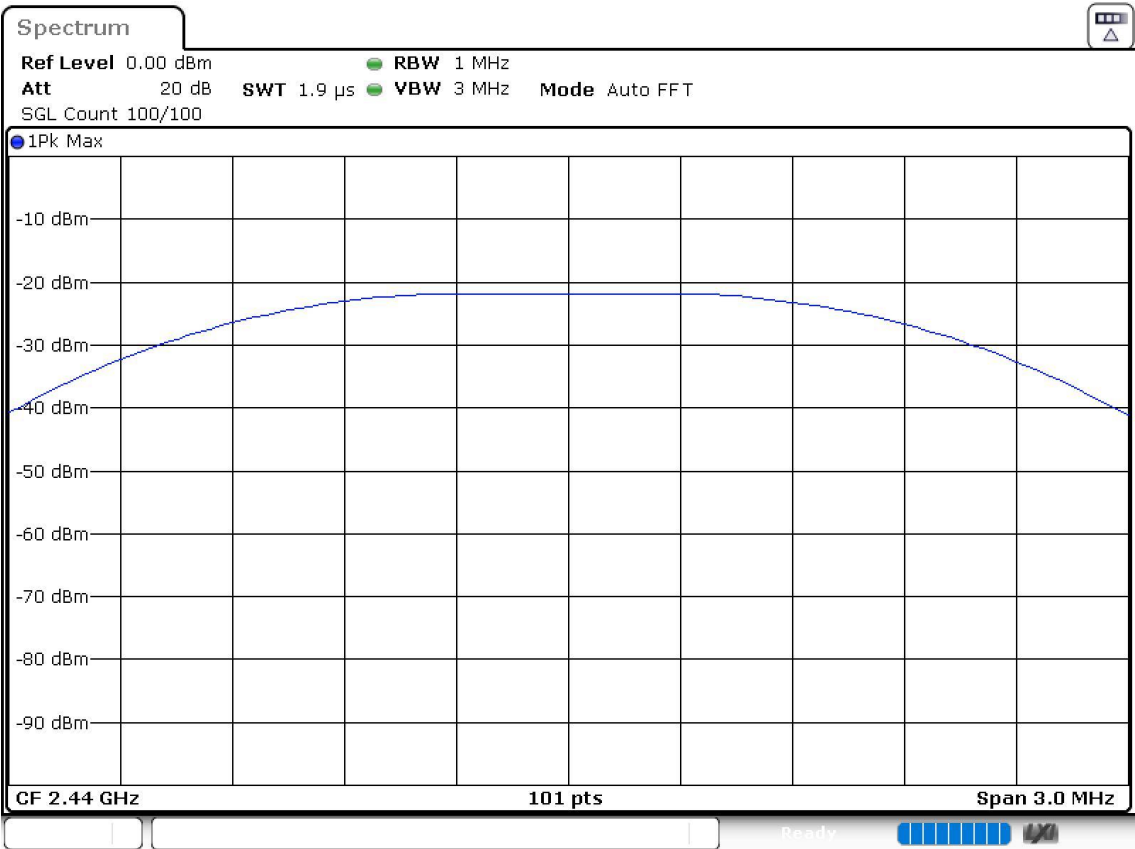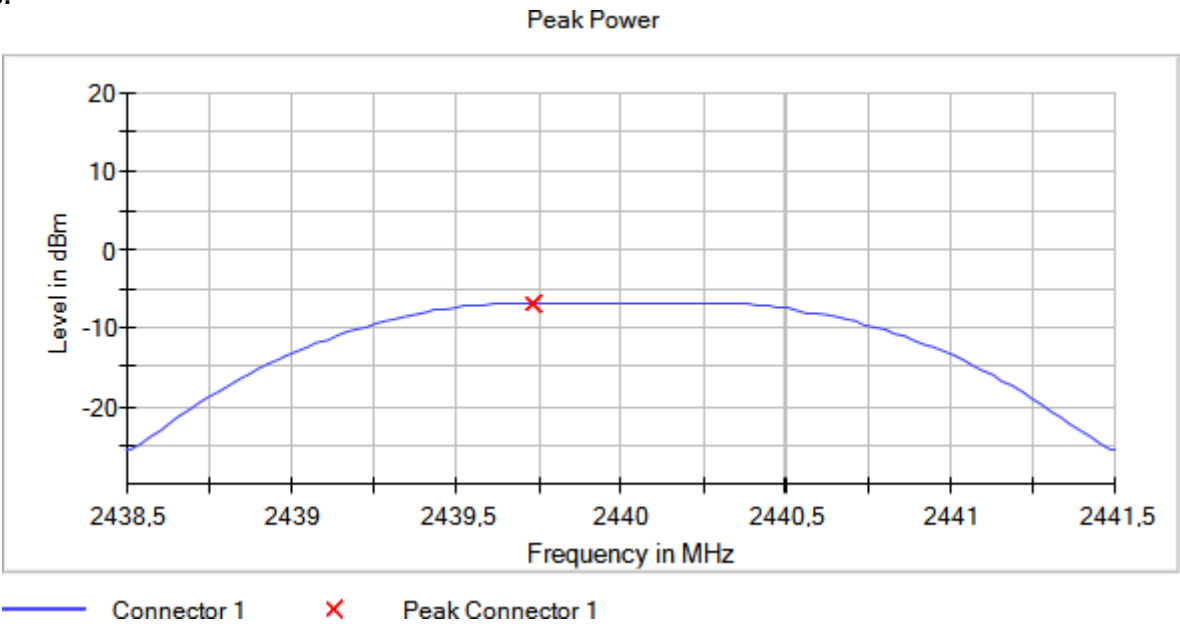

Operation Band MHz = [2400, 2483.5], Frequency MHz = 2480.00000, Equipment Type = Digital
Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s)

Images:

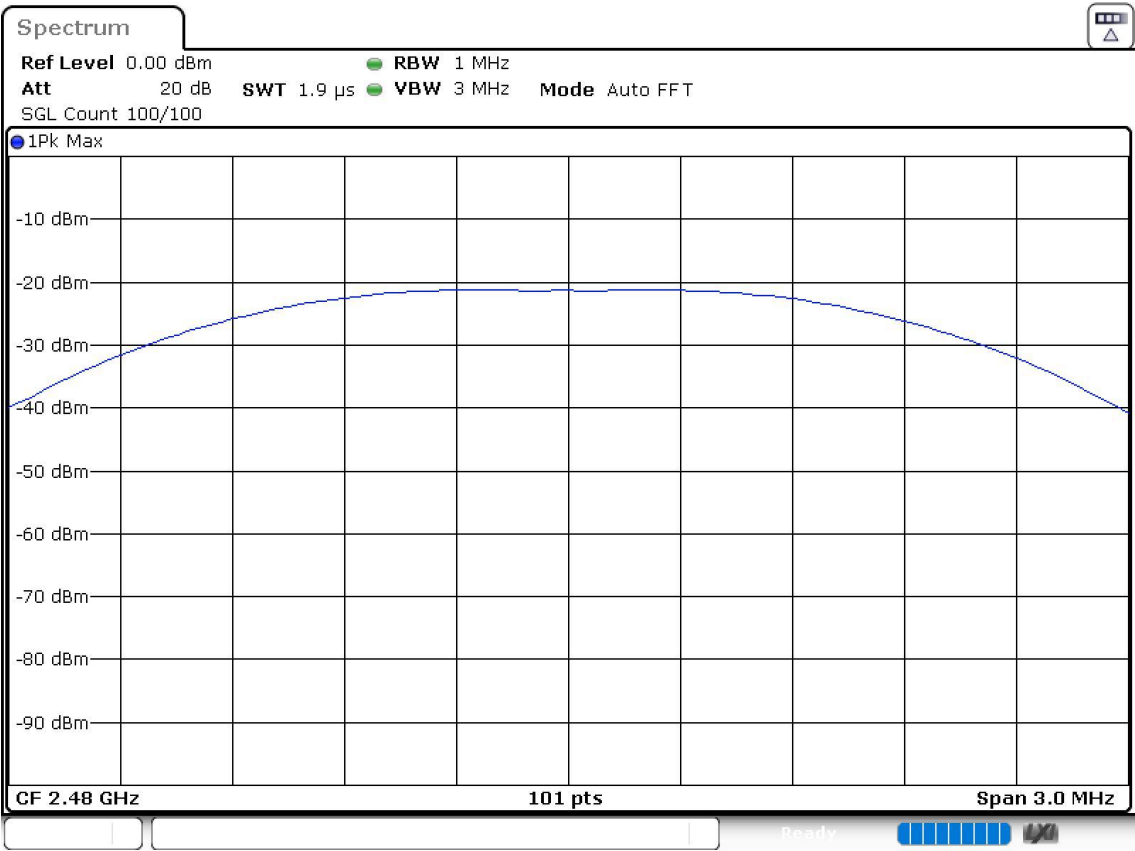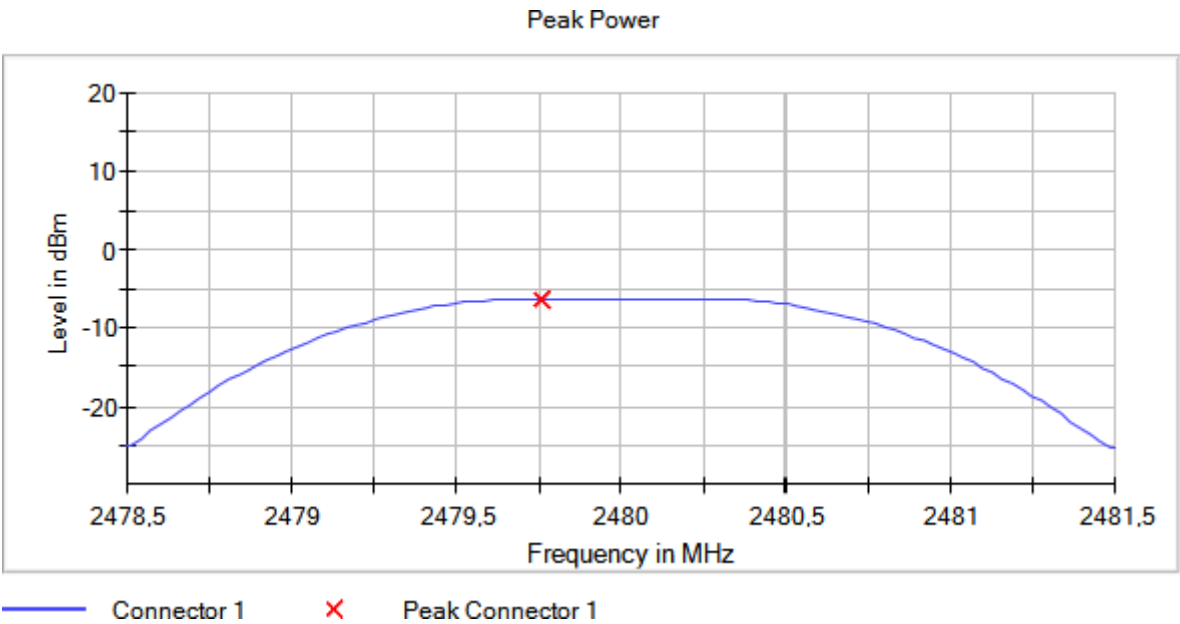

RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Operation Band: [2400, 2483.5]

Modulation: BTLE 5.0 (GFSK 1 Mbit/s)

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.



Verdict

Pass

Attachments



Operation Band MHz = [2400, 2483.5], Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Measurement Point = 1

Images:

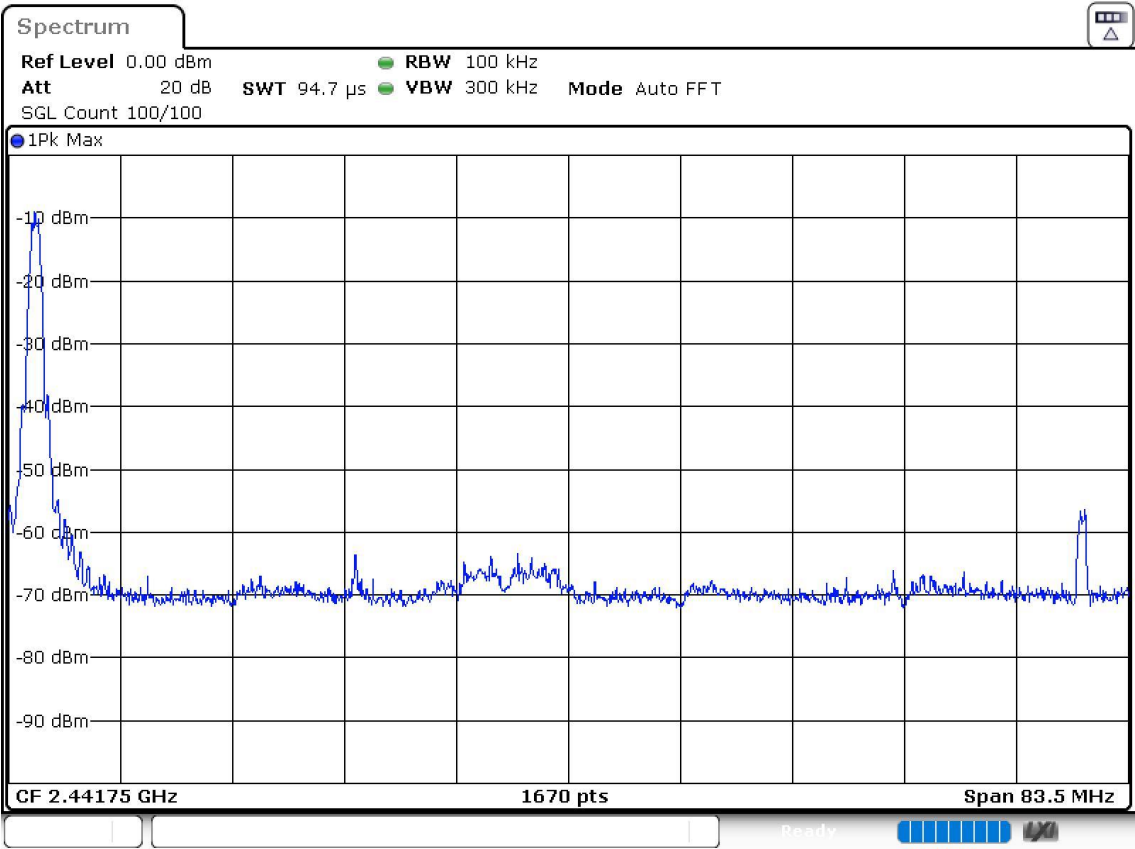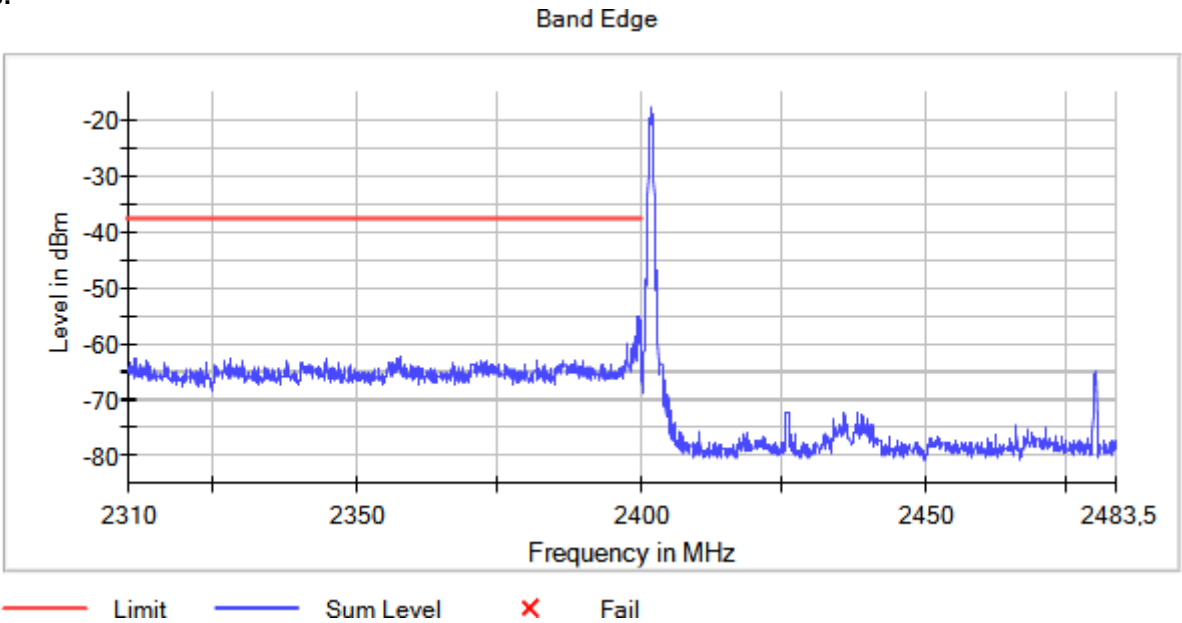

Operation Band MHz = [2400, 2483.5], Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Measurement Point = 1

Images:

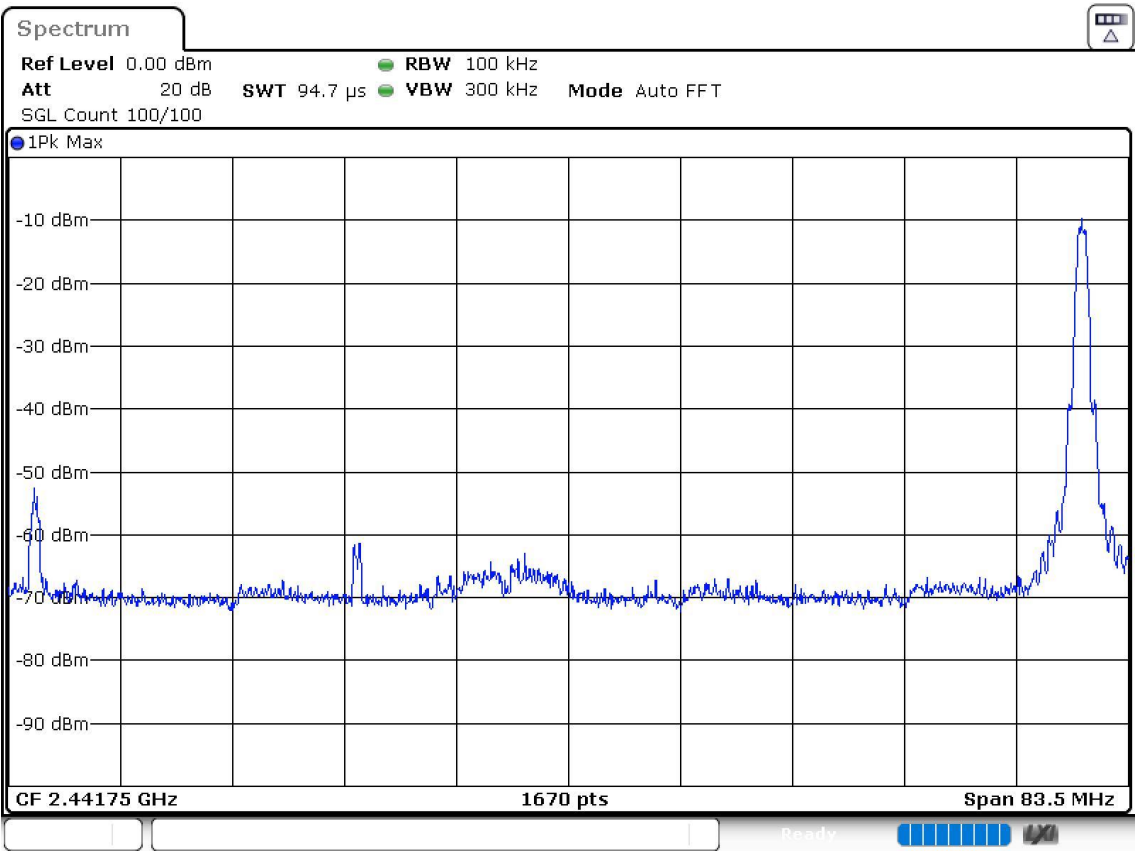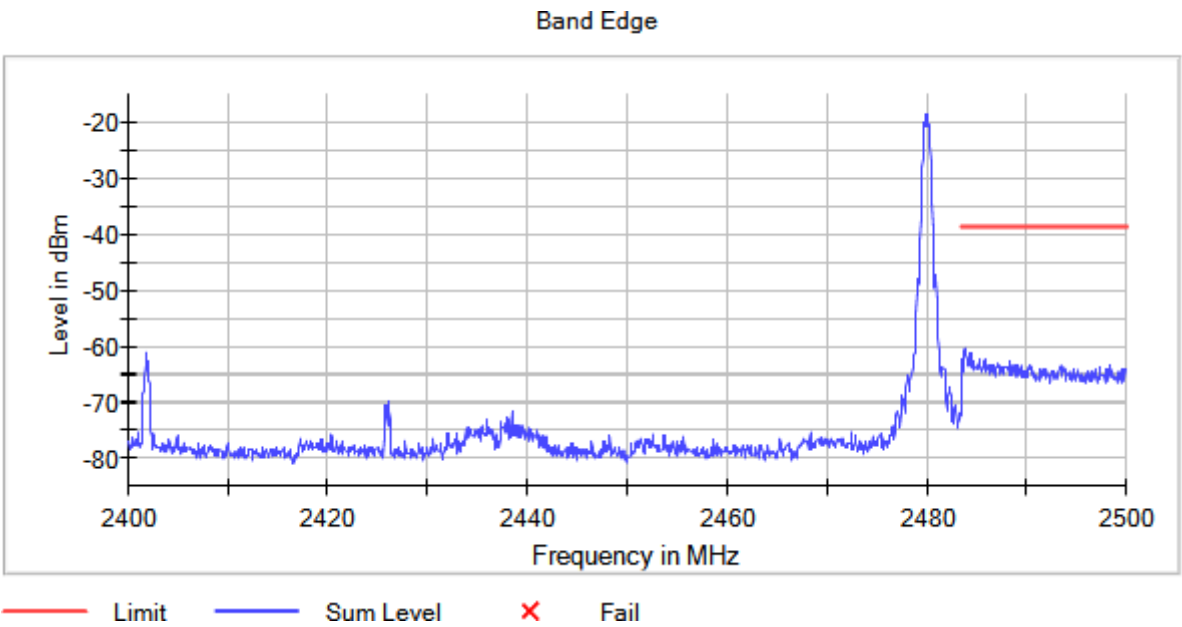

RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

Operation Band: [2400, 2483.5]

Modulation: BTLE 5.0 (GFSK 1 Mbit/s)

Results


Verdict

Pass

Attachments


Operation Band MHz = [2400, 2483.5], Frequency MHz = The spurious frequencies detected do not depend neither on the operating channel, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Frequency Range GHz = [0.03, 1], Measurement Point = 1

Images:

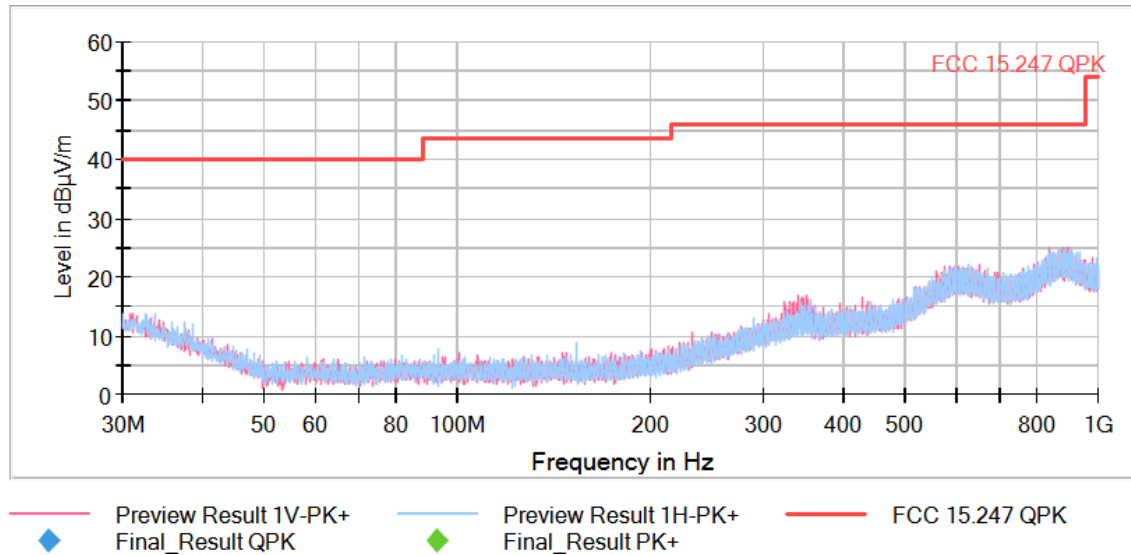


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2402, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1

Images:

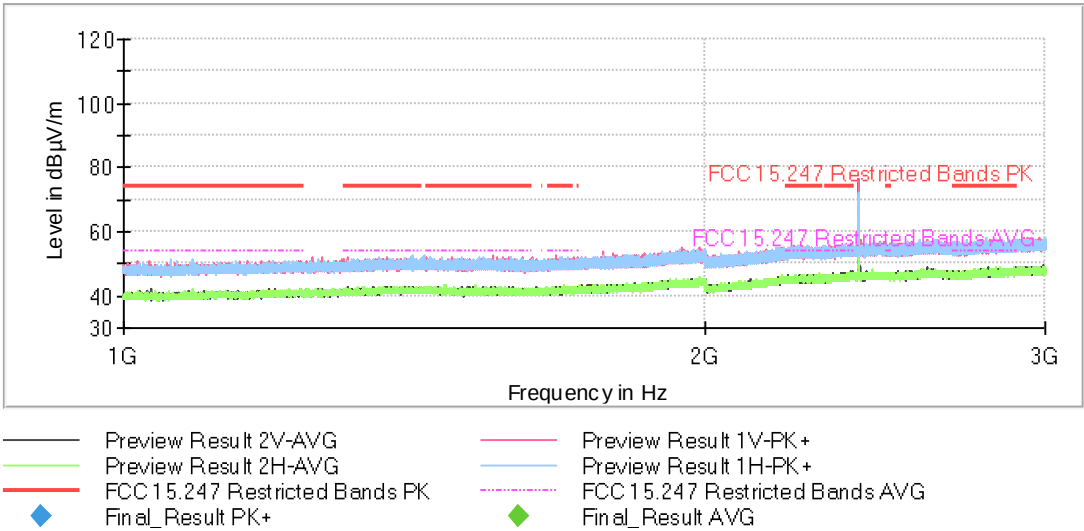

Restricted Band 1

Full Spectrum

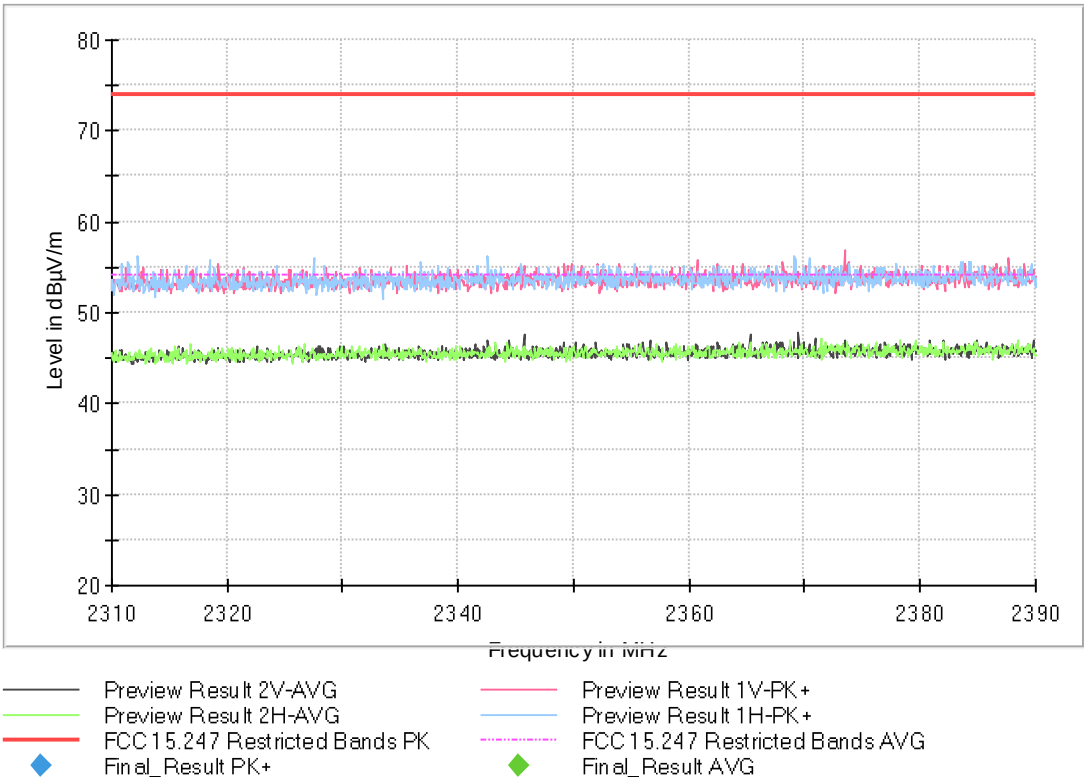


Restricted Band 2

Full Spectrum




Operation Band MHz = [2400, 2483.5], Frequency MHz = 2440, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1

Images:

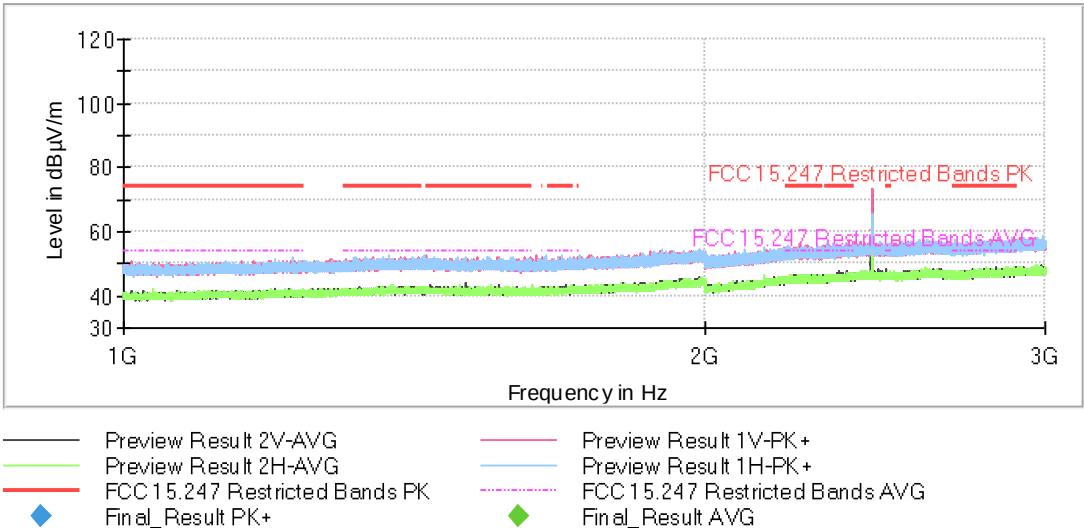


Restricted Band 1

Full Spectrum

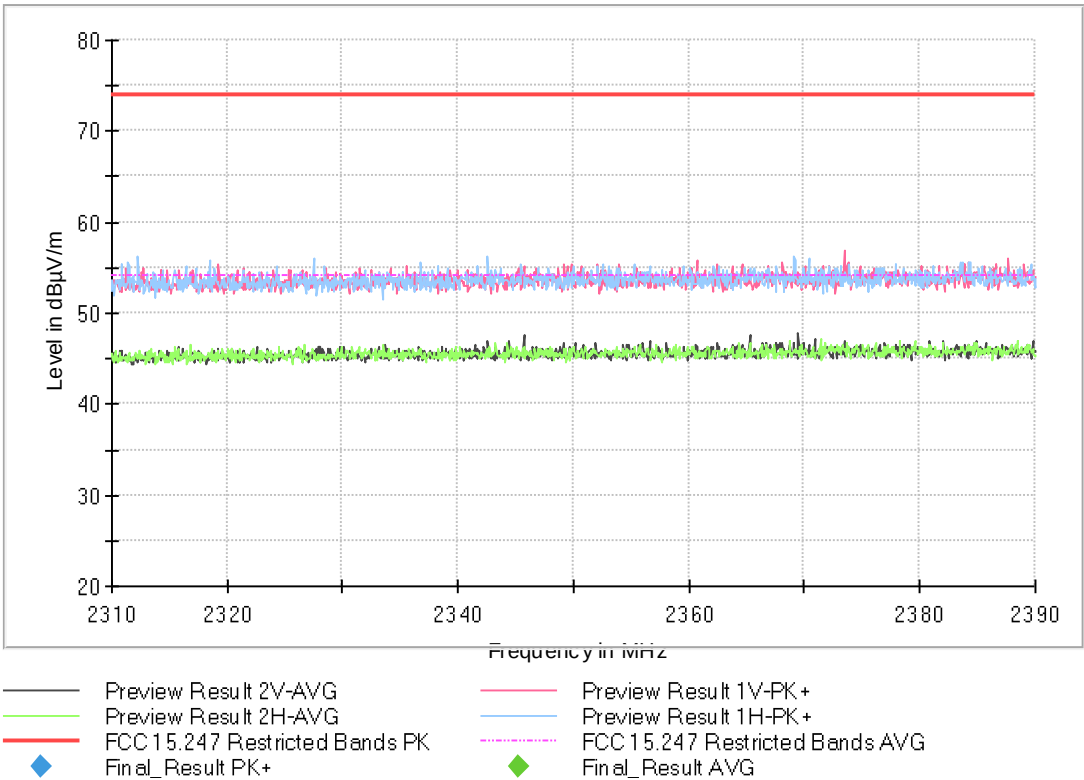


Restricted Band 2

Full Spectrum

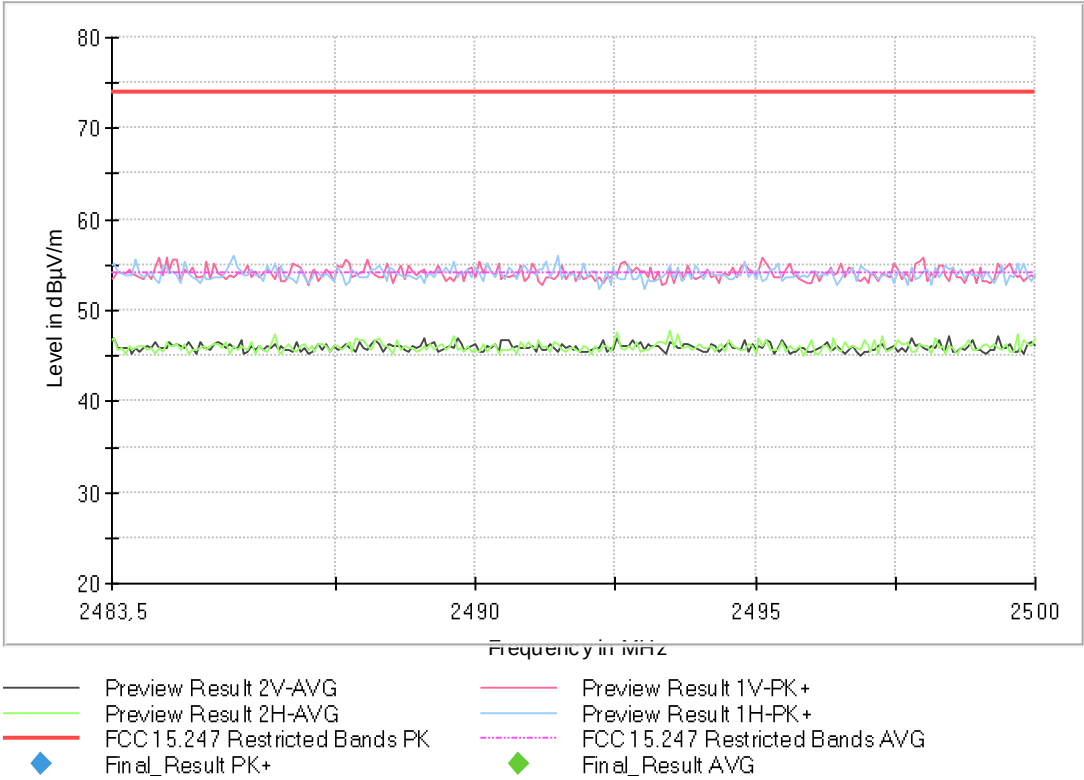


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2480, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Frequency Range GHz = [1, 3], Measurement Point = 1

Images:

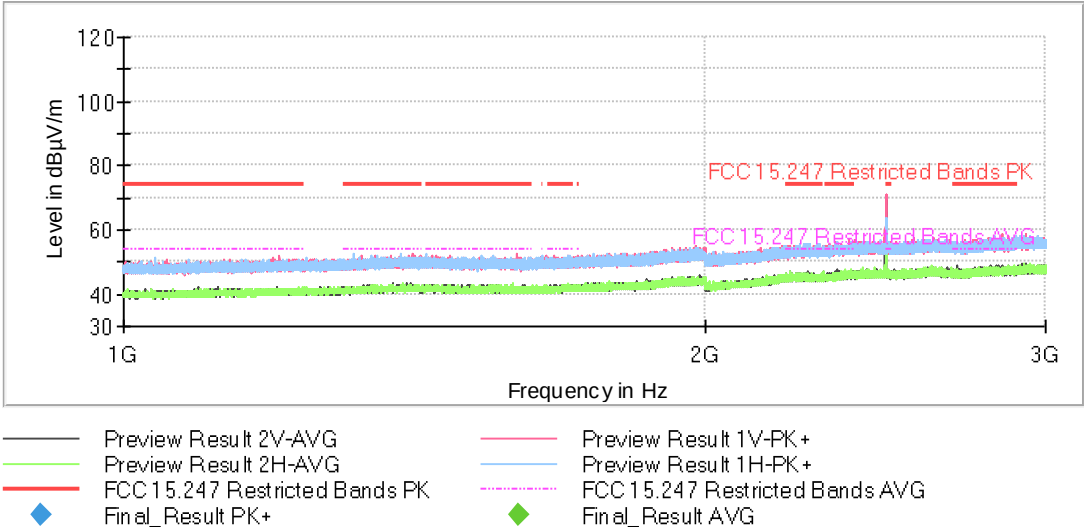


Restricted Band 1

Full Spectrum

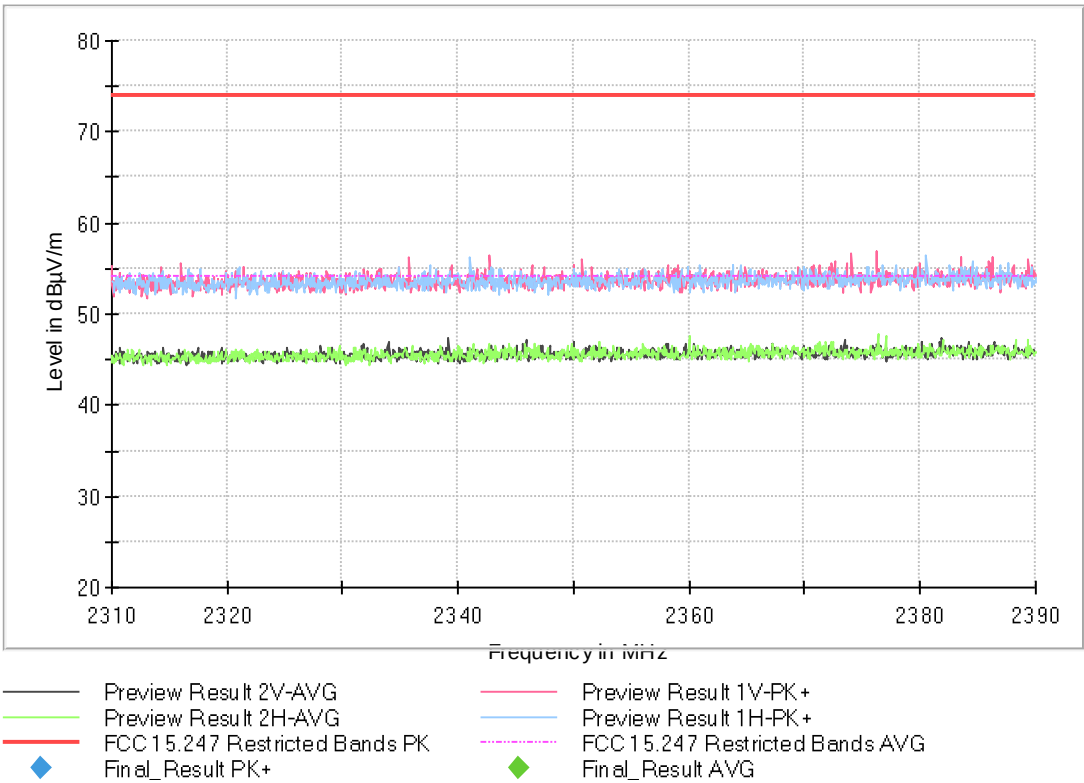


Restricted Band 2

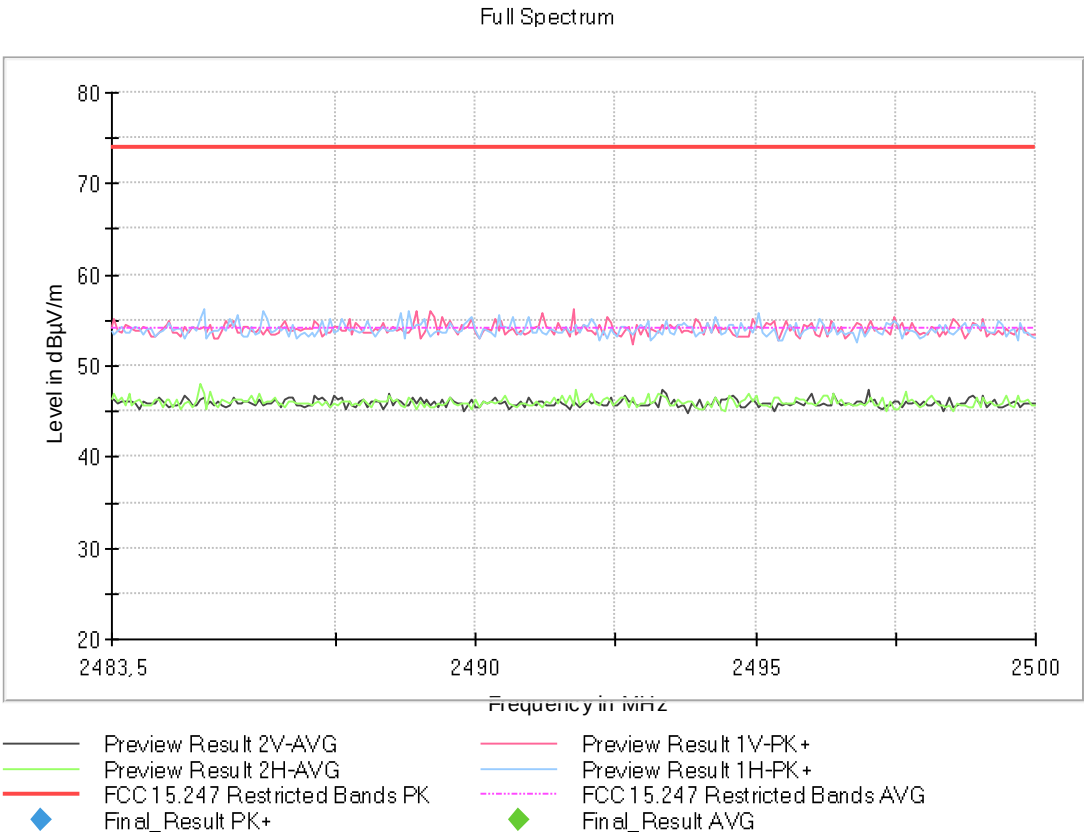


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2402, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

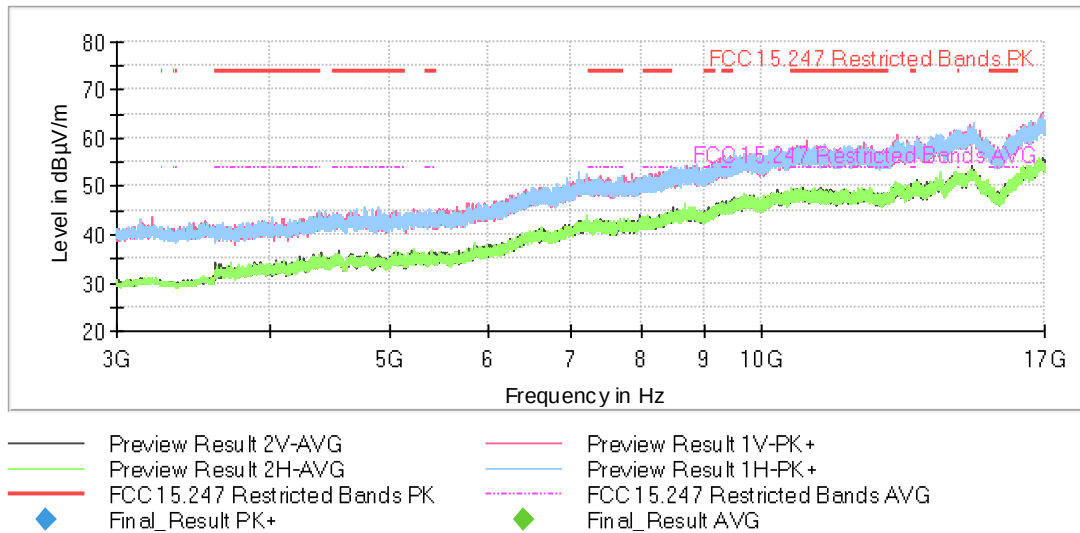


Operation Band MHz = [2400, 2483.5], Frequency MHz = 2440, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

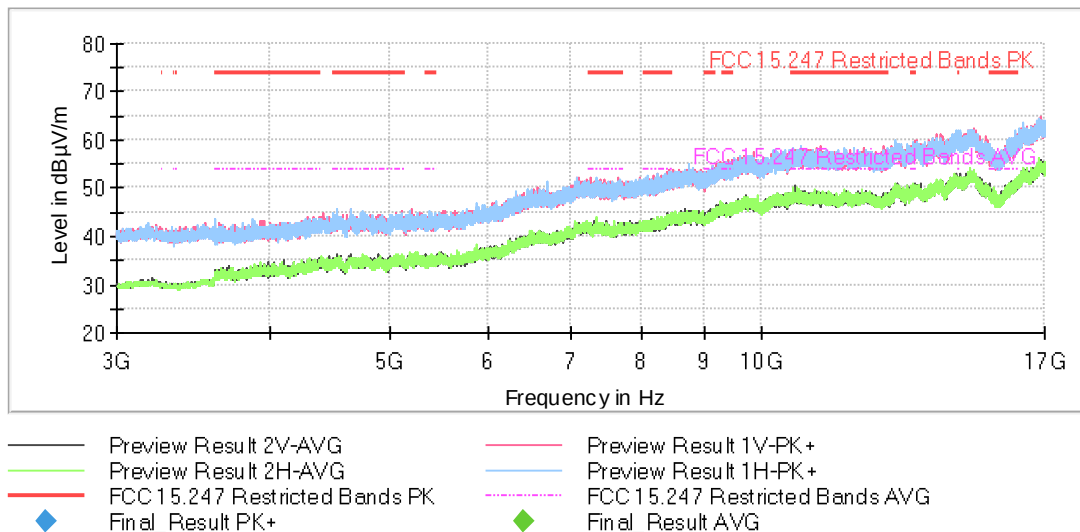

Operation Band MHz = [2400, 2483.5], Frequency MHz = 2480, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Frequency Range GHz = [3, 17], Measurement Point = 1

Images:

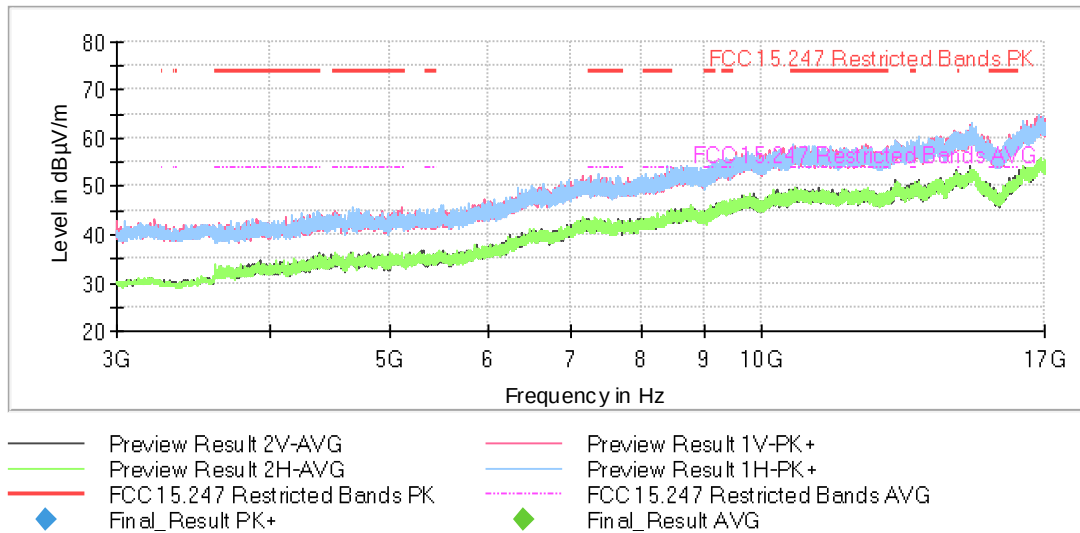

Operation Band MHz = [2400, 2483.5], Frequency MHz = The spurious frequencies detected do not depend neither on the operating channel, Equipment Type = Digital Transmission System (DTS), Modulation = BTLE 5.0 (GFSK 1 Mbit/s), Frequency Range GHz = [17, 26], Measurement Point = 1

Images:

