

RF Test Report

Project Number: 4944213**Offer Number:** SUW-202207003096**Report Number:** 4944213EMC01**Revision Level:** 1**Client:** iKeyless, LLC**Equipment Under Test:** Keyless Entry Remote Control**Model / HVIN:** 300-0271**FCC ID:** X32-RHKFO**IC:** 8797A-RHKFO**Applicable Standards:** FCC Part 15 Subpart C, § 15.231 Periodic Operation in the band 40.66-40.77MHz and above 70MHz**ANSI C63.10:** 2013**RSS-210, Issue 10 (Annex A)****RSS-GEN Issue 5****Report issued on:** 28 August 2023**Test Result:** Compliant

FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER: 3212.01

Report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Prepared by:

Martin Taylor, Project Engineer

Reviewed by:

David Schramm, Operations Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. And for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 30 days only.

Table of Contents

1	SUMMARY OF TEST RESULTS	3
1.1	MODIFICATIONS REQUIRED FOR COMPLIANCE	3
2	GENERAL INFORMATION.....	4
2.1	CLIENT INFORMATION	4
2.2	TEST LABORATORY	4
2.3	GENERAL INFORMATION OF EUT	4
2.4	OPERATING MODES AND CONDITIONS	4
2.5	EUT CONNECTION BLOCK DIAGRAM – CONDUCTED MEASUREMENTS.....	5
2.6	EUT CONNECTION BLOCK DIAGRAM – RADIATED MEASUREMENTS	5
2.7	SYSTEM CONFIGURATIONS	5
3	ANTENNA REQUIREMENT.....	6
3.1	RESULT.....	6
3.2	REQUIREMENT.....	6
3.3	CONCLUSION	6
4	FIELD STRENGTH OF FUNDAMENTAL.....	7
4.1	TEST RESULT.....	7
4.2	TEST METHOD.....	7
4.3	TEST SETUP DIAGRAM.....	8
4.4	TEST SITE	8
4.5	TEST EQUIPMENT	8
4.6	DUTY CYCLE CORRECTION FACTOR (DCCF).....	9
4.7	TEST DATA – PLOTS	10
4.8	TEST DATA – TABULAR.....	13
5	FIELD STRENGTH OF SPURIOUS RADIATION.....	14
5.1	TEST RESULT.....	14
5.2	TEST METHOD.....	14
5.3	TEST SITE	15
5.4	TEST EQUIPMENT	15
5.5	TEST DATA – BELOW 1 GHz	16
5.6	TEST DATA – ABOVE 1 GHz	19
6	BANDWIDTH	25
6.1	TEST RESULT.....	25
6.2	TEST METHOD.....	25
6.3	TEST SITE	25
6.4	TEST EQUIPMENT	25
6.5	TEST DATA.....	26
7	DEACTIVATION TIME	27
7.1	TEST RESULT.....	27
7.2	TEST METHOD.....	27
7.3	TEST SITE	27
7.4	TEST EQUIPMENT	27
7.5	TEST DATA.....	28
8	REVISION HISTORY	29

1 Summary of Test Results

Test Description	Test Specification	Test Result
Antenna requirement	47 CFR Part 15, Subpart C 15.203	Compliant
Field strength of fundamental	15.231(b); RSS-210 A.1.2(a) ANSI C63.10:2013, Section 6.5	Compliant
Field strength of spurious radiation	15.231(b); RSS-210 A.1.2(b) ANSI C63.10:2013, Section 6.5	Compliant
Bandwidth	15.231(c); RSS-210 A.1.3 ANSI C63.10:2013, Section 6.9	Compliant
Deactivation time (manual)	15.231(a)(1); RSS-210 A.1.1(a) ANSI C63.10:2013, Section 7.4	Compliant
Polling transmissions	15.231(a)(3); RSS-210 A.1.1(c)	N/A ¹
Transmission time for setup	15.231(a)(5) ANSI C63.10:2013, Section 7.4	N/A ²
Frequency stability	15.231(d) ANSI C63.10:2013, Section 6.8	N/A ³

Note 1: Not applicable since this device does not use polling or supervision transmissions.

Note 2: Not applicable since the transmission duration limits in paragraph (a)(1) are met.

Note 3: Not applicable since this device does not operate within the frequency band 40.66-40.70MHz.

1.1 Modifications Required for Compliance

None

2 General Information

2.1 Client Information

Name: iKeyless, LLC
Address: 12101 Sycamore Station Place
City, State, Zip, Country: Louisville, KY 40299

2.2 Test Laboratory

Name: SGS North America, Inc.
Address: 620 Old Peachtree Road NW, Suite 100
City, State, Zip, Country: Suwanee, GA 30024, USA

Accrediting Body: A2LA
Type of lab: Testing Laboratory
Certificate Number: 3212.01
ISED CAB Identifier: US0186
FCC Designation Number: US1126

2.3 General Information of EUT

Type of Product: Keyless Entry Remote Control
Product Marketing Name (PMN): 300-0271
Model Number (HVIN): 300-0271
Firmware Version ID (FVIN): SVN10965
Sample ID: SUWEM2207000390
FCC ID: X32-RHKFO
IC: 8797A-RHKFO

Frequency Range: 315 MHz
Modulation: ASK
Antenna: PCB trace loop (-5.6 dBi)


Rated Voltage: 3Vdc CR2032 coin cell battery
Test Voltage: 3Vdc CR2032 coin cell battery

Sample Received Date: 29 July 2022
Dates of testing: 12 August to 16 September 2022


2.4 Operating Modes and Conditions

The EUT was powered by one standard CR2032 coin cell battery during testing. Two types of samples were provided to SGS: normal and test mode. The test mode sample was configured by the client such that a button press would start a continuous transmit signal using the same modulation and power as a normal transmit signal but with a higher duty cycle than normal to make most testing easier. Pressing a different button would stop the continuous transmit signal. The normal sample was configured to operate as it would in the field with temporary transmissions triggered by pressing the various buttons. This sample was used to test the deactivation time as well as the normal operational duty cycle.

2.5 EUT Connection Block Diagram – Conducted Measurements

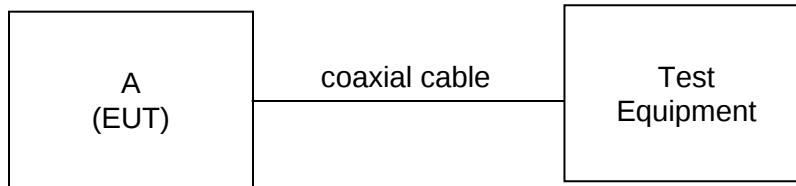

2.6 EUT Connection Block Diagram – Radiated Measurements



Inside Chamber

.....

Outside Chamber

2.7 System Configurations

Device reference	Manufacturer	Description	Model Number	Serial Number
A	iKeyless LLC	Keyless Entry Remote Control	300-0271	(not labeled) Sample ID: SUWEM2207000390

3 Antenna Requirement

3.1 Result

Test Description	Test Specification	Test Result
Antenna requirement	FCC 15.203	Compliant

3.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

3.3 Conclusion

The antenna in the device is a loop PCB trace antenna. It is permanently attached and thus meets the antenna requirement.

4 Field Strength of Fundamental

4.1 Test Result

Test Description	Test Specification		Test Result
Field strength of fundamental	15.231(b)	RSS-210 A.1.2	Compliant
	ANSI C63.10:2013, Section 6.5		

4.2 Test Method

The test data was measured using a Peak detector. Average measurements were made by correcting the peak value with the duty cycle correction factor. The receiver's resolution bandwidth was set to 120 kHz for measurements taken in the 30MHz to 1GHz frequency range and 1MHz for measurements for 1GHz and higher. Measurements were made with the antenna positioned at a 3m distance from the EUT in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency. The radiated measurements were recorded and compared to the limits indicated in the table below.

The EUT was oriented in each of its three orthogonal axes and data for each was reported.


Limits for average value of emissions measured at 3m distance

Fundamental frequency (MHz)	FCC	RSS-210
	Field strength of fundamental (microvolts/meter)	Field strength of fundamental (microvolts/meter)
40.66-40.70	2,250	Not allowed
70-130	1,250	
130-174	1,250 to 3,750 ¹	
174-260	3,750	
260-470	3,750 to 12,500 ¹	
Above 470	12,500	

1) Linear interpolations

From the table above, the fundamental limit for a 313.85 MHz fundamental frequency is determined by linear interpolation to be 75.6 dBuV/m.

4.3 Test Setup Diagram

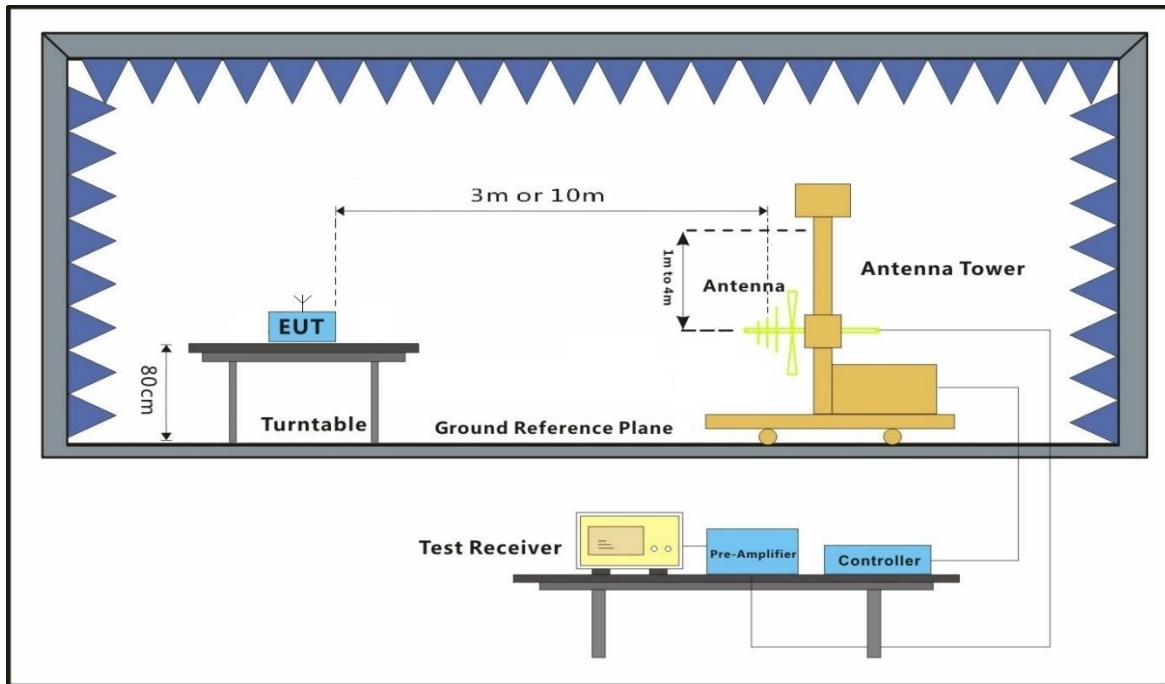

4.4 Test Site

10m Absorber Lined Shielded Enclosure (ALSE), Suwanee, GA

Environmental Conditions

Temperature: 23.0 °C

Relative Humidity: 47.9 %

Atmospheric Pressure: 98.1 kPa

4.5 Test Equipment

Test End Date: 24-Aug-2022


Tester: AB

Equipment	Model	Manufacturer	Asset Number	Cal Date	Cal Due Date
ANTENNA, BILOG	JB6	SUNOL	B079690	19-Apr-2022	19-Apr-2024
N to N RF Cable	NC12-N1N1-276	MEGAPHASE	22000	10-Jan-2022	10-Jan-2023
RF CABLE	UC-N-MM-275	MAURY MICROWAVE	17015	25-Aug-2021	25-Aug-2022
RF CABLE NM TO NM, 0.01-18GHZ	90-195-079	TELEDYNE STORM MICROWAVE	20124	14-Feb-2022	14-Feb-2023
LOW NOISE AMPLIFIER	ZKL-2+	MINI-CIRCUITS	B079817	26-Aug-2021	26-Aug-2022
RF CABLE	SUCOFLEX 100	HUBER & SUHNER	B108523	26-Aug-2021	26-Aug-2022
EMI RECEIVER	ESW44	ROHDE & SCHWARZ	B079793	26-Oct-2021	12-Mar-2023


Software: "RSE 30-1000 MHz T7 220318" TILE7 profile dated 18 March 2022



4.6 Duty Cycle Correction Factor (DCCF)



Duty Cycle				
Configuration	TX ON (ms)	Period, T (ms)	Duty Cycle (%)	DCCF (dB)
Normal	24.0	100.0	24	-12.4

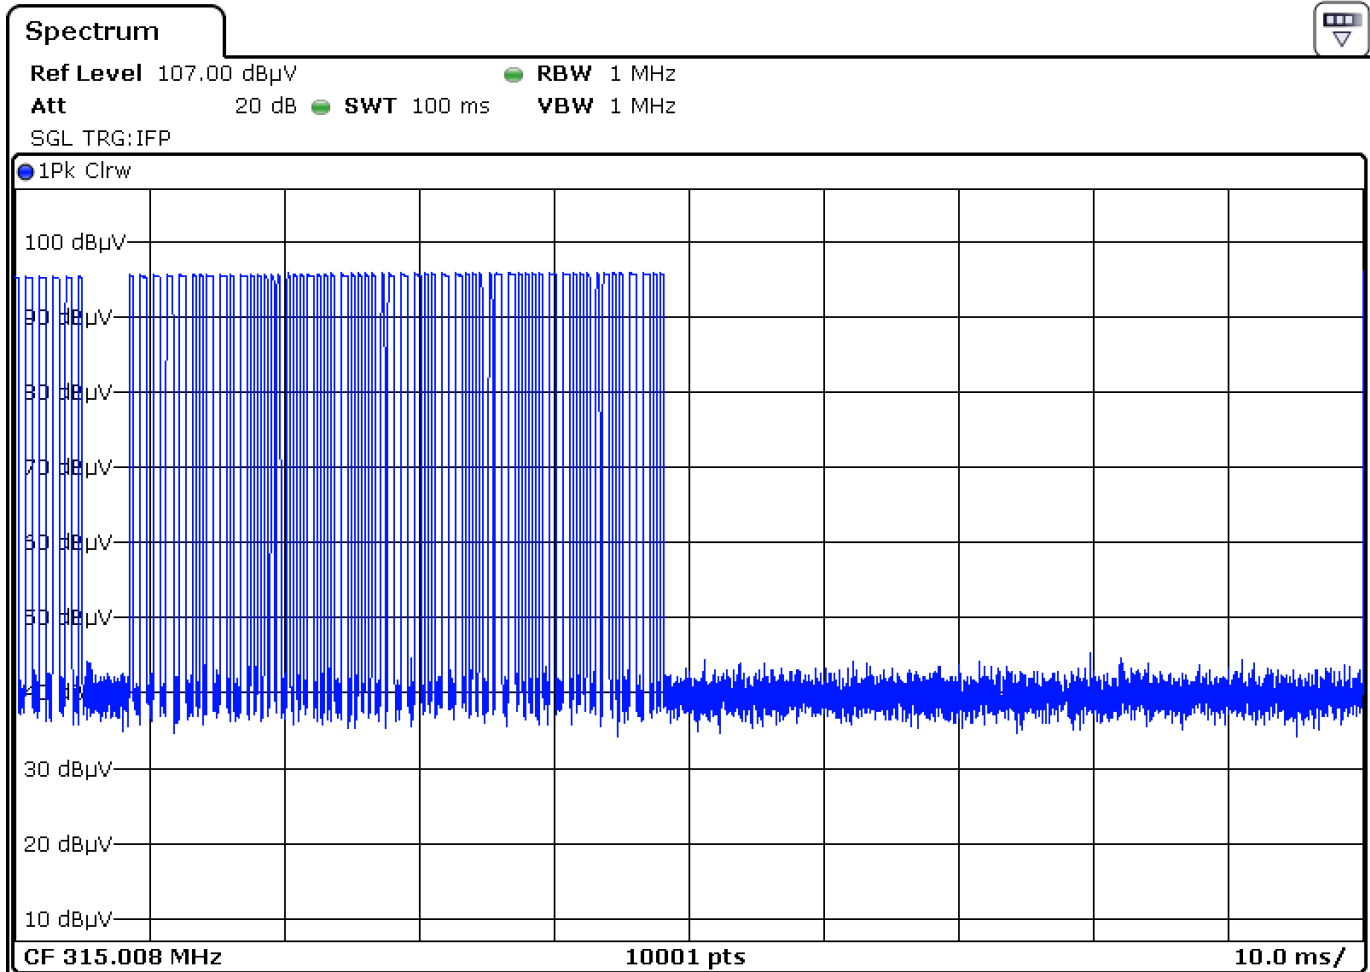

4.7 Test Data – Plots

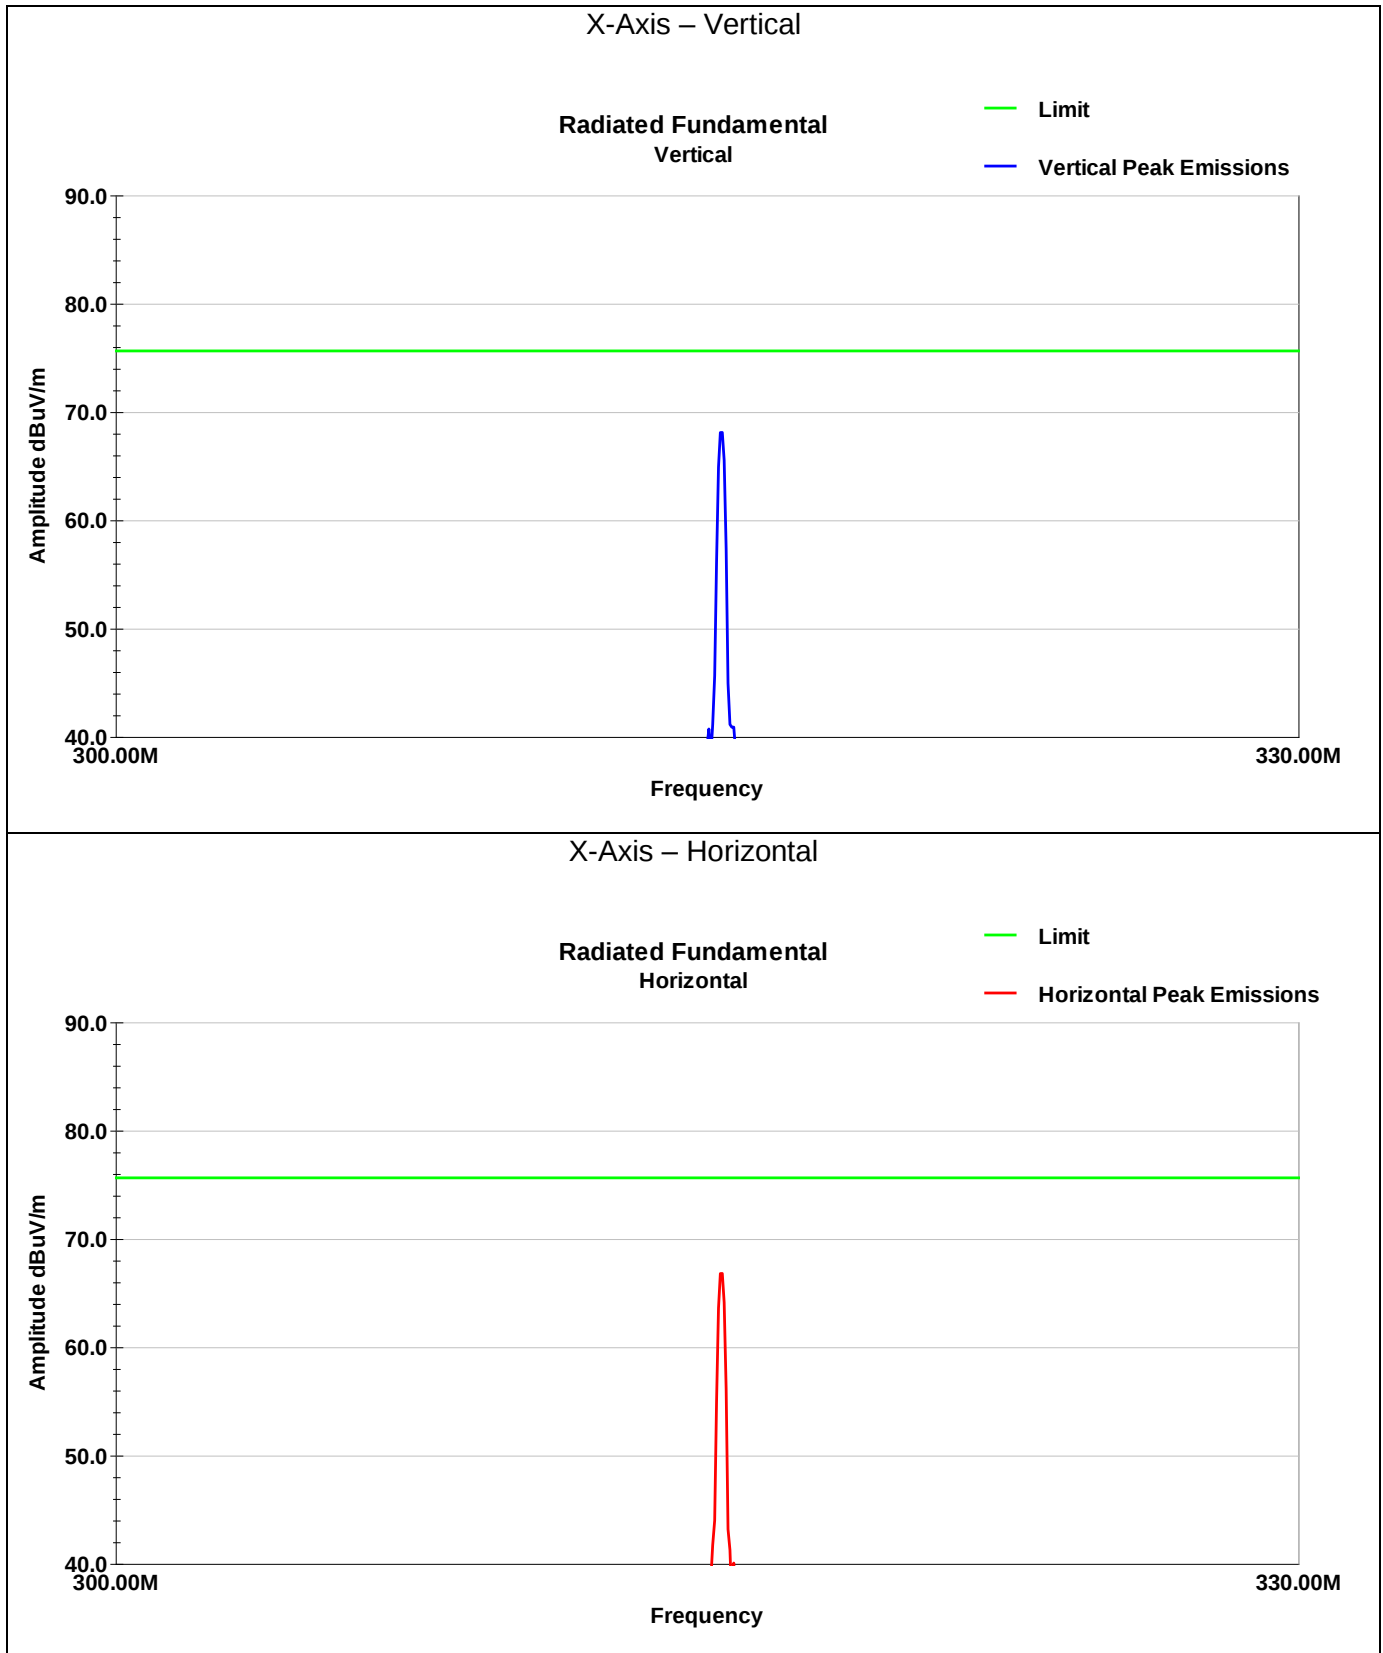

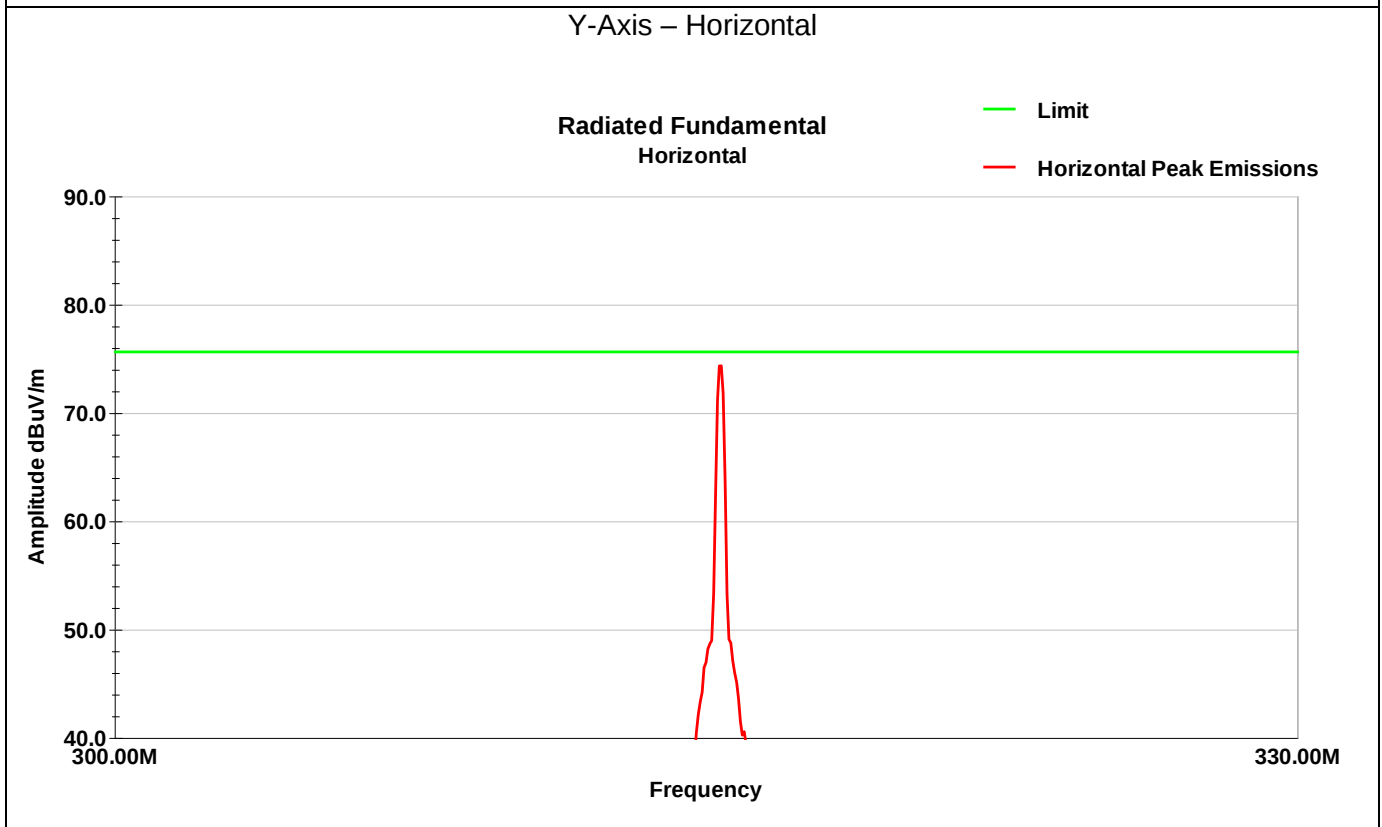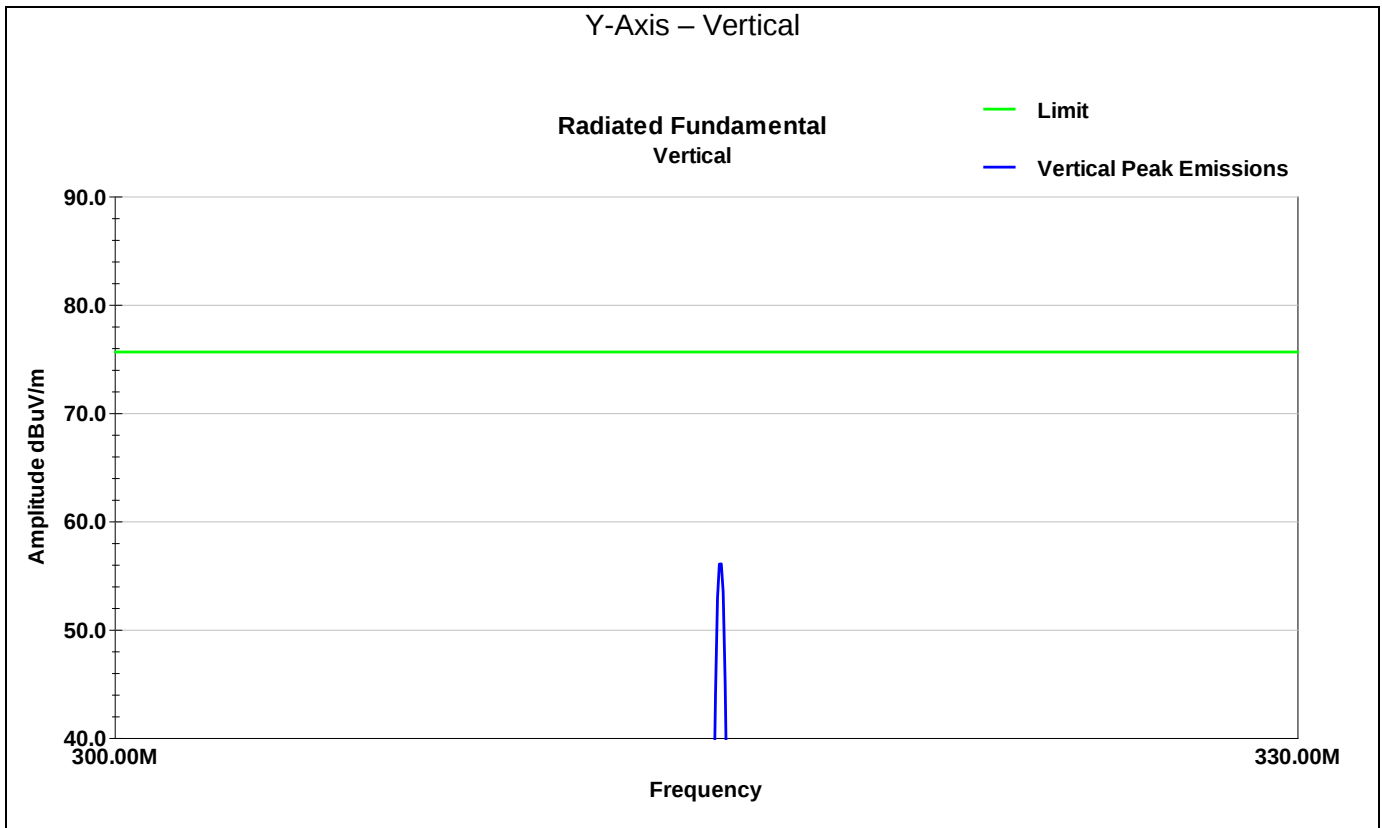

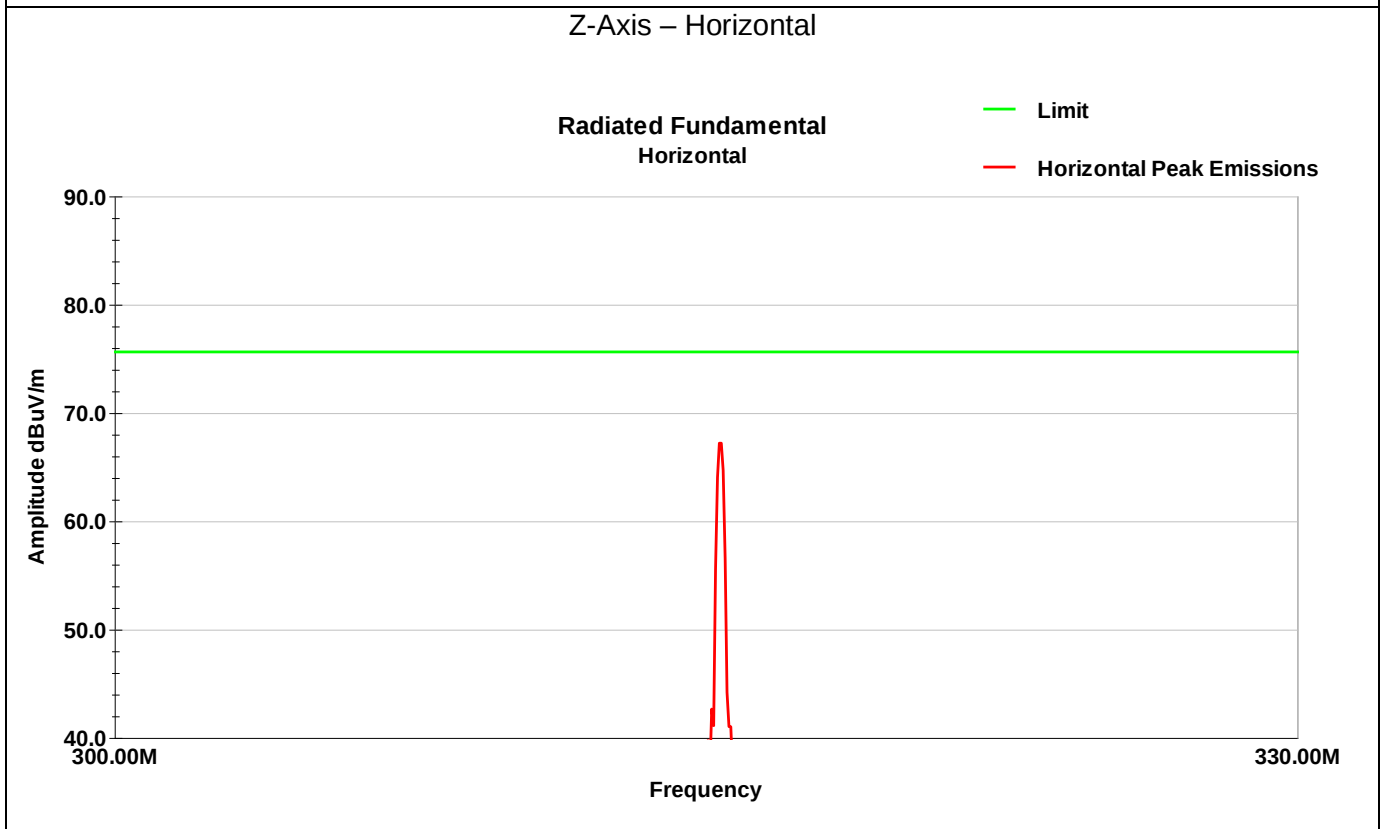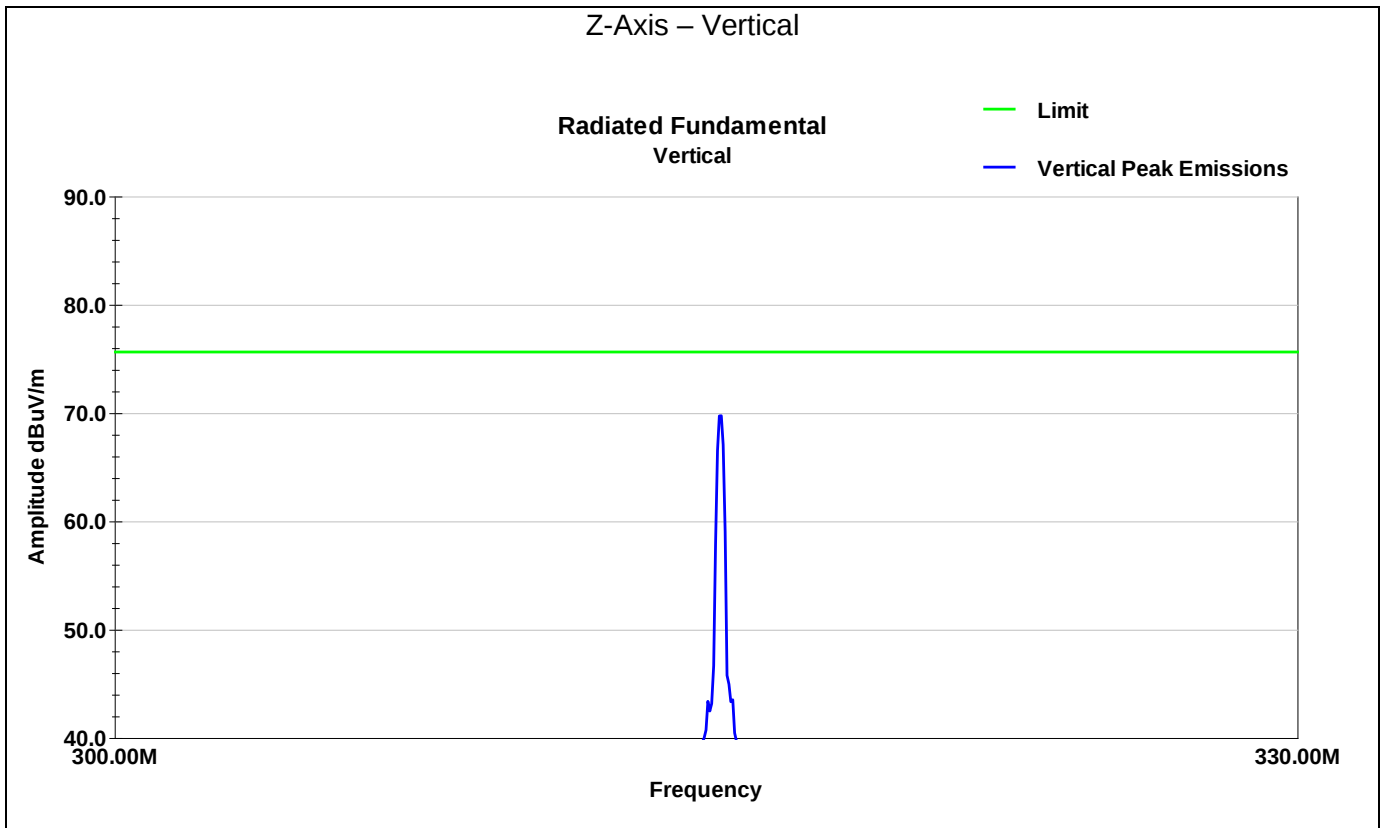

4.8 Test Data – Tabular

EUT Orientation	Antenna Polarity	Frequency (MHz)	Raw Pk (dBuV)	AF (dB/m)	Loss (dB)	DCCF (dB)	Amp (dB)	Avg Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
X	V	315.0	89.2	18.5	3.4	-12.4	30.6	68.1	75.6	-7.5
X	H	315.0	87.9	18.5	3.4	-12.4	30.6	66.8	75.6	-8.8
Y	V	315.0	77.1	18.5	3.4	-12.4	30.6	56.0	75.6	-19.6
Y	H	315.0	95.4	18.5	3.4	-12.4	30.6	74.3	75.6	-1.3
Z	V	315.0	90.8	18.5	3.4	-12.4	30.6	69.7	75.6	-5.9
Z	H	315.0	88.3	18.5	3.4	-12.4	30.6	67.2	75.6	-8.4

DCCF = Duty Cycle Correction Factor

Avg Value = Raw Pk + AF + Loss + DCCF - Amp

Margin = Pk Value - Limit

5 Field Strength of Spurious Radiation

5.1 Test Result

Test Description	Test Specification		Test Result
Field strength of spurious emissions	15.231(b)	RSS-210, A.1.2	Compliant
	ANSI C63.10:2013, Section 6.5		

5.2 Test Method

Exploratory scans were performed using the max hold function and incorporating a Peak detector and using TILE! software. The final test data was measured using a Quasi-Peak detector below 1GHz and a Peak detector above 1GHz. For harmonics of the fundamental, Average measurements were made by correcting the peak value with the duty cycle correction factor. For emissions other than harmonics of the fundamental, the Average measurements were made using the Average detector. The receiver's resolution bandwidth was set to 120 kHz for measurements taken in the 30MHz to 1GHz frequency range and 1MHz for measurements for 1GHz and higher. Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency. The radiated measurements were recorded and compared to the limits indicated in the table below.

The EUT was oriented in each of its three orthogonal axes and data for each was reported.

Limits for average value of emissions measured at 3m distance

Fundamental frequency (MHz)	FCC	RSS-210
	Field strength of spurious emission (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66-40.70	225	Not allowed
70-130	125	
130-174	125 to 375 ¹	
174-260	375	
260-470	375 to 1250 ¹	
Above 470	1250	

1) Linear interpolations

From the table above, the spurious emission limit for a 315 MHz fundamental frequency is determined by linear interpolation to be 55.6 dBuV/m.

Spurious emissions shall meet the average limits shown in the table above or to the general limits in §15.209, whichever limit permits a higher field strength.

5.3 Test Site

10m Absorber Lined Shielded Enclosure (ALSE), Suwanee, GA

Environmental Conditions

Temperature: 23.0 °C

Relative Humidity: 47.9 %

Atmospheric Pressure: 98.1 kPa

5.4 Test Equipment

Test End Date: 24-Aug-2022


Tester: AB

Equipment	Model	Manufacturer	Asset Number	Cal Date	Cal Due Date
ANTENNA, BILOG	JB6	SUNOL	B079690	19-Apr-2022	19-Apr-2024
N to N RF Cable	NC12-N1N1-276	MEGAPHASE	22000	10-Jan-2022	10-Jan-2023
RF CABLE	UC-N-MM-275	MAURY MICROWAVE	17015	25-Aug-2021	25-Aug-2022
RF CABLE NM TO NM, 0.01-18GHZ	90-195-079	TELEDYNE STORM MICROWAVE	20124	14-Feb-2022	14-Feb-2023
LOW NOISE AMPLIFIER	ZKL-2+	MINI-CIRCUITS	B079817	26-Aug-2021	26-Aug-2022
RF CABLE	SUCOFLEX 100	HUBER & SUHNER	B108523	26-Aug-2021	26-Aug-2022
ANTENNA, DRG HORN (MEDIUM)	3117	ETS LINDGREN	B079691	15-Aug-2022	15-Aug-2024
RF CABLE, NM TO NM.	90-195-276	TELEDYNE STORM MICROWAVE	21020	16-Mar-2022	16-Mar-2023
LOW NOISE AMPLIFIER	TS-PR18	ROHDE & SCHWARZ	15003	7-Oct-2021	7-Oct-2022
EMI RECEIVER	ESW44	ROHDE & SCHWARZ	B079793	26-Oct-2021	12-Mar-2023


Software: "RSE 30-1000 MHz T7 220318" TILE7 profile dated 18 March 2022

5.5 Test Data – Below 1 GHz


5.5.1 X-Axis

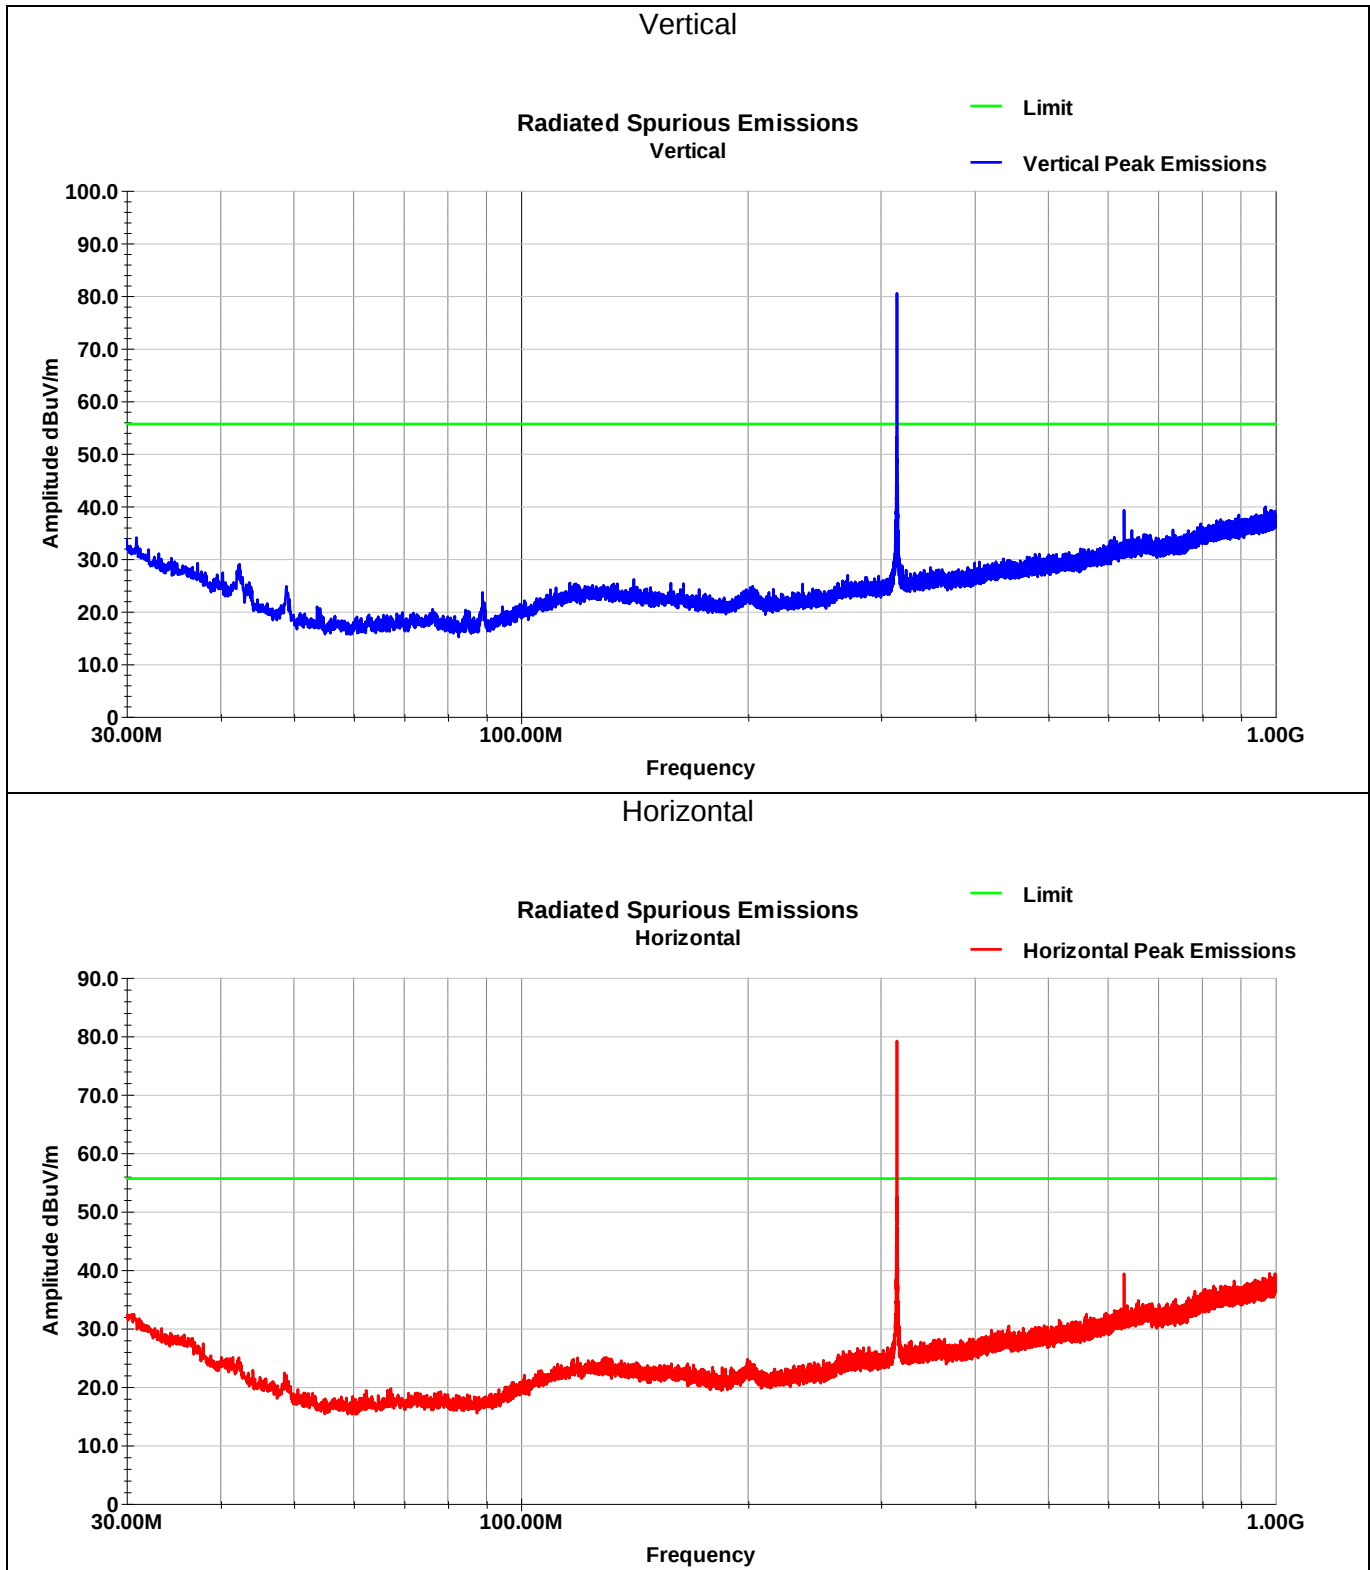

5.5.2 Y-Axis

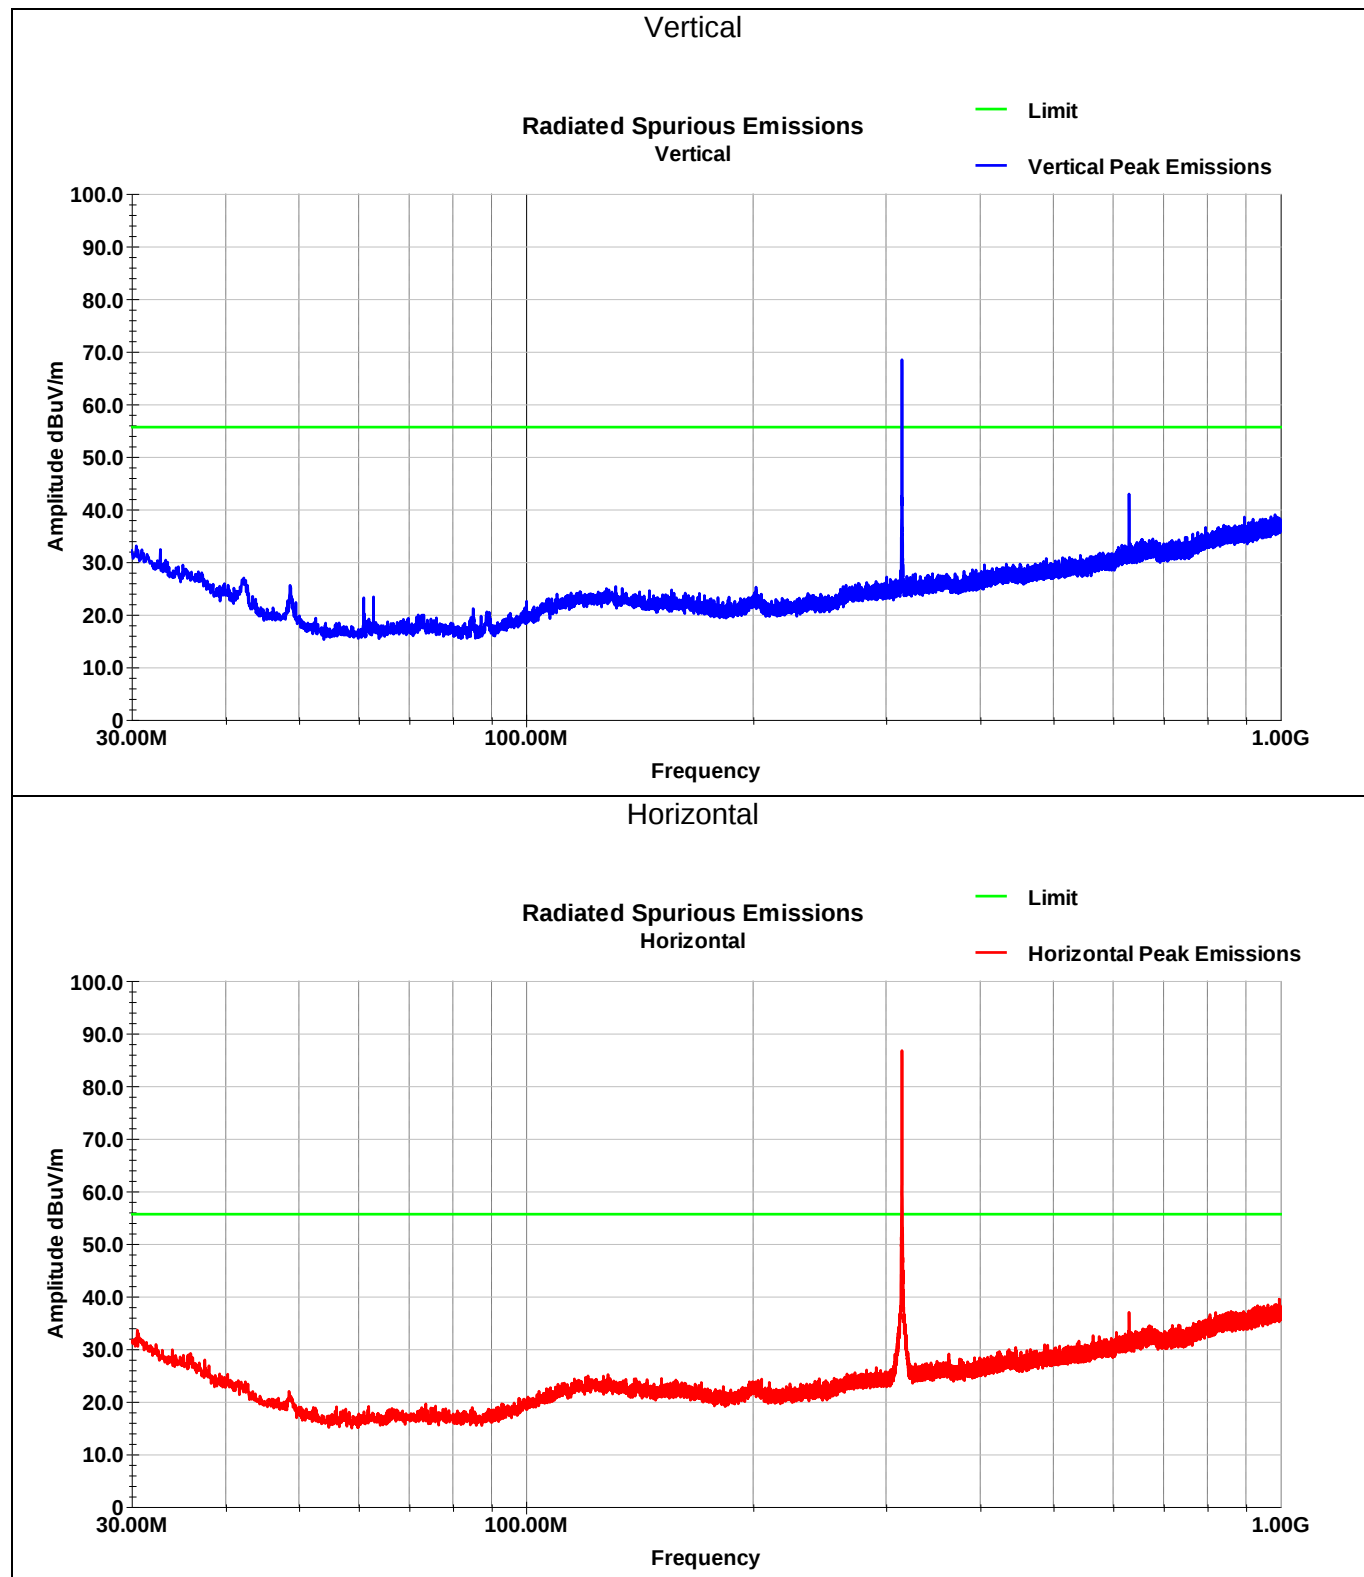


5.5.3 Z-Axis

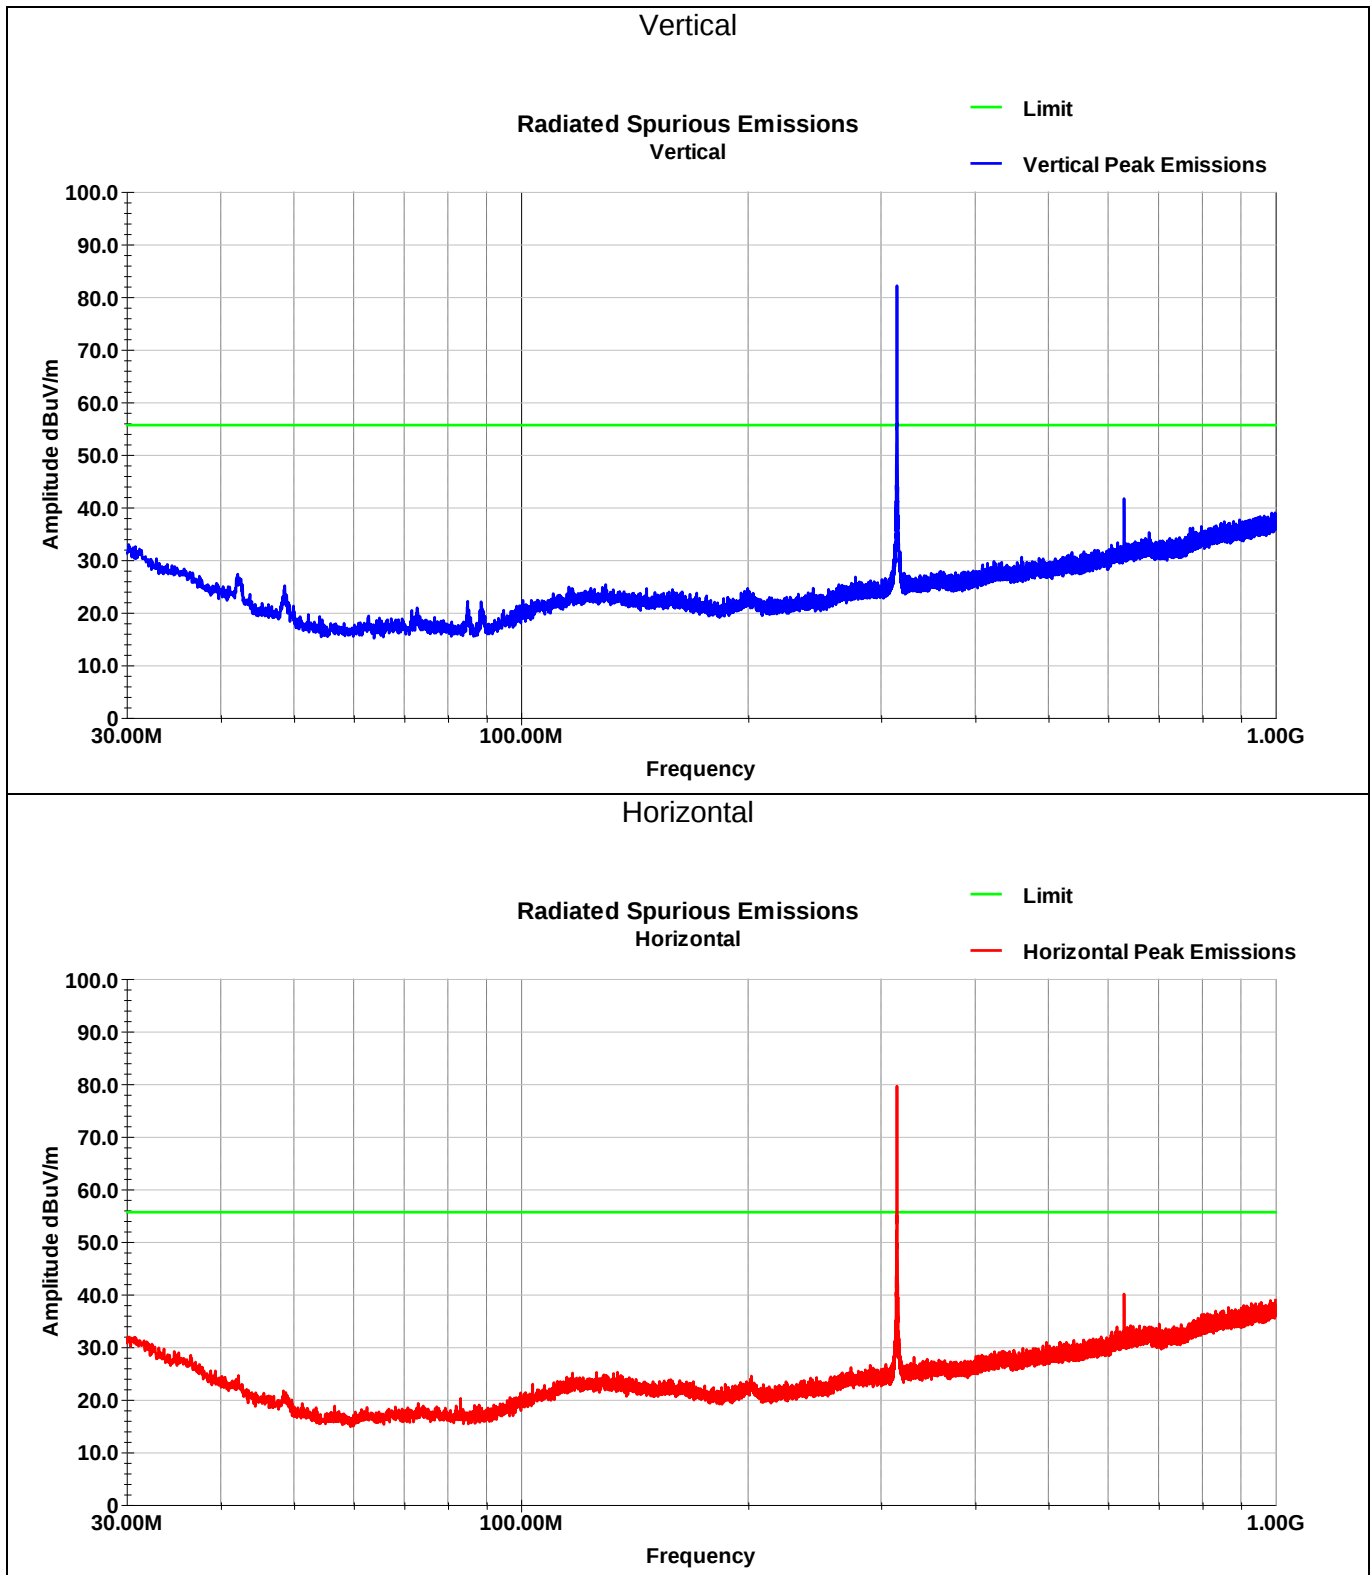

Only intentional radiator exceeds spurious emission limit

5.6 Test Data – Above 1 GHz

5.6.1 X-Axis

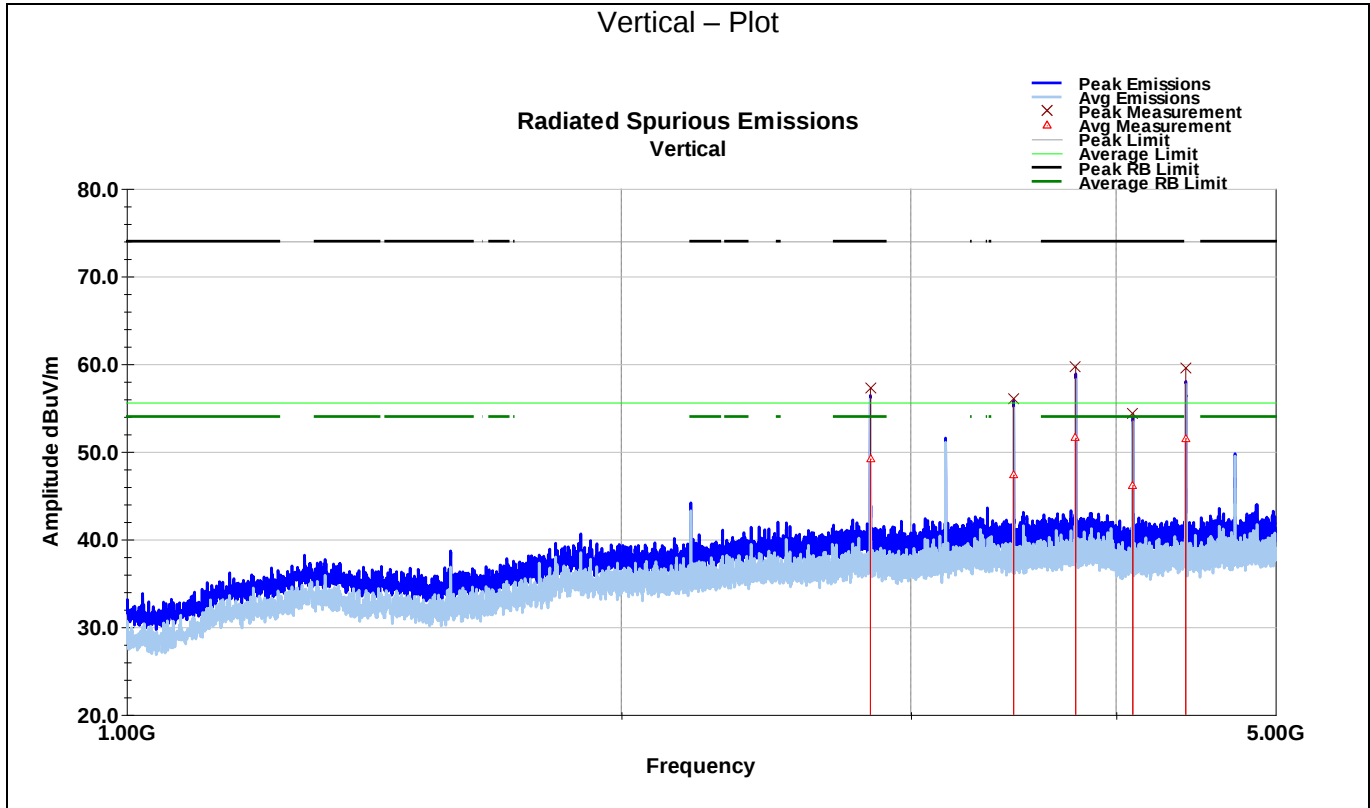

Vertical – Tabular Data


Peak Data

Frequency MHz	Raw Pk dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Final Pk dBuV/m	Limit dBuV/m	Margin dB
2835.08	64.2	V	53	184	32.4	2.7	42	57.2	74	-16.8
3465.24	62.3	V	159	102	32.6	3	41.9	56.1	74	-17.9
3780.04	65.2	V	23	179	33.3	3.1	42	59.7	74	-14.3
4095.12	59.7	V	278	249	33.5	3.2	41.9	54.4	74	-19.6
4410.16	64.3	V	228	105	33.7	3.3	41.8	59.5	74	-14.5
Final Pk = Raw Pk + AF + Loss - Amp										
Margin = Final Pk - Limit										

Average Data

Frequency MHz	Raw Avg dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Final Avg dBuV/m	Limit dBuV/m	Margin dB
2835.08	56.2	V	53	184	32.4	2.7	42	49.2	54	-4.8
3465.24	53.6	V	159	102	32.6	3	41.9	47.4	55.6	-8.2
3780.04	57.1	V	23	179	33.3	3.1	42	51.6	54	-2.4
4095.12	51.5	V	278	249	33.5	3.2	41.9	46.2	54	-7.8
4410.16	56.3	V	228	105	33.7	3.3	41.8	51.5	55.6	-4.1
Final Avg = Raw Avg + AF + Loss - Amp										
Margin = Final Avg - Limit										

Horizontal – Plot

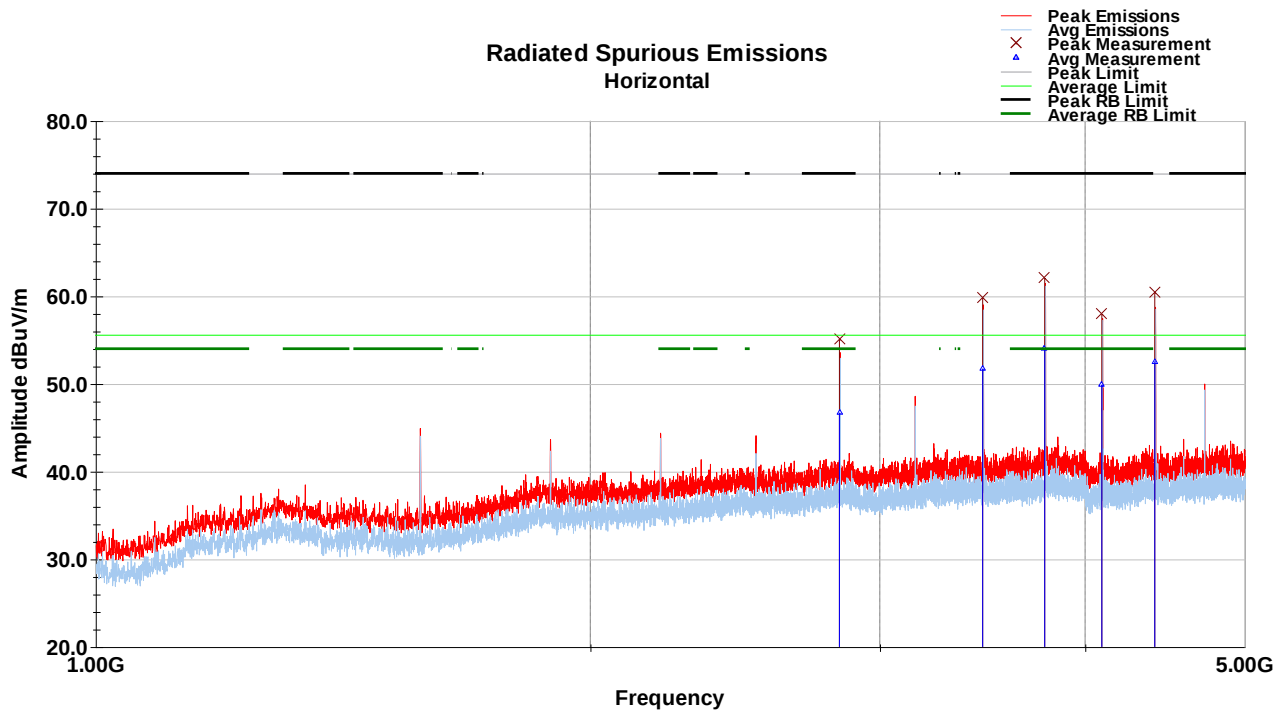

Horizontal – Tabular Data


Peak Data

Frequency MHz	Raw Pk dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Final Pk dBuV/m	Limit dBuV/m	Margin dB
2835.08	62.0	H	137	158	32.4	2.7	42	55.1	74	-18.9
3465.2	66.1	H	140	200	32.6	3	41.9	59.8	74	-14.2
3780.04	67.6	H	136	146	33.3	3.1	42	62.1	74	-11.9
4095	63.3	H	220	111	33.5	3.2	41.9	58.0	74	-16
4410.16	65.2	H	210	139	33.7	3.3	41.8	60.4	74	-13.6
Final Pk = Raw Pk + AF + Loss - Amp										
Margin = Final Pk - Limit										

Average Data

Frequency MHz	Raw Avg dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Avg Value dBuV/m	Limit dBuV/m	Margin dB
2835.08	53.7	H	137	158	32.4	2.7	42	46.7	54	-7.3
3465.2	58.0	H	140	200	32.6	3	41.9	51.7	55.6	-3.9
3780.04	59.6	H	136	146	33.3	3.1	42	54.0	54	0.0
4095	55.2	H	220	111	33.5	3.2	41.9	49.9	54	-4.1
4410.16	57.4	H	210	139	33.7	3.3	41.8	52.6	55.6	-3.0
Final Avg = Raw Avg + AF + Loss - Amp										
Margin = Final Avg - Limit										

5.6.2 Y-Axis

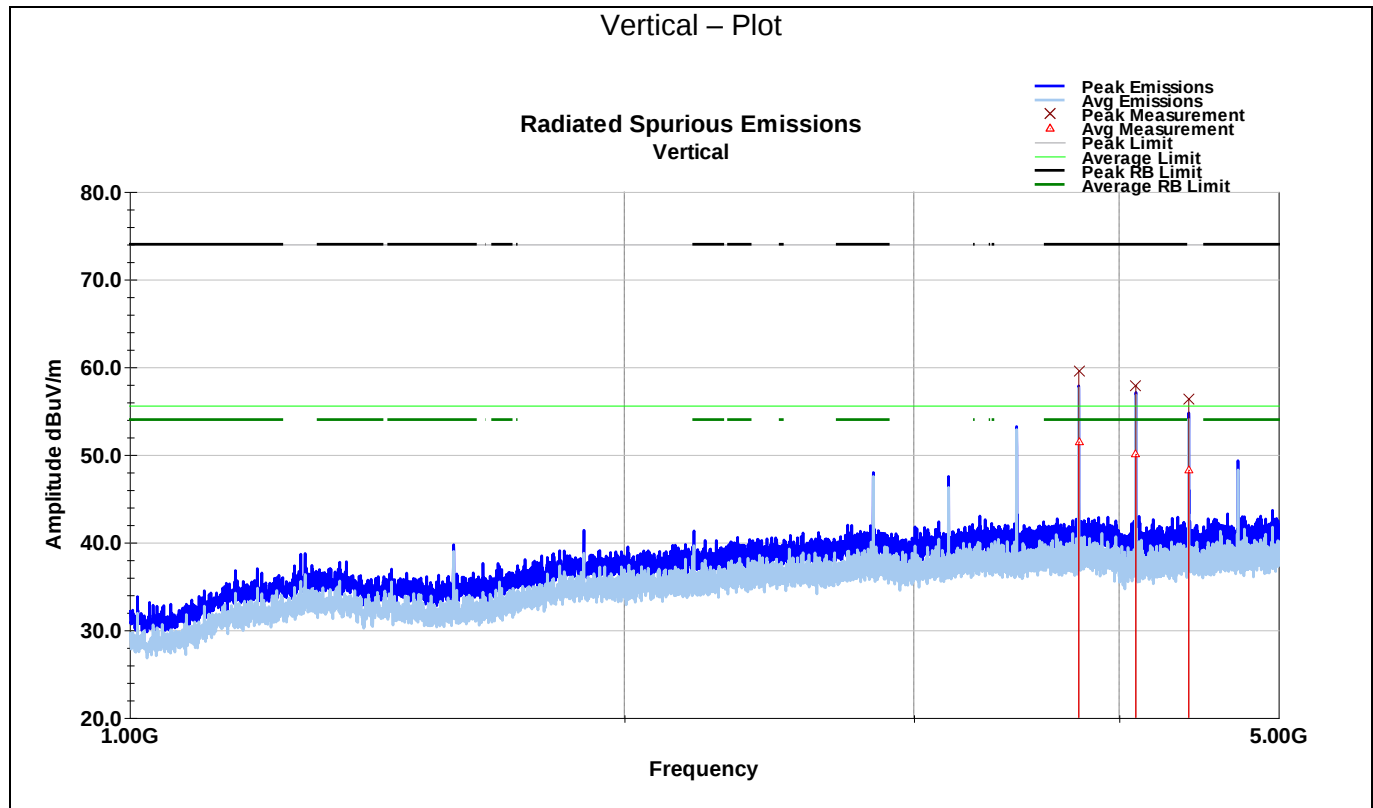

Vertical – Tabular Data


Peak Data

Frequency MHz	Raw Pk dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Final Pk dBuV/m	Limit dBuV/m	Margin dB
3780.16	65.1	V	153	142	33.3	3.1	42	59.6	74	-14.4
4095	63.2	V	228	100	33.5	3.2	41.9	57.9	74	-16.1
4410.16	61.2	V	243	237	33.7	3.3	41.8	56.4	74	-17.6
Final Pk = Raw Pk + AF + Loss - Amp										
Margin = Final Pk - Limit										

Average

Frequency MHz	Raw Avg dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Final Avg dBuV/m	Limit (dBuV/m)	Margin (dB)
3780.16	57.0	V	153	142	33.3	3.1	42	51.5	54	-2.5
4095	55.4	V	228	100	33.5	3.2	41.9	50.1	54	-3.9
4410.16	53.1	V	243	237	33.7	3.3	41.8	48.3	55.6	-7.3
Final Avg = Raw Avg + AF + Loss - Amp										
Margin = Final Avg - Limit										

Horizontal – Plot

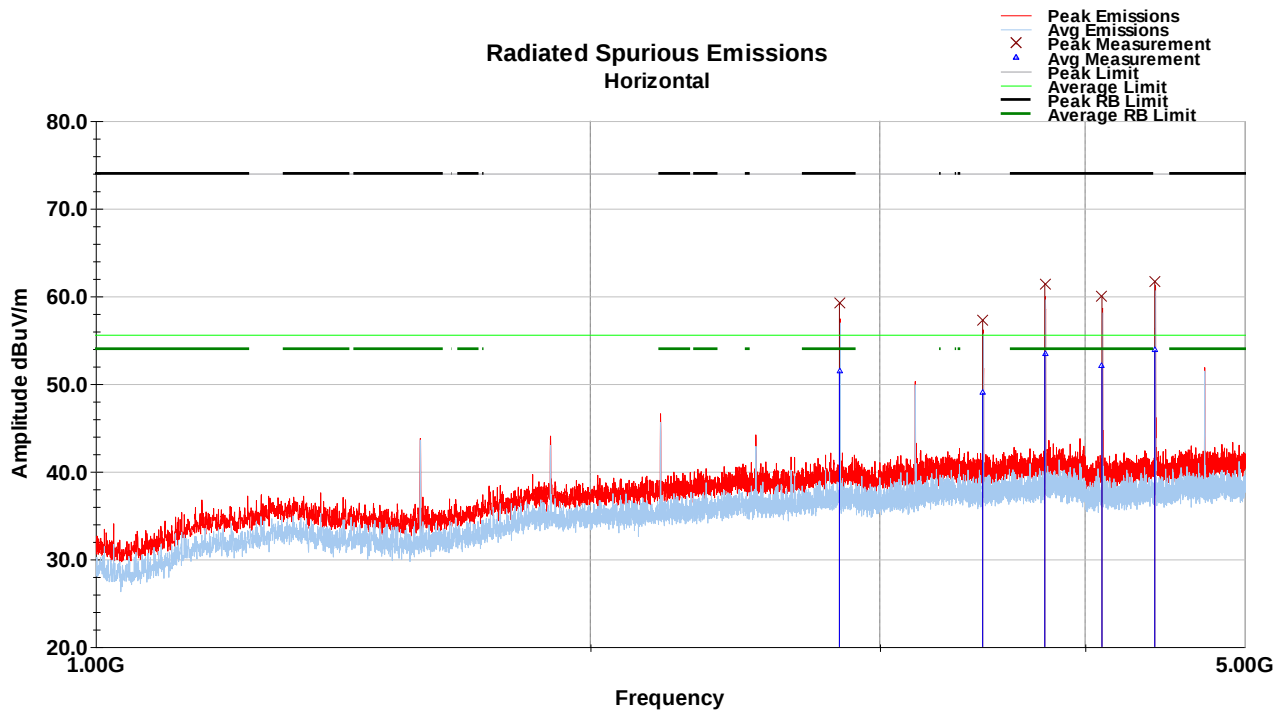

Horizontal – Tabular Data


Peak Data

Frequency MHz	Raw Pk dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Final Pk dBuV/m	Limit dBuV/m	Margin dB
2835.08	66.2	H	129	166	32.4	2.7	42	59.2	74	-14.8
3465.08	63.5	H	105	178	32.6	3	41.9	57.3	74	-16.7
3780.16	67.0	H	154	155	33.3	3.1	42	61.4	74	-12.6
4095.24	65.3	H	169	137	33.5	3.2	41.9	60.0	74	-14
4410.16	66.5	H	164	100	33.7	3.3	41.8	61.7	74	-12.3
Final Pk = Raw Pk + AF + Loss - Amp										
Margin = Final Pk - Limit										

Average Data

Frequency MHz	Raw Avg dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Avg Value dBuV/m	Limit (dBuV/m)	Margin (dB)
2835.08	58.4	H	129	166	32.4	2.7	42	51.4	54	-2.6
3465.08	55.3	H	105	178	32.6	3	41.9	49.0	55.6	-6.6
3780.16	59.0	H	154	155	33.3	3.1	42	53.5	54	-0.5
4095.24	57.4	H	169	137	33.5	3.2	41.9	52.1	54	-1.9
4410.16	58.7	H	164	100	33.7	3.3	41.8	53.8	55.6	-1.8
Final Avg = Raw Avg + AF + Loss - Amp										
Margin = Final Avg - Limit										

5.6.3 Z-Axis

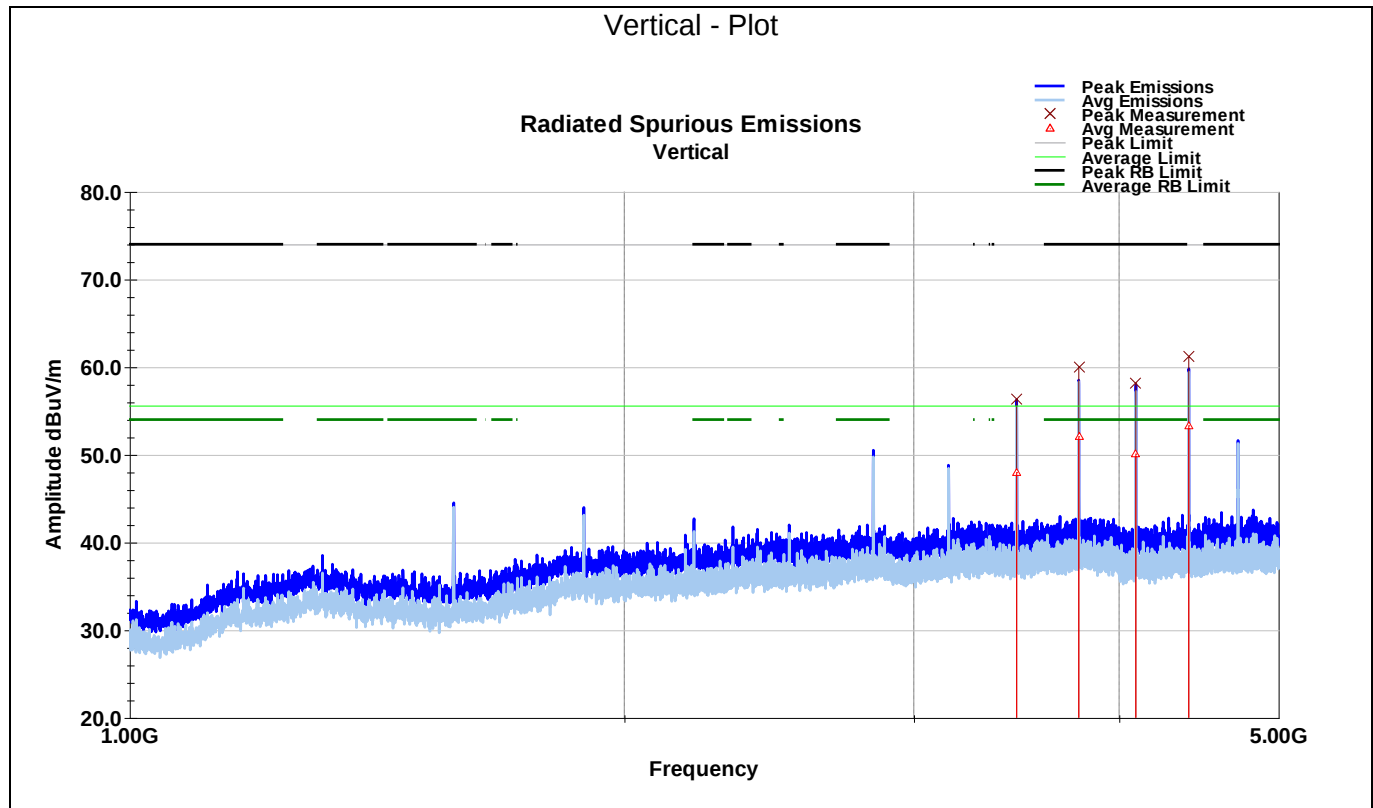

Vertical – Tabular Data


Peak Data

Frequency MHz	Raw Pk dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Final Pk dBuV/m	Limit dBuV/m	Margin dB
3465	62.6	V	274	178	32.6	3	41.9	56.4	74	-17.6
3780.16	65.6	V	212	103	33.3	3.1	42	60.1	74	-13.9
4095	63.5	V	151	138	33.5	3.2	41.9	58.2	74	-15.8
4410.16	66.0	V	152	102	33.7	3.3	41.8	61.2	74	-12.8
Final Pk = Raw Pk + AF + Loss - Amp										
Margin = Final Pk - Limit										

Average Data

Frequency MHz	Raw Avg dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Final Avg dBuV/m	Limit (dBuV/m)	Margin (dB)
3465	54.3	V	274	178	32.6	3	41.9	48.0	55.6	-7.6
3780.16	57.6	V	212	103	33.3	3.1	42	52.1	54	-1.9
4095	55.4	V	151	138	33.5	3.2	41.9	50.1	54	-3.9
4410.16	58.2	V	152	102	33.7	3.3	41.8	53.4	55.6	-2.2
Final Avg = Raw Avg + AF + Loss - Amp										
Margin = Final Avg - Limit										

Horizontal – Plot

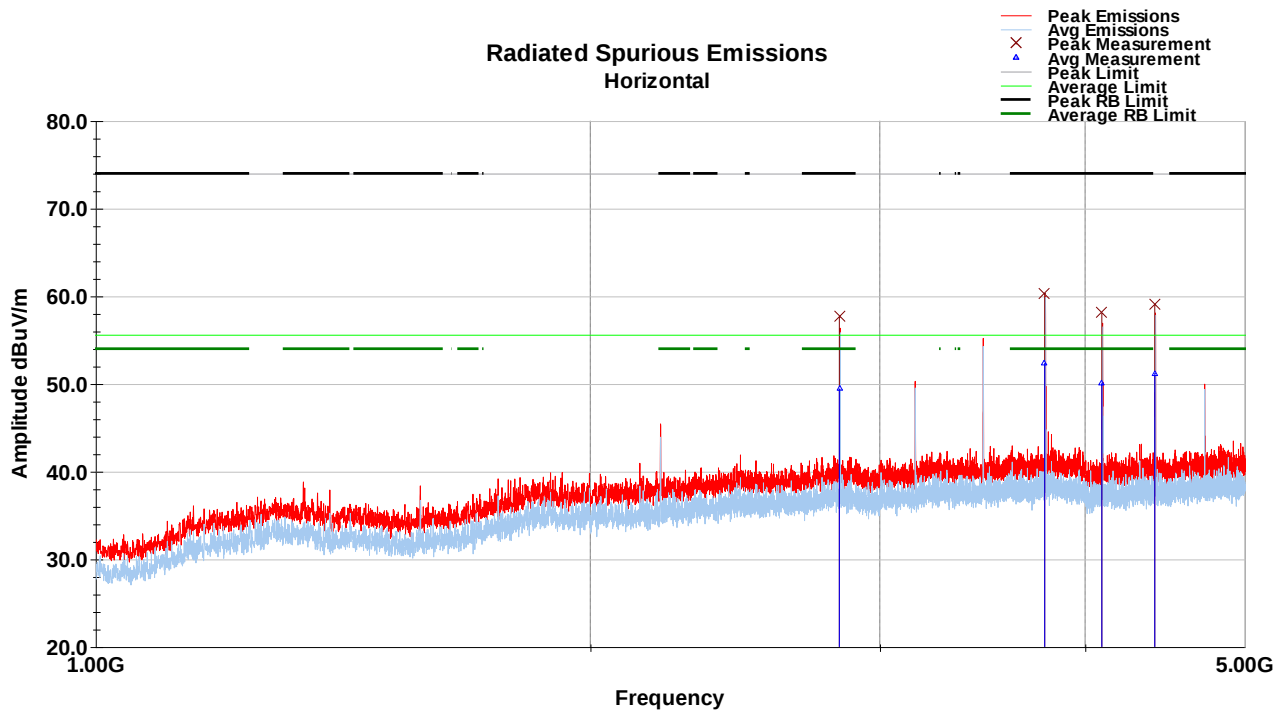

Horizontal – Tabular Data

Peak Data

Frequency MHz	Raw Pk dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Final Pk dBuV/m	Limit dBuV/m	Margin dB
2834.88	64.6	H	281	217	32.4	2.7	42	57.7	74	-16.3
3780.12	65.9	H	136	144	33.3	3.1	42	60.4	74	-13.6
4095	63.4	H	304	173	33.5	3.2	41.9	58.1	74	-15.9
4410.12	63.9	H	288	177	33.7	3.3	41.8	59.1	74	-14.9
Final Pk = Raw Pk + AF + Loss - Amp										
Margin = Final Pk - Limit										

Average Data

Frequency MHz	Raw Avg dBuV	Polarity (V/H)	Azimuth (degrees)	Height (cm)	AF (dB/m)	Loss (dB)	Amp (dB)	Avg Value dBuV/m	Limit (dBuV/m)	Margin (dB)
2834.88	56.4	H	281	217	32.4	2.7	42	49.5	55.6	-6.1
3780.12	57.9	H	136	144	33.3	3.1	42	52.4	54	-1.6
4095	55.4	H	304	173	33.5	3.2	41.9	50.1	54	-3.9
4410.12	56.0	H	288	177	33.7	3.3	41.8	51.2	55.6	-4.4
Final Avg = Raw Avg + AF + Loss - Amp										
Margin = Final Avg - Limit										

6 Bandwidth

6.1 Test Result

Test Description	Test Specification		Test Result
20 dB Bandwidth	15.231(c)	RSS-210 A.1.3	Compliant

6.2 Test Method

The procedures from ANSI C63.10 (2013) clause 6.9 were used to determine the 20 dB bandwidth.

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

6.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions


Temperature: 25.0 °C

Relative Humidity: 51.8 %

Atmospheric Pressure: 97.7 kPa

6.4 Test Equipment

6.5 Test Data

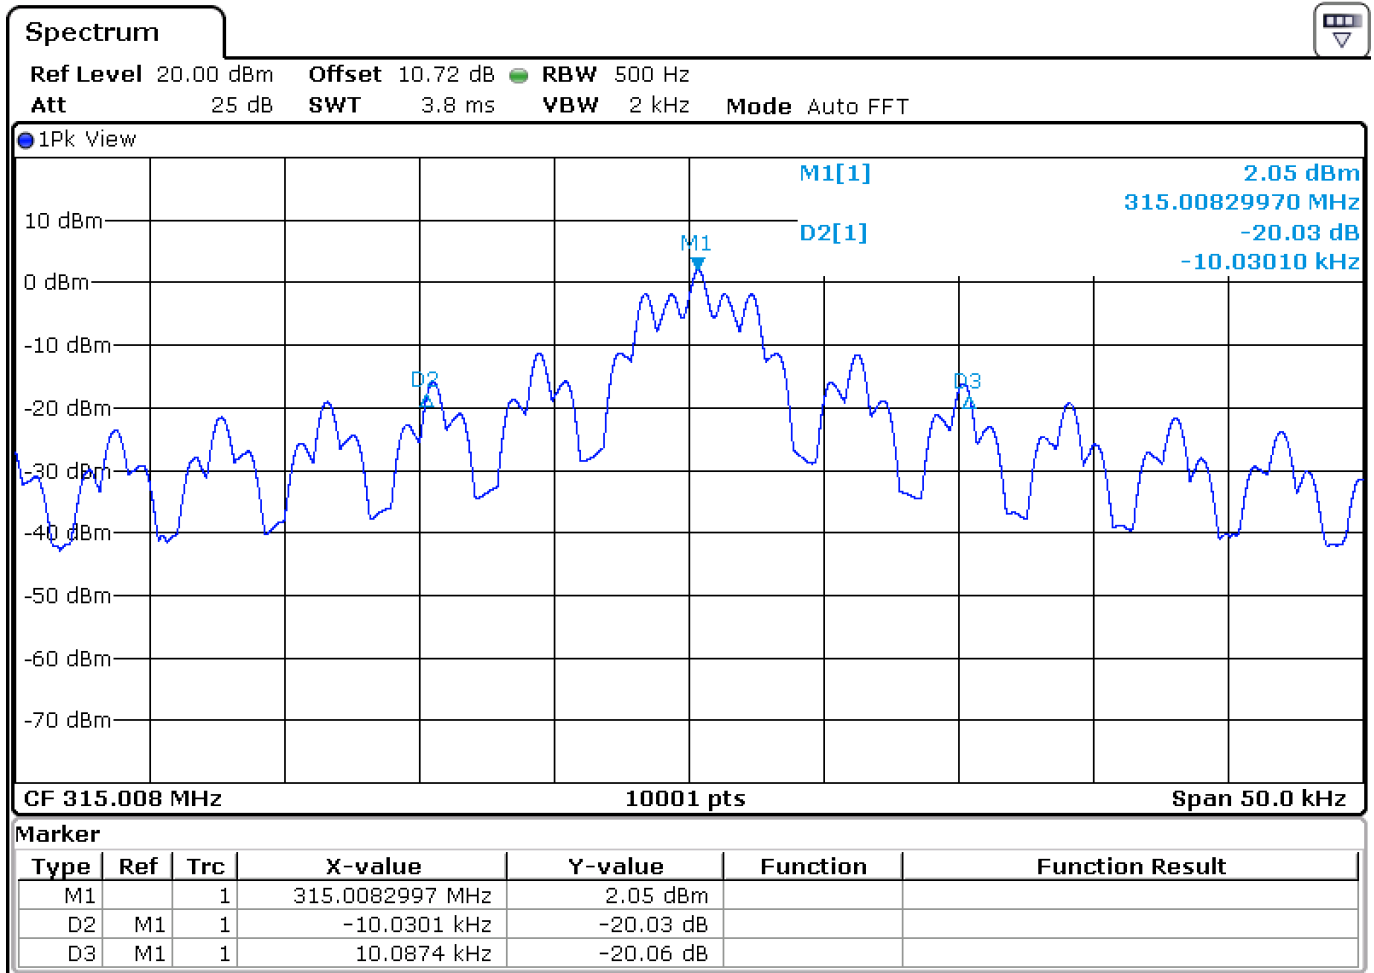

The maximum allowable bandwidth is 0.25% of 315MHz which is 787.5kHz.

The measured bandwidth derived from the plot above is 20.1kHz.

The EUT complies with the limit.

7 Deactivation Time

7.1 Test Result

Test Description	Test Specification		Test Result
Deactivation time, manual	15.231(a)(1)	RSS-210 A.1.1a	Compliant
	ANSI C63.10:2013, Section 7.4		

7.2 Test Method

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

7.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 23.7 °C

Relative Humidity: 50.5 %

Atmospheric Pressure: 98.2 kPa

7.4 Test Equipment


Test End Date: 16-Sep-2022

Tester: MT

Equipment	Model	Manufacturer	Asset Number	Cal Date	Cal Due Date
SIGNAL ANALYZER (TS8997)	FSV30	ROHDE & SCHWARZ	B085749	4-Jan-2022	4-Jan-2024
RF CABLE	SF104	HUBER & SUHNER	B085905	23-Aug-2022	23-Aug-2023
NEAR FIELD PROBES	NA	COM-POWER CORPORATION	16016	CNR	CNR

CNR = Calibration not required

7.5 Test Data

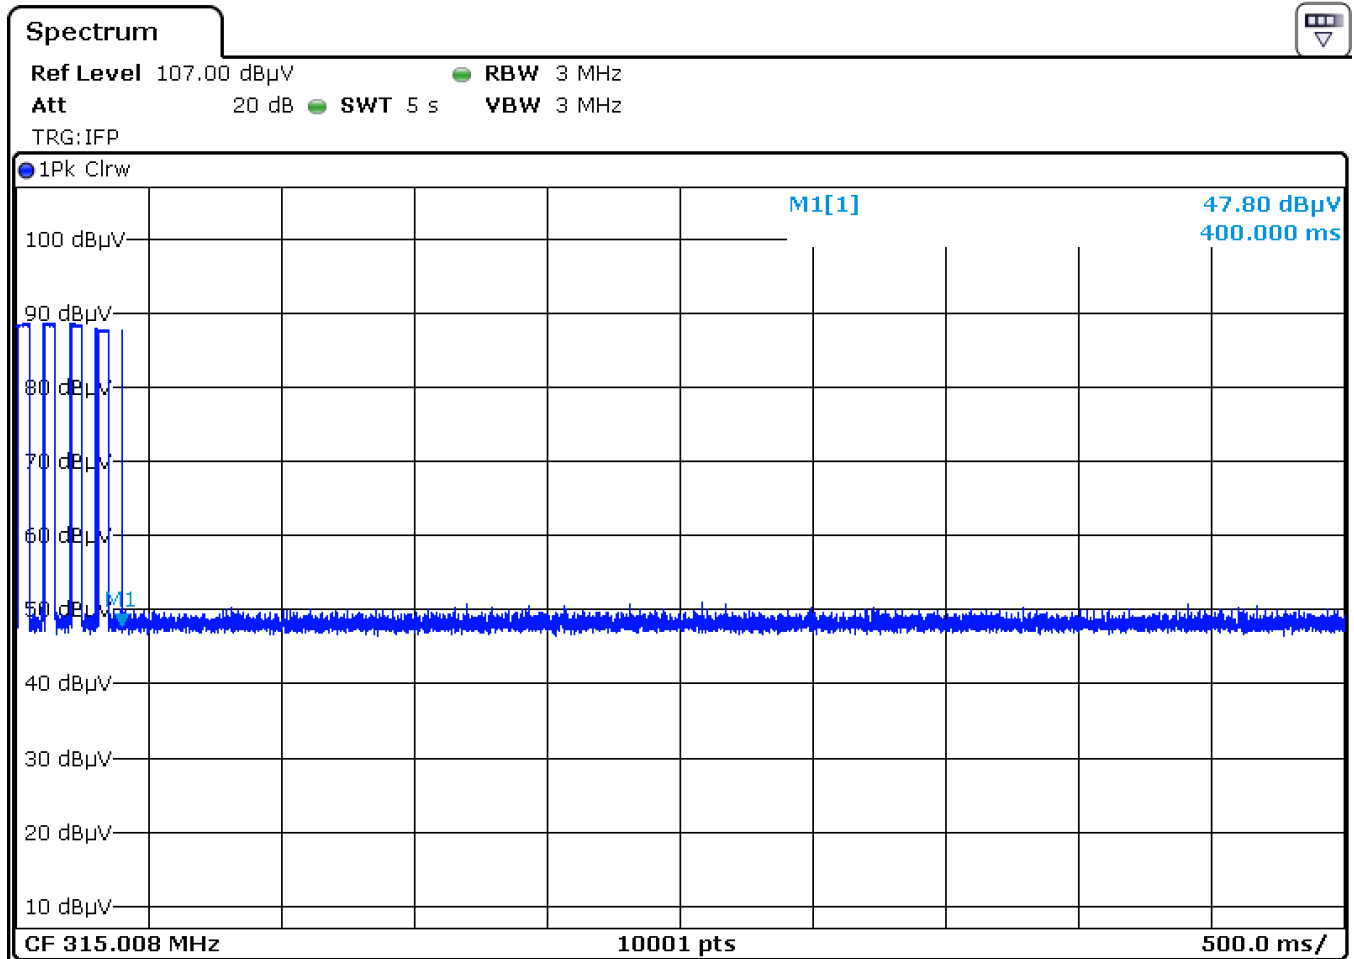

The transmitter is deactivated within 0.4 seconds of the button being released.

8 Revision History

Revision Level	Description of changes	Revision Date
Draft	--	22 September 2022
0	Initial release	10 March 2023
1	Added restricted band avg limits to plots and data in section 5.6	28 August 2023