



18/88 Merrindale Drive Croydon South, Victoria, 3136, Australia  
Telephone: +61 3 9761 5888  
Facsimile: +61 3 8761 6547  
Email: sales@emcbayswater.com.au  
ABN: 49 112 221 333

## RADIO CERTIFICATION REPORT

*In accordance with:*

**CFR47 FCC Part 15, Subpart C – Section 15.231**

**Automatic Technology Australia Pty. Ltd.**

**PTX-10V1AM**

**Handheld / Wall Remote Controls**

**FCC ID: X4K-TX10V1ATAMLT1**

**REPORT: E2310-1692A-1 Rev2**

**DATE: December, 2024**

*This report replaces the previously issued report E2310-1692A-1 Rev1.  
Please refer to section 2 of this report for details of any previously issued reports.*



**WORLD RECOGNISED  
ACCREDITATION**

Accreditation Number: 18553

Accredited for compliance with ISO/IEC 17025 - Testing

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports. This document may not be reproduced except in full without approval from EMC Bayswater, with the exception of the certificate on page 2.



## Certificate of Compliance

EMC Bayswater Test Report: E2310-1692A-1 Rev2  
Issue Date: December, 2024

**Product(s):** Handheld / Wall Remote Controls  
**Model No:** PTX-10V1AM  
**Mode:** PTX-6AM Mode  
**Serial No:** Not stated  
**Variant:** PTX-10V1SM, WTX-10V1AM, WTX-10V1SM  
*The above listed variant (PTX-10V1AM) was tested by EMC Bayswater Pty Ltd as a representative model and the results and conclusions within this report do not necessarily reflect compliance for other models. Please refer to section 5 of this report for variant information and the customer variant declaration.*

**FCC ID:** X4K-TX10V1ATAMLT1

**Customer Details:** Mr. Nikolai Klepikov  
Automatic Technology Australia Pty. Ltd.  
6 – 8 Fiveways Boulevard  
Keysborough  
Victoria 3173, Australia  
Phone No: +61 3 9791 0200 e-mail: Nikolai.Klepikov@ata-aust.com.au

**Test Specification:** CFR47 FCC Part 15, Subpart C – Section 15.231

**Results Summary:**

|                                                              |                 |
|--------------------------------------------------------------|-----------------|
| FCC 15.203 - Antenna Requirement                             | <b>Complied</b> |
| FCC 15.231(a) - Transmitter Deactivation                     | <b>Complied</b> |
| FCC 15.231(b) - Field strength of fundamental                | <b>Complied</b> |
| FCC 15.231(b), 15.209 - Field strength of spurious emissions | <b>Complied</b> |
| FCC 15.231(c) - Emission Bandwidth                           | <b>Complied</b> |

**Test Date(s):** 12<sup>th</sup> to 31<sup>st</sup> of October, 2023

**Test House (Issued By):** EMC Bayswater Pty Ltd  
18/88 Merrindale Drive  
Croydon South  
Victoria 3136  
Australia


FCC Accredited Test Firm Registration number: 527798  
FCC Accredited Test Firm Designation number: AU0004

Phone +61 3 9761 5888 e-mail: [sales@emcbayswater.com.au](mailto:sales@emcbayswater.com.au)  
No:  
Fax No: +61 3 8761 6547 Web: [www.emcbayswater.com.au](http://www.emcbayswater.com.au)

This is to certify that the necessary measurements were made by EMC Bayswater Pty Ltd, and that the Automatic Technology Australia Pty. Ltd., PTX-10V1AM, Handheld / Wall Remote Controls, has been tested in accordance with requirements contained in the appropriate commission regulations.

Prepared & tested by:

Approved by:



Adnan Zaman  
(EMC Test Engineer)



Neville Liyanapatabendige  
(Manager)

17/12/2024 13:35

Date

## Radio Certification Report for Automatic Technology Australia Pty. Ltd.

### Contents

|                                                                            |           |
|----------------------------------------------------------------------------|-----------|
| <b>1. Introduction .....</b>                                               | <b>4</b>  |
| <b>2. Test Report Revision History .....</b>                               | <b>4</b>  |
| <b>3. Report Information .....</b>                                         | <b>4</b>  |
| <b>4. Summary of Results .....</b>                                         | <b>4</b>  |
| <b>5. Product Sample, Configuration &amp; Modifications .....</b>          | <b>5</b>  |
| 5.1. Product Sample Details .....                                          | 5         |
| 5.2. Product description .....                                             | 5         |
| 5.3. Support Equipment .....                                               | 5         |
| 5.4. Product operating modes .....                                         | 6         |
| 5.5. Product operating mode for testing .....                              | 6         |
| 5.6. Configuration .....                                                   | 6         |
| 5.7. Modifications .....                                                   | 6         |
| 5.8. Test Facility .....                                                   | 6         |
| 5.9. Test Equipment .....                                                  | 6         |
| <b>6. Referenced Standards .....</b>                                       | <b>7</b>  |
| <b>7. Referenced Documents .....</b>                                       | <b>7</b>  |
| <b>8. Antenna Requirement – FCC Part 15.203 .....</b>                      | <b>8</b>  |
| 8.1. Requirements .....                                                    | 8         |
| 8.2. Result .....                                                          | 8         |
| <b>9. Duty cycle correction factor .....</b>                               | <b>9</b>  |
| 9.1. Test Procedure .....                                                  | 9         |
| 9.2. Test Results .....                                                    | 9         |
| <b>10. Field strength of fundamental – FCC Part 15.231(b) .....</b>        | <b>11</b> |
| 10.1. Test Procedure .....                                                 | 11        |
| 10.2. Limits .....                                                         | 11        |
| 10.3. Test Results .....                                                   | 12        |
| <b>11. Field strength of spurious emissions – FCC Part 15.231(b) .....</b> | <b>14</b> |
| 11.1. Test Procedure .....                                                 | 14        |
| 11.2. Limits .....                                                         | 15        |
| 11.3. Test Results .....                                                   | 16        |
| <b>12. Emission Bandwidth – FCC Part 15.231(c) .....</b>                   | <b>20</b> |
| 12.1. Test Procedure .....                                                 | 20        |
| 12.2. Requirements .....                                                   | 20        |
| 12.3. Test Results .....                                                   | 20        |
| <b>13. Transmitter Deactivation – FCC Part 15.231(a) .....</b>             | <b>22</b> |
| 13.1. Test Procedure .....                                                 | 22        |
| 13.2. Test Results .....                                                   | 22        |
| <b>14. Conclusion .....</b>                                                | <b>22</b> |
| <b>Appendix A – Test Equipment .....</b>                                   | <b>23</b> |
| <b>Appendix B – Photographs .....</b>                                      | <b>24</b> |
| <b>Appendix C – Measurement Graphs .....</b>                               | <b>25</b> |
| <b>Appendix D – Customer Declaration of Product Variant .....</b>          | <b>35</b> |

## 1. Introduction

Radio tests were performed on an Automatic Technology Australia Pty. Ltd., PTX-10V1AM, Handheld / Wall Remote Controls, in accordance with the requirements of CFR47 FCC Part 15, Subpart C – Section 15.231.

## 2. Test Report Revision History

| ISSUE              | DATE       | Description                                                                                                                                                                                                                                                                                | AUTHORISED BY                       |
|--------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| E2310-1692A-1      | 15-12-2023 | Original                                                                                                                                                                                                                                                                                   | Neville Liyanapatabendige (Manager) |
| E2310-1692A-1 Rev1 | 18-11-2024 | In the Appendix D – Customer Declaration of Product Variant, the model tested information in the table was incorrect. The customer supplied the 'Declaration of Product Variations' with the correct information and the Appendix D – Customer Declaration of Product Variant was updated. | Neville Liyanapatabendige (Manager) |
| E2310-1692A-1 Rev2 | 17-12-2024 | As per the customer's request, block diagram of the EUT was removed from page 6.                                                                                                                                                                                                           | Neville Liyanapatabendige (Manager) |

## 3. Report Information

EMC Bayswater Pty Ltd reports apply only to the specific samples tested under the stated test conditions. All samples tested were in good operating condition throughout the entire test program unless otherwise stated. EMC Bayswater Pty Ltd does not in any way guarantee the later performance of the product/equipment. It is the manufacturer's responsibility to ensure that additional production units of the tested model are manufactured with identical electrical and mechanical components. EMC Bayswater Pty Ltd shall have no liability for any deductions, inference or generalisations drawn by the clients or others from EMC Bayswater Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Bayswater Pty Ltd. This report shall not be reproduced except in full (with the exception of the certificate on page 2) without the written approval of EMC Bayswater Pty Ltd. This document may be altered or revised by EMC Bayswater Pty Ltd personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by EMC Bayswater Pty Ltd will nullify the document.

## 4. Summary of Results

The EUT complied with applicable requirements of CFR47 FCC Part 15, Subpart C – Section 15.231. Worst-case results are tabled as follows:

| FCC sections | Test                                 | Result                           |
|--------------|--------------------------------------|----------------------------------|
| 15.203       | Antenna Requirement                  | Complied <sup>#</sup>            |
| 15.231(a)    | Transmitter Deactivation             | Complied                         |
| 15.231(b)    | Field strength of fundamental        | Complied by 1.2dB <sup>+</sup>   |
| 15.231(b)    | Field strength of spurious emissions | Complied Peak limit by > 20.0dB  |
| 15.209       |                                      | Complied Average limit by 15.6dB |
| 15.231(c)    | Emission Bandwidth                   | Complied                         |

<sup>+</sup>Refer to appropriate section for measurement uncertainty statement.

<sup>#</sup>The Antenna is permanently attached, internal to the device.

Table 1: Summary of test results

## 5. Product Sample, Configuration & Modifications

### 5.1. Product Sample Details

The EUT (Equipment Under Test), as supplied by the client, is described as follows:

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Product:              | Handheld / Wall Remote Controls                                                                                                                                                                                                                                                                                                                                                                                                |                                                |
| Model No:             | PTX-10V1AM                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                |
| Serial No:            | Not stated                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                |
| Mode:                 | PTX-6AM Mode                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                |
| Variant:              | PTX-10V1SM, WTX-10V1AM, WTX-10V1SM*                                                                                                                                                                                                                                                                                                                                                                                            |                                                |
|                       | *The customer (Automatic Technology Australia Pty. Ltd.) declared testing of one variant as a worst case representative sample and declared the worst case variant to be the PTX-10V1AM (refer to Appendix D within this report for the customer declaration of worst case variant). Please note other than the unit(s) listed as a) "Product" and b) "Model" no other products/models or variant were products/models tested. |                                                |
| Firmware:             | Not stated                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                |
| Dimensions:           | 75x35x15mm (Length x Width x Height)                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
| Weight:               | 50 g                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                |
| EUT Type:             | Tested as table-top                                                                                                                                                                                                                                                                                                                                                                                                            |                                                |
| Power Specifications: | 3V Battery powered. CR2032                                                                                                                                                                                                                                                                                                                                                                                                     |                                                |
| Transmitter details:  | Description:                                                                                                                                                                                                                                                                                                                                                                                                                   | Remote Control                                 |
|                       | Type:                                                                                                                                                                                                                                                                                                                                                                                                                          | Handheld Remote Transmitter                    |
|                       | Max Transmit Power:                                                                                                                                                                                                                                                                                                                                                                                                            | +11 dBm (conducted)                            |
|                       | Modulation Scheme:                                                                                                                                                                                                                                                                                                                                                                                                             | FSK/OOK                                        |
|                       | Channels:                                                                                                                                                                                                                                                                                                                                                                                                                      | 3 channels: 433.47 MHz, 433.92 MHz, 434.37 MHz |
|                       | Antenna Details:                                                                                                                                                                                                                                                                                                                                                                                                               | ¼ wave Loop Antenna                            |
|                       | Antenna Gain:                                                                                                                                                                                                                                                                                                                                                                                                                  | -14.5dBi to -15.5dBi                           |
|                       | FCC ID:                                                                                                                                                                                                                                                                                                                                                                                                                        | X4K-TX10V1ATAMLT1                              |

(Customer supplied product information)

(Refer to Photographs in Appendix B for views of the EUT)

### 5.2. Product description

The EUT (Equipment Under Test) has been described as follows:

"The TX-10 is a range of remote transmitters, which is allows secure keyless access control for automatic gates and garage doors (open and close), and other ATA equipment, which require remote operations."

The highest fundamental frequency generated or used within the EUT, or the highest frequency at which it operates as specified by the customer is 434.37MHz.

### 5.3. Support Equipment

None

#### 5.4. Product operating modes

The TX-10 series transmitter has 2 (two) operating modes: PTX-6AM and PTX-8.

*(Customer supplied product operating mode information)*

#### 5.5. Product operating mode for testing

PTX-6AM Mode

#### 5.6. Configuration

The EUT was either configured by the customer or configured using the customer's instructions:

Standalone product, powered via internal 3VDC button battery (CR 2032). A new battery was used for all testing. Sample 2 was configured to normal operation and used for transmitter deactivation test. Sample 1 was operating continuously and was used for all other tests.




Figure 1: EUT configuration diagram for Transmitter Testing

#### 5.7. Modifications

EMC Bayswater Pty Ltd did not modify the EUT.

#### 5.8. Test Facility

Field strength of fundamental, Duty Cycle Correction Factor, Field strength of spurious emissions, Transmitter Deactivation and 20dB Emission Bandwidth Measurements were taken in the indoor Open Area Test Site (iOATS) facility at EMC Bayswater Pty Ltd, located at 18/88 Merrindale Drive, Croydon South, Victoria, 3136, Australia.

EMC Bayswater Pty Ltd's FCC Accredited Test Firm Registration number: 527798.

EMC Bayswater Pty Ltd's FCC Test Firm Designation number is AU0004.

#### 5.9. Test Equipment

Refer to Appendix A for the measurement instrument list.

## 6. Referenced Standards

CFR47 FCC Part 15, Subpart C

CFR47 FCC Part 15, Subpart B

ANSI C63.10 - 2013

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

ANSI C63.4 - 2014

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

## 7. Referenced Documents

Test-Plan

Not supplied

---

## 8. Antenna Requirement – FCC Part 15.203

### 8.1. Requirements

As per section 15.203 of CFR47 FCC Part 15, Subpart C:

- An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### 8.2. Result

The EUT uses permanent, internally attached antenna which is etched in to the PCB. Therefore the EUT complied with the antenna requirements of CFR47 FCC Part 15, Subpart C – Section 15.203.

## 9. Duty cycle correction factor

As per section 7.5 of ANSI C63.10 - 2013 & FCC Part 15.35(c):

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The following procedure is an example of how the average value may be determined. The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in following equation:

$$\delta(\text{dB}) = 20\log(\Delta)$$

where

$\delta$  = The duty cycle correction factor (dB)

$\Delta$  = The duty cycle (dimension less)

Duty Cycle = Total on time (ms)/Period (ms)

### 9.1. Test Procedure

The Duty cycle correction factor determination was performed in accordance with the section 7.5 of ANSI C63.10 - 2013.

### 9.2. Test Results

(Refer to graphs 12 to 15 in Appendix C)

Duty Cycle calculation:

| Type of Pulse | Pulse time | Number of Pulses in a period | Time    |
|---------------|------------|------------------------------|---------|
| Short Pulse 1 | 1.45ms     | 1                            | 1.45ms  |
| Short Pulse 2 | 5.22ms     | 1                            | 5.22ms  |
| Medium Pulse  | 6.78ms     | 1                            | 6.78ms  |
| Long Pulse    | 14.22ms    | 1                            | 14.22ms |
| Total ON time |            |                              | 27.67ms |
| Pulse Period  |            |                              | 100ms   |

$$\text{Duty Cycle} = (27.67/100) = 0.2767$$

$$\text{Duty Cycle Correction Factor} = 20 \times \log(0.2767) = -11.2\text{dB}$$

| Measured Duty Cycle | Correction Factor (dB) |
|---------------------|------------------------|
| 0.2767              | -11.2                  |

Table 2: Measured Duty Cycle

The measurement uncertainty was calculated as follows:

| Measurement Parameter | Calculated measurement uncertainty |
|-----------------------|------------------------------------|
| Time                  | $\pm 0.2\%$                        |

The reported uncertainty is an expanded uncertainty calculated using a coverage factor of  $k=2$  which gives a level of confidence of approximately 95%.

**Notes:** The measured duty cycle for customer supplied sample is 0.2767 (27.67%).

The duty cycle correction factor for 0.2767 duty cycle is -11.2dB.

**Assessment:** All Peak measurements of the transmission fundamental and associated harmonics can be reduced by 11.2dB.

## 10. Field strength of fundamental – FCC Part 15.231(b)

### 10.1. Test Procedure

The EUT was tested for Field strength of fundamental in accordance with FCC 47 CFR Part 15 Subpart C Radio frequency devices (Intentional Radiators).

Field strength of fundamental were measured 3 metres away from the EUT in the iOATS (indoor Open Area Test Site) facility, which is an ANSI C63.4 compliant semi-anechoic chamber with ground plane. The EUT was placed on a non-conductive support at a height of 0.8m above the ground plane.

For both horizontal and vertical antenna polarizations, the peak detector was set to MAX-HOLD and the range selected continuously scanned with 120kHz RBW and 300kHz VBW. The antenna height was varied from 1 to 4 metres and the turntable slowly rotated. The EUT was orientated in each of the X, Y and Z-axis, in-turn, to find the worst case emissions. The maximum emissions were recorded.

Plots of the accumulated measurement data for both horizontal and vertical antenna polarizations, including all transducer and other measuring system correction factors were produced using commercially available compliant software (as listed in the test equipment list of this report)

*(Refer to photographs in Annex C for views of the test configuration)*

### 10.2. Limits

The EUT shall meet the limits in the following table:

| Fundamental frequency (MHz) | Field strength of fundamental ( $\mu\text{V/m}$ )               |
|-----------------------------|-----------------------------------------------------------------|
| 40.66 to 40.70              | 2,250 (67 dB $\mu\text{V/m}$ )                                  |
| 70 to 130                   | 1,250 (61.9 dB $\mu\text{V/m}$ )                                |
| 130 to 174                  | <sup>1</sup> 1,250 to 3,750 (61.9 to 71.5 dB $\mu\text{V/m}$ )  |
| 174 to 260                  | 3,750 (71.5 dB $\mu\text{V/m}$ )                                |
| 260 to 470                  | <sup>1</sup> 3,750 to 12,500 (71.5 to 81.9 dB $\mu\text{V/m}$ ) |
| Above 470                   | 12,500 (81.9 dB $\mu\text{V/m}$ )                               |

<sup>1</sup>Linear interpolations.

Table 3: Limits for Field strength of fundamental at 3m distance

### 10.3. Test Results

Field strength of fundamental measurements are tabulated below:

(Refer to graphs 1 & 2 in Appendix C)

| Measurement Antenna Polarisation | EUT Orientation | Frequency (MHz) | Peak Electric Field Strength (3m) (dBµV/m) | Duty Cycle Factor (dB) | Average Electric Field Strength (3m) (dBµV/m) | Limit Electric Field Strength (3m) (dBµV/m) | Delta Limit (dB)  |
|----------------------------------|-----------------|-----------------|--------------------------------------------|------------------------|-----------------------------------------------|---------------------------------------------|-------------------|
| Horizontal                       | Z               | 433.481         | 88.5                                       | -11.2                  | 77.3                                          | 80.8                                        | -3.5 <sup>+</sup> |
|                                  |                 | 433.948         | 88.3                                       | -11.2                  | 77.1                                          | 80.8                                        | -3.7 <sup>+</sup> |
|                                  |                 | 434.338         | 88.2                                       | -11.2                  | 77.0                                          | 80.8                                        | -3.8 <sup>+</sup> |
| Vertical                         | X               | 433.429         | 90.8                                       | -11.2                  | 79.6                                          | 80.8                                        | -1.2 <sup>+</sup> |
|                                  |                 | 433.896         | 90.8                                       | -11.2                  | 79.6                                          | 80.8                                        | -1.2 <sup>+</sup> |
|                                  |                 | 434.338         | 90.6                                       | -11.2                  | 79.4                                          | 80.8                                        | -1.4 <sup>+</sup> |

<sup>+</sup>Worst-case emissions, <sup>+</sup>refer to measurement uncertainty statement

Table 4: Field strength of fundamental measurements

The measurement uncertainty was calculated as follows:

| Measurement frequency range | Calculated measurement uncertainty |
|-----------------------------|------------------------------------|
| 30MHz to 1000MHz            | ±4.65dB                            |

The reported uncertainty is an expanded uncertainty calculated using a coverage factor of  $k=2$  which gives a level of confidence of approximately 95%. The referenced uncertainty standard specifies that determination of compliance shall be based on measurements without taking into account measurement uncertainty. However, the measurement uncertainty shall appear in the test report.

| Climatic Conditions   |                     |
|-----------------------|---------------------|
| Temperature:          | 18.3 to 18.4°C      |
| Humidity:             | 51%                 |
| Atmospheric pressure: | 1014.5 to 1014.6hPa |

Table 5: Climatic conditions

**Calculation:** The above results are based upon the following calculation:

$$\begin{aligned} E (\text{Peak}) &= V_{pk} + AF + L_C \\ E(\text{Average}) &= E(\text{Peak}) - \text{Duty Cycle Correction Factor} \end{aligned}$$

Where:

$$\begin{aligned} E &= \text{E-field in dB}\mu\text{V/m} \\ V_{QP/PK/AV} &= \text{Measured Voltage (Peak) in dB}\mu\text{V} \\ AF &= \text{Antenna Factor in dB(/m)} \\ L_C &= \text{Cable and attenuator Loss in dB} \end{aligned}$$

Example calculation:

$$\begin{aligned} E (\text{Peak}) &= V_{PK} + AF + L_C \\ E (\text{Peak}) &= 30\text{dB}\mu\text{V} + 12\text{dB/m} + 2.3\text{dB} \\ E (\text{Peak}) &= 44.3 \text{ dB}\mu\text{V/m} \\ E (\text{Average}) &= E(\text{Peak}) - \text{Duty Cycle Correction Factor} \\ E (\text{Average}) &= 44.3 - 6 = 38.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

**Notes:** The Field strength of fundamental measurements were below the specified limit.

**Assessment:** The EUT complied with the Field strength of fundamental requirements of CFR47 FCC Part 15, Subpart C – Section 15.231.

## 11. Field strength of spurious emissions – FCC Part 15.231(b)

### 11.1. Test Procedure

The Radiated Emissions were performed in accordance with the ANSI C63.10 - 2013.

Radiated Emissions were measured 3 metres (from 9kHz to 1GHz) away from the EUT in the iOATS (indoor Open Area Test Site) facility, which is an ANSI C63.4 compliant semi-anechoic chamber with ground plane. The EUT was placed on a non-conductive support at a height of 0.8m above the ground plane.

In the frequency range of 9kHz to 30MHz, an Active loop antenna was used. For X (parallel), Y (perpendicular) and Z (ground-parallel) antenna polarizations, the peak detector was set to MAX-HOLD and the range selected continuously scanned. The measuring antenna was positioned at 1m fixed height and the turntable slowly rotated. The peak preview measurements were performed with a resolution bandwidth of 200 Hz (9kHz to 150kHz), 9kHz (150kHz to 30MHz) and a video bandwidth of 30 kHz. Peak emissions that exceeded the limit or were close to the applicable limit were investigated further. The frequency of each emissions was then accurately determined. Each emission of interest was then in-turn maximised by using the turntable to rotate the EUT through 360 degrees to find the worst-case emission arrangement. Quasi peak measurements were then performed using a measuring time of no less than 15 seconds. The final quasi-peak measurements were performed using a receiver bandwidth of 6dB and a resolution bandwidth of 200 Hz (9kHz to 150kHz) and 9kHz (150kHz to 30MHz).

In the frequency range of 30MHz to 1GHz, a Biconilog antenna was used. For both horizontal and vertical antenna polarizations, the peak detector was set to MAX-HOLD and the range selected continuously scanned. The measuring antenna was positioned at 4 different fixed height positions and the turntable slowly rotated. The peak preview measurements were performed with a resolution bandwidth of 120 kHz and a video bandwidth of 300 kHz. Peak emissions that exceeded the limit or were close to the applicable limit were investigated further. The frequency of each emissions was then accurately determined. Each emission of interest was then in-turn maximised by using the turntable to rotate the EUT through 360 degrees and varying the height of the antenna between 1 and 4 metres to find the worst-case emission arrangement. Quasi peak measurements were then performed using a measuring time of no less than 15 seconds. The final quasi-peak measurements were performed using a receiver bandwidth of 6dB and a resolution bandwidth of 120 kHz.

In the frequency range 1.0GHz to 4.5GHz a Horn antenna was used and an area of 3m x 3m was covered between the antenna and the EUT using RF absorbing material with a rated attenuation more than 20dB over the frequency range. The height of the horn antenna was varied using the antenna bore-sighting technique and the turntable slowly rotated to maximise the emissions. For both horizontal and vertical antenna polarizations, the Peak and Average preview measurements were performed with a resolution bandwidth of 1 MHz and a video bandwidth of 3MHz. Peak and average emissions that exceeded the applicable limit or were close to the applicable limit were investigated further. Each emission of interest was then in-turn maximised by using the turntable to rotate the EUT through 360 degrees and the antenna height varied (if applicable, using the antenna bore-sighting technique) to find the worst-case emission arrangement. Peak and CISPR Average measurements were then performed using a

measuring time of no less than 15 seconds, the maximum emission level in the observed duration was recorded as the final result. The final peak and CISPR Average measurements were performed using a receiver bandwidth of 6dB and a resolution bandwidth of 1 MHz. Peak and Average measurements were performed at spot frequencies where the peak or average emission was close to, or exceeded the applicable limit line with the EUT rotation and antenna height varied (if applicable, using the antenna bore-sighting technique) to produce the highest emission.

Plots of the accumulated measurement data for both horizontal and vertical antenna polarizations, including all transducer and other measuring system correction factors were produced using commercially available compliant software (as listed in the test equipment list of this report).

*(Refer to photographs in Annex C for views of the test configuration)*

## 11.2. Limits

CFR47 FCC Part 15, Subpart C – Section 15.231 (b) is applicable as the EUT periodic operation rate does not exceed the rate specified in paragraph (a) of 15.231.

As per section 15.231 (b), in addition to the provisions of 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following.

| Fundamental frequency (MHz) | Field strength of fundamental ( $\mu\text{V/m}$ )                  | Field strength of spurious emissions ( $\mu\text{V/m}$ )        |
|-----------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------|
| 40.66 to 40.70              | 2,250 (67 dB $\mu\text{V/m}$ )                                     | 225 (47 dB $\mu\text{V/m}$ )                                    |
| 70 to 130                   | 1,250 (61.9 dB $\mu\text{V/m}$ )                                   | 125 (41.9 dB $\mu\text{V/m}$ )                                  |
| 130 to 174                  | <sup>1</sup> 1,250 to 3,750<br>(61.9 to 71.5 dB $\mu\text{V/m}$ )  | <sup>1</sup> 125 to 375<br>(41.9 to 51.5 dB $\mu\text{V/m}$ )   |
| 174 to 260                  | 3,750 (71.5 dB $\mu\text{V/m}$ )                                   | 375 (51.5 dB $\mu\text{V/m}$ )                                  |
| 260 to 470                  | <sup>1</sup> 3,750 to 12,500<br>(71.5 to 81.9 dB $\mu\text{V/m}$ ) | <sup>1</sup> 375 to 1,250<br>(51.5 to 61.9 dB $\mu\text{V/m}$ ) |
| Above 470                   | 12,500<br>(81.9 dB $\mu\text{V/m}$ )                               | 1,250<br>(61.9 dB $\mu\text{V/m}$ )                             |

<sup>1</sup>Linear interpolations.

Table 6: Limits for Radiated Spurious Emissions at distance of 3m – 15.231(b)

As per section 15.231(b)(3), the limits on the field strength of the spurious emissions in the below table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in above table 6 or to the general limits shown in 15.209, whichever limit permits a higher field strength.

| Frequency Range (MHz)                                          | Limits at 3m (dB $\mu$ V/m) |
|----------------------------------------------------------------|-----------------------------|
| 0.009 to 0.490                                                 | 128.5 to 93.8               |
| 0.490 to 1.705                                                 | 73.8 to 62.9                |
| 1.705 to 30.0                                                  | 69.5                        |
| 30.0 to 88.0                                                   | 40.0                        |
| 88.0 to 216.0                                                  | 43.5                        |
| 216.0 to 960.0                                                 | 46.0                        |
| Above 960                                                      | 54.0                        |
| NOTE: The lower limit shall apply at the transition frequency. |                             |

Table 7: Limits for Radiated Spurious Emissions at distance of 3m – 15.209

| Frequency Range (MHz)                                          | Limits at 3m (dB $\mu$ V/m) |
|----------------------------------------------------------------|-----------------------------|
| 30.0 to 4500.0                                                 | 60.8                        |
| NOTE: The lower limit shall apply at the transition frequency. |                             |

Table 8: Limits for Radiated Spurious Emissions at distance of 3m – 15.231(b) -20dB Field strength of Fundamental

### 11.3. Test Results

Radiated Emissions measurements are tabulated below. For below 1GHz measurements, Quasi-peak or Average measurements were performed at spot frequencies where the peak emission was close to, or exceeded the applicable limit line. For above 1GHz measurements, Peak or Average measurements were performed at spot frequencies where the peak or average emission was close to, or exceeded the applicable limit line.

(Refer to graphs 3 to 11 in Appendix C)

| Measurement Antenna Polarisation | Frequency (MHz)                                                                                     | Result peak (dB $\mu$ V/m) | Limit Quasi-peak/ Average (dB $\mu$ V/m) | Delta limit (dB) |
|----------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------|------------------------------------------|------------------|
| X                                | Peak preview emissions >20dB below limit or no significant emissions above the noise floor observed |                            |                                          |                  |
| Y                                | Peak preview emissions >20dB below limit or no significant emissions above the noise floor observed |                            |                                          |                  |
| Z                                | Peak preview emissions >20dB below limit or no significant emissions above the noise floor observed |                            |                                          |                  |

Table 9: Field strength of spurious emissions – 9kHz to 30MHz

| Measurement Antenna Polarisation | EUT Orientation | Frequency (MHz) | Peak Electric Field Strength (3m) (dBµV/m) | Duty Cycle Factor (dB) | Average Electric Field Strength (3m) (dBµV/m) | Limit Electric Field Strength (3m) (dBµV/m) | Delta Limit (dB) |
|----------------------------------|-----------------|-----------------|--------------------------------------------|------------------------|-----------------------------------------------|---------------------------------------------|------------------|
| Horizontal                       | Z               | 866.890         | 53.7                                       | -11.2                  | 42.5                                          | 60.8                                        | -18.3            |
|                                  |                 | 867.920         | 54.0                                       | -11.2                  | 42.8                                          | 60.8                                        | -18.0            |
|                                  |                 | 868.790         | 54.2                                       | -11.2                  | 43.0                                          | 60.8                                        | <b>-17.8*</b>    |
| Vertical                         | X               | 866.980         | 51.4                                       | -11.2                  | 40.2                                          | 60.8                                        | -20.6            |
|                                  |                 | 867.770         | 51.6                                       | -11.2                  | 40.4                                          | 60.8                                        | -20.4            |
|                                  |                 | 868.670         | 51.4                                       | -11.2                  | 40.2                                          | 60.8                                        | -20.6            |

*\*Worst-case emissions*

Table 10: Field strength of spurious emissions – 30MHz to 1GHz

| EUT Orientation | Frequency (MHz) | Peak Result (dBµV/m) | Duty Cycle Factor (dB) | Average Result (dBµV/m) | Peak Limit (dBµV/m) | Average Limit (dBµV/m) | Peak Delta Limit (dB) | Average Delta Limit (dB) |
|-----------------|-----------------|----------------------|------------------------|-------------------------|---------------------|------------------------|-----------------------|--------------------------|
| Z               | 1300.040        | 48.5                 | -11.2                  | 37.3                    | 74.0                | 54.0                   | -25.5                 | -16.7                    |
|                 | 1301.600        | 49.6                 | -11.2                  | 38.4                    | 74.0                | 54.0                   | <b>-24.4*</b>         | <b>-15.6*</b>            |
|                 | 1302.900        | 49.2                 | -11.2                  | 38.0                    | 74.0                | 54.0                   | -24.8                 | -16.0                    |
|                 | 1734.240        | 48.5                 | -11.2                  | 37.3                    | 80.8                | 60.8                   | -32.3                 | -23.5                    |
|                 | 1735.540        | 49.9                 | -11.2                  | 38.7                    | 80.8                | 60.8                   | -30.9                 | -22.1                    |
|                 | 1737.100        | 48.8                 | -11.2                  | 37.6                    | 80.8                | 60.8                   | -32.0                 | -23.2                    |
|                 | 2167.140        | 50.3                 | -11.2                  | 39.1                    | 80.8                | 60.8                   | -30.5                 | -21.7                    |
|                 | 2169.740        | 50.1                 | -11.2                  | 38.9                    | 80.8                | 60.8                   | -30.7                 | -21.9                    |
|                 | 2171.820        | 49.5                 | -11.2                  | 38.3                    | 80.8                | 60.8                   | -31.3                 | -22.5                    |
|                 | 2603.420        | 46.0                 | -11.2                  | 34.8                    | 80.8                | 60.8                   | -34.8                 | -26.0                    |
|                 | 3033.980        | 47.4                 | -11.2                  | 36.2                    | 80.8                | 60.8                   | -33.4                 | -24.6                    |
|                 | 3475.200        | 48.9                 | -11.2                  | 37.7                    | 80.8                | 60.8                   | -31.9                 | -23.1                    |
|                 | 3901.410        | 46.7                 | -11.2                  | 35.5                    | 74.0                | 54.0                   | -27.3                 | -18.5                    |

*\*Worst-case emissions*

Table 11: Field strength of spurious emissions – Horizontal Antenna Polarization – 1GHz to 4.5GHz

| EUT Orientation | Frequency (MHz) | Peak Result (dBμV/m) | Duty Cycle Factor (dB) | Average Result (dBμV/m) | Peak Limit (dBμV/m) | Average Limit (dBμV/m) | Peak Delta Limit (dB) | Average Delta Limit (dB) |
|-----------------|-----------------|----------------------|------------------------|-------------------------|---------------------|------------------------|-----------------------|--------------------------|
| X               | 1300.300        | 49.4                 | -11.2                  | 38.2                    | 74.0                | 54.0                   | -24.6*                | -15.8*                   |
|                 | 1301.860        | 49.1                 | -11.2                  | 37.9                    | 74.0                | 54.0                   | -24.9                 | -16.1                    |
|                 | 1302.900        | 48.8                 | -11.2                  | 37.6                    | 74.0                | 54.0                   | -25.2                 | -16.4                    |
|                 | 1733.720        | 48.3                 | -11.2                  | 37.1                    | 80.8                | 60.8                   | -32.5                 | -23.7                    |
|                 | 1735.800        | 48.2                 | -11.2                  | 37.0                    | 80.8                | 60.8                   | -32.6                 | -23.8                    |
|                 | 1737.360        | 48.8                 | -11.2                  | 37.6                    | 80.8                | 60.8                   | -32.0                 | -23.2                    |
|                 | 2167.400        | 49.7                 | -11.2                  | 38.5                    | 80.8                | 60.8                   | -31.1                 | -22.3                    |
|                 | 2170.000        | 49.4                 | -11.2                  | 38.2                    | 80.8                | 60.8                   | -31.4                 | -22.6                    |
|                 | 2171.820        | 49.8                 | -11.2                  | 38.6                    | 80.8                | 60.8                   | -31.0                 | -22.2                    |
|                 | 2600.560        | 46.2                 | -11.2                  | 35.0                    | 80.8                | 60.8                   | -34.6                 | -25.8                    |
|                 | 3034.240        | 44.7                 | -11.2                  | 33.5                    | 80.8                | 60.8                   | -36.1                 | -27.3                    |
|                 | 3471.300        | 47.1                 | -11.2                  | 35.9                    | 80.8                | 60.8                   | -33.7                 | -24.9                    |
|                 | 3904.920        | 48.1                 | -11.2                  | 36.9                    | 74.0                | 54.0                   | -25.9                 | -17.1                    |

\*Worst-case emissions

Table 12: Field strength of spurious emissions – Vertical Antenna Polarization – 1GHz to 4.5GHz

The measurement uncertainty was calculated as follows:

| Measurement frequency range | Calculated measurement uncertainty |
|-----------------------------|------------------------------------|
| 0.009MHz to 30MHz           | ±4.33dB                            |
| 30MHz to 1GHz               | ±4.65dB                            |
| 1GHz to 6GHz                | ±4.83dB                            |

The reported uncertainty is an expanded uncertainty calculated using a coverage factor of  $k=2$  which gives a level of confidence of approximately 95%. The referenced uncertainty standard specifies that determination of compliance shall be based on measurements without taking into account measurement uncertainty. However, the measurement uncertainty shall appear in the test report.

| Climatic Conditions   |                     |
|-----------------------|---------------------|
| Temperature:          | 18.3 to 18.7°C      |
| Humidity:             | 48 to 51%           |
| Atmospheric pressure: | 1005.5 to 1014.6hPa |

Table 13: Climatic conditions

**Calculation:** The above results are based upon the following calculation:

$$\begin{aligned}
 E \text{ (Peak)} &= V_{pk} + AF + L_C \\
 E \text{ (Average)} &= E \text{ (Peak)} - \text{Duty Cycle Correction Factor} \\
 \text{Where:} \\
 E &= E\text{-field in dB}\mu\text{V/m} \\
 V_{QP/PK/AV} &= \text{Measured Voltage (Peak) in dB}\mu\text{V} \\
 AF &= \text{Antenna Factor in dB/(m)} \\
 L_C &= \text{Cable and attenuator Loss in dB}
 \end{aligned}$$

Example calculation:

$$\begin{aligned} E(\text{Peak}) &= V_{pk} + AF + L_C \\ E(\text{Peak}) &= 30\text{dB}\mu\text{V} + 12\text{dB/m} + 2.3\text{dB} \\ E(\text{Peak}) &= 44.3\text{ dB}\mu\text{V/m} \\ E(\text{Average}) &= E(\text{Peak}) - \text{Duty Cycle Correction Factor} \\ E(\text{Average}) &= 44.3 - 6 = 38.3\text{ dB}\mu\text{V/m} \end{aligned}$$

**Notes:** All Spurious Emissions measurements were below the permissible Spurious and general intentional radiator limits for the Average/Quasi peak detector and the peak detector emissions were below the peak limit.

The average measurements were determined from Peak detector measurements by applying the duty cycle correction factor.

**Assessment:** The EUT complied with the Radiated Spurious Emissions requirements of CFR47 FCC Part 15, Subpart C – Section 15.231.

## 12. Emission Bandwidth – FCC Part 15.231(c)

### 12.1. Test Procedure

The 20dB Emission Bandwidth was performed in accordance with the section 6.9 of ANSI C63.10 - 2013.

The EUT was placed on a polystyrene support at a height of 0.8m above the ground reference plane. The measuring antenna was located at a distance of 3m from the EUT, using the spectrum analyser. The worst-case transmitter orientation, measurement antenna polarization were used for each measurement. The spectrum analyzer centre frequency was tuned to the fundamental (transmit frequency) of the transmitter with span range between two times and five times the OBW (-20dB bandwidth). The nominal IF filter bandwidth (RBW) was set to 1% to 5% of the OBW and video bandwidth (VBW) was set to three times the RBW. The peak detector was used with trace mode to max hold. The resultant bandwidth measurement was recorded.

*(Refer to photographs in Annex C for views of the test configuration)*

### 12.2. Requirements

As per CFR47 FCC Part 15, Subpart C – Section 15.231:

- The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Center Frequency: 433.916MHz

### 12.3. Test Results

Emission Bandwidth measurements are tabulated below:

*(Refer to graph 16 in Appendix C)*

| Transmit center frequency (MHz) | Measured 20dB Bandwidth | Percentage of Measured Bandwidth with respect to Centre Frequency | Limit | Comment  |
|---------------------------------|-------------------------|-------------------------------------------------------------------|-------|----------|
| 433.916                         | 1.04MHz                 | 0.239%                                                            | 0.25% | Complied |

Table 14: Results for 20dB Bandwidth

The measurement uncertainty was calculated as follows:

| Measurement Parameter | Calculated measurement uncertainty |
|-----------------------|------------------------------------|
| Operating Frequency   | ±10.5kHz                           |
| Bandwidth             | ±14.96kHz                          |

The reported uncertainty is an expanded uncertainty calculated using a coverage factor of  $k=2$  which gives a level of confidence of approximately 95%. The referenced uncertainty standard specifies that determination of compliance shall be based on measurements without taking into account measurement uncertainty. However, the measurement uncertainty shall appear in the test report.

| Climatic Conditions   |                     |
|-----------------------|---------------------|
| Temperature:          | 18.3 to 18.4°C      |
| Humidity:             | 51%                 |
| Atmospheric pressure: | 1014.5 to 1014.6hPa |

Table 15: Climatic conditions

**Notes:** The 20dB bandwidth of the emission was contained within 0.25% of 433.916MHz center frequency.

**Assessment:** The EUT complied with the Emission Bandwidth requirements of CFR47 FCC Part 15, Subpart C – Section 15.231(c).

### 13. Transmitter Deactivation – FCC Part 15.231(a)

#### 13.1. Test Procedure

The transmitter signal was coupled to the spectrum analyser via a coaxial cable and a near-field probe. The centre frequency of the spectrum analyser was adjusted to the centre of the transmitter frequency. The attenuation and reference levels were adjusted to achieve maximum dynamic range without overloading the spectrum analyser input. The span of the spectrum analyser was set to zero (0Hz), and the sweep time adjusted to 5s. The trigger level was adjusted to allow the greatest amount of “on time” for a pulse train.

#### 13.2. Test Results

(Refer to graph 17 in Appendix C)

| Measured Transmitter deactivation time (s) | Required Transmitter deactivation time (s) | Comment  |
|--------------------------------------------|--------------------------------------------|----------|
| 0.463                                      | ≤ 5                                        | Complied |

Table 16: Results for transmitter deactivation test

The measurement uncertainty was calculated as follows:

| Measurement Parameter | Calculated measurement uncertainty |
|-----------------------|------------------------------------|
| Time                  | ±0.2%                              |

The reported uncertainty is an expanded uncertainty calculated using a coverage factor of  $k=2$  which gives a level of confidence of approximately 95%.

**Notes:** The measured transmitter deactivation time was less than 5s.

The device only transmitted when a button was pressed manually. The device transmitted packets repeatedly for some time when the button was held. When the button was released all transmission stopped within 463ms.

The Customer supplied a normally operated sample for Transmitter deactivation testing.

**Assessment:** The EUT complied with the Transmitter Deactivation requirements of CFR47 FCC Part 15, Subpart C – Section 15.231(a).

### 14. Conclusion

The Automatic Technology Australia Pty. Ltd., PTX-10V1AM, Handheld / Wall Remote Controls complied with the requirements of CFR47 FCC Part 15, Subpart C – Section 15.231.

## Appendix A – Test Equipment

| Inv.  | Equipment                                                       | Make            | Model No.  | Serial No.      | Calibration |        |      |
|-------|-----------------------------------------------------------------|-----------------|------------|-----------------|-------------|--------|------|
|       |                                                                 |                 |            |                 | Interval    | Due    | Type |
|       | Field strength of fundamental, Duty Cycle & Emissions Bandwidth |                 |            |                 |             |        |      |
| 1217  | ANALYSER, EMI Receiver                                          | Rohde & Schwarz | ESU40      | 100182          | 1 year      | Jun-24 | E    |
| 0932  | CONTROLLER, Position                                            | Sunol Sciences  | SC104V-3   | 081006-1        | N/A         | N/A    | V    |
| 0933  | TURNTABLE                                                       | Sunol Sciences  | SM46C      | 081006-2        | N/A         | N/A    | V    |
| 0934  | MAST, Antenna                                                   | Sunol Sciences  | TLT2       | 081006-5        | N/A         | N/A    | V    |
| 0935  | ANTENNA, Biconilog                                              | Sunol Sciences  | JB5        | A071106         | 2 years     | May-25 | E    |
| 0718  | ATTENUATOR, 6dB                                                 | JFW             | 50FPE-006  | -               | 1 year      | Jan-24 | I    |
| 1145  | CABLE, Coax, Sucoflex 104PA                                     | Huber + Suhner  | 84279564   | SN MY056/4PA    | 1 year      | Jan-24 | I    |
| 0989  | CABLE, Coax, Sucoflex 104A                                      | Huber+Suhner    | 44454/4A   | C357            | 1 year      | Jan-24 | I    |
| 0843  | ATTENUATOR, 10dB                                                | JFW             | 50HF-010N  |                 | 3 years     | Dec-24 | I    |
| 1155  | Hygrometer, Temp, Humidity                                      | DigiTech        | QM7312     | -               | 2 years     | Jul-25 | I    |
| 0666  | Enclosure, Semi-Anechoic, No 1                                  | RFI Industries  | S800 iOATS | 1229            | 3 years     | Aug-25 | I    |
| SW007 | EMC Measurement Software                                        | Rohde & Schwarz | EMC 32     | Version 8.53.0  | N/A         | N/A    | N/A  |
|       | Field strength of spurious emissions 9kHz to 4500MHz            |                 |            |                 |             |        |      |
| 1217  | ANALYSER, EMI Receiver                                          | Rohde & Schwarz | ESU40      | 100182          | 1 year      | Jun-24 | E    |
| 0935  | ANTENNA, Biconilog                                              | Sunol Sciences  | JB5        | A071106         | 2 years     | May-25 | E    |
| 0718  | ATTENUATOR, 6dB                                                 | JFW             | 50FPE-006  | -               | 1 year      | Jan-24 | I    |
| 0633  | ANTENNA, Double Ridge Horn                                      | EMCO            | 3115       | 9712-5369       | 3 years     | Aug-24 | I    |
| 0559  | PRE-AMP, Microwave, 18GHz                                       | Miteq           | AFS8       | 605305          | 1 year      | Apr-24 | I    |
| 0932  | CONTROLLER, Position                                            | Sunol Sciences  | SC104V-3   | 081006-1        | N/A         | N/A    | V    |
| 0933  | TURNTABLE                                                       | Sunol Sciences  | SM46C      | 081006-2        | N/A         | N/A    | V    |
| 0934  | MAST, Antenna                                                   | Sunol Sciences  | TLT2       | 081006-5        | N/A         | N/A    | V    |
| 0989  | CABLE, Coax, Sucoflex 104A                                      | Huber+Suhner    | 44454/4A   | C357            | 1 year      | Jan-24 | I    |
| 1145  | CABLE, Coax, Sucoflex 104PA                                     | Huber + Suhner  | 84279564   | SN MY056/4PA    | 1 year      | Jan-24 | I    |
| 1238  | CABLE, Coax, Sucoflex 126 E                                     | Huber + Suhner  | 10422876   | SN 8000495/126E | 1 year      | Jan-24 | I    |
| 0024  | ANTENNA, Active Loop                                            | EMCO            | 6502       | 2620            | 2 years     | Sep-25 | I    |
| 0745  | FILTER, Hi-Pass, 800MHz                                         | MiniCircuits    | NHP-800    | 10447           | 2 years     | May-24 | I    |
| 1155  | Hygrometer, Temp, Humidity                                      | DigiTech        | QM7312     | -               | 2 years     | Jul-25 | I    |
| 0666  | Enclosure, Semi-Anechoic, No 1                                  | RFI Industries  | S800 iOATS | 1229            | 3 years     | Aug-25 | I    |
| SW007 | EMC Measurement Software                                        | Rohde & Schwarz | EMC 32     | Version 8.53.0  | N/A         | N/A    | N/A  |
|       | Transmitter Deactivation                                        |                 |            |                 |             |        |      |
| 1217  | ANALYSER, EMI Receiver                                          | Rohde & Schwarz | ESU40      | 100182          | 1 year      | Jun-24 | E    |
| 1205  | CABLE, Coax, Sucoflex 126 E                                     | Huber+ Suhner   | 84383918   | SN MY1006/26EA  | 1 year      | Jan-24 | I    |
| 1155  | Hygrometer, Temp, Humidity                                      | DigiTech        | QM7312     | -               | 2 years     | Jul-25 | I    |
| 0697  | PROBE, Near-field, E&H, set                                     | ETS Lindgren    | 7405       | 4747            | N/A         | N/A    | V    |
| 0666  | Enclosure, Semi-Anechoic, No 1                                  | RFI Industries  | S800 iOATS | 1229            | 3 years     | Aug-25 | I    |

*V: Verification of operation against an internal reference*

*I: Internal calibration against a traceable standard*

*E: External calibration by a NATA or MRA equivalent endorsed facility*

*N/A: Not Applicable*


## Appendix B – Photographs

| Annex | Number | Photograph Description                                                                |
|-------|--------|---------------------------------------------------------------------------------------|
| A     | 1      | EUT – External Views                                                                  |
| A     | 2      |                                                                                       |
| A     | 3      |                                                                                       |
| A     | 4      |                                                                                       |
| A     | 5      |                                                                                       |
| A     | 6      |                                                                                       |
| B     | 1      | EUT – Internal Views                                                                  |
| B     | 2      |                                                                                       |
| B     | 3      |                                                                                       |
| B     | 4      |                                                                                       |
| B     | 5      |                                                                                       |
| B     | 6      |                                                                                       |
| B     | 7      |                                                                                       |
| B     | 8      |                                                                                       |
| B     | 9      |                                                                                       |
| B     | 10     |                                                                                       |
| B     | 11     |                                                                                       |
| B     | 12     |                                                                                       |
| B     | 13     | Transmitter battery                                                                   |
| C     | 1      | EUT X orientation                                                                     |
| C     | 2      | EUT Z orientation                                                                     |
| C     | 3      | Field strength of fundamental, Duty cycle and Emission Bandwidth – Test configuration |
| C     | 4      | Field strength of spurious emissions – Test configuration – 30MHz to 1GHz             |
| C     | 5      | Field strength of spurious emissions – Test configuration – 9kHz to 30MHz             |
| C     | 6      |                                                                                       |
| C     | 7      |                                                                                       |
| C     | 8      | Field strength of spurious emissions – Test configuration – 1GHz to 4.5GHz            |
| C     | 9      |                                                                                       |


|                                     |   |                                                 |
|-------------------------------------|---|-------------------------------------------------|
| EUT External Photographs            | - | EMC Bayswater Test Report E2310-1692A-1 Annex A |
| EUT Internal Photographs            | - | EMC Bayswater Test Report E2310-1692A-1 Annex B |
| EUT Test Configurations Photographs | - | EMC Bayswater Test Report E2310-1692A-1 Annex C |

### Appendix C – Measurement Graphs


| No. | Test                                 | Graph Description                                                     |
|-----|--------------------------------------|-----------------------------------------------------------------------|
| 1   | Field strength of fundamental        | Antenna Vertical – EUT X orientation                                  |
| 2   |                                      | Antenna Horizontal – EUT Z orientation                                |
| 3   | Field strength of spurious emissions | Antenna X – EUT X orientation – 9kHz to 30MHz                         |
| 4   |                                      | Antenna Y – EUT X orientation – 9kHz to 30MHz                         |
| 5   |                                      | Antenna Z – EUT X orientation – 9kHz to 30MHz                         |
| 6   |                                      | Vertical Antenna Polarisation – EUT X orientation – 30MHz to 800MHz   |
| 7   |                                      | Vertical Antenna Polarisation – EUT X orientation – 800MHz to 1GHz    |
| 8   |                                      | Vertical Antenna Polarisation – EUT X orientation – 1GHz to 4.5GHz    |
| 9   |                                      | Horizontal Antenna Polarisation – EUT Z orientation – 30MHz to 800MHz |
| 10  |                                      | Horizontal Antenna Polarisation – EUT Z orientation – 800MHz to 1GHz  |
| 11  |                                      | Horizontal Antenna Polarisation – EUT Z orientation – 1GHz to 4.5GHz  |
| 12  | Duty Cycle Correction Factor         | Duration of Partial Short pulse                                       |
| 13  |                                      | Duration of Short pulse                                               |
| 14  |                                      | Duration of Medium pulse                                              |
| 15  |                                      | Duration of Long pulse                                                |
| 16  | Emissions Bandwidth                  |                                                                       |
| 17  | Transmitter Deactivation             |                                                                       |

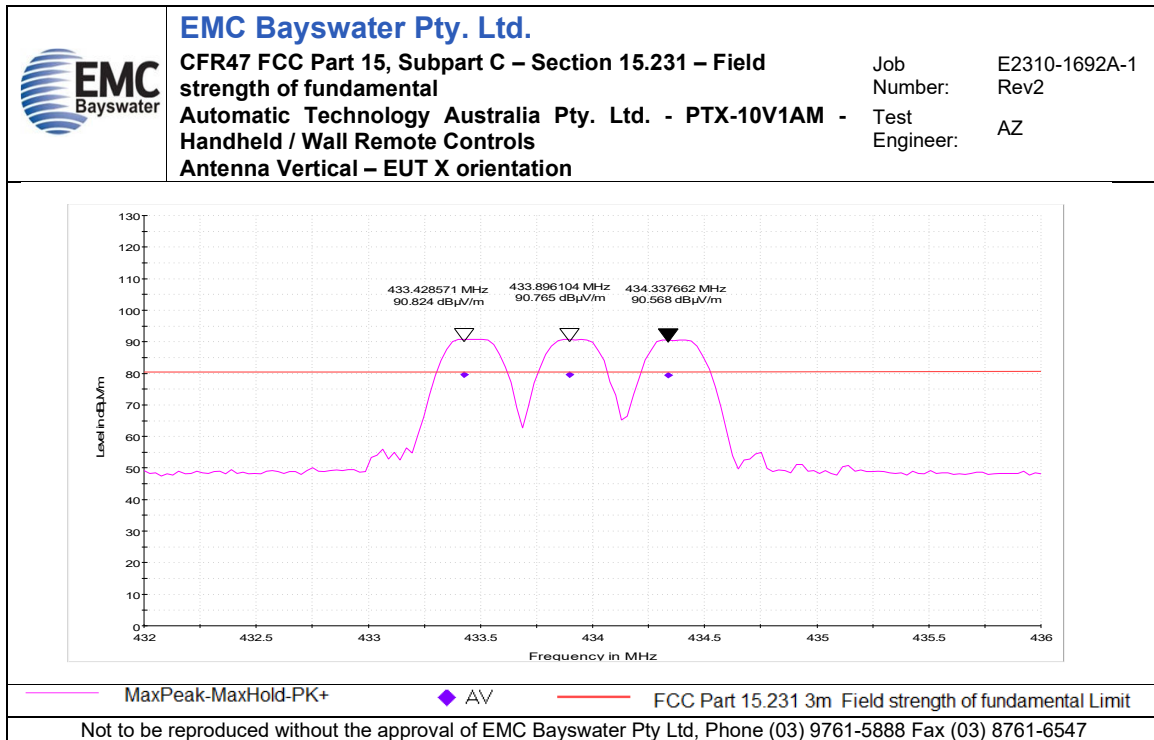


Graph 1

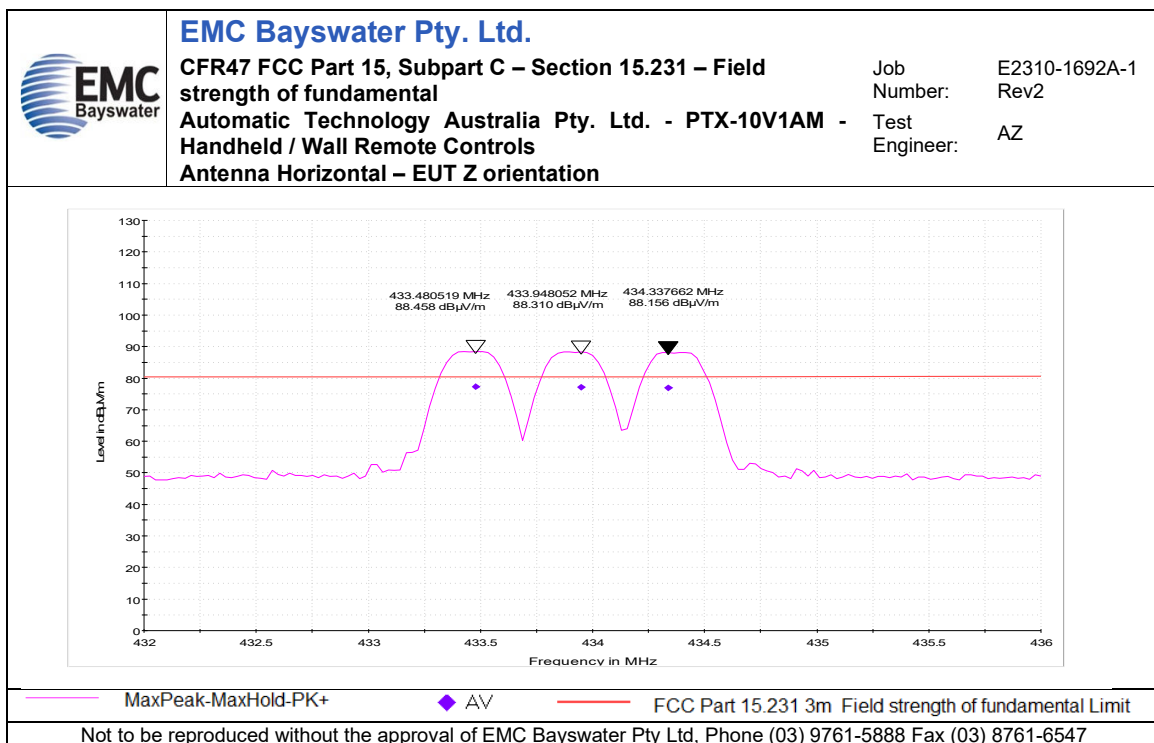


Graph 2

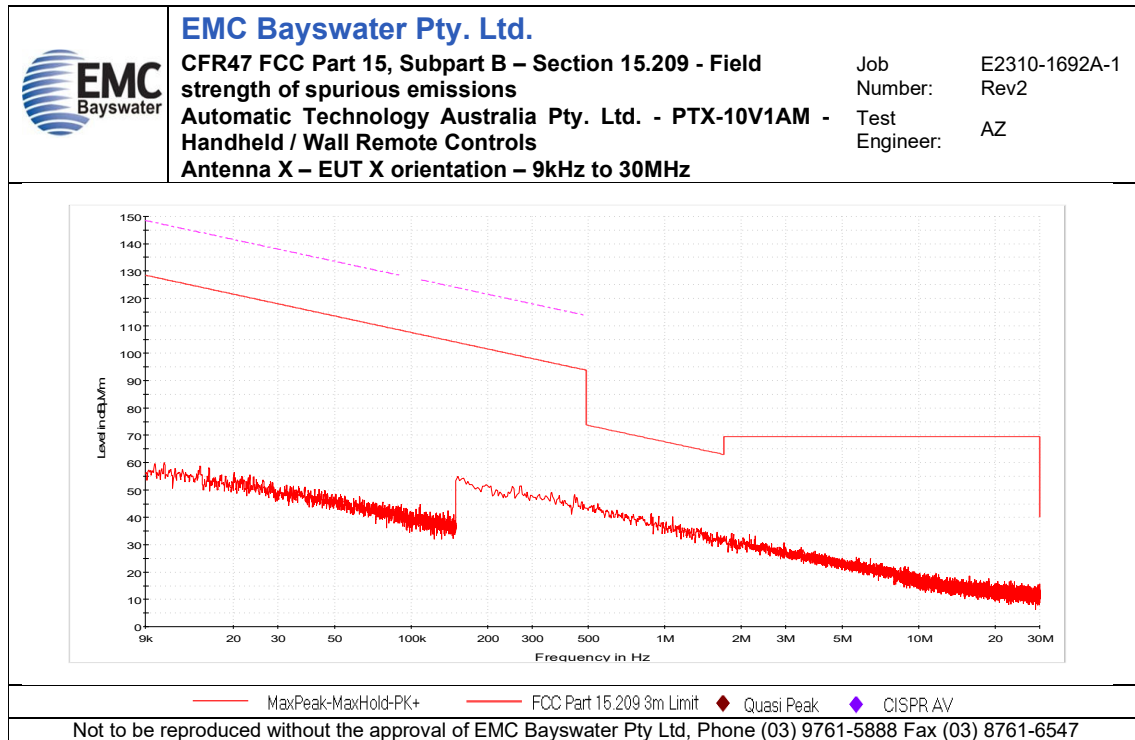


Graph 3

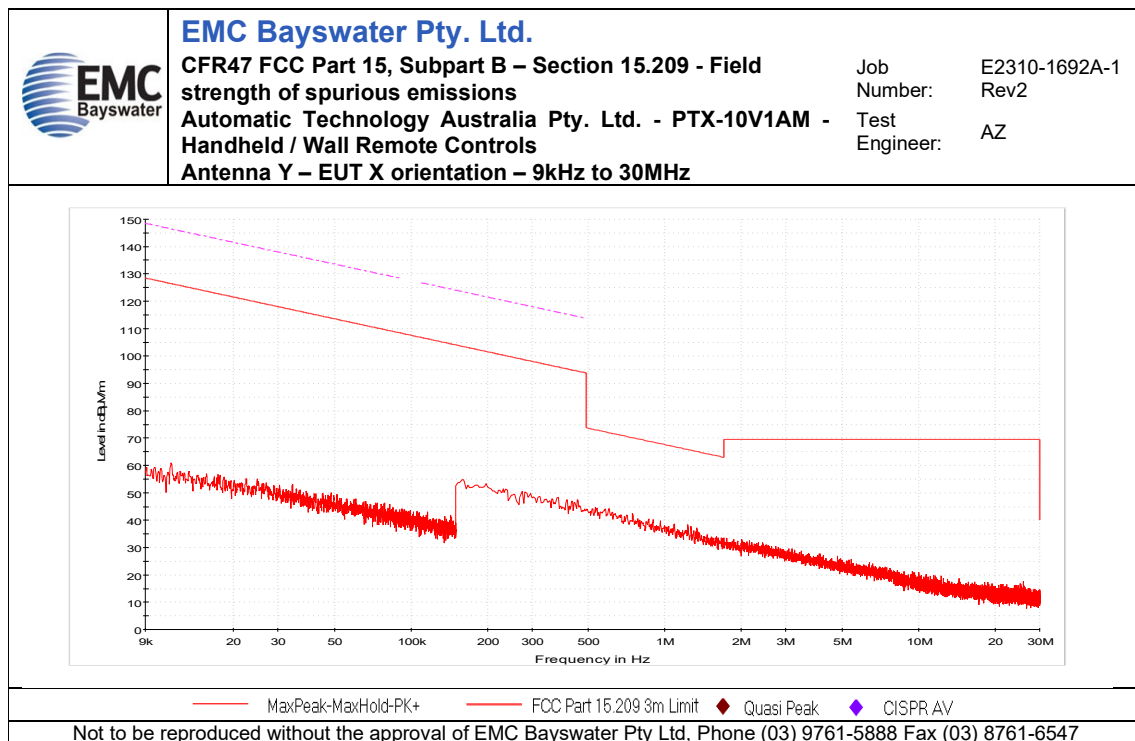


Graph 4

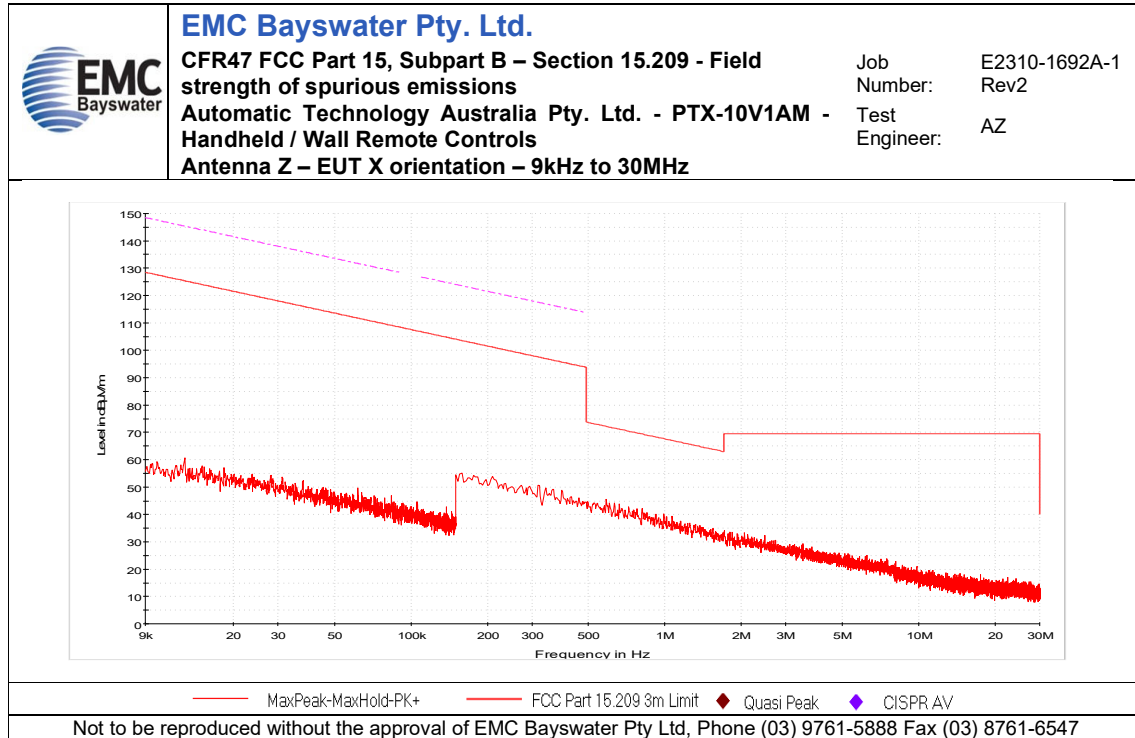


Graph 5

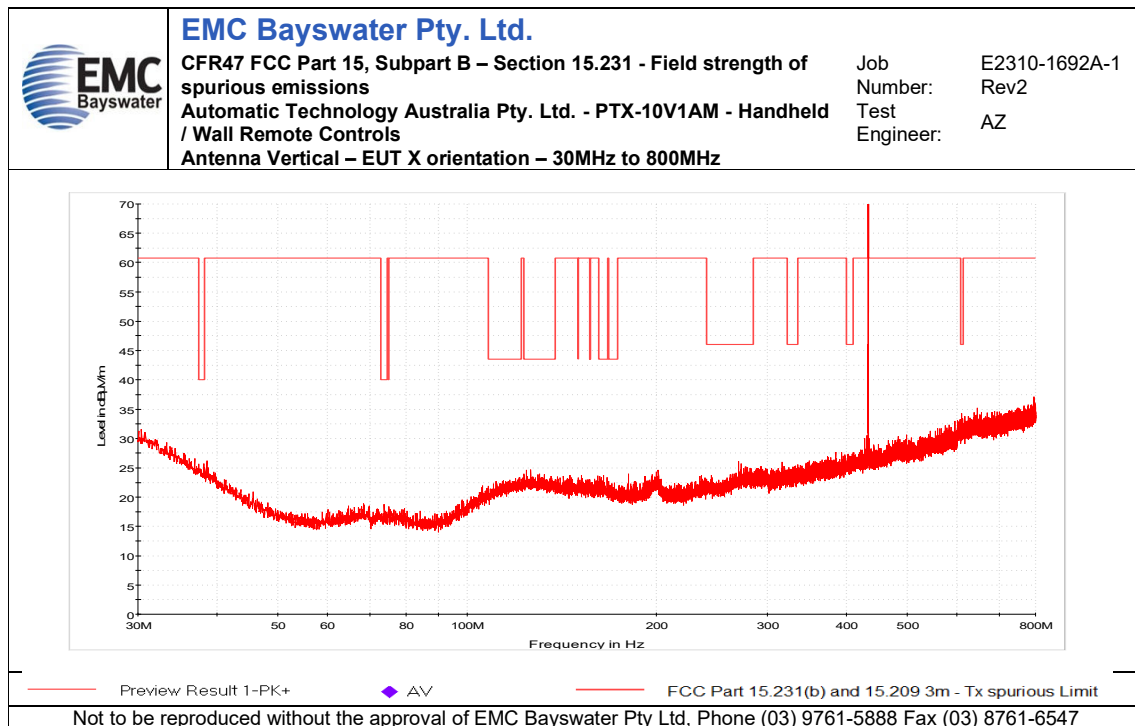


Graph 6

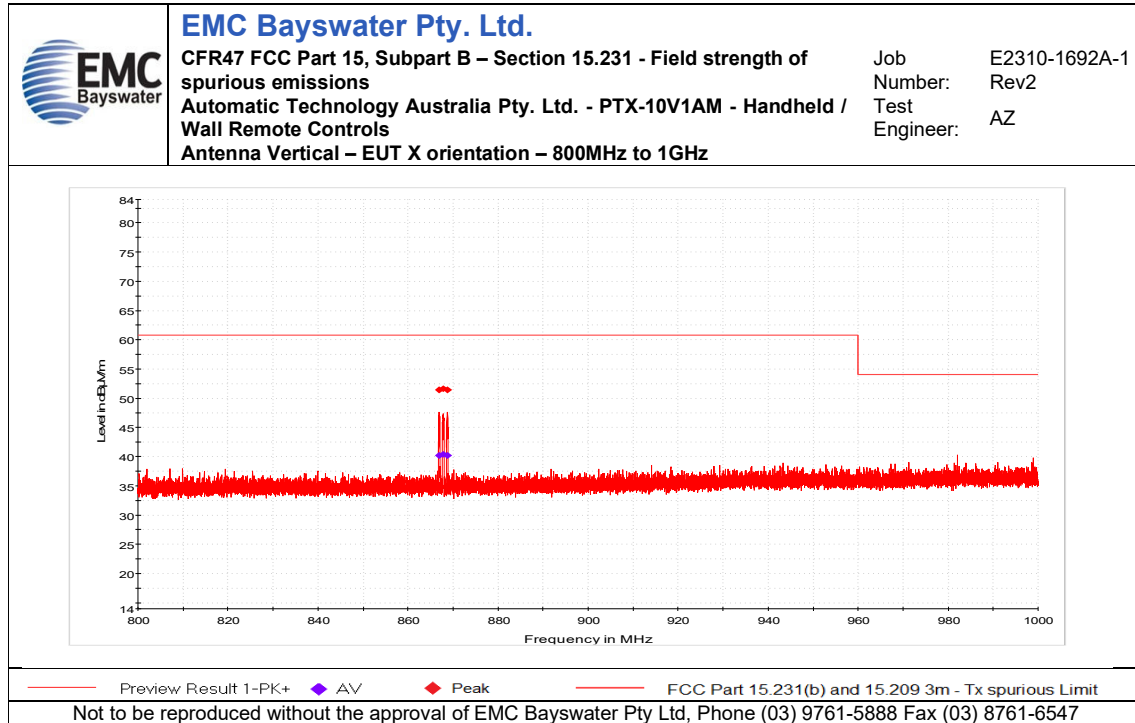


Graph 7

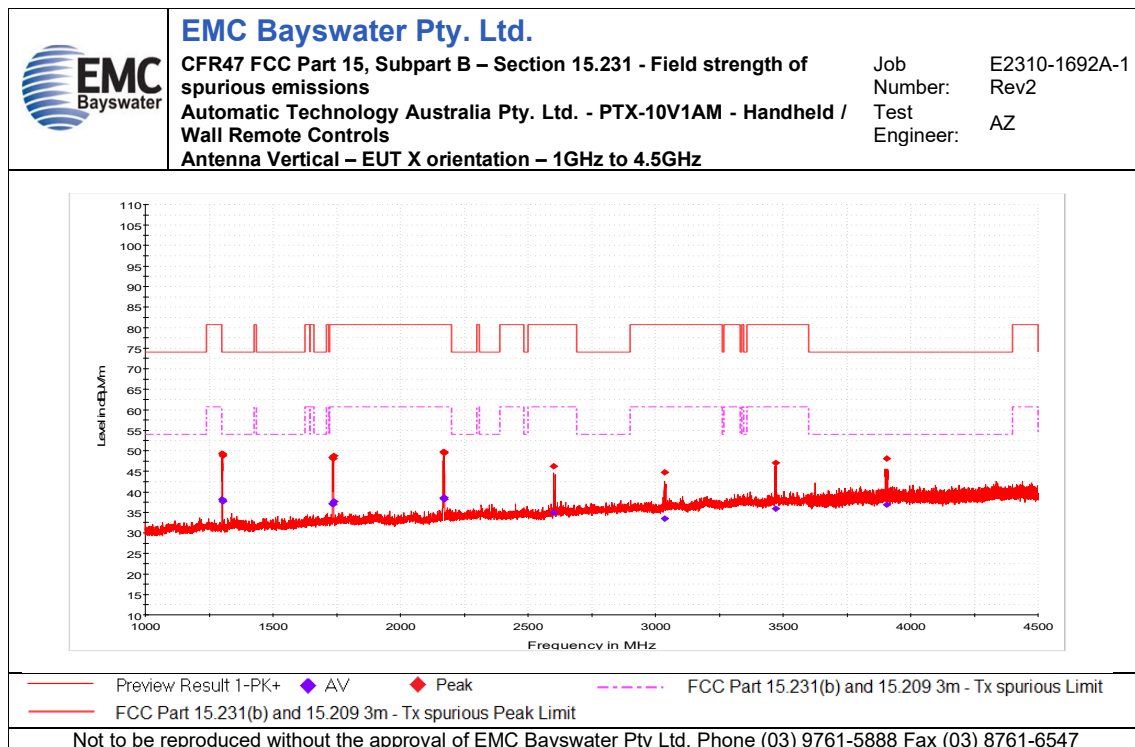


Graph 8

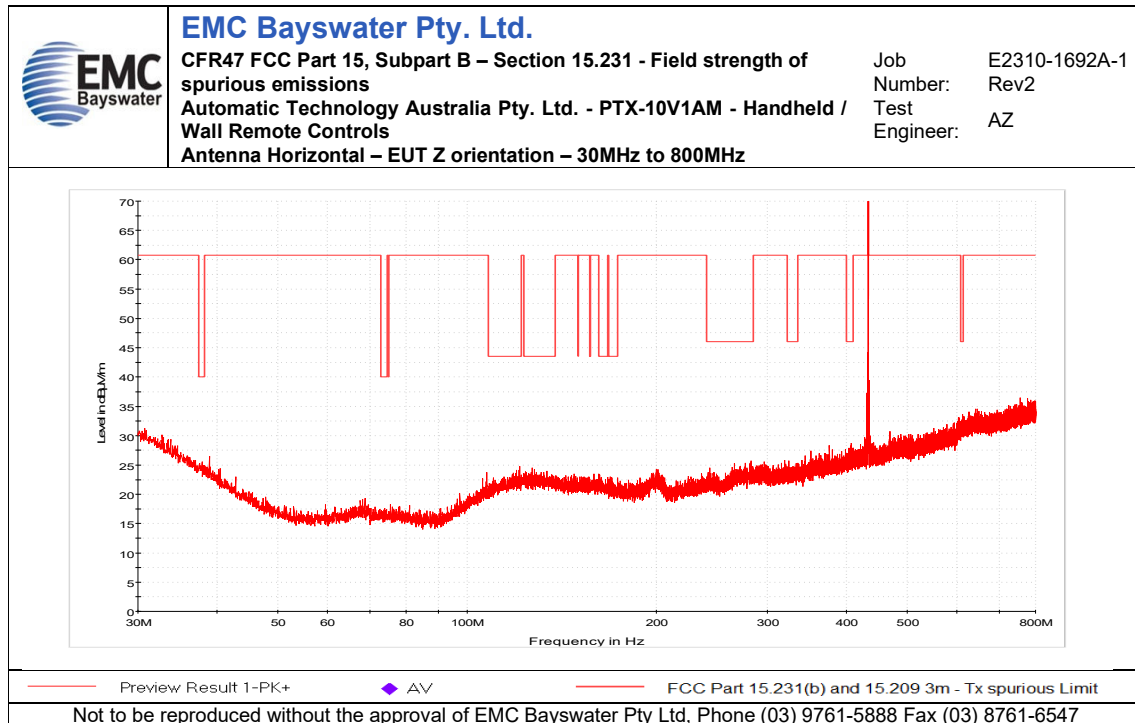


Graph 9

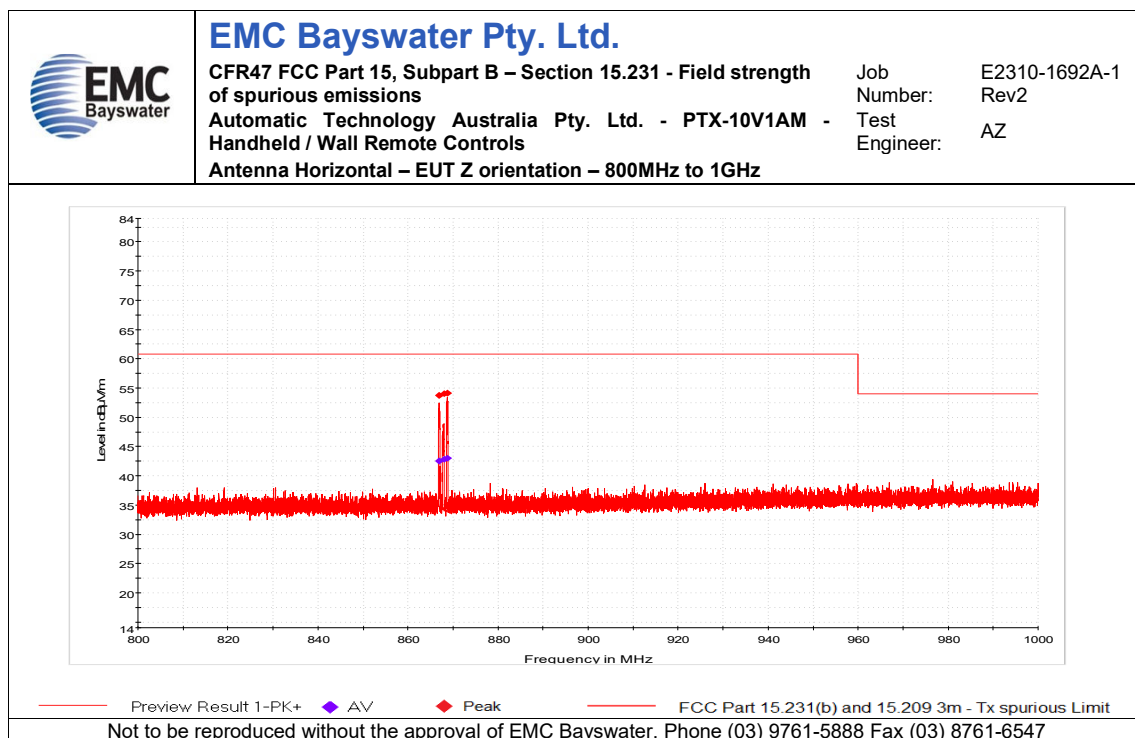


Graph 10

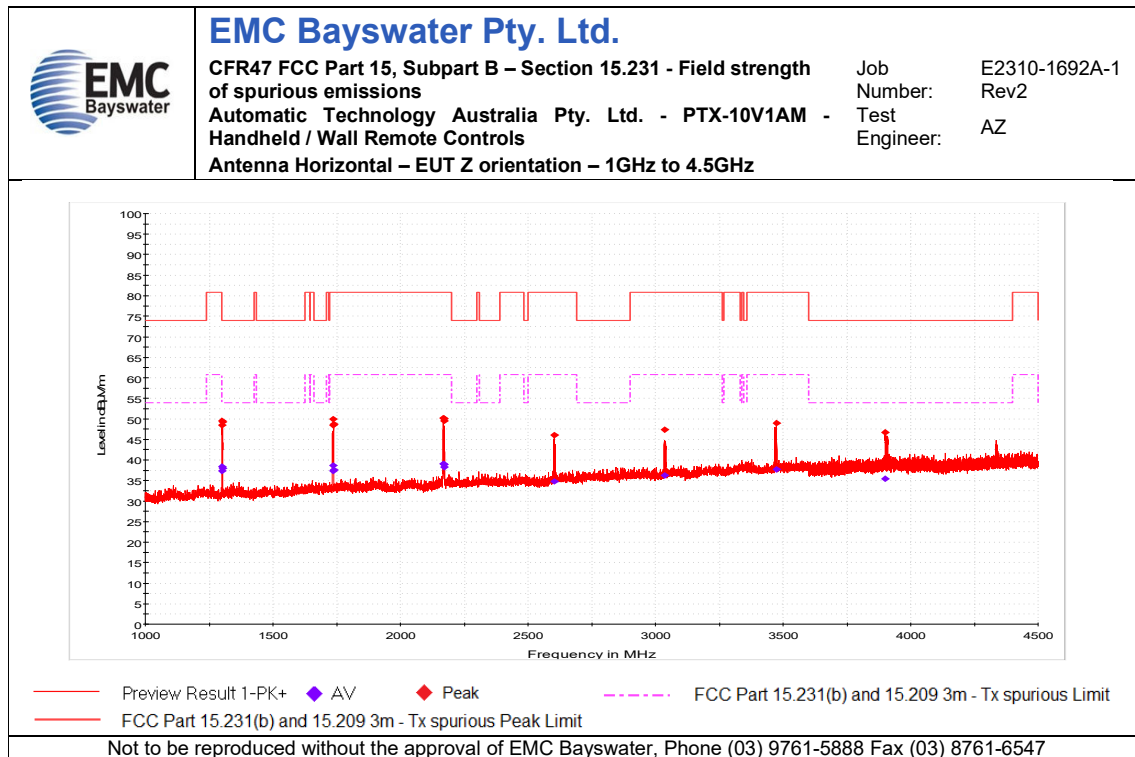


Graph 11

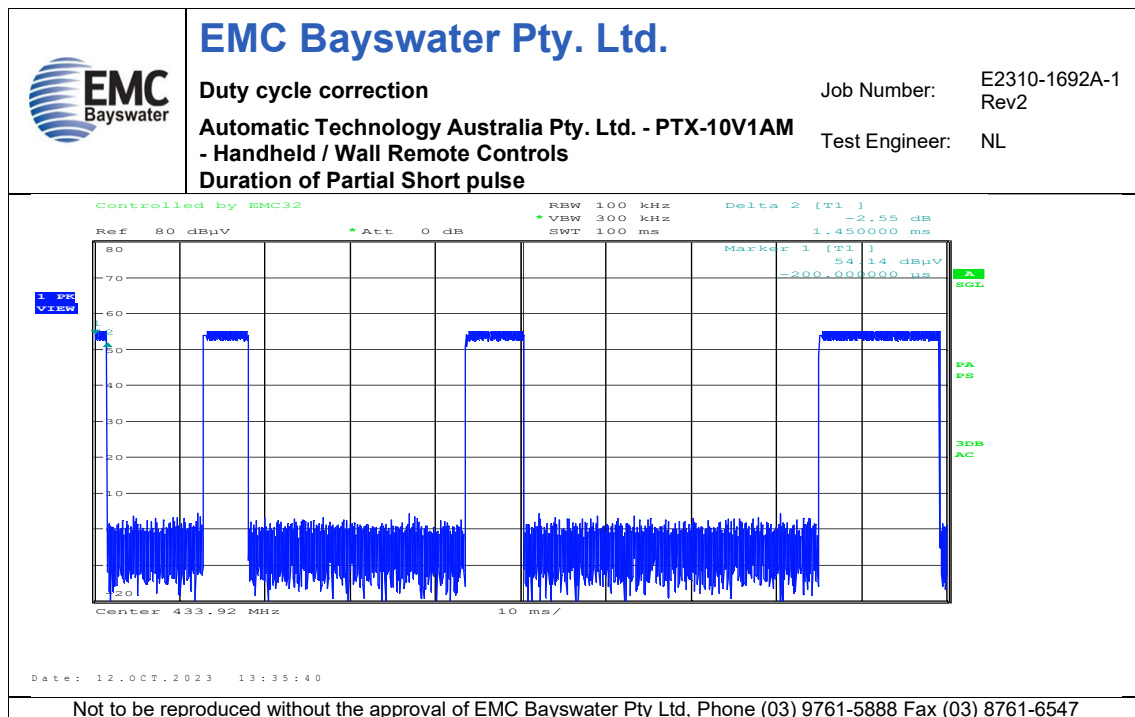


Graph 12

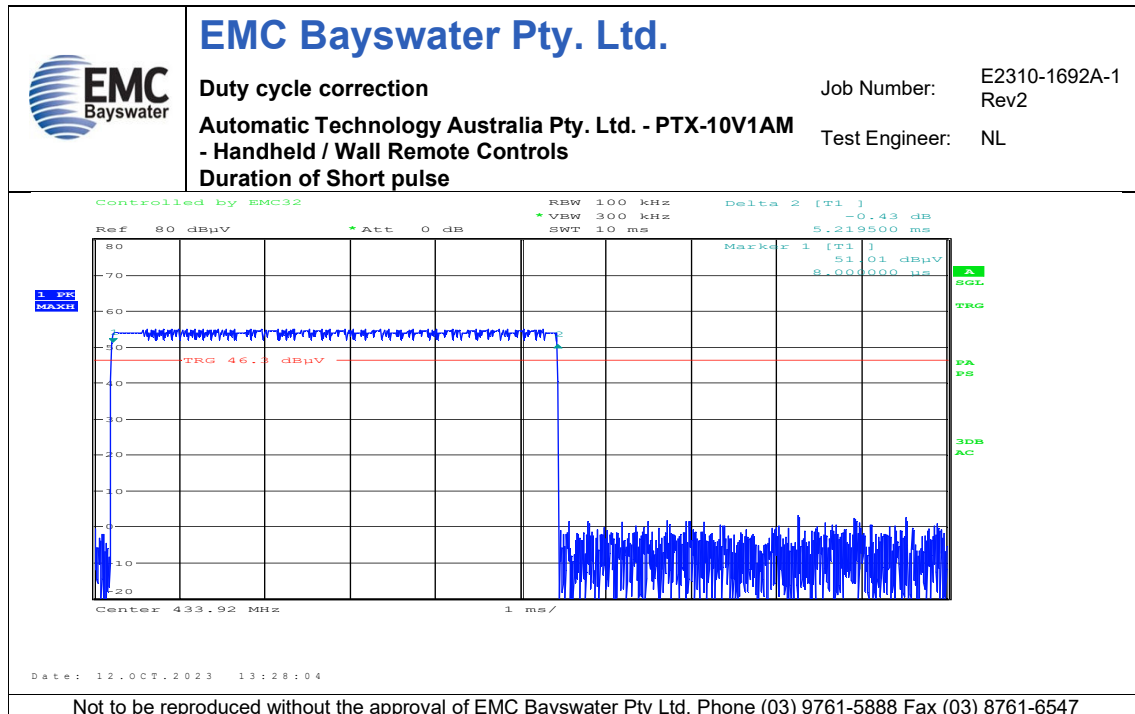


Graph 13

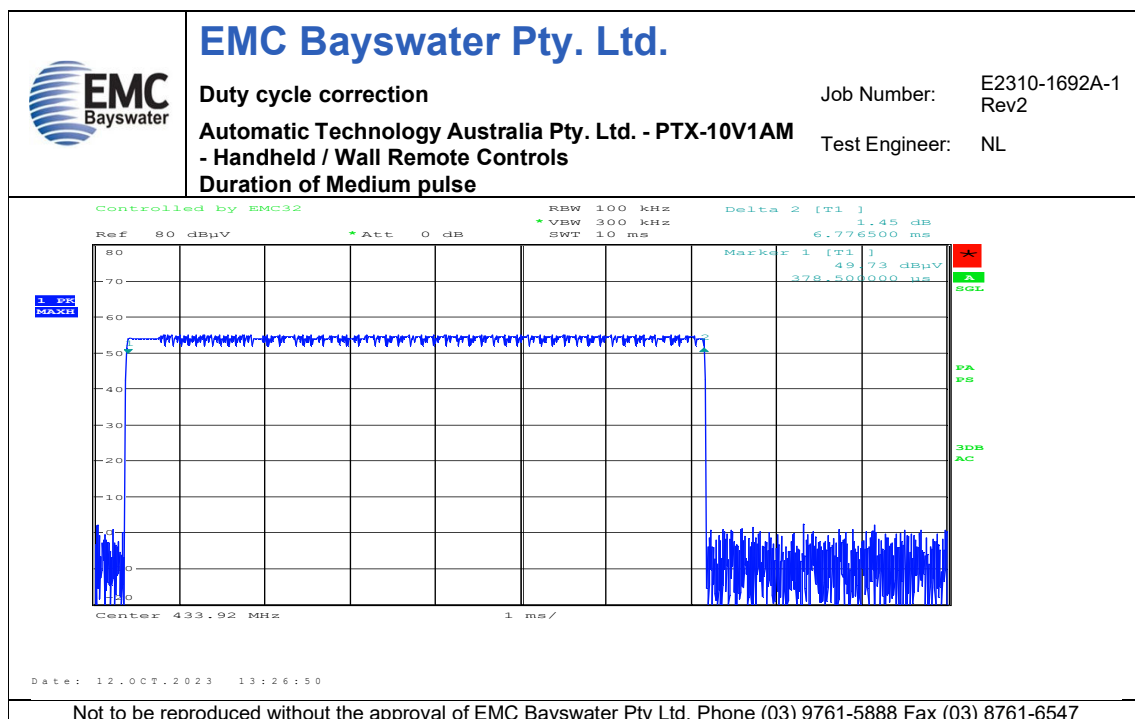


Graph 14

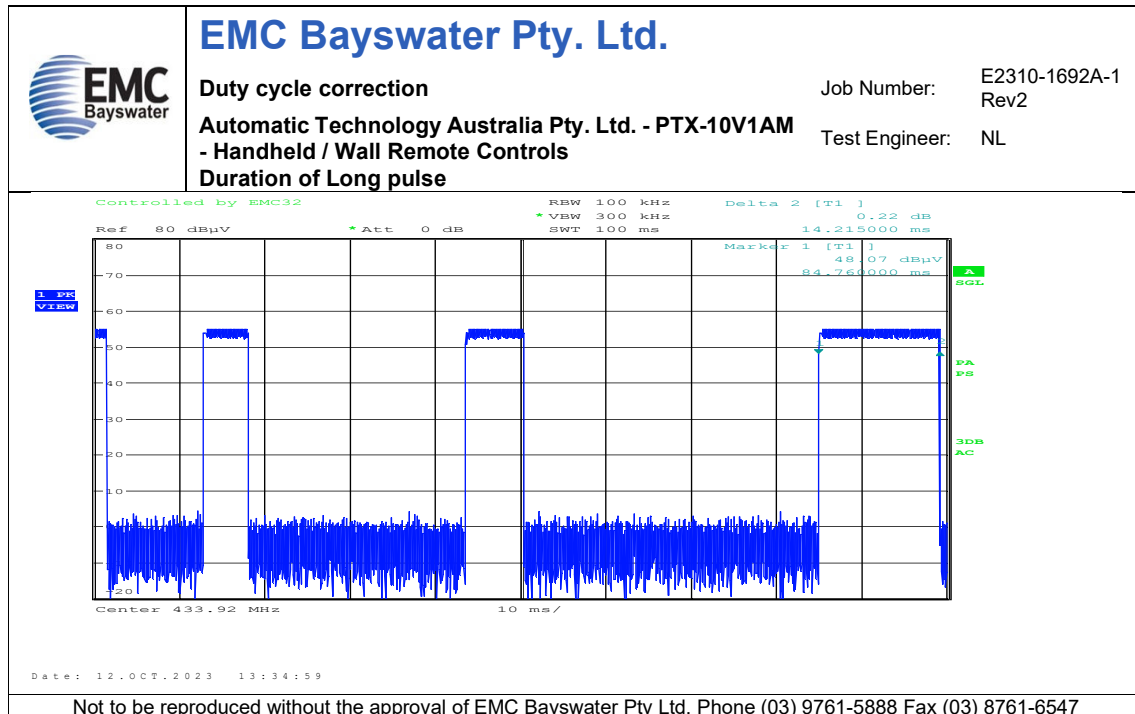

Graph 15

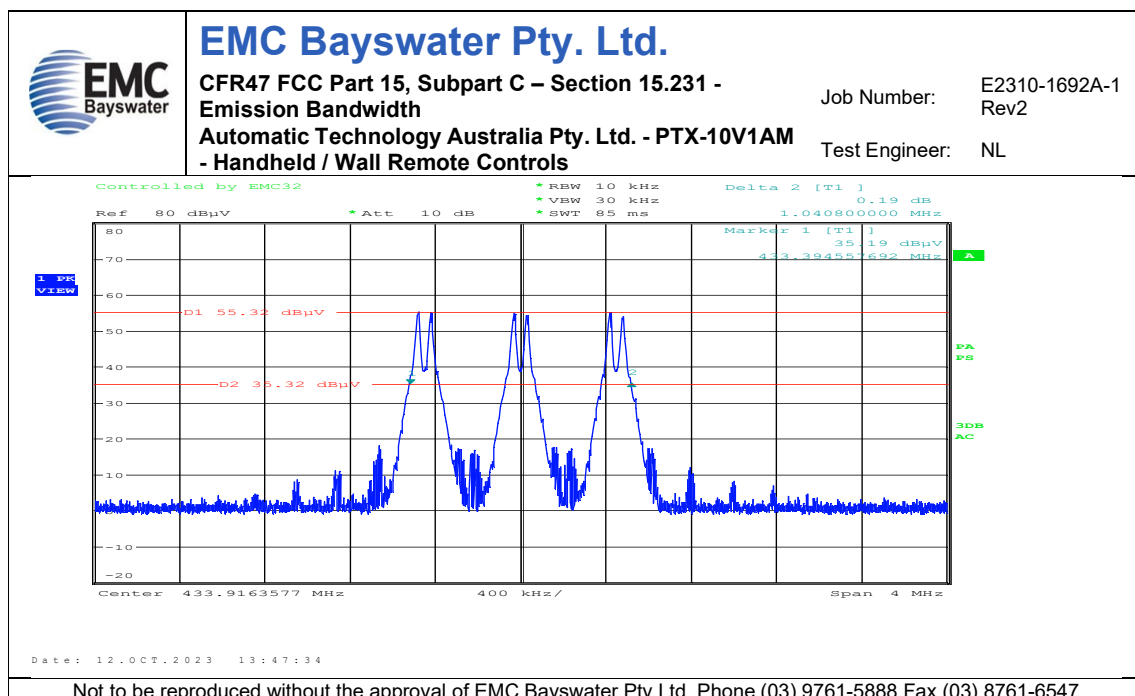

Graph 16

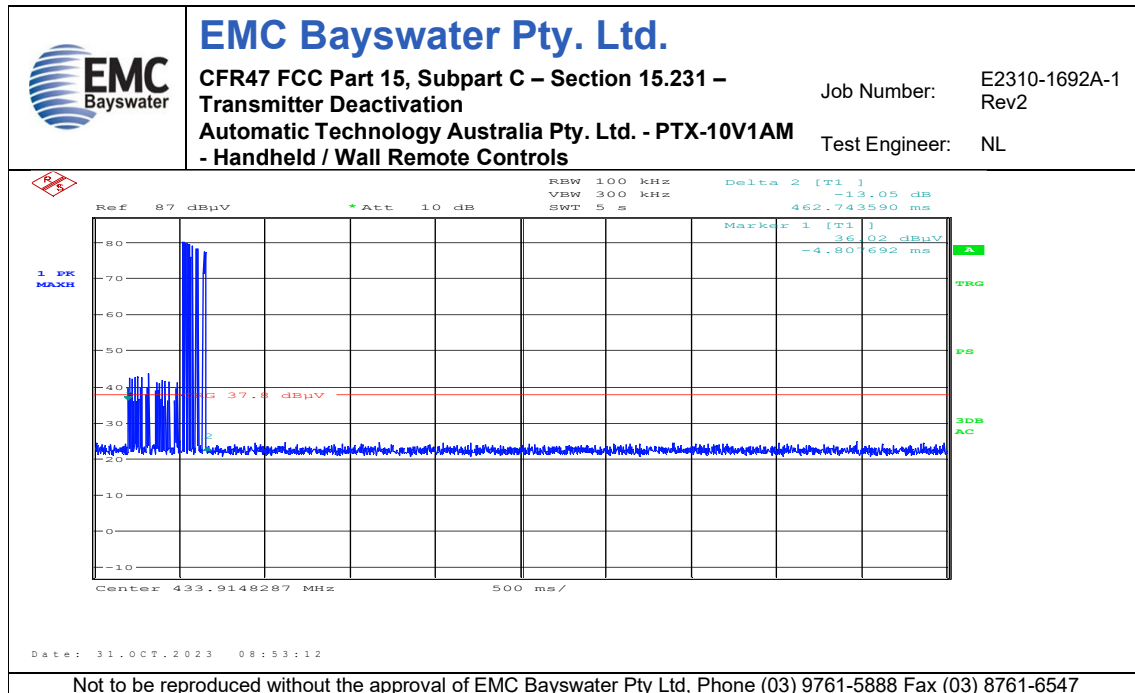

Graph 17

## Appendix D – Customer Declaration of Product Variant



Automatic Technology (Australia) Pty Ltd  
6-8 Fiveways Boulevard, Keysborough, VIC 3173  
T +61 3 9791 0200  
F +61 3 9791 0250  
[www.ata-aust.com.au](http://www.ata-aust.com.au)  
ABN : 11 007 125 328  
Date: 13/11/2023

### Declaration of Product Variations

We Automatic Technology (Australia) Pty Ltd  
of 6-8 Fiveways Boulevard, Keysborough, VIC 3173

hereby declare that:

Equipment Remote Control Transmitter  
Model number PTX-10V1AM

to be the worst-case variant used for EMC testing of a product range consisting of other variants along with the justification declared in the table below. Automatic Technology (Australia) Pty Ltd accepts all responsibility for any adverse effects with respect to the EMC performance of the variant products listed in the table with regards to the performance observed whilst testing the declared worst-case model.

| Model tested | Variants models | Justification                            |
|--------------|-----------------|------------------------------------------|
| PTX-10V1AM   | WTX-10V1AM      | The same hardware, different case        |
|              | PTX-10V1SM      | The same hardware, different case colour |
|              | WTX-10V1SM      | The same hardware, different case        |

Signed by:   
Name: Nikolai Klepikov  
Position: Senior Electronics Engineer  
Date signed: 13/11/2023

Automatic Technology Pty Ltd | 6-8 Fiveways Boulevard, Keysborough, Victoria, 3173 | P +61 (3) 9791 0200 | F +61 (3) 9791 0250  
[www.ata-aust.com.au](http://www.ata-aust.com.au) | ABN 11 007 125 368

GARAGE DOOR OPENERS | GATE OPENERS | REMOTE CONTROL ACCESS SOLUTIONS