

Astera LED Technology GmbH

TEST REPORT

SCOPE OF WORK

FCC TESTING-ART7-U

REPORT NUMBER

190603004SZN-001

ISSUE DATE

20 June 2019

[REVISED DATE]

[-----]

PAGES

58

DOCUMENT CONTROL NUMBER

FCC ID 247_b

© 2017 INTERTEK



Astera LED Technology Gmbh

Application
For
Certification

FCC ID: X55ART7-U

ART7

Model: ART7-U

Report No.: 190603004SZN-001

We hereby certify that the sample of the above item is considered to comply with the
requirements of FCC Part 15, Subpart C for Intentional Radiator,
mention 47 CFR [10-1-18]

Prepared and Checked by:




Sign on file

Robert Li

Technical Supervisor

Approved by:



Kidd Yang

Technical Supervisor

Date: 20 June 2019

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Measurement Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labeling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Confidentiality Request
<i>EXHIBIT 9:</i>	Miscellaneous Information
<i>EXHIBIT 10:</i>	Test Equipment List

MEASUREMENT/TECHNICAL REPORT**ART7****Model: ART7-U****FCC ID: X55ART7-U**This report concerns (check one) Original Grant ☒ Class II Change ☐Equipment Type: DSS - Part 15 Spread Spectrum TransmitterDeferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒If yes, defer until : _____
dateCompany Name agrees to notify the Commission by: _____
dateof the intended date of announcement of the product so that the grant can be issued on
that date.Transition Rules Request per 15.37? Yes ☐ No ☒If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-
18] Edition] provision.

Report prepared by:

Robert Li
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District,
Shenzhen, P.R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

Table of Contents

1.0	<u>General Description</u>	7
1.1	Product Description	7
1.2	Related Submittal(s) Grants.....	7
1.3	Test Methodology	7
1.4	Test Facility	7
2.0	<u>System Test Configuration</u>	9
2.1	Justification	9
2.2	EUT Exercising Software	9
2.3	Special Accessories.....	9
2.4	Measurement Uncertainty	9
2.5	Equipment Modification	10
2.6	Support Equipment List and Description	10
3.0	<u>Test Results</u>	12
3.1	Radiated Test Results	13
3.2	Conducted Emission at Mains Termina.....	20
3.3	Peak Power	23
3.4	20dB Bandwidth.....	26
3.5	Channel Number (Number of Hopping Frequencies)	28
3.6	Channel Separation (Carrier Frequency Separation)	29
3.7	Dwell Time (Time of Occupancy)	31
3.8	Band Edge	35
3.9	Transmitter Spurious Emissions (Conducted)	37
4.0	<u>Equipment Photographs</u>	42
5.0	<u>Product Labelling</u>	44
6.0	<u>Technical Specifications</u>	46
7.0	<u>Instruction Manual</u>	48
8.0	<u>Miscellaneous Information</u>	50
8.1	Discussion of Pulse Desensitization	51
8.2	Calculation of Average Factor.....	52
8.3	Emissions Test Procedures	53
9.0	<u>Confidentiality Request</u>	56
10.0	<u>Test Equipment List</u>	58

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

EXHIBIT 1

GENERAL DESCRIPTION

1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a UHF transmitter operating in 917~922.2MHz band. It contains two modules that have already been certified. One certified module is operating at 2.4GHz band and subjected to FCC ID: XRSCRMXTIMO101, another certified Bluetooth module is subjected to FCC ID: A8TBM77SPPSYC2A. The EUT is powered by a 3.6VDC rechargeable battery which can be charged via a micro USB cable by an AC/DC adapter with the input of AC100-240V, 50/60Hz, and output of DC 5.0V, 1.5A. The EUT also has a 3.5" socket which can be used to connect to DMX controllers via an adapter cable that is 3.5" jack to 5-pin XLR male. When DMX port connected, the UHF transmitter will stop transmitting. When DMX port is disconnected, the UHF transmitter and Bluetooth can be transmitted Simultaneously.

Type of Modulation: GFSK
Antenna Type: Integral Antenna
Antenna Gain: 3.0 dBi

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for ART7 operating at 917-922.2MHz.

Remaining portions are subject to the following procedures:

The Bluetooth modular had been certified and subjected to FCC ID: A8TBM77SPPSYC2A.

The 2.4GHz modular had been certified and subjected to the FCC ID: XRSCRMXTIMO101

Other Digital Function: Subject to FCC Part 15B SDOC.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements was performed according to the procedures in ANSI C63.10: 2013. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

EXHIBIT 2

SYSTEM TEST CONFIGURATION

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10: 2013.

The EUT was powered by a rechargeable battery (DC 3.6V, 6700mAh) which was charged by AC 120V/60Hz during the test. Test modes are as below:

Configuration	Description
Mode 1	UHF transmitting
Mode 2	Simultaneous transmission (UHF and Bluetooth)
Mode 3	Simultaneous transmission (Bluetooth and 2.4GHz transmitter)

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Special Accessories

No special accessory attached.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

2.5 Equipment Modification

Any modifications installed previous to testing by Astera LED Technology GmbH will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

2.6 Support Equipment List and Description

This product was tested in the following configuration:

Description	Manufacturer	Model No.
USB Charging Adapter	Powertron Electronics Corp.	Model: PS1006-050SIB150 Input: AC 100~240V, 50-60Hz, 0.3A Output: 5Vdc, 1.5A, 7.5W Max
USB Charging Cable	(provided by applicant)	Unshielded, 110cm
DMX Cable	provided by applicant	Unshielded, 32cm
DMX controller	provided by applicant	DMX-100
DMX AC/DC adapter	provided by applicant	Model: 3003 Input: AC 88-256V, 0.5A, 50/60Hz Output: DC 9.0V, 1.0A

EXHIBIT 3

TEST RESULTS

3.0 Test Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \text{ } \mu\text{V/m}$$

3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

3.1.3 Radiated Emissions- FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Simultaneous transmission had been considered during the test.

Worst Case Radiated Emission

at 950.045 MHz

Judgement: Passed by 9.9 dB

TEST PERSONNEL:

Sign on file

Robert Li, Technical Supervisor
Typed/Printed Name

10 June 2019
Date

Applicant: Astera LED Technology GmbH
Worst Case Model: ART7-U
Worst Case Operating Mode: Mode 1

Date of Test: 10 June 2019

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	185.685	41.1	20.0	10.3	31.4	43.5	-12.1
Horizontal	215.755	34.5	20.0	12.0	26.5	43.5	-17.0
Horizontal	950.045	39.1	20.0	17.0	36.1	46.0	-9.9
Vertical	36.790	33.9	20.0	8.6	22.5	40.0	-17.5
Vertical	60.070	28.9	20.0	10.2	19.1	40.0	-20.9
Vertical	850.620	25.7	20.0	27.6	33.3	46.0	-12.7

- NOTES:
1. Quasi-Peak detector is used for frequency below 1GHz.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. All emissions are below the QP limit.

3.1.4 Transmitter Spurious Emissions (Radiated) - FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
1839.2 MHz

Judgement: Passed by 1.8 dB

TEST PERSONNEL:

Sign on file

Robert Li, Technical Supervisor
Typed/Printed Name

10 June 2019
Date

Applicant: Astera LED Technology GmbH

Date of Test: 10 June 2019

Worst Case Model: ART7-U

Worst Case Operating Mode: Mode 1 (Channel 0-917.00MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**917.000	90.0	36.7	28.5	81.8	--	--
Horizontal	*1834.000	75.7	36.5	26.5	65.7	74.0	-8.3
Horizontal	*2751.000	42.8	35.6	39.5	46.7	74.0	-27.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**917.000	90.0	36.7	28.5	13.9	67.9	--	--
Horizontal	*1834.000	75.7	36.5	26.5	13.9	51.8	54.0	-2.2
Horizontal	*2751.000	42.8	35.6	39.5	13.9	32.8	54.0	-21.2

- NOTES:
1. Peak detector data unless otherwise stated.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- ** Fundamental emission was measured for determining band-edge compliance of using delta measurement technique.

Applicant: Astera LED Technology GmbH

Date of Test: 10 June 2019

Worst Case Model: ART7-U

Worst Case Operating Mode: Mode 1 (Channel 26-919.60MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*1839.200	63.1	36.5	39.5	66.1	74.0	-7.9
Horizontal	*2758.800	43.2	35.6	39.5	47.1	74.0	-26.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*1839.200	63.1	36.5	39.5	13.9	52.2	54.0	-1.8
Horizontal	*2758.800	43.2	35.6	39.5	13.9	33.2	54.0	-20.8

- NOTES:
1. Peak detector data unless otherwise stated.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Astera LED Technology GmbH

Date of Test: 10 June 2019

Worst Case Model: ART7-U

Worst Case Operating Mode: Mode 1 (Channel 52-922.20MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**922.200	89.8	36.7	28.5	81.6	--	--
Horizontal	*1844.400	62.5	36.5	39.5	65.5	74.0	-8.5
Horizontal	*2766.600	43.0	35.6	39.5	46.9	74.0	-27.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**922.200	89.8	36.7	28.5	13.9	67.7	--	--
Horizontal	*1844.400	62.5	36.5	39.5	13.9	51.6	54.0	-2.4
Horizontal	*2766.600	43.0	35.6	39.5	13.9	33.0	54.0	-21.0

- NOTES:
1. Peak detector data unless otherwise stated.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- ** Fundamental emission was measured for determining band-edge compliance of using delta measurement technique.

3.2 Conducted Emission at Mains Terminal

3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

3.2.2 Conducted Emissions

Worst Case Conducted Configuration
at
0.15 MHz

Judgement: Passed by 9.2 dB

TEST PERSONNEL:

Sign on file

Robert Li, Technical Supervisor
Typed/Printed Name

10 June 2019
Date

Applicant: Astera LED Technology GmbH


Date of Test: 10 June 2019

Worst Case Model: ART7-U

Worst Case Operating Mode: Mode 1(Channel 0-917.00MHz)

Conducted Emission Test – FCC

Pursuant to 15.207 Emissions Requirement

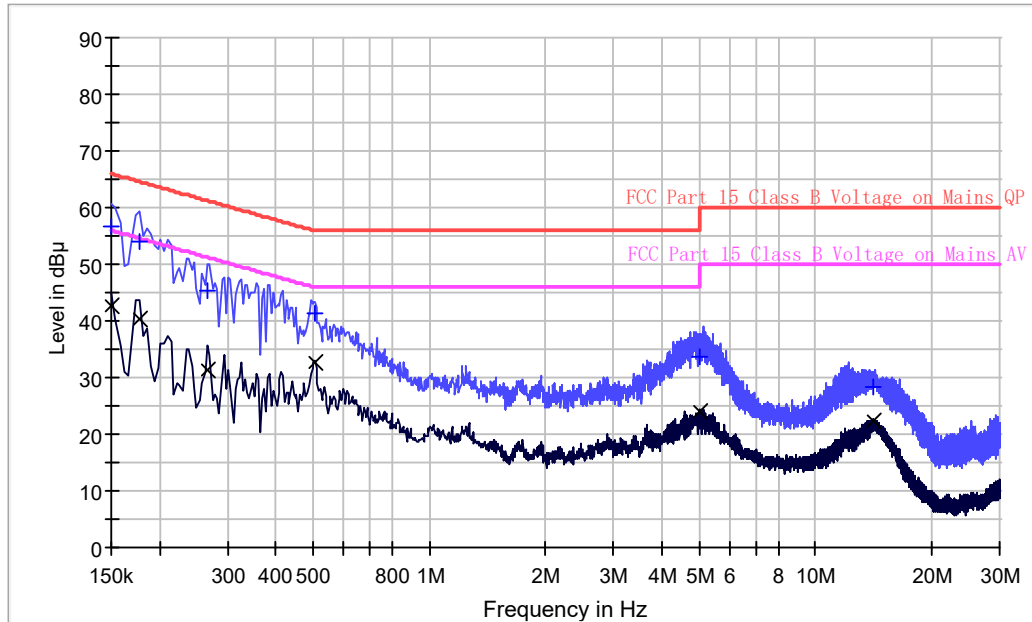

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	56.8	9.000	L1	9.6	9.2	66.0
0.178000	54.1	9.000	L1	9.7	10.5	64.6
0.266000	45.3	9.000	L1	9.7	15.9	61.2
0.506000	41.4	9.000	L1	9.7	14.6	56.0
5.006000	33.6	9.000	L1	9.8	26.4	60.0
14.074000	28.3	9.000	L1	10.0	31.7	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	42.6	9.000	L1	9.6	13.4	56.0
0.178000	40.2	9.000	L1	9.7	14.4	54.6
0.266000	31.4	9.000	L1	9.7	19.8	51.2
0.506000	32.7	9.000	L1	9.7	13.3	46.0
5.006000	24.1	9.000	L1	9.8	25.9	50.0
14.074000	22.5	9.000	L1	10.0	27.5	50.0

Applicant: Astera LED Technology GmbH


Date of Test: 10 June 2019

Worst Case Model: ART7-U

Worst Case Operating Mode: Mode 1(Channel 0-917.00MHz)

Conducted Emission Test – FCC

Pursuant to 15.207 Emissions Requirement

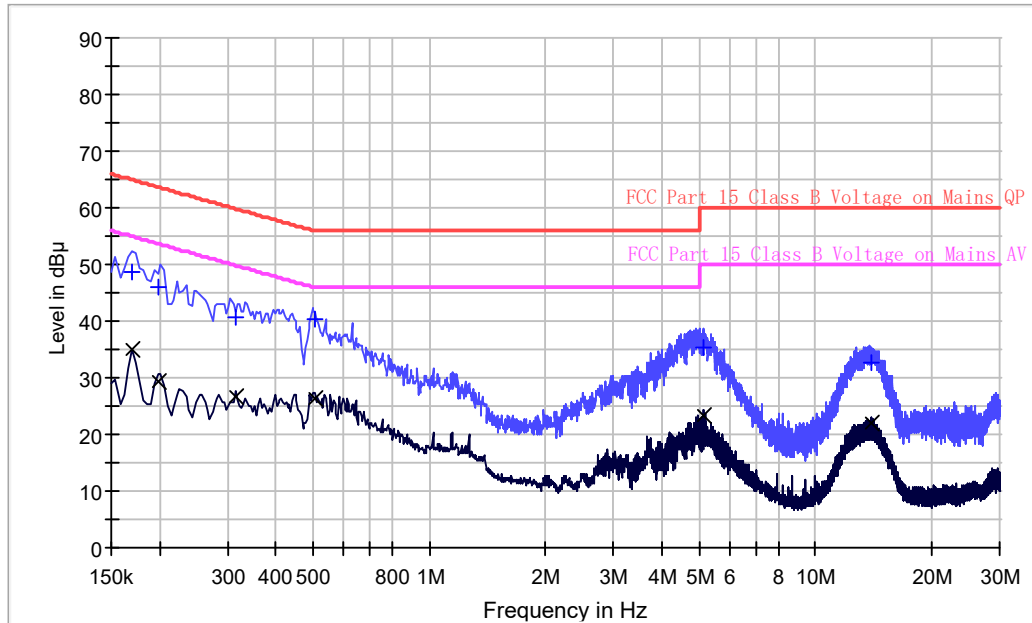

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.170000	48.8	9.000	N	9.6	16.2	65.0
0.198000	46.0	9.000	N	9.7	17.7	63.7
0.314000	40.7	9.000	N	9.7	19.2	59.9
0.506000	40.2	9.000	N	9.7	15.8	56.0
5.154000	35.3	9.000	N	9.8	24.7	60.0
14.030000	32.6	9.000	N	10.0	27.4	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.170000	35.0	9.000	N	9.6	20.0	55.0
0.198000	29.4	9.000	N	9.7	24.3	53.7
0.314000	26.8	9.000	N	9.7	23.1	49.9
0.506000	26.5	9.000	N	9.7	19.5	46.0
5.154000	23.4	9.000	N	9.8	26.6	50.0
14.030000	22.1	9.000	N	10.0	27.9	50.0

3.3 Peak Power

Maximum Conducted Output Power at Antenna Terminals, FCC Rules
15.247(b)(2).

The antenna port of the EUT was connected to the input of a spectrum analyzer.
The analyzer was set for RBW > 20dB bandwidth and power was read directly in
dBm.


For frequency hopping systems operating in the 902–928 MHz band: 1 watt
for systems employing at least 50 hopping channels.

Antenna Gain = 3dBi			
Modulation Type	Frequency (MHz)	Output Power (Peak Reading) (dBm)	Output Power (mW)
GFSK	917.00	12.90	19.50
	919.60	12.93	19.63
	922.20	12.95	19.72


Please refer to the below plots.

Modulation Type: GFSK


CH00 917.00 MHz

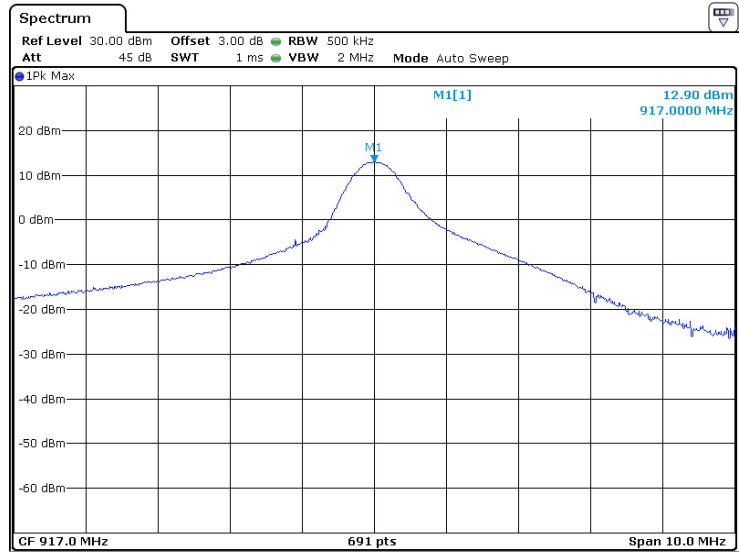

CH26 919.60 MHz

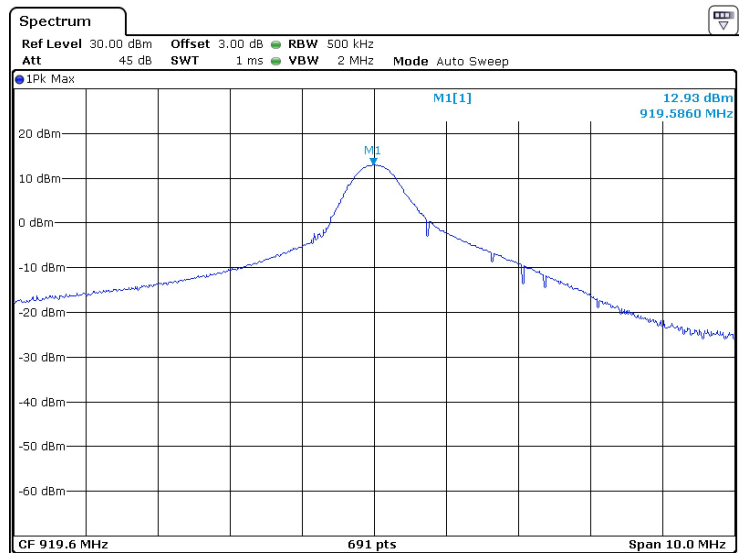

CH52 922.20 MHz

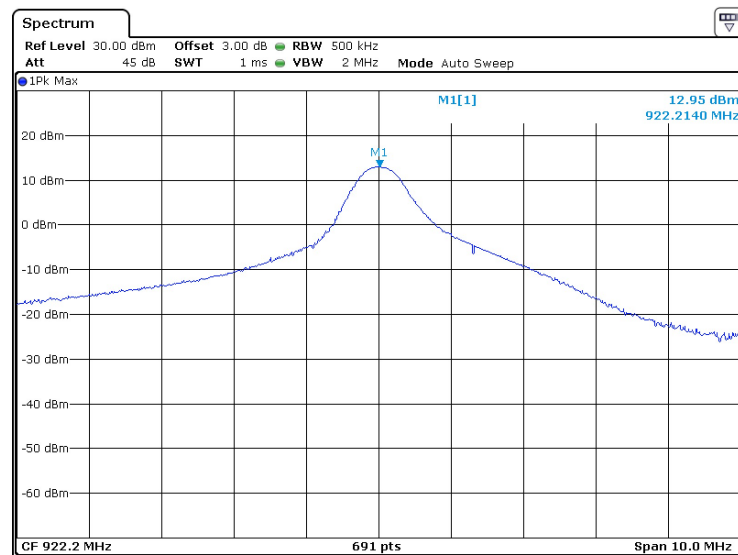

3.4 20dB Bandwidth


Maximum 20dB RF Bandwidth, FCC Rule 15.247(a) (1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.


Frequency (MHz)	20 dB Bandwidth (kHz)	Limit (KHz)
917.00	83.9	500
919.60	83.9	500
922.20	85.4	500

Modulation Type: GFSK


CHO 917.00 MHz

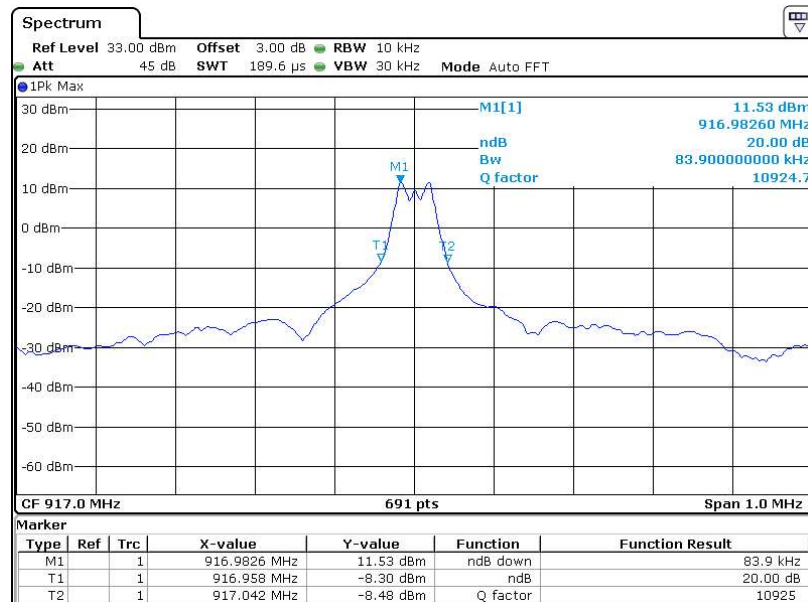

CH26 919.60MHz

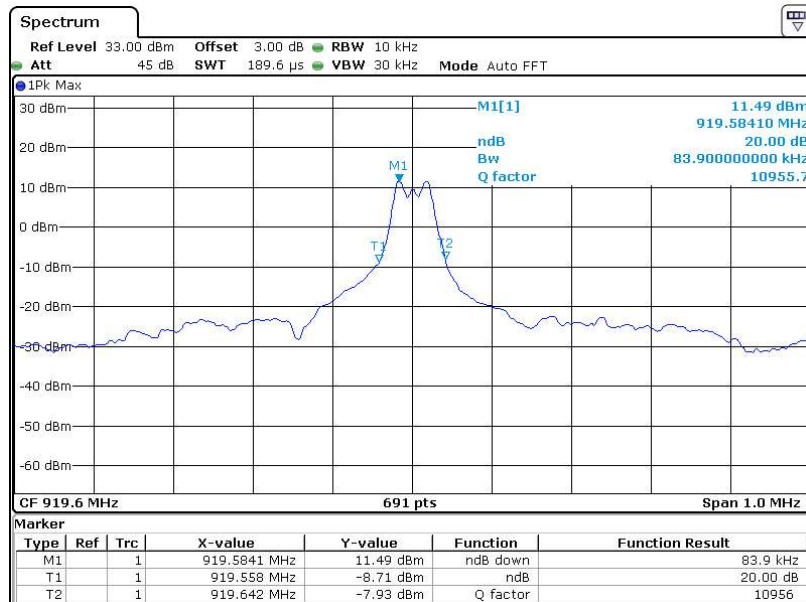

CH52 922.20MHz

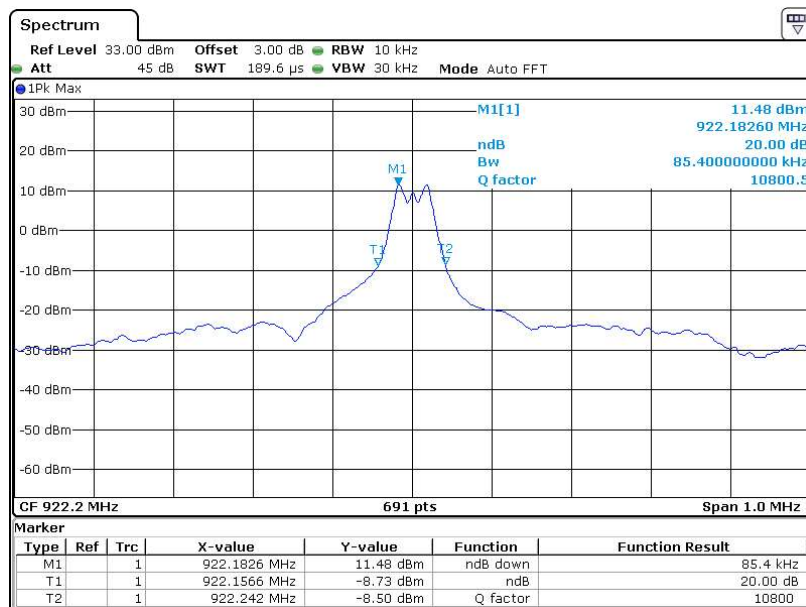

3.5 Channel Number (Number of Hopping Frequencies)

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a) (1) (iii):


The RF passband of the EUT was divided into 3 approximately equal bands. With the analyzer set to MAX HOLD readings were taken for 2-3 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

Note: For frequency hopping systems operating in the 902–928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.


Number of hopping channels =	53
------------------------------	----

Modulation Type: GFSK

CH00-CH26

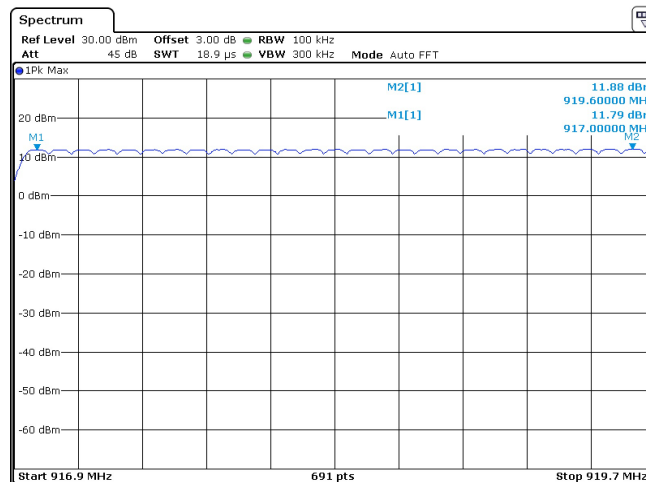

CH27-CH52

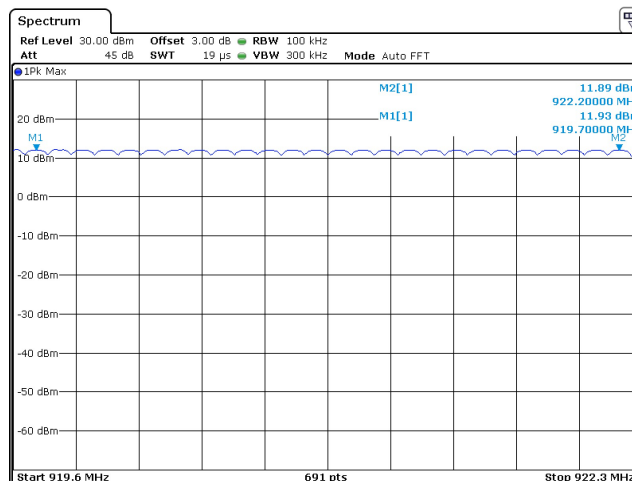

3.6 Channel Separation (Carrier Frequency Separation)

Minimum Hopping Channel Carrier Frequency Separation, FCC Ref: 15.247(a)(1):


Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and compared against the limit:

Not less than 20dB bandwidth: 85.4kHz


Channel	Channel Separation (KHz)	Limit (KHz)
Low	100.140	85.4
Mid	100.140	85.4
High	100.140	85.4

Modulation Type: GFSK


CH0 917.00 MHz

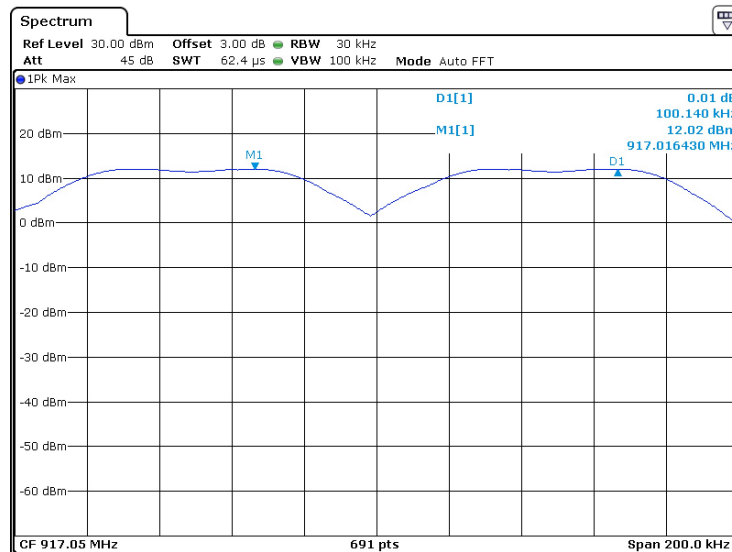

CH26 919.60MHz

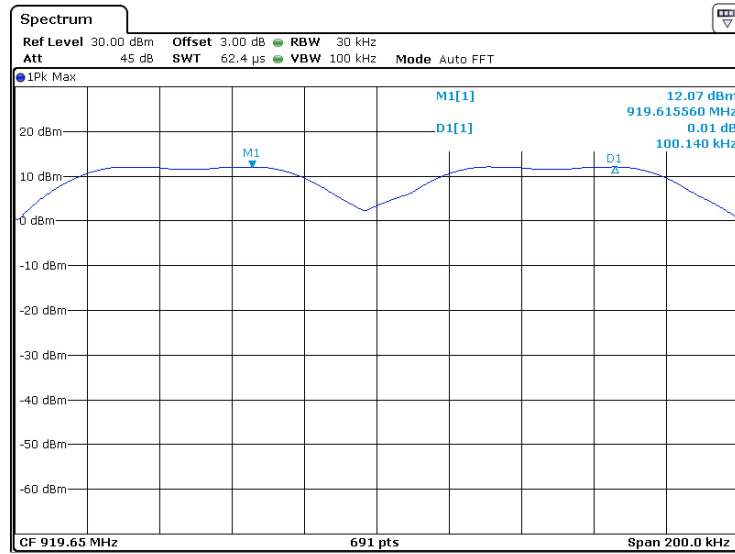

CH52 922.20MHz

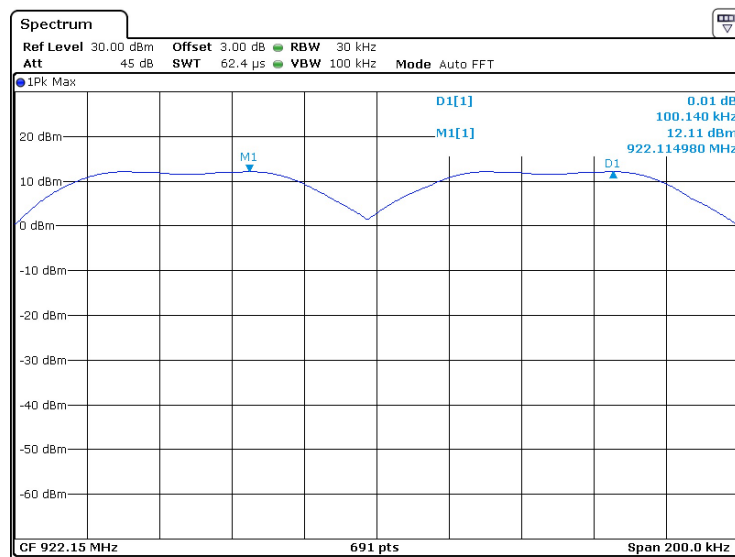

3.7 Dwell Time (Time of Occupancy)

Average Channel Occupancy Time, FCC Ref: 15.247(a)(1)(i):


The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 20s, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmissions so captured was measured with the MARKER DELTA function.

Note: For frequency hopping systems operating in the 902–928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.


Frequency (MHz)	Dwell time Per Hop (s)	Number of hopping channels in 20s	Dwell time (s)	Limit (s)
917.00	0.02029	14	0.284	0.4
919.60	0.02029	14	0.284	0.4
922.20	0.02029	14	0.284	0.4

Modulation Type: GFSK


CH0 917.00 MHz

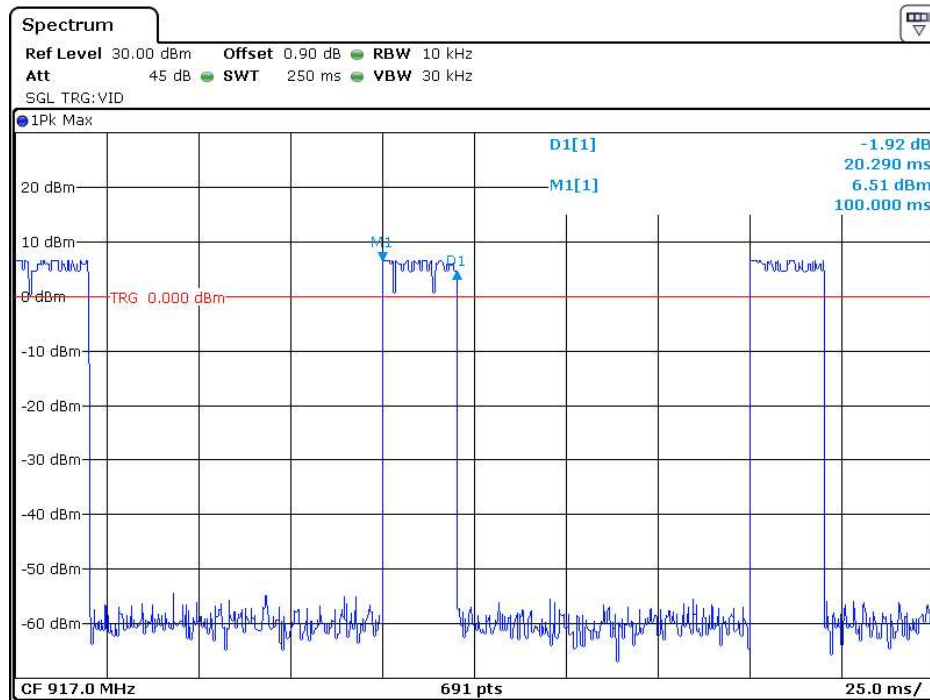


The number of hopping channels in 20s:

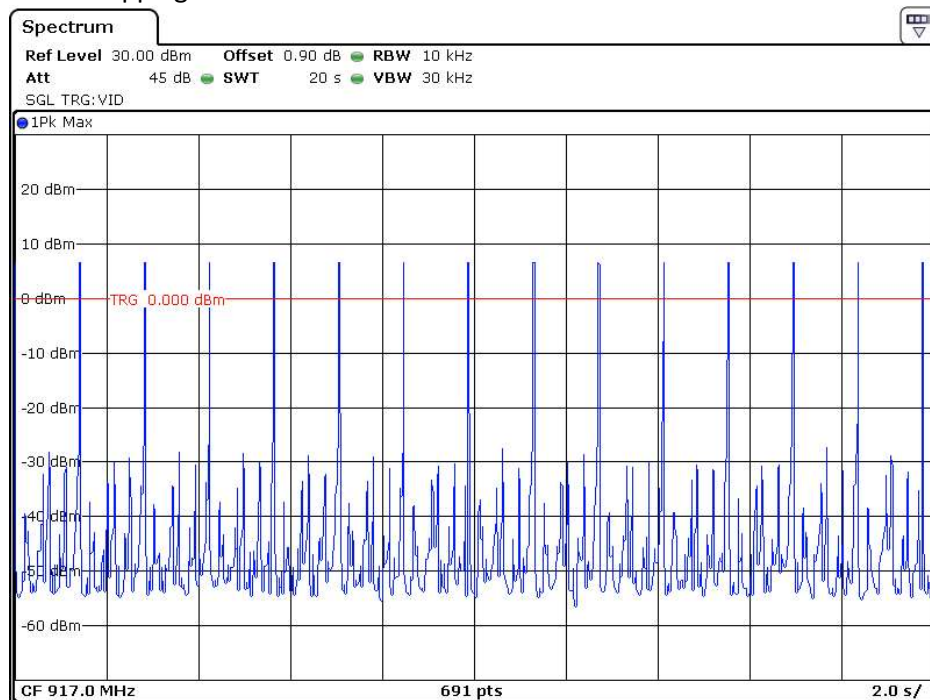


CH26 919.60MHz

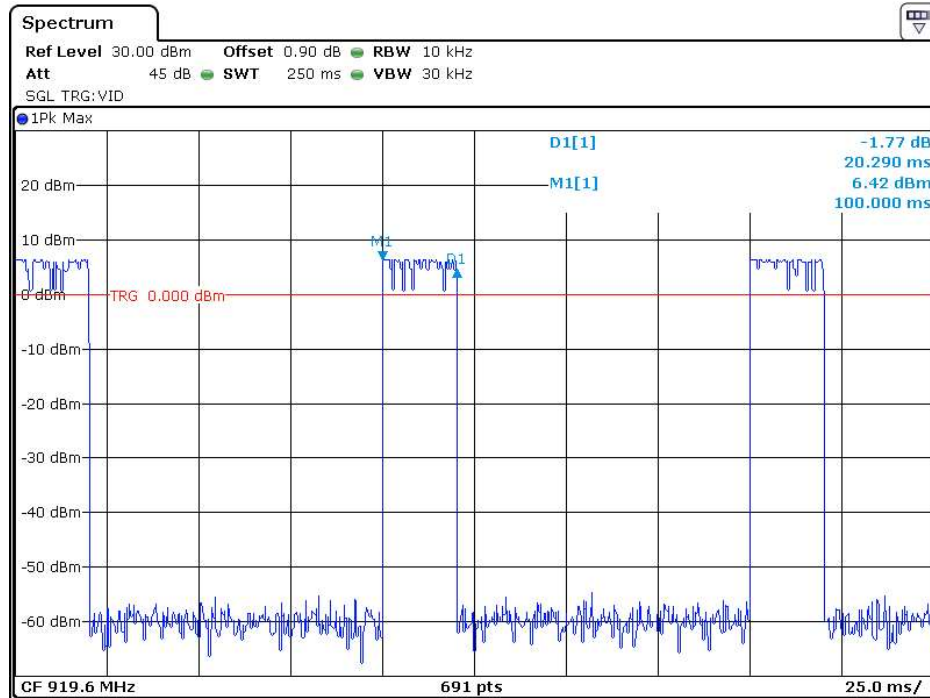


The number of hopping channels in 20s:

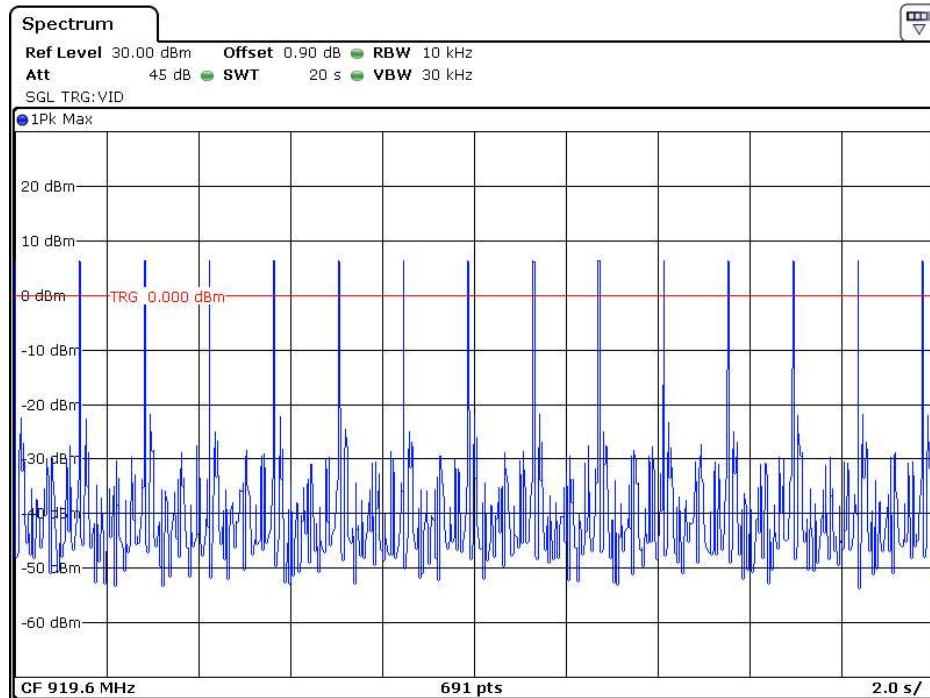

CH52 922.20MHz

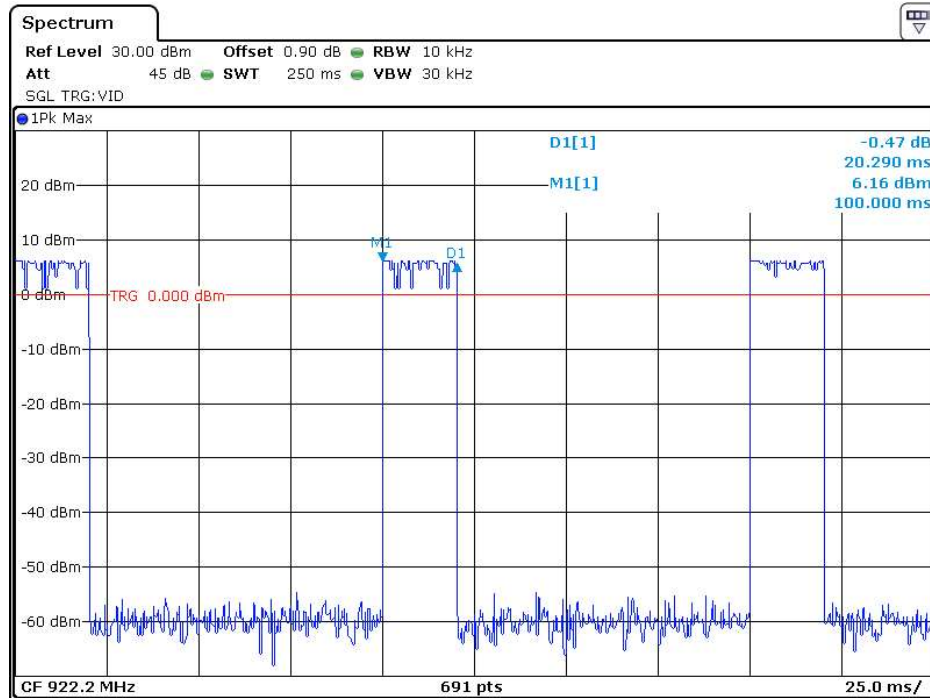

The number of hopping channels in 20s:

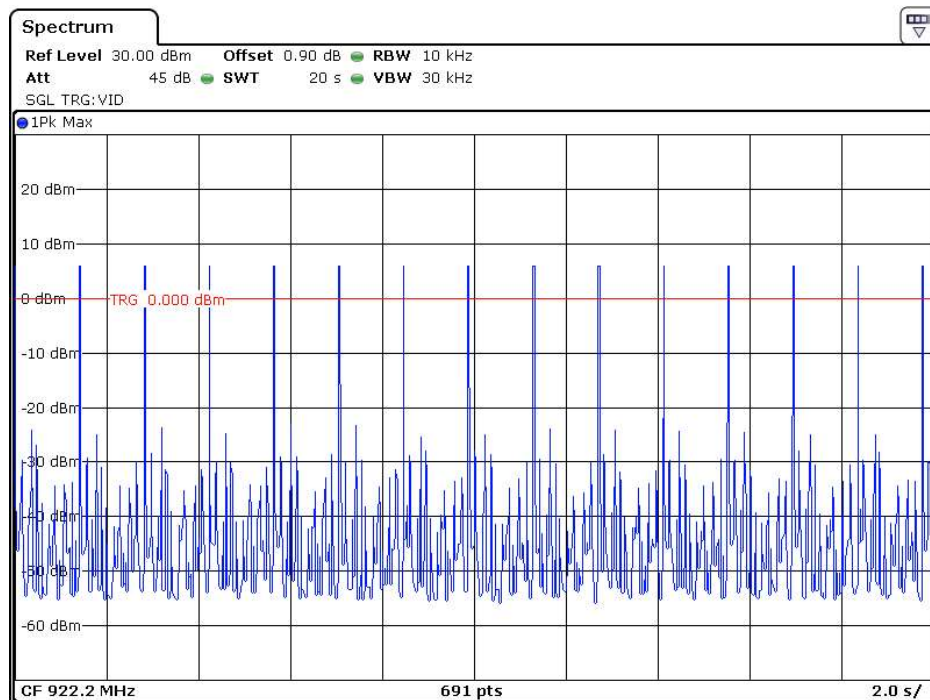


3.8 Band Edge

Out of Band Conducted Emissions, FCC Rule 15.247(d):


In any 100 KHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

Transmit on Single Channel



CH0 917.00 MHz

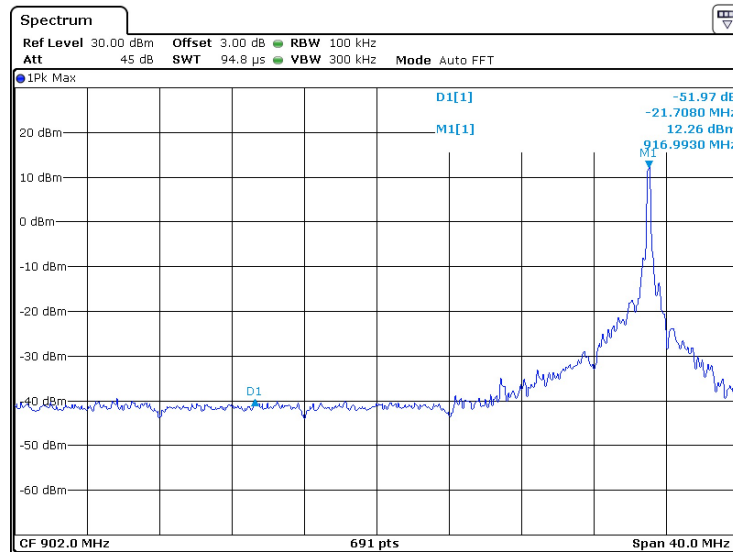

CH52 922.20MHz

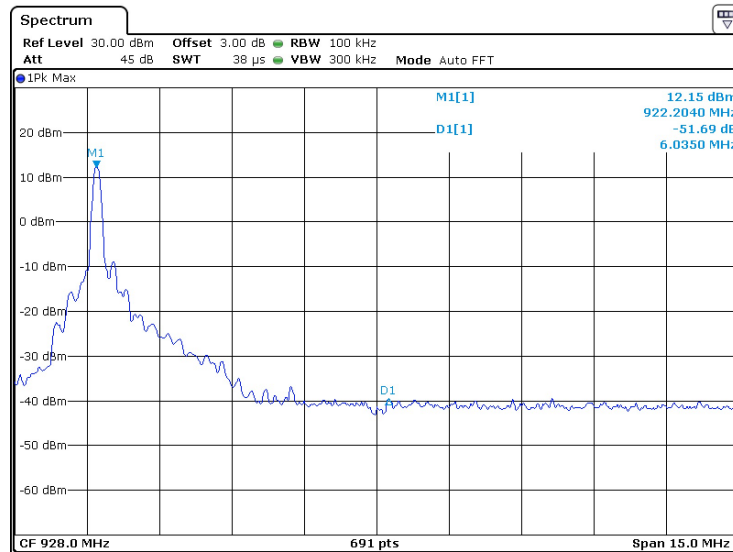

Hopping mode

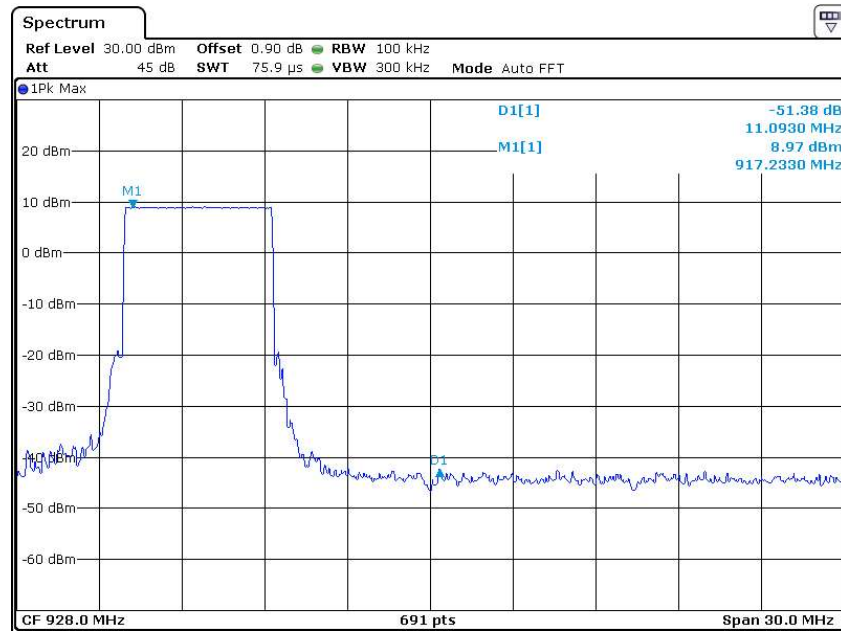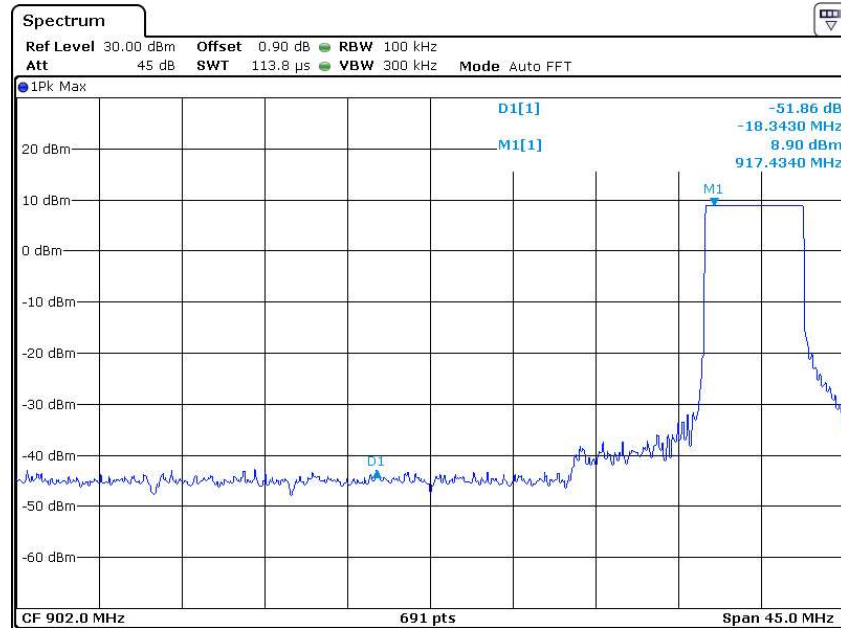



3.9 Transmitter Spurious Emissions (Conducted)

Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):



All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

Modulation Type: GFSK

CH0 917.00 MHz

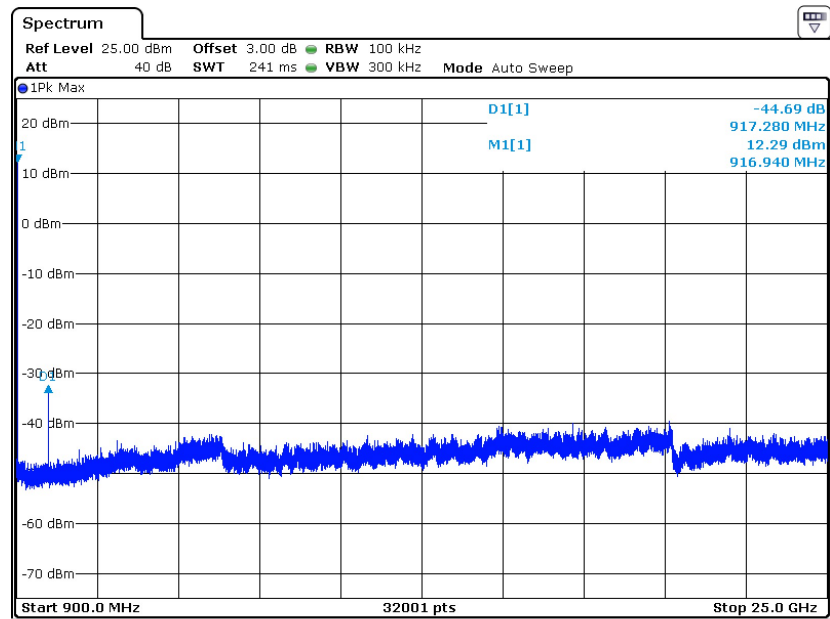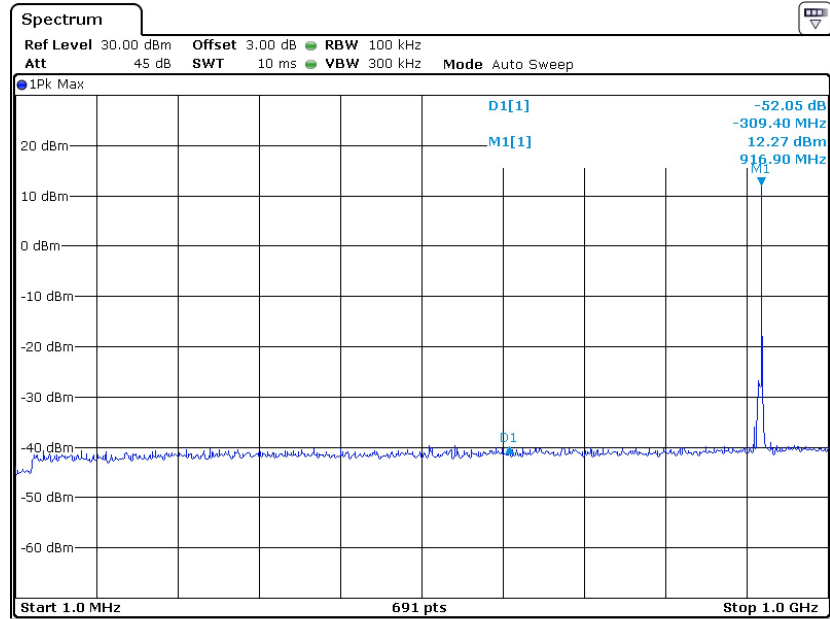

CH26 919.60MHz

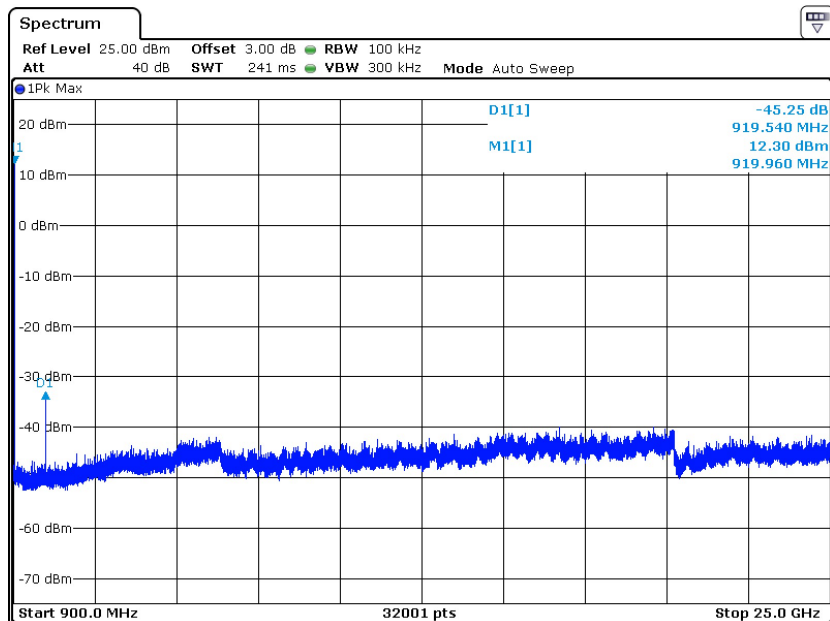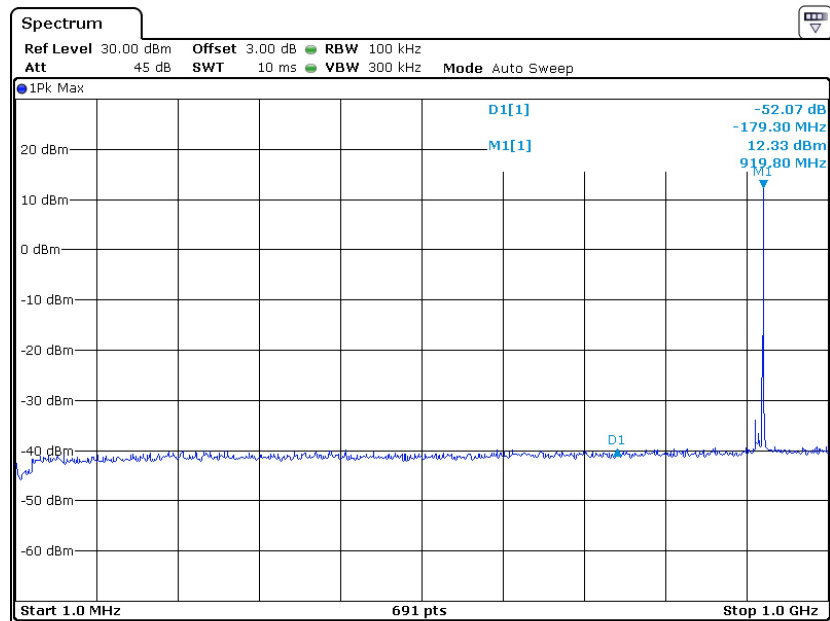

CH52 922.20MHz

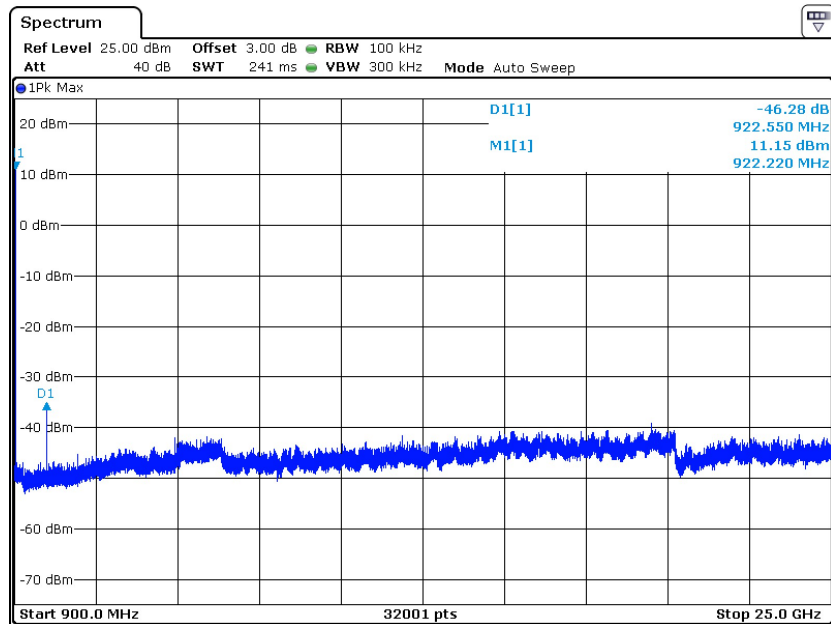
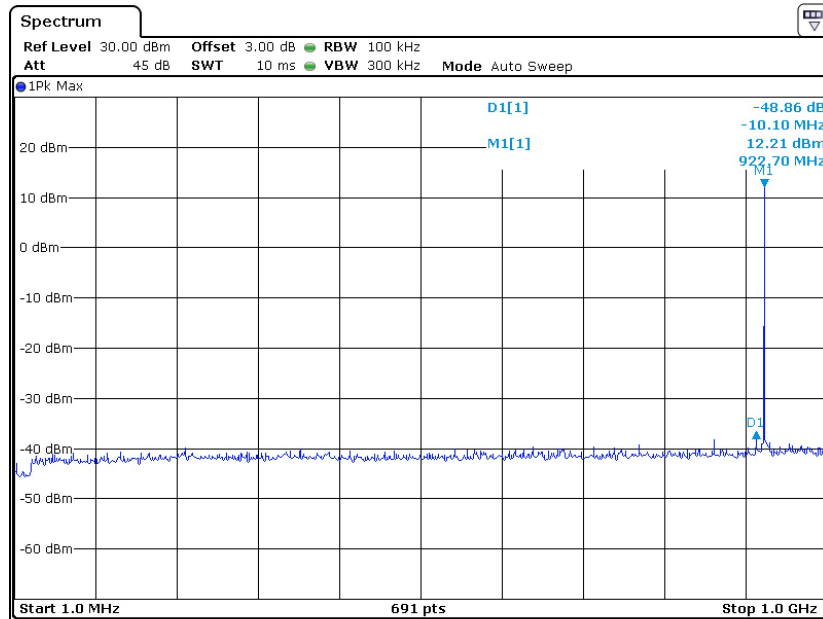


EXHIBIT 4

EQUIPMENT PHOTOGRAPHS

4.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 5

PRODUCT LABELLING

5.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

EXHIBIT 6

TECHNICAL SPECIFICATIONS

6.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 7

INSTRUCTION MANUAL

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

EXHIBIT 8

MISCELLANEOUS INFORMATION

8.0 Miscellaneous Information

This miscellaneous information includes details of the test procedure and calculation of factor such as pulse desensitization.

8.1 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device.

8.2 Calculation of Average Factor

Averaging factor in dB = $20 \log (\text{duty cycle})$

The specification for output field strengths in accordance with the FCC rules specify measurements with an average detector. During testing, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation. The duty cycle is measured by placing the spectrum analyzer in zero scan (receiver mode) and linear mode at maximum bandwidth (3 MHz at 3 dB down) and viewing the resulting time domain signal output from the analyzer on a Tektronix oscilloscope. The oscilloscope is used because of its superior time base and triggering facilities.

A plot of the worst-case duty cycle as detected in this manner are saved with filename: af.pdf

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 100 ms

Effective period of the cycle = 20.290 ms

DC = $20.290 \text{ ms} / 100 \text{ ms} = 0.2029$ or 20.29%

Therefore, the averaging factor is found by $20 \log_{10} 0.2029 = -13.9 \text{ dB}$

8.3 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10: 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

8.3 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10: 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

EXHIBIT 9
CONFIDENTIALITY REQUEST

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

EXHIBIT 10

TEST EQUIPMENT LIST

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	14-Sep-2018	14-Sep-2019
SZ185-01	EMI Receiver	R&S	ESCI	100547	04-Jan-2019	04-Jan-2020
SZ061-08	Horn Antenna	ETS	3115	00092346	14-Sep-2018	14-Sep-2019
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	24-May-2019	24-May-2020
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	28-May-2019	28-May-2020
SZ056-06	Spectrum Analyzer	R&S	FSV 40	101101	20-May-2019	20-May-2020
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	15-Jan-2019	15-Jan-2020
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-2018	15-Dec-2020
SZ062-02	RF Cable	RADIAL	RG 213U	--	29-Oct-2018	29-Oct-2019
SZ062-05	RF Cable	RADIAL	0.04-26.5GHz	--	29-Oct-2018	29-Oct-2019
SZ062-12	RF Cable	RADIAL	0.04-26.5GHz	--	29-Oct-2018	29-Oct-2019
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	28-May-2019	28-May-2020
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	26-Oct-2018	26-Oct-2019
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	26-Oct-2018	26-Oct-2019
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	04-Jul-2018	04-Jul-2019
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2020

---END---