

#13_GSM850_DTM Multi-slot class 11_Right Cheek_Ch251**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_850_121125 Medium parameters used: $f = 849$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 41.607$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch251/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.651 mW/g



Configuration/Ch251/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.679 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.759 mW/g

SAR(1 g) = 0.523 mW/g ; SAR(10 g) = 0.393 mW/g

Maximum value of SAR (measured) = 0.621 mW/g

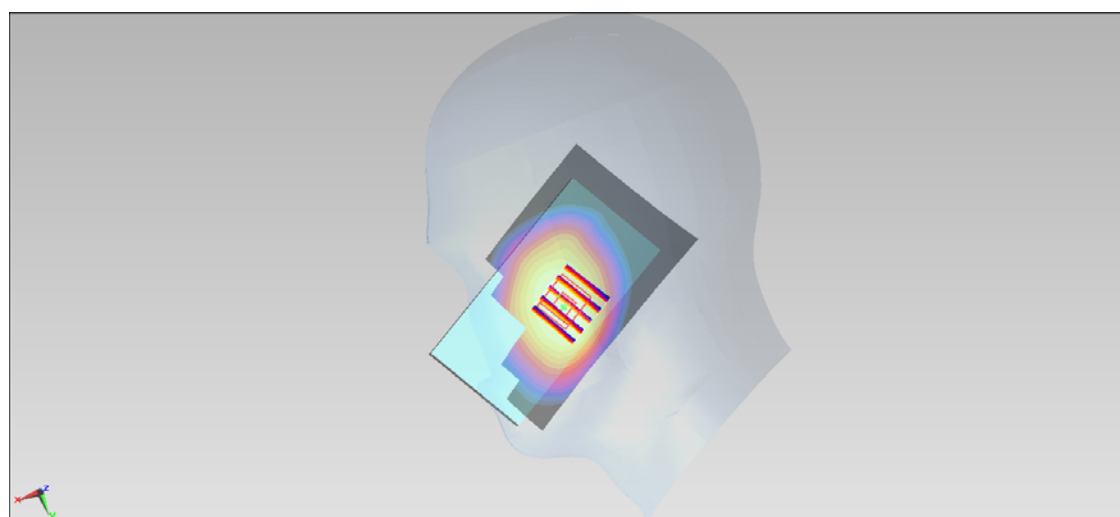

0 dB = 0.621 mW/g = -4.14 dB mW/g

#13_GSM850_DTM Multi-slot class 11_Right Cheek_Ch251_2D**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_850_121125 Medium parameters used: $f = 849$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 41.607$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch251/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.651 mW/g


Configuration/Ch251/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 27.679 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.759 mW/g

SAR(1 g) = 0.523 mW/g ; SAR(10 g) = 0.393 mW/g

Maximum value of SAR (measured) = 0.621 mW/g

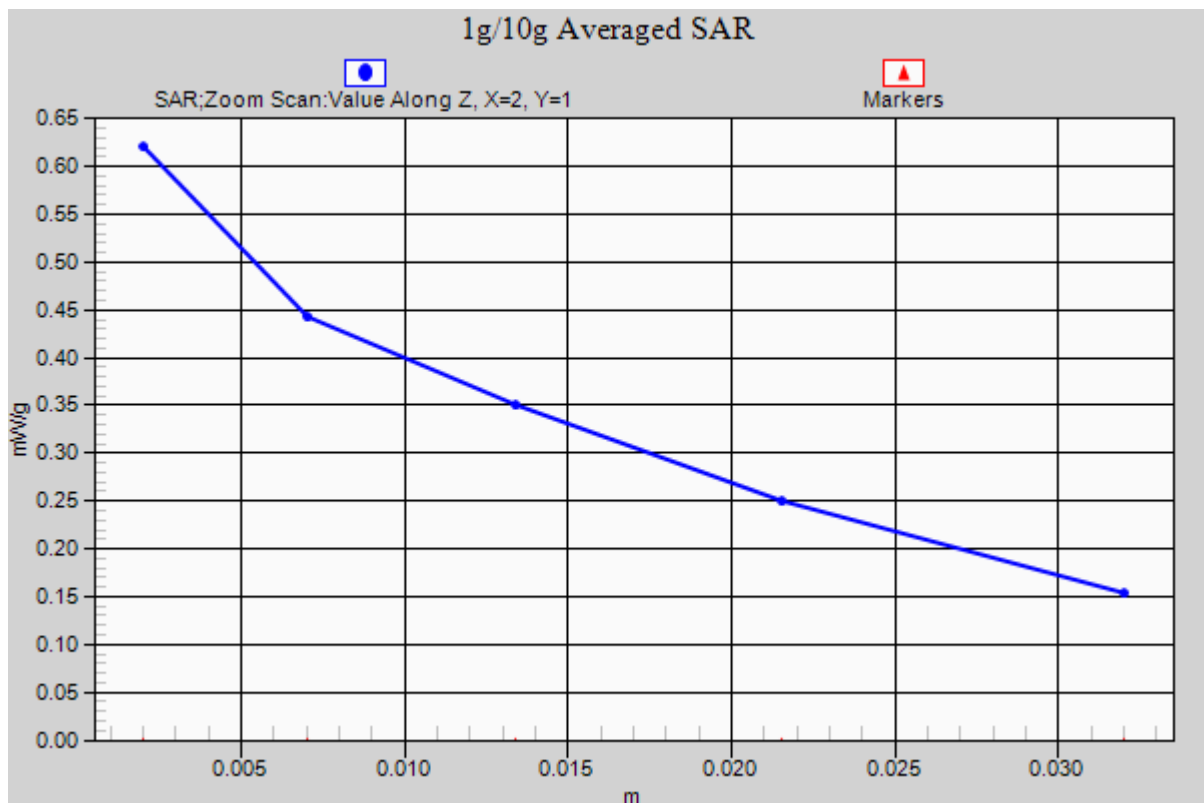

#14_GSM850_DTM Multi-slot class 11_Right Tilted_Ch251**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_850_121125 Medium parameters used: $f = 849$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 41.607$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch251/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.303 mW/g

Configuration/Ch251/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.900 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.352 mW/g

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.303 mW/g


Configuration/Ch251/Zoom Scan (5x5x5)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.900 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.407 mW/g

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.239 mW/g

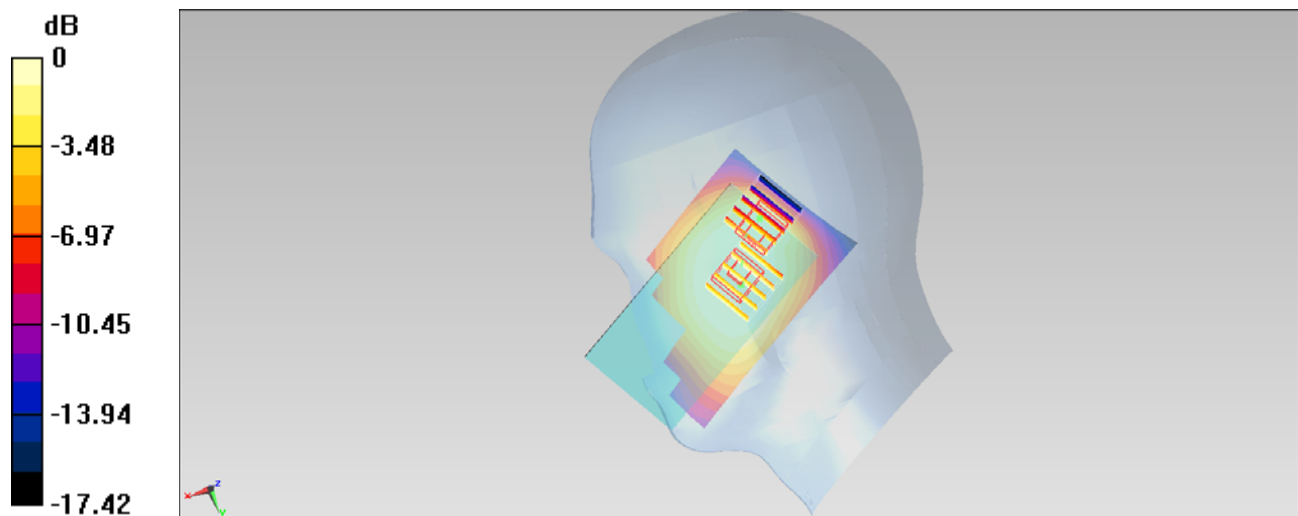

0 dB = 0.239 mW/g = -12.43 dB mW/g

#15_GSM850_DTM Multi-slot class 11_Left Cheek_Ch251**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_850_121125 Medium parameters used: $f = 849$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 41.607$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch251/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.525 mW/g



Configuration/Ch251/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.728 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.600 mW/g

SAR(1 g) = 0.414 mW/g ; SAR(10 g) = 0.306 mW/g

Maximum value of SAR (measured) = 0.507 mW/g

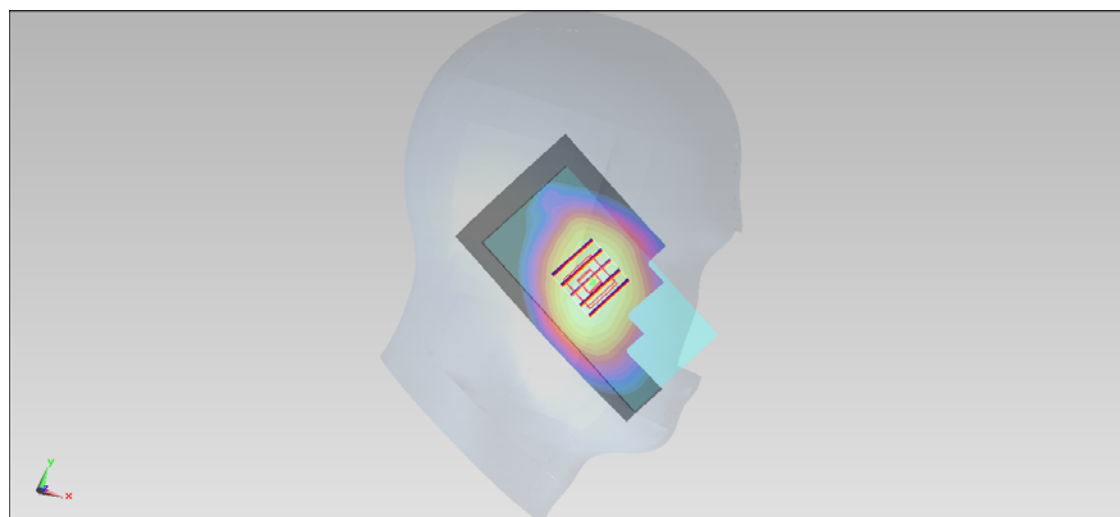

$0 \text{ dB} = 0.507 \text{ mW/g} = -5.90 \text{ dB mW/g}$

#16_GSM850_DTM Multi-slot class 11_Left Tilted_Ch251**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_850_121125 Medium parameters used: $f = 849$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 41.607$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch251/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.313 mW/g

Configuration/Ch251/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.108 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.332 mW/g

SAR(1 g) = 0.237 mW/g ; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.282 mW/g



Configuration/Ch251/Zoom Scan (5x5x5)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.108 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.474 mW/g

SAR(1 g) = 0.170 mW/g ; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

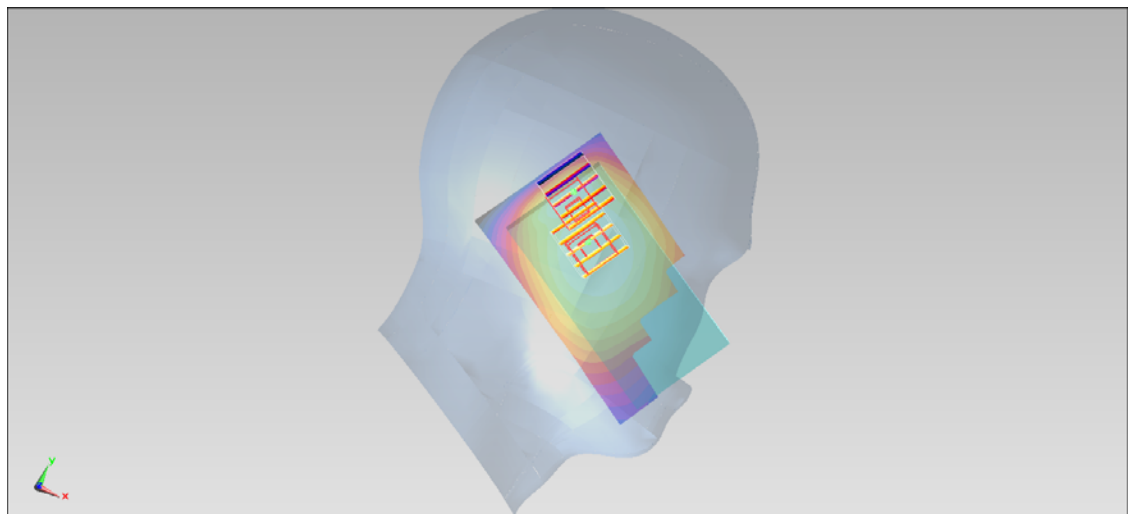

0 dB = 0.249 mW/g = -12.08 dB mW/g

#01_GSM1900_DTM Multi-slot class 11_Right Cheek_Ch810**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_1900_121125 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.398$ mho/m; $\epsilon_r = 39.923$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch810/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.445 mW/g



Configuration/Ch810/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.907 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.541 mW/g

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.425 mW/g

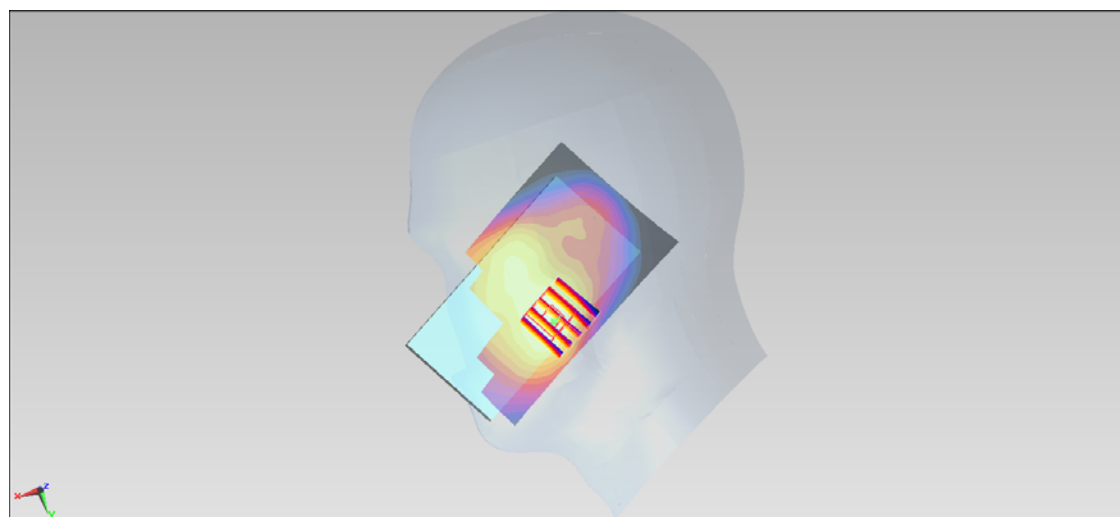

0 dB = 0.425 mW/g = -7.43 dB mW/g

#02_GSM1900_DTM Multi-slot class 11_Right Tilted_Ch810**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_1900_121125 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.398$ mho/m; $\epsilon_r = 39.923$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch810/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.298 mW/g



Configuration/Ch810/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.080 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.383 mW/g

SAR(1 g) = 0.226 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.287 mW/g

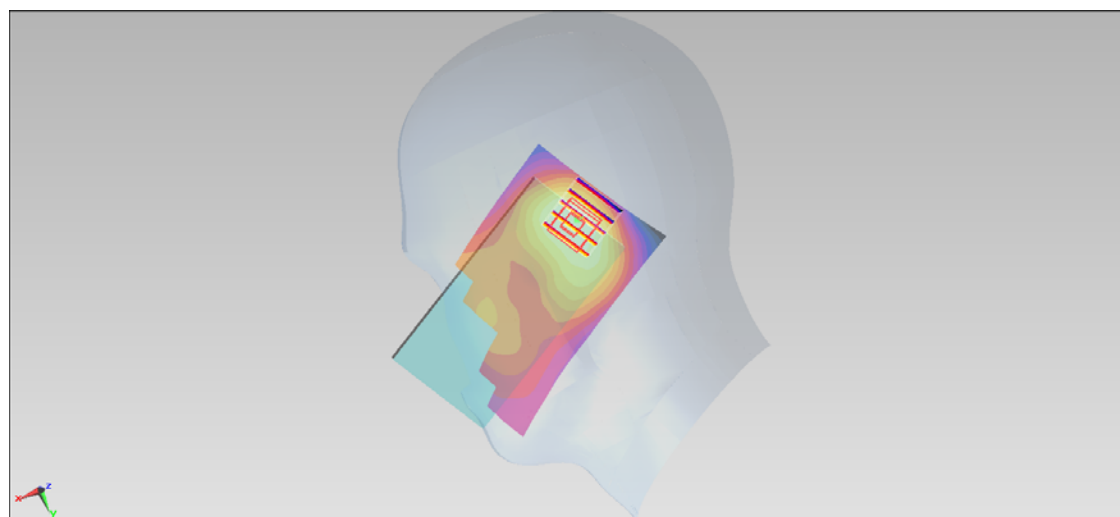

#03_GSM1900_DTM Multi-slot class 11_Left Cheek_Ch810**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_1900_121125 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.398$ mho/m; $\epsilon_r = 39.923$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch810/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.708 mW/g



Configuration/Ch810/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.363 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.831 mW/g

SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.667 mW/g

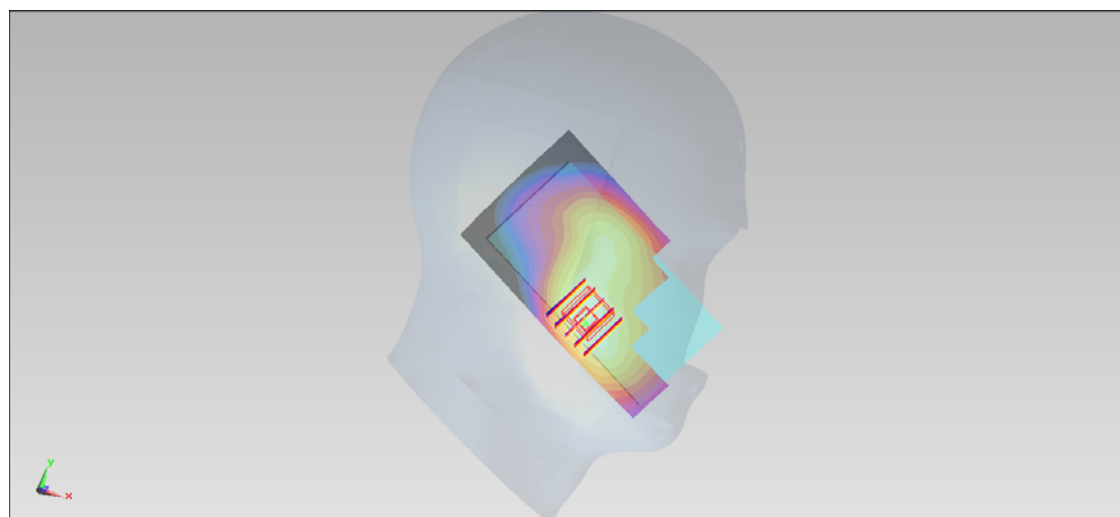

0 dB = 0.667 mW/g = -3.52 dB mW/g

#03_GSM1900_DTM Multi-slot class 11_Left Cheek_Ch810_2D**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_1900_121125 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.398$ mho/m; $\epsilon_r = 39.923$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch810/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.708 mW/g


Configuration/Ch810/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.363 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.831 mW/g

SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.667 mW/g

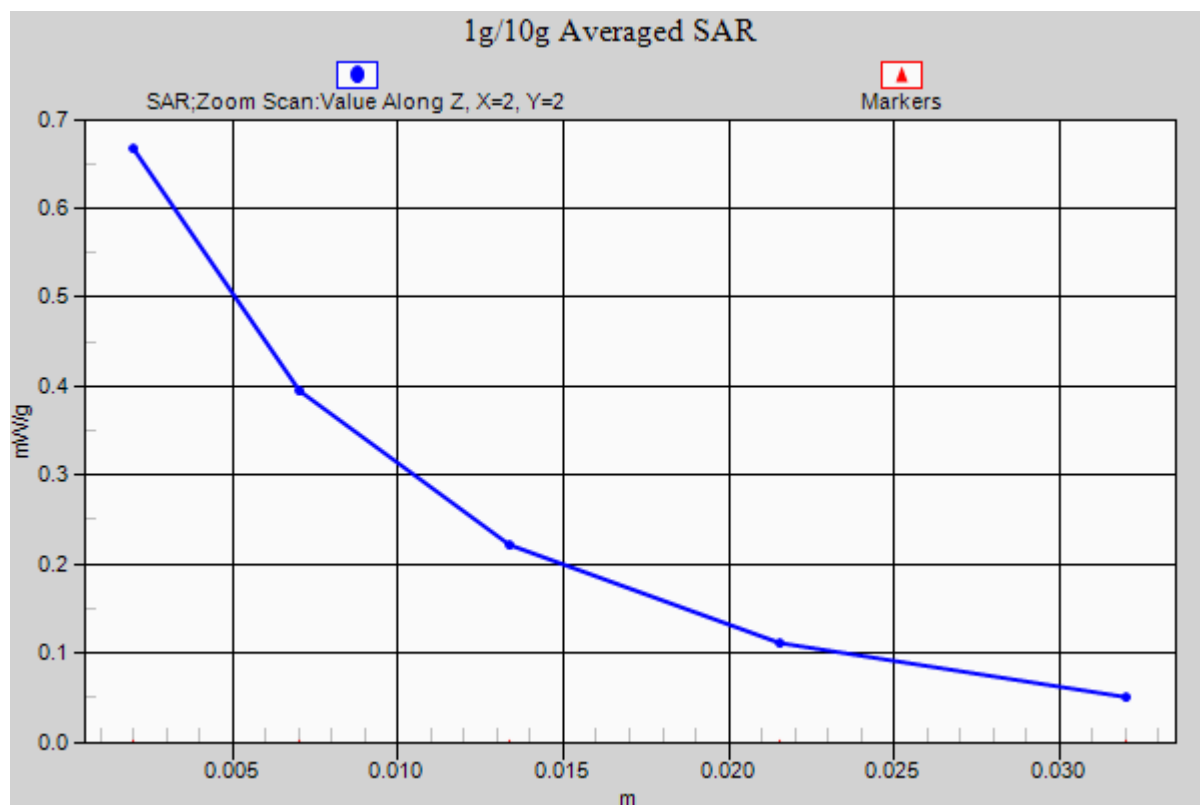

#04_GSM1900_DTM Multi-slot class 11_Left Tilted_Ch810**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium: HSL_1900_121125 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.398$ mho/m; $\epsilon_r = 39.923$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch810/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.319 mW/g



Configuration/Ch810/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.395 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.394 mW/g

SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.129 mW/g

Maximum value of SAR (measured) = 0.265 mW/g

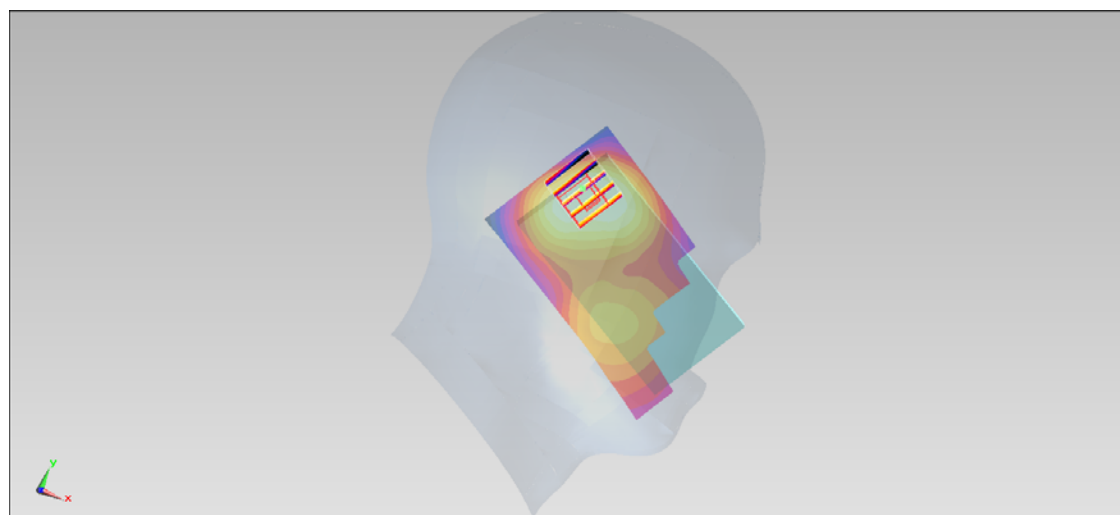

0 dB = 0.265 mW/g = -11.54 dB mW/g

#09_WCDMA V_RMC 12.2K_Right Cheek_Ch4182**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121125 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 41.72$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch4182/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.190 mW/g



Configuration/Ch4182/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.204 mW/g

SAR(1 g) = 0.144 mW/g ; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.172 mW/g

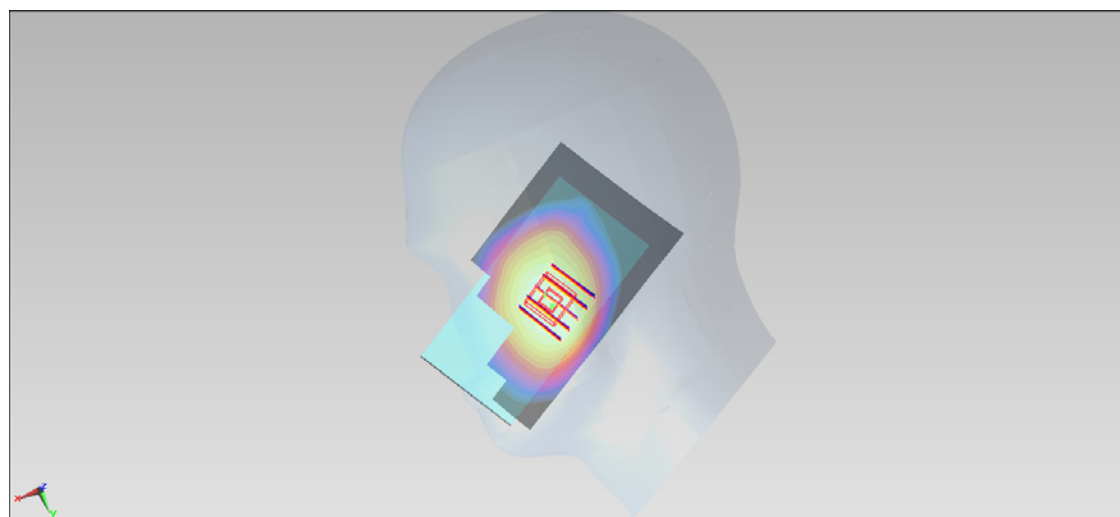

$0 \text{ dB} = 0.172 \text{ mW/g} = -15.29 \text{ dB mW/g}$

#09_WCDMA V_RMC 12.2K_Right Cheek_Ch4182_2D**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121125 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 41.72$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch4182/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.190 mW/g


Configuration/Ch4182/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.204 mW/g

SAR(1 g) = 0.144 mW/g ; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.172 mW/g

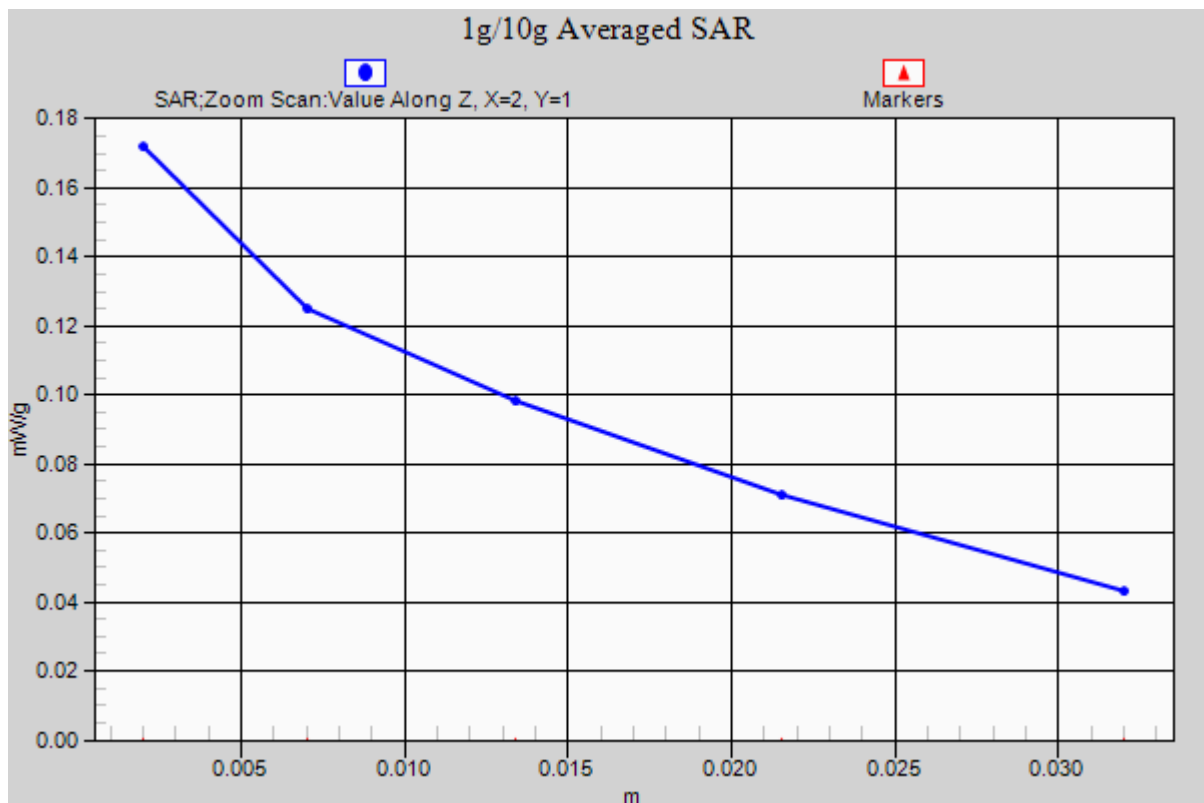

#10_WCDMA V_RMC 12.2K_Right Tilted_Ch4182**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121125 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 41.72$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch4182/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.0889 mW/g

Configuration/Ch4182/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.228 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.105 mW/g

SAR(1 g) = 0.077 mW/g ; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.0907 mW/g



Configuration/Ch4182/Zoom Scan (5x5x5)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.228 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.144 mW/g

SAR(1 g) = 0.052 mW/g ; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.0701 mW/g

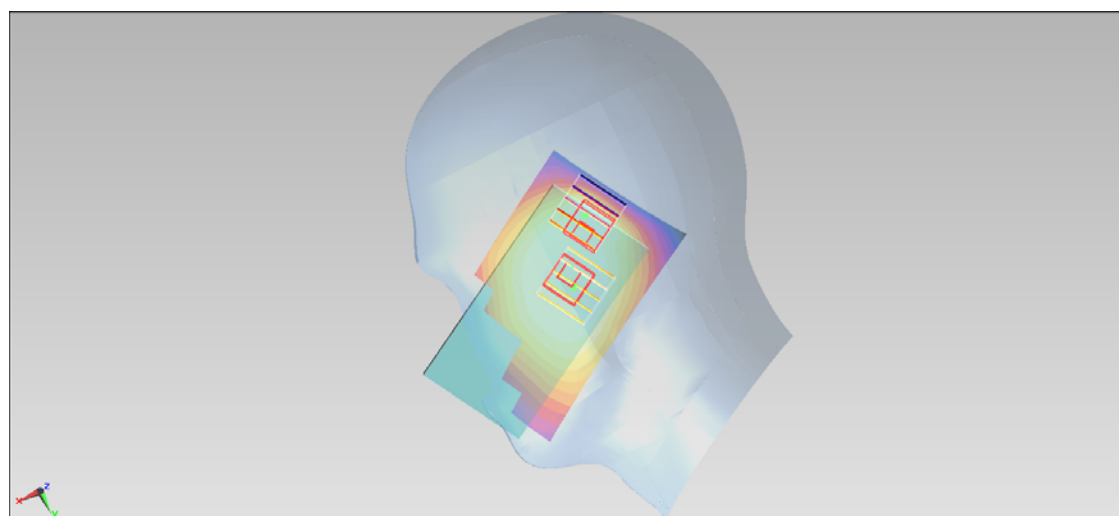

0 dB = 0.0701 mW/g = -23.09 dB mW/g

#11_WCDMA V_RMC 12.2K_Left Cheek_Ch4182**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121125 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 41.72$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch4182/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.154 mW/g



Configuration/Ch4182/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.611 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.178 mW/g

SAR(1 g) = 0.123 mW/g ; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.150 mW/g

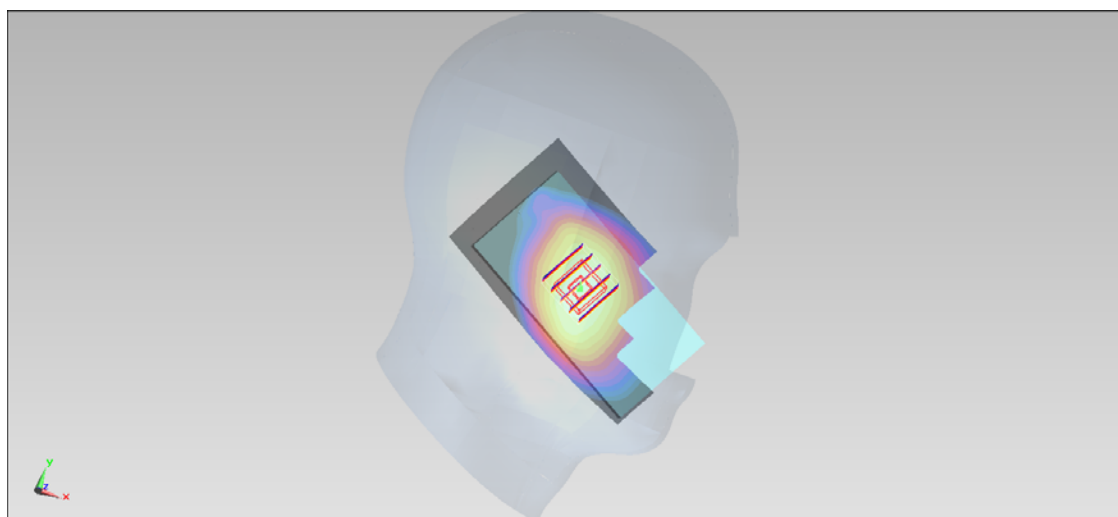

0 dB = 0.150 mW/g = -16.48 dB mW/g

#12_WCDMA V_RMC 12.2K_Left Tilted_Ch4182**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121125 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 41.72$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.2, 6.2, 6.2); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch4182/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.119 mW/g

Configuration/Ch4182/Zoom Scan (5x5x5)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.094 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.108 mW/g

SAR(1 g) = 0.078 mW/g ; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.0927 mW/g



Configuration/Ch4182/Zoom Scan (5x5x5)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.094 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.173 mW/g

SAR(1 g) = 0.057 mW/g ; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.0872 mW/g

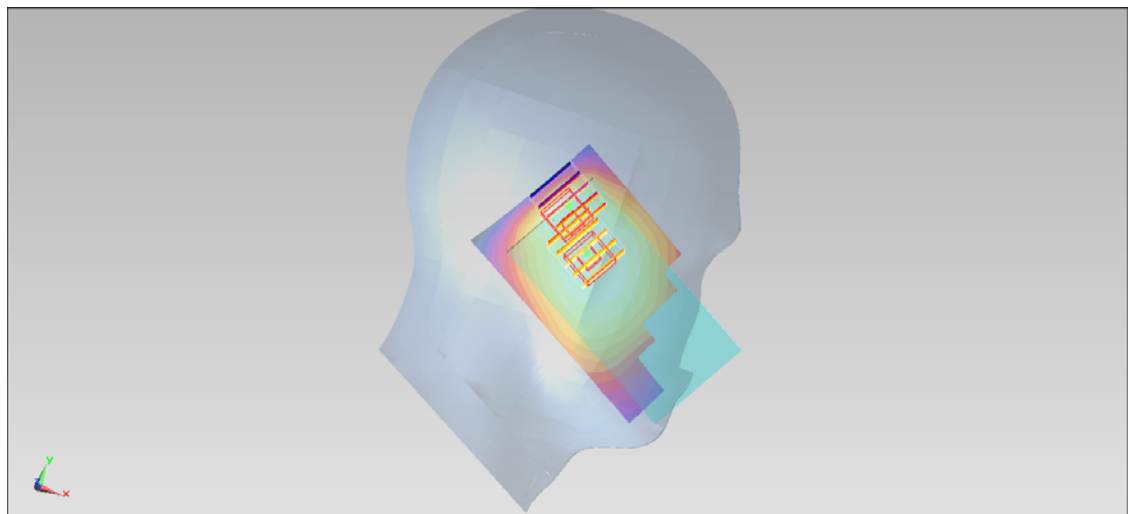

$0 \text{ dB} = 0.0872 \text{ mW/g} = -21.19 \text{ dB mW/g}$

#05_WCDMA II_RMC 12.2K_Right Cheek_Ch9538**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121125 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.396$ mho/m; $\epsilon_r = 39.939$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch9538/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.369 mW/g



Configuration/Ch9538/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.347 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.472 mW/g

SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.356 mW/g

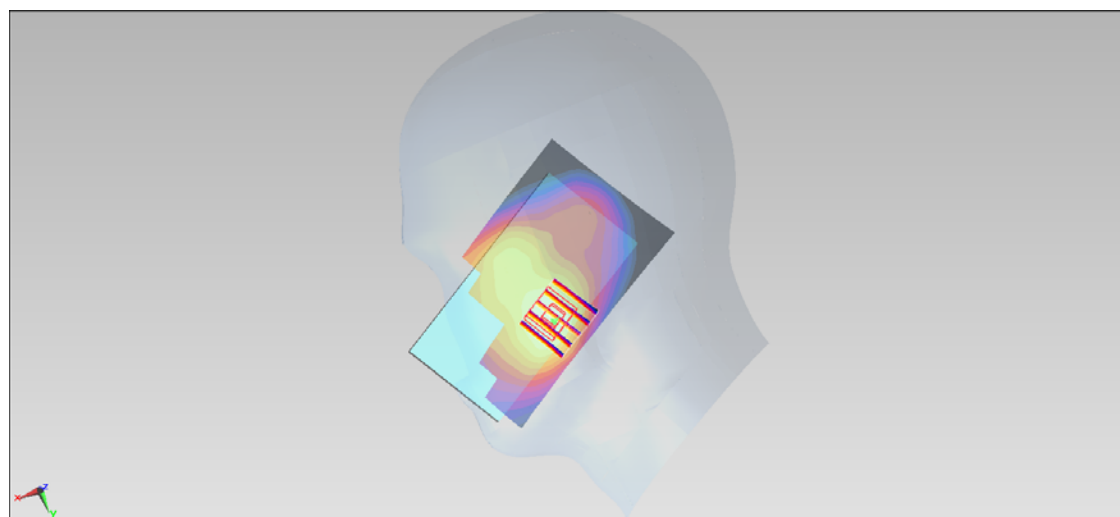

0 dB = 0.356 mW/g = -8.97 dB mW/g

#06_WCDMA II_RMC 12.2K_Right Tilted_Ch9538**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121125 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.396$ mho/m; $\epsilon_r = 39.939$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch9538/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.198 mW/g



Configuration/Ch9538/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.493 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.256 mW/g

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.202 mW/g

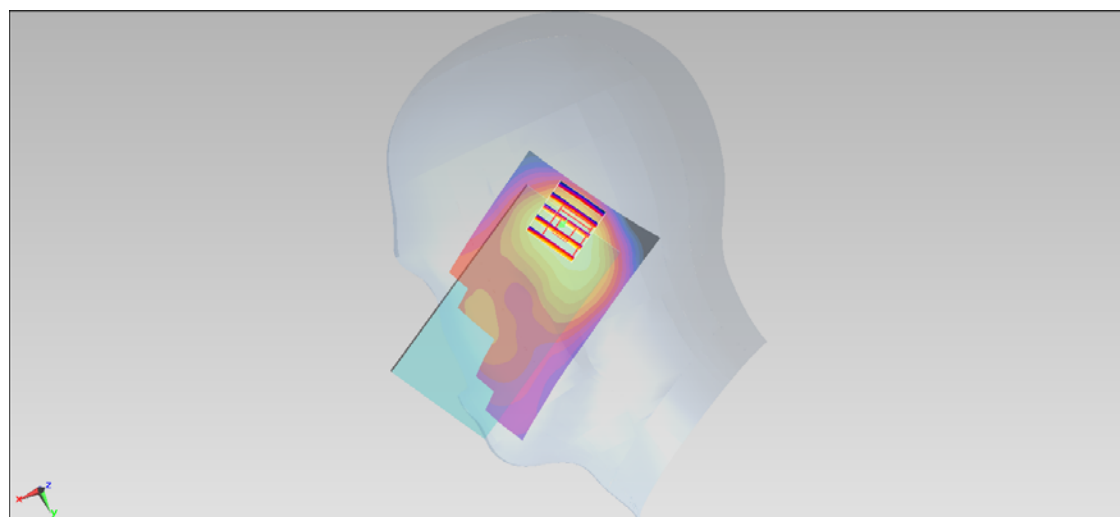

0 dB = 0.202 mW/g = -13.89 dB mW/g

#07_WCDMA II_RMC 12.2K_Left Cheek_Ch9538**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121125 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.396$ mho/m; $\epsilon_r = 39.939$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch9538/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.519 mW/g



Configuration/Ch9538/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.075 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.623 mW/g

SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.492 mW/g

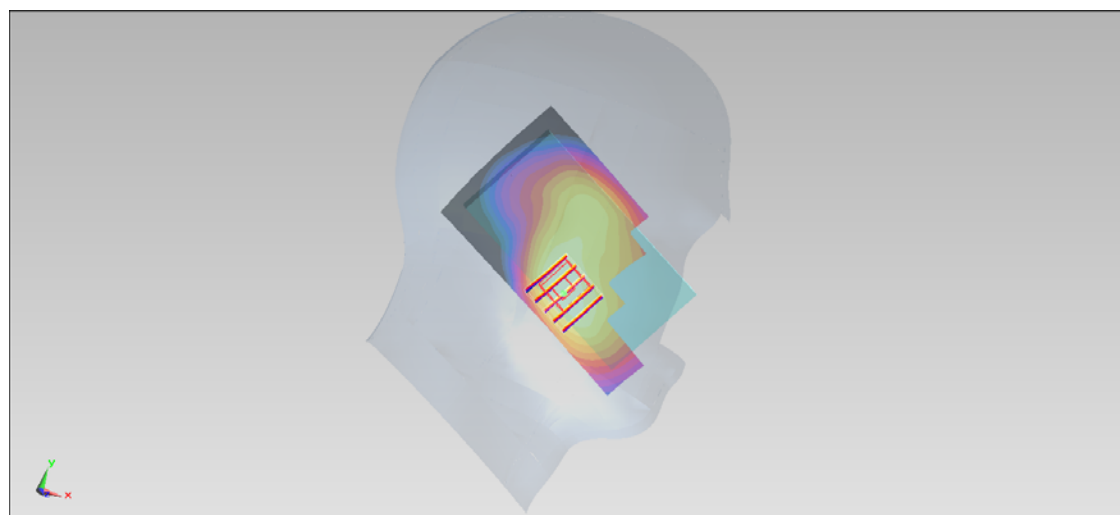

0 dB = 0.492 mW/g = -6.16 dB mW/g

#07_WCDMA II_RMC 12.2K_Left Cheek_Ch9538_2D**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121125 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.396$ mho/m; $\epsilon_r = 39.939$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch9538/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.519 mW/g


Configuration/Ch9538/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.075 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.623 mW/g

SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.492 mW/g

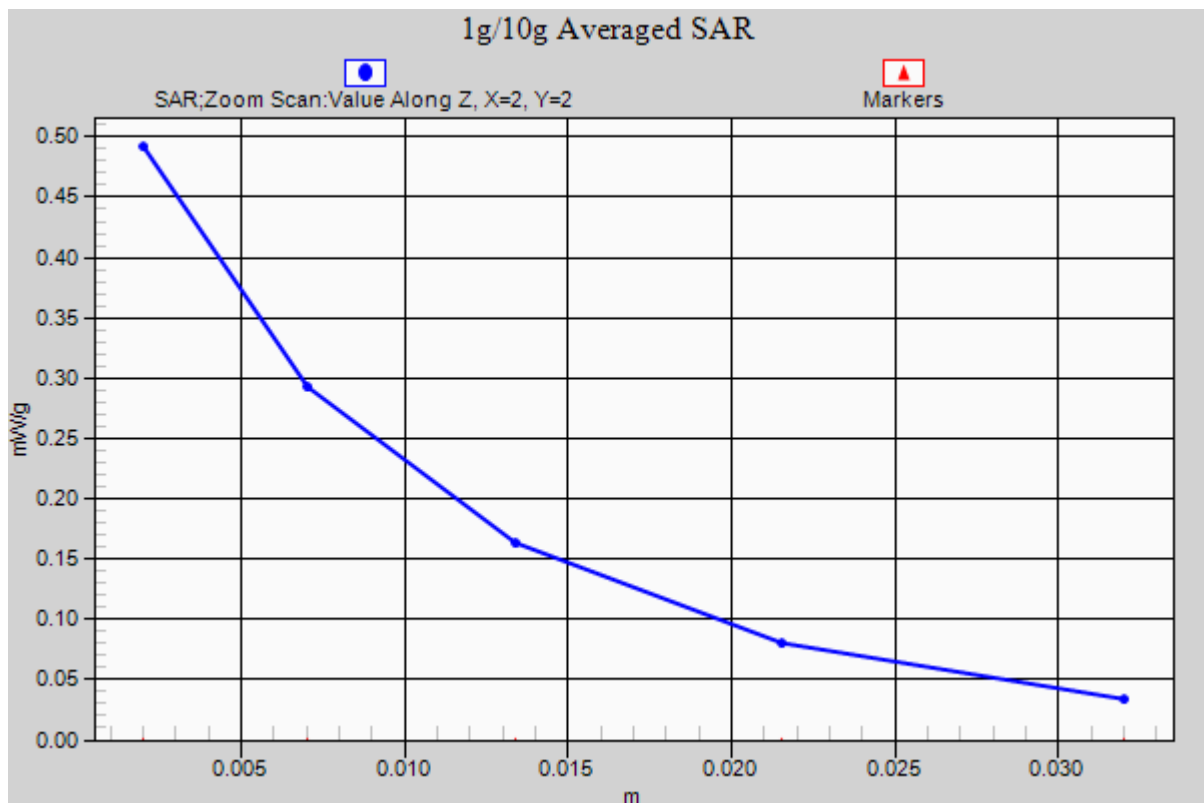

#08_WCDMA II_RMC 12.2K_Left Tilted_Ch9538**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121125 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.396$ mho/m; $\epsilon_r = 39.939$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(5.05, 5.05, 5.05); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Configuration/Ch9538/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.219 mW/g



Configuration/Ch9538/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.053 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.276 mW/g

SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

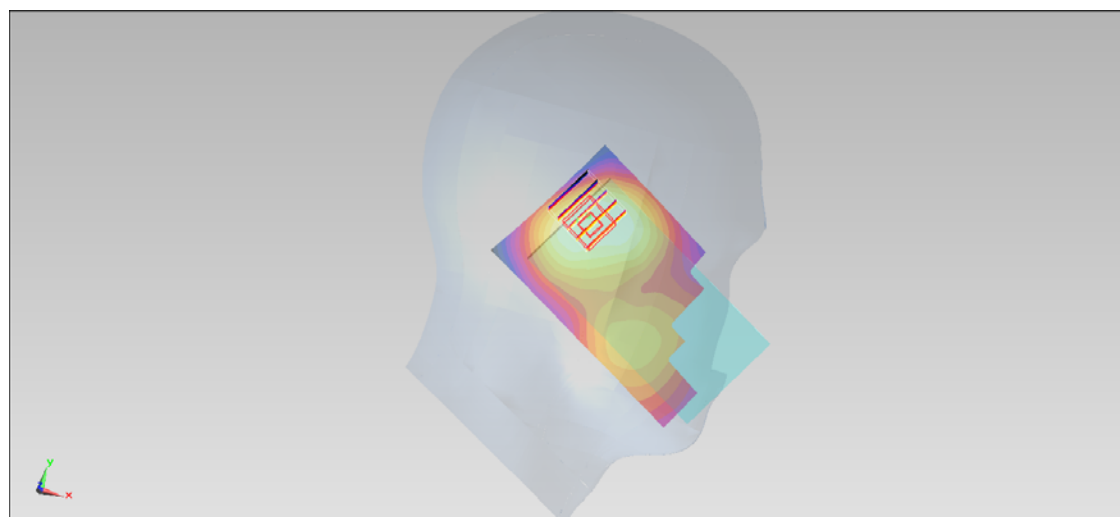

0 dB = 0.187 mW/g = -14.56 dB mW/g

#100_WLAN2.4G_802.11b_Right Cheek_Ch6**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.836$ mho/m; $\epsilon_r = 39.314$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.58, 6.58, 6.58); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (71x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.364 mW/g



Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.348 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.491 mW/g

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.361 mW/g

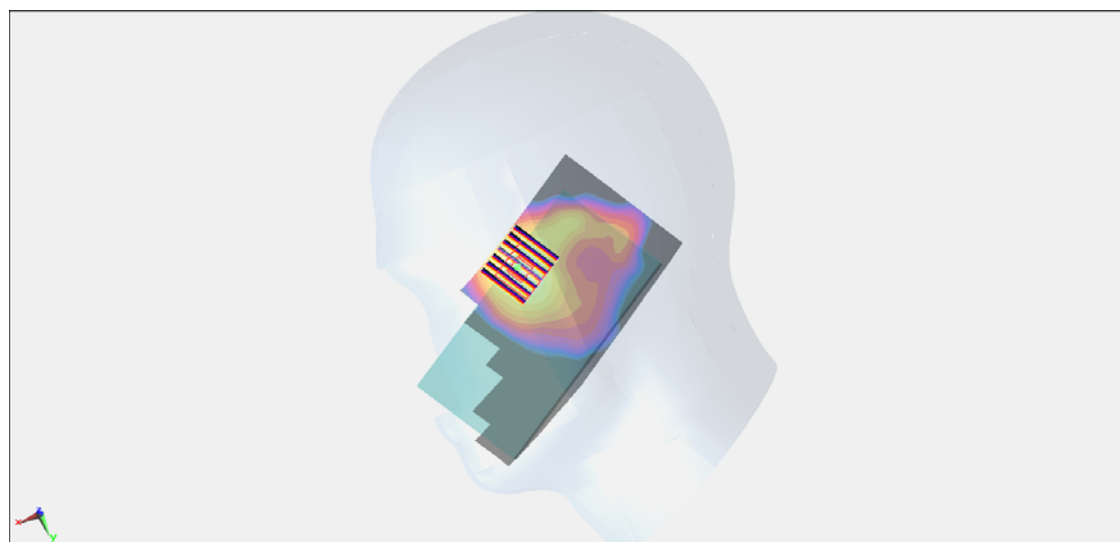

0 dB = 0.361 mW/g = -8.85 dB mW/g

#101_WLAN2.4G_802.11b_Right Tilted_Ch6**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.836$ mho/m; $\epsilon_r = 39.314$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.58, 6.58, 6.58); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (71x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.145 mW/g

Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.800 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.185 mW/g

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.136 mW/g



Configuration/Ch6/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.800 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.212 mW/g

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.126 mW/g

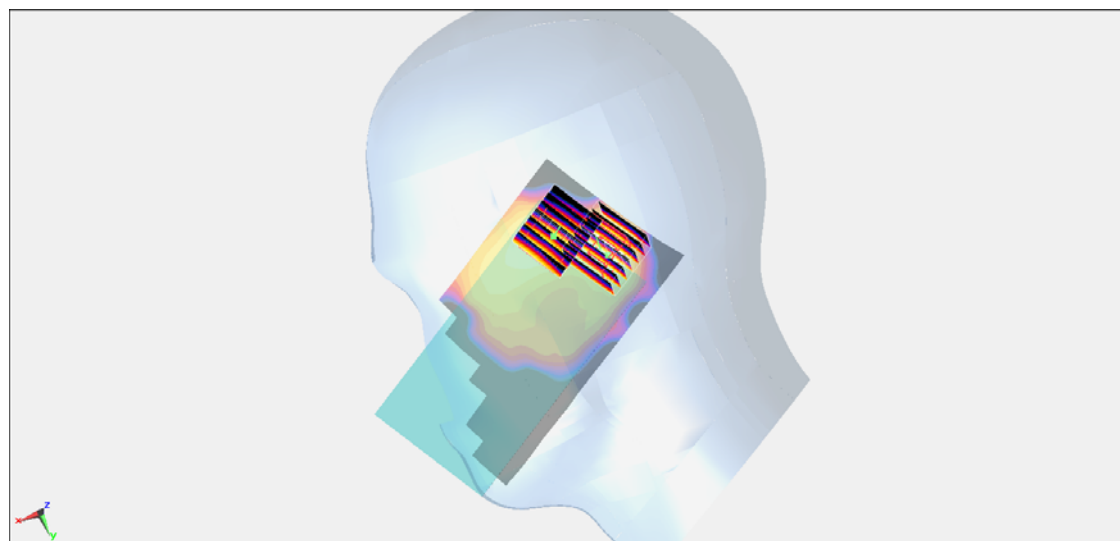

0 dB = 0.126 mW/g = -17.99 dB mW/g

#102_WLAN2.4G_802.11b_Left Cheek_Ch6**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.836$ mho/m; $\epsilon_r = 39.314$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.58, 6.58, 6.58); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (71x141x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.382 mW/g


Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.257 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.494 mW/g

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.370 mW/g

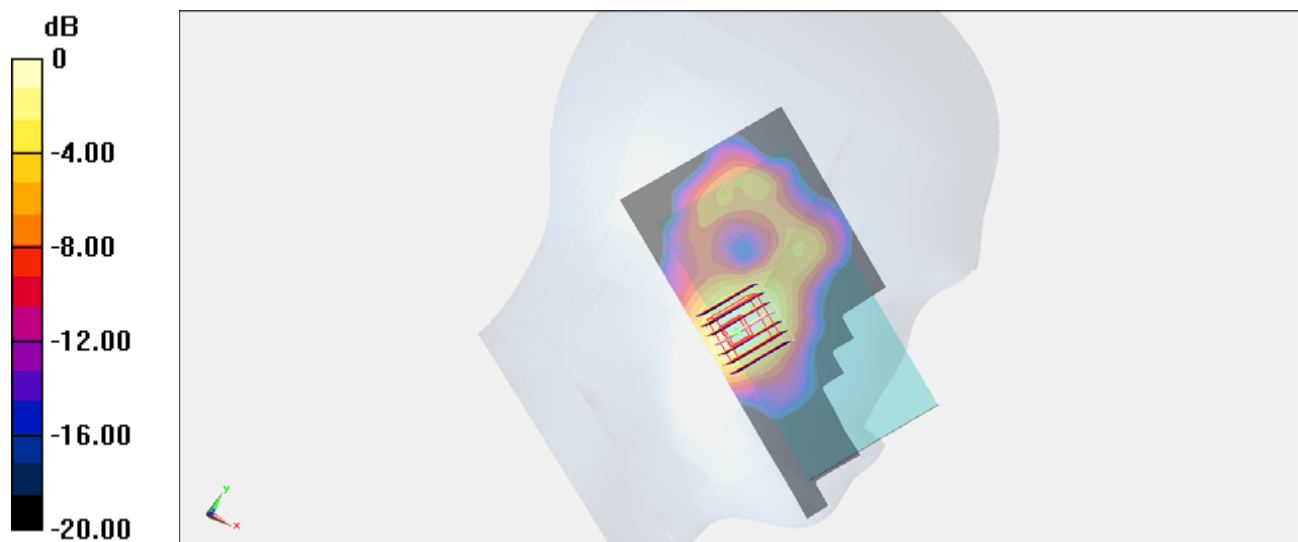

0 dB = 0.370 mW/g = -8.64 dB mW/g

#102_WLAN2.4G_802.11b_Left Cheek_Ch6_2D**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.836$ mho/m; $\epsilon_r = 39.314$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.58, 6.58, 6.58); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (71x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.382 mW/g


Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.257 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.494 mW/g

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.370 mW/g

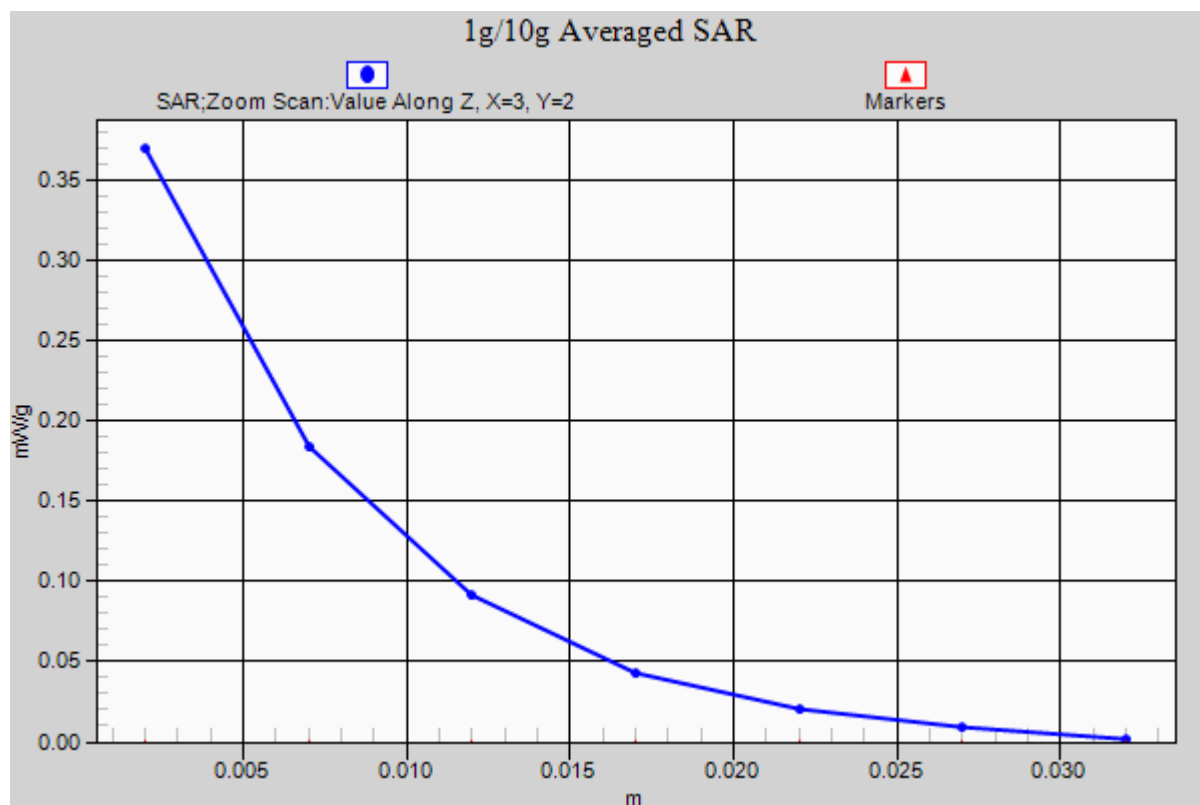

#103_WLAN2.4G_802.11b_Left Tilted_Ch6**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.836$ mho/m; $\epsilon_r = 39.314$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.58, 6.58, 6.58); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (71x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.189 mW/g



Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.438 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.222 mW/g

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

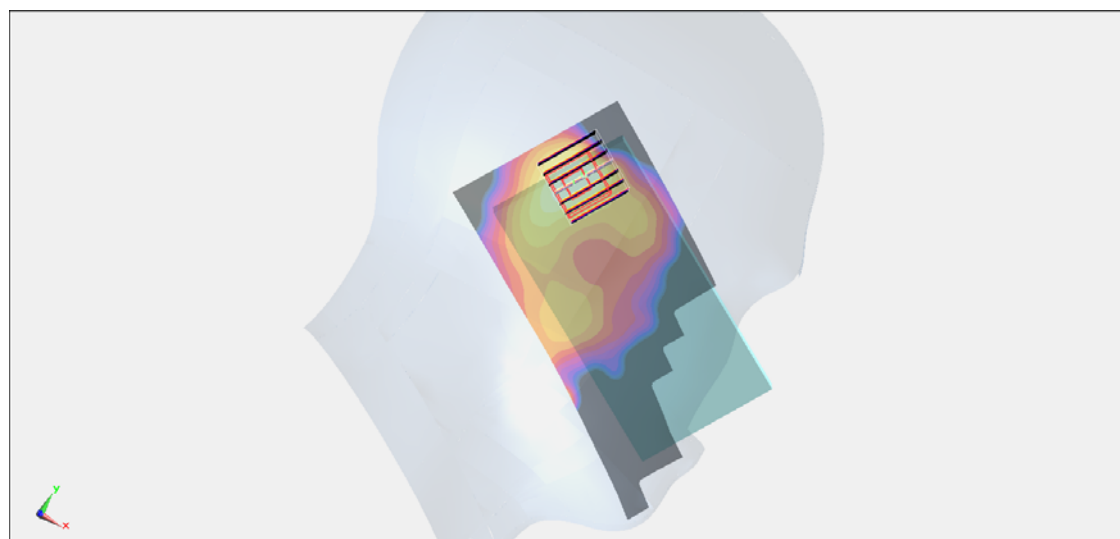

0 dB = 0.165 mW/g = -15.65 dB mW/g

#17_GSM850_GPRS (4 Tx slots)_Front_1cm_Ch251**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium: MSL_850_121126 Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 53.487$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.4°C ; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch251/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.587 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.698 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.562 W/kg ; SAR(10 g) = 0.435 W/kg

Maximum value of SAR (measured) = 0.587 W/kg

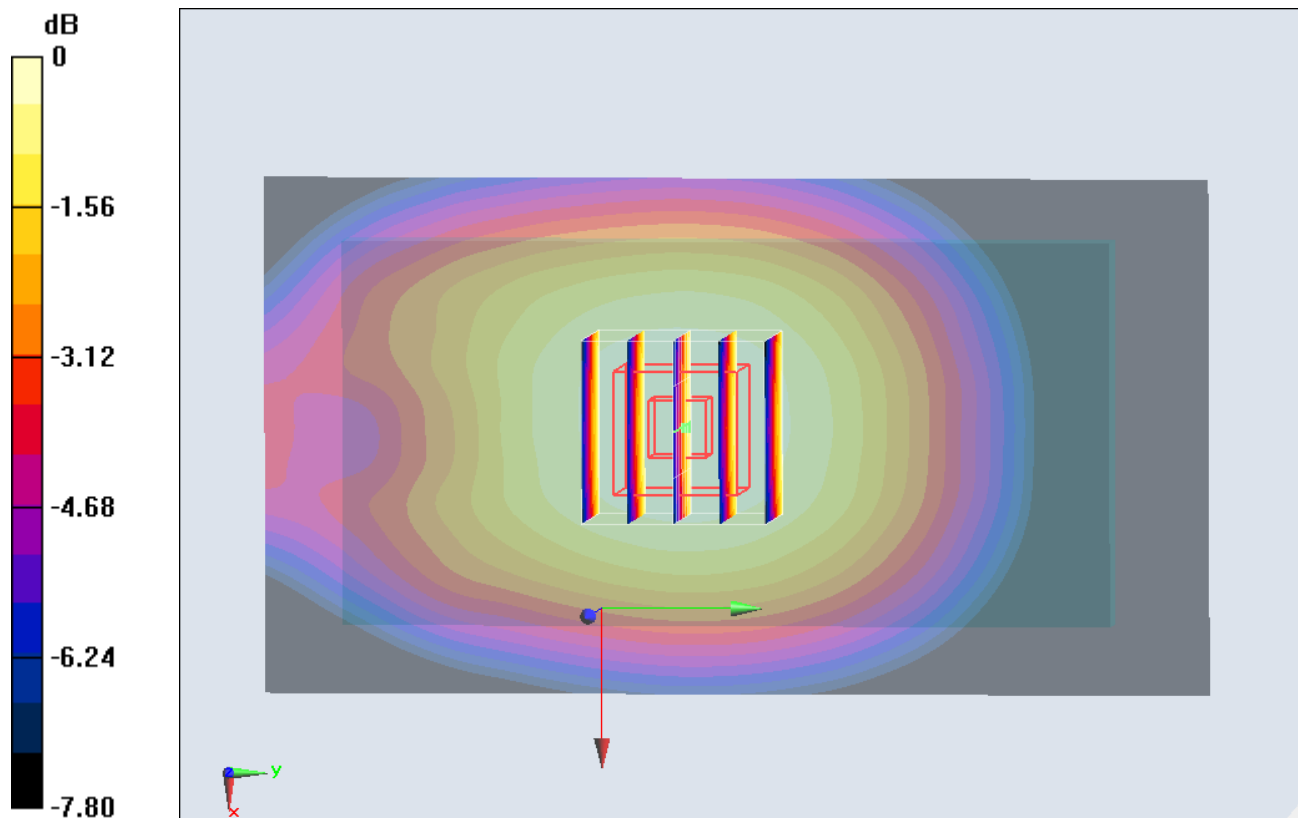

0 dB = 0.587 W/kg = -2.31 dBW/kg

#18_GSM850_GPRS (4 Tx slots)_Back_1cm_Ch251**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium: MSL_850_121126 Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 53.487$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.4°C ; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch251/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.780 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.131 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.909 W/kg

SAR(1 g) = 0.739 W/kg ; SAR(10 g) = 0.566 W/kg

Maximum value of SAR (measured) = 0.774 W/kg

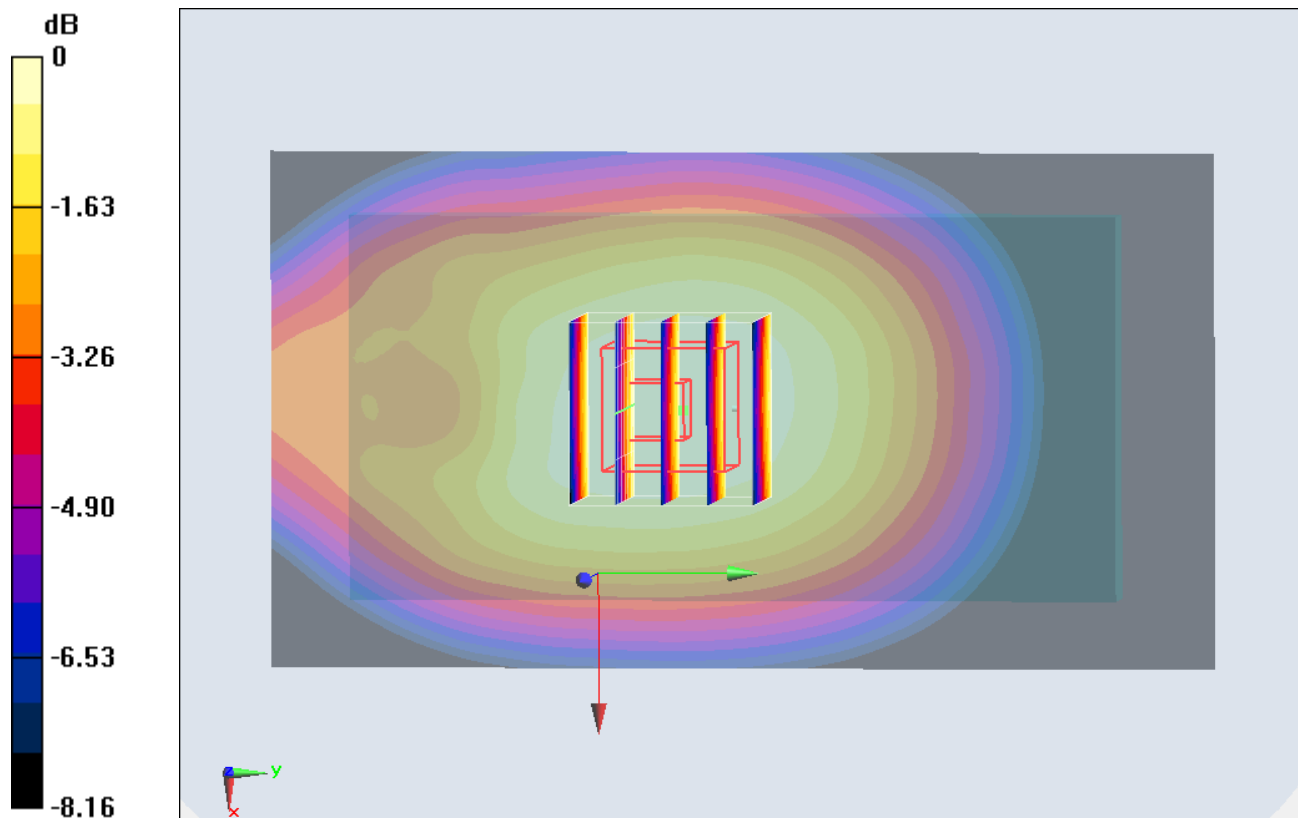

0 dB = 0.774 W/kg = -1.11 dBW/kg

#18_GSM850_GPRS (4 Tx slots)_Back_1cm_Ch251_2D**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium: MSL_850_121126 Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 53.487$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.4°C ; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch251/Area Scan (61x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.780 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.131 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.909 W/kg

SAR(1 g) = 0.739 W/kg ; SAR(10 g) = 0.566 W/kg

Maximum value of SAR (measured) = 0.774 W/kg

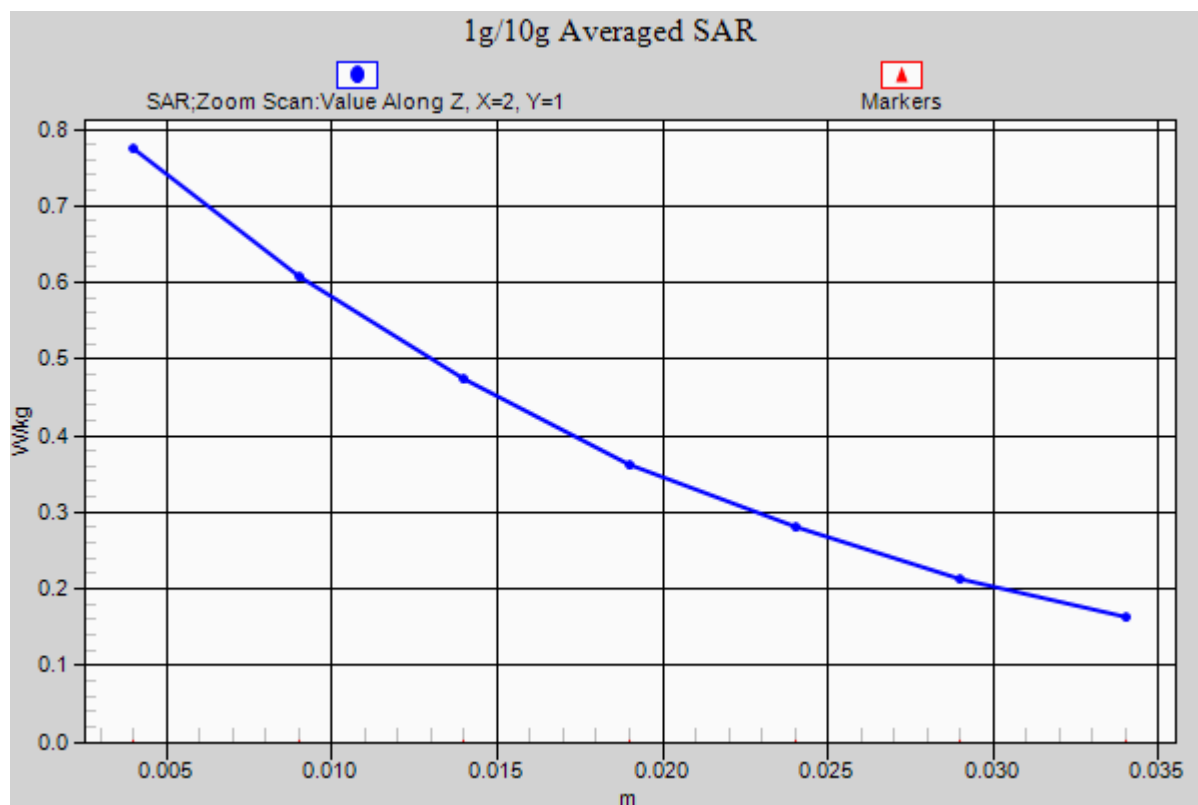

#19_GSM850_GPRS (4 Tx slots)_Left Side_1cm_Ch251**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium: MSL_850_121126 Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 53.487$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.4°C ; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch251/Area Scan (41x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.501 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.112 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.626 W/kg

SAR(1 g) = 0.467 W/kg ; SAR(10 g) = 0.326 W/kg

Maximum value of SAR (measured) = 0.500 W/kg

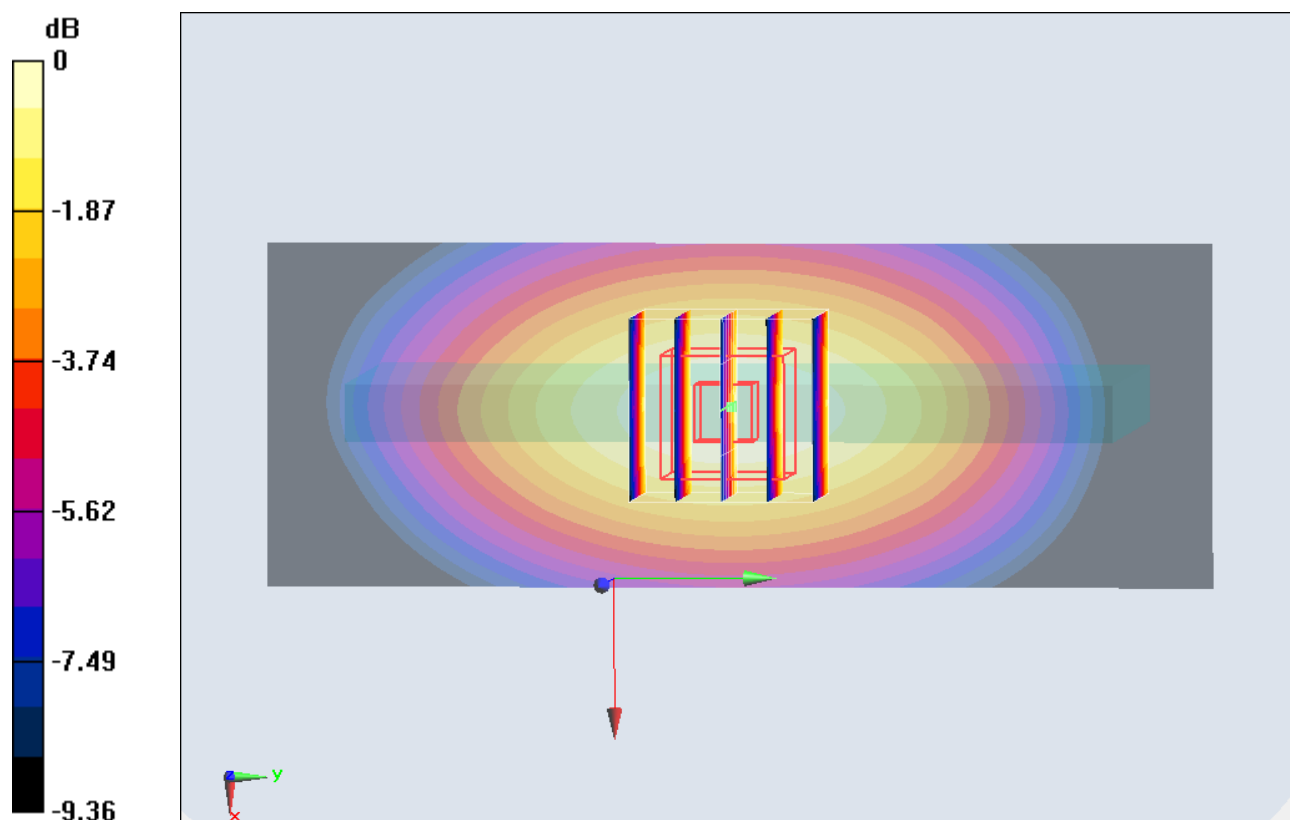

0 dB = 0.500 W/kg = -3.01 dBW/kg

#20_GSM850_GPRS (4 Tx slots)_Right Side_1cm_Ch251**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium: MSL_850_121126 Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 53.487$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.4°C ; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch251/Area Scan (41x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.682 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.433 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.647 W/kg ; SAR(10 g) = 0.451 W/kg

Maximum value of SAR (measured) = 0.693 W/kg

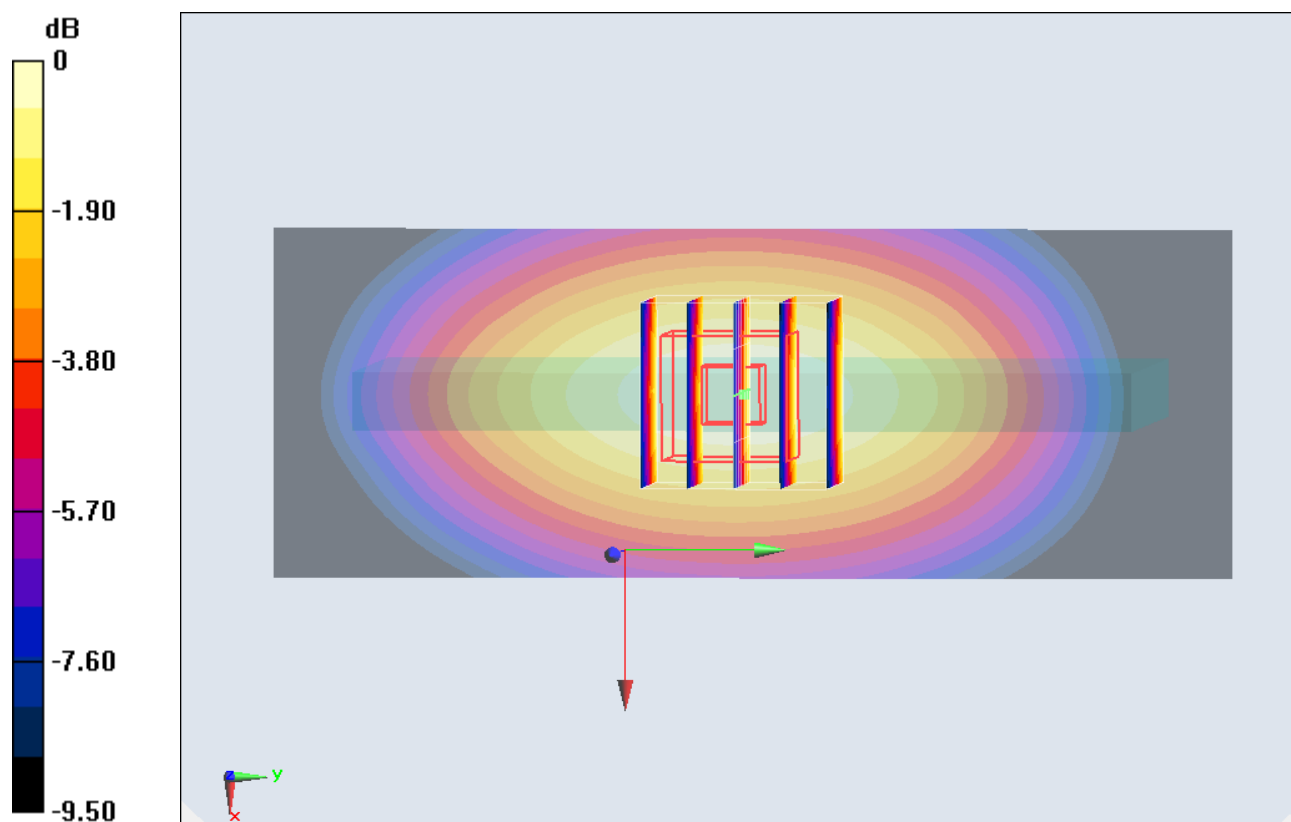

0 dB = 0.693 W/kg = -1.59 dBW/kg

#21_GSM850_GPRS (4 Tx slots)_Bottom Side_1cm_Ch251**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium: MSL_850_121126 Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 53.487$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.4°C ; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch251/Area Scan (41x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.350 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.756 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.556 W/kg

SAR(1 g) = 0.296 W/kg ; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

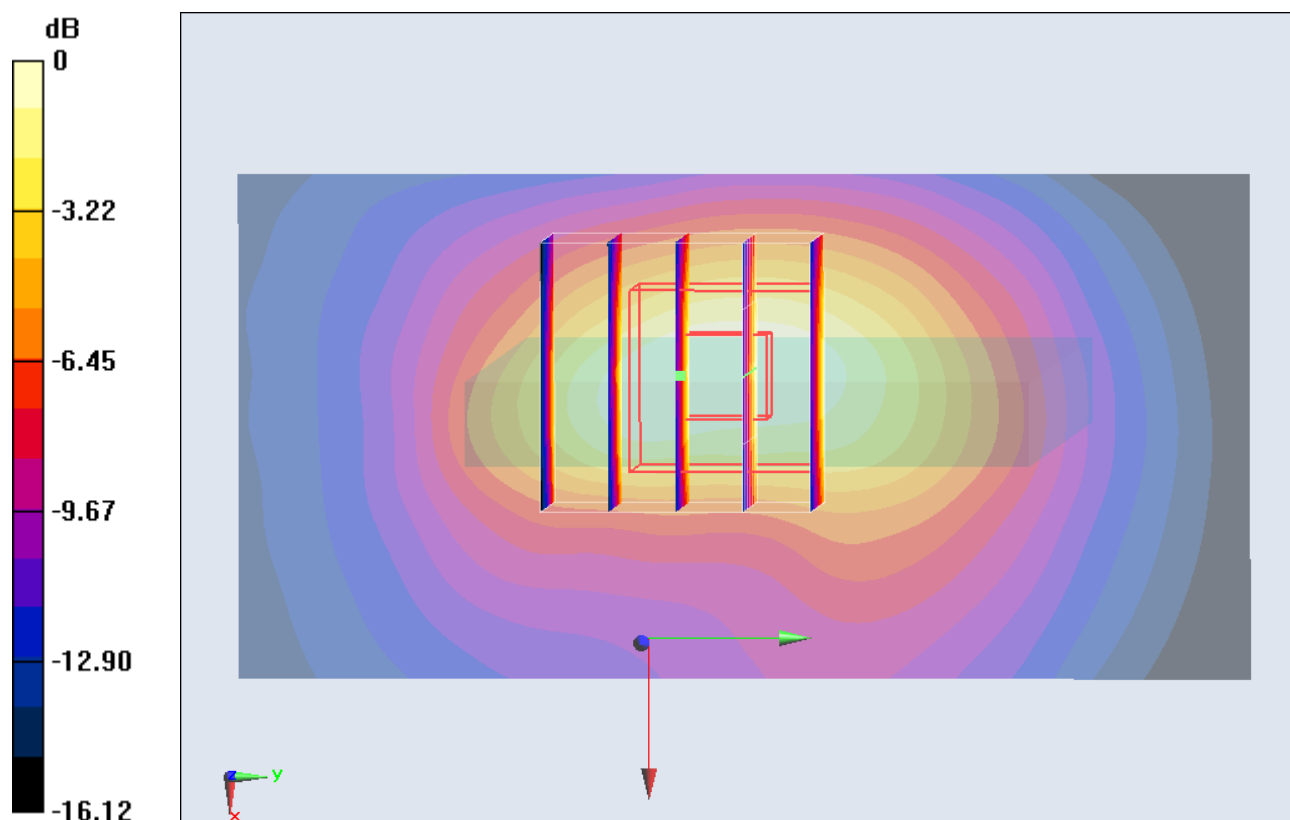

#22_GSM850_DTM Multi-slot class 11_Back_1cm_Ch251;Headset**DUT: 2N0915**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.67

Medium: MSL_850_121126 Medium parameters used: $f = 849$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 53.487$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.4°C ; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch251/Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.649 W/kg

Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.662 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.616 W/kg ; SAR(10 g) = 0.463 W/kg

Maximum value of SAR (measured) = 0.648 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.662 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.994 W/kg

SAR(1 g) = 0.554 W/kg ; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 0.595 W/kg

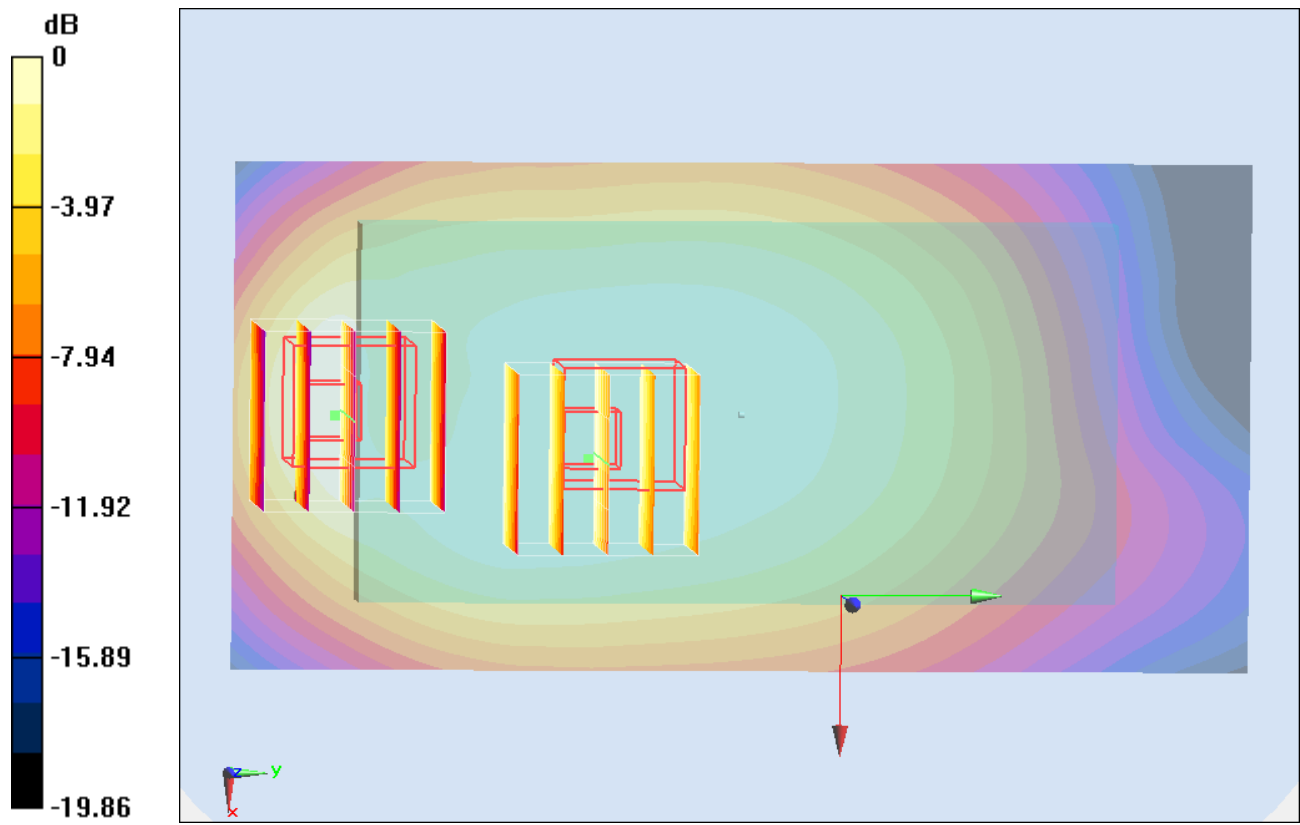

0 dB = 0.595 W/kg = -2.25 dBW/kg

#36_GSM1900_GPRS (4 Tx slots)_Front_1cm_Ch810**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium: MSL_1900_121127 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r = 54.807$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch810/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.603 W/kg

Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.629 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.803 W/kg

SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.339 W/kg

Maximum value of SAR (measured) = 0.552 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.629 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.327 W/kg

Maximum value of SAR (measured) = 0.530 W/kg

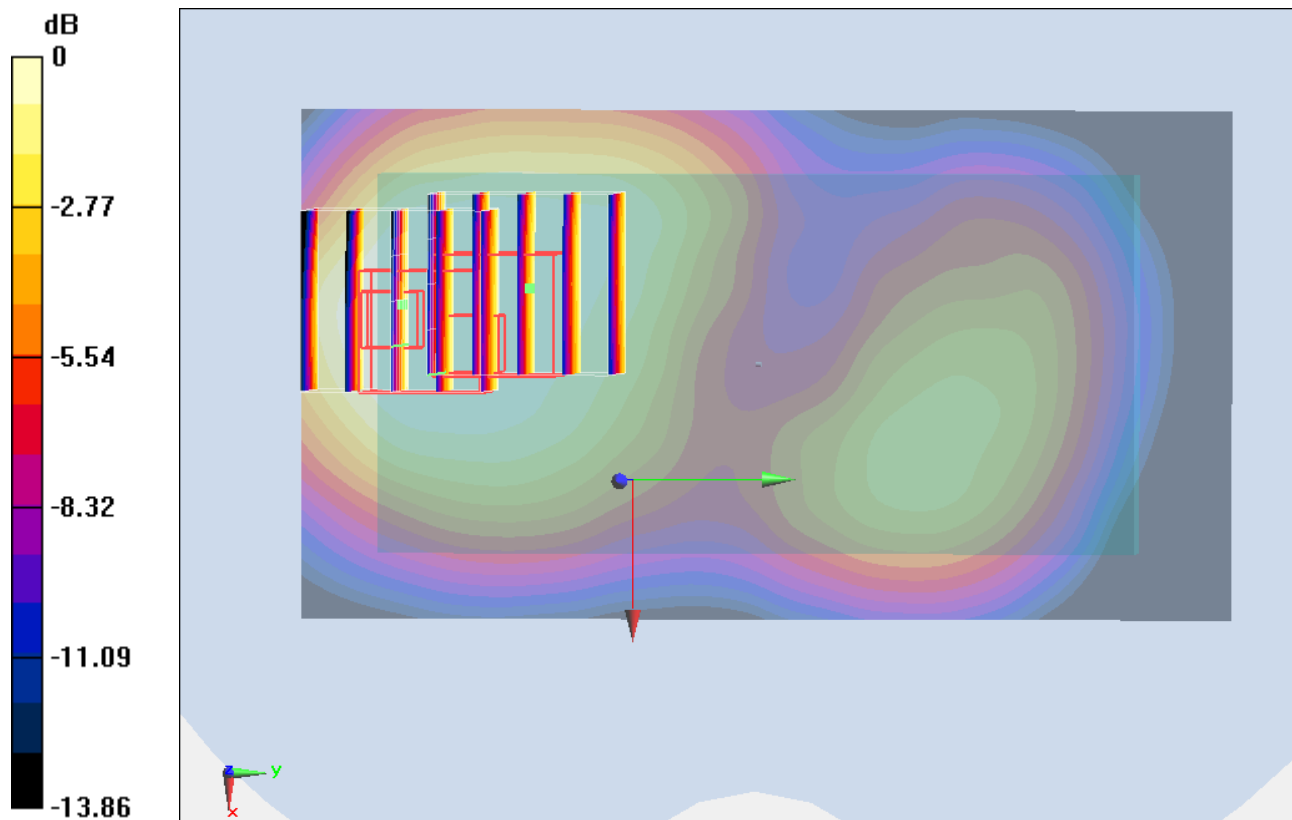

#37_GSM1900_GPRS (4 Tx slots)_Back_1cm_Ch810**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium: MSL_1900_121127 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r = 54.807$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch810/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.528 W/kg

Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.269 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.508 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.269 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 0.391 W/kg

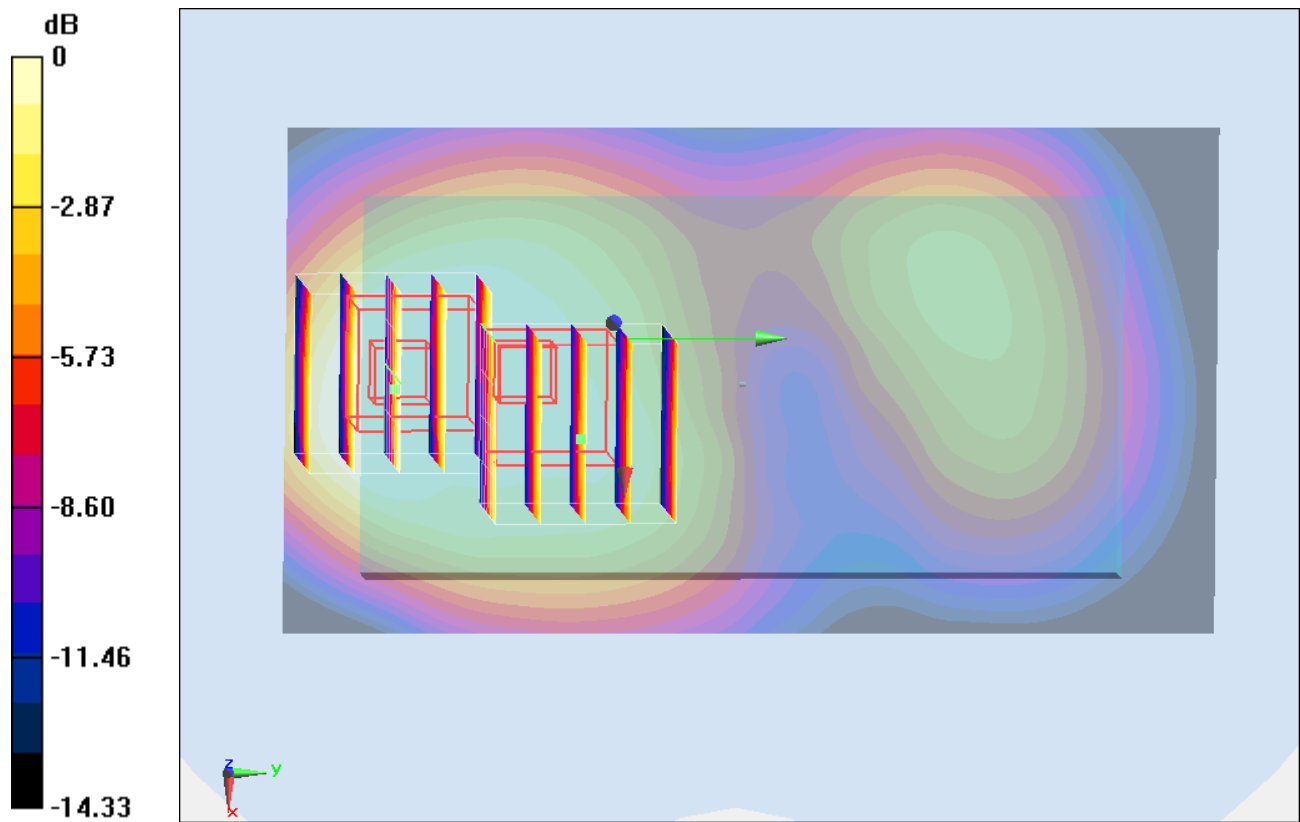

#38_GSM1900_GPRS (4 Tx slots)_Left Side_1cm_Ch810**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium: MSL_1900_121127 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r = 54.807$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch810/Area Scan (41x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.284 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.627 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

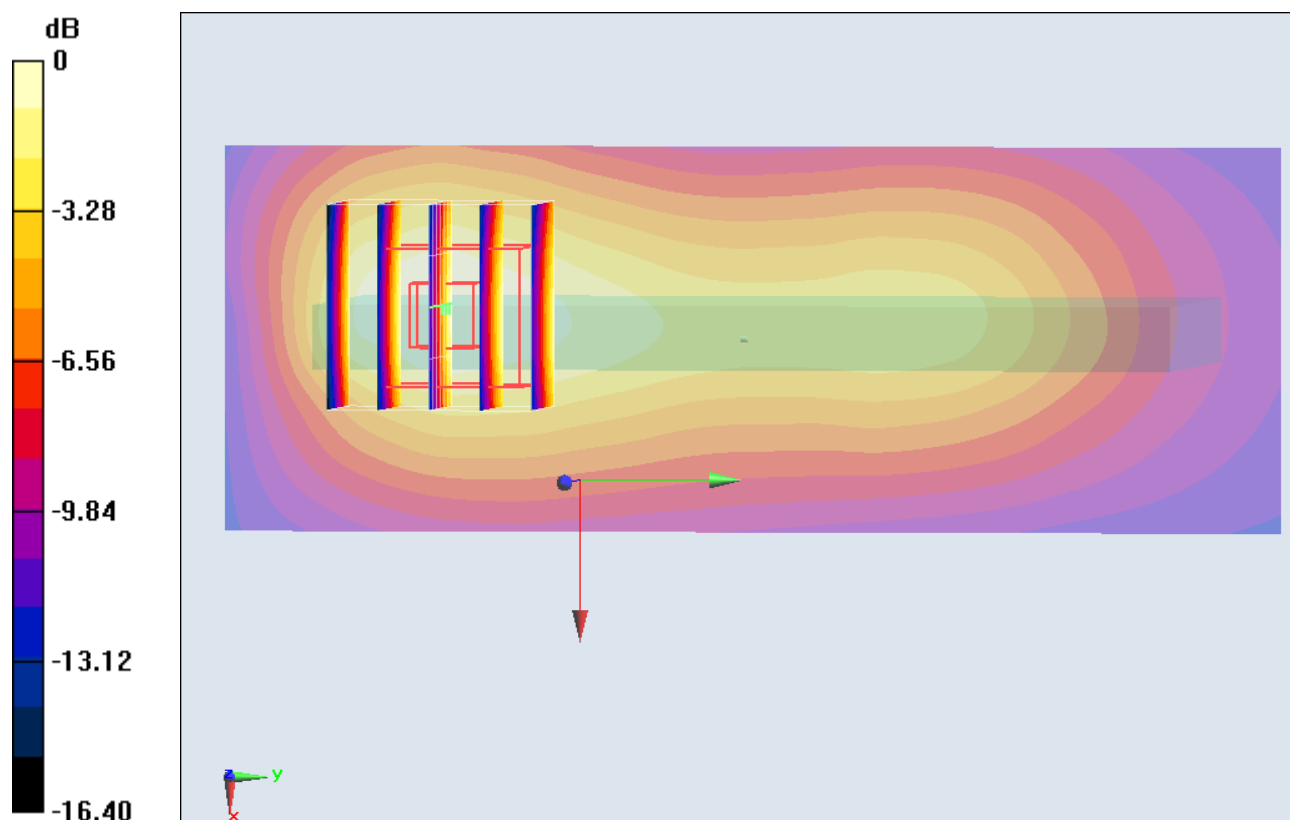

#39_GSM1900_GPRS (4 Tx slots)_Right Side_1cm_Ch810**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium: MSL_1900_121127 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r = 54.807$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch810/Area Scan (41x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.116 W/kg

Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.257 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.108 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.257 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.0990 W/kg

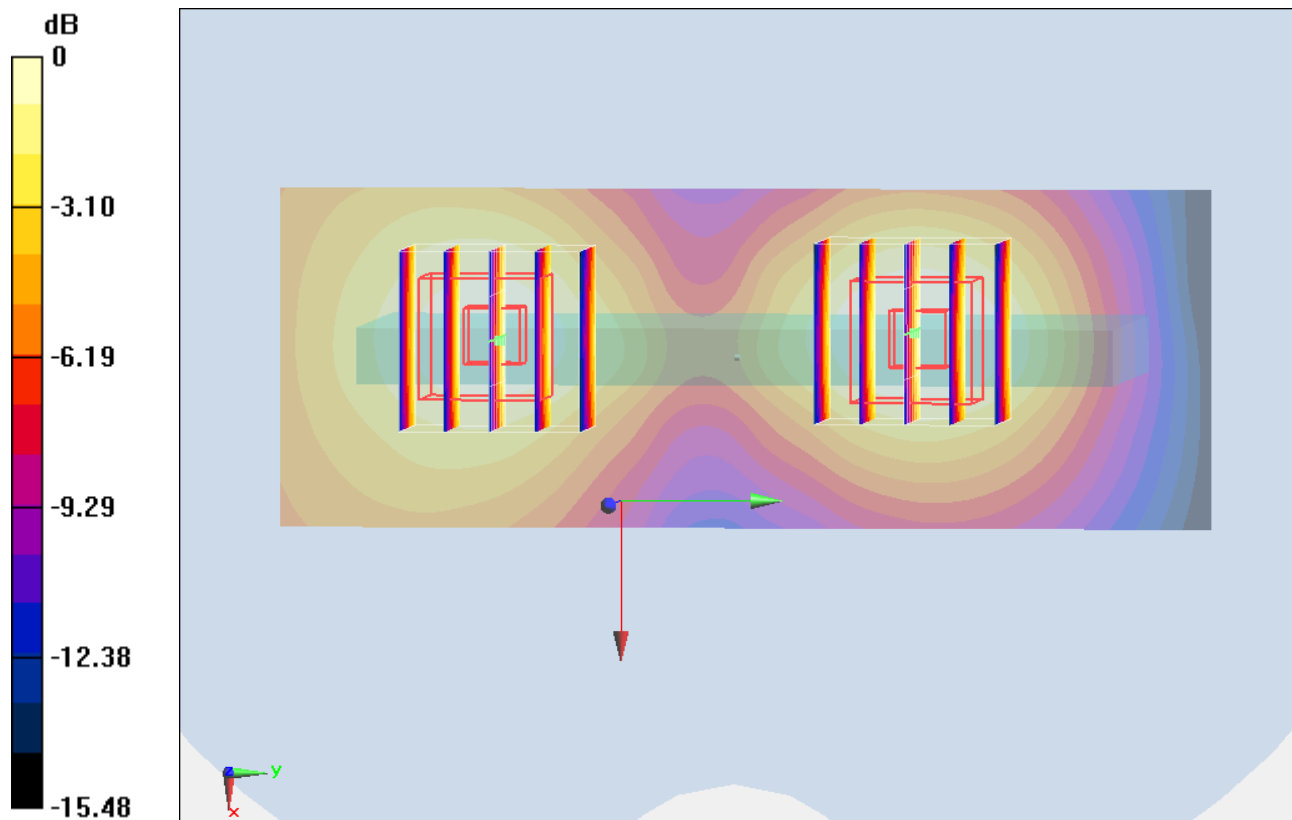

#40_GSM1900_GPRS (4 Tx slots)_Bottom Side_1cm_Ch810**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium: MSL_1900_121127 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r = 54.807$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch810/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.881 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.226 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.409 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

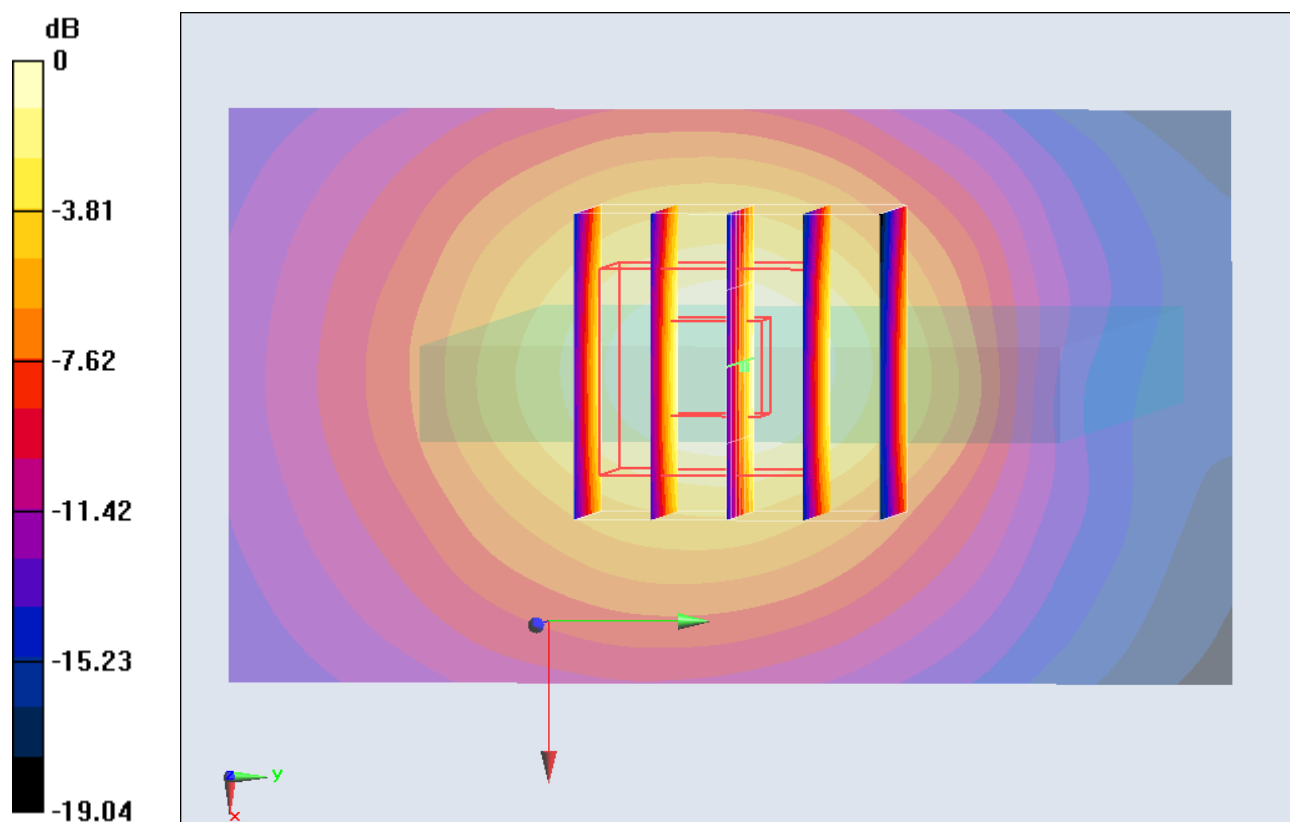

0 dB = 0.792 W/kg = -1.01 dBW/kg

#40_GSM1900_GPRS (4 Tx slots)_Bottom Side_1cm_Ch810_2D**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium: MSL_1900_121127 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r = 54.807$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch810/Area Scan (41x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.881 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.226 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.409 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

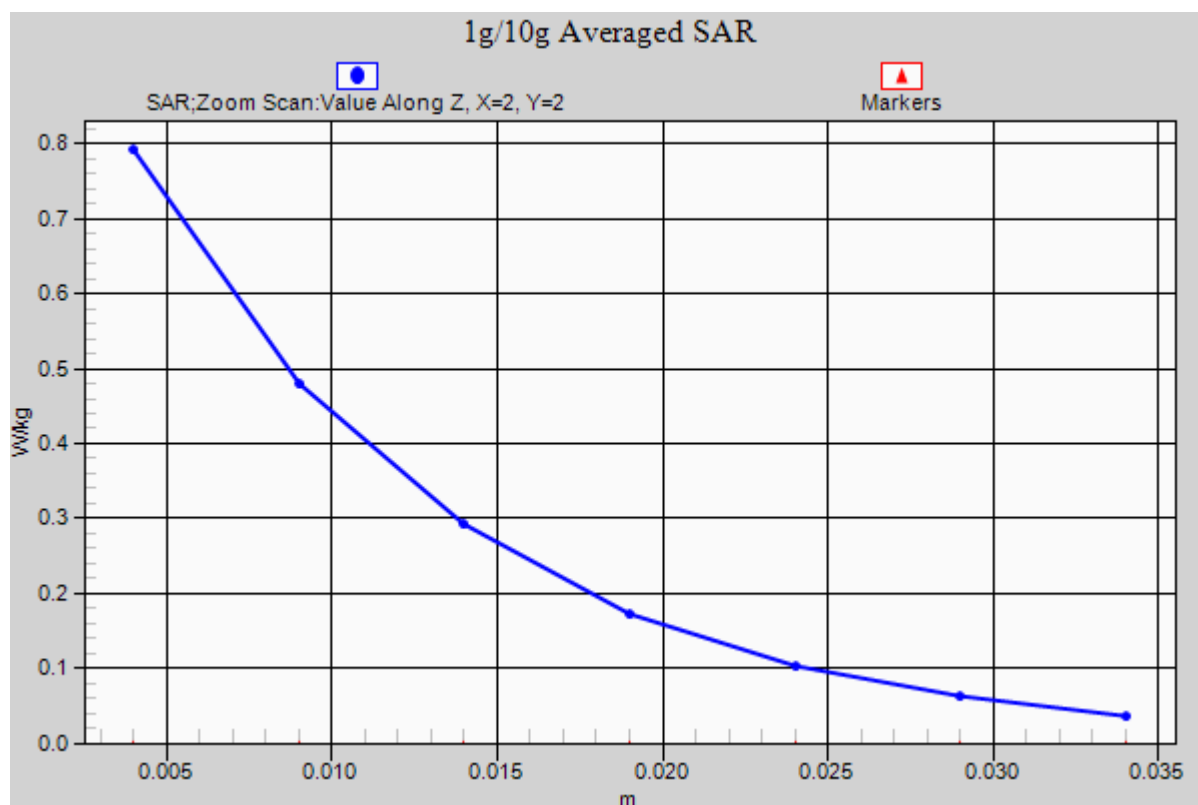

#41_GSM1900_DTM Multi-slot class 11_Front_1cm_Ch810;Headset**DUT: 2N0915**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium: MSL_1900_121127 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r = 54.807$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch810/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.688 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.064 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.343 W/kg

Maximum value of SAR (measured) = 0.568 W/kg

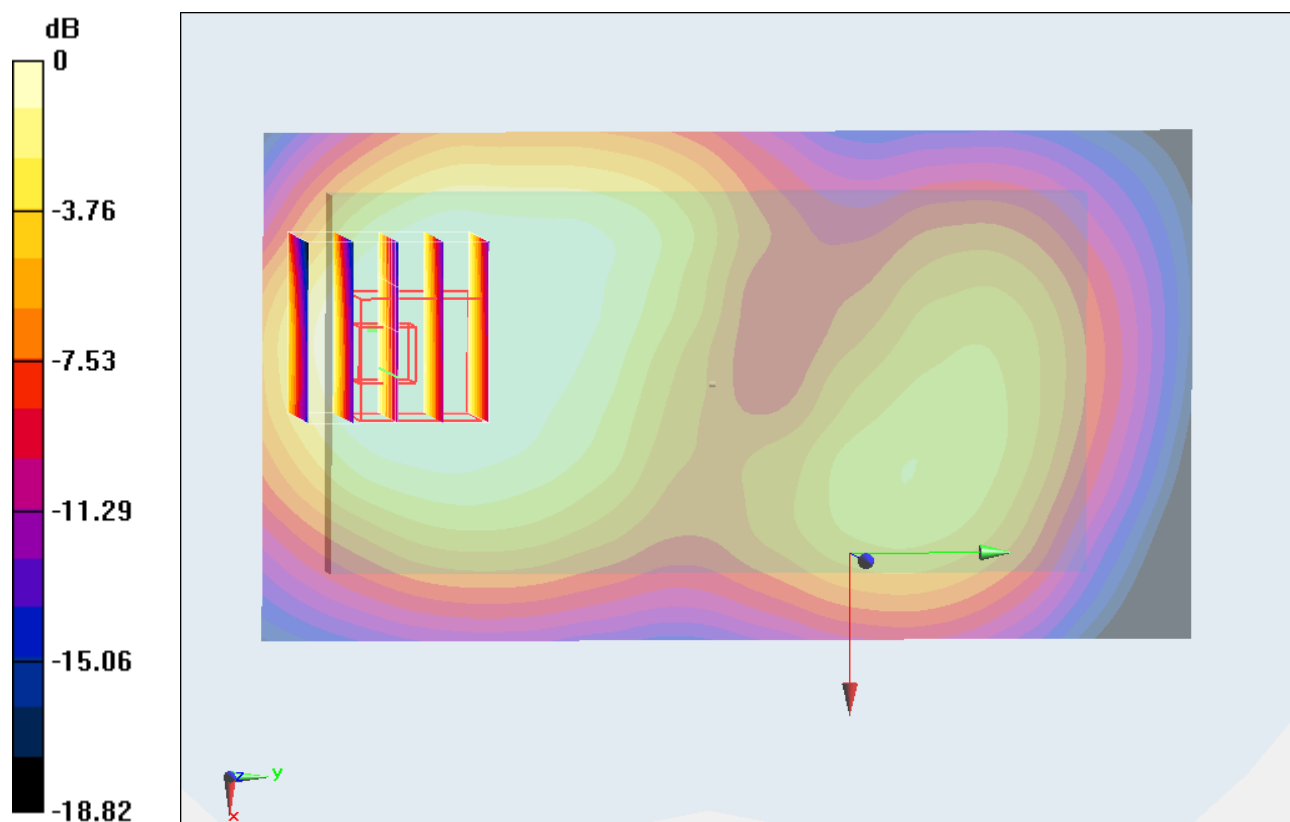

#23_WCDMA V_RMC12.2K_Front_1cm_Ch4182**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121126 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.965$ mho/m; $\epsilon_r = 53.597$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.182 W/kg


Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.806 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

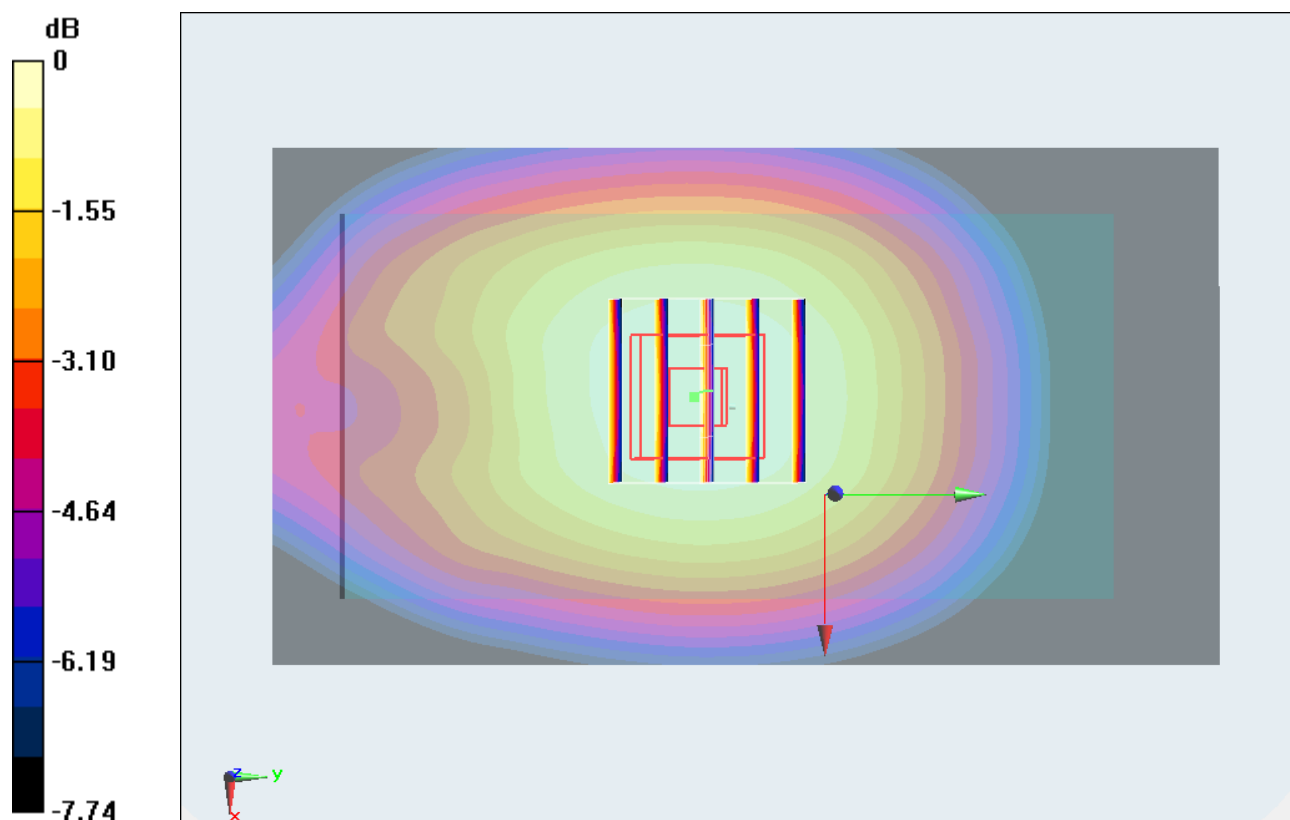

#24_WCDMA V_RMC12.2K_Back_1cm_Ch4182**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121126 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.965$ mho/m; $\epsilon_r = 53.597$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.253 W/kg


Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.070 V/m; Power Drift = 0.195 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

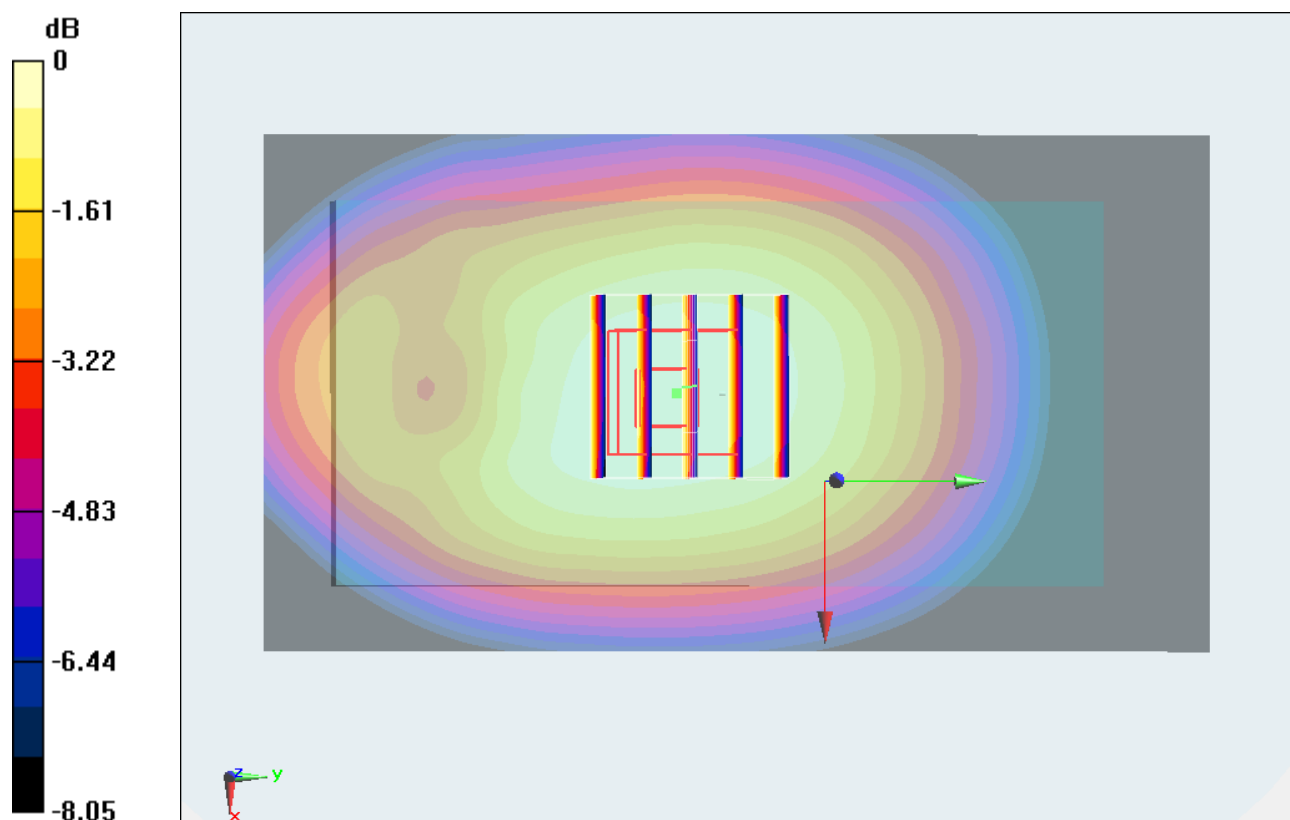

#24_WCDMA V_RMC12.2K_Back_1cm_Ch4182_2D**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121126 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.965$ mho/m; $\epsilon_r = 53.597$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.253 W/kg


Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.070 V/m; Power Drift = 0.195 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

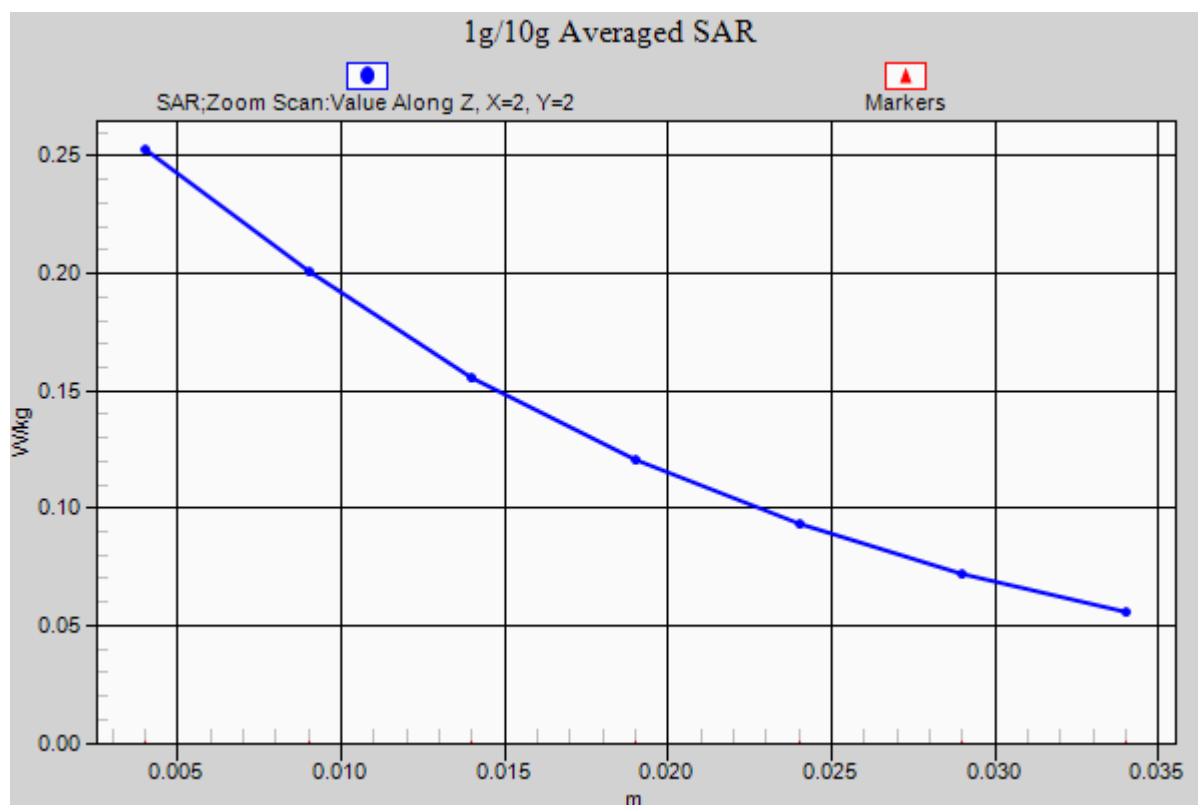

#25_WCDMA V_RMC12.2K_Left Side_1cm_Ch4182**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121126 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.965$ mho/m; $\epsilon_r = 53.597$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch4182/Area Scan (4x11x1): Measurement grid: dx=1.500mm, dy=1.500mm
Maximum value of SAR (measured) = 0.182 W/kg


Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.237 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

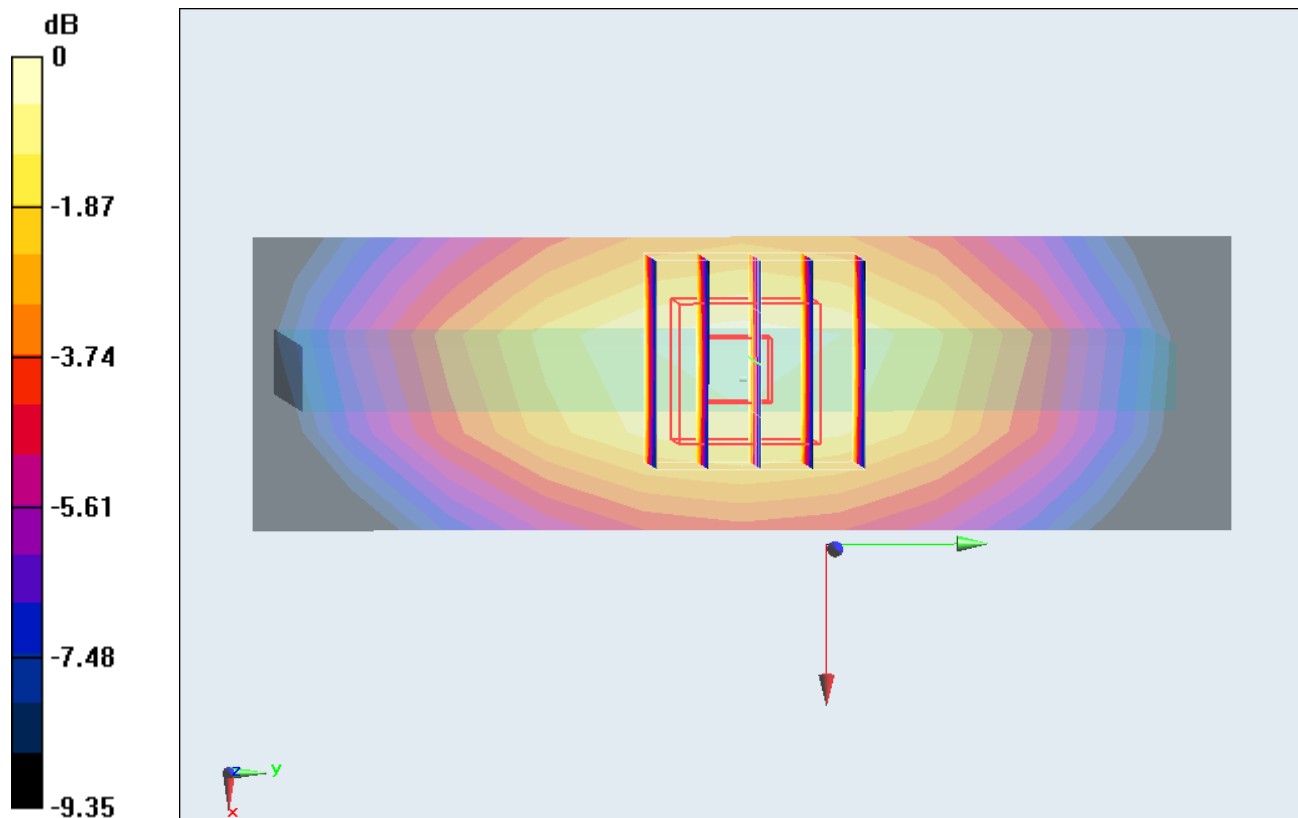

0 dB = 0.193 W/kg = -7.14 dBW/kg

#26_WCDMA V_RMC12.2K_Right Side_1cm_Ch4182**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121126 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.965$ mho/m; $\epsilon_r = 53.597$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch4182/Area Scan (31x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.260 W/kg


Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.153 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

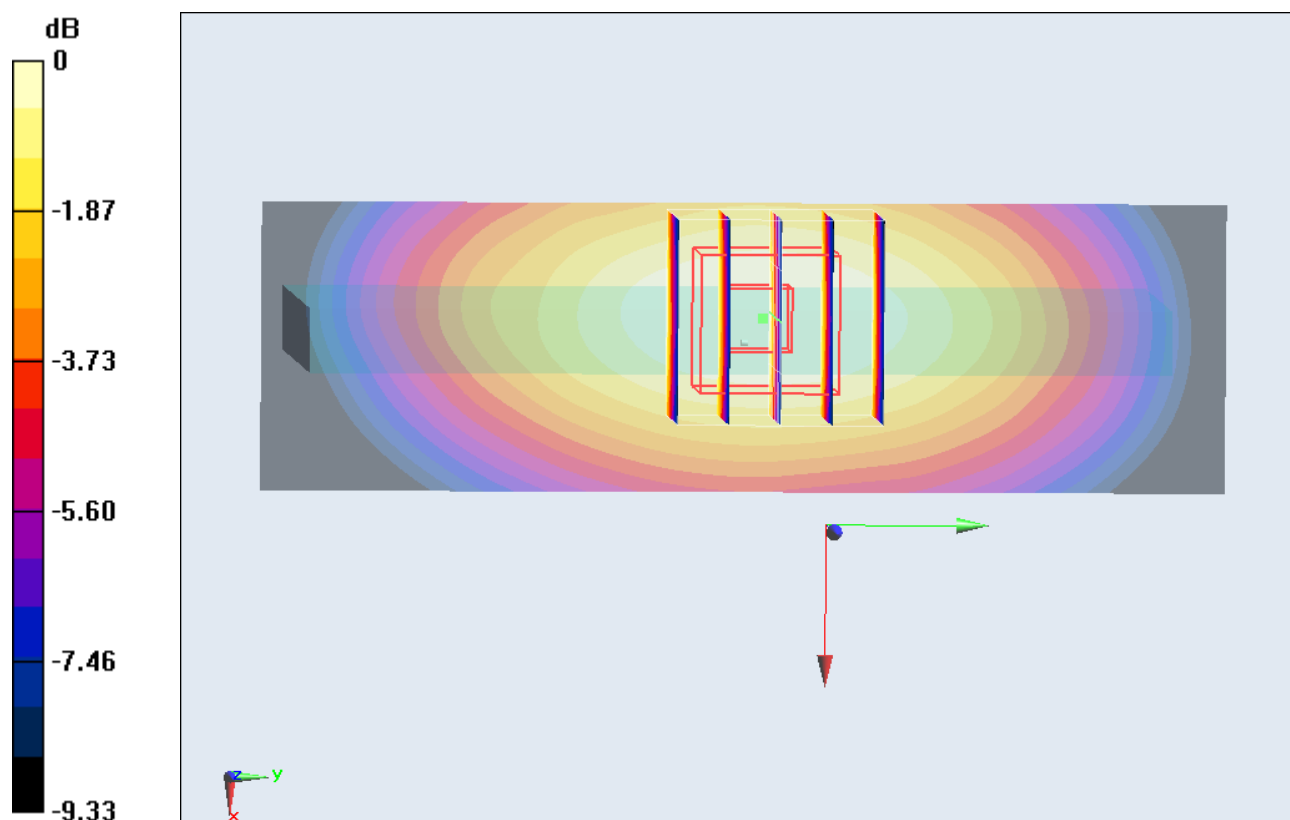

0 dB = 0.251 W/kg = -6.00 dBW/kg

#27_WCDMA V_RMC12.2K_Bottom Side_1cm_Ch4182**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121126 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.965$ mho/m; $\epsilon_r = 53.597$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch4182/Area Scan (31x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0935 W/kg


Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.176 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0871 W/kg

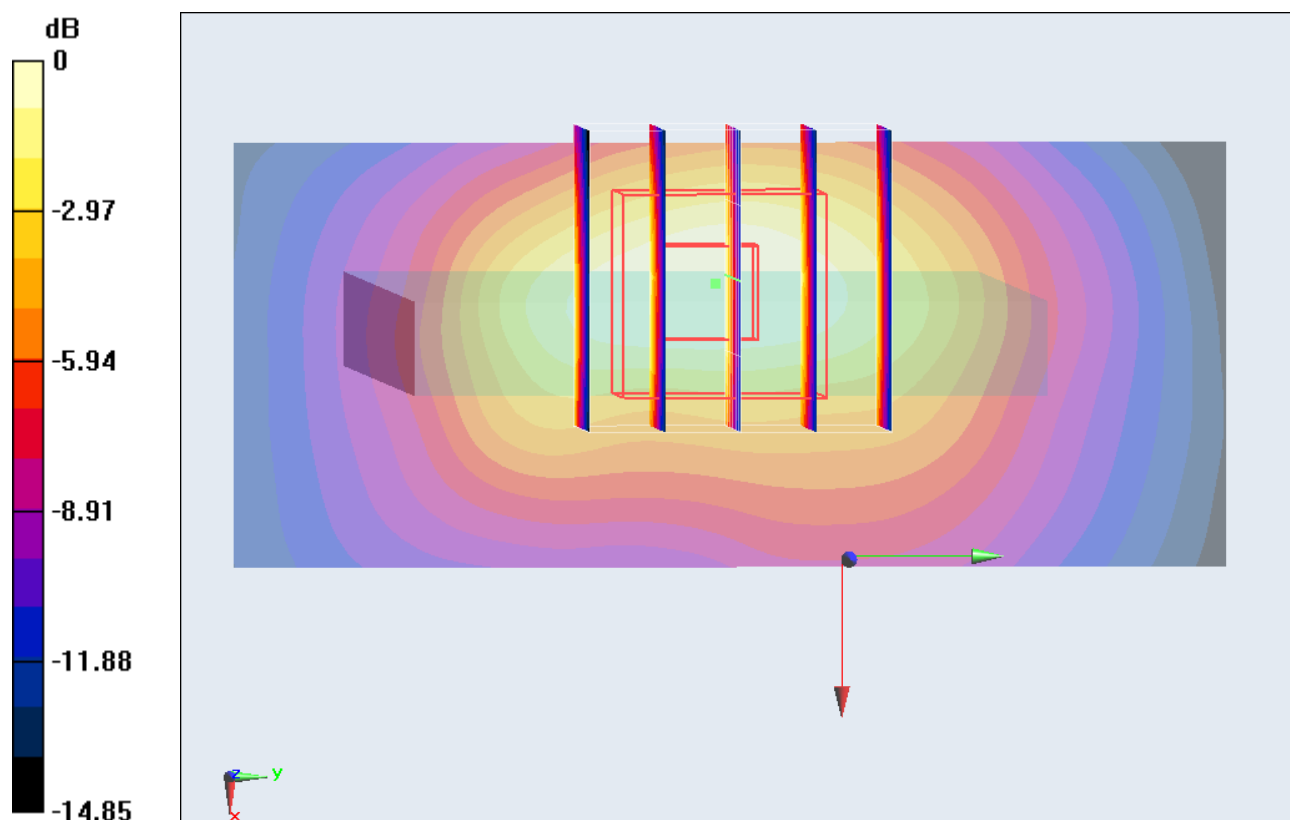

0 dB = 0.0871 W/kg = -10.60 dBW/kg

#28_WCDMA V_RMC12.2K_Back_1cm_Ch4182;Headset**DUT: 2N0915**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121126 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.965$ mho/m; $\epsilon_r = 53.597$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch4182/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.192 W/kg

Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.152 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.193 W/kg


Configuration/Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.152 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.179 W/kg

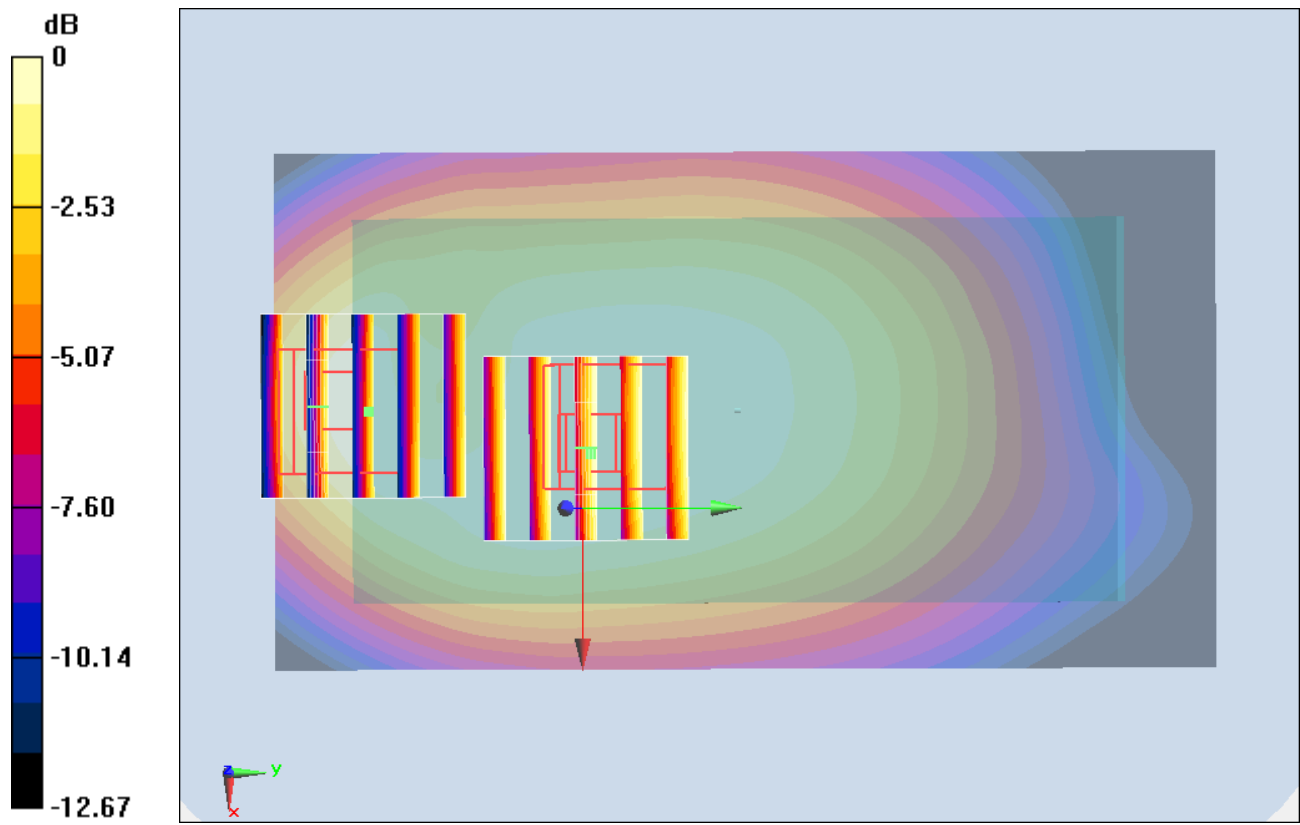

#29_WCDMA II_RMC12.2K_Front_1cm_Ch9538**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121127 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.533$ mho/m; $\epsilon_r = 54.801$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch9538/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.440 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.538 V/m; Power Drift = -0.177 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.412 W/kg

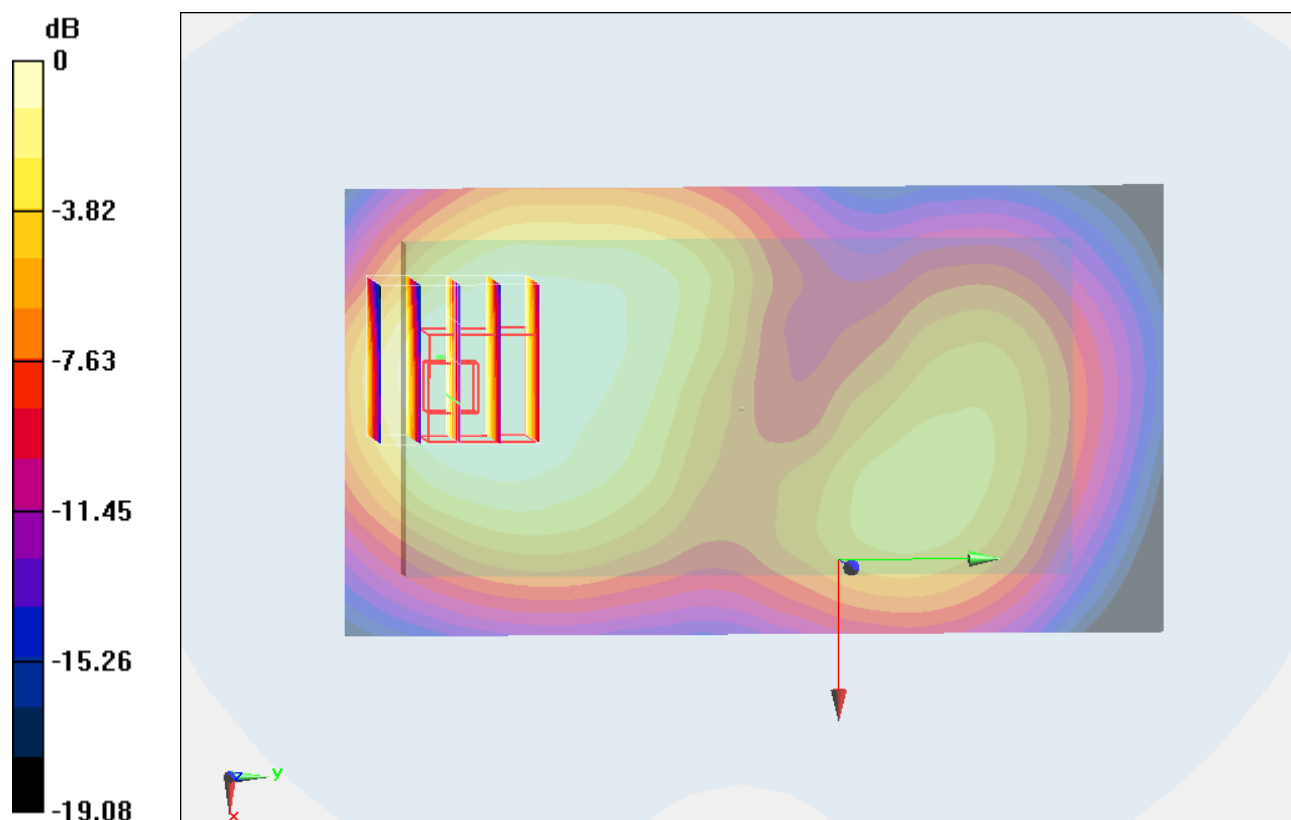

#30_WCDMA II_RMC12.2K_Back_1cm_Ch9538**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121127 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.533$ mho/m; $\epsilon_r = 54.801$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch9538/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.419 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.924 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.398 W/kg

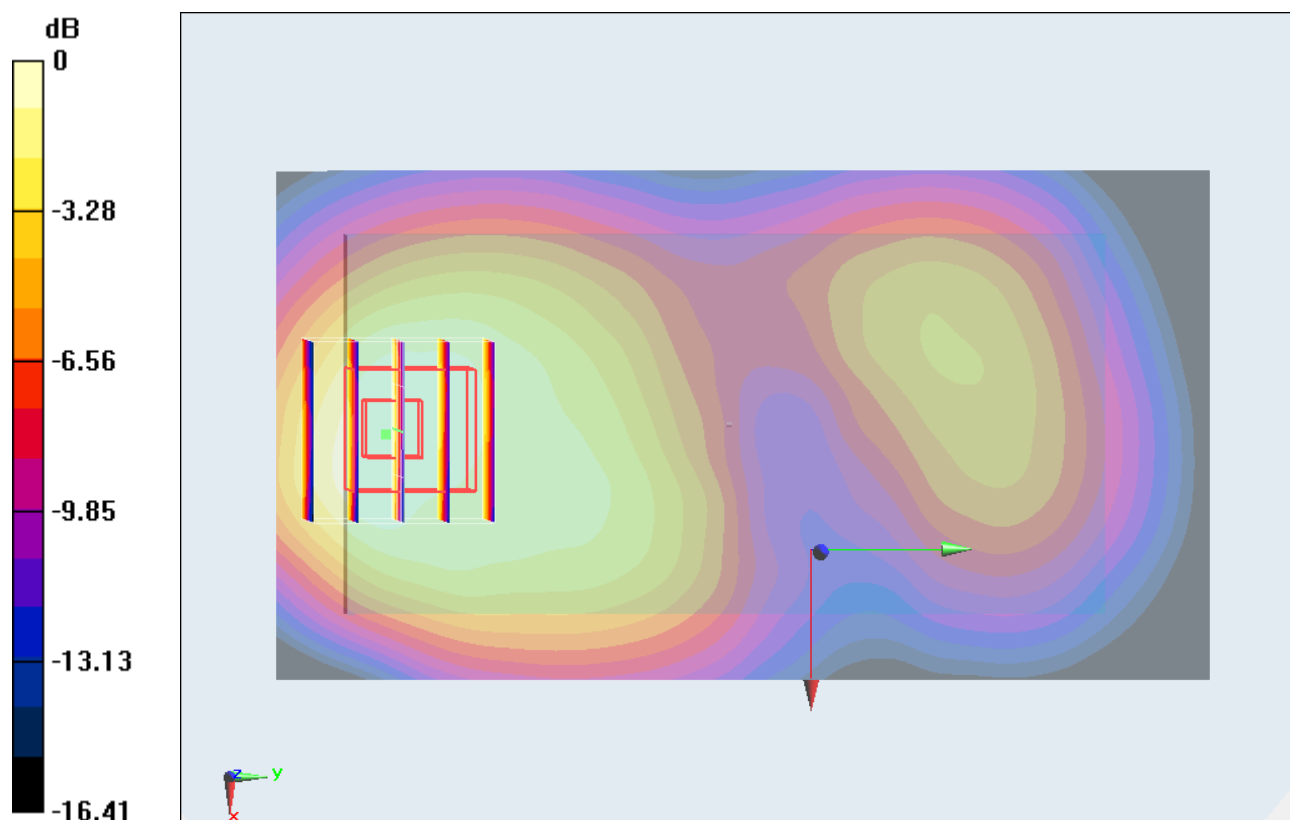

0 dB = 0.398 W/kg = -4.00 dBW/kg

#31_WCDMA II_RMC12.2K_Left Side_1cm_Ch9538**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121127 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.533$ mho/m; $\epsilon_r = 54.801$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch9538/Area Scan (41x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.194 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.824 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

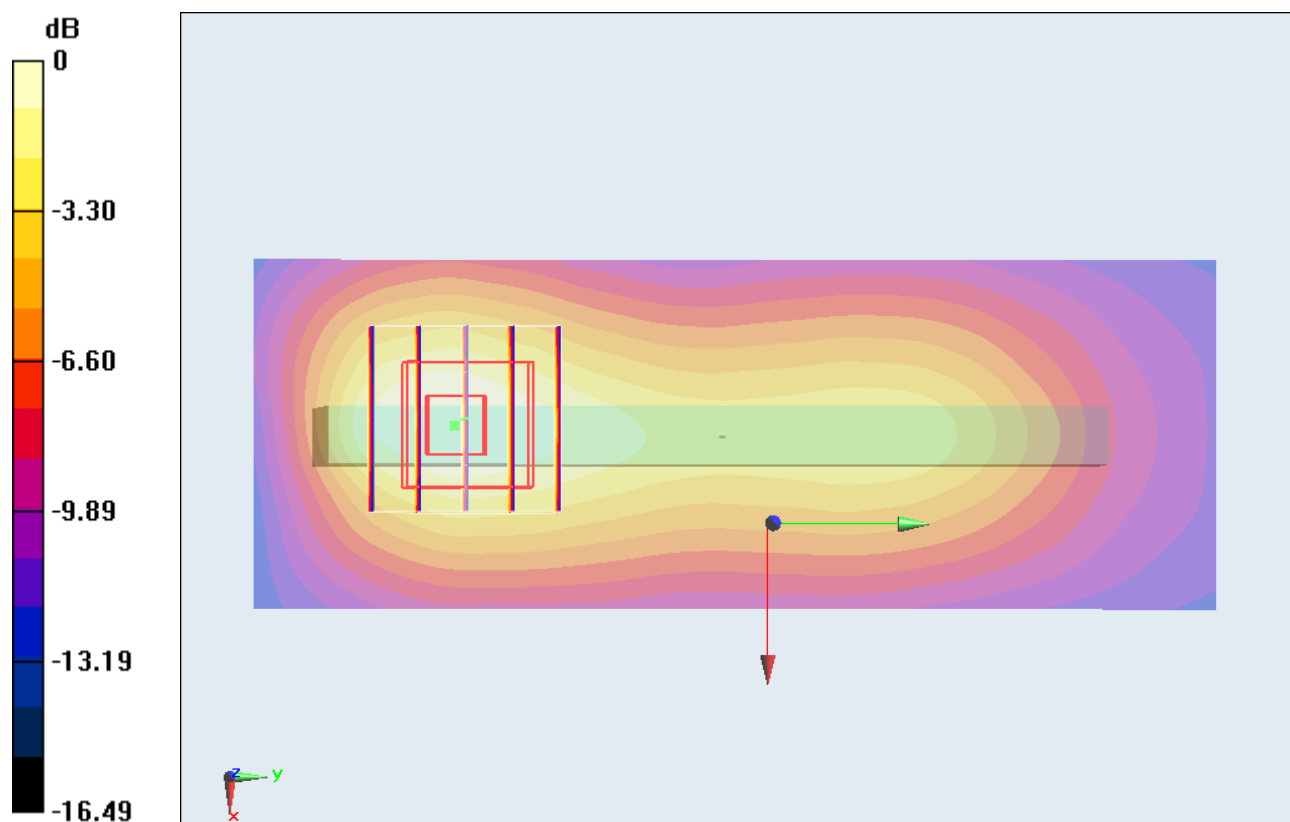

#32_WCDMA II_RMC12.2K_Right Side_1cm_Ch9538**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121127 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.533$ mho/m; $\epsilon_r = 54.801$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch9538/Area Scan (41x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0813 W/kg

Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.979 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0773 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.979 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0652 W/kg

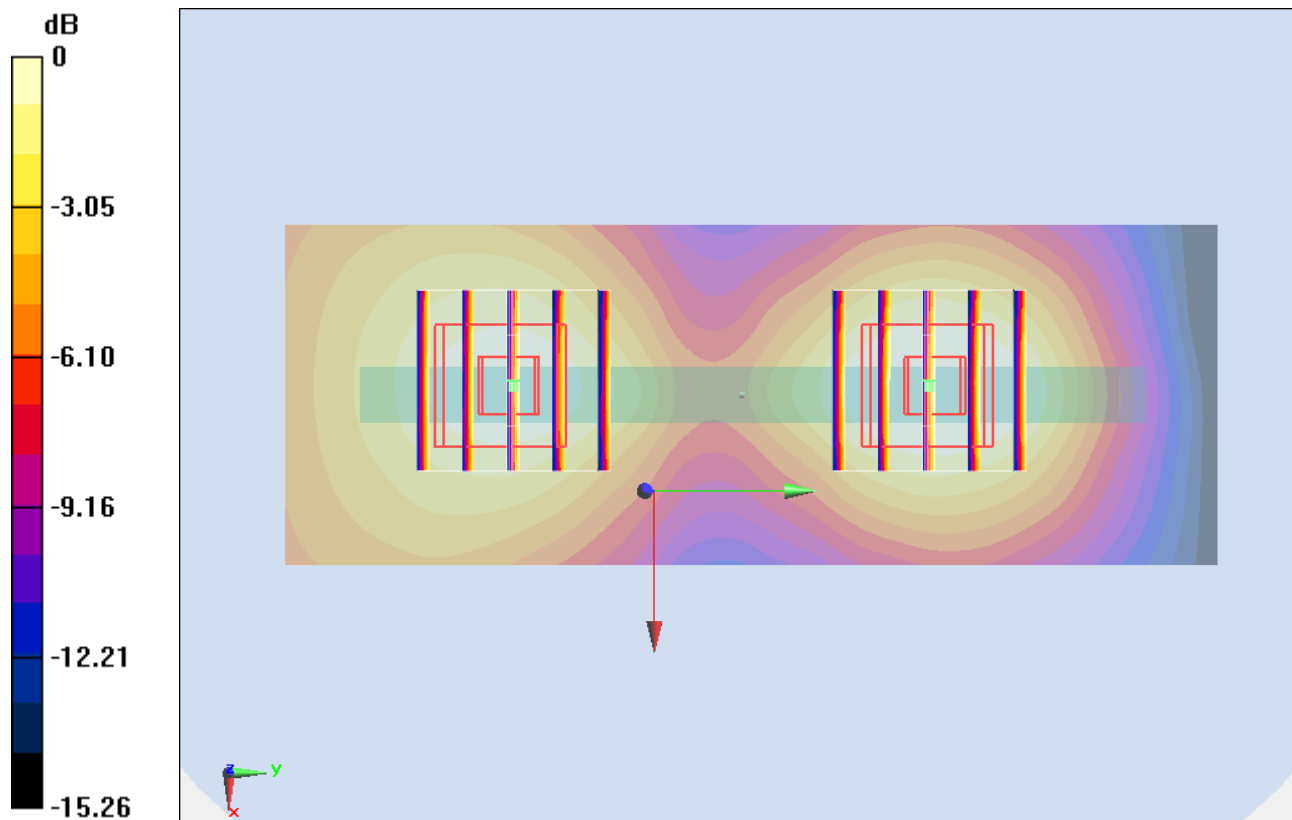

#33_WCDMA II_RMC12.2K_Bottom Side_1cm_Ch9538**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121127 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.533$ mho/m; $\epsilon_r = 54.801$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch9538/Area Scan (41x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.547 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.386 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.468 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.511 W/kg

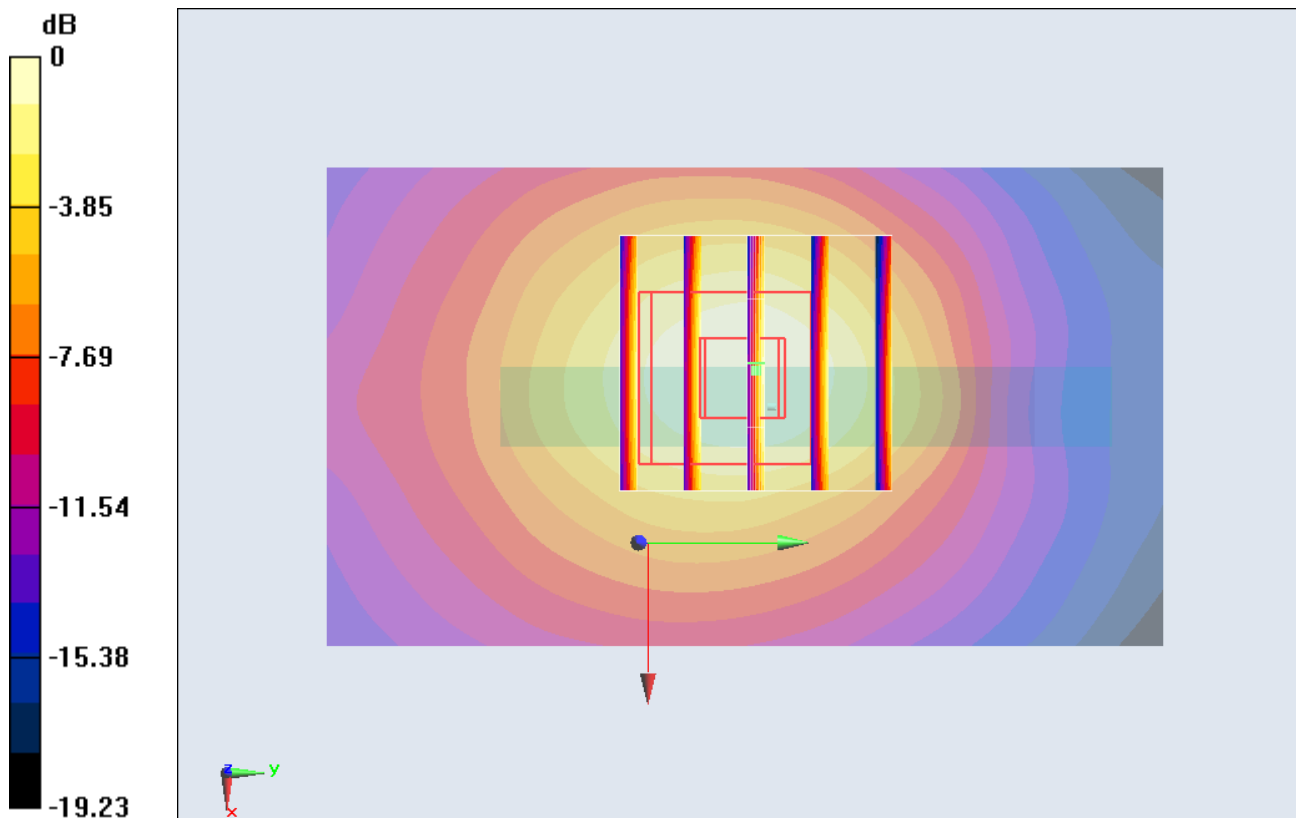

0 dB = 0.511 W/kg = -2.92 dBW/kg

#33_WCDMA II_RMC12.2K_Bottom Side_1cm_Ch9538_2D**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121127 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.533$ mho/m; $\epsilon_r = 54.801$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch9538/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.547 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.386 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.468 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.511 W/kg

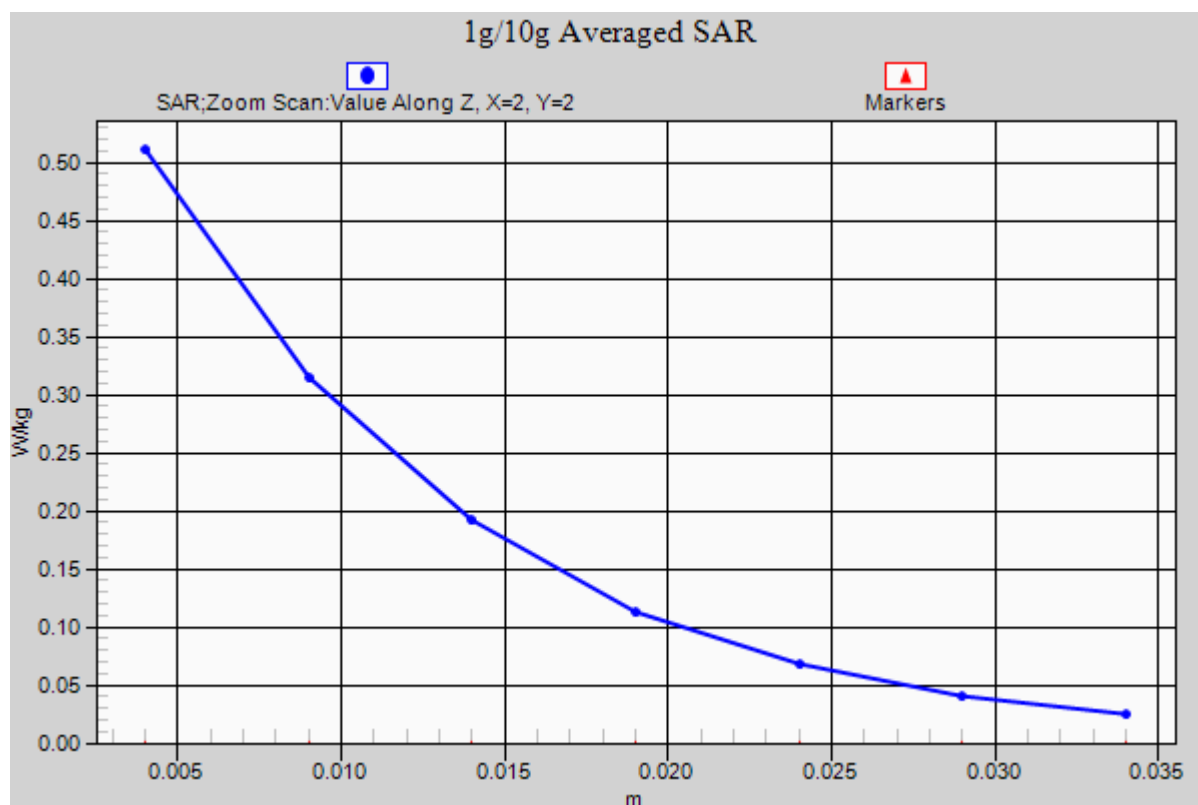

#34_WCDMA II_RMC12.2K_Front_1cm_Ch9538;Headset**DUT: 2N0915**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121127 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.533$ mho/m; $\epsilon_r = 54.801$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.7 (6848)

Configuration/Ch9538/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.406 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.641 V/m; Power Drift = -0.148 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.373 W/kg

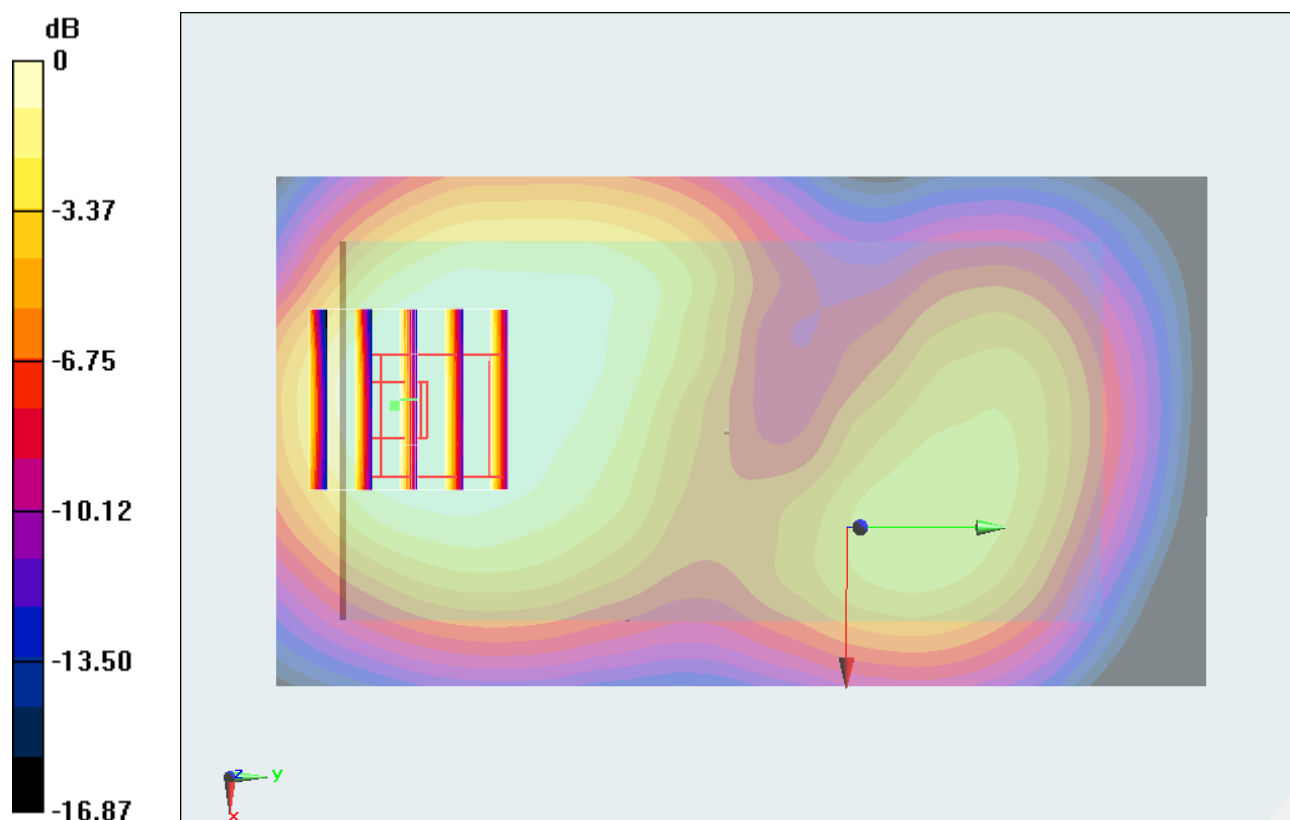

0 dB = 0.373 W/kg = -4.28 dBW/kg

#104_WLAN2.4G_802.11b_Front_1cm_Ch6**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.914$ mho/m; $\epsilon_r = 53.624$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.9 °C ; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.57, 6.57, 6.57); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (71x131x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.121 mW/g

Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.913 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.156 mW/g

SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.118 mW/g


Configuration/Ch6/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.913 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.088 mW/g

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.0666 mW/g

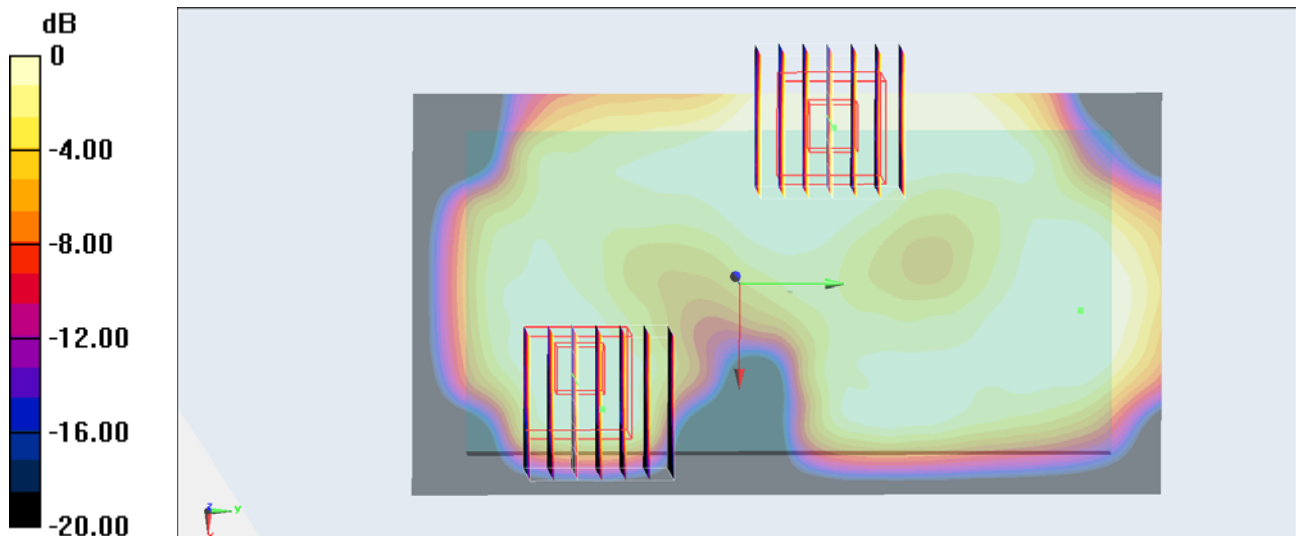

0 dB = 0.0666 mW/g = -23.53 dB mW/g

#105_WLAN2.4G_802.11b_Back_1cm_Ch6**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.914$ mho/m; $\epsilon_r = 53.624$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.9 °C ; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.57, 6.57, 6.57); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (71x131x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.252 mW/g


Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.279 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.343 mW/g

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

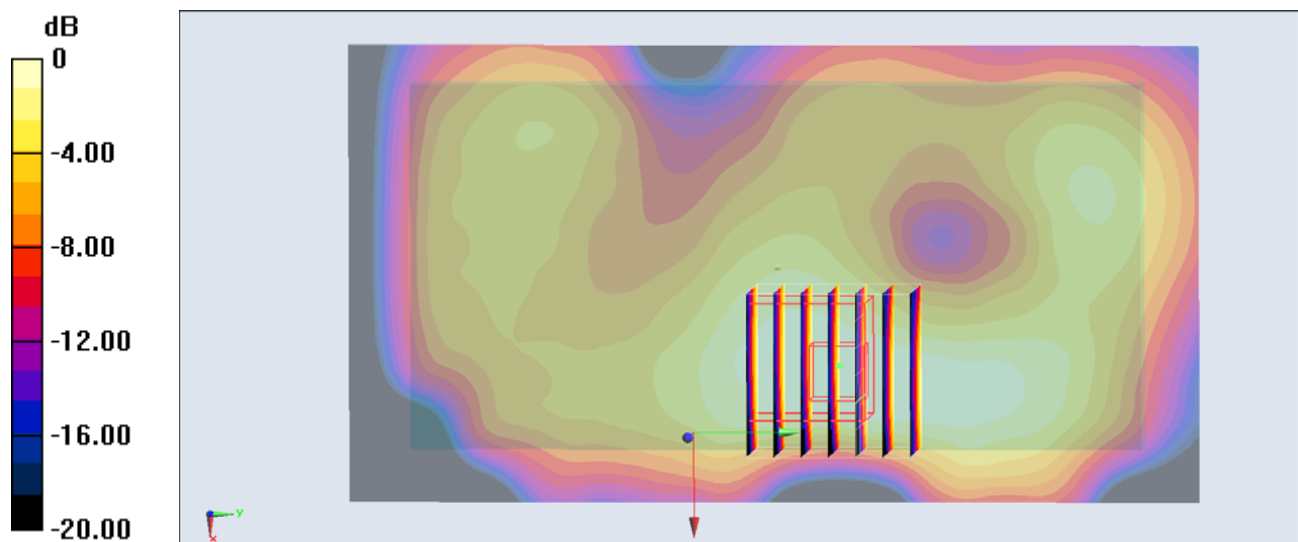

#105_WLAN2.4G_802.11b_Back_1cm_Ch6_2D**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: MSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.914$ mho/m; $\epsilon_r = 53.624$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.9 °C ; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.57, 6.57, 6.57); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (71x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.252 mW/g


Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.279 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.343 mW/g

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

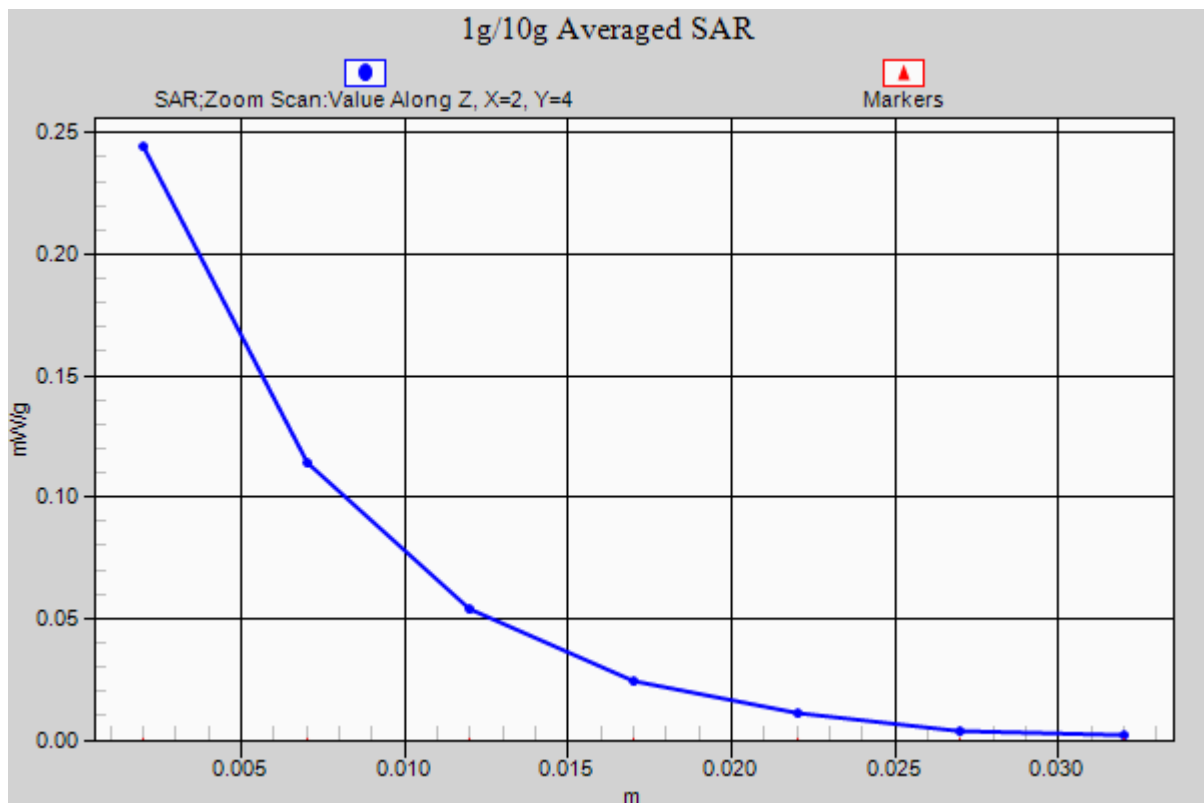

#106_WLAN2.4G_802.11b_Left side_1cm_Ch6**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.914$ mho/m; $\epsilon_r = 53.624$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.9 °C ; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.57, 6.57, 6.57); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (41x131x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.124 mW/g

Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.188 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.171 mW/g

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.130 mW/g


Configuration/Ch6/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.188 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.123 mW/g

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.0917 mW/g

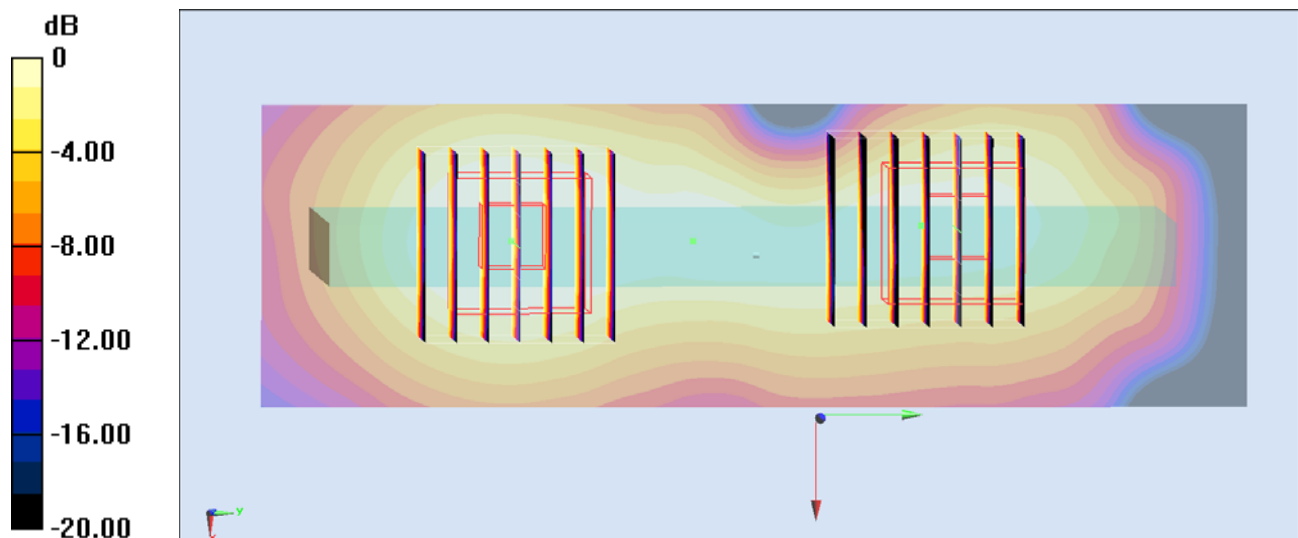

0 dB = 0.0917 mW/g = -20.75 dB mW/g

#110_WLAN2.4G_802.11b_Back_1cm_Ch6;Headset**DUT: 2N0915**

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: MSL_2450_121126 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.914$ mho/m; $\epsilon_r = 53.624$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.9 °C ; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.57, 6.57, 6.57); Calibrated: 2012/9/28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (71x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.222 mW/g



Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.486 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.288 mW/g

SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.206 mW/g

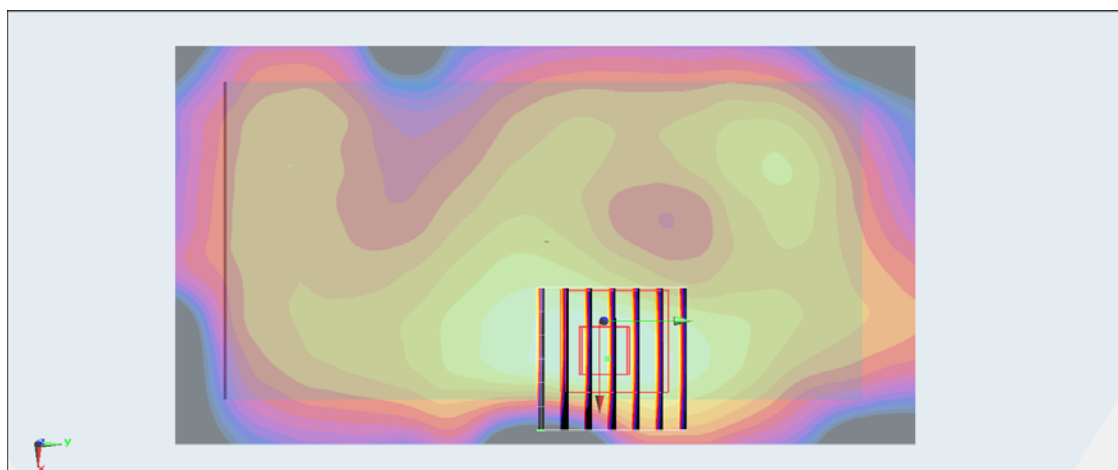

0 dB = 0.206 mW/g = -13.72 dB mW/g