



TEST REPORT

APPLICANT : Shenzhen Concox Information
Technology Co.,Ltd

PRODUCT NAME : Asset GPS Tracker

MODEL NAME : AT4

BRAND NAME : Concox

FCC ID : X7IAT4

STANDARD(S) : 47 CFR Part 22 Subpart H
47 CFR Part 24 Subpart E

RECEIPT DATE : 2018-12-24


TEST DATE : 2019-01-19 to 2019-01-28

ISSUE DATE : 2019-02-13

Edited by:


Zeng Xiaoying (Rapporteur)

Approved by:


Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Maximum ERP/EIRP and Emission Designator	5
1.4. Test Standards and Results	6
1.5. Environmental Conditions	6
2. 47 CFR Part 2, Part 22H , 24E Requirements	7
2.1. Conducted RF Output Power And ERP/EIRP	7
2.2. Peak to Average Ratio	10
2.3. 99% Occupied Bandwidth	14
2.4. Frequency Stability	17
2.5. Conducted Out of Band Emissions	19
2.6. Band Edge	22
2.7. Radiated Out of Band Emissions	24
Annex A Test Uncertainty	33
Annex B Testing Laboratory Information	34



REPORT No.: SZ18120173W02

Change History		
Version	Date	Reason for change
1.0	2019-02-13	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Shenzhen Concox Information Technology Co.,Ltd
Applicant Address:	Floor 4th, Building B, Gaoxingqi Industrial Park, Liuxian 1st Road, District 67, Bao'an, Shenzhen, China
Manufacturer:	Shenzhen Concox Information Technology Co.,Ltd
Manufacturer Address:	Floor 4th, Building B, Gaoxingqi Industrial Park, Liuxian 1st Road, District 67, Bao'an, Shenzhen, China

1.2. Equipment Under Test (EUT) Description

Product Name:	Asset GPS Tracker	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	NT97_MB_V2.1	
Software Version:	NT97_10_A1D_D23_R0_V02_FCC_20170726_1422	
Modulation Type:	GPRS Mode with GMSK Modulation	
Operating Frequency Range:	GSM 850MHz: Tx: 824.2 - 848.8MHz (at intervals of 200kHz); Rx: 869.2 - 893.8MHz (at intervals of 200kHz) GSM 1900MHz: Tx: 1850.2 - 1909.8MHz (at intervals of 200kHz); Rx: 1930.2 - 1989.8MHz (at intervals of 200kHz)	
Antenna Type:	Bracket Antenna	
Antenna Gain:	GSM 850:	-1.5 dBi
	GSM1900:	-1.5 dBi
Operating voltage:	Normal(NV):	3.7 V
Accessory Information:	Battery	
	Brand Name:	Weishi
	Model No.:	PL165182
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	10000mAh
	Rated Voltage:	3.7V
	Charge Limit:	4.2V

Accessory Information:	AC Adapter	
	Brand Name:	Huajin
	Model No.:	HJ-0502000N2-US
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	100-240V ~ 50/60Hz 0.3A
	Rated Output:	5V=2.0A

Note 1: The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula $F(n)=1850.2+0.2*(n-512)$, $512 \leq n \leq 810$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Maximum ERP/EIRP and Emission Designator

System	Maximum ERP/EIRP		Emission Designator
	(dBm)	(W)	
GSM850	28.50	0.708	248KGXW
GSM1900	27.63	0.579	254KGXW

1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 2 (10-1-12 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-12 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-12 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	2.1046, 22.913(a), 24.232(a)	Conducted RF Output Power and EIPR/ERP	Jan 19, 2019 Jan 28, 2019	Gao Mingzhou	PASS
2	24.232(d)	Peak - Average Ratio	Jan 19, 2019	Gao Mingzhou	PASS
3	2.1049	99% Occupied Bandwidth	Jan 19, 2019	Gao Mingzhou	PASS
4	2.1055, 22.355, 24.235	Frequency Stability	Jan 19, 2019	Gao Mingzhou	PASS
5	2.1051, 22.917(a), 24.238(a)	Conducted Out of Band Emissions	Jan 19, 2019	Gao Mingzhou	PASS
6	2.1051, 22.917(a), 24.238(a)	Band Edge	Jan 19, 2019	Gao Mingzhou	PASS
7	2.1051, 22.917(a), 24.238(a)	Radiated Out of Band Emissions	Jan 28, 2019	Ya Xinhou	PASS

Note 1: The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03 (Oct 27, 2017) and ANSI/TIA-603-E-2016.

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 26.5dB contains two parts that cable loss 16.5dB and power splitter attenuator 10dB.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2.47 CFR Part 2, Part 22H , 24E Requirements

2.1. Conducted RF Output Power And ERP/EIRP

2.1.1. Requirement


According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

2.1.2. Test Description

Test Setup:

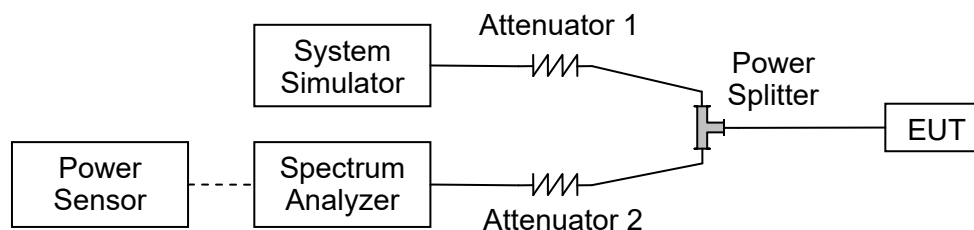

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

$$\text{EIRP (dBm)} = \text{Conducted Output Power (dBm)} + \text{Antenna Gain (dBi)}$$

$$\text{ERP (dBm)} = \text{EIPR (dBm)} - 2.15$$



2.1.3. Test Results

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

Conducted RF Output Power

GSM850	Average Power (dBm)		
TX Channel	128	190	251
Frequency (MHz)	824.2	836.6	848.8
GPRS 1 Tx slot	32.15	32.09	32.13
GPRS 2 Tx slots	31.12	31.05	31.16
GPRS 3 Tx slots	29.25	29.12	29.16
GPRS 4 Tx slots	27.85	27.80	27.94

GSM1900	Average Power (dBm)		
TX Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GPRS 1 Tx slot	28.88	29.12	29.13
GPRS 2 Tx slots	28.15	28.05	27.80
GPRS 3 Tx slots	26.40	26.25	26.09
GPRS 4 Tx slots	25.43	25.32	25.11

**Effective Radiated Power and Effective Isotropic Radiated Power**

GSM850	Measured ERP (dBm)		
TX Channel	128	190	251
Frequency (MHz)	824.2	836.6	848.8
GPRS 1 Tx slot	28.50	28.44	28.48
GPRS 2 Tx slots	27.47	27.40	27.51
GPRS 3 Tx slots	25.60	25.47	25.51
GPRS 4 Tx slots	24.20	24.15	24.29

GSM1900	Measured EIRP (dBm)		
TX Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GPRS 1 Tx slot	27.38	27.62	27.63
GPRS 2 Tx slots	26.65	26.55	26.30
GPRS 3 Tx slots	24.90	24.75	24.59
GPRS 4 Tx slots	23.93	23.82	23.61


2.2. Peak to Average Ratio

2.2.1. Requirement

According to FCC 24.232(d) the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2. Test Description

Test Setup:

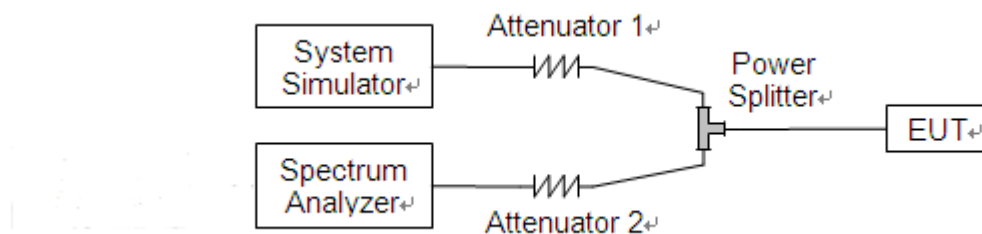

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2.2.3. Test procedure

1. For GSM/EDGE operating mode:
 - a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
 - b. Set EUT in maximum output power, and triggered the bust signal.
 - c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.
2. For UMTS operating mode:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.



2.2.4. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Band	Channel	Frequency (MHz)	Peak to Average ratio	Limit	Verdict
			dB	dB	
GPRS 850MHz	128	824.2	0.05	13	PASS
	190	836.6	0.08		PASS
	251	848.8	0.05		PASS
GPRS 1900MHz	512	1850.2	0.03		PASS
	661	1880.0	0.04		PASS
	810	1909.8	0.02		PASS



GPRS 850MHz CH128 824.2MHz



GPRS 850MHz CH190 836.6MHz



GPRS 850MHz CH251 848.8MHz






GPRS 1900MHz CH512 1850.2MHz



GPRS 1900MHz CH661 1880.0MHz



GPRS 1900MHz CH810 1909.8MHz

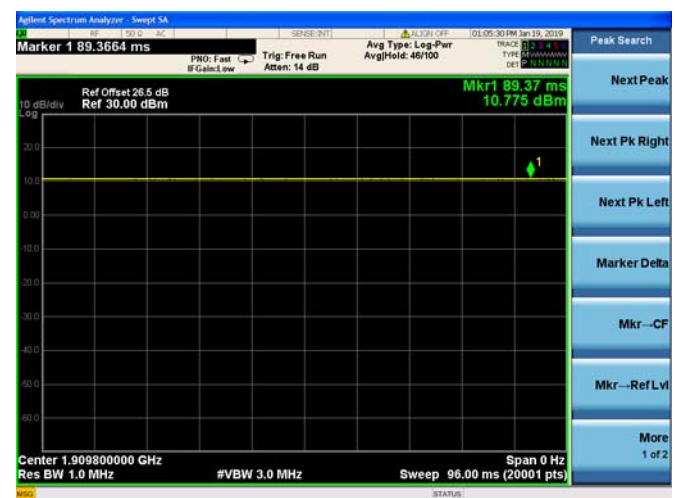


2.3.99% Occupied Bandwidth

2.3.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

2.3.2. Test Description

Test Setup:

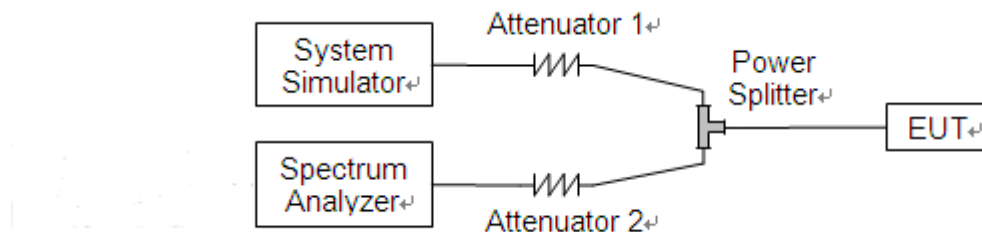


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.



2.3.3. Test Result


The lowest, middle and highest channels are selected to perform testing to record the 99% occupied bandwidth.

Band	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26dB Bandwidth (kHz)
GPRS 850MHz	128	824.2	243.13	316.8
	190	836.6	241.47	308.0
	251	848.8	247.83	317.7
GPRS 1900MHz	512	1850.2	254.22	324.1
	661	1880.0	251.10	321.8
	810	1909.8	243.74	318.6

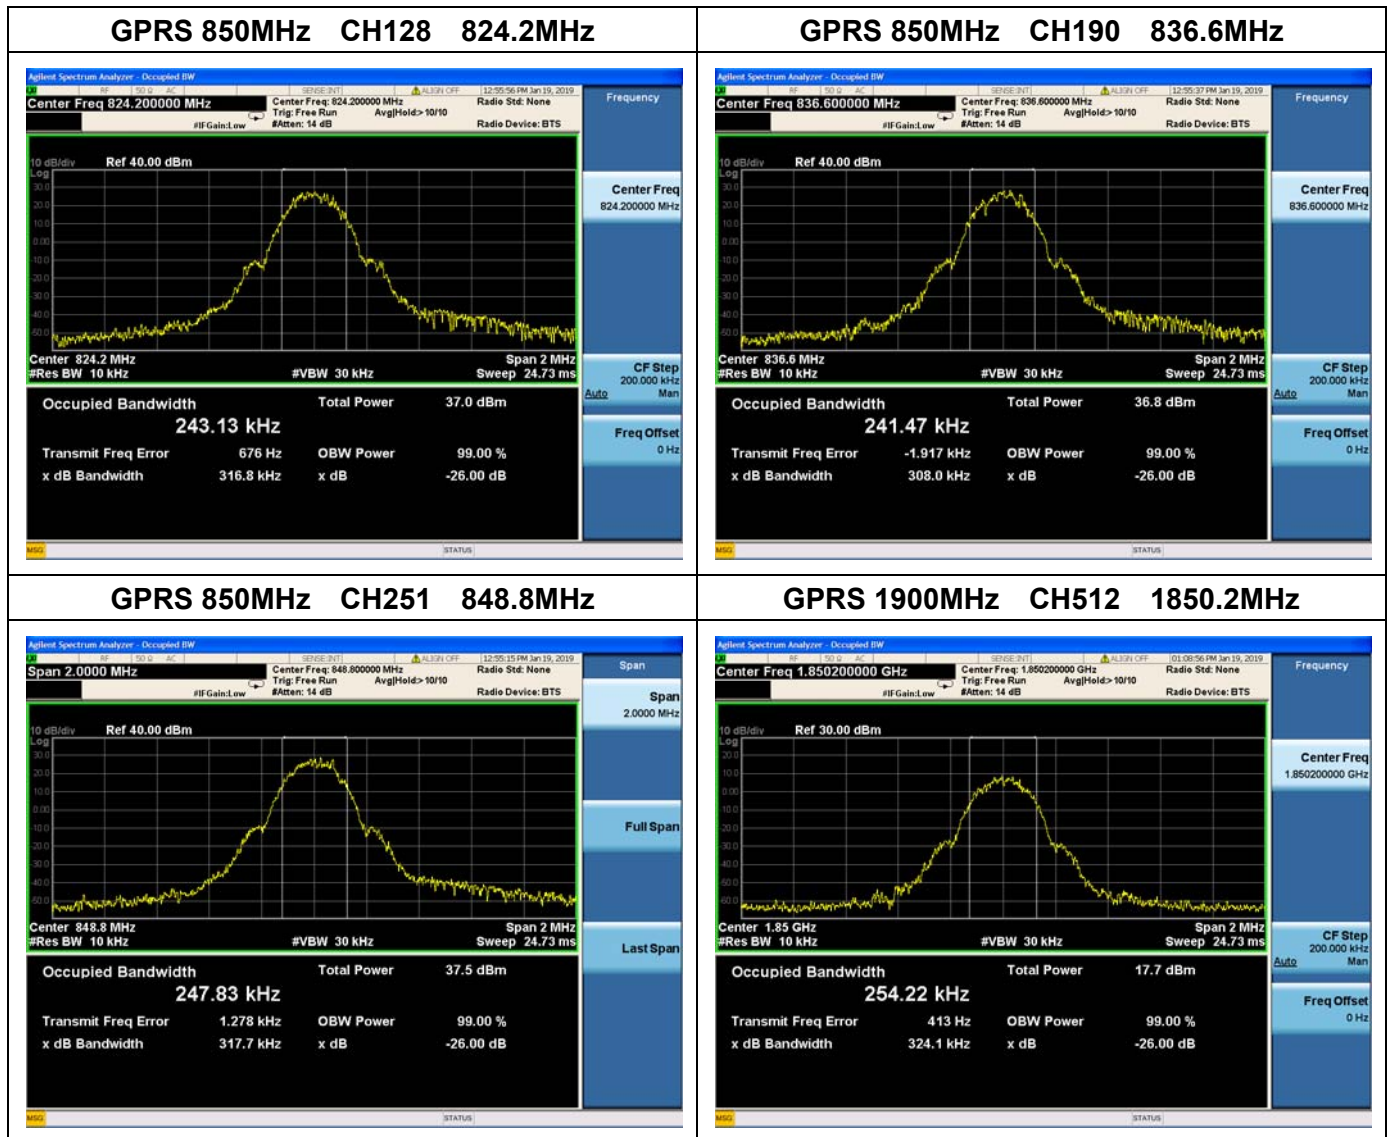




GPRS 1900MHz CH661 1880.0MHz

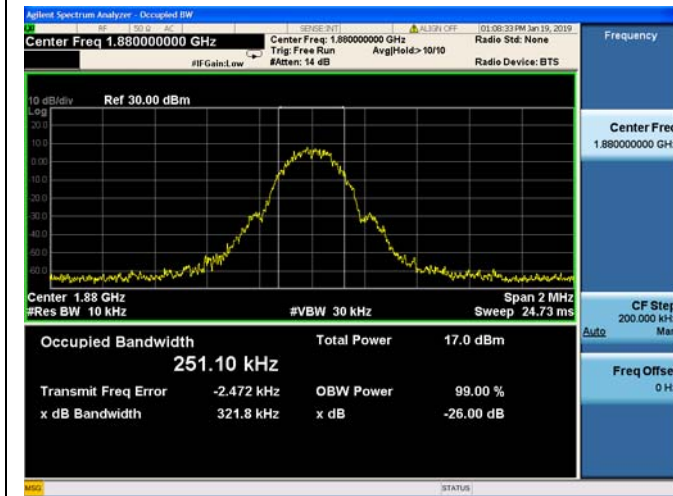

GPRS 1900MHz CH810 1909.8MHz

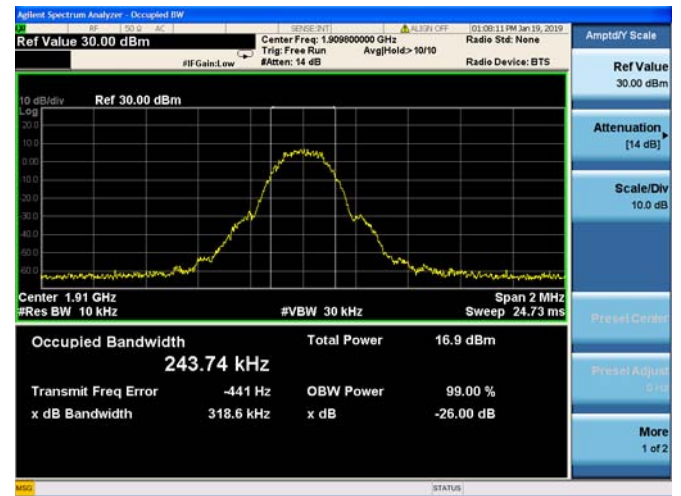

2.4. Frequency Stability


2.4.1. Requirement

According to FCC section 22.355, 24.235 and 27.54 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2. Test Description

Test Setup:

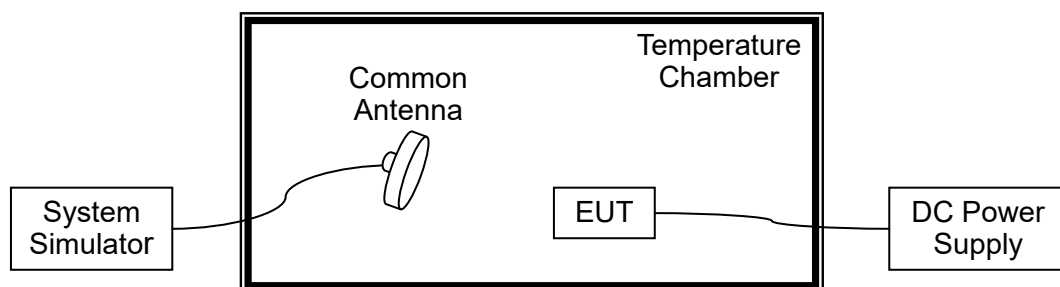

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.



2.4.3. Test Result

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.255VDC and 3.145VDC, which are specified by the applicant.

GPRS 850MHz, Channel 190, Frequency 836.6MHz					
Limit = $\pm$ 2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.7	+20(Ref)	35	0.042	PASS
100		-30	-26	-0.031	
100		-20	-7	-0.008	
100		-10	-37	-0.044	
100		0	-53	-0.063	
100		+10	23	0.027	
100		+20	65	0.078	
100		+30	61	0.073	
100		+40	35	0.042	
100		+50	85	0.102	
115	4.255	+20	-69	-0.082	
85	3.145	+20	-17	-0.020	

GPRS 1900MHz, Channel 661, Frequency 1880.0MHz					
Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.7	+20(Ref)	56	0.030	PASS
100		-30	47	0.025	
100		-20	35	0.019	
100		-10	-35	-0.019	
100		0	-67	-0.036	
100		+10	-23	-0.012	
100		+20	52	0.028	
100		+30	29	0.015	
100		+40	22	0.012	
100		+50	35	0.019	
115	4.255	+20	23	0.012	
85	3.145	+20	-49	-0.026	


2.5. Conducted Out of Band Emissions

2.5.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.5.2. Test Description

Test Setup:

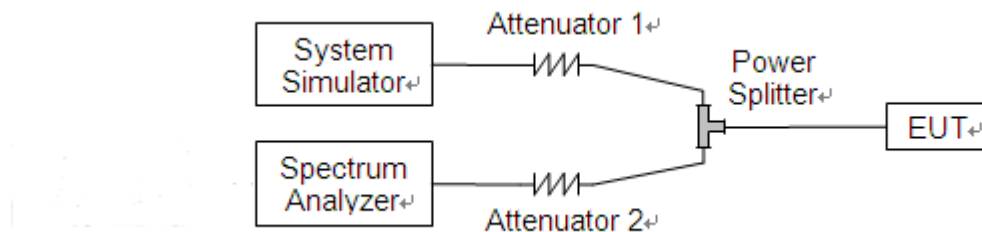


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2.5.3. Test Result



The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.





GPRS 850MHz CH128 824.2MHz

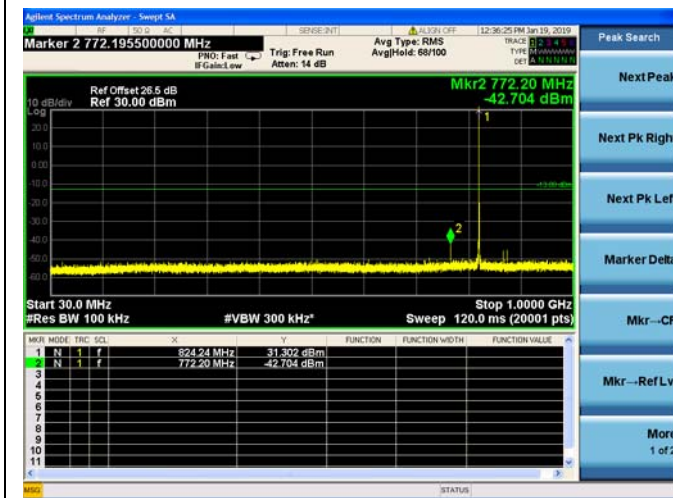

GPRS 850MHz CH190 836.6MHz

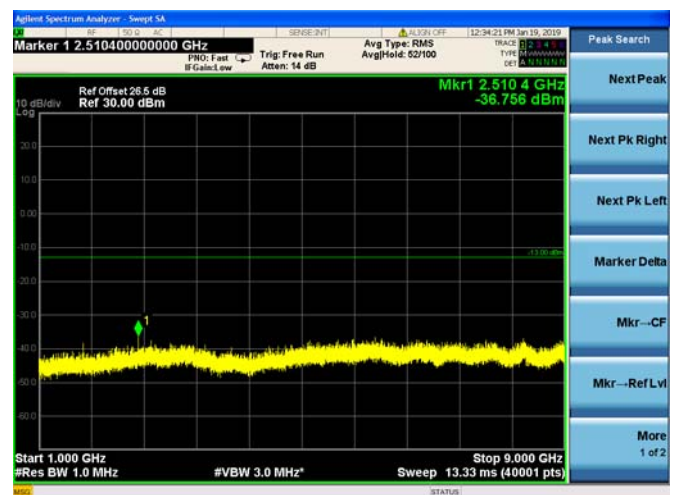
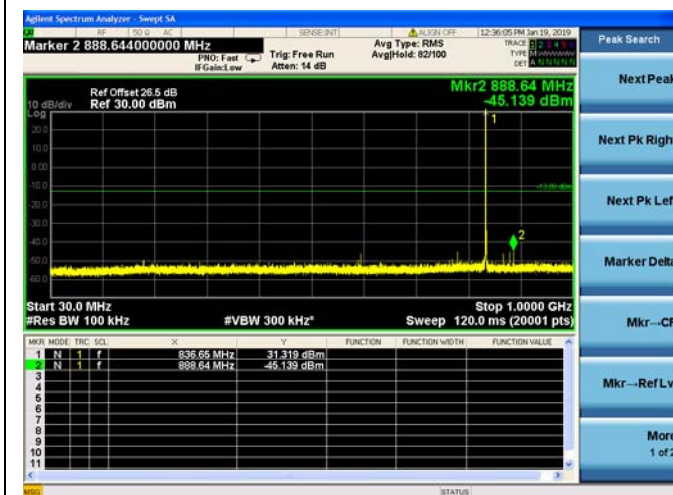


GPRS 850MHz CH251 848.8MHz

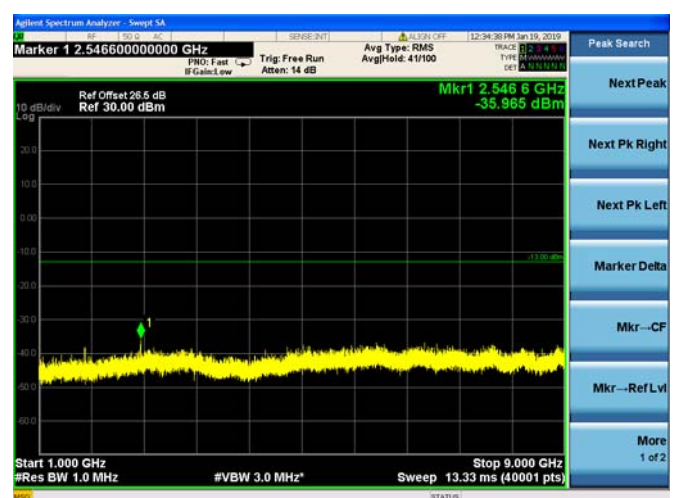
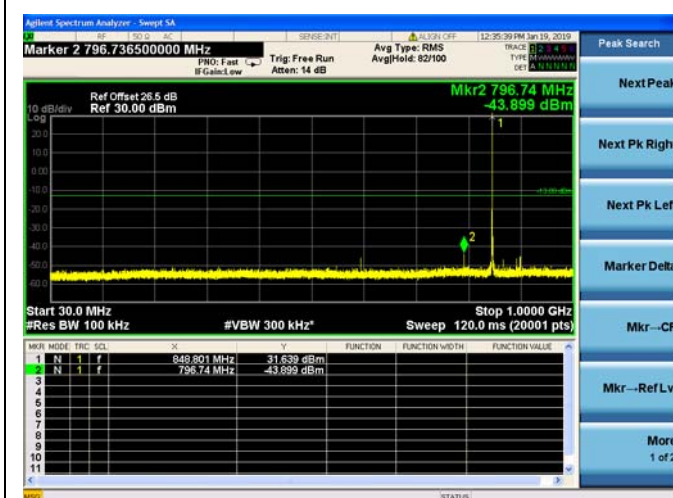






GPRS 1900MHz CH521 1850.2MHz

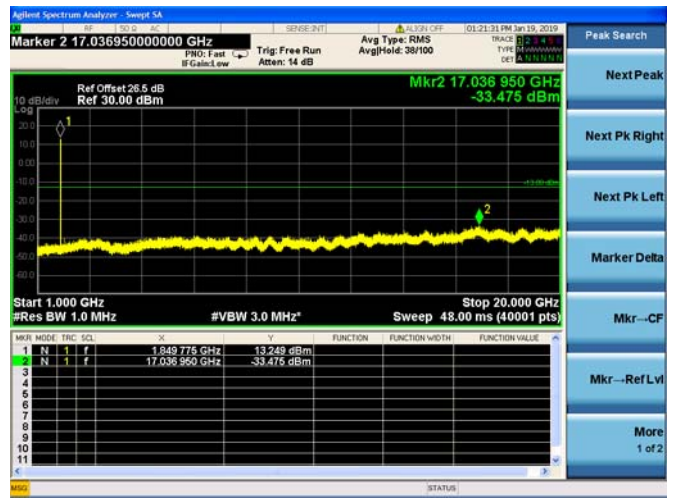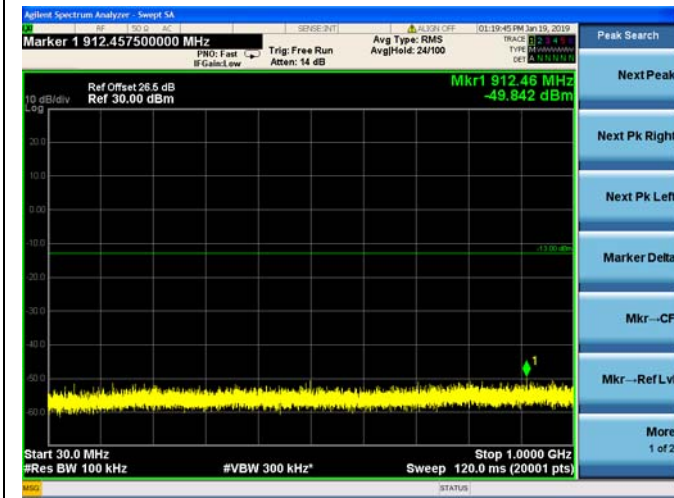

GPRS 1900MHz CH661 1880.0MHz

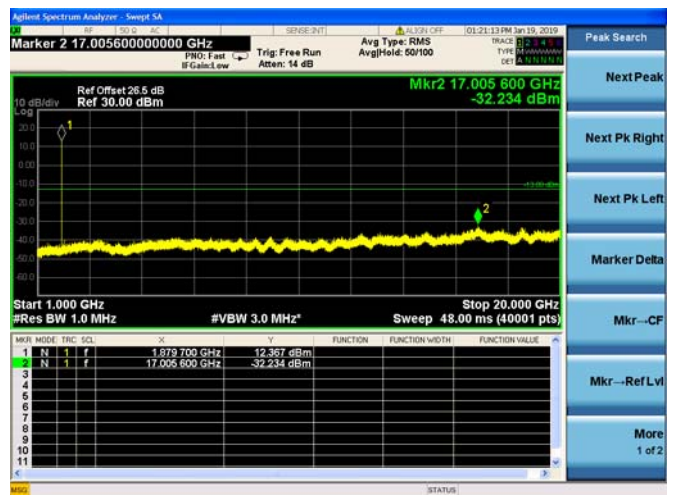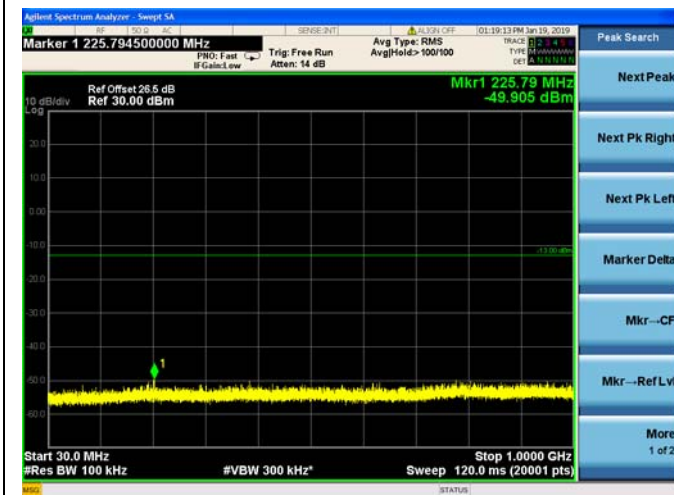

GPRS 1900MHz CH810 1909.8MHz

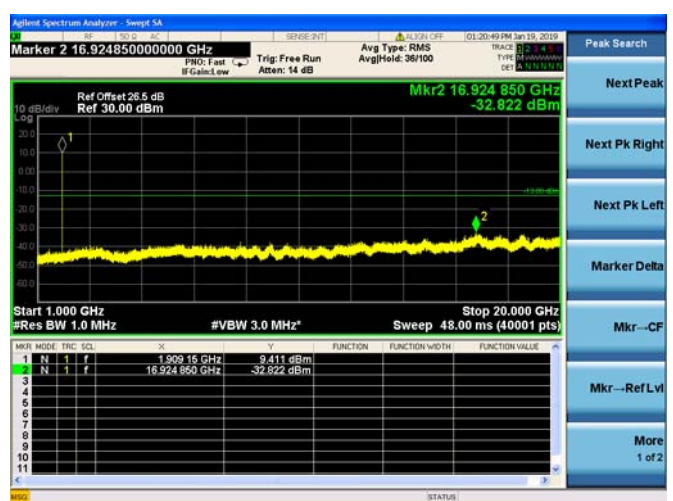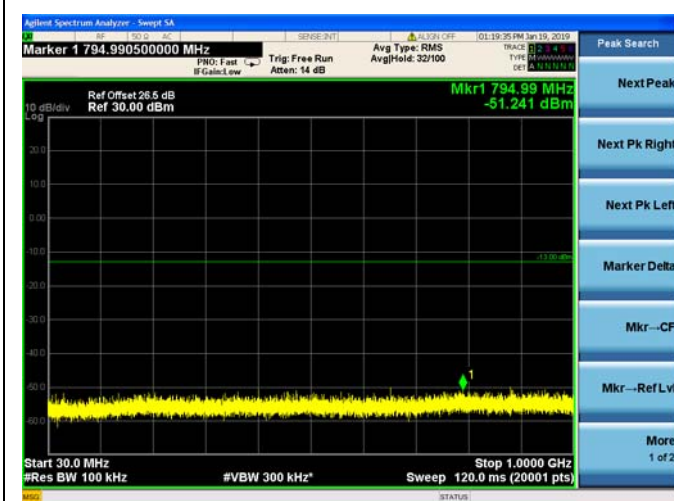


2.6. Band Edge

2.6.1. Requirement

According to FCC section 22.917(b), 24.238(b) and 27.53(h) in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

2.6.2. Test Description

Test Setup:

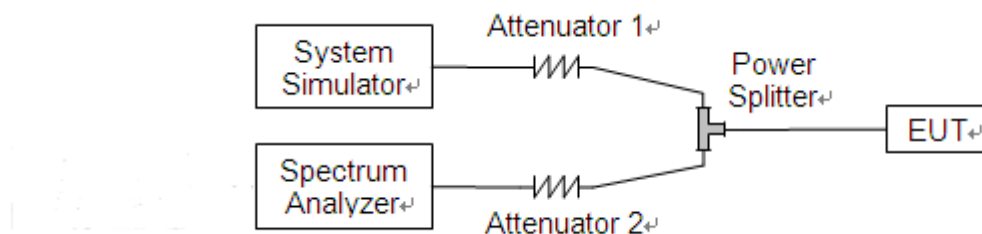


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.



2.6.3. Test Result

The lowest and highest channels are tested to verify the band edge emissions.

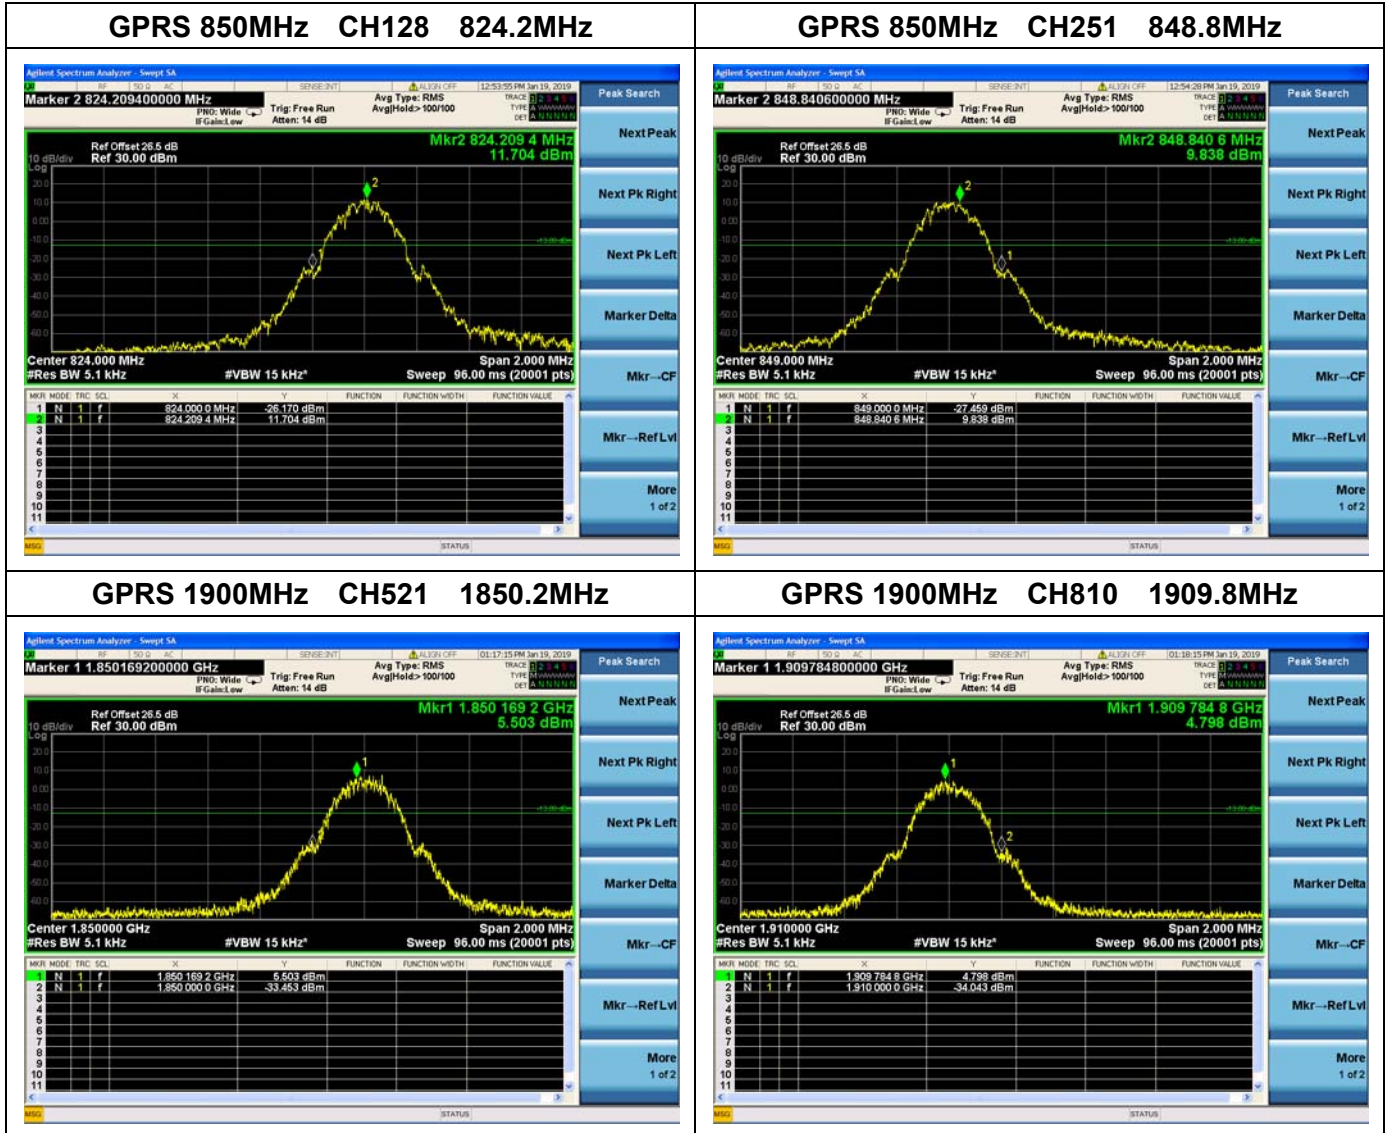

2.7. Radiated Out of Band Emissions


2.7.1. Requirement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \cdot \log(P)$ dB. This calculated to be -13dBm.


2.7.2. Test Description

Test Setup:

- 1) Below 1GHz

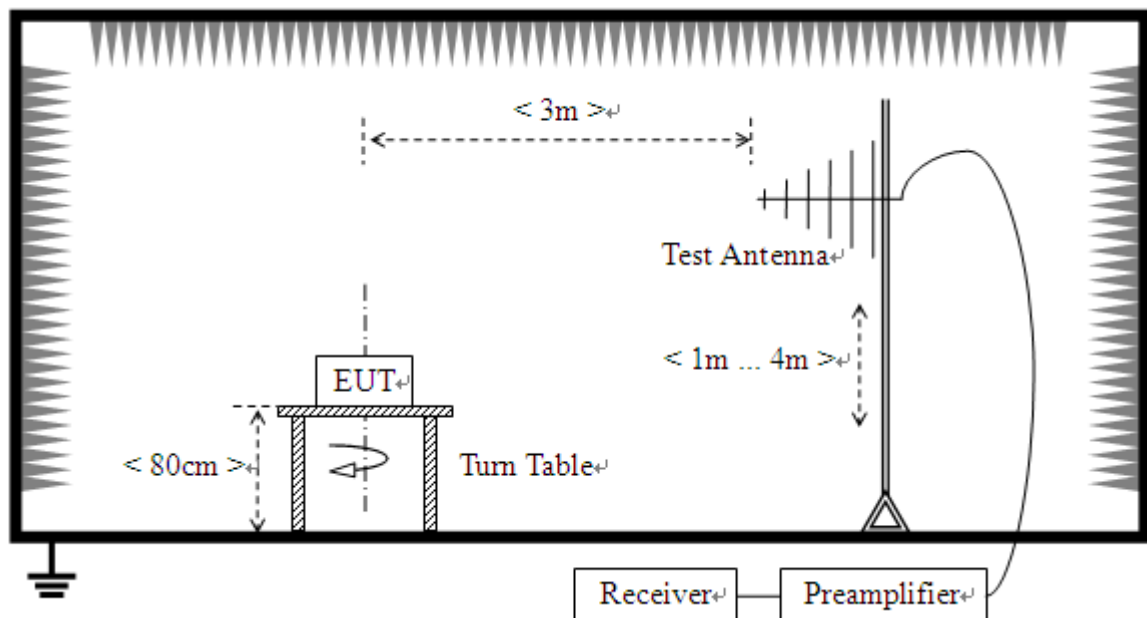

2) Above 1GHz

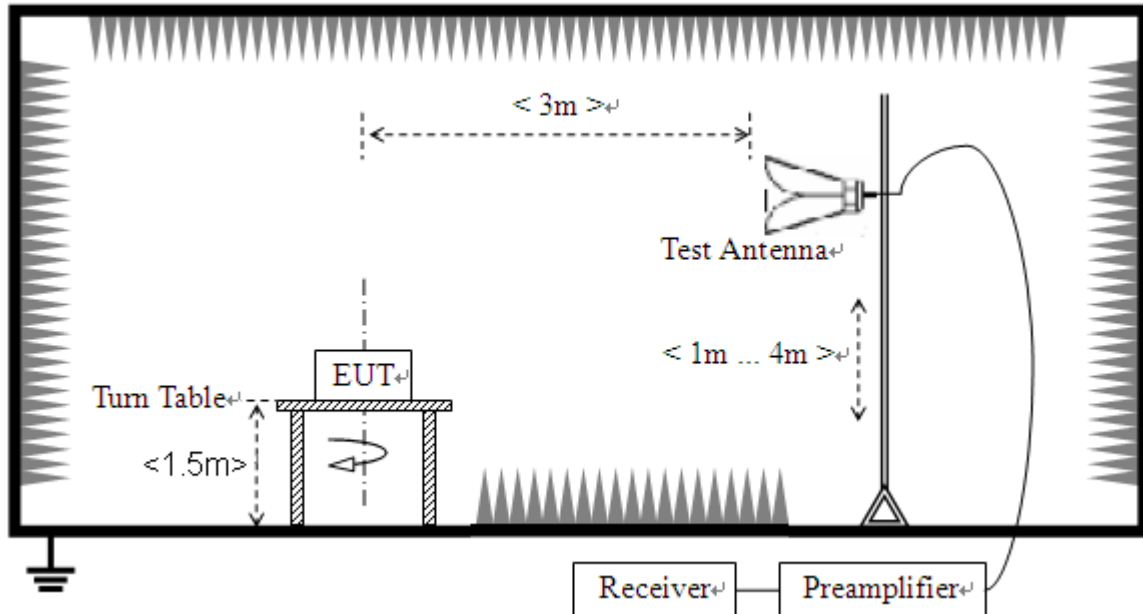

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded. Please refer to section 2.1.3 of this report.

- Step size (dB): 3dB

The Test Antenna is a Bi-Log one (used for 30MHz to 1GHz) and a Horn one (used for above 3 GHz), it's located at the same height as the EUT. The Filters consists of Notch Filters and High Pass Filter.

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.




2.7.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions. The power of the EUT transmitting frequency should be ignored.

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical		
GPRS 850MHz	128	824.2	< -25	< -25	-13	PASS
	190	836.6	< -25	< -25		PASS
	251	848.8	< -25	< -25		PASS
GPRS 1900MHz	512	1850.2	< -25	< -25	-13	PASS
	661	1880.0	< -25	< -25		PASS
	810	1909.8	< -25	< -25		PASS


Note 1: All test mode and condition mentioned were considered and evaluated respectively by performing full test, only the worst data were recorded and reported.

Note 2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

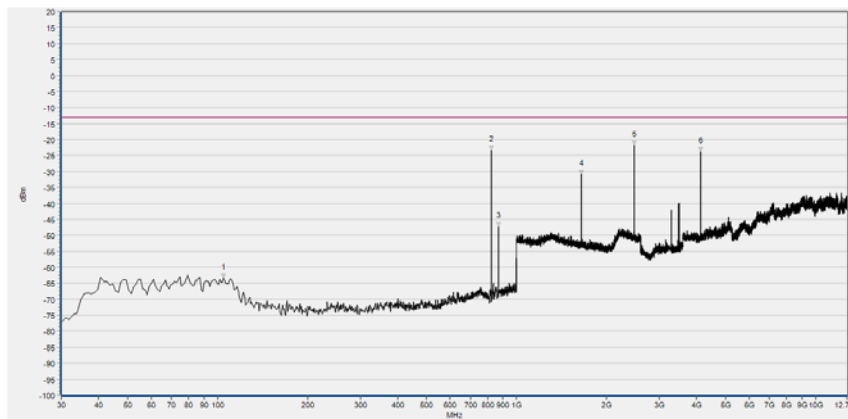


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	104.690	-63.24	-13.00	Horizontal	PASS
2	824.430	-23.36	-13.00	Horizontal	N/A
3	869.050	-47.19	-13.00	Horizontal	N/A
4	1647.939	-31.03	-13.00	Horizontal	PASS
5	2472.589	-21.76	-13.00	Horizontal	PASS
6	4120.931	-23.89	-13.00	Horizontal	PASS

(GPRS 850MHz, Channel = 128, Horizontal)

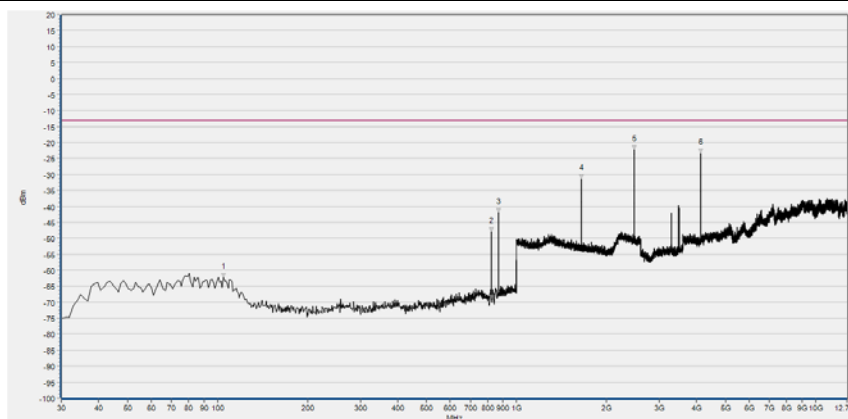


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	104.690	-62.29	-13.00	Vertical	PASS
2	824.430	-47.88	-13.00	Vertical	N/A
3	869.050	-42.00	-13.00	Vertical	N/A
4	1647.939	-31.36	-13.00	Vertical	PASS
5	2472.589	-22.28	-13.00	Vertical	PASS
6	4120.931	-23.31	-13.00	Vertical	PASS

(GPRS 850MHz, Channel = 128, Vertical)

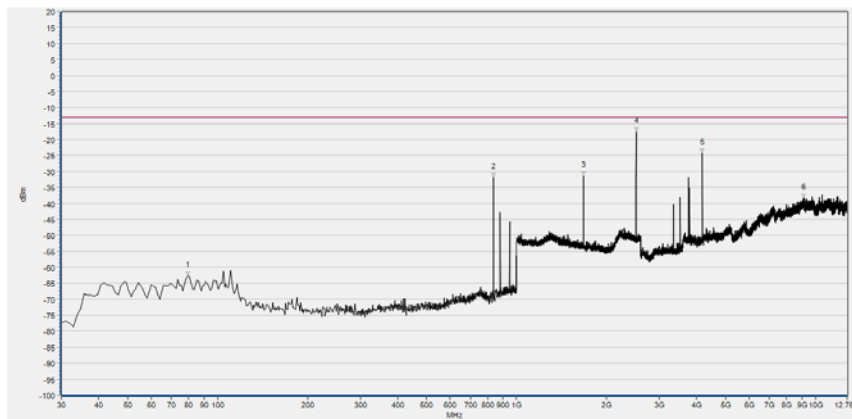


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	79.470	-62.64	-13.00	Horizontal	PASS
2	837.040	-31.80	-13.00	Horizontal	N/A
3	1672.909	-31.39	-13.00	Horizontal	PASS
4	2509.724	-17.63	-13.00	Horizontal	PASS
5	4183.688	-24.33	-13.00	Horizontal	PASS
6	9099.027	-38.37	-13.00	Horizontal	PASS

(GPRS 850MHz, Channel = 190, Horizontal)

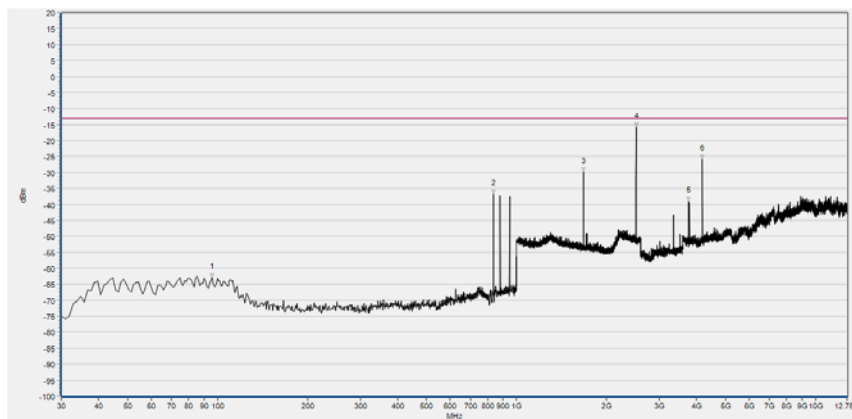


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	95.960	-62.96	-13.00	Vertical	PASS
2	836.070	-36.78	-13.00	Vertical	N/A
3	1672.909	-29.72	-13.00	Vertical	PASS
4	2509.724	-15.72	-13.00	Vertical	PASS
5	3755.465	-39.02	-13.00	Vertical	PASS
6	4181.842	-25.79	-13.00	Vertical	PASS

(GPRS 850MHz, Channel = 190, Vertical)

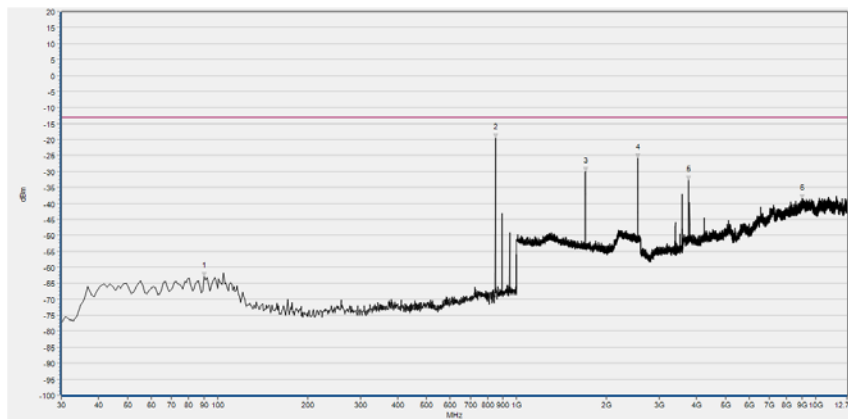


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	90.140	-63.00	-13.00	Horizontal	PASS
2	848.680	-19.45	-13.00	Horizontal	N/A
3	1697.879	-30.10	-13.00	Horizontal	PASS
4	2546.218	-25.91	-13.00	Horizontal	PASS
5	3755.465	-32.72	-13.00	Horizontal	PASS
6	9025.195	-38.53	-13.00	Horizontal	PASS

(GPRS 850MHz, Channel = 251, Horizontal)

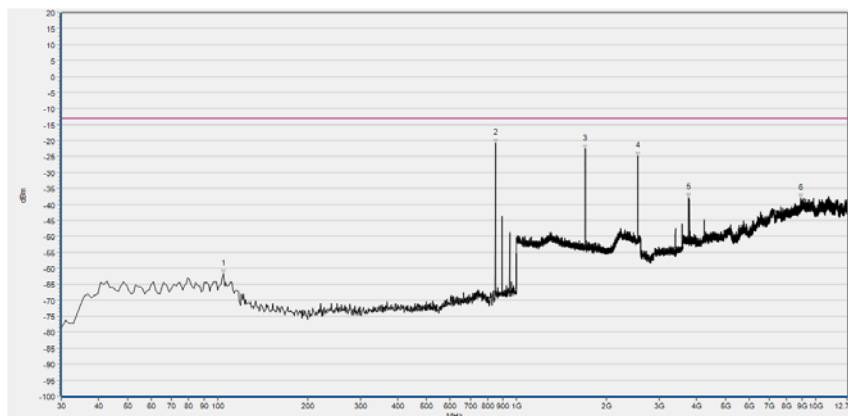


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	104.690	-61.77	-13.00	Vertical	PASS
2	848.680	-20.87	-13.00	Vertical	N/A
3	1697.239	-22.76	-13.00	Vertical	PASS
4	2546.218	-24.89	-13.00	Vertical	PASS
5	3755.465	-37.91	-13.00	Vertical	PASS
6	8927.369	-38.10	-13.00	Vertical	PASS

(GPRS 850MHz, Channel = 251, Vertical)

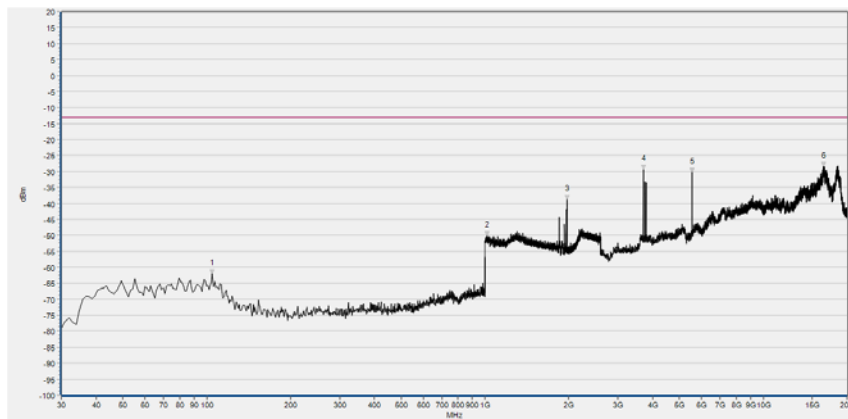


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	104.690	-62.06	-13.00	Horizontal	PASS
2	1016.006	-50.17	-13.00	Horizontal	PASS
3	1972.549	-38.84	-13.00	Horizontal	PASS
4	3699.836	-29.33	-13.00	Horizontal	PASS
5	5549.191	-30.20	-13.00	Horizontal	PASS
6	16417.203	-28.44	-13.00	Horizontal	PASS

(GPRS 1900MHz, Channel = 512, Horizontal)

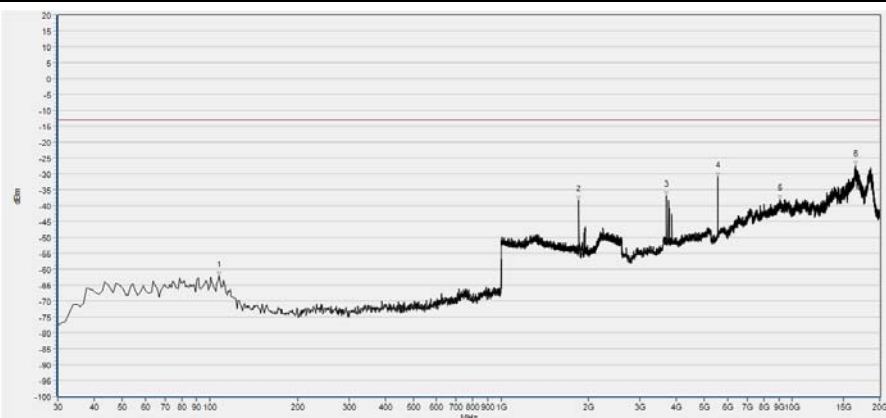


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	107.600	-62.09	-13.00	Vertical	PASS
2	1850.260	-38.35	-13.00	Vertical	N/A
3	3699.836	-37.02	-13.00	Vertical	PASS
4	5549.191	-31.06	-13.00	Vertical	PASS
5	9097.181	-38.21	-13.00	Vertical	PASS
6	16510.893	-27.31	-13.00	Vertical	PASS

(GPRS 1900MHz, Channel = 512, Vertical)

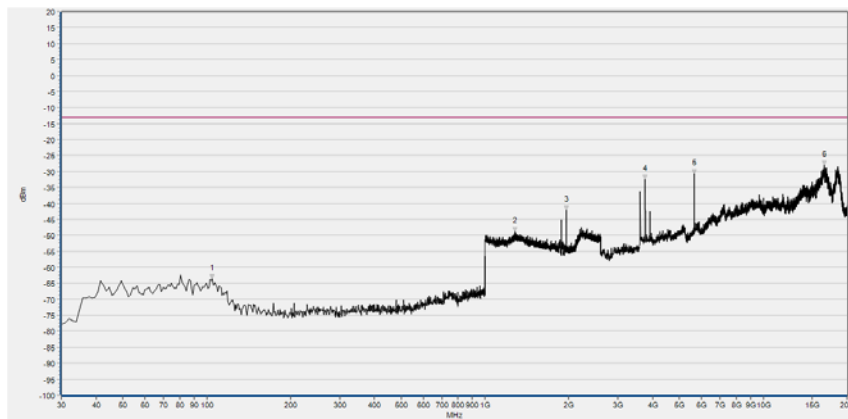


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	104.690	-63.52	-13.00	Horizontal	PASS
2	1277.871	-48.85	-13.00	Horizontal	PASS
3	1959.744	-42.01	-13.00	Horizontal	PASS
4	3756.865	-32.61	-13.00	Horizontal	PASS
5	5638.807	-30.75	-13.00	Horizontal	PASS
6	16535.334	-28.03	-13.00	Horizontal	PASS

(GPRS 1900MHz, Channel = 661, Horizontal)

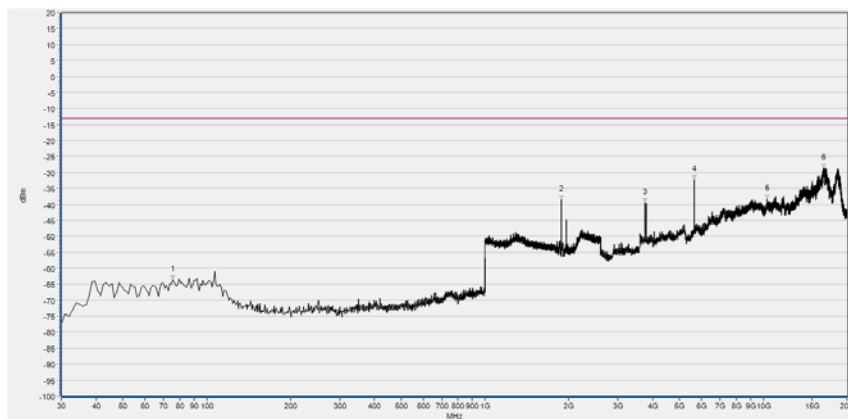


Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	75.590	-63.49	-13.00	Vertical	PASS
2	1879.712	-38.60	-13.00	Vertical	N/A
3	3760.938	-39.48	-13.00	Vertical	PASS
4	5638.807	-32.29	-13.00	Vertical	PASS
5	10290.707	-38.24	-13.00	Vertical	PASS
6	16429.424	-28.62	-13.00	Vertical	PASS

(GPRS 1900MHz, Channel = 661, Vertical)

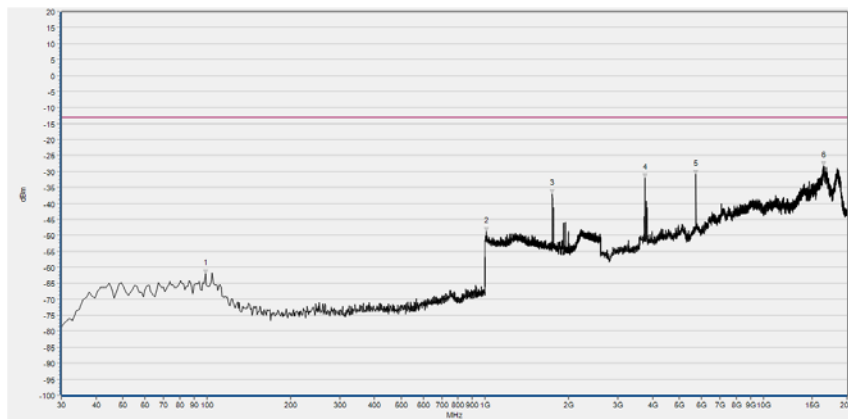

Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	98.870	-62.08	-13.00	Horizontal	PASS
2	1008.323	-48.82	-13.00	Horizontal	PASS
3	1745.898	-36.88	-13.00	Horizontal	PASS
4	3756.865	-32.13	-13.00	Horizontal	PASS
5	5728.423	-30.85	-13.00	Horizontal	PASS
6	16453.864	-28.31	-13.00	Horizontal	PASS

(GPRS 1900MHz, Channel = 810, Horizontal)

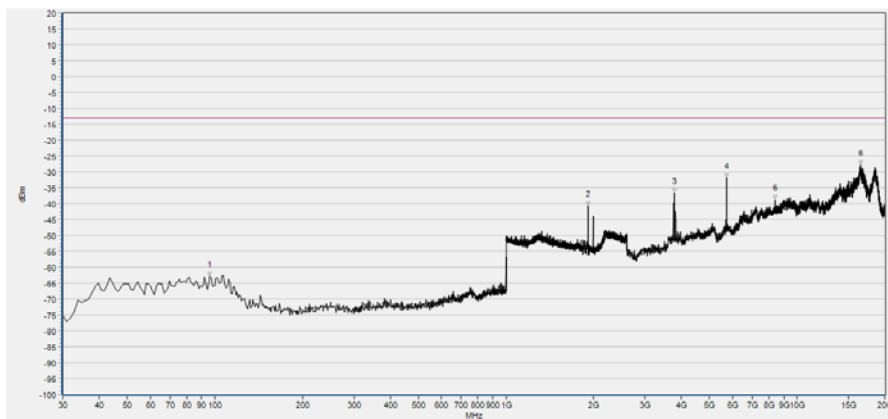

Num	Freq(MHz)	PK	limit PK	Antenna	Verdict
1	95.960	-62.85	-13.00	Vertical	PASS
2	1909.804	-40.73	-13.00	Vertical	N/A
3	3789.453	-36.72	-13.00	Vertical	PASS
4	5728.423	-31.87	-13.00	Vertical	PASS
5	8384.324	-38.71	-13.00	Vertical	PASS
6	16527.187	-27.94	-13.00	Vertical	PASS

(GPRS 1900MHz, Channel = 810, Vertical)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Output Power	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Radiated Emission	$\pm 2.95\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2018.11.06	2019.11.05
Wireless synthesizer	MY48364176	8960 -E5515C	Agilent	2018.04.17	2019.04.16
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Temperature Chamber	(N/A)	HUT705P	CHONGQING HANBA EXPERIMENTAL EQUIPMENT CO.,LTD	2018.04.17	2019.04.16
Computer	T430i	Think Pad	Lenovo	N/A	N/A

**4.2 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
System Simulator	152038	CMW500	R&S	2018.08.04	2019.08.03
Receiver	MY54130016	N9038A	Agilent	2018.05.18	2019.05.17
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Notch Filter	N/A	WRCG-GSM 850	Wainwright	2018.12.01	2019.11.30
Notch Filter	N/A	WRCG-GSM 1900	Wainwright	2018.12.01	2019.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————