

Antenna Specifications

CUSTOMER		奥科	
CS P/N		RX-panel	
HX P/N		<u>A09-293-RX-panel</u>	
Checked by(RF)	Checked by(ME)	Checked by(QA)	Approval led by
Customer Approval			

Index

1. General Description.....	3
1.1 Print Acceptance.....	3
1.2 Coordinate System.....	3
2. Specifications.....	4
2.1 Frequency Band.....	4
2.2 Impedance.....	4
2.2.1 Nominal.....	4
2.2.2 Matching Circuit.....	4
2.3 Passive Measurements.....	5
2.3.1 VSWR & Gain Specifications.....	5
2.3.2 S11 of the Typical Sample.....	
2.3.3 Gain Effi. & Ratiation Pattern of the Typical Sample.....	6
3. Mechanical Properties.....	10
3.1 Specifications Drawings.....	10
4. Environmental Characteristic.....	11

1. General Description

This document provides the antenna specifications on electric, mechanic and reliability. The testing conditions and related pictures are also included.

1.1 Print Acceptance

Samples and Antenna Specifications are to be sent to customer. When they are approved, the approval form should be completed, signed, and sent back to Hengxiangtong before further mass production batches can be delivered.

1.2 Coordinate System

The coordinate system for the phone is defined as follows:

- Origin in center of gravity.
- Positive X axis is perpendicular to, and directed from, front plane.
- Positive Y axis is perpendicular to, and directed from, right side plane (as seen from front).
- Positive Z axis is perpendicular to, and directed from, top plane.

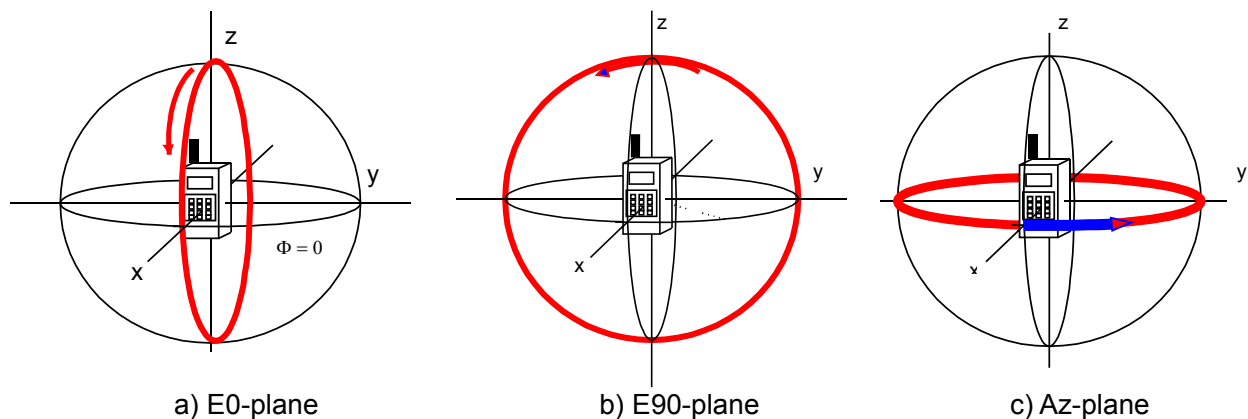


Figure 1-1 The coordinate system for the phone

2. Specifications

This report mainly provides the testing conditions of various electric and structural performance parameters for cell phone antenna ---- RX-panel. Figure 2-1 shows the antenna designed by HX & The fixturing of RX-panel.

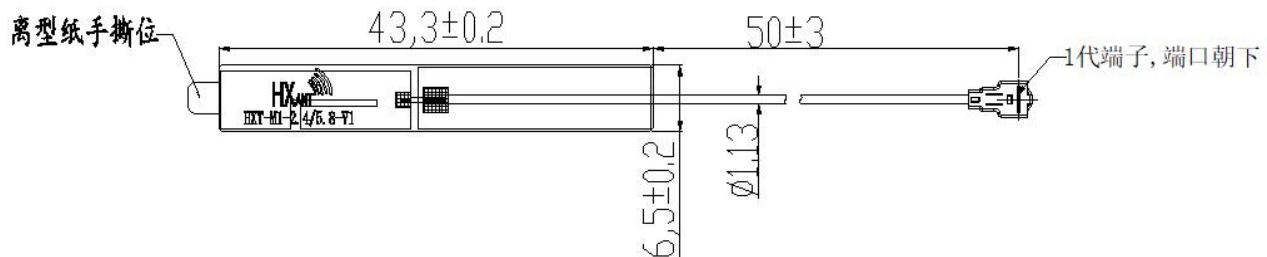


Figure 2-1 The antenna designed by HX & The fixturing of RX-panel

2.1 Frequency Band

Band	Frequency(MHz)
2.4G/5.8G	2400-2500/5150-5900

2.2 Impedance

2.2.1 Nominal

Nominal Impedance(including matching circuit) : 50 ohms

2.2.2 Matching Circuit

The matching circuit is as Figure 2-2.

N/A

Figure 2-2: Matching circuit


2.3 Passive Measurements

2.3.1 VSWR & Gain Specifications

VSWR		GAIN	
Freq. Band	SPEC	Freq. Band	SPEC
2400-2500MHz	≤ 2.0	2400-2500	$\geq 0\text{dBi}$
5150-5900MHz	≤ 2.0	5150-5900	$\geq 0\text{dBi}$

2.3.2 S11 of the Typical Sample

Freq (MHz)	2400	2500	5150	5900
RL	-21.03	-15.66	-14.14	-10.03
VSWR	1.21	1.37	1.5	1.91

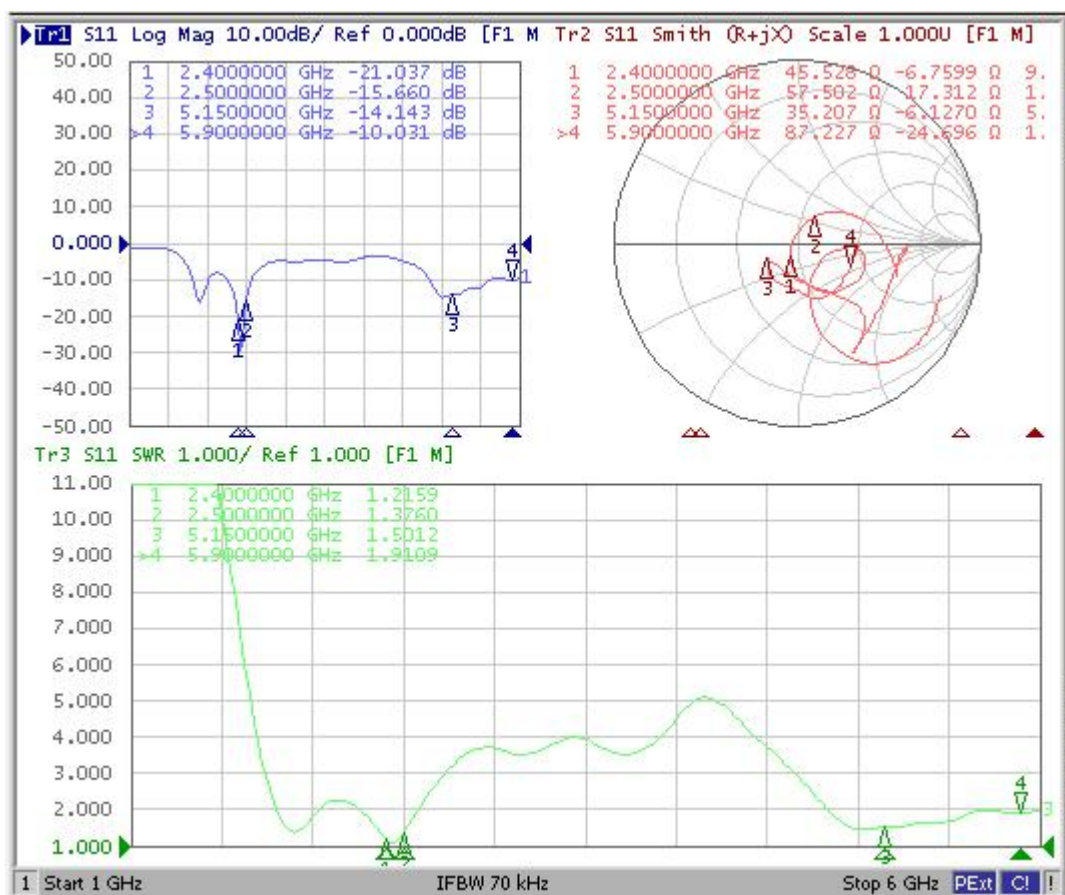

Add: 606, Building E, Enterprise Aviation Technology Innovation Research and Development Industrial Park, No. 1008, Songbai Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen

Tel. +86-755-27657751 Fax +86-755-27599500



2.3.3 Gain Effi. & Ratiation Pattern of the Typical Sample

2.4G WiFi				5G WiFi			
Freq	Effi (dB)	Gain (dBi)	Effi (%)	Freq	Effi (dB)	Gain (dBi)	Effi (%)
2400	-2.71	1.37	53.54	5160	-2.87	2.47	51.63
2410	-2.62	1.15	54.65	5200	-2.74	2.65	53.18
2420	-2.58	1.05	55.18	5240	-2.93	2.22	50.92
2430	-2.53	1.2	55.8	5280	-2.98	1.88	50.37
2440	-2.51	1.36	56.08	5320	-2.97	1.5	50.46
2450	-2.44	1.71	56.95	5360	-2.71	1.64	53.55
2460	-2.46	1.79	56.8	5400	-2.85	1.71	51.9
2470	-2.43	1.93	57.13	5440	-2.33	2.49	58.41
2480	-2.42	1.96	57.23	5480	-2.33	3.36	58.44
2490	-2.36	2.32	58.09	5520	-2.36	3.48	58.06
2500	-2.36	2.59	58.09	5560	-2.1	3.94	61.73
				5600	-1.99	4.33	63.24
				5640	-2.12	4.86	61.34
				5680	-1.82	5.14	65.84
				5720	-1.89	5.53	64.79
				5760	-2.15	5.41	61.01
				5800	-2.04	5.66	62.49
				5840	-2.19	5.58	60.41
				5880	-2.6	5.12	55.01

Add: 606, Building E, Enterprise Aviation Technology Innovation Research and Development Industrial Park, No. 1008, Songbai Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen



Tel. +86-755-27657751 Fax +86-755-27599500

2.3.4 Antenna passive test radiation pattern

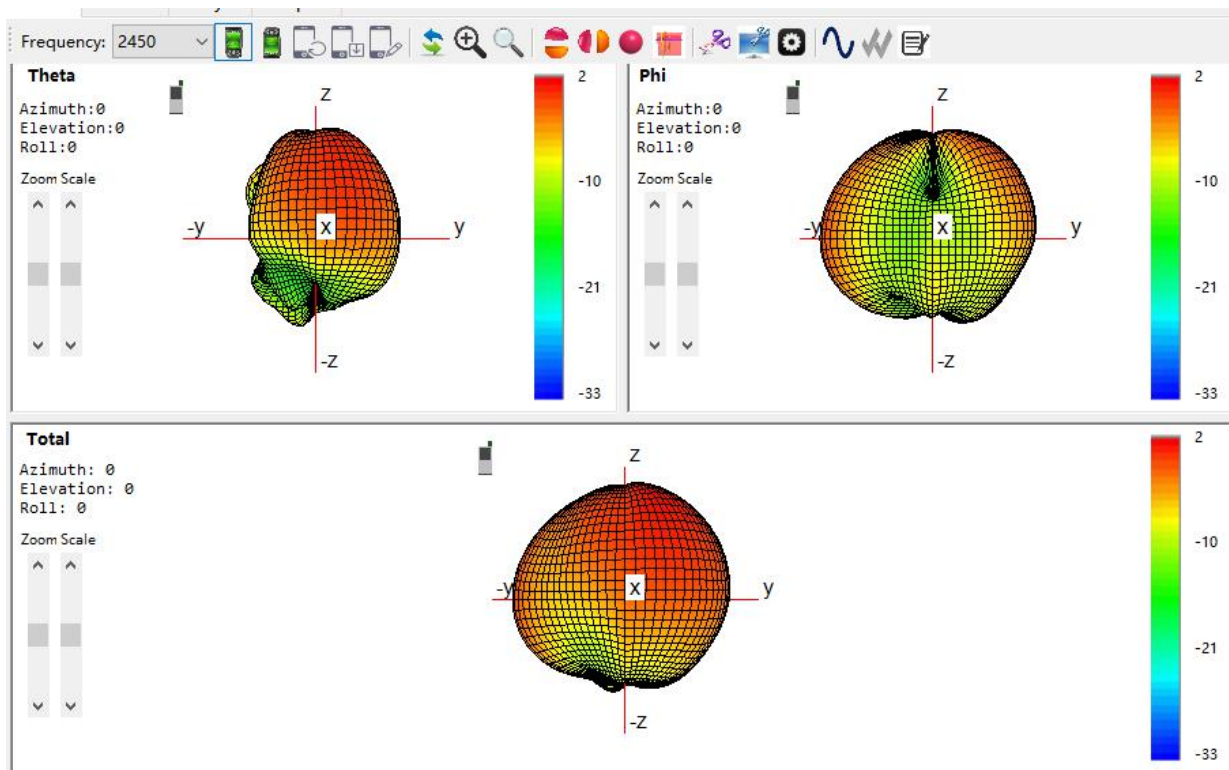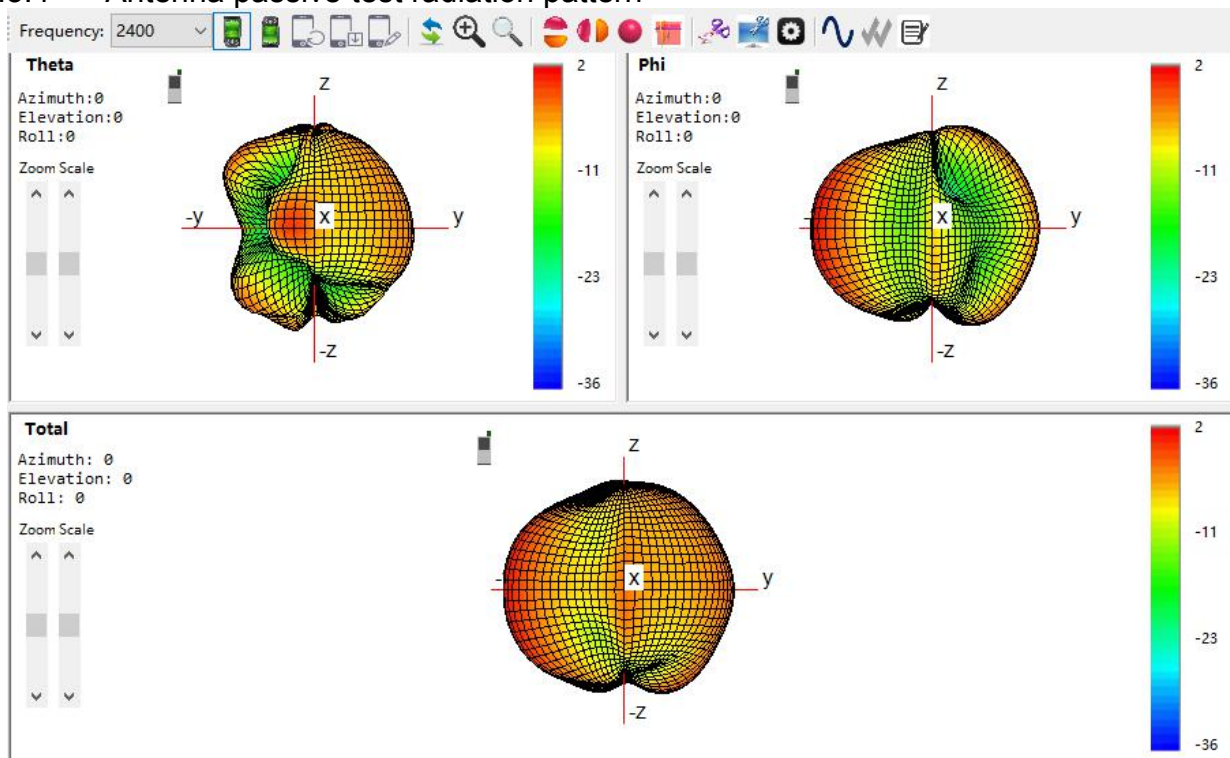

HXT Antenna Specifications



SHENZHEN HENGXIANGTONG ANTENNA TECHNOLOGY CO., LTD.

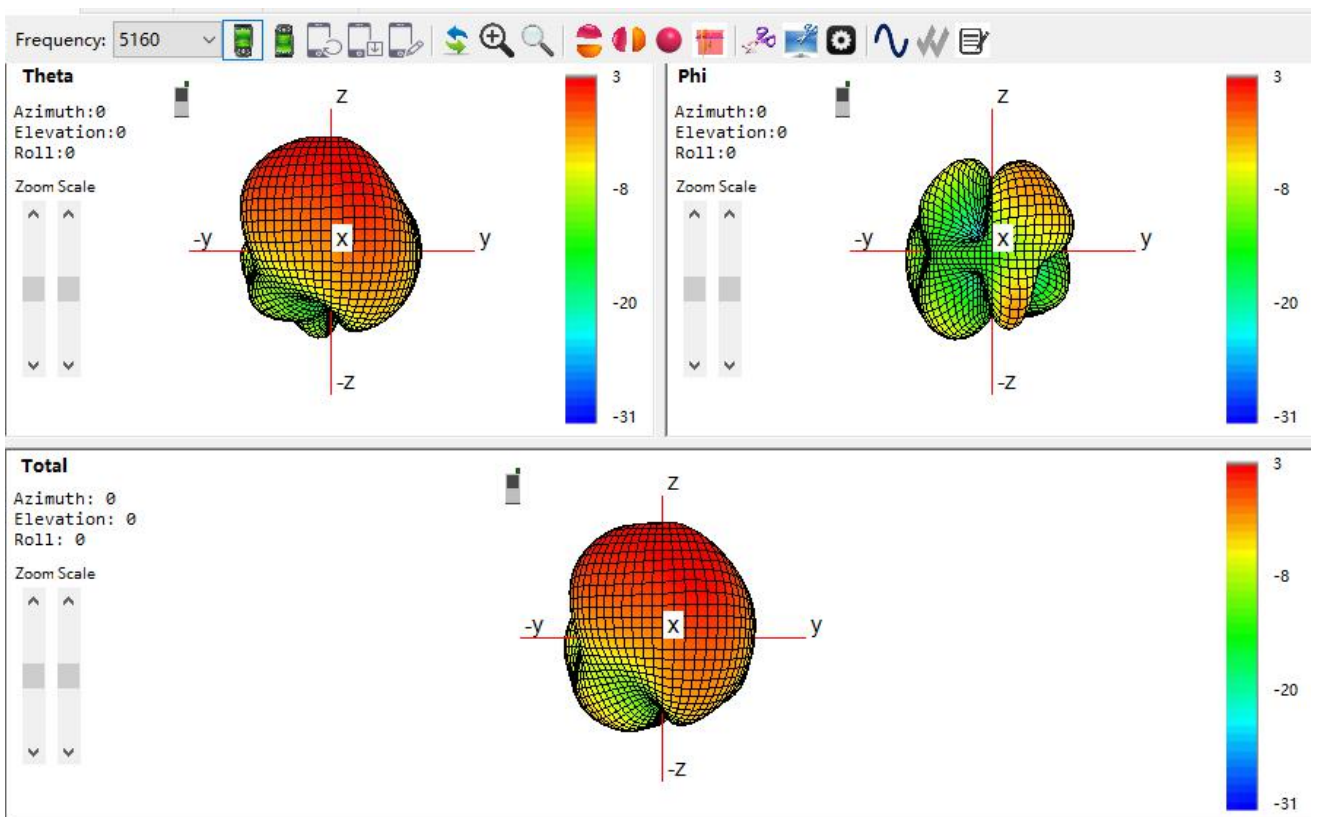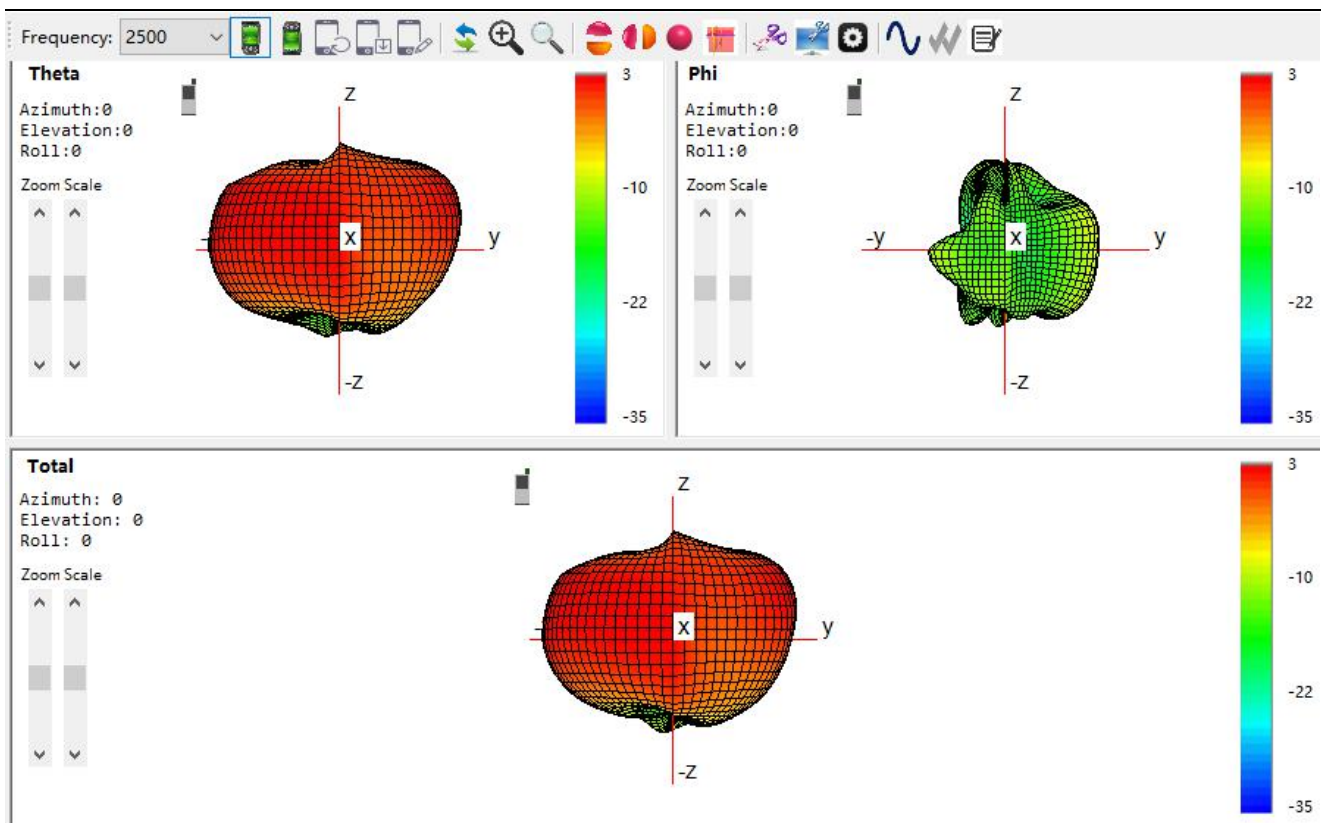

Add: 606, Building E, Enterprise Aviation Technology Innovation Research and Development Industrial Park, No. 1008, Songbai Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen


Tel. +86-755-27657751 Fax +86-755-27599500

HXT **Antenna Specifications**
SHENZHEN HENGXIANGTONG ANTENNA TECHNOLOGY CO., LTD.

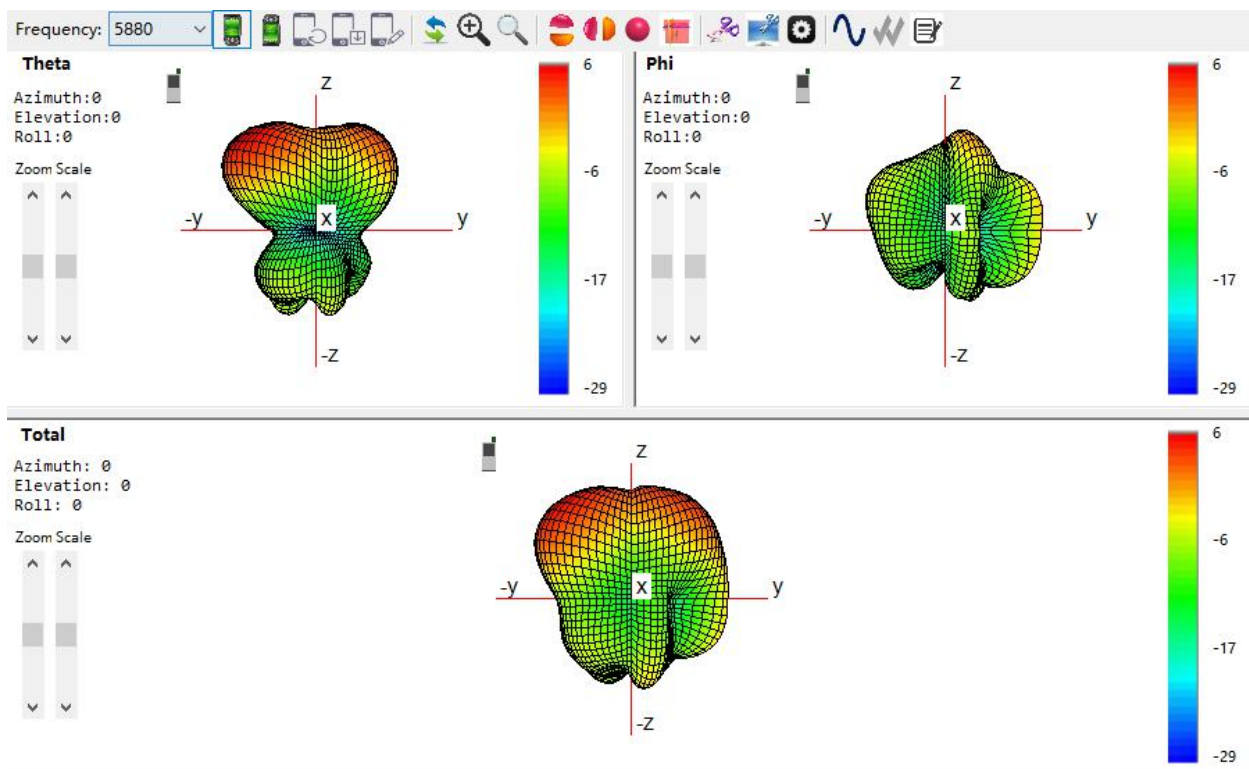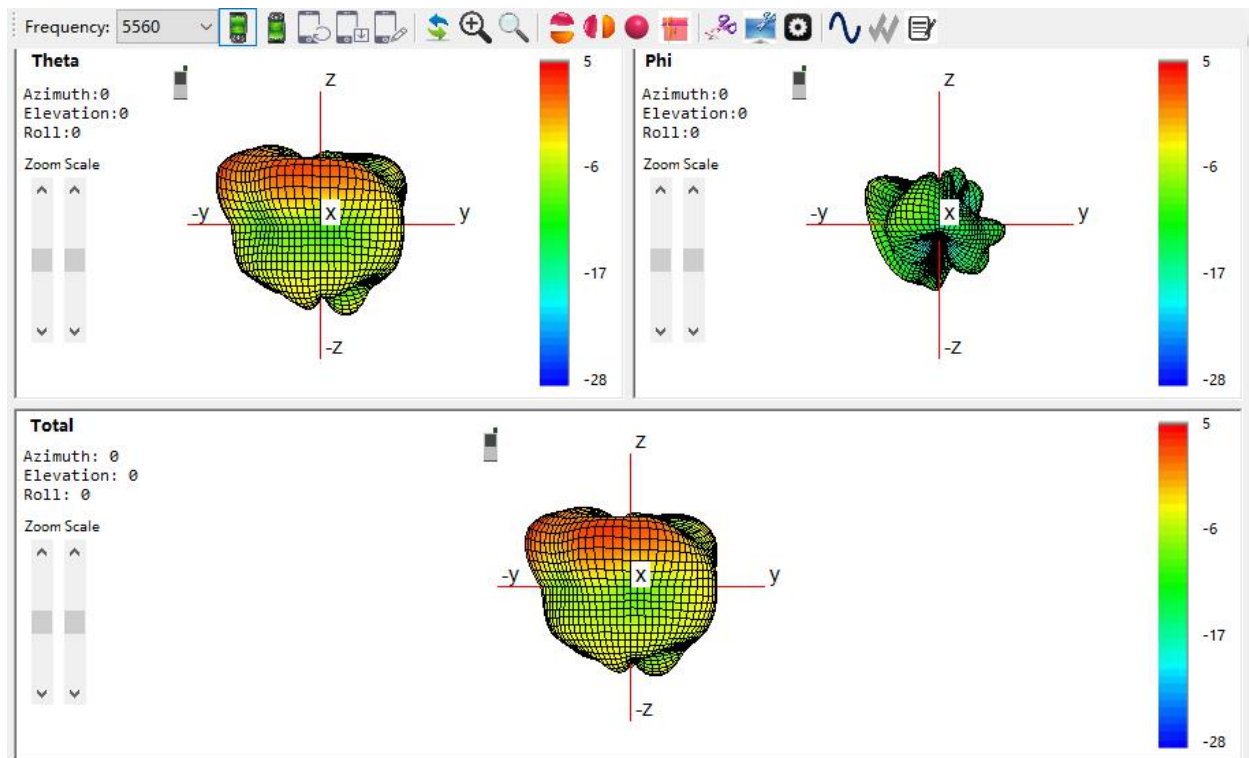

Add: 606, Building E, Enterprise Aviation Technology Innovation Research and Development Industrial Park, No. 1008, Songbai Road, Sunshine Community, Xili Street, Nanshan District, Shenzhen
Tel. +86-755-27657751 Fax +86-755-27599500

3.1 Specifications Drawings

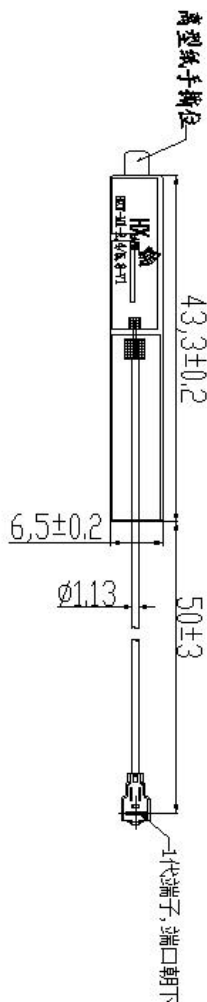

Tel. +86-755-27657751 Fax +86-755-27599500

4. Environmental Characteristic

Test Item	Test description
1. Low Temperature	Temp.: -20 °C Time: 24 hours
2. High Temperature	Temp.: 80°C Time: 24 hours
3. Salt Fog	5±0.1% Nad salt fog PH Value: 6.5-7.2 Temp: 35±1°C Time:24 hours