



RF TEST REPORT

Applicant	ecom instruments GmbH
FCC ID	XAM500080GR01
Product	Featurephone
Brand	ecom
Model	Ex-Handy 10
Report No.	R1901H0001-R5
Issue Date	July 5, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR 47 Part 22H (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	11
5.1. RF Power Output	11
5.2. Effective Radiated Power	18
5.3. Occupied Bandwidth	23
5.4. Band Edge Compliance	38
5.5. Peak-to-Average Power Ratio (PAPR)	53
5.6. Frequency Stability	57
5.7. Spurious Emissions at Antenna Terminals	61
5.8. Radiates Spurious Emission	73
6. Main Test Instruments	82
ANNEX A: EUT Appearance and Test Setup	83
A.1 EUT Appearance	83
A.2 Test Setup	85



Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(5)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 / 22.917(a)	PASS
5	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 22.355	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
8	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			
Date of Testing: May 20, 2019 ~June 13, 2019			



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	ecom instruments GmbH
Applicant address	Industriestrasse 2, 97959 Assamstadt, Germany
Manufacturer	Pepperl+Fuchs GmbH
Manufacturer address	Lilienthalstrasse 200, 68307 Mannheim, Germany

General Information

EUT Description			
Model	Ex-Handy 10		
IMEI	004403100004516		
Hardware Version	HW3		
Software Version	SAIPH_ROW_M_018_260219		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	-3dBi		
Test Mode(s)	GSM 850; WCDMA Band V;LTE Band 5/26;		
Test Modulation	(GSM)GMSK,8PSK; (WCDMA) BPSK, QPSK,16QAM; (LTE)QPSK 16QAM;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	10		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
HSPA+ UE Category	14		
LTE Category	4		
Maximum E.R.P.	GSM 850:	26.48dBm	
	WCDMA Band V:	16.13dBm	
	LTE Band 5:	14.59dBm	
	LTE Band 26:	18.84dBm	
Rated Power Supply Voltage	3.7V		
Extreme Voltage	Minimum: 3.5V Maximum: 4.2V		
Extreme Temperature	Lowest: -10°C Highest: +45°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894
	LTE Band 26	824 ~ 849	869 ~ 894



EUT Accessory	
Adapter	Manufacturer: TEN PAO INTERNATIONAL LTD. Model: S008ACM0500200
Battery	Manufacturer: ecom instruments GmbH Model: EX-BP H10C
USB Cable	Manufacturer: Dongguan YongGu Electronics Prouduction Co., Ltd. 120cm Cable, Shielded
Note: The information of the EUT is declared by the manufacturer.	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2018)

FCC CFR 47 Part 22H (2018)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 850	WCDMA Band V
RF power output	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA/HSPA+
Effective Radiated Power	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC



Test modes are chosen as the worst case configuration below for LTE Band 5/26

Test items	Modes	Bandwidth (MHz)					Modulation		RB			Test Channel		
		1.4	3	5	10	15	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	LTE 5	O	O	O	O	-	O	O	O	O	O	O	O	O
	LTE 26	O	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	LTE 5	O	O	O	O	-	O	O	O	O	O	O	O	O
	LTE 26	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	LTE 5	O	O	O	O	-	O	O	-	-	O	O	O	O
	LTE 26	O	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	LTE 5	O	O	O	O	-	O	O	O	-	O	O	-	O
	LTE 26	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	LTE 5	O	O	O	O	-	O	O	-	-	O	O	O	O
	LTE 26	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	LTE 5	O	O	O	O	-	O	O	O	O	O	O	O	O
	LTE 26	O	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	LTE 5	O	O	O	O	-	O	-	O	-	-	O	O	O
	LTE 26	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	LTE 5	-	-	-	O	-	O	-	O	-	-	O	O	O
	LTE 26	-	-	-	-	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5. Test Case Results

5.1. RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

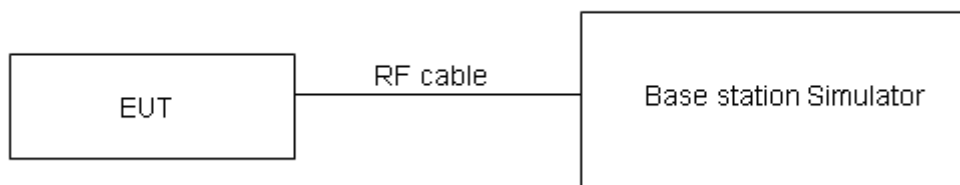

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM	Results	31.07	31.05	31.10
GPRS/EGPRS (GMSK)	1TXslot	31.14	31.10	31.18
	2TXslots	31.17	30.90	31.02
	3TXslots	30.88	30.78	30.85
	4TXslots	30.71	30.57	30.72
EGPRS (8PSK)	1TXslot	27.15	27.10	26.83
	2TXslots	27.01	26.83	26.75
	3TXslots	26.85	26.51	26.51
	4TXslots	26.64	26.63	26.33

WCDMA Band V		Conducted Power(dBm)		
		Channel 4132	Channel 4183	Channel 4233
		826.4(MHz)	836.6(MHz)	846.6(MHz)
RMC	12.2k	23.84	24.08	23.90
HSDPA	Sub - Test 1	23.30	23.50	23.34
	Sub - Test 2	23.29	23.52	23.31
	Sub - Test 3	22.76	23.02	22.83
	Sub - Test 4	22.77	23.03	22.81
HSUPA	Sub - Test 1	23.26	23.49	23.29
	Sub - Test 2	22.25	22.47	22.28
	Sub - Test 3	22.72	22.95	22.77
	Sub - Test 4	22.18	22.44	22.25
	Sub - Test 5	23.19	23.42	23.23
DC-HSDPA	Sub - Test 1	23.18	23.44	23.24
	Sub - Test 2	23.17	23.43	23.23
	Sub - Test 3	22.75	22.92	22.74
	Sub - Test 4	22.74	22.91	22.73
HSPA+	16QAM	22.73	22.99	22.80

LTE Band 5				Conducted Power(dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20407/824.7	20525/836.5	20643/848.3
1.4MHz	QPSK	1	0	22.00	22.12	22.02
		1	2	21.91	22.06	22.23
		1	5	21.67	21.99	22.12
		3	0	21.08	21.00	20.88
		3	2	20.98	20.98	20.85
		3	3	20.94	20.88	20.70
		6	0	20.99	20.85	20.89
	16QAM	1	0	21.27	21.30	20.12
		1	2	21.25	20.46	20.61
		1	5	20.20	20.65	20.18
		3	0	19.91	19.67	19.87
		3	2	20.00	19.93	19.85
		3	3	19.94	20.11	19.86
		6	0	20.02	19.89	19.87
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20415/825.5	20525/836.5	20635/847.5
3MHz	QPSK	1	0	22.02	22.13	22.05
		1	7	21.94	22.11	22.27
		1	14	21.69	22.03	22.15
		8	0	21.11	21.05	20.92
		8	4	21.01	21.03	20.89
		8	7	20.96	20.92	20.75
		15	0	21.03	20.87	20.93
	16QAM	1	0	21.29	21.33	20.14
		1	7	21.28	20.50	20.64
		1	14	20.23	20.67	20.21
		8	0	19.94	19.72	19.91
		8	4	20.02	19.97	19.88
		8	7	19.97	20.16	19.90
		15	0	20.05	19.94	19.91
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20425/826.5	20525/836.5	20625/846.5
5MHz	QPSK	1	0	22.01	22.09	22.03



RF Test Report				Report No: R20210502-001		
		1	13	21.92	22.10	22.24
		1	24	21.66	21.98	22.11
		12	0	21.09	21.01	20.89
		12	6	20.98	20.98	20.85
		12	13	20.93	20.89	20.71
		25	0	21.01	20.83	20.88
	16QAM	1	0	21.24	21.31	20.12
		1	13	21.26	20.47	20.62
		1	24	20.20	20.63	20.18
		12	0	19.91	19.70	19.88
		12	6	19.99	19.92	19.84
		12	13	19.95	20.12	19.87
		25	0	20.02	19.89	19.87
	BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)	
20450/829					20525/836.5	20600/844
10MHz	QPSK	1	0	21.98	22.05	22.00
		1	25	21.91	22.06	22.22
		1	49	21.64	21.97	22.08
		25	0	21.06	20.96	20.85
		25	13	20.96	20.94	20.82
		25	25	20.90	20.84	20.67
		50	0	20.98	20.78	20.84
	16QAM	1	0	21.34	21.27	20.07
		1	25	21.22	20.45	20.58
		1	49	20.18	20.60	20.16
		25	0	19.88	19.66	19.85
		25	13	19.96	19.90	19.81
		25	25	19.92	20.07	19.83
		50	0	20.00	19.85	19.84

LTE Band 26				Conducted Power(dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				26797/824.7	26915/836.5	27033/848.3
1.4MHz	QPSK	1	0	22.45	22.42	22.45
		1	2	22.71	22.51	22.65
		1	5	22.55	22.89	22.16
		3	0	22.44	22.40	22.25
		3	2	22.34	22.38	22.26
		3	3	22.28	22.50	22.28
		6	0	21.32	21.32	21.32
	16QAM	1	0	21.06	21.18	21.19
		1	2	21.04	20.73	21.33
		1	5	21.00	20.98	20.08
		3	0	21.59	21.33	21.31
		3	2	21.53	21.33	21.25
		3	3	21.36	21.30	21.36
		6	0	20.43	20.45	20.43
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				26805/825.5	26915/836.5	27025/847.5
3MHz	QPSK	1	0	22.47	22.46	22.48
		1	7	22.69	22.54	22.69
		1	14	22.58	22.94	22.20
		8	0	21.54	21.52	21.38
		8	4	21.46	21.48	21.38
		8	7	21.38	21.61	21.38
		15	0	21.32	21.36	21.35
	16QAM	1	0	21.09	21.20	21.22
		1	7	21.07	20.73	21.37
		1	14	21.02	21.02	20.11
		8	0	20.70	20.46	20.43
		8	4	20.64	20.46	20.37
		8	7	20.46	20.42	20.49
		15	0	20.46	20.49	20.46
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				26815/826.5	26915/836.5	27015/846.5
5MHz	QPSK	1	0	22.46	22.45	22.47



		1	13	22.70	22.55	22.70
		1	24	22.57	22.93	22.19
		12	0	21.54	21.52	21.38
		12	6	21.47	21.49	21.37
		12	13	21.38	21.63	21.39
		25	0	21.36	21.37	21.37
		25	0	21.36	21.37	21.37
	16QAM	1	0	21.08	21.19	21.21
		1	13	21.07	20.75	21.37
		1	24	21.02	21.02	20.10
		12	0	20.71	20.47	20.44
		12	6	20.63	20.45	20.36
		12	13	20.46	20.42	20.49
		25	0	20.47	20.50	20.45
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				26840/829	26915/836.5	26990/844
10MHz	QPSK	1	0	22.45	22.41	22.45
		1	25	22.68	22.54	22.67
		1	49	22.54	22.88	22.15
		25	0	21.52	21.48	21.35
		25	13	21.44	21.44	21.33
		25	25	21.35	21.60	21.35
		50	0	21.34	21.33	21.32
	16QAM	1	0	21.03	21.17	21.19
		1	25	21.05	20.72	21.35
		1	49	20.99	20.98	20.07
		25	0	20.68	20.45	20.41
		25	13	20.60	20.40	20.32
		25	25	20.44	20.38	20.46
		50	0	20.44	20.45	20.41
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				26865/831.5	26915/836.5	26965/841.5
15MHz	QPSK	1	0	22.42	22.37	22.42
		1	38	22.67	22.50	22.65
		1	74	22.52	22.87	22.12
		36	0	21.49	21.43	21.31
		36	18	21.42	21.40	21.30
		36	39	21.32	21.55	21.31



		75	0	21.31	21.28	21.28
	16QAM	1	0	21.39	21.13	21.14
		1	38	21.01	20.70	21.31
		1	74	20.97	20.95	20.05
		36	0	20.65	20.41	20.38
		36	18	20.57	20.38	20.29
		36	39	20.41	20.33	20.42
		75	0	20.42	20.41	20.38

5.2. Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

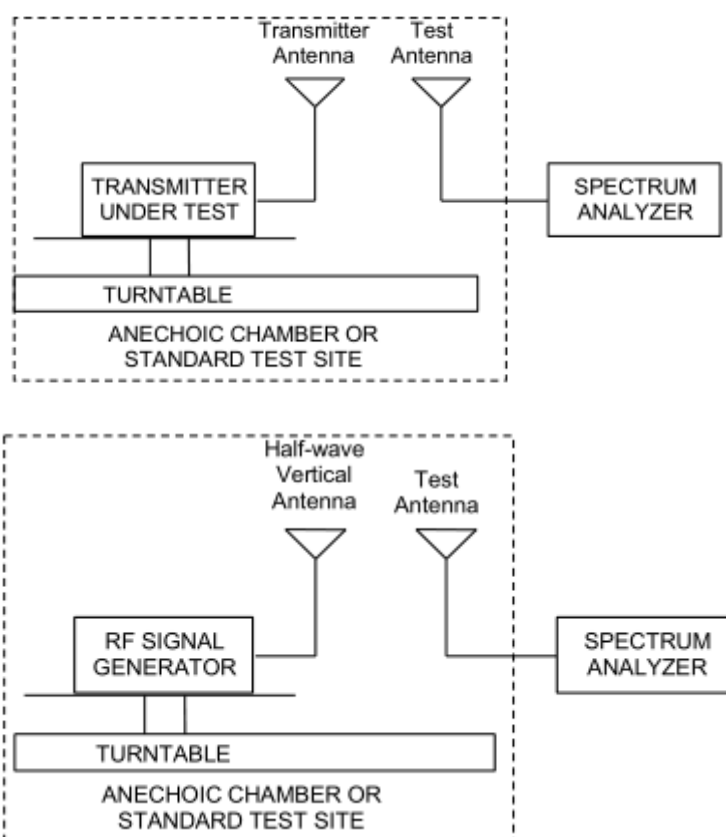

Limits

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

**Test Results:**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
GSM 850	Low	824.2	Horizontal	25.90	38.45	Pass
	Mid	836.6	Horizontal	24.63	38.45	Pass
	High	848.8	Horizontal	23.55	38.45	Pass
GPRS 850	Low	824.2	Horizontal	26.48	38.45	Pass
	Mid	836.6	Horizontal	25.16	38.45	Pass
	High	848.8	Horizontal	24.17	38.45	Pass
EGPRS 850	Low	824.2	Horizontal	25.08	38.45	Pass
	Mid	836.6	Horizontal	24.02	38.45	Pass
	High	848.8	Horizontal	22.80	38.45	Pass
WCDMA Band V	Low	826.4	Horizontal	16.13	38.45	Pass
	Mid	836.6	Horizontal	15.96	38.45	Pass
	High	846.6	Horizontal	15.88	38.45	Pass

LTE Band 5						
bandwidth	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	824.7	Horizontal	14.46	38.45	Pass
	Mid	836.5	Horizontal	13.85	38.45	Pass
	High	848.3	Horizontal	13.89	38.45	Pass
3 MHz (QPSK)	Low	825.5	Horizontal	14.39	38.45	Pass
	Mid	836.5	Horizontal	13.98	38.45	Pass
	High	847.5	Horizontal	14.02	38.45	Pass
5 MHz (QPSK)	Low	826.5	Horizontal	14.59	38.45	Pass
	Mid	836.5	Horizontal	14.17	38.45	Pass
	High	846.5	Horizontal	14.12	38.45	Pass
10 MHz (QPSK)	Low	829	Horizontal	14.46	38.45	Pass
	Mid	836.5	Horizontal	14.12	38.45	Pass
	High	844	Horizontal	13.94	38.45	Pass
1.4 MHz (16QAM)	Low	824.7	Horizontal	13.92	38.45	Pass
	Mid	836.5	Horizontal	13.39	38.45	Pass
	High	848.3	Horizontal	13.39	38.45	Pass
3 MHz (16QAM)	Low	825.5	Horizontal	13.90	38.45	Pass
	Mid	836.5	Horizontal	13.41	38.45	Pass
	High	847.5	Horizontal	13.43	38.45	Pass
5 MHz (16QAM)	Low	826.5	Horizontal	13.95	38.45	Pass
	Mid	836.5	Horizontal	13.55	38.45	Pass
	High	846.5	Horizontal	13.54	38.45	Pass
10 MHz (16QAM)	Low	829	Horizontal	14.01	38.45	Pass
	Mid	836.5	Horizontal	13.63	38.45	Pass
	High	844	Horizontal	13.29	38.45	Pass

LTE Band 26						
bandwidth	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	824.7	Horizontal	18.81	38.45	Pass
	Mid	836.5	Horizontal	18.84	38.45	Pass
	High	848.3	Horizontal	18.07	38.45	Pass
3 MHz (QPSK)	Low	825.5	Horizontal	18.69	38.45	Pass
	Mid	836.5	Horizontal	18.50	38.45	Pass
	High	847.5	Horizontal	18.32	38.45	Pass
5 MHz (QPSK)	Low	826.5	Horizontal	18.65	38.45	Pass
	Mid	836.5	Horizontal	18.61	38.45	Pass
	High	846.5	Horizontal	18.56	38.45	Pass
10 MHz (QPSK)	Low	829	Horizontal	18.68	38.45	Pass
	Mid	836.5	Horizontal	18.74	38.45	Pass
	High	844	Horizontal	18.49	38.45	Pass
15 MHz (QPSK)	Low	831.5	Horizontal	18.49	38.45	Pass
	Mid	836.5	Horizontal	18.38	38.45	Pass
	High	841.5	Horizontal	18.32	38.45	Pass
1.4 MHz (16QAM)	Low	824.7	Horizontal	18.34	38.45	Pass
	Mid	836.5	Horizontal	18.22	38.45	Pass
	High	848.3	Horizontal	17.50	38.45	Pass
3 MHz (16QAM)	Low	825.5	Horizontal	18.08	38.45	Pass
	Mid	836.5	Horizontal	17.96	38.45	Pass
	High	847.5	Horizontal	17.86	38.45	Pass
5 MHz (16QAM)	Low	826.5	Horizontal	18.15	38.45	Pass
	Mid	836.5	Horizontal	18.12	38.45	Pass
	High	846.5	Horizontal	17.99	38.45	Pass
10 MHz (16QAM)	Low	829	Horizontal	18.09	38.45	Pass
	Mid	836.5	Horizontal	18.10	38.45	Pass
	High	844	Horizontal	17.87	38.45	Pass
15 MHz (16QAM)	Low	831.5	Horizontal	17.91	38.45	Pass
	Mid	836.5	Horizontal	17.93	38.45	Pass
	High	841.5	Horizontal	17.83	38.45	Pass

5.3. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V,

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5/26 (1.4MHz),


RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 5/26 (3MHz/5MHz),

RBW is set to 300 kHz, VBW is set to 1 MHz for LTE Band 5/26 (10MHz),

RBW is set to 300 kHz, VBW is set to 1 MHz for LTE Band 26 (15MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

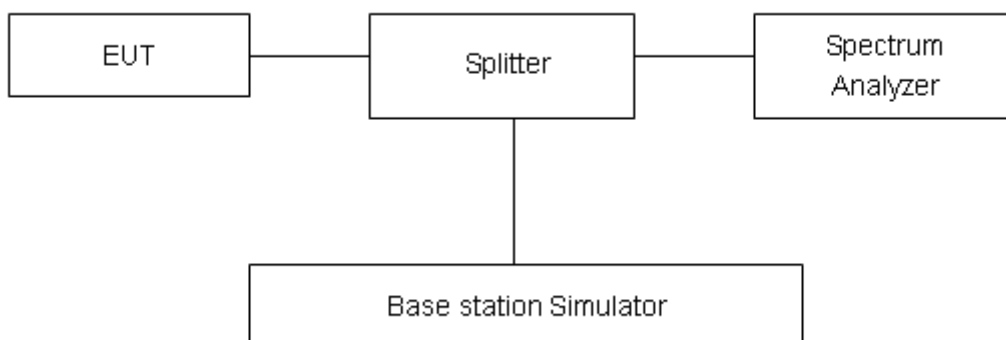

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 850 (GSM)	128	824.2	0.246	0.309
	190	836.6	0.244	0.309
	251	848.8	0.242	0.309
GPRS 850 (GMSK)	128	824.2	0.243	0.302
	190	836.6	0.244	0.312
	251	848.8	0.243	0.308
EGPRS 850 (8-PSK)	128	824.2	0.246	0.312
	190	836.6	0.241	0.310
	251	848.8	0.248	0.314
WCDMA Band V (RMC)	4132	826.4	4.163	4.771
	4183	836.6	4.139	4.699
	4233	846.6	4.153	4.747



LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20407	824.7	1.1182	1.304
			20525	836.5	1.1116	1.292
			20643	848.3	1.1127	1.304
		3	20415	825.5	2.7436	3.002
			20525	836.5	2.7308	2.991
			20635	847.5	2.7418	3.003
		5	20425	826.5	4.5106	4.912
			20525	836.5	4.5008	4.910
			20625	846.5	4.5097	4.888
		10	20450	829	9.0587	9.847
			20525	836.5	9.0572	9.795
			20600	844	9.0260	9.774
	16QAM	1.4	20407	824.7	1.1146	1.304
			20525	836.5	1.1106	1.303
			20643	848.3	1.1126	1.278
		3	20415	825.5	2.7391	2.986
			20525	836.5	2.7330	2.995
			20635	847.5	2.7382	2.984
		5	20425	826.5	4.5109	4.878
			20525	836.5	4.5036	4.855
			20625	846.5	4.5106	4.895
		10	20450	829	9.0549	9.820
			20525	836.5	9.0342	9.739
			20600	844	9.0400	9.761




LTE Band 26						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	26797	824.7	1.1241	1.352
			26915	836.5	1.1285	1.352
			27033	848.3	1.1360	1.329
		3	26805	825.5	2.7455	3.066
			26915	836.5	2.7396	3.065
			27025	847.5	2.7468	3.065
		5	26815	826.5	4.5308	5.037
			26915	836.5	4.5093	5.013
			27015	846.5	4.5110	5.017
		10	26840	829	9.0433	10.170
			26915	836.5	9.0212	10.100
			26990	844	9.0428	10.050
		15	26865	831.5	13.5100	14.900
			26915	836.5	13.4310	14.700
			26965	841.5	13.4390	14.740
	16QAM	1.4	26797	824.7	1.1259	1.341
			26915	836.5	1.1107	1.320
			27033	848.3	1.1176	1.329
		3	26805	825.5	2.7498	3.059
			26915	836.5	2.7401	3.058
			27025	847.5	2.7371	3.064
		5	26815	826.5	4.5149	5.044
			26915	836.5	4.5357	5.050
			27015	846.5	4.5284	5.049
		10	26840	829	9.0572	10.020
			26915	836.5	9.0290	10.010
			26990	844	9.0301	10.040
		15	26865	831.5	13.4820	14.760
			26915	836.5	13.4740	14.650
			26965	841.5	13.4330	14.640




GSM 850 CH-Low




GSM 850 GPRS CH-Low

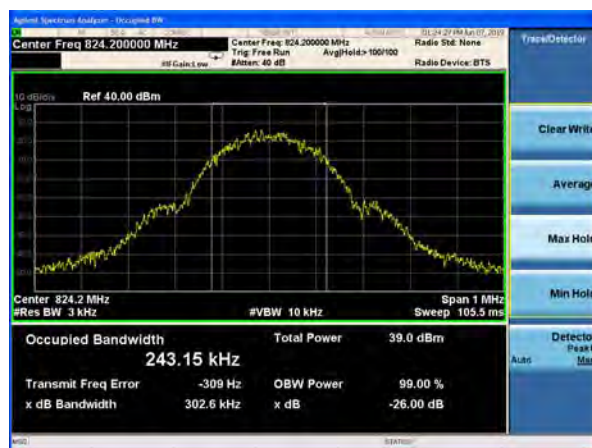

GSM 850 CH-Middle

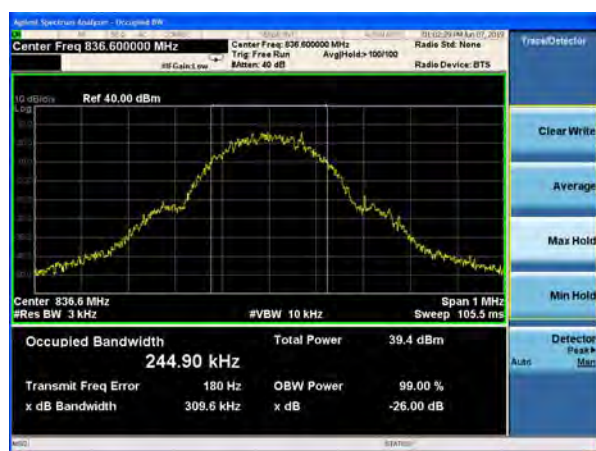


GSM 850 GPRS CH-Middle

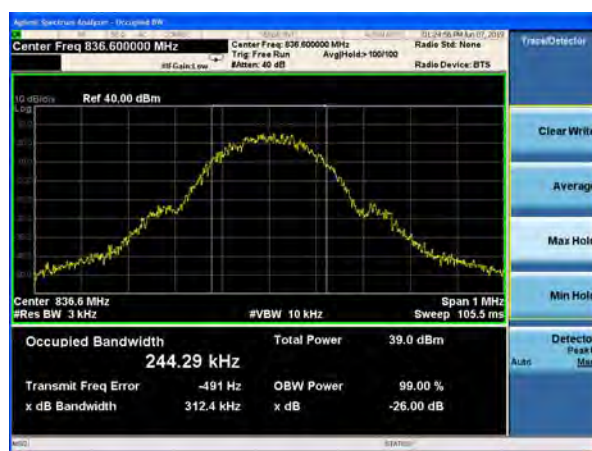

GSM 850 CH-High



GSM 850 GPRS CH-High

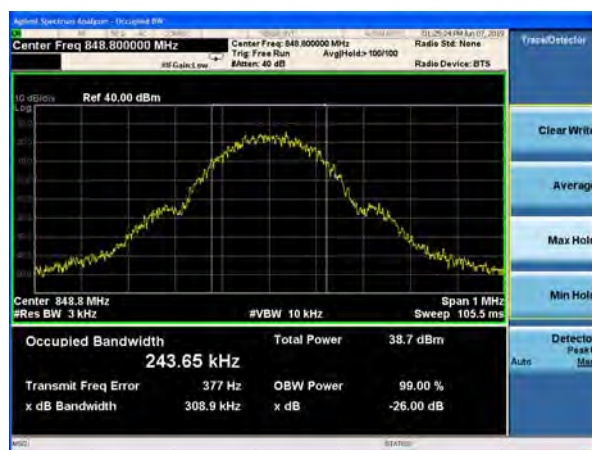

GSM 850 EGPRS CH-Low




WCDMA Band V CH-Low



GSM 850 EGPRS CH-Middle




WCDMA Band V CH-Middle

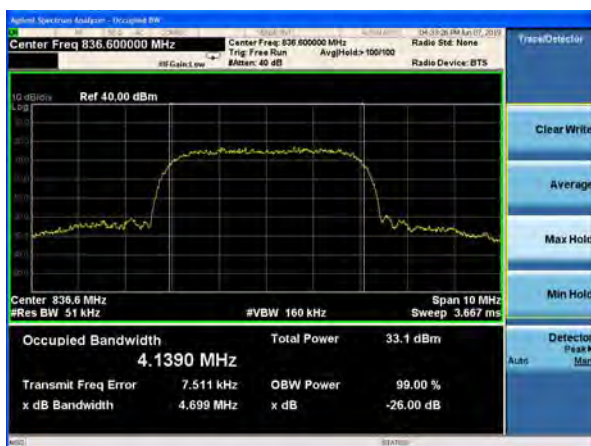


GSM 850 EGPRS CH-High




WCDMA Band V CH-High

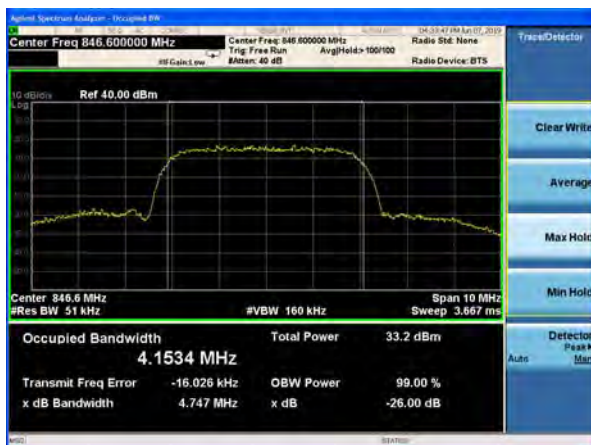


LTE Band 5 QPSK 1.4MHz CH-Low

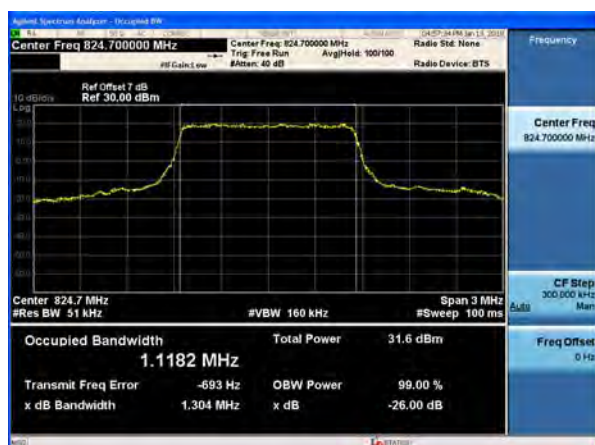


LTE Band 5 QPSK 3MHz CH-Low

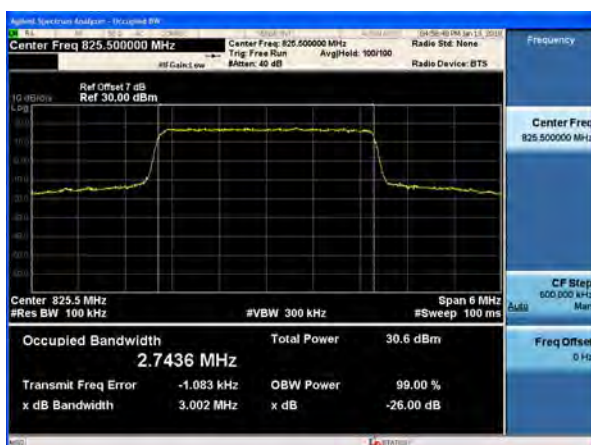


LTE Band 5 QPSK 1.4MHz CH-Middle

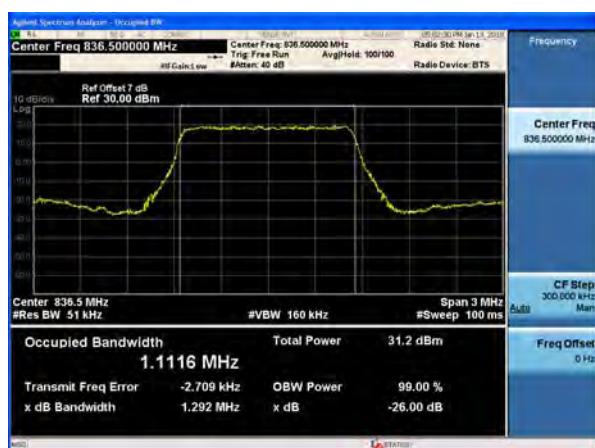


LTE Band 5 QPSK 3MHz CH-Middle

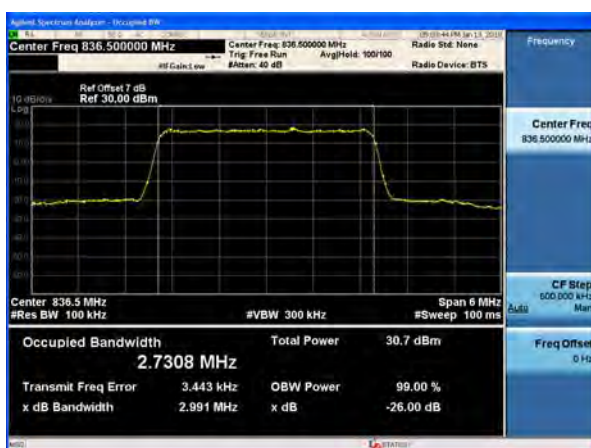

LTE Band 5 QPSK 1.4MHz CH-High

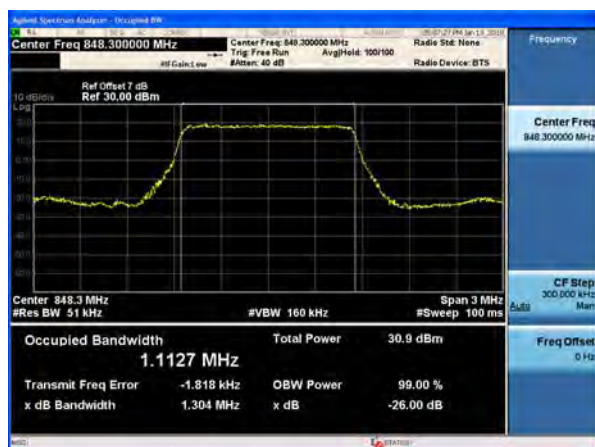


LTE Band 5 QPSK 3MHz CH-High

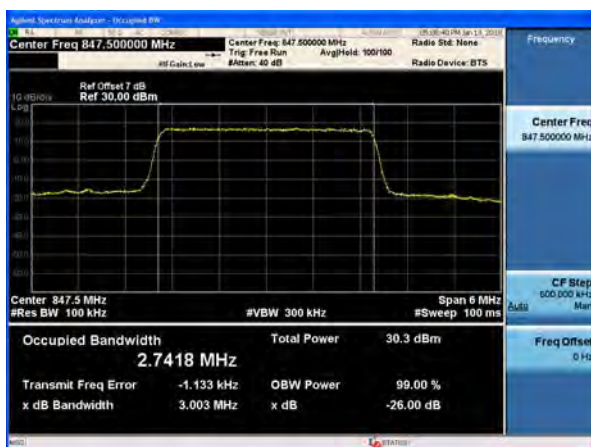


LTE Band 5 QPSK 5MHz CH-Low




LTE Band 5 QPSK 10MHz CH-Low

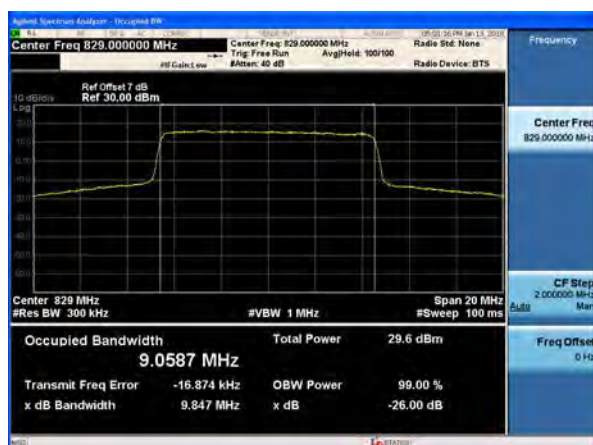

LTE Band 5 QPSK 5MHz CH-Middle

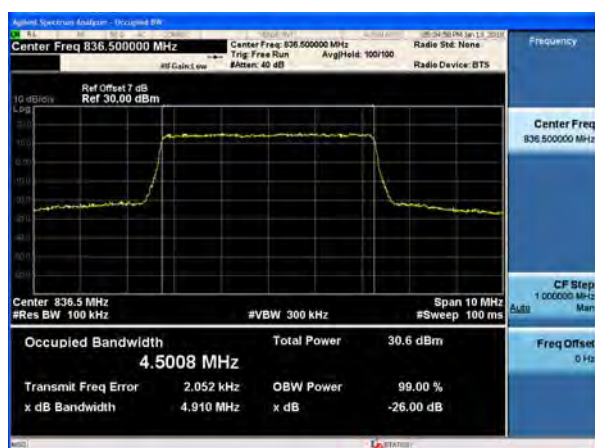

LTE Band 5 QPSK 10MHz CH-Middle

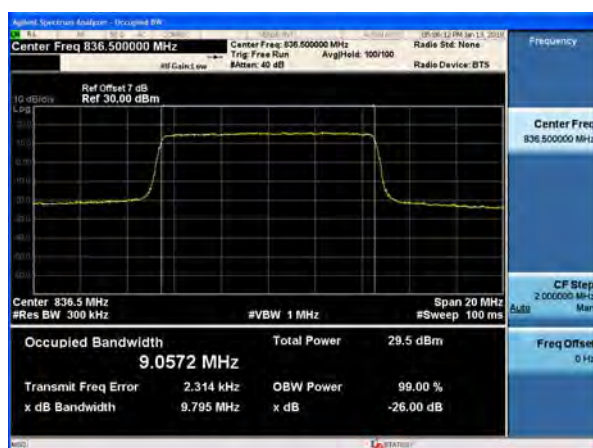

LTE Band 5 QPSK 5MHz CH-High




LTE Band 5 QPSK 10MHz CH-High




LTE Band 5 16QAM 1.4MHz CH-Low




LTE Band 5 16QAM 3MHz CH-Low

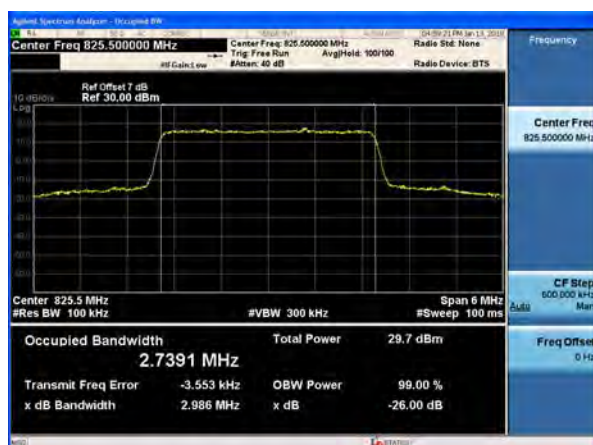


LTE Band 5 16QAM 1.4MHz CH-Middle

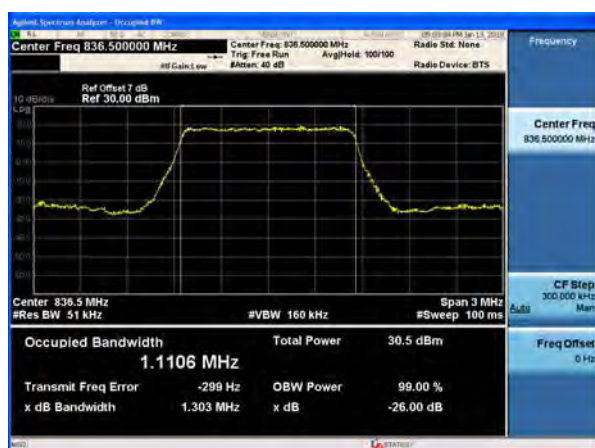


LTE Band 5 16QAM 3MHz CH-Middle

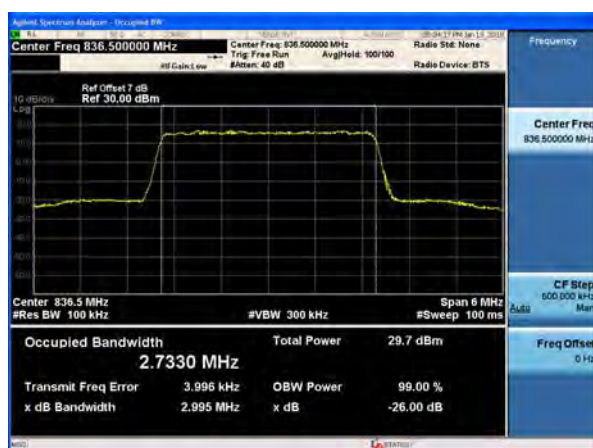

LTE Band 5 16QAM 1.4MHz CH-High

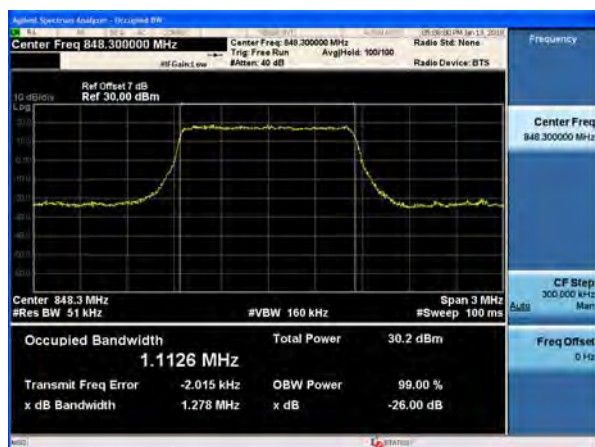


LTE Band 5 16QAM 3MHz CH-High

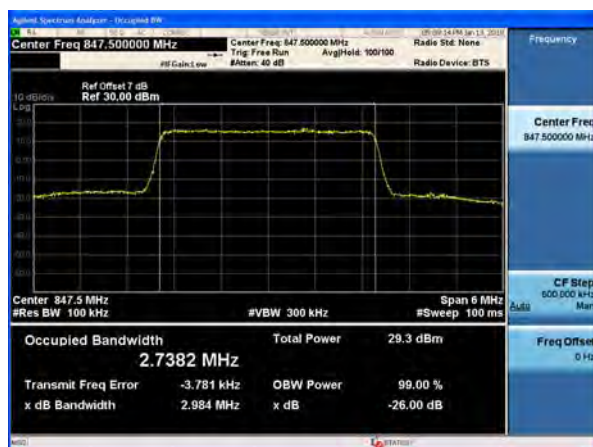



LTE Band 5 16QAM 5MHz CH-Low

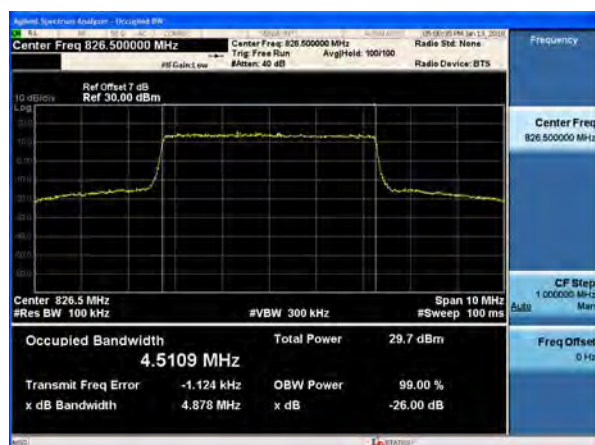

LTE Band 5 16QAM 10MHz CH-Low



LTE Band 5 16QAM 5MHz CH-Middle



LTE Band 5 16QAM 10MHz CH-Middle



LTE Band 5 16QAM 5MHz CH-High



LTE Band 5 16QAM 10MHz CH-High



LTE Band 26 QPSK 1.4MHz CH-Low




LTE Band 26 QPSK 3MHz CH-Low



LTE Band 26 QPSK 1.4MHz CH-Middle




LTE Band 26 QPSK 3MHz CH-Middle

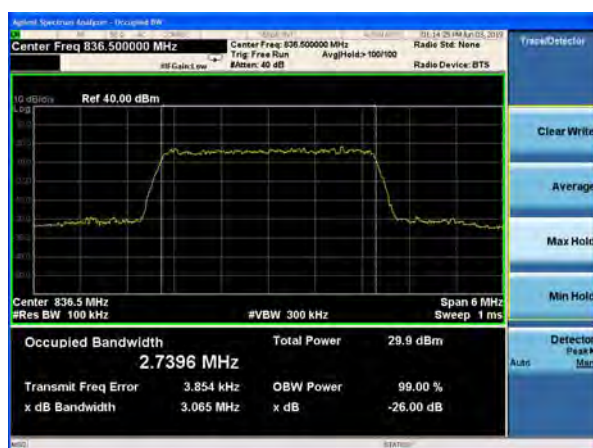

LTE Band 26 QPSK 1.4MHz CH-High



LTE Band 26 QPSK 3MHz CH-High

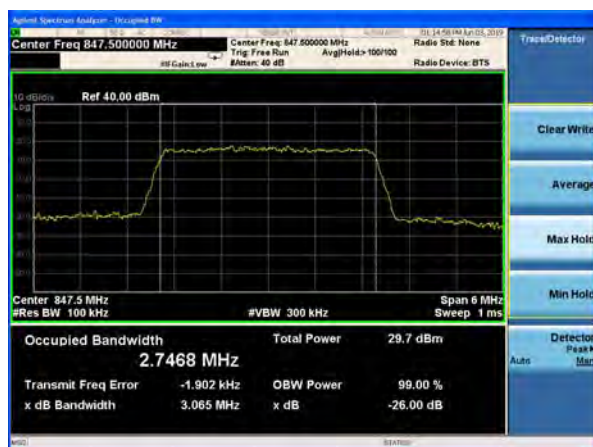



LTE Band 26 QPSK 5MHz CH-Low



LTE Band 26 QPSK 10MHz CH-Low



LTE Band 26 QPSK 5MHz CH-Middle



LTE Band 26 QPSK 10MHz CH-Middle



LTE Band 26 QPSK 5MHz CH-High




LTE Band 26 QPSK 10MHz CH-High




LTE Band 26 QPSK 15MHz CH-Low




LTE Band 26 16QAM 1.4MHz CH-Low

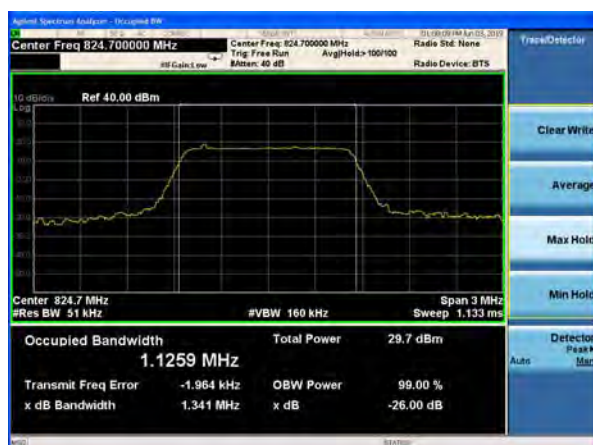


LTE Band 26 QPSK 15MHz CH-Middle

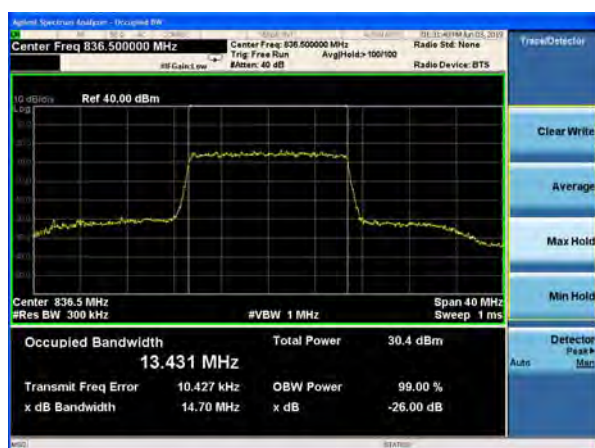


LTE Band 26 16QAM 1.4MHz CH-Middle

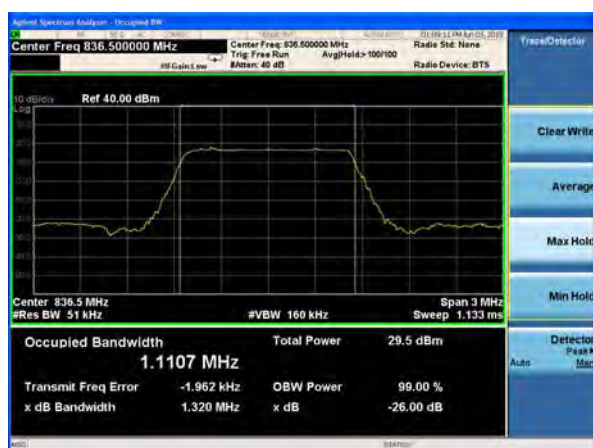

LTE Band 26 QPSK 15MHz CH-High

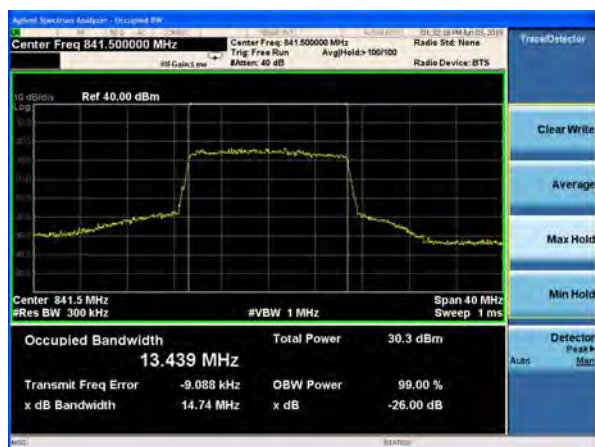

LTE Band 26 16QAM 1.4MHz CH-High

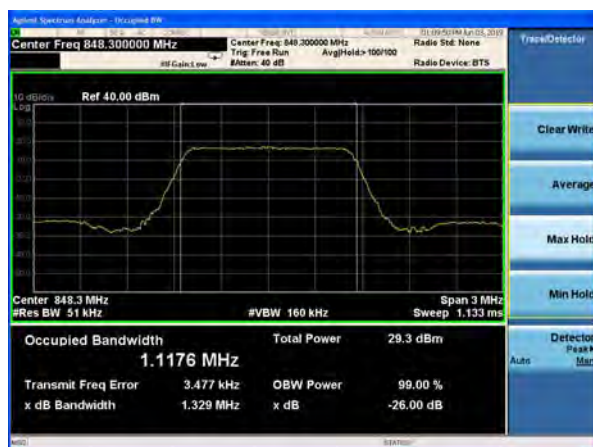




LTE Band 26 16QAM 3MHz CH-Low



LTE Band 26 16QAM 5MHz CH-Low

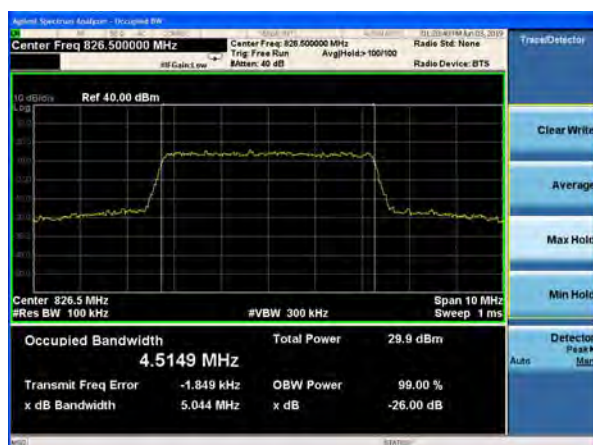

LTE Band 26 16QAM 3MHz CH-Middle




LTE Band 26 16QAM 5MHz CH-Middle



LTE Band 26 16QAM 3MHz CH-High



LTE Band 26 16QAM 5MHz CH-High

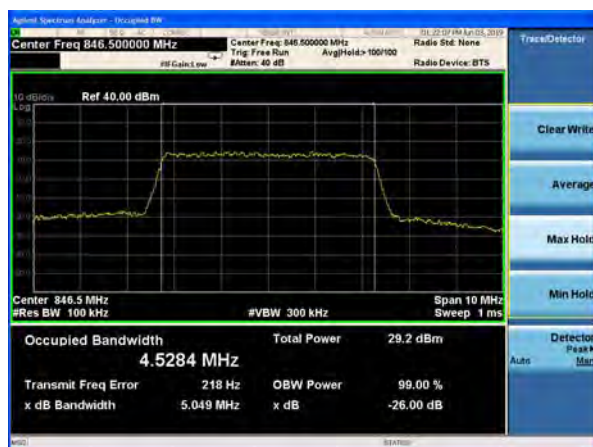

LTE Band 26 16QAM 10MHz CH-Low




LTE Band 26 16QAM 15MHz CH-Low



LTE Band 26 16QAM 10MHz CH-Middle




LTE Band 26 16QAM 15MHz CH-Middle

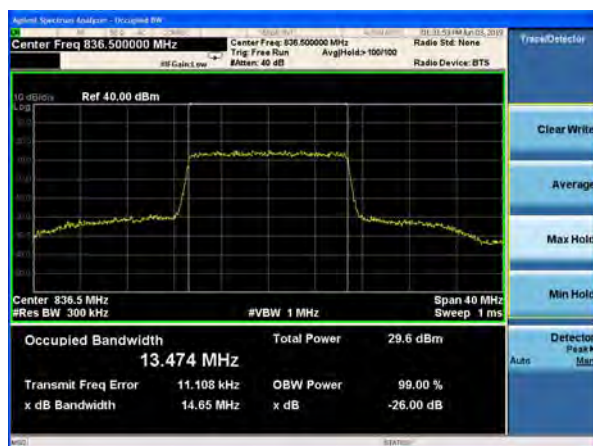

LTE Band 26 16QAM 10MHz CH-High



LTE Band 26 16QAM 15MHz CH-High

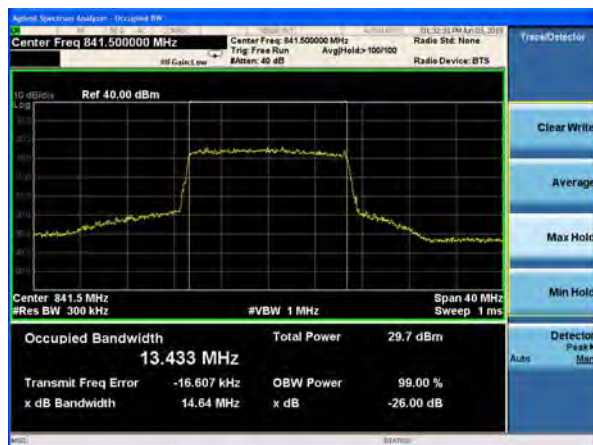

5.4. Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.

RBW is set to 3kHz,VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band V,

RBW is set to 15 kHz, VBW is set to 51 kHz for LTE Band 5/26 (1.4MHz),

RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 5/26 (3MHz),


RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5/26 (5MHz),

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 5/26 (10MHz),

RBW is set to 150 kHz, VBW is set to 510kHz for LTE Band 26 (15MHz).

Spectrum analyzer plots are included on the following pages.

Test Setup

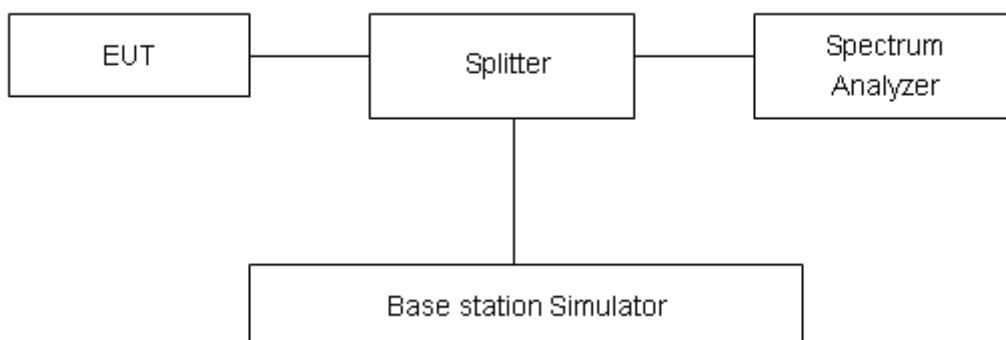

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:


GSM 850 CH-Low



GSM 850 CH-High



GSM 850 GPRS CH-Low

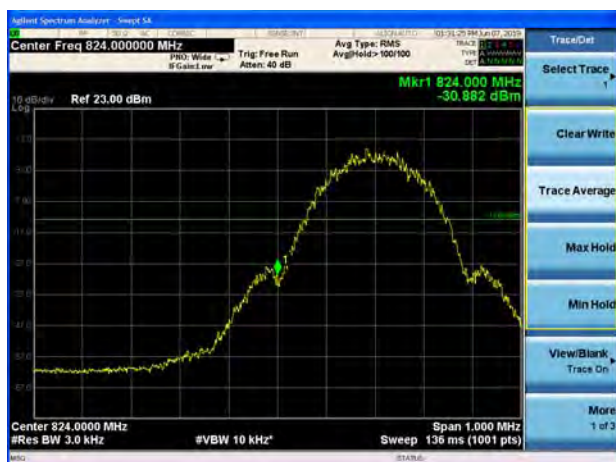

GSM 850 GPRS CH-High



GSM 850 EGPRS CH-Low



GSM 850 EGPRS CH-High




WCDMA Band V CH-Low



WCDMA Band V CH-High




LTE Band 5 QPSK 1.4MHz CH-Low 1RB

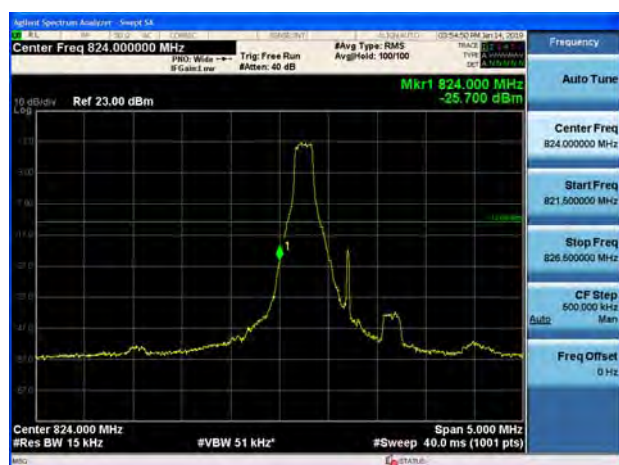


LTE Band 5 QPSK 1.4MHz CH-High 1RB




LTE Band 5 QPSK 1.4MHz CH-Low 100%RB

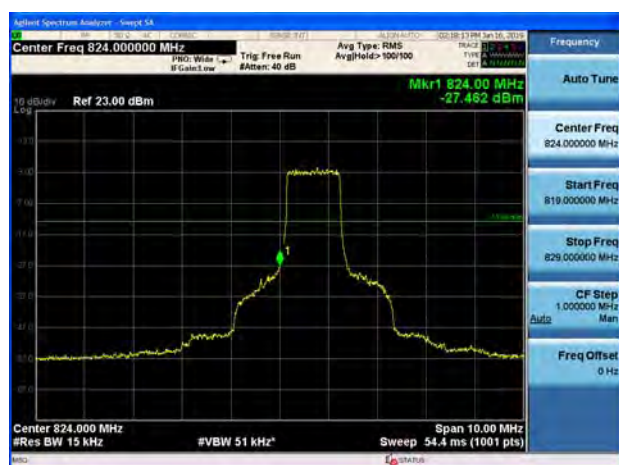


LTE Band 5 QPSK 1.4MHz CH-High 100%RB

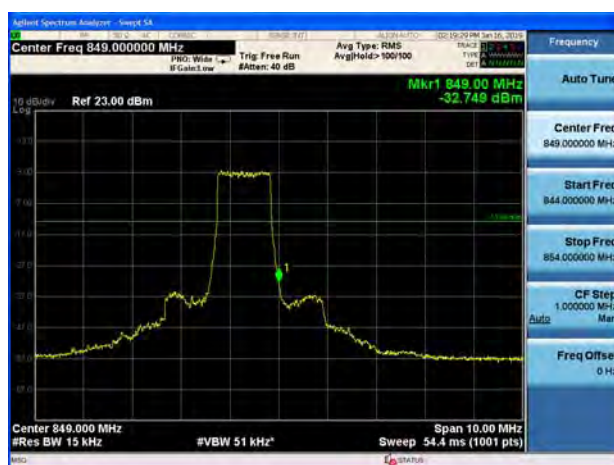

LTE Band 5 QPSK 3MHz CH-Low 1RB

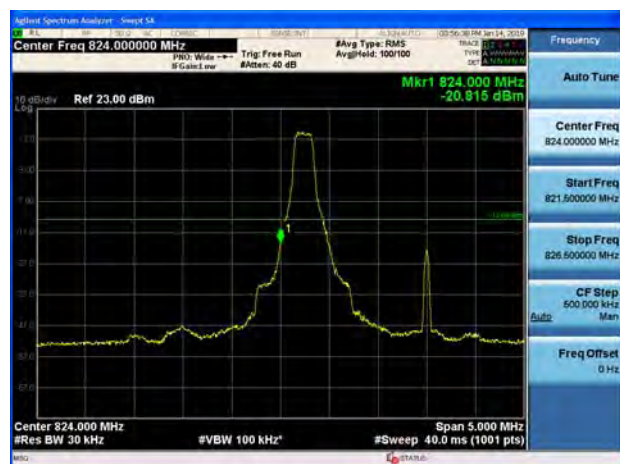

LTE Band 5 QPSK 3MHz CH-High 1RB

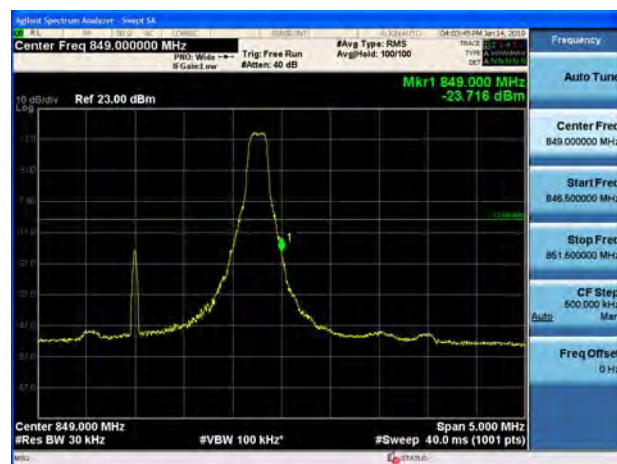


LTE Band 5 QPSK 3MHz CH-Low 100%RB




LTE Band 5 QPSK 3MHz CH-High 100%RB




LTE Band 5 QPSK 5MHz CH-Low 1RB

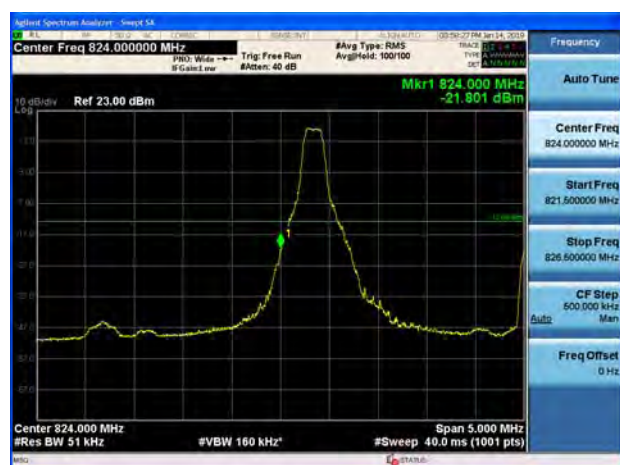

LTE Band 5 QPSK 5MHz CH-High 1RB

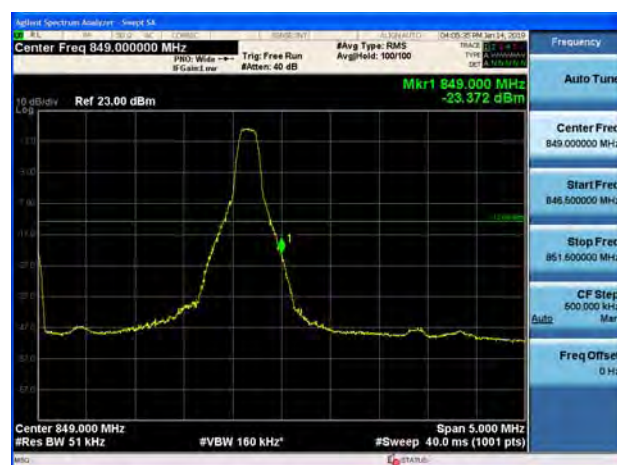


LTE Band 5 QPSK 5MHz CH-Low 100%RB

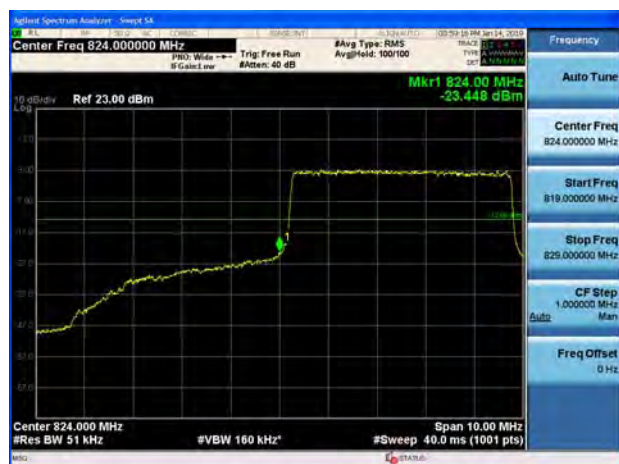


LTE Band 5 QPSK 5MHz CH-High 100%RB



LTE Band 5 QPSK 10MHz CH-Low 1RB

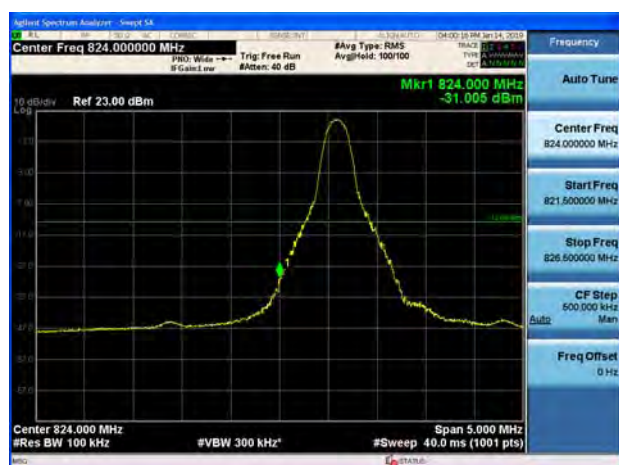

LTE Band 5 QPSK 10MHz CH-High 1RB

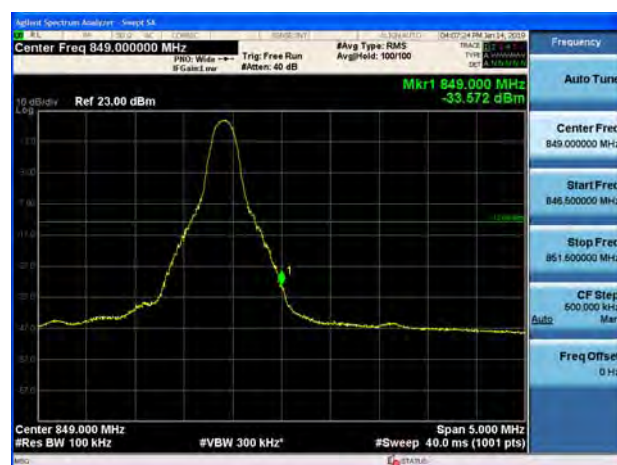

LTE Band 5 QPSK 10MHz CH-Low 100%RB




LTE Band 5 QPSK 10MHz CH-High 100%RB







LTE Band 5 16QAM 1.4MHz CH-Low 1RB

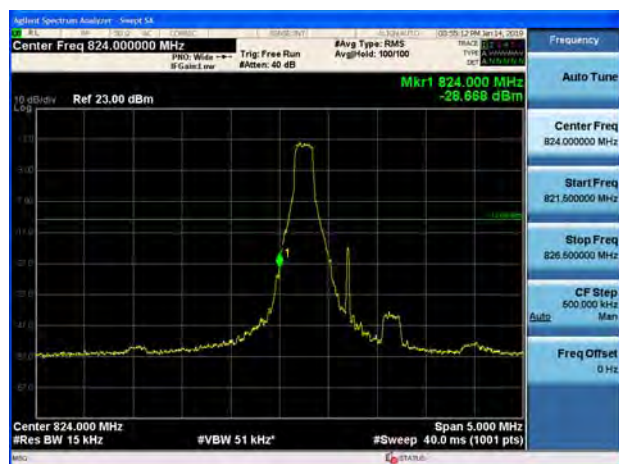


LTE Band 5 16QAM 1.4MHz CH-High 1RB

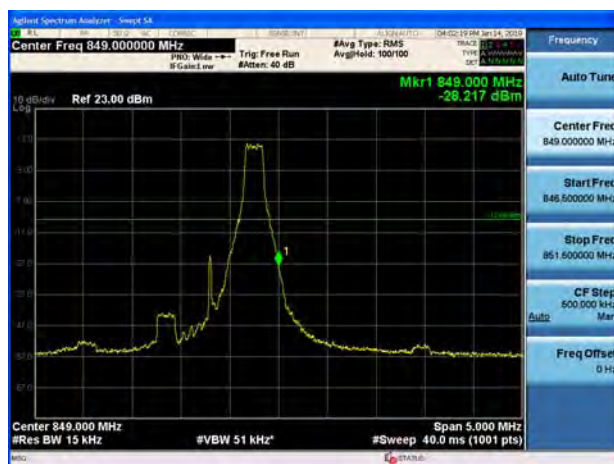


LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

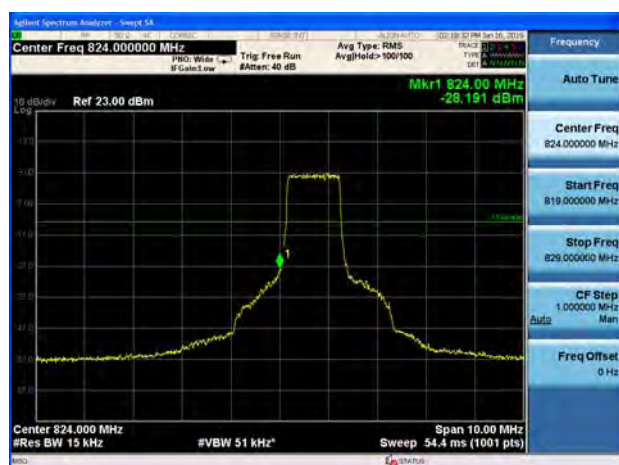


LTE Band 5 16QAM 1.4MHz CH-High 100%RB

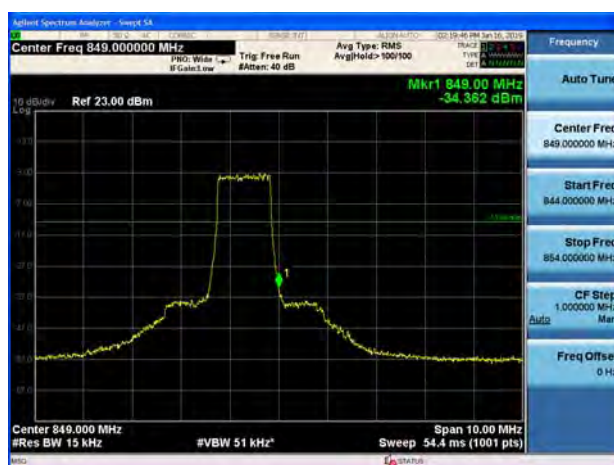

LTE Band 5 16QAM 3MHz CH-Low 1RB

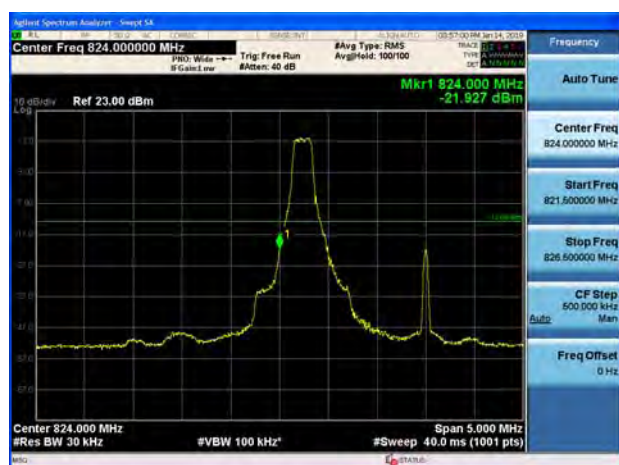

LTE Band 5 16QAM 3MHz CH-High 1RB

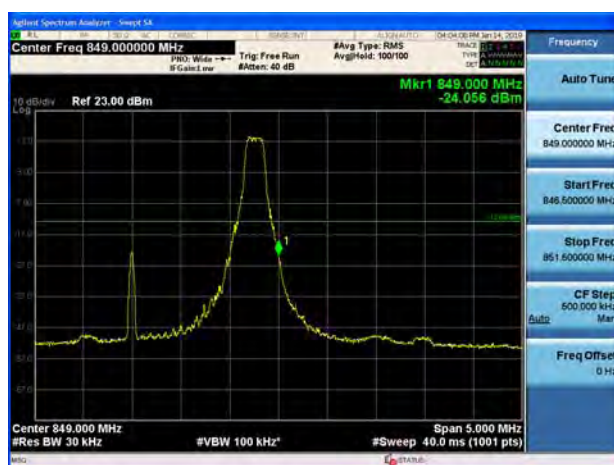


LTE Band 5 16QAM 3MHz CH-Low 100%RB




LTE Band 5 16QAM 3MHz CH-High 100%RB



LTE Band 5 16QAM 5MHz CH-Low 1RB

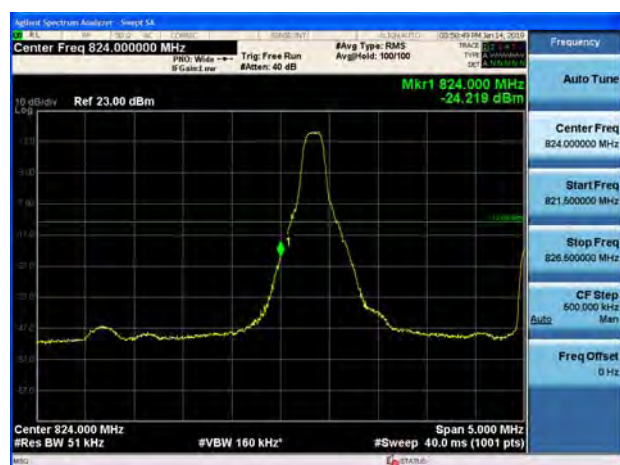

LTE Band 5 16QAM 5MHz CH-High 1RB

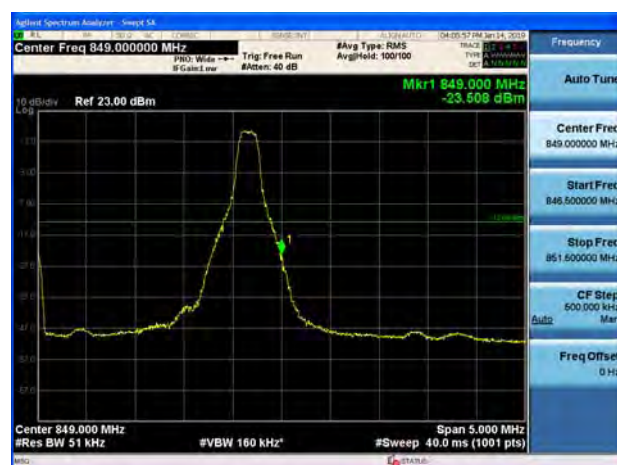


LTE Band 5 16QAM 5MHz CH-Low 100%RB




LTE Band 5 16QAM 5MHz CH-High 100%RB



LTE Band 5 16QAM 10MHz CH-Low 1RB

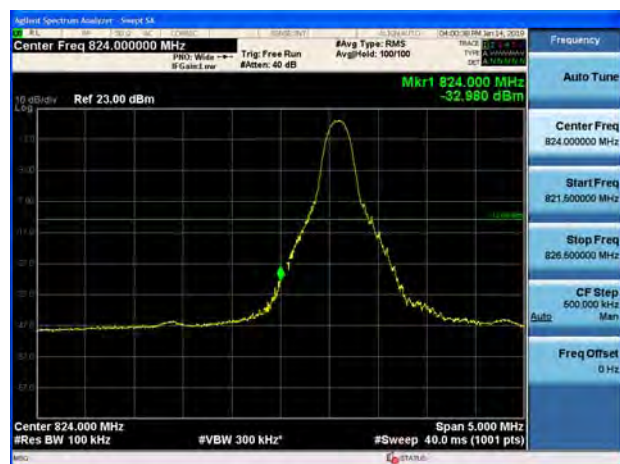

LTE Band 5 16QAM 10MHz CH-High 1RB

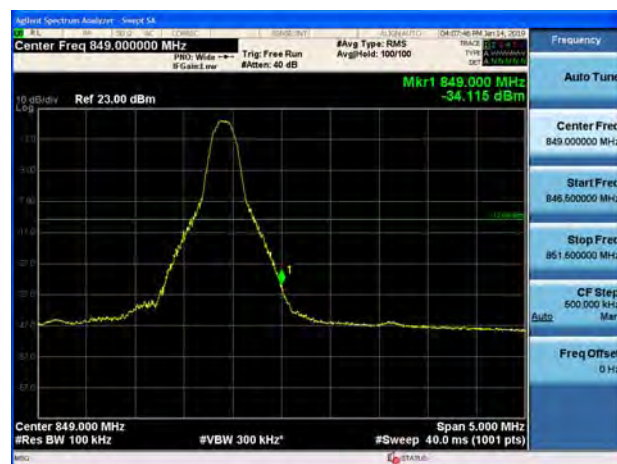


LTE Band 5 16QAM 10MHz CH-Low 100%RB




LTE Band 5 16QAM 10MHz CH-High 100%RB



LTE Band 26 QPSK 1.4MHz CH-Low 1RB

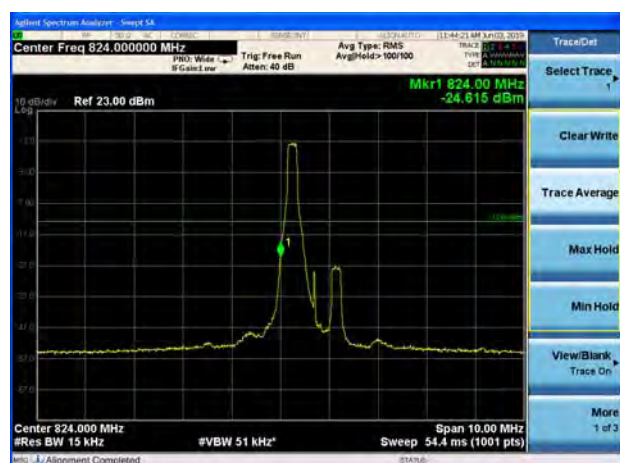


LTE Band 26 QPSK 1.4MHz CH-High 1RB

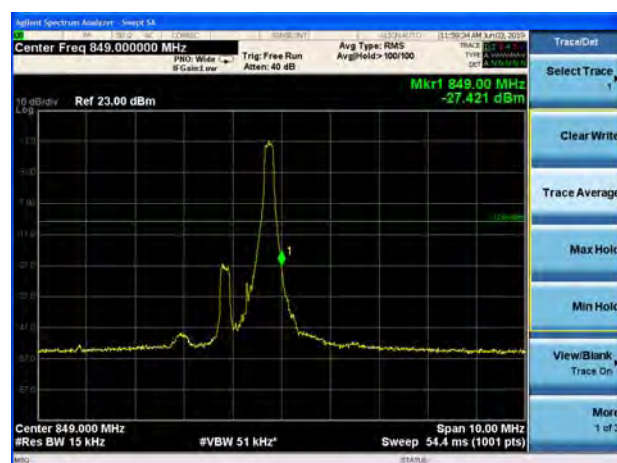





LTE Band 26 QPSK 1.4MHz CH-Low 100%RB

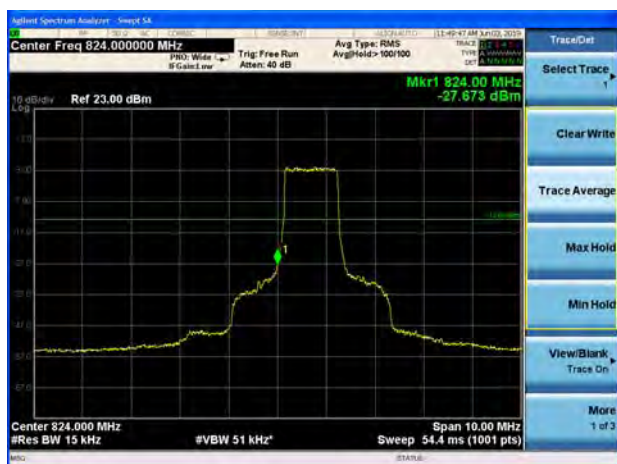


LTE Band 26 QPSK 1.4MHz CH-High 100%RB

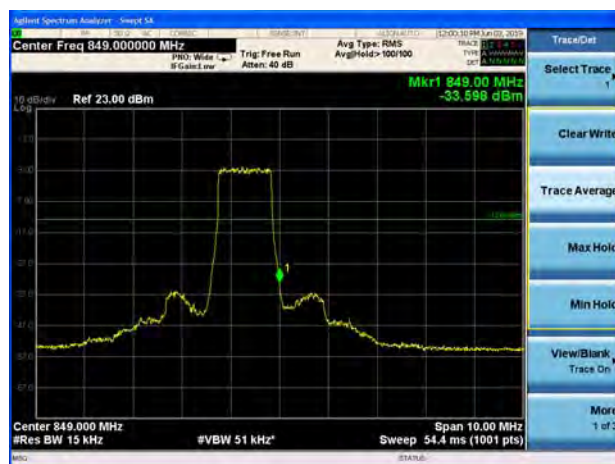

LTE Band 26 QPSK 3MHz CH-Low 1RB

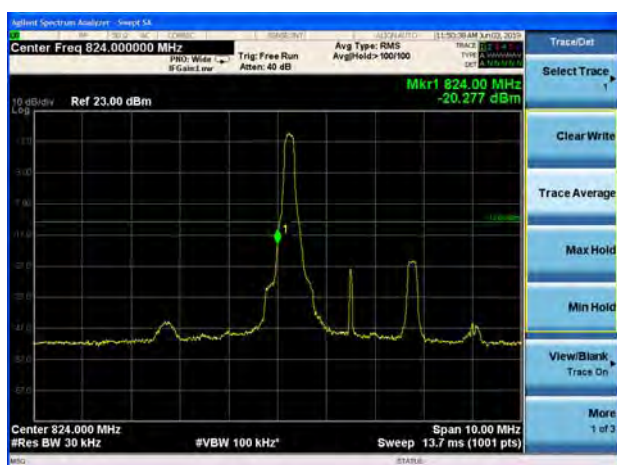

LTE Band 26 QPSK 3MHz CH-High 1RB

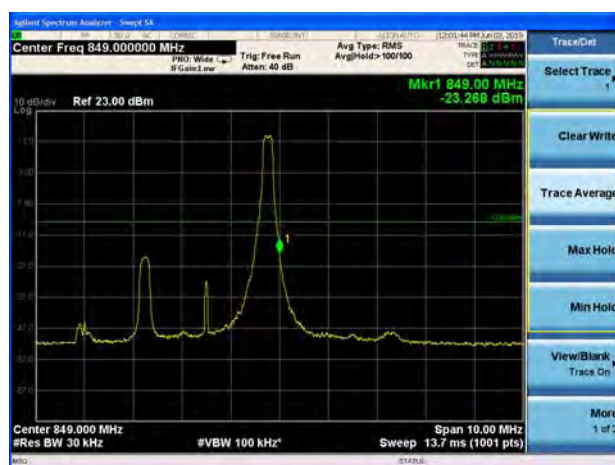

LTE Band 26 QPSK 3MHz CH-Low 100%RB




LTE Band 26 QPSK 3MHz CH-High 100%RB






LTE Band 26 QPSK 5MHz CH-Low 1RB

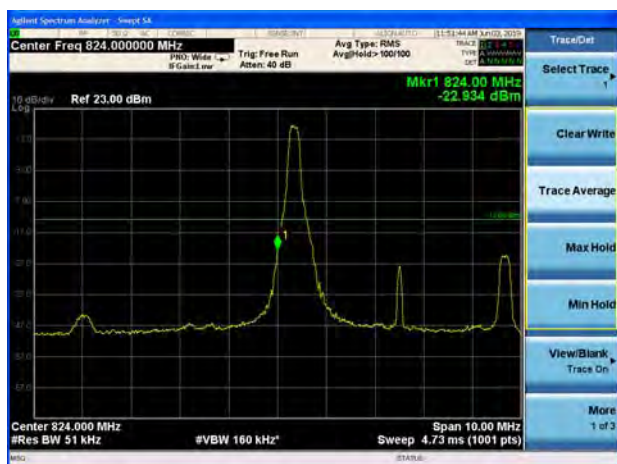

LTE Band 26 QPSK 5MHz CH-High 1RB

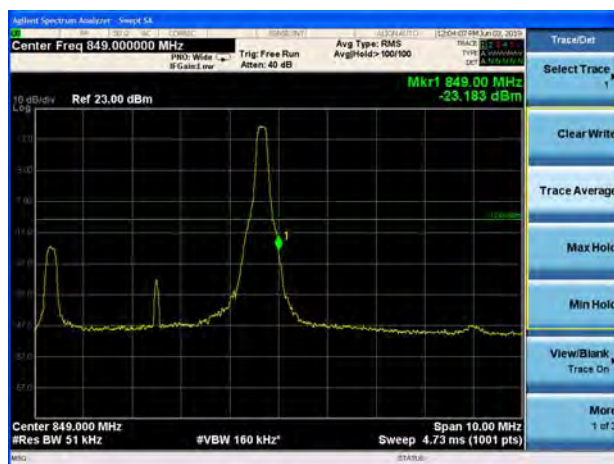


LTE Band 26 QPSK 5MHz CH-Low 100%RB




LTE Band 26 QPSK 5MHz CH-High 100%RB



LTE Band 26 QPSK 10MHz CH-Low 1RB

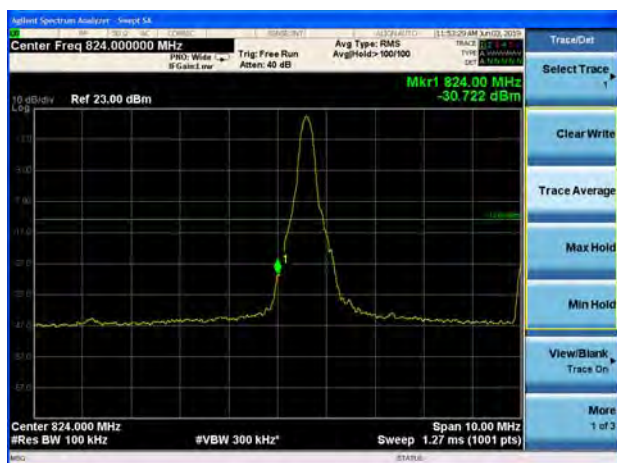

LTE Band 26 QPSK 10MHz CH-High 1RB

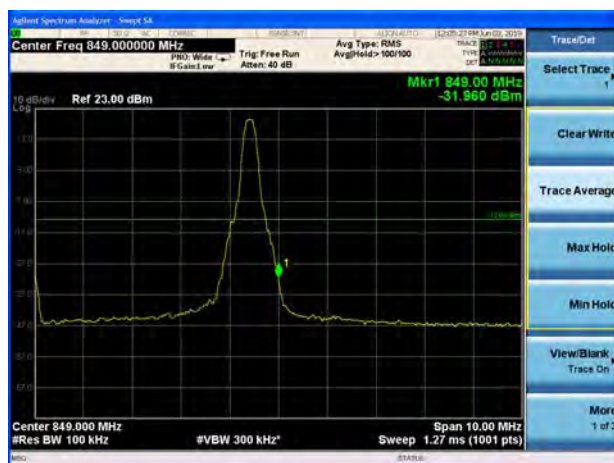


LTE Band 26 QPSK 10MHz CH-Low 100%RB




LTE Band 26 QPSK 10MHz CH-High 100%RB



LTE Band 26 QPSK 15MHz CH-Low 1RB

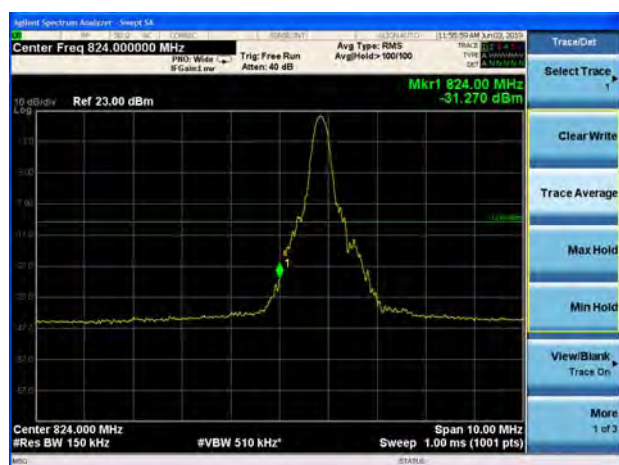

LTE Band 26 QPSK 15MHz CH-High 1RB

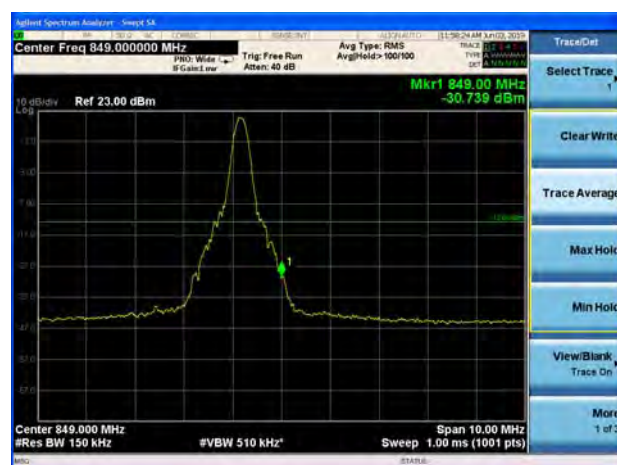

LTE Band 26 QPSK 15MHz CH-Low 100%RB




LTE Band 26 QPSK 15MHz CH-High 100%RB







LTE Band 26 16QAM 1.4MHz CH-Low 1RB

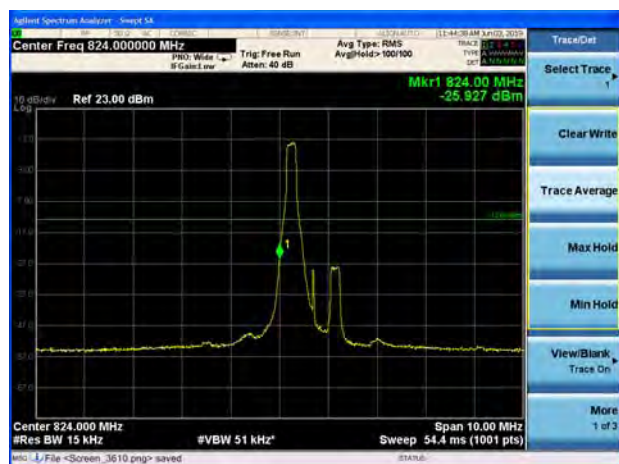


LTE Band 26 16QAM 1.4MHz CH-High 1RB

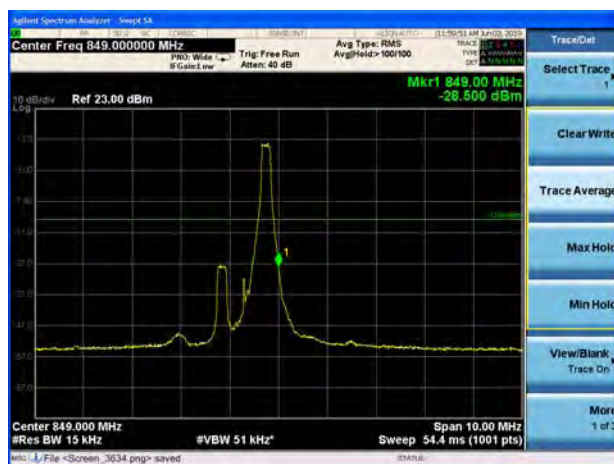


LTE Band 26 16QAM 1.4MHz CH-Low 100%RB

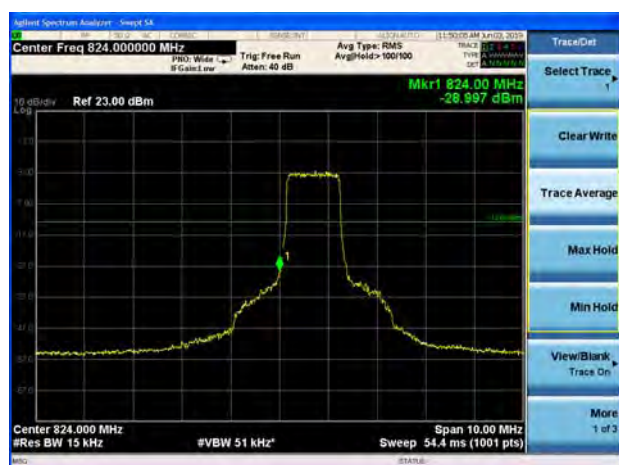


LTE Band 26 16QAM 1.4MHz CH-High 100%RB

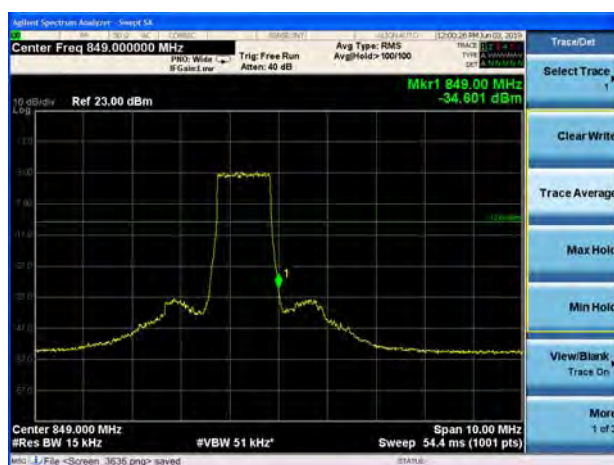

LTE Band 26 16QAM 3MHz CH-Low 1RB

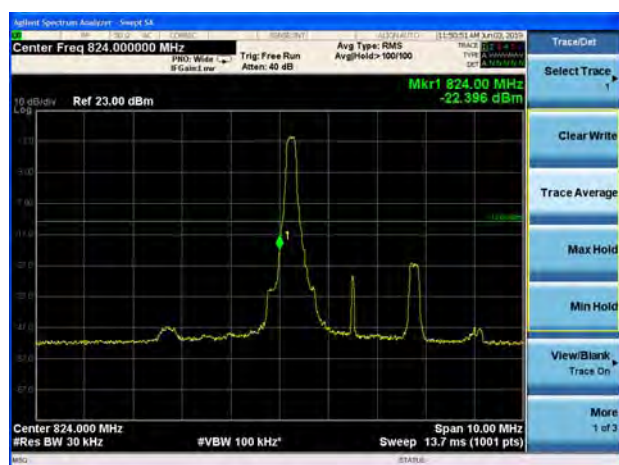

LTE Band 26 16QAM 3MHz CH-High 1RB

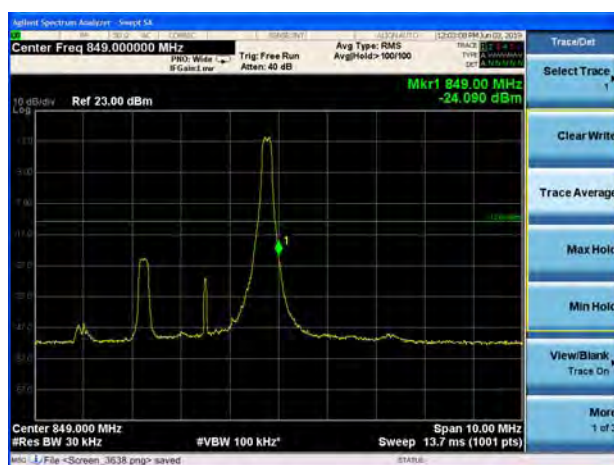


LTE Band 26 16QAM 3MHz CH-Low 100%RB




LTE Band 26 16QAM 3MHz CH-High 100%RB




LTE Band 26 16QAM 5MHz CH-Low 1RB

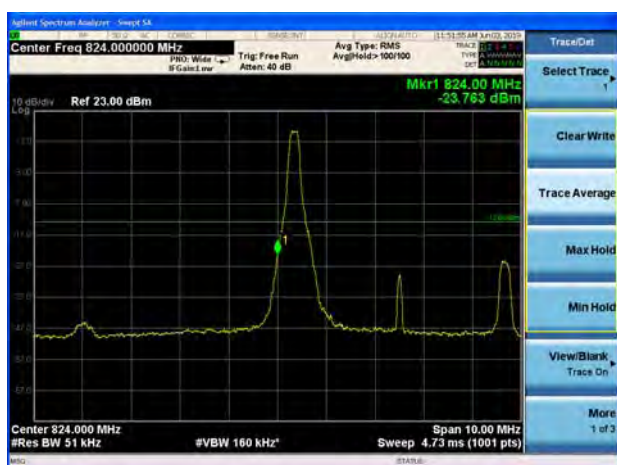

LTE Band 26 16QAM 5MHz CH-High 1RB

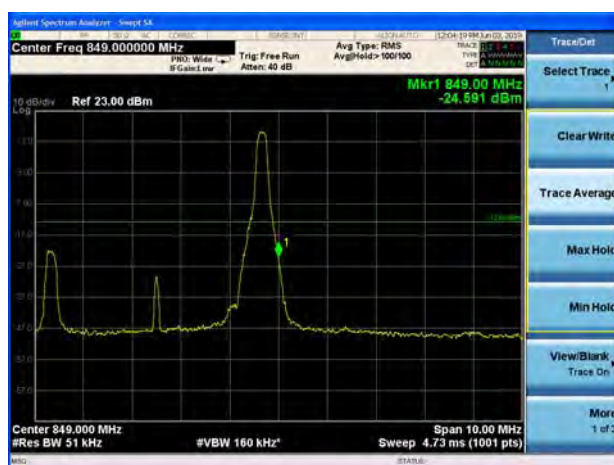


LTE Band 26 16QAM 5MHz CH-Low 100%RB

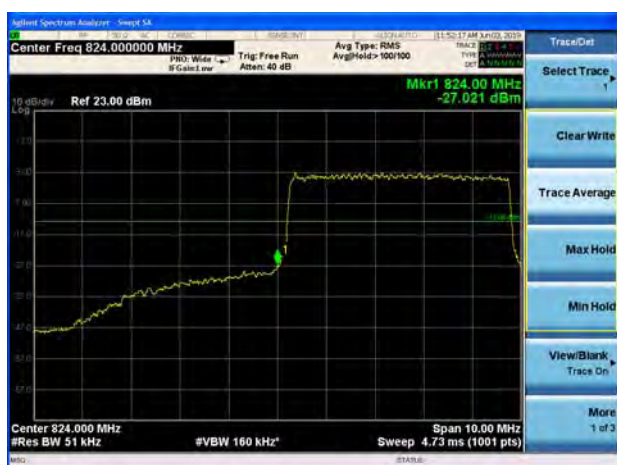


LTE Band 26 16QAM 5MHz CH-High 100%RB



LTE Band 26 16QAM 10MHz CH-Low 1RB

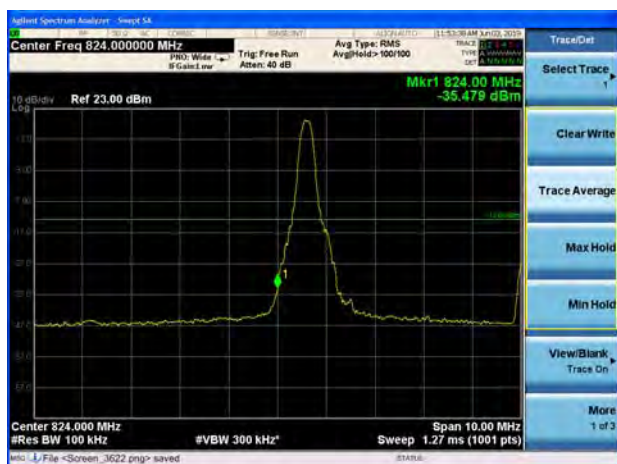

LTE Band 26 16QAM 10MHz CH-High 1RB

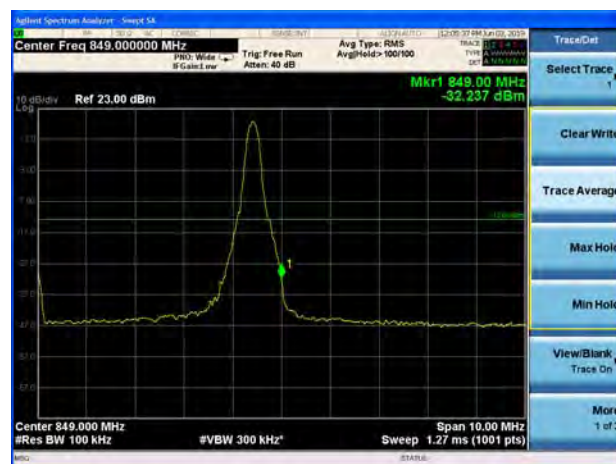


LTE Band 26 16QAM 10MHz CH-Low 100%RB




LTE Band 26 16QAM 10MHz CH-High 100%RB



LTE Band 26 16QAM 15MHz CH-Low 1RB

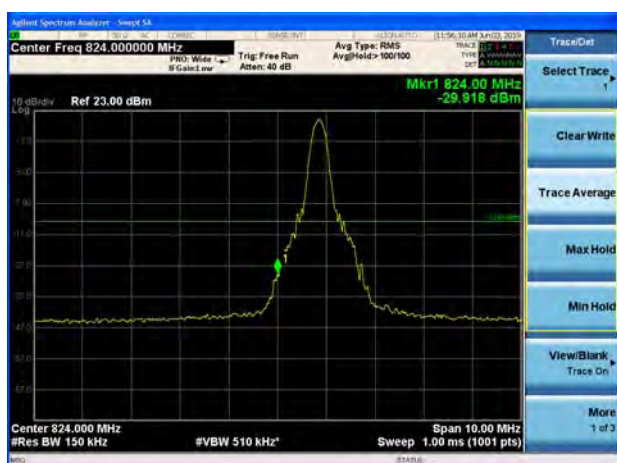


LTE Band 26 16QAM 15MHz CH-High 1RB

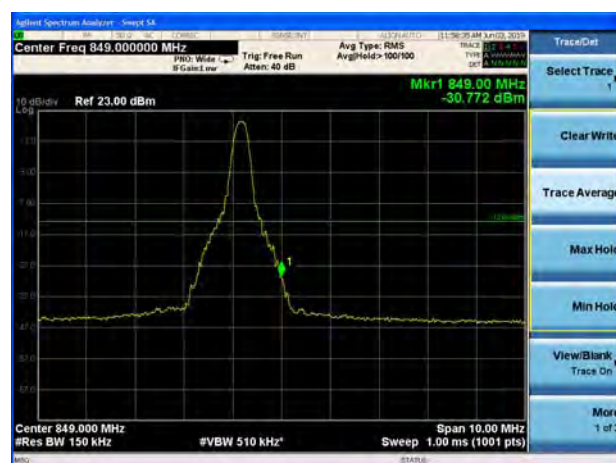



LTE Band 26 16QAM 15MHz CH-Low 100%RB

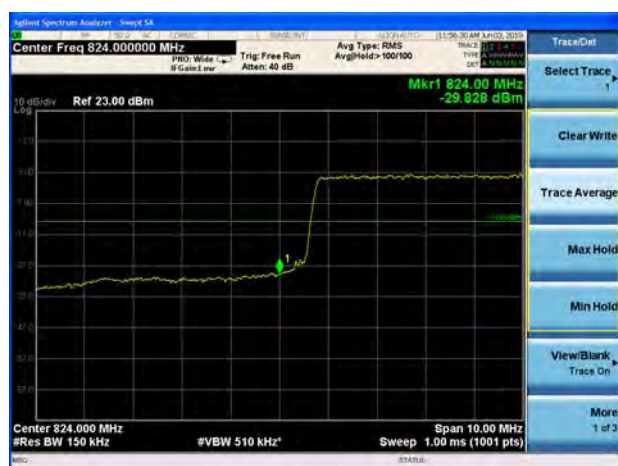

LTE Band 26 16QAM 15MHz CH-High 100%RB



5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

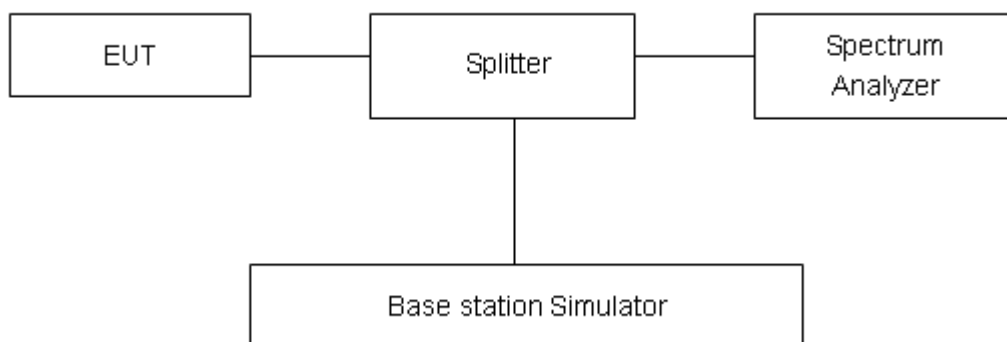

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
GSM 850 (GSM)	128	824.2	32.28	31.07	1.21	≤13	PASS
	190	836.6	32.28	31.05	1.23	≤13	PASS
	251	848.8	32.35	31.10	1.25	≤13	PASS
GPRS 850 (GMSK)	128	824.2	32.29	31.14	1.15	≤13	PASS
	190	836.6	32.30	31.10	1.20	≤13	PASS
	251	848.8	32.37	31.18	1.19	≤13	PASS
EGPRS 850 (8-PSK)	128	824.2	30.56	27.15	3.41	≤13	PASS
	190	836.6	30.47	27.10	3.37	≤13	PASS
	251	848.8	30.19	26.83	3.36	≤13	PASS
WCDMA Band V (RMC)	4132	826.4	26.28	24.11	2.17	≤13	PASS
	4183	836.6	26.94	24.03	2.91	≤13	PASS
	4233	846.6	26.52	23.93	2.59	≤13	PASS

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	24.58	20.03	4.55	≤13	PASS
		20525	836.5	25.04	19.93	5.11	≤13	PASS
		20643	848.3	24.59	19.68	4.91	≤13	PASS
	3	20415	825.5	24.49	19.94	4.55	≤13	PASS
		20525	836.5	25.05	19.89	5.16	≤13	PASS
		20635	847.5	24.43	19.59	4.84	≤13	PASS
	5	20425	826.5	24.35	19.92	4.43	≤13	PASS
		20525	836.5	24.97	19.88	5.09	≤13	PASS
		20625	846.5	24.26	19.60	4.66	≤13	PASS
	10	20450	829	24.42	19.93	4.49	≤13	PASS
		20525	836.5	24.73	19.76	4.97	≤13	PASS
		20600	844	24.37	19.63	4.74	≤13	PASS
16QAM	1.4	20407	824.7	24.46	19.11	5.35	≤13	PASS
		20525	836.5	24.75	18.85	5.90	≤13	PASS
		20643	848.3	24.46	18.69	5.77	≤13	PASS
	3	20415	825.5	24.28	18.93	5.35	≤13	PASS
		20525	836.5	24.94	18.98	5.96	≤13	PASS
		20635	847.5	24.26	18.64	5.62	≤13	PASS



	5	20425	826.5	24.18	19.02	5.16	≤13	PASS
		20525	836.5	24.79	18.95	5.84	≤13	PASS
		20625	846.5	23.96	18.58	5.38	≤13	PASS
	10	20450	829	24.10	18.87	5.23	≤13	PASS
		20525	836.5	24.56	18.81	5.75	≤13	PASS
		20600	844	24.18	18.72	5.46	≤13	PASS



LTE Band 26								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	26797	824.7	26.28	21.55	4.73	≤13	PASS
		26915	836.5	26.64	21.49	5.15	≤13	PASS
		27033	848.3	26.36	21.22	5.14	≤13	PASS
	3	26805	825.5	26.38	21.64	4.74	≤13	PASS
		26915	836.5	26.66	21.47	5.19	≤13	PASS
		27025	847.5	26.37	21.32	5.05	≤13	PASS
	5	26815	826.5	26.22	21.57	4.65	≤13	PASS
		26915	836.5	26.69	21.53	5.16	≤13	PASS
		27015	846.5	26.17	21.33	4.84	≤13	PASS
	10	26840	829	26.46	21.70	4.76	≤13	PASS
		26915	836.5	26.62	21.60	5.02	≤13	PASS
		26990	844	26.21	21.43	4.78	≤13	PASS
	15	26865	831.5	26.82	21.76	5.06	≤13	PASS
		26915	836.5	26.52	21.67	4.85	≤13	PASS
		26965	841.5	26.40	21.47	4.93	≤13	PASS
16QAM	1.4	26797	824.7	26.35	20.88	5.47	≤13	PASS
		26915	836.5	236.60	230.54	6.06	≤13	PASS
		27033	848.3	26.36	20.43	5.93	≤13	PASS
	3	26805	825.5	26.25	20.75	5.50	≤13	PASS
		26915	836.5	26.59	20.59	6.00	≤13	PASS
		27025	847.5	26.14	20.34	5.80	≤13	PASS
	5	26815	826.5	26.04	20.67	5.37	≤13	PASS
		26915	836.5	26.51	20.60	5.91	≤13	PASS
		27015	846.5	26.02	20.46	5.56	≤13	PASS
	10	26840	829	26.38	20.99	5.39	≤13	PASS
		26915	836.5	26.67	20.87	5.80	≤13	PASS
		26990	844	25.96	20.45	5.51	≤13	PASS
	15	26865	831.5	26.33	20.61	5.72	≤13	PASS
		26915	836.5	7.69	2.08	5.61	≤13	PASS
		26965	841.5	26.32	20.71	5.61	≤13	PASS

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.5 V and 4.2 V, with a nominal voltage of 3.7V

Test setup

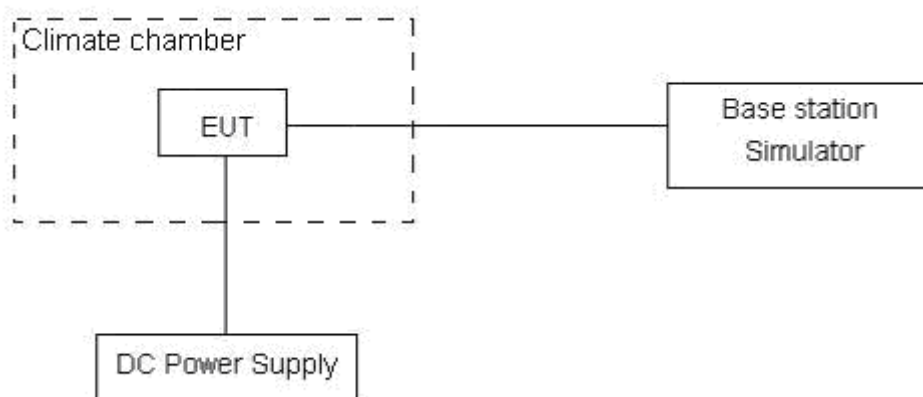

**Limits**

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

GSM850						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	GMSK	8PSK	GMSK	8PSK	
Normal (25℃)	Normal	7.16	10.83	0.00381	0.00576	PASS
Extreme (55℃)		8.77	7.15	0.00466	0.00381	PASS
Extreme (50℃)		12.42	10.64	0.00661	0.00566	PASS
Extreme (40℃)		10.80	9.09	0.00575	0.00484	PASS
Extreme (30℃)		2.56	6.10	0.00136	0.00324	PASS
Extreme (20℃)		13.81	14.47	0.00735	0.00770	PASS
Extreme (10℃)		17.64	17.14	0.00938	0.00912	PASS
Extreme (0℃)		16.88	4.42	0.00898	0.00235	PASS
Extreme (-10℃)		2.06	10.92	0.00109	0.00581	PASS
Extreme (-20℃)		7.31	17.09	0.00389	0.00909	PASS
Extreme (-30℃)		16.56	5.06	0.00881	0.00269	PASS
25℃	LV	16.06	4.67	0.00854	0.00248	PASS
	HV	8.88	17.65	0.00473	0.00939	PASS

WCDMA Band 5						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	QPSK	BPSK	QPSK	BPSK	
Normal (25℃)	Normal	9.35	1.73	0.00497	0.00092	PASS
Extreme (55℃)		7.73	9.21	0.00411	0.00490	PASS
Extreme (50℃)		14.55	15.77	0.00774	0.00839	PASS
Extreme (40℃)		9.22	2.86	0.00490	0.00152	PASS
Extreme (30℃)		3.90	10.52	0.00207	0.00560	PASS
Extreme (20℃)		15.29	5.05	0.00813	0.00268	PASS
Extreme (10℃)		8.93	14.14	0.00475	0.00752	PASS
Extreme (0℃)		8.44	15.96	0.00449	0.00849	PASS
Extreme (-10℃)		8.37	16.30	0.00445	0.00867	PASS
Extreme (-20℃)		10.15	14.09	0.00540	0.00750	PASS
Extreme (-30℃)		5.61	1.31	0.00299	0.00070	PASS
25℃	LV	4.07	8.31	0.00217	0.00442	PASS
	HV	1.35	15.25	0.00072	0.00811	PASS

LTE Band 5(10MHz BANDWIDTH)						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	QPSK	BPSK	QPSK	BPSK	
Normal (25℃)	Normal	9.74	12.43	0.00518	0.00661	PASS
Extreme (55℃)		10.58	11.98	0.00563	0.00637	PASS
Extreme (50℃)		6.01	10.51	0.00320	0.00559	PASS
Extreme (40℃)		1.30	1.90	0.00069	0.00101	PASS
Extreme (30℃)		11.52	13.71	0.00613	0.00729	PASS
Extreme (20℃)		15.98	15.06	0.00850	0.00801	PASS
Extreme (10℃)		9.76	17.24	0.00519	0.00917	PASS
Extreme (0℃)		12.78	1.55	0.00680	0.00082	PASS
Extreme (-10℃)		8.32	1.70	0.00443	0.00090	PASS
Extreme (-20℃)		7.53	16.22	0.00401	0.00863	PASS
Extreme (-30℃)		9.40	15.76	0.00500	0.00838	PASS
25℃	LV	4.25	14.99	0.00226	0.00797	PASS
	HV	7.31	13.72	0.00389	0.00730	PASS

LTE Band 26(10MHz BANDWIDTH)						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	QPSK	BPSK	QPSK	BPSK	
Normal (25℃)	Normal	11.79	7.76	0.00627	0.00413	PASS
Extreme (55℃)		3.27	4.42	0.00174	0.00235	PASS
Extreme (50℃)		14.22	10.40	0.00756	0.00553	PASS
Extreme (40℃)		11.20	3.77	0.00596	0.00201	PASS
Extreme (30℃)		4.94	6.70	0.00263	0.00356	PASS
Extreme (20℃)		10.15	6.11	0.00540	0.00325	PASS
Extreme (10℃)		4.98	14.78	0.00265	0.00786	PASS
Extreme (0℃)		6.58	2.65	0.00350	0.00141	PASS
Extreme (-10℃)		2.00	16.09	0.00106	0.00856	PASS
Extreme (-20℃)		5.18	2.65	0.00276	0.00141	PASS
Extreme (-30℃)		6.90	10.10	0.00367	0.00537	PASS
25℃	LV	10.00	1.39	0.00532	0.00074	PASS
	HV	7.76	10.69	0.00413	0.00569	PASS

5.7. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

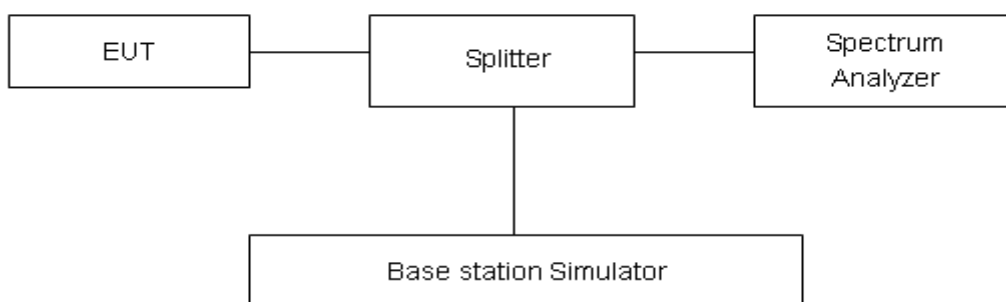

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB




Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.


The signal beyond the limit is carrier.

GSM 850 CH-Low 30MHz ~ 1GHz

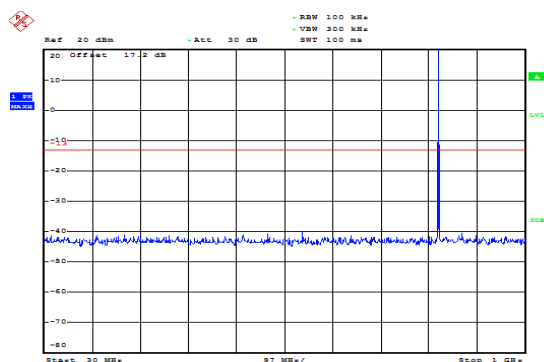


Date: 6.JUN.2019 15:48:22

GSM 850 CH-Low 1GHz ~ 9GHz

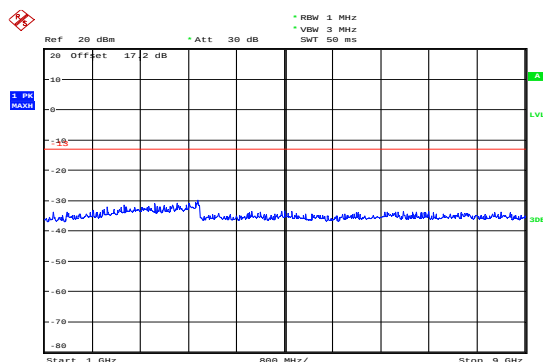


Date: 6.JUN.2019 15:49:41

GSM 850 CH-Middle 30MHz ~ 1GHz

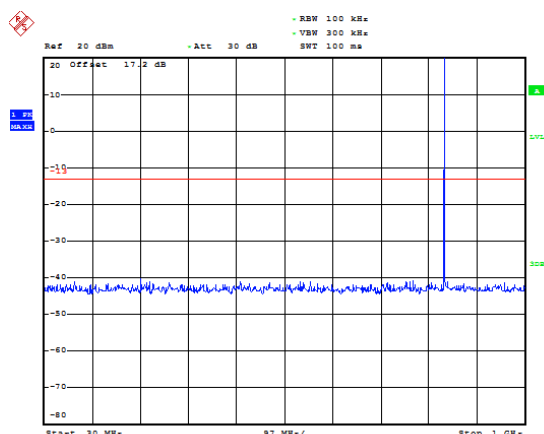


Date: 6.JUN.2019 15:48:44

GSM 850 CH-Middle 1GHz ~ 9GHz

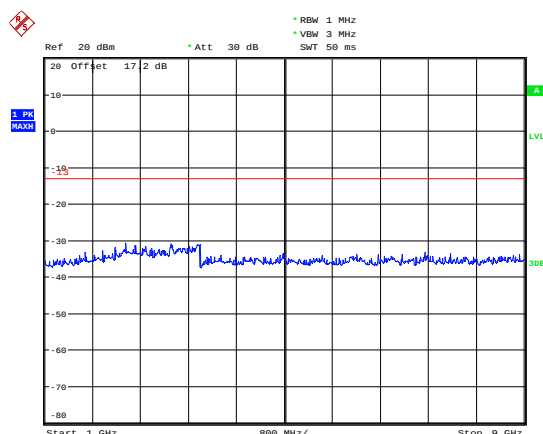


Date: 6.JUN.2019 15:49:24

GSM 850 CH-High 30MHz ~ 1GHz

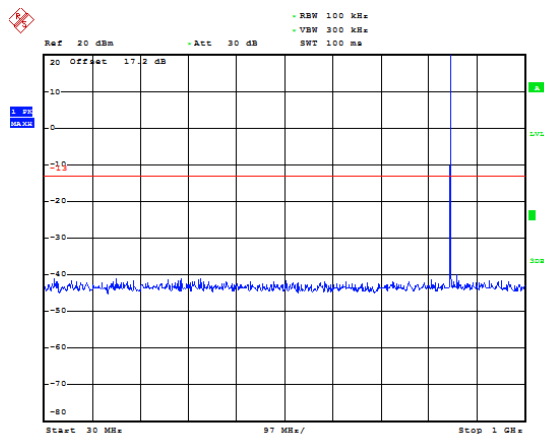

Date: 6.JUN.2019 15:48:55


GSM 850 CH-High 1GHz ~ 9GHz

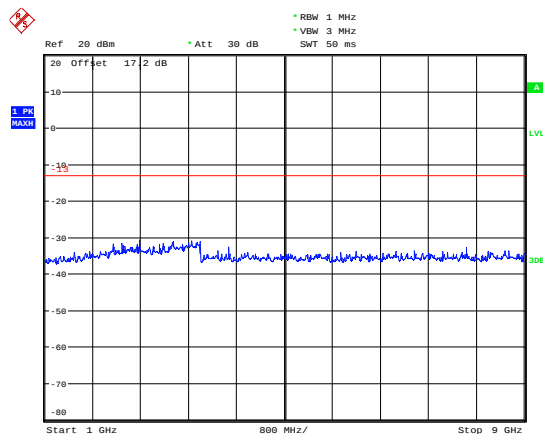

Date: 6.JUN.2019 15:49:13




WCDMA Band V CH-Low 30MHz ~ 1GHz

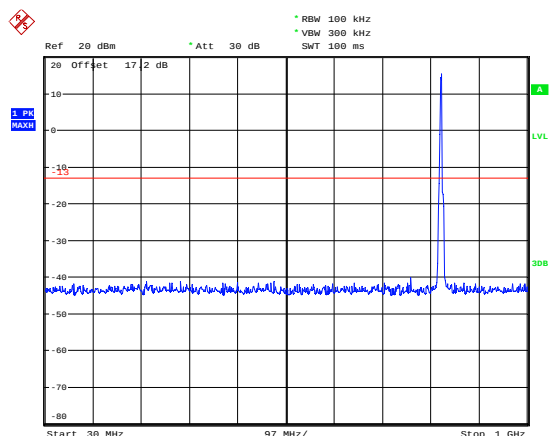


Date: 6.JUN.2019 17:53:18

WCDMA Band V CH-Low 1GHz ~ 9GHz

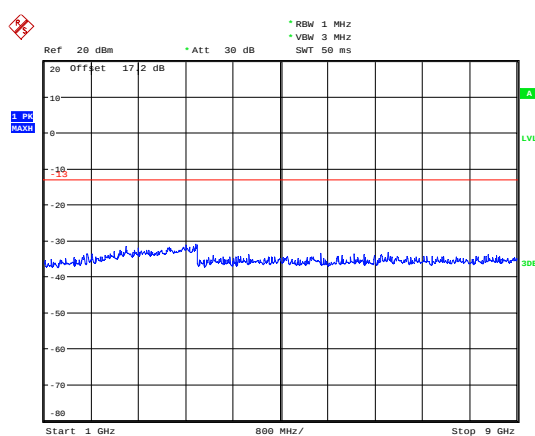


Date: 6.JUN.2019 17:54:58

WCDMA Band V CH-Middle 30MHz ~ 1GHz

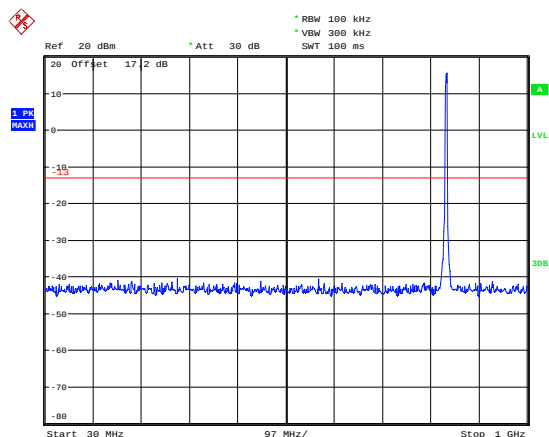


Date: 6.JUN.2019 17:53:36

WCDMA Band V CH-Middle 1GHz ~ 9GHz

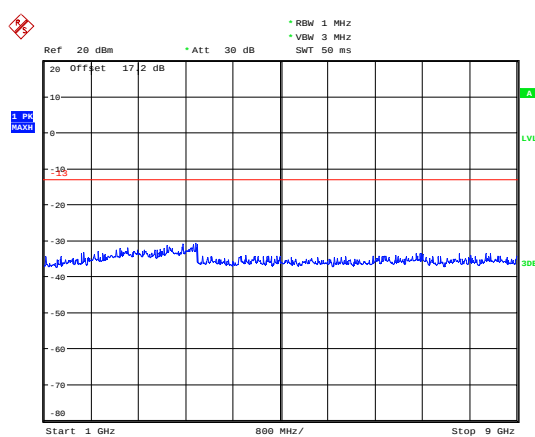


Date: 6.JUN.2019 17:54:36

WCDMA Band V CH-High 30MHz ~ 1GHz

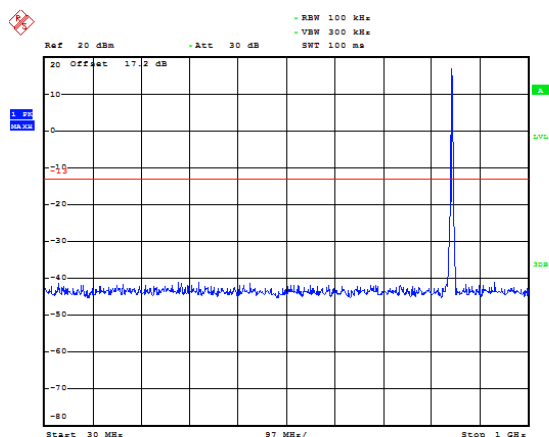

Date: 6.JUN.2019 17:53:54


WCDMA Band V CH-High 1GHz ~ 9GHz

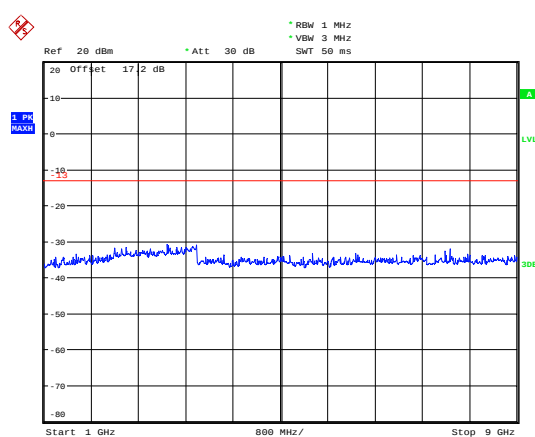

Date: 6.JUN.2019 17:54:22




LTE Band 5 1.4MHz CH-Low 30MHz~1GHz

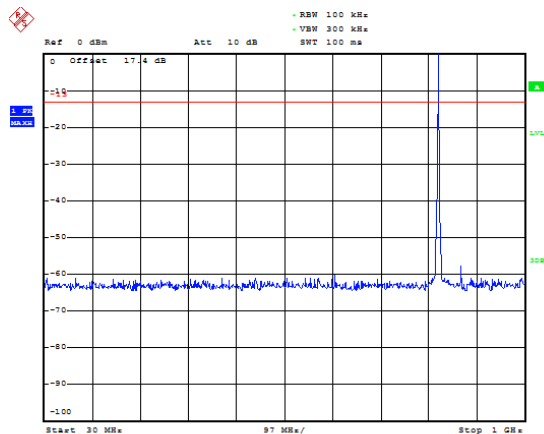


Date: 19.JAN.2019 14:42:34

LTE Band 5 1.4MHz CH-Low 1GHz~9GHz

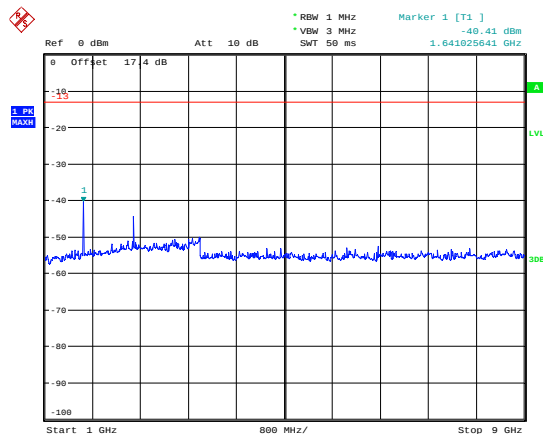


Date: 19.JAN.2019 14:43:04

LTE Band 5 1.4MHz CH-Middle 30MHz~1GHz

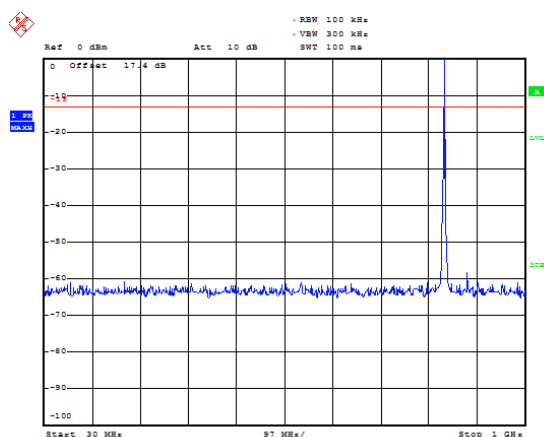


Date: 19.JAN.2019 14:43:44

LTE Band 5 1.4MHz CH-Middle 1GHz~9GHz

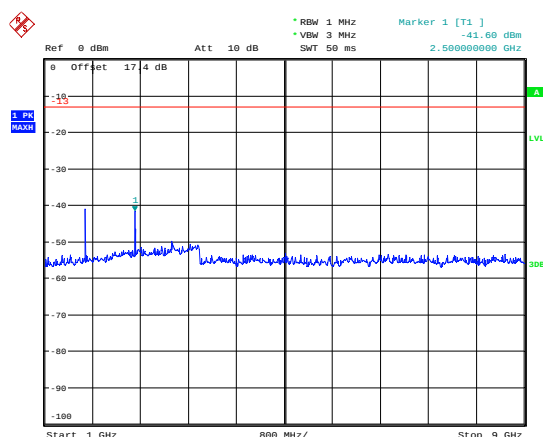


Date: 19.JAN.2019 14:43:27

LTE Band 5 1.4MHz CH-High 30MHz~1GHz

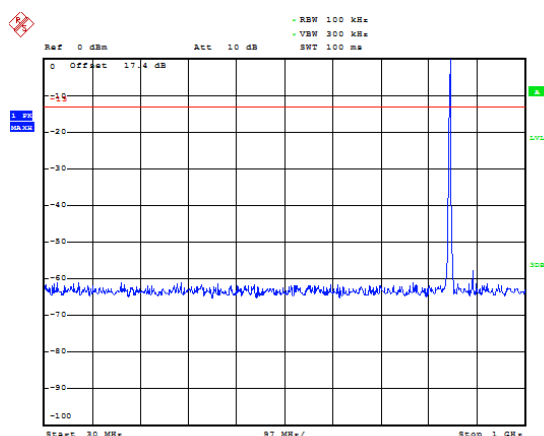

Date: 19.JAN.2019 14:44:03


LTE Band 5 1.4MHz CH-High 1GHz~9GHz

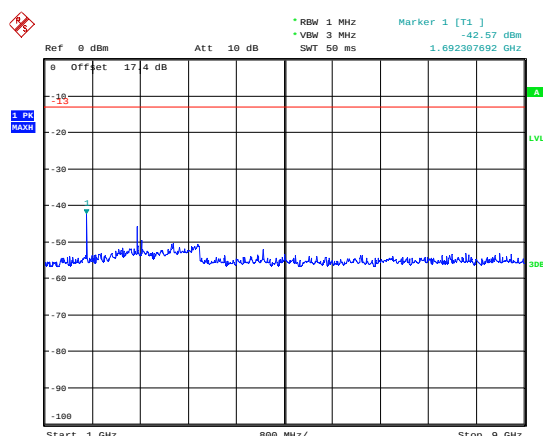

Date: 19.JAN.2019 14:44:20




LTE Band 5 3MHz CH-Low 30MHz~1GHz

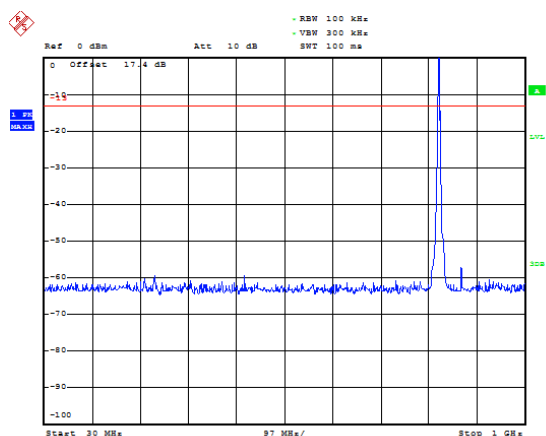


Date: 19.JAN.2019 14:45:05

LTE Band 5 3MHz CH-Low 1GHz~9GHz

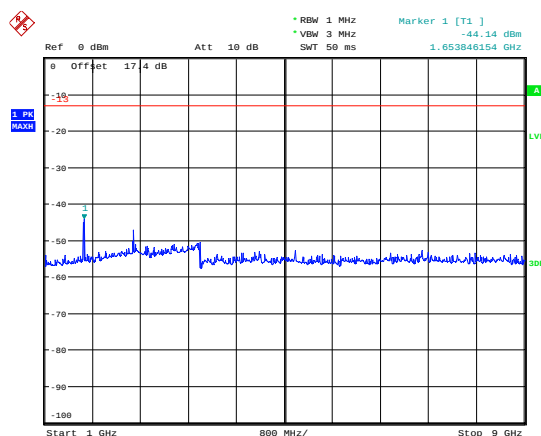


Date: 19.JAN.2019 14:45:12

LTE Band 5 3MHz CH-Middle 30MHz~1GHz

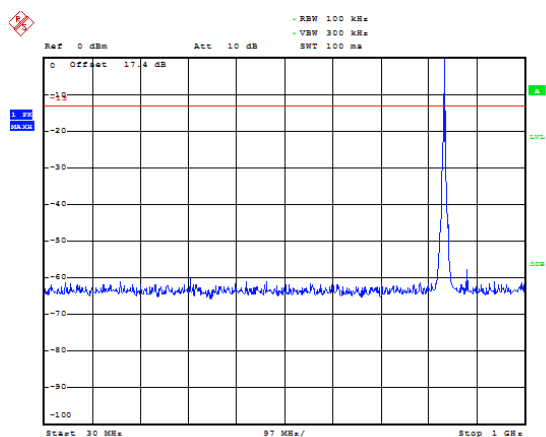


Date: 19.JAN.2019 14:45:52

LTE Band 5 3MHz CH-Middle 1GHz~9GHz

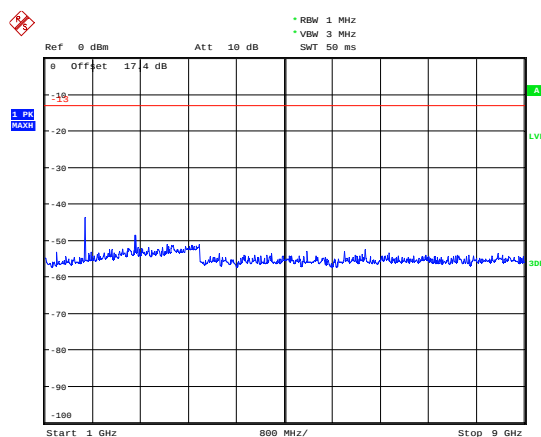


Date: 19.JAN.2019 14:46:09

LTE Band 5 3MHz CH-High 30MHz~1GHz

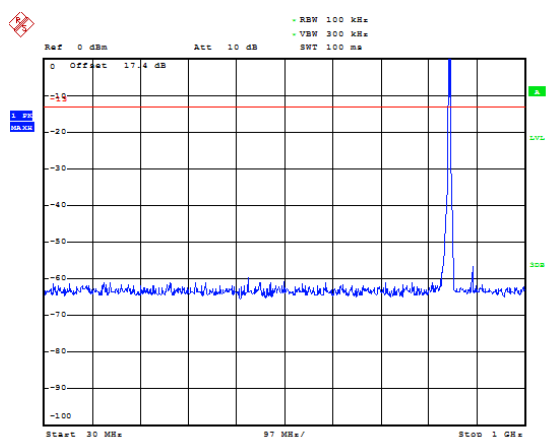

Date: 19.JAN.2019 14:46:50


LTE Band 5 3MHz CH-High 1GHz~9GHz

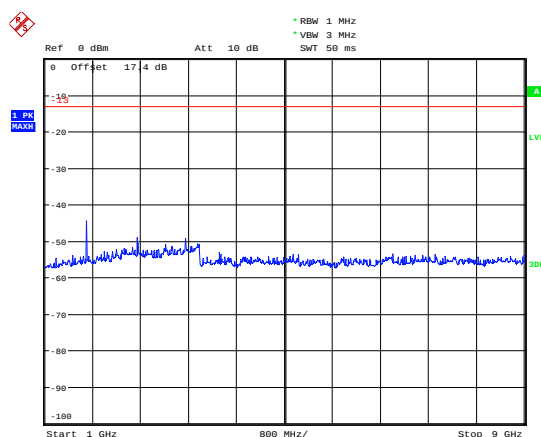

Date: 19.JAN.2019 14:46:35




LTE Band 5 5MHz CH-Low 30MHz~1GHz

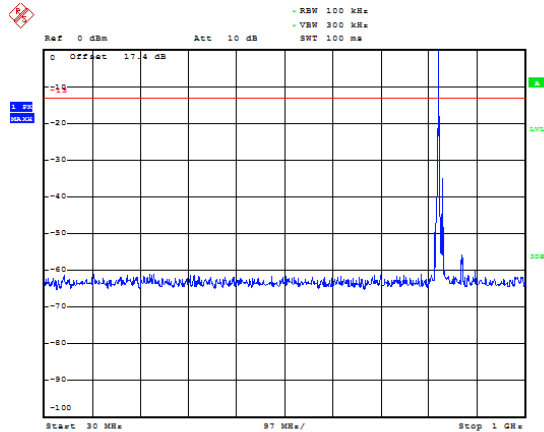


Date: 19.JAN.2019 14:48:03

LTE Band 5 5MHz CH-Low 1GHz~9GHz

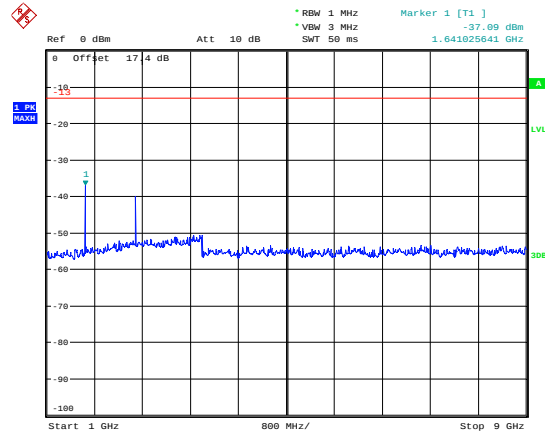


Date: 19.JAN.2019 14:48:23

LTE Band 5 5MHz CH-Middle 30MHz~1GHz

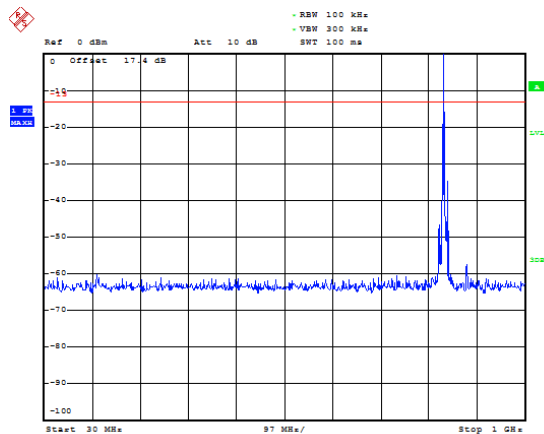


Date: 19.JAN.2019 14:48:59

LTE Band 5 5MHz CH-Middle 1GHz~9GHz

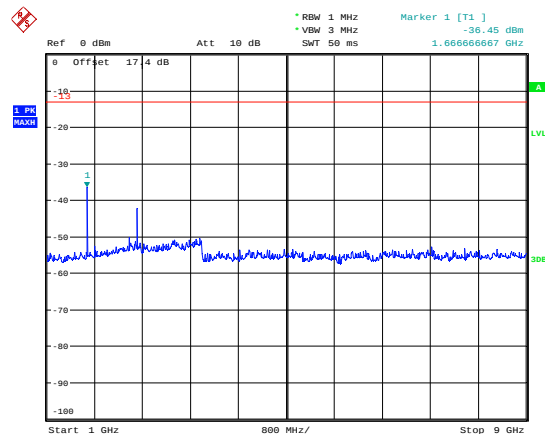


Date: 19.JAN.2019 14:48:43

LTE Band 5 5MHz CH-High 30MHz~1GHz

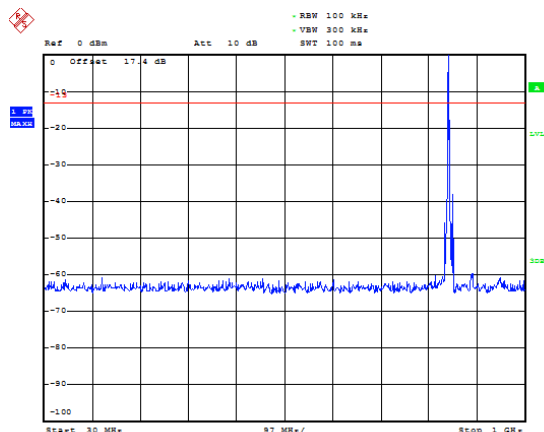

Date: 19.JAN.2019 14:49:21


LTE Band 5 5MHz CH-High 1GHz~9GHz

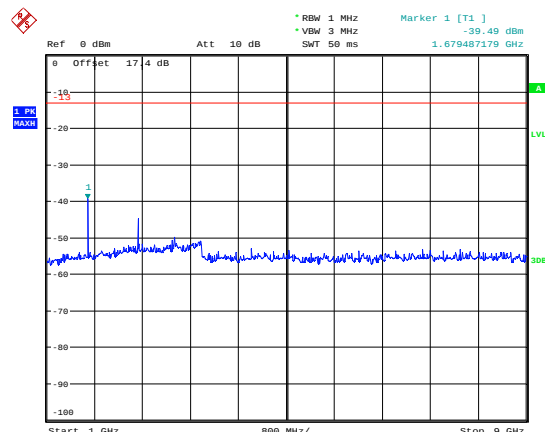

Date: 19.JAN.2019 14:49:37




LTE Band 5 10MHz CH-Low 30MHz~1GHz

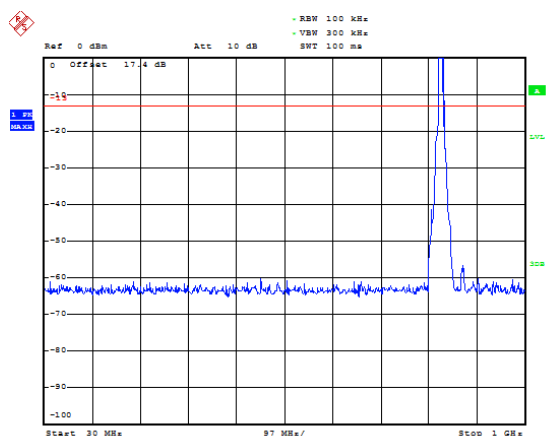


Date: 19.JAN.2019 14:51:04

LTE Band 5 10MHz CH-Low 1GHz~9GHz

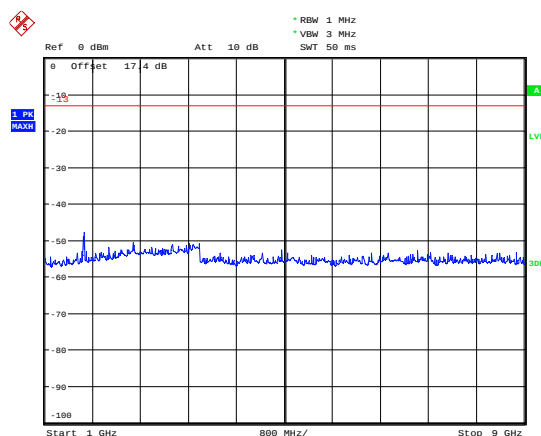


Date: 19.JAN.2019 14:58:47

LTE Band 5 10MHz CH-Middle 30MHz~1GHz

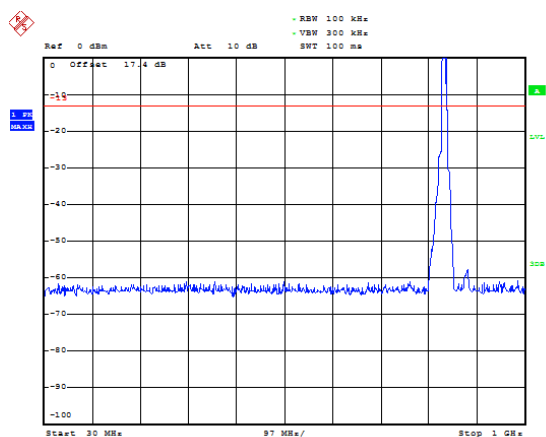


Date: 19.JAN.2019 14:51:21

LTE Band 5 10MHz CH-Middle 1GHz~9GHz

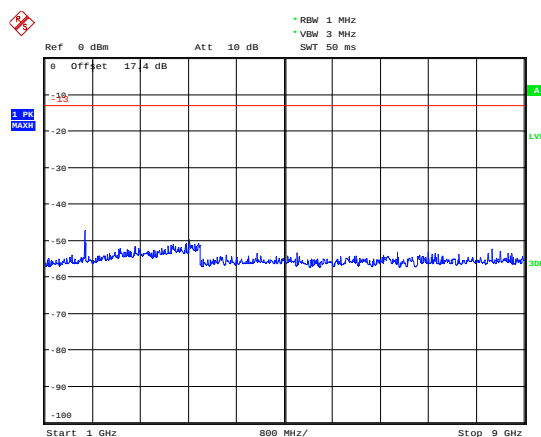


Date: 19.JAN.2019 14:51:36

LTE Band 5 10MHz CH-High 30MHz~1GHz

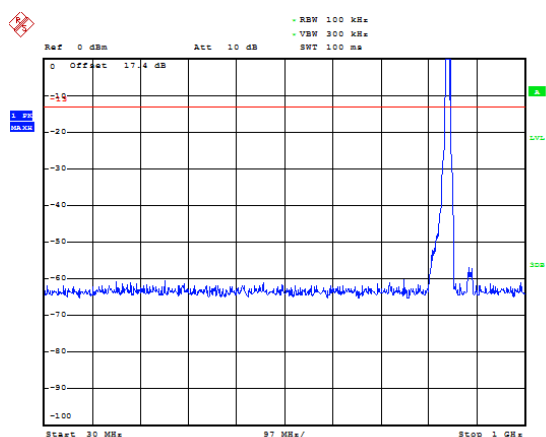

Date: 19.JAN.2019 14:52:06


LTE Band 5 10MHz CH-High 1GHz~9GHz

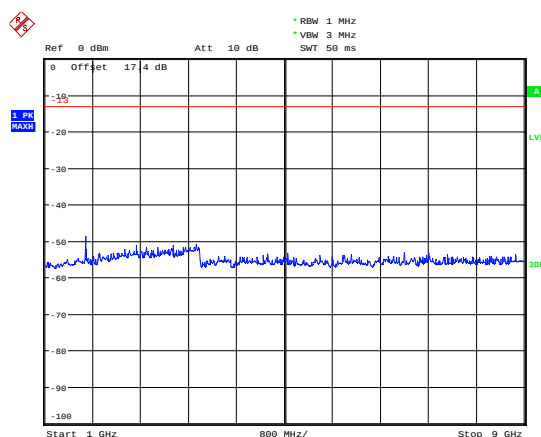

Date: 19.JAN.2019 14:51:52




LTE Band 26 1.4MHz CH-Low 30MHz~1GHz

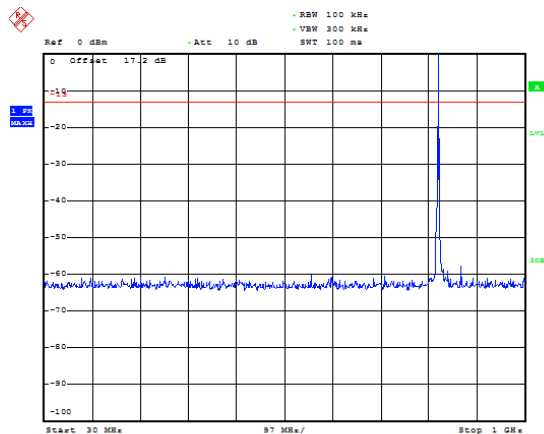


Date: 4.JUN.2019 11:56:59

LTE Band 26 1.4MHz CH-Low 1GHz~9GHz

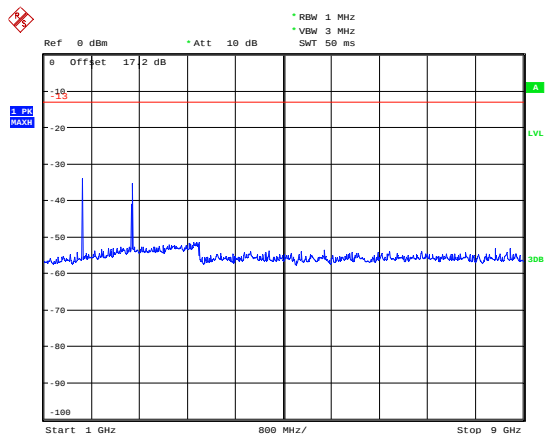


Date: 4.JUN.2019 13:14:15

LTE Band 26 1.4MHz CH-Middle 30MHz~1GHz

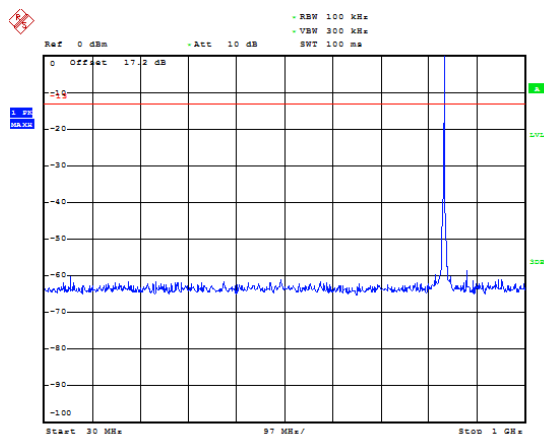


Date: 4.JUN.2019 11:57:22

LTE Band 26 1.4MHz CH-Middle 1GHz~9GHz

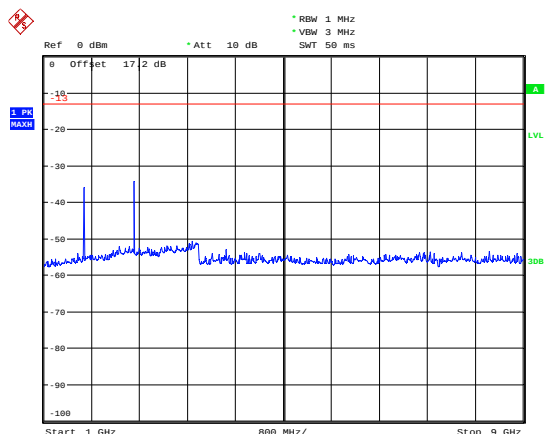


Date: 4.JUN.2019 13:14:29

LTE Band 26 1.4MHz CH-High 30MHz~1GHz

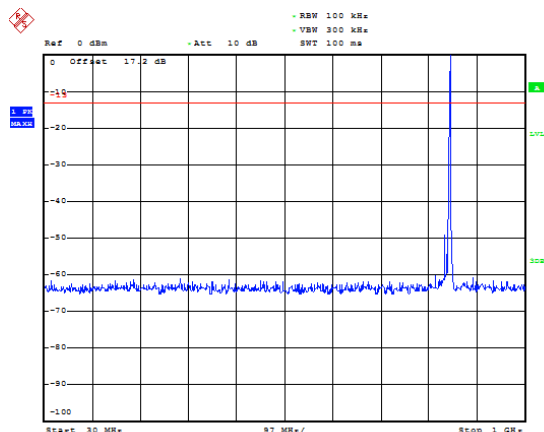

Date: 4.JUN.2019 11:57:36


LTE Band 26 1.4MHz CH-High 1GHz~9GHz

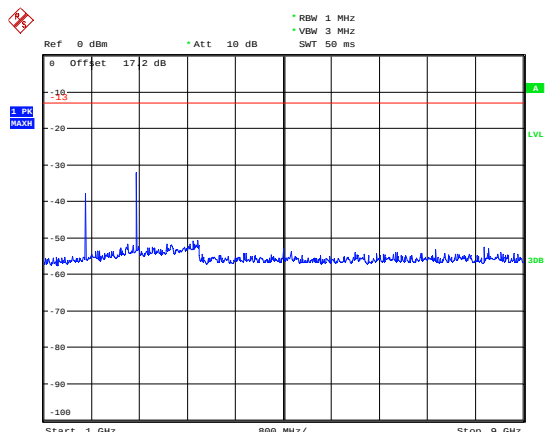

Date: 4.JUN.2019 13:14:44




LTE Band 26 3MHz CH-Low 30MHz~1GHz

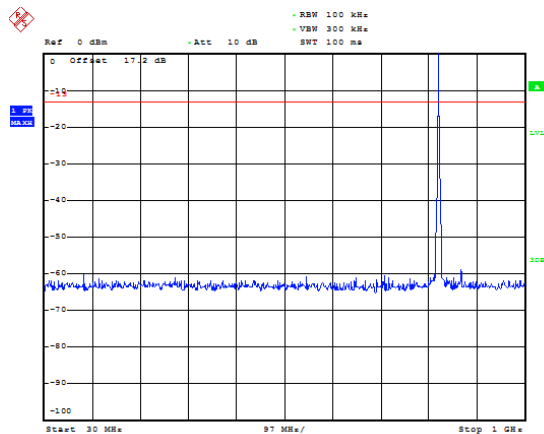


Date: 4.JUN.2019 12:14:04

LTE Band 26 3MHz CH-Low 1GHz~9GHz

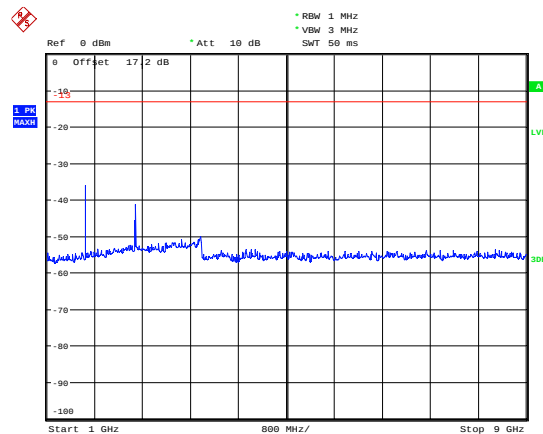


Date: 4.JUN.2019 14:55:47

LTE Band 26 3MHz CH-Middle 30MHz~1GHz

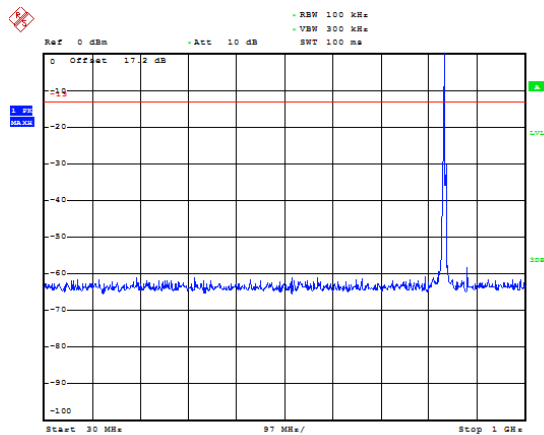


Date: 4.JUN.2019 12:14:21

LTE Band 26 3MHz CH-Middle 1GHz~9GHz

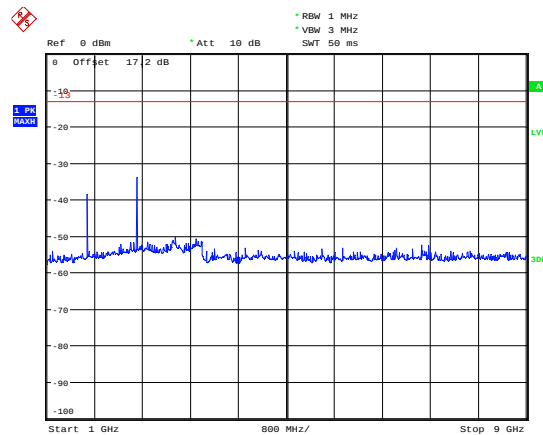


Date: 4.JUN.2019 14:56:03

LTE Band 26 3MHz CH-High 30MHz~1GHz

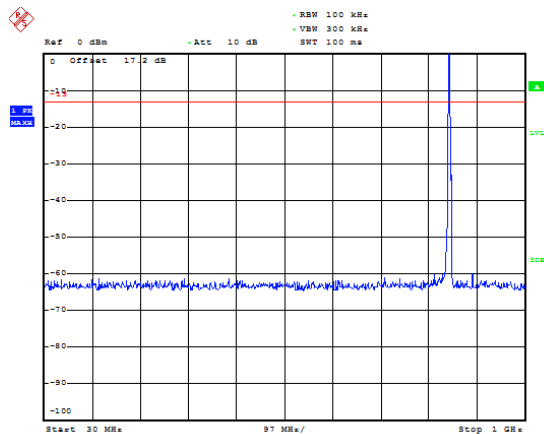

Date: 4.JUN.2019 12:14:36


LTE Band 26 3MHz CH-High 1GHz~9GHz

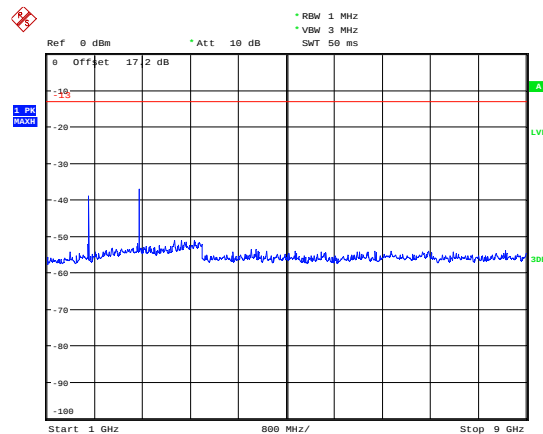

Date: 4.JUN.2019 14:56:22




LTE Band 26 5MHz CH-Low 30MHz~1GHz

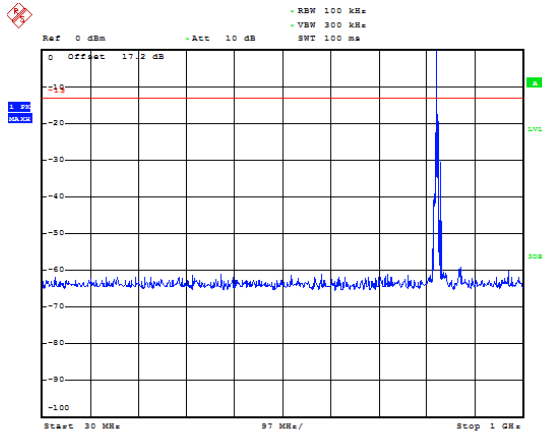


Date: 4.JUN.2019 12:16:43

LTE Band 26 5MHz CH-Low 1GHz~9GHz

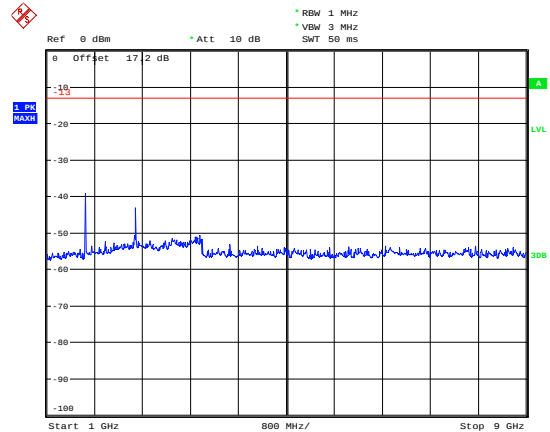


Date: 4.JUN.2019 14:57:46

LTE Band 26 5MHz CH-Middle 30MHz~1GHz

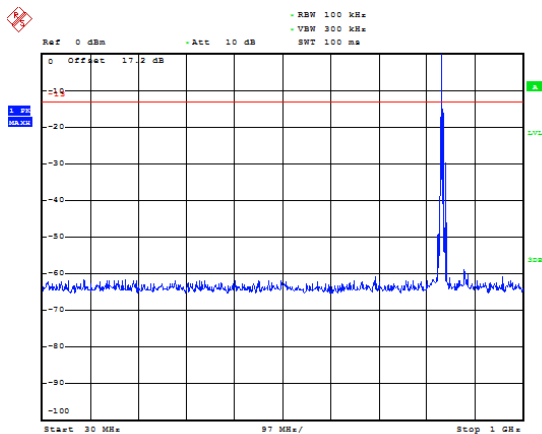


Date: 4.JUN.2019 12:17:00

LTE Band 26 5MHz CH-Middle 1GHz~9GHz

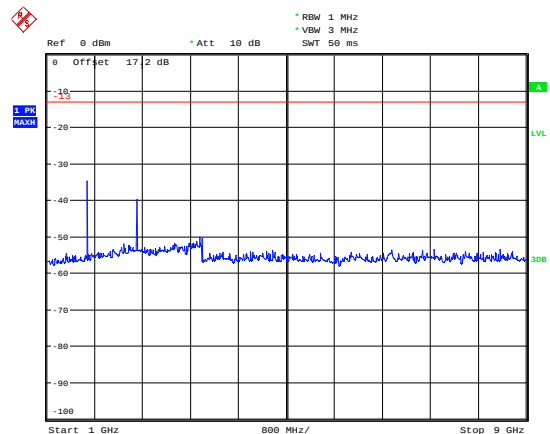


Date: 4.JUN.2019 14:58:00

LTE Band 26 5MHz CH-High 30MHz~1GHz

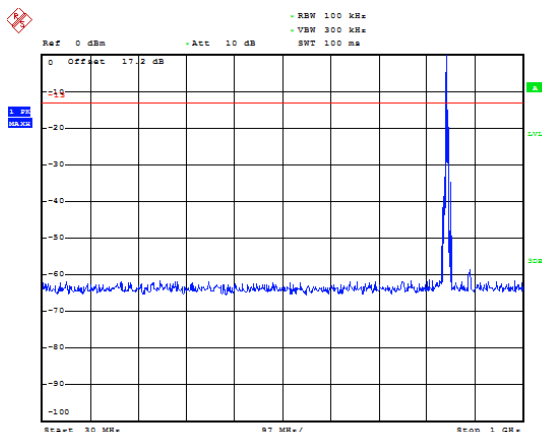

Date: 4.JUN.2019 12:17:16


LTE Band 26 5MHz CH-High 1GHz~9GHz

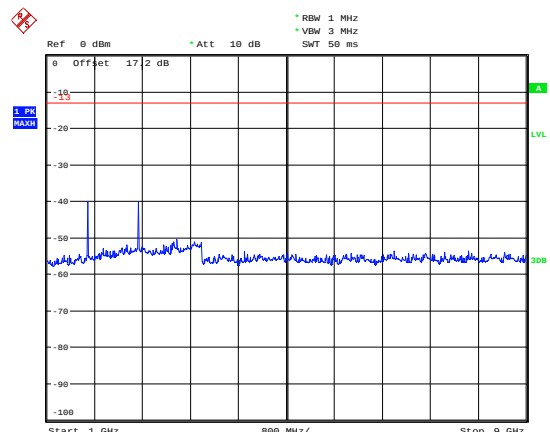

Date: 4.JUN.2019 14:58:12




LTE Band 26 10MHz CH-Low 30MHz~1GHz

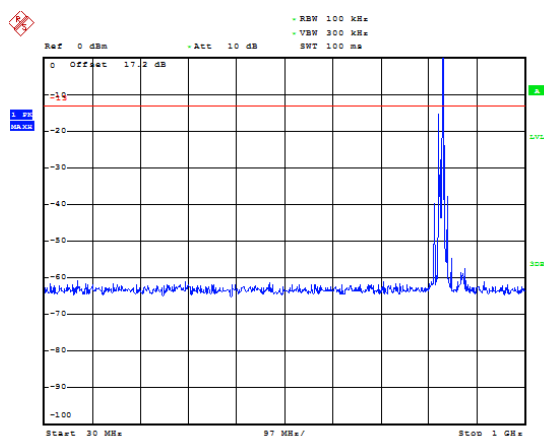


Date: 4.JUN.2019 12:36:25

LTE Band 26 10MHz CH-Low 1GHz~9GHz

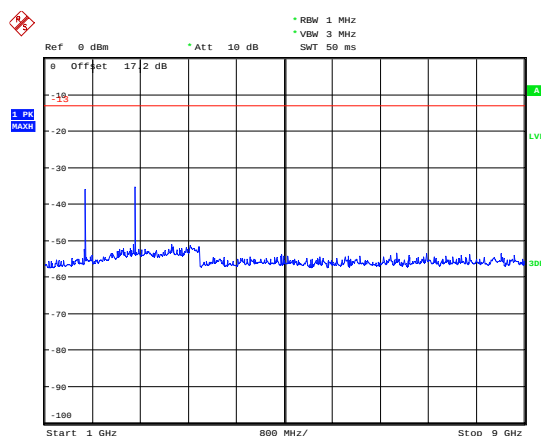


Date: 4.JUN.2019 12:41:19

LTE Band 26 10MHz CH-Middle 30MHz~1GHz

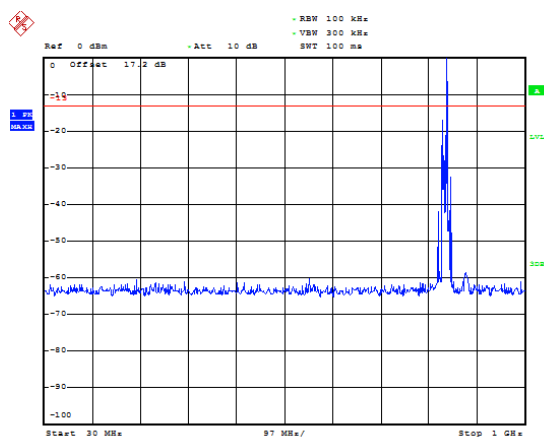


Date: 4.JUN.2019 12:36:39

LTE Band 26 10MHz CH-Middle 1GHz~9GHz

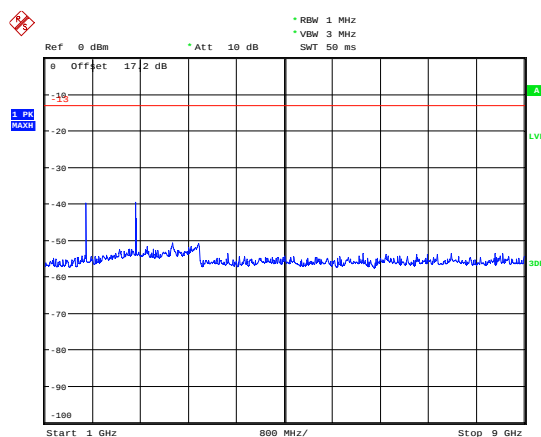


Date: 4.JUN.2019 12:41:34

LTE Band 26 10MHz CH-High 30MHz~1GHz

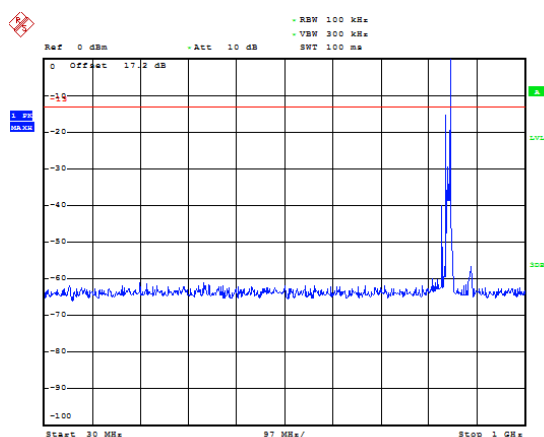

Date: 4.JUN.2019 12:36:54


LTE Band 26 10MHz CH-High 1GHz~9GHz

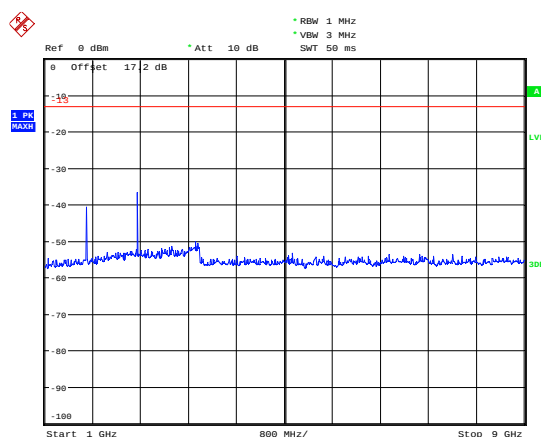

Date: 4.JUN.2019 12:41:53




LTE Band 26 15MHz CH-Low 30MHz~1GHz

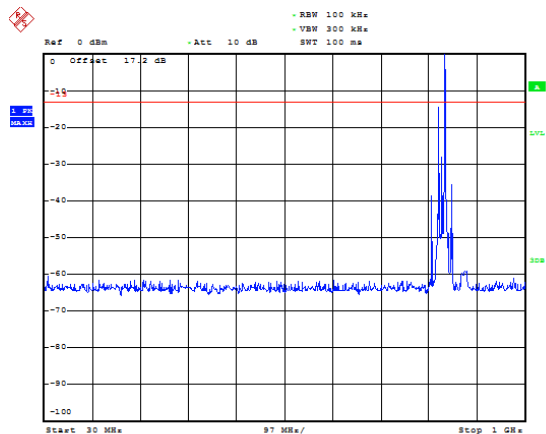


Date: 4.JUN.2019 12:37:54

LTE Band 26 15MHz CH-Low 1GHz~9GHz

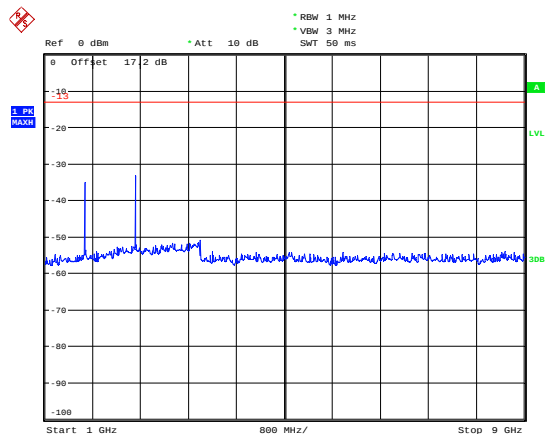


Date: 4.JUN.2019 12:40:43

LTE Band 26 15MHz CH-Middle 30MHz~1GHz

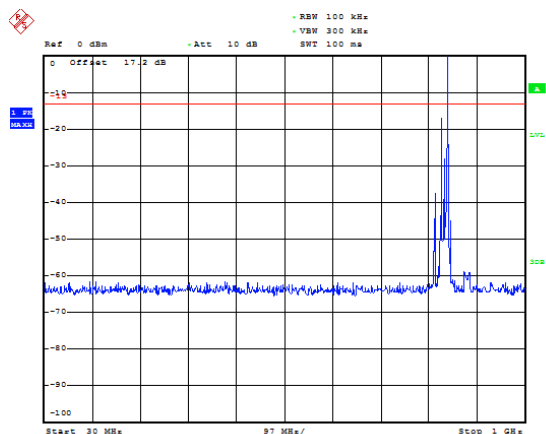


Date: 4.JUN.2019 12:38:12

LTE Band 26 15MHz CH-Middle 1GHz~9GHz

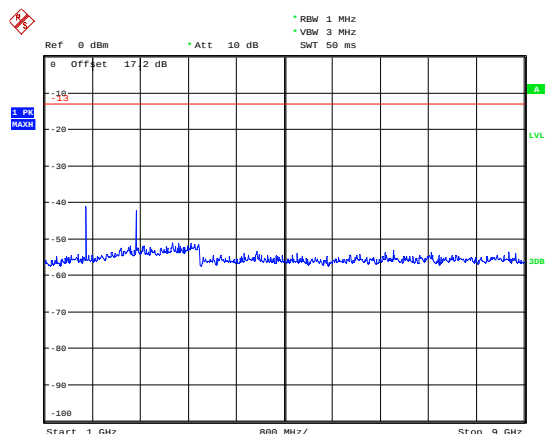


Date: 4.JUN.2019 12:40:29

LTE Band 26 15MHz CH-High 30MHz~1GHz

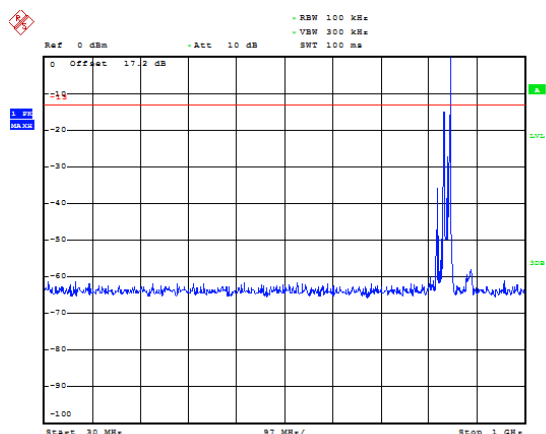

Date: 4.JUN.2019 12:38:25

LTE Band 26 15MHz CH-High 1GHz~9GHz

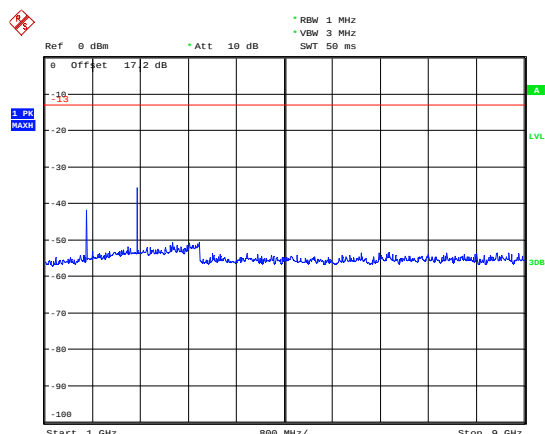

Date: 4.JUN.2019 12:40:11

5.8. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAG} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

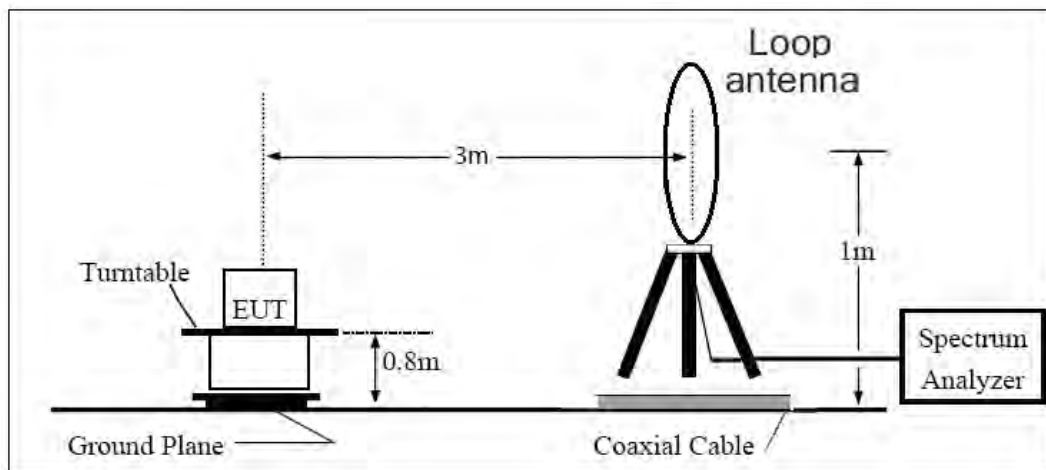

30MHz ~ 1GHz

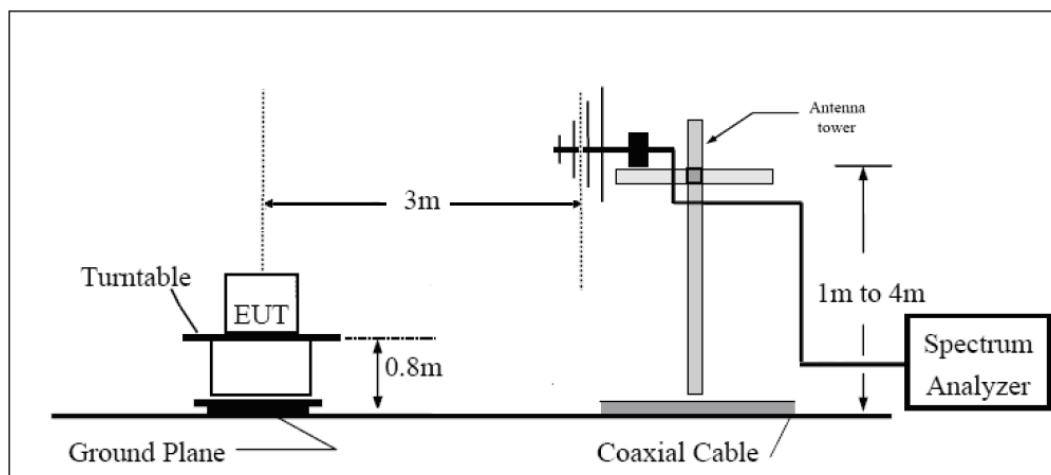

Above 1GHz

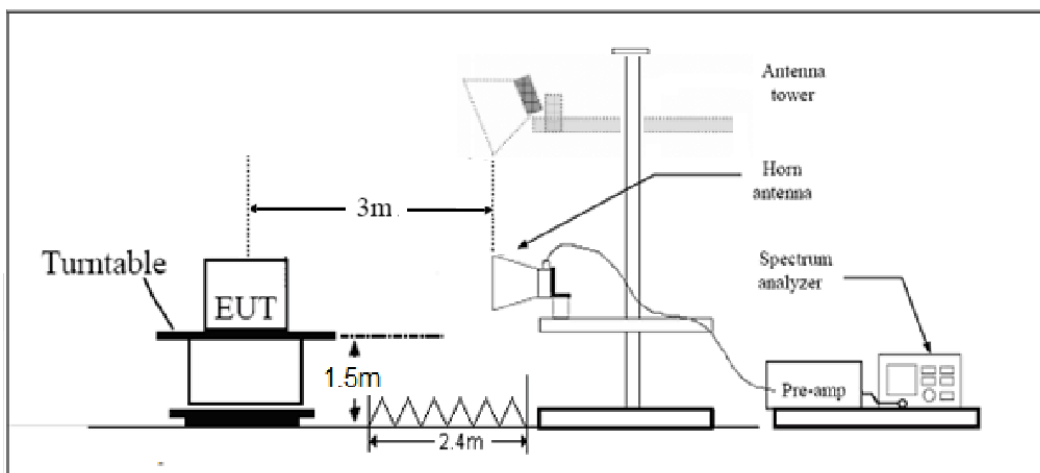



Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 850 CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1648	-54.83	2.00	10.15	Horizontal	-48.83	-13.00	35.83	315
3	2473	-54.16	2.51	11.35	Horizontal	-47.47	-13.00	34.47	45
4	3297	-58.29	4.20	10.85	Horizontal	-53.79	-13.00	40.79	135
5	4121	-46.44	5.20	11.35	Horizontal	-42.44	-13.00	29.44	45
6	4945	-52.92	5.50	11.95	Horizontal	-48.62	-13.00	35.62	135
7	5769	-55.41	5.70	13.55	Horizontal	-49.71	-13.00	36.71	45
8	6594	-55.50	6.30	13.75	Horizontal	-50.20	-13.00	37.20	0
9	7418	-52.48	6.80	13.85	Horizontal	-47.58	-13.00	34.58	315
10	8242	-52.43	6.90	14.25	Horizontal	-47.23	-13.00	34.23	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673	-33.81	2.00	10.75	Horizontal	-27.21	-13.00	14.21	0
3	2498	-46.98	2.51	11.05	Horizontal	-40.59	-13.00	27.59	90
4	3346	-58.88	4.20	11.15	Horizontal	-54.08	-13.00	41.08	225
5	4183	-48.98	5.20	11.15	Horizontal	-45.18	-13.00	32.18	315
6	5020	-53.36	5.50	11.95	Horizontal	-49.06	-13.00	36.06	45
7	5856	-55.78	5.70	13.55	Horizontal	-50.08	-13.00	37.08	90
8	6693	-55.59	6.30	13.75	Horizontal	-50.29	-13.00	37.29	0
9	7529	-52.53	6.80	13.85	Horizontal	-47.63	-13.00	34.63	45
10	8366	-51.68	6.90	14.25	Horizontal	-46.48	-13.00	33.48	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.



GSM 850 CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1698	-55.25	2.00	10.15	Horizontal	-49.25	-13.00	36.25	225
3	2546	-58.21	2.51	11.05	Horizontal	-51.82	-13.00	38.82	45
4	3395	-57.79	4.20	11.15	Horizontal	-52.99	-13.00	39.99	225
5	4244	-50.28	5.20	11.15	Horizontal	-46.48	-13.00	33.48	270
6	5093	-53.40	5.50	11.95	Horizontal	-49.10	-13.00	36.10	315
7	5942	-55.79	5.70	13.55	Horizontal	-50.09	-13.00	37.09	0
8	6790	-55.41	6.30	13.75	Horizontal	-50.11	-13.00	37.11	45
9	7639	-52.05	6.80	13.85	Horizontal	-47.15	-13.00	34.15	90
10	8488	-51.53	6.90	14.25	Horizontal	-46.33	-13.00	33.33	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1653	-44.22	2.00	10.15	Horizontal	-38.22	-13.00	25.22	45
3	2479	-63.80	2.51	11.35	Horizontal	-57.11	-13.00	44.11	90
4	3306	-57.54	4.20	10.85	Horizontal	-53.04	-13.00	40.04	90
5	4132	-52.85	5.20	11.35	Horizontal	-48.85	-13.00	35.85	135
6	4958	-53.68	5.50	11.95	Horizontal	-49.38	-13.00	36.38	135
7	5785	-54.47	5.70	13.55	Horizontal	-48.77	-13.00	35.77	45
8	6611	-54.82	6.30	13.75	Horizontal	-49.52	-13.00	36.52	45
9	7438	-54.77	6.80	13.85	Horizontal	-49.87	-13.00	36.87	90
10	8264	-51.42	6.90	14.25	Horizontal	-46.22	-13.00	33.22	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673	-57.99	2.00	10.75	Horizontal	-51.39	-13.00	38.39	135
3	2510	-62.08	2.51	11.05	Horizontal	-55.69	-13.00	42.69	135
4	3346	-58.07	4.20	11.15	Horizontal	-53.27	-13.00	40.27	90
5	4183	-55.34	5.20	11.15	Horizontal	-51.54	-13.00	38.54	135
6	5020	-53.86	5.50	11.95	Horizontal	-49.56	-13.00	36.56	135
7	5856	-54.63	5.70	13.55	Horizontal	-48.93	-13.00	35.93	45
8	6693	-55.06	6.30	13.75	Horizontal	-49.76	-13.00	36.76	45
9	8366	-54.43	6.80	13.85	Horizontal	-49.53	-13.00	36.53	90
10	3346	-51.39	6.90	14.25	Horizontal	-46.19	-13.00	33.19	135
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									

WCDMA Band V CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1693	-49.63	2.00	10.15	Horizontal	-43.63	-13.00	30.63	45
3	2540	-62.40	2.51	11.05	Horizontal	-56.01	-13.00	43.01	45
4	3386	-57.57	4.20	11.15	Horizontal	-52.77	-13.00	39.77	135
5	4233	-54.56	5.20	11.15	Horizontal	-50.76	-13.00	37.76	45
6	5080	-52.60	5.50	11.95	Horizontal	-48.30	-13.00	35.30	135
7	5926	-55.16	5.70	13.55	Horizontal	-49.46	-13.00	36.46	135
8	6773	-55.71	6.30	13.75	Horizontal	-50.41	-13.00	37.41	45
9	7619	-52.03	6.80	13.85	Horizontal	-47.13	-13.00	34.13	45
10	8466	-50.45	6.90	14.25	Horizontal	-45.25	-13.00	32.25	90
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									



LTE Band 5 10MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1658.0	-68.22	2.00	10.75	Horizontal	-61.62	-13.00	48.62	135
3	2487.0	-61.48	2.51	11.05	Horizontal	-55.09	-13.00	42.09	90
4	3316.0	-59.46	4.20	11.15	Horizontal	-54.66	-13.00	41.66	225
5	4145.0	-54.67	5.20	11.15	Horizontal	-50.87	-13.00	37.87	45
6	4974.0	-53.68	5.50	11.95	Horizontal	-49.38	-13.00	36.38	90
7	5803.0	-54.21	5.70	13.55	Horizontal	-48.51	-13.00	35.51	135
8	6632.0	-56.16	6.30	13.75	Horizontal	-50.86	-13.00	37.86	45
9	7461.0	-53.24	6.80	13.85	Horizontal	-48.34	-13.00	35.34	315
10	8290.0	-52.38	6.90	14.25	Horizontal	-47.18	-13.00	34.18	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-68.13	2.00	10.75	Horizontal	-61.53	-13.00	48.53	0
3	2509.5	-62.84	2.51	11.05	Horizontal	-56.45	-13.00	43.45	315
4	3346.0	-59.25	4.20	11.15	Horizontal	-54.45	-13.00	41.45	225
5	4182.5	-54.89	5.20	11.15	Horizontal	-51.09	-13.00	38.09	135
6	5019.0	-53.56	5.50	11.95	Horizontal	-49.26	-13.00	36.26	45
7	5855.5	-55.98	5.70	13.55	Horizontal	-50.28	-13.00	37.28	0
8	6692.0	-57.76	6.30	13.75	Horizontal	-52.46	-13.00	39.46	315
9	7528.5	-52.36	6.80	13.85	Horizontal	-47.46	-13.00	34.46	270
10	8365.0	-52.64	6.90	14.25	Horizontal	-47.44	-13.00	34.44	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 10MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1688.0	-67.31	2.00	10.75	Horizontal	-60.71	-13.00	47.71	90
3	2532.0	-60.43	2.51	11.05	Horizontal	-54.04	-13.00	41.04	180
4	3376.0	-59.41	4.20	11.15	Horizontal	-54.61	-13.00	41.61	0
5	4220.0	-55.29	5.20	11.15	Horizontal	-51.49	-13.00	38.49	315
6	5064.0	-53.56	5.50	11.95	Horizontal	-49.26	-13.00	36.26	225
7	5908.0	-55.96	5.70	13.55	Horizontal	-50.26	-13.00	37.26	135
8	6752.0	-56.51	6.30	13.75	Horizontal	-51.21	-13.00	38.21	45
9	7596.0	-52.90	6.80	13.85	Horizontal	-48.00	-13.00	35.00	45
10	8440.0	-51.98	6.90	14.25	Horizontal	-46.78	-13.00	33.78	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 15MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1663.00	-67.71	2.00	10.75	Horizontal	-61.11	-13.00	48.11	315
3	2494.50	-65.36	2.51	11.05	Horizontal	-58.97	-13.00	45.97	225
4	3286.00	-58.48	4.20	11.15	Horizontal	-53.68	-13.00	40.68	180
5	4107.50	-54.25	5.20	11.15	Horizontal	-50.45	-13.00	37.45	45
6	4929.00	-53.26	5.50	11.95	Horizontal	-48.96	-13.00	35.96	90
7	5750.50	-54.32	5.70	13.55	Horizontal	-48.62	-13.00	35.62	225
8	6572.00	-56.63	6.30	13.75	Horizontal	-51.33	-13.00	38.33	45
9	7393.50	-52.54	6.80	13.85	Horizontal	-47.64	-13.00	34.64	135
10	8215.00	-53.10	6.90	14.25	Horizontal	-47.90	-13.00	34.90	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-68.03	2.00	10.75	Horizontal	-61.43	-13.00	48.43	90
3	2509.50	-66.75	2.51	11.05	Horizontal	-60.36	-13.00	47.36	225
4	3346.00	-59.27	4.20	11.15	Horizontal	-54.47	-13.00	41.47	180
5	4182.50	-54.73	5.20	11.15	Horizontal	-50.93	-13.00	37.93	270
6	5019.00	-53.82	5.50	11.95	Horizontal	-49.52	-13.00	36.52	315
7	5855.50	-55.43	5.70	13.55	Horizontal	-49.73	-13.00	36.73	225
8	6692.00	-56.37	6.30	13.75	Horizontal	-51.07	-13.00	38.07	135
9	7528.50	-52.53	6.80	13.85	Horizontal	-47.63	-13.00	34.63	45
10	8365.00	-53.15	6.90	14.25	Horizontal	-47.95	-13.00	34.95	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 15MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1683.00	-66.79	2.00	10.75	Horizontal	-60.19	-13.00	47.19	915
3	2524.50	-64.70	2.51	11.05	Horizontal	-58.31	-13.00	45.31	0
4	3366.00	-64.06	4.20	11.15	Horizontal	-59.26	-13.00	46.26	315
5	4207.50	-56.16	5.20	11.15	Horizontal	-52.36	-13.00	39.36	270
6	5049.00	-52.95	5.50	11.95	Horizontal	-48.65	-13.00	35.65	45
7	5890.50	-54.33	5.70	13.55	Horizontal	-48.63	-13.00	35.63	0
8	6732.00	-56.93	6.30	13.75	Horizontal	-51.63	-13.00	38.63	90
9	7573.50	-52.55	6.80	13.85	Horizontal	-47.65	-13.00	34.65	180
10	8415.00	-53.16	6.90	14.25	Horizontal	-47.96	-13.00	34.96	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-20	2020-05-21
RF Cable	Agilent	SMA 15cm	0001	2019-03-15	2019-06-14
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Front Side



Back Side
a: EUT




b: Adapter



c: USB Cable

Picture 1 EUT and Accessory

A.2 Test Setup

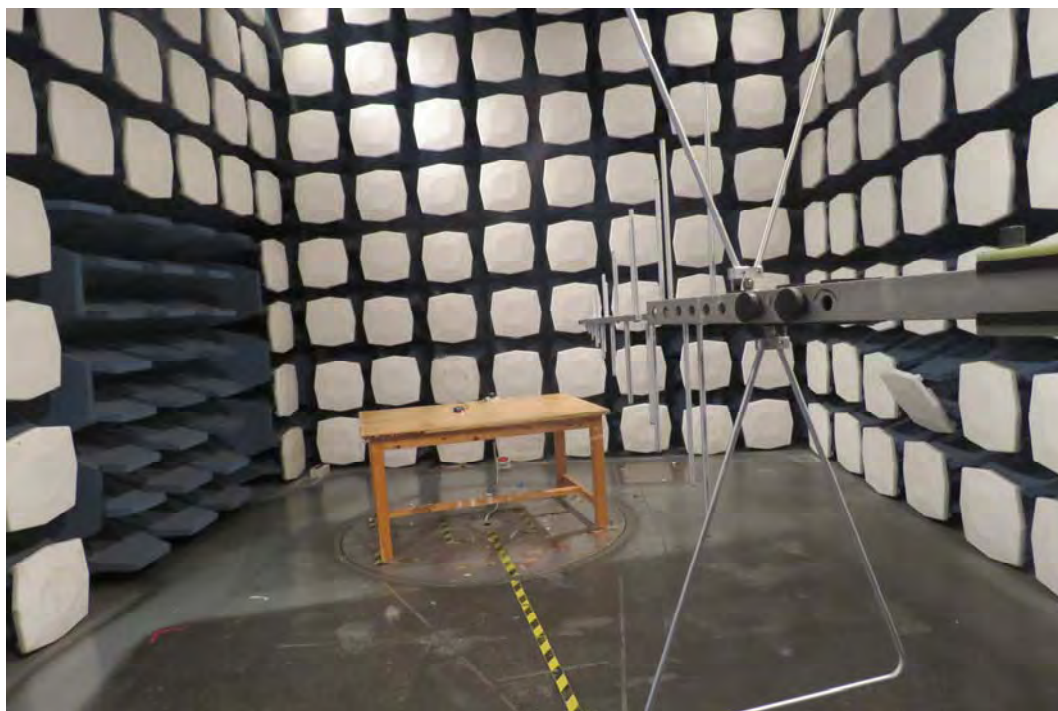

30MHz ~ 1GHz



Above 1GHz

Picture 2 Radiated Spurious Emissions Test setup