




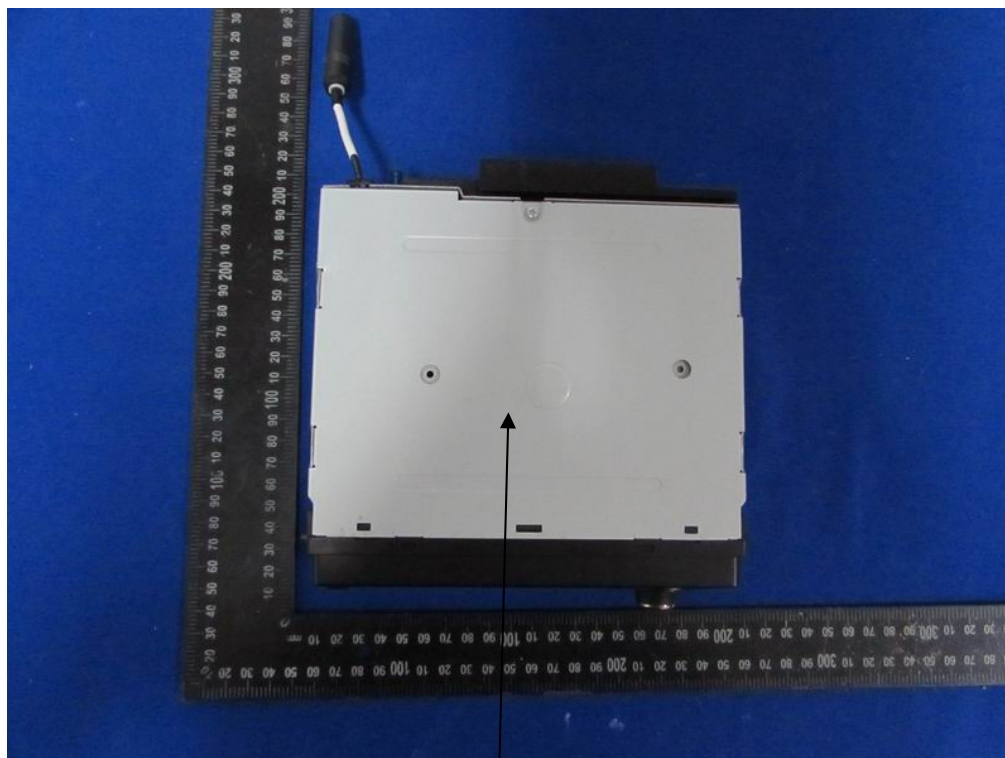

RM1902

Radio BT DAB+
Frequency Range:
DAB: 174.928 - 239.2MHz
FM : 87.5 - 108MHz
AM : 522 - 1620KHz
USB Output : 5V = 1A
Loudspeakers : 4 - 8 Ohms
Power supply :
DC12V = 15A Negative Earth

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES AND REGULATIONS. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:
 1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND
 2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.









Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice #055 dated June 28, 2007.


AAMP Global, 25 Woolmer Trading Est. CAN ICES-3(B)/NMB-3(B)
 Woolmer Way, Bordon, Hampshire
 United Kingdom, GU35 9QE

Connectors and Signals

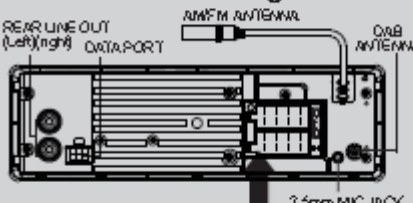

Switch the FUSE location to change the ACC & B+ Pin outlocation on the ISO connector

A



Fuse Position A

B



Fuse Position B