

6

5

4

3


2

1

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


Backlight

Place close to LED_PWM

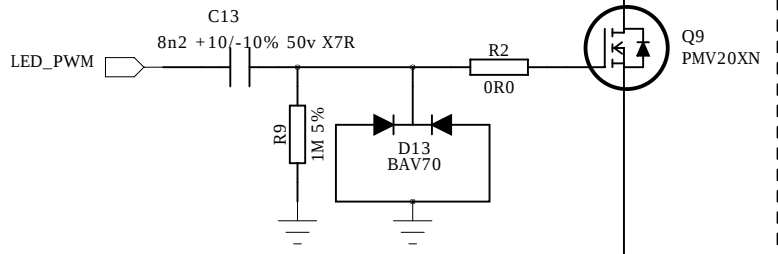


Backlight current draw = 20mA

Place close to LED_ISENS

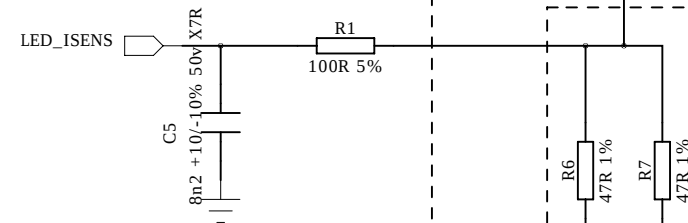

For LED voltage:	Use:
2.2V	2x47R
3.8V	2X27R

LED

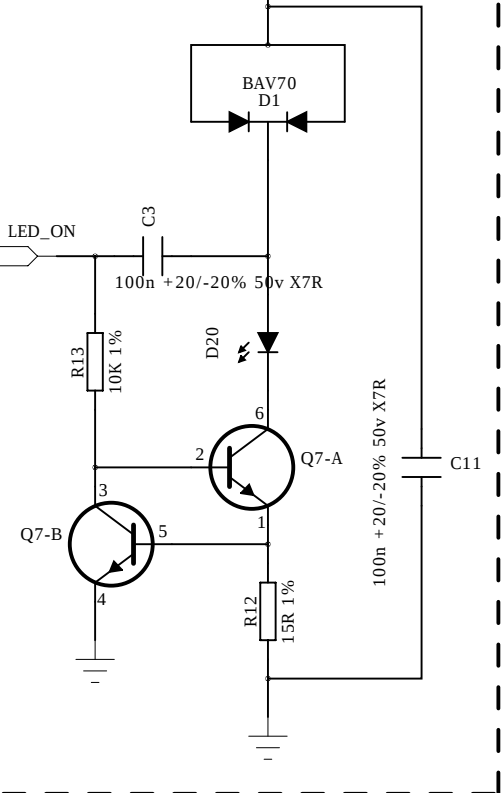

LED current draw = 30mA

COMPANY:		LINAK A/S	
TITLE:		HC20RFS	
DRAWN: HSA	DATED: 2014-02-24	CODE:	SIZE:
		DRAWING NO: 10907483-C	
CHECKED:	DATED:		
QUALITY CONTROL:	DATED:		
RELEASED:	DATED:		
SCALE:		SHEET: OF	