




D		C		B		A	
VER.	MARK	DCR/ECN NO.	DATE	UPDATE	DESCRIPTION	SIGNATURE	
0	N/A	N/A	2018/09/14		First Release	Yong-feng Li	

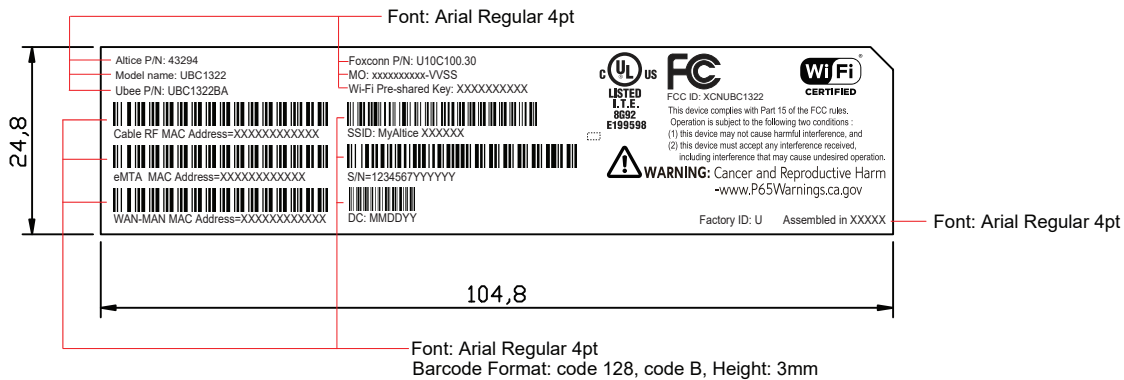

- NOTES:
- All of the barcode range and SN definition please refer to the test spec
 - SSID: MyAltice XXXXXX
SSID name is "MyAltice" concatenated with a space and the last 6 digits of Router "WAN" MAC(lowercase characters, no spaces or additional separation characters)
 - Wi-Fi Pre-shared Key: refer to the test spec
 - Foxconn P/N: U10C100.30, U10C100.30 is FOXCONN P/N,
Version: VVSS,
VV: the engineering version(refer to Foxconn label Rev. column in the cover of the MFG document)
SS: the version of A300/A400 product(refer to FDoc Rev. in the cover of MFG document)
 - Assembled in XXXXX (XXXXX:Country of Manufacture, base on the manufacture factory)
 - DC (Date Code), in MMDDYY format: MM表示月,DD表示天,YY表示年

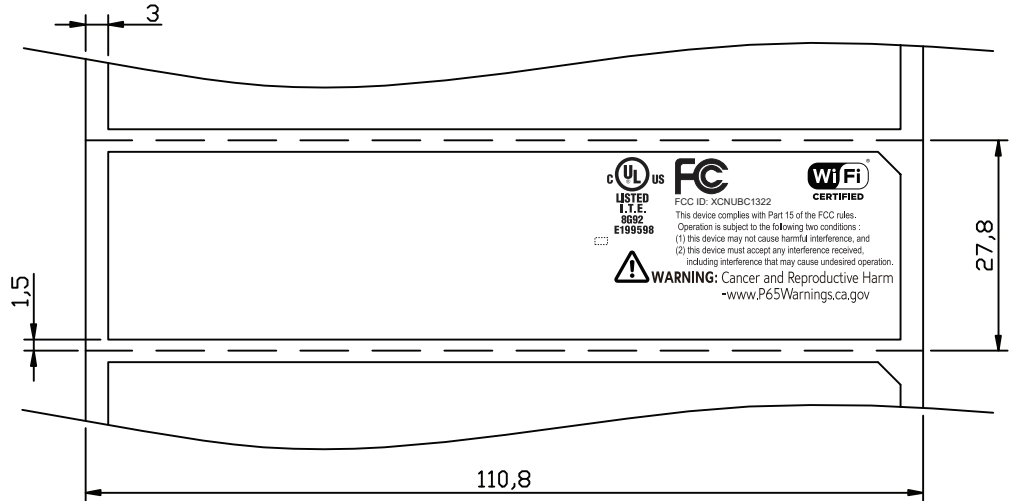

- NOTES:
- Surface Material color:white
 - Printing color is as color defined in artwork
 - Adhesive:Acrylic
 - Adhesive thickness:0.025+/-0.003mm
 - Adhesion to steel(180°磨钢粘着力):1.8+/-0.3 kg/25mm
 - Initial Tack (初期力) : 4 #/boll
 - Relese Power(90°剥离力):5 g/25mm
 - Holding Power(持粘力测试法):1 hr/kg/20mm²
 - Shipment method: Roll
 - This part must comply with RoHS.
 - Test condition :
 - Soak alcohol(99.7%) at first trial and repeat to soak every 50 times
 - Push force:250g
 - Speed:30 times/min
 - Move back and forth 100 times,printing was not removed

標籤製作黏貼方式/U10C100.30/00/ 2 OF 7

MATERIAL (SPEC.)												SCALE		FOXconn HON HAI PRECISION IND. CO., LTD CNSBG			
50# Mylar(matte)												1:1					
FINISH												SHEET					
膠面咬花												1/1					
Select												UNIT	PART NAME				
Dim. Tol.	A	B	C		EPS	EPE	BAG	CTN		V		mm	Device label				
0~6	0.05	0.05	0.10							0.20	0.05						
6~30	0.10	0.15	0.20		0.50	0.50	3.00			0.20	0.05						
30~120	0.15	0.20	0.30		0.50	0.50	5.00	2.00	0.25	0.10		SIZE	MODEL	PART NO.	DESIGNED		
120~300	0.20	0.30	0.40		1.00	1.00	10.00	3.00	0.30	0.15		A4	U10C100.30	500.02239.005	Haiky Liu		
300~450	0.25	0.40	0.50		2.00	2.00	15.00	5.00	0.50	0.20			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED		
450~600	0.30	0.50	0.60		3.00	3.00	20.00	5.00	0.80	0.20			N/A	N/A	Bailey Tan		
DRAFT TOLERANCE				±0.2°	CRITICAL DIM. MARK				*								